

(51) International Patent Classification:
H04W 4/10 (2009.01) **H04M 3/56** (2006.01)(21) International Application Number:
PCT/US2011/022764(22) International Filing Date:
27 January 2011 (27.01.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/703,245 10 February 2010 (10.02.2010) US(71) Applicant (for all designated States except US): **HARRIS CORPORATION** [US/US]; 1025 W. NASA Blvd., MS A-11I, Melbourne, Florida 32919 (US).(72) Inventors: **DELEUS, Willem**; Hollestraat 24, B-3190 Boortmeerbeek (BE). **JASTRAM, Robert**; 1854-A Hendersonville Road, Box 211, Asheville, North Carolina 28803 (US).(74) Agents: **YATSKO, Michael S.** et al.; Harris Corporation, 1025 W. NASA Blvd., MS A-11I, Melbourne, Florida 32919 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SIMULTANEOUS CONFERENCE CALLS WITH A SPEECH-TO-TEXT CONVERSION FUNCTION

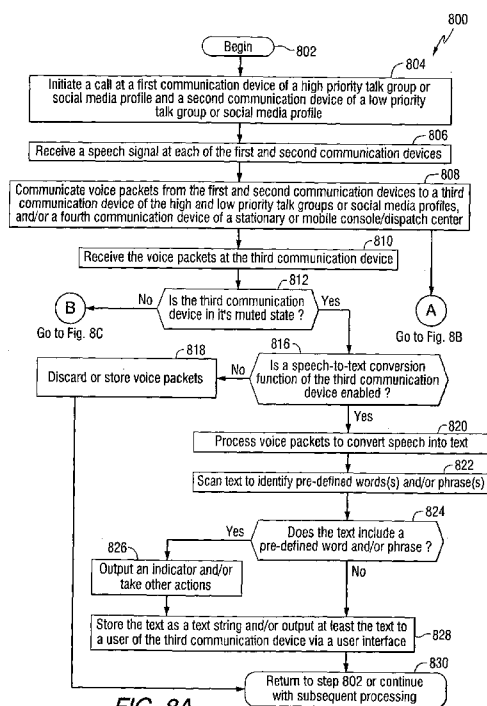


FIG. 8A

(57) Abstract: Systems (100) and methods (800, 900) for communicating information over a network (104). The methods involve receiving group call voice data (GCVD) communicated from a first communication device (102, 504, 704) and addressed to a second communication device (SCD). The GCVD (410, 512, 610, 712) is processed to convert it to text data in response to a condition occurring at SCD (106, 108, 112). The condition is selected from a group consisting of an audio mute condition and a concurrent voice communication condition. The speech - to - text conversion is performed at network equipment (114) and/or SCD. The text data is processed to output text defined thereby on a user interface (230) of SCD.

SIMULTANEOUS CONFERENCE CALLS WITH A SPEECH - TO - TEXT CONVERSION FUNCTION

The inventive arrangements relate to communication systems, and
5 more particularly to systems and method for providing group calls over a network.

There are various communication networks known in the art. Such
communication networks include a Land Mobile Radio (LMR) network, a Wideband
Code Division Multiple Access (WCDMA) based network, a Code Division Multiple
Access (CDMA) based network, a Wireless Local Area Network (WLAN), an
10 Enhanced Data rates for GSM Evolution (EDGE) based network and a Long Term
Evolution (LTE) based network. Each of these communication networks comprises a
plurality of communication devices and network equipment configured to facilitate
communications between the communication devices. Each communication network
often provides a group call service to service users. The group call service is a service
15 by which a service user (e.g., first responder) is able to simultaneously talk to other
service users (e.g., other first responders) associated with a particular talk group or
where a service user (e.g., internet user) is able to simultaneously talk to other service
users (e.g., other internet users) associated with a particular social media profile. The
group call service can be implemented by a Push-To-Talk (PTT) group call service.
20 The PTT group call service is an instant service by which the PTT service user is able
to immediately talk to other PTT service users of a particular talk group or social
media profile by pushing a key or button of a communication device.

During operation, the service users may be engaged in a plurality of
group calls at the same time. In this scenario, the portable communication devices
25 (e.g., LMR radios and/or cellular telephones) utilized by the service users cannot
simultaneously capture speech exchanged between members of the plurality of group
calls. For example, if a first portable communication device of a first service user is
receiving speech transmitted from a second portable communication device of a
second service user of a first talk group or social media profile (or priority talk group),
30 then the first communication device is unable to simultaneously capture speech
transmitted from a third communication device of a third service user of a second talk

group or social media profile (or non-priority talk group). As such, speech associated with the second talk group or social media profile is undesirably lost.

Also during operation, one or more of the portable communication devices (e.g., LMR radios and/or cellular telephones) may be in their muted state. In the muted state, the audio outputs of the portable communication devices are silenced. In this scenario, the muted, portable communication devices (e.g., LMR radios and/or cellular telephones) are unable to transfer speech of the plurality of group calls to their respective loudspeakers. As such, all information communicated during the group calls is undesirably lost.

Further during operation, one or more of the portable communication devices (e.g., LMR radios and/or cellular telephones) may be used in public safety and/or military covert operations. In this scenario, the service users do not want to be detected by a third party (e.g., an enemy or criminal). As such, the service users can not rely on audible communications. As such, there is a need for portable communication devices (e.g., LMR radios and/or cellular telephones) which provide the service users with a means to receive messages in a discrete manner.

It should also be noted that a console operator (e.g., a 911 operator) utilizing a communication device of a central or dispatch station is able to simultaneously monitor information exchanges between service users of a plurality of talk groups or social media profiles. In this scenario, the speech of the plurality of talk groups or social media profiles is often summed or mixed together to form combined speech. Thereafter, the combined speech from the talk groups or social media profiles that are under active monitoring is concurrently output from a single loud speaker or headset to the console operator. Also, the combined speech from the talk groups or social media profiles that are not under active monitoring is concurrently output from another single loud speaker to the console operator. Consequently, the console operator often has a hard time understanding the speech exchanged between service users of the plurality of talk groups or social media profiles. The console operator may also have difficulty distinguishing which of the service users is speaking at any given time.

Embodiments of the present invention concern implementing systems and methods for avoiding loss of data (e.g., speech streams) in a Land Mobile Radio (LMR) communication system in which individual LMR devices are assigned to more than one talk group. Each of the LMR devices can include, but is not limited to, an LMR console or an LMR handset. A first method generally involves receiving a first transmitted voice communication from a first LMR device for a first talk group to which the first LMR device and a second LMR device have been assigned. The first method also involves receiving a second transmitted voice communication from a third LMR device for a second talk group to which the first LMR device and the third LMR device have been assigned. The second transmitted voice communication occurs at a time at least partially concurrent with the first transmitted voice communication. In response to concurrently receiving the first and second transmitted voice communications, at least one action is performed to preserve speech information content of the second transmitted voice communication. At least one signal can be generated to notify a user that the preserving action has been performed.

According to an aspect of the present invention, the action includes converting the speech information content to text and/or storing the speech information content for later presentation at the second LMR device. The speech-to-text conversion can be performed at the second LMR device and/or at a network server remote from the second LMR device. The action also includes displaying the text at the second LMR device. At least one time stamp can be provided for the text. At least one identifier can be provided for associating the text with the third LMR device. The text can be stored for subsequent use. In this scenario, the text can be converted to speech. The speech is presented as audio at the second LMR device.

According to another aspect of the present invention, the first and second transmitted voice communications are automatically converted to text if an audio output of the second LMR device is set to a mute condition.

A second method of the present invention involves receiving a first transmitted voice communication from a first LMR device for a first talk group to which the first LMR device and a second LMR device have been assigned. The

second method also involves determining if a condition exists which prevents audio from the first transmitted voice communication from being played over a loudspeaker at the second LMR device. If the condition exists, at least one action is performed for automatically preserving a speech information content of the first transmitted voice communication.

According to an aspect of the present invention, the action involves converting the speech information content to text or storing the speech information content for later presentation at the second LMR device. The speech-to-text conversion can be performed at the second LMR device or a network server remote from the second LMR device. The action also involves displaying the text at the second LMR device. At least one time stamp can be provided for the text. At least one identifier can also be provided for associating the text with the second LMR device. The text can be stored for subsequent use. In this scenario, the text is subsequently converted to speech and presented as audio at the second LMR device.

According to another aspect of the present invention, the condition comprises an audio output of the second LMR device set to a mute condition. Alternatively, the condition comprises receiving a second transmitted voice communication from a third LMR device for a second talk group to which the second LMR device and the third LMR device have been assigned. The second transmitted voice communication occurs at a time at least partially concurrent with the first transmitted voice communication.

A third method of the present invention generally involves receiving a first transmitted voice communication from a first communication device for a first social media profile to which the first communication device and a second communication device have been assigned. The third method also involves receiving a second transmitted voice communication from a third communication device for a second social media profile to which the first communication device and the third communication device has been assigned. The second transmitted voice communication occurs at a time at least partially concurrent with the first transmitted voice communication. In response to concurrently receiving said first and second

transmitted voice communications, at least one action is performed to preserve a speech information content of the second transmitted voice communication.

A fourth method of the present invention generally involves receiving a first transmitted voice communication from a first communication device for a first social media profile to which the first communication device and a second communication device have been assigned. The fourth method also involves determining if a condition exists which prevents audio from the first transmitted voice communication from being played over a loudspeaker at the second communication device. If the condition exists, at least one action is performed to automatically preserve a speech information content of the first transmitted voice communication.

Embodiments will be described with reference to the following drawing figures, in which like numerals represent like items throughout the figures, and in which:

FIG. 1 is a conceptual diagram of an exemplary communication system that is useful for understanding the present invention.

FIG. 2 is a block diagram of an exemplary communication device that is useful for understanding the present invention.

FIG. 3 is more detailed block diagram of an exemplary computing device that is useful for understanding the present invention.

FIG. 4 is a conceptual diagram of an exemplary process for providing a group call that is useful for understanding the present invention.

FIG. 5 is a conceptual diagram of an exemplary process for providing a group call that is useful for understanding the present invention.

FIG. 6 is a conceptual diagram of an exemplary process for providing a group call that is useful for understanding the present invention.

FIG. 7 is a conceptual diagram of an exemplary process for providing a group call that is useful for understanding the present invention.

FIGS. 8A-8C collectively provide a flow diagram of an exemplary method for providing a group call in which an end user communication device performs a speech-to-text function.

FIGS. 9A-9C collectively provide a flow diagram of an exemplary method for providing a group call in which network equipment performs a speech-to-text function.

The present invention is described with reference to the attached
5 figures. The figures are not drawn to scale and they are provided merely to illustrate the instant invention. Several aspects of the invention are described below with reference to example applications for illustration. It should be understood that numerous specific details, relationships, and methods are set forth to provide a full understanding of the invention. One having ordinary skill in the relevant art,
10 however, will readily recognize that the invention can be practiced without one or more of the specific details or with other methods. In other instances, well-known structures or operation are not shown in detail to avoid obscuring the invention. The present invention is not limited by the illustrated ordering of acts or events, as some acts may occur in different orders and/or concurrently with other acts or events.
15 Furthermore, not all illustrated acts or events are required to implement a methodology in accordance with the present invention.

Exemplary Communication System Implementing the Present Invention

Referring now to FIG. 1, there is provided a block diagram of a communication system **100** that implements one or more method embodiments of the
20 present invention. The communication system **100** can include a Land Mobile Radio (LMR) based system or a cellular based system. If the communication system **100** is a cellular based system, then it can include a second generation (2G) compatible system, a third generation (3G) compatible system and/or a fourth generation (4G) compatible system. The phrase “second generation (2G)”, as used herein, refers to
25 second-generation wireless telephone technology. The phrase “third generation (3G)”, as used herein, refers to third-generation wireless telephone technology. The phrase “fourth generation (4G)”, as used herein, refers to fourth-generation wireless telephone technology. In this scenario, the communication system **100** can support various 2G data services (e.g., text messaging), 3G data services (e.g., video calls)

and/or 4G data services (e.g., ultra-broadband internet access). Embodiments of the present invention are not limited in this regard.

The communication system **100** can also employ a single communication protocol or multiple communication protocols. For example, if the communication system **100** is a Land Mobile Radio (LMR) based system, then it can employ one or more of the following communication protocols: a Terrestrial Trunked Radio (TETRA) transport protocol; a P25 transport protocol; an OPENSky® protocol; an Enhanced Digital Access Communication System (EDACS) protocol; a MPT1327 transport protocol; a Digital Mobile Radio (DMR) transport protocol; and a Digital Private Mobile Radio (DPMR) transport protocol. If the communication system **100** is a cellular network, then it can employ one or more of the following communication protocols: a Wideband Code Division Multiple Access (WCDMA) based protocol; a Code Division Multiple Access (CDMA) based protocol; a Wireless Local Area Network (WLAN) based protocol; an Enhanced Data rates for GSM Evolution (EDGE) network based protocol; and a Long Term Evolution (LTE) network based protocol. Embodiments of the present invention are not limited in this regard.

As shown in FIG. 1, the communication system **100** comprises communication devices **102**, **106**, **108**, a network **104** and a console/dispatch center **110** including a communication device **112**. The console/dispatch center **110** can be a stationary center (e.g., a home or an office) or a mobile center (e.g., a vehicle or a supervisor on foot). If the console/dispatch center **110** is a dispatch center, then it can include, but is not limited to, an emergency communication center, an agency communication center, an interagency communication center and any other communication center which provides dispatching and logistical support for personnel management. The console/dispatch center **110** may utilize one or more social media applications (e.g., FACEBOOK® or TWITTER®) for outputting communications from communication devices **102**, **106**, **108** via chat windows. As should be understood, social media applications typically employ web based messaging. In this

scenario, the communication devices **102, 106, 108** may also support web based messaging.

The communication system **100** may include more or less components than those shown in FIG. 1. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. The hardware architecture of FIG. 1 represents one embodiment of a representative communication system configured to provide a group call service to service users. The group call service is a service by which a service user is able to simultaneously talk to other service users associated with a particular talk group or social media profile. The group call service can be implemented by a PTT group call service. The PTT group call service is an instant service by which the PTT service user is able to immediately talk to other PTT service users of a particular talk group or social media profile by pushing a key or button of a communication device (e.g., communication devices **102, 106, 108, 112**). Notably, in a group call mode, the communication devices (e.g., communication devices **102, 106, 108, 112**) are operating as half duplex devices, i.e., each communication device can only receive a group call communication or transmit a group call communication at any given time. As such, two or more members of a particular talk group or social media profile can not simultaneously transmit group call communications to other members of the talk group or social media profile.

The network **104** allows for communications between the communication devices **102, 106, 108** and/or console/dispatch center **110**. As such, the network **104** can include, but is not limited to, servers **114** and other devices to which each of the communication devices **102, 106, 108** and/or console/dispatch center **110** can connect via wired or wireless communication links. Notably, the network **104** can include one or more access points (not shown in FIG. 1) configured to allow disparate communication networks or disparate cellular networks (not shown in FIG. 1) to connect via an intermediary connection (e.g., an internet protocol connection or a packet-switched connection). Embodiments of the present invention are not limited in this regard.

Referring now to FIG. 2, there is provided a detailed block diagram of the communication device **200**. The communication devices **102**, **106**, **108** of FIG. 1 are the same as or similar to the communication device **200**. As such, the following discussion of the communication device **200** is sufficient for understanding the communication devices **102**, **106**, **108** of FIG. 1. Notably, the communication device **200** may include more or less components than those shown in FIG. 2. However, the components shown are sufficient to disclose an illustrative embodiment implementing the present invention. The hardware architecture of FIG. 2 represents one embodiment of a representative communication device configured to facilitate the provision of a group call service to a user thereof. The communication device is also configured to support a speech-to-text conversion function. As such, the communication device of FIG. 2 implements an improved method for providing group calls in accordance with embodiments of the present invention. Exemplary embodiments of the improved method will be described below in relation to FIGS. 4, 5 and 8A-8C.

As shown in FIG. 2, the communication device **200** comprises an antenna **202** for receiving and transmitting Radio Frequency (RF) signals. A receive/transmit (Rx/Tx) switch **204** selectively couples the antenna **202** to the transmitter circuitry **206** and receiver circuitry **208** in a manner familiar to those skilled in the art. The receiver circuitry **208** demodulates and decodes the RF signals received from a network (e.g., the network **104** of FIG. 1) to derive information therefrom. The receiver circuitry **208** is coupled to a controller **210** via an electrical connection **234**. The receiver circuitry **208** provides the decoded RF signal information to the controller **210**. The controller **210** uses the decoded RF signal information in accordance with the function(s) of the communication device **200**.

The controller **210** also provides information to the transmitter circuitry **206** for encoding and modulating information into RF signals. Accordingly, the controller **210** is coupled to the transmitter circuitry **206** via an electrical connection **238**. The transmitter circuitry **206** communicates the RF signals to the

antenna **202** for transmission to an external device (e.g., network equipment of network **104** of FIG. 1).

An antenna **240** is coupled to Global Positioning System (GPS) receiver circuitry **214** for receiving GPS signals. The GPS receiver circuitry **214** demodulates and decodes the GPS signals to extract GPS location information therefrom. The GPS location information indicates the location of the communication device **200**. The GPS receiver circuitry **214** provides the decoded GPS location information to the controller **210**. As such, the GPS receiver circuitry **214** is coupled to the controller **210** via an electrical connection **236**. The controller **210** uses the decoded GPS location information in accordance with the function(s) of the communication device **200**.

The controller **210** stores the decoded RF signal information and the decoded GPS location information in a memory **212** of the communication device **200**. Accordingly, the memory **212** is connected to and accessible by the controller **210** through an electrical connection **232**. The memory **212** may be a volatile memory and/or a non-volatile memory. For example, the memory **212** can include, but is not limited to, a Random Access Memory (RAM), a Dynamic Random Access Memory (DRAM), a Static Random Access Memory (SRAM), Read-Only Memory (ROM) and flash memory.

As shown in FIG. 2, one or more sets of instructions **250** are stored in the memory **212**. The instructions **250** can also reside, completely or at least partially, within the controller **210** during execution thereof by the communication device **200**. In this regard, the memory **212** and the controller **210** can constitute machine-readable media. The term "machine-readable media", as used here, refers to a single medium or multiple media that store the one or more sets of instructions **250**. The term "machine-readable media", as used here, also refers to any medium that is capable of storing, encoding or carrying the set of instructions **250** for execution by the communication device **200** and that cause the communication device **200** to perform one or more of the methodologies of the present disclosure.

The controller **210** is also connected to a user interface **230**. The user interface **230** is comprised of input devices **216**, output devices **224**, and software routines (not shown in FIG. 2) configured to allow a user to interact with and control software applications (not shown in FIG. 2) installed on the computing device **200**.

- 5 Such input and output devices respectively include, but are not limited to, a display **228**, a speaker **226**, a keypad **220**, a directional pad (not shown in FIG. 2), a directional knob (not shown in FIG. 2), a microphone **222** and a PTT button **218**. The display **228** may be designed to accept touch screen inputs.

- The user interface **230** is operative to facilitate a user-software
10 interaction for launching group call applications (not shown in FIG. 2), PTT call applications (not shown in FIG. 2), speech-to-text conversion applications (not shown in FIG. 2), social media applications, internet applications and other types of applications installed on the computing device **200**. The group call and PTT call applications (not shown in FIG. 2) are operative to provide a group call service to a
15 user of the communication device **200**. The speech-to-text conversion applications (not shown in FIG. 2) are operative to facilitate: (a) the processing of voice packets for converting speech into text; (b) the storage of text as a text string; (c) the display of the text on a display screen as a scrolling text banner or static content, contents of a chat window or contents of a history window; (d) the display of at least one of a time
20 stamp and a party of a group call, a group image, and/or a group icon associated with the text; (e) the scanning of the text to determine if a pre-defined word and/or phrase is contained therein; (f) the output of an audible and/or visible indicator indicating that the pre-defined word and/or phrase is contained in the text; (g) the triggering of a particular action (e.g., data logging and email forwarding) if the pre-defined word
25 and/or phrase is contained in the text; and/or (h) the ability to export or transport the text to another device.

- The PTT button **218** is given a form factor so that a user can easily access the PTT button **218**. For example, the PTT button **218** can be taller than other keys or buttons of the communication device **200**. Embodiments of the present
30 invention are not limited in this regard. The PTT button **218** provides a user with a

single key/button press to initiate a predetermined PTT application or function of the communication device **200**. The PTT application facilitates the provision of a PTT service to a user of the communication device **200**. As such, the PTT application is operative to perform PTT communication operations. The PTT communication
5 operations can include, but are not limited to, message generation operations, message communication operations, voice packet recording operations, voice packet queuing operations and voice packet communication operations.

Referring now to FIG. 3, there is provided a more detailed block diagram of a computing device **300** that is useful for understanding the present
10 invention. The server **114** and communication device **112** of FIG. 1 is the same as or similar to the computing device **300**. As such, the following discussion of the computing device **300** is sufficient for understanding the server **114** and communication device **112** of FIG. 1. Notably, the computing device **300** may include more or less components than those shown in FIG. 3. However, the
15 components shown are sufficient to disclose an illustrative embodiment implementing the present invention. The hardware architecture of FIG. 3 represents one embodiment of a representative computing device configured to facilitate the provision of a group call service to a user thereof. The computing device is also configured to support a speech-to-text conversion function. As such, the computing
20 device **300** implements an improved method for providing group calls in accordance with embodiments of the present invention. Exemplary embodiments of the improved method will be described in detail below in relation to FIGS. 4-9C.

As shown in FIG. 3, the computing device **300** includes a system interface **322**, a user interface **302**, a Central Processing Unit (CPU) **306**, a system bus
25 **310**, a memory **312** connected to and accessible by other portions of computing device **300** through system bus **310**, and hardware entities **314** connected to system bus **310**. At least some of the hardware entities **314** perform actions involving access to and use of memory **312**, which may be a random access memory (RAM), a disk driver and/or a compact disc read only memory (CD-ROM).

System interface **322** allows the computing device **300** to communicate directly or indirectly with external communication devices (e.g., communication devices **102**, **106**, **108** of FIG. 1). If the computing device **300** is communicating indirectly with the external communication device, then the computing device **300** is sending and receiving communications through a common network (e.g., the network **104** shown in FIG. 1).

Hardware entities **314** may include microprocessors, application specific integrated circuits (ASICs) and other hardware. Hardware entities **314** may include a microprocessor programmed for facilitating the provision of group call services to users thereof. In this regard, it should be understood that the microprocessor can access and run group call applications (not shown in FIG. 3), PTT call applications (not shown in FIG. 3), social media applications (e.g., FACEBOOK® and TWITTER®), internet applications (not shown in FIG. 3), speech-to-text conversion applications (not shown in FIG. 3) and other types of applications installed on the computing device **300**. The group call applications (not shown in FIG. 3), PTT call applications (not shown in FIG. 3) and social media applications are operative to facilitate the provision of a group call service to a user of the computing device **300** and/or a remote communication device (e.g., **102**, **106**, **108**). The speech-to-text applications (not shown in FIG. 3) are operative to facilitate:

- (a) the processing of voice packets for converting speech into text; (b) the storage of text as a text string; (c) the communication of the text to an external communication device; (d) the display of the text on a display screen as a scrolling text banner or static content, contents of a chat window or contents of a history window; (e) the display of at least one of a time stamp, a party of a group call, a group image and/or a group icon associated with the text; (f) the scanning of the text to determine if a pre-defined word and/or phrase is contained therein; (g) the output of an audible and/or visible indicator indicating that the pre-defined word and/or phrase is contained in the text; (h) the triggering of an event (e.g., data logging or email forwarding) if a pre-defined word and/or phrase is contained in the text; and/or (i) the ability to export or transport the text to another device.

As shown in FIG. 3, the hardware entities **314** can include a disk drive unit **316** comprising a computer-readable storage medium **318** on which is stored one or more sets of instructions **320** (e.g., software code) configured to implement one or more of the methodologies, procedures, or functions described herein. The instructions **320** can also reside, completely or at least partially, within the memory **312** and/or within the CPU **306** during execution thereof by the computing device **300**. The memory **312** and the CPU **306** also can constitute machine-readable media. The term "machine-readable media", as used here, refers to a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more sets of instructions **320**. The term "machine-readable media", as used here, also refers to any medium that is capable of storing, encoding or carrying a set of instructions **320** for execution by the computing device **300** and that cause the computing device **300** to perform any one or more of the methodologies of the present disclosure.

As evident from the above discussion, the communication system **100** implements one or more method embodiments of the present invention. The method embodiments of the present invention provide implementing systems with certain advantages over conventional communication devices. For example, the present invention provides a communication device that can simultaneously capture speech exchanged between members of a plurality of talk groups or social media profiles. The present invention also provides a communication device that can have its audio output muted without losing information communicated during a group call. The present invention further provides a communication device with a means to receive messages in a silent manner (e.g., a text form). The present invention provides a console/dispatch center communication device that can simultaneously output speech associated with a first talk group or social media profile and text associated with a second talk group or social media profile. In effect, the console operator can easily understand the speech exchanged between members of the first talk group or social media profile. The console operator can also easily distinguish from which members of the first and second talk group or social media profile a particular communication

is received. The manner in which the above listed advantages of the present invention are achieved will become more evident as the discussion progresses.

Exemplary Processes for Providing Group Calls Using Communication System 100

FIGS. 4-5 are intended to illustrate exemplary processes that are useful for understanding the present invention. As evident from FIGS. 4-5, users of the communication devices **106, 108, 112** of FIG. 1 have the ability to enable a speech-to-text conversion function of the communication devices **106, 108, 112**. The speech-to-text conversion function can be manually enabled by a user via a menu, a button or other suitable enabling means. The speech-to-text conversion function can also be automatically enabled at the time of configuration of the communication device. The speech-to-text conversion function can further be automatically enabled in response to the reception of an over-the-air signal at the respective communication device **106, 108, 112** and/or in response to a change in system parameters (e.g., a change from a first configuration fill file to a second configuration fill file) of the respective communication device **106, 108, 112**. The speech-to-text conversion function can be enabled for all or some of the communications received at the communication devices **106, 108, 112**. For example, the speech-to-text conversion function can be enabled for communications that are associated with one or more selected talk groups or social media profiles.

If the speech-to-text conversion function of a communication device **106, 108, 112** is enabled, then the group call communication is displayed as text on a user interface thereof. The text can be displayed in a scrolling text banner, a chat window and/or a history window. A time stamp and/or an identifier of a party to a group call may be displayed along with the text. Also, an audible and/or visible indicator can be output from the communication device **106, 108, 112** if a specific word and/or phrase is contained in the text. Further, a particular event (e.g., data logging or email forwarding) can be triggered if a specific word and/or phrase is contained in the text.

The speech-to-text conversion can be accomplished at a communication device **106, 108, 112** using speech recognition algorithms. Speech recognition algorithms are well known to those having ordinary skill in the art, and therefore will not be described herein. However, it should be understood that any
5 speech recognition algorithm can be used without limitation. For example, a Hidden Markov Model (HMM) based speech recognition algorithm and/or a Dynamic Time Warping (DTW) based speech recognition algorithm can be employed by the communication device **106, 108, 112**. Embodiments of the present invention are not limited in this regard.

10 Referring now to FIG. 4, there is provided a conceptual diagram of a first exemplary process for providing a group call that is useful for understanding the present invention. As shown in FIG. 4, the exemplary process begins when a user **402** of communication device **102** initiates a group call for a talk group “TG-1” or social media profile “SMP-1”. The group call can be initiated by depressing a button of the
15 communication device **102** (e.g., the PTT button **218** of FIG. 2). After initiating the group call, the user **402** speaks into the communication device **102**. In response to the reception of a voice signal at the communication device **102**, the communication device **102** processes the signal to generate voice packets. The voice packets **410** are communicated from the communication device **102** to the communication devices
20 **106, 108, 112** via network **104**. Notably, communication devices **106, 108** are members of the talk group “TG-1” or social media profile “SMP-1”.

At the communication device **106**, the voice packets **410** are processed to convert speech to text. The text is displayed in an interface window of a display screen (e.g., display screen **228** of FIG. 2) of the communication device **106**. The
25 interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. As shown in FIG. 4, a time stamp (e.g., “10h01”) and an identifier of a member of the talk group or social media profile (e.g., “Peter”) are also displayed on the display screen (e.g., display screen **228** of FIG. 2). The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 4), a
30 numeric identifier, a symbolic identifier, an icon based identifier, a color based

identifier and/or any combination thereof. Notably, the communication device **106** is in its muted state and/or has its speech-to-text conversion function enabled at least for the talk group “TG-1” or social media profile “SMP-1”. In the muted state, the audio outputs of the portable communication device **106** is muted.

5 At the communication device **108**, the voice packets **410** are processed for outputting voice from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **108**. Notably, the communication device **108** is not in its muted state. Also, the communication device **108** does not have its speech-to-text conversion function enabled.

10 At the console/dispatch center communication device **112**, the voice packets **410** are processed to convert speech to text. The text is displayed on a user interface (e.g., user interface **302** of FIG. 3) of the communication device **112**. As shown in FIG. 4, a time stamp (e.g., “10h01”) and an identifier of a member of the talk group or social media profile (e.g., “Peter”) are also displayed in an interface
15 window of the user interface (e.g., user interface **302** of FIG. 3). The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 4), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the
20 communication device **112** is monitoring communications associated with one or more talk groups or social media profiles. The communication device **112** also has its speech-to-text conversion function enabled for select talk groups (including talk group “TG-1”) or social media profiles (including social media profile “SMP-1”).

 Referring now to FIG. 5, there is provided a conceptual diagram of a
25 second exemplary process for providing a group call that is useful for understanding the present invention. As shown in FIG. 5, the process begins when a user **502** of communication device **102** initiates a group call for a high priority talk group “HTG-1” or high priority social media profile “HSMP-1”. The group call can be initiated by depressing a button of the communication device **102** (e.g., the PTT button **218** of
30 FIG. 2). After initiating the group call, the user **402** speaks into the communication

device **102**. In response to the reception of a voice signal at the communication device **102**, the communication device **102** processes the signal to generate voice packets **510**. The voice packets **510** are communicated from the communication device **102** to the communication devices **106**, **108**, **112** via network **104**.

5 A user **504** of a communication device **506** also initiates a group call for a low priority talk group “LTG-2” or low priority social media profile “LSMP-2”. The group call can be initiated by depressing a button of the communication device **506** (e.g., the PTT button **218** of FIG. 2). After initiating the group call, the user **504** speaks into the communication device **506**. In response to the reception of a voice
10 signal at the communication device **506**, the communication device **506** processes the signal to generate voice packets **512**. The voice packets **512** are communicated from the communication device **506** to the communication devices **106**, **108**, **112** via network **104**.

 At the communication device **106**, the voice packets **510** are processed
15 for outputting voice associated with a member of the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **106**. The voice packets **512** are processed to convert speech to text. The text associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” is displayed in an interface window of
20 a display screen (e.g., display screen **228** of FIG. 2) of the communication device **106**. The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. A time stamp (e.g., “10h01”) and an identifier of a member of the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” (e.g., “Peter”) can also be displayed in the interface window of the display
25 screen (e.g., display screen **228** of FIG. 2). The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 5), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **106** is not in a muted state. The communication device **106** has its speech-to-text conversion function enabled.

At the communication device **108**, the voice packets **510** are processed for outputting voice associated with the high priority talk group “LTG-1” or high priority social media profile “LSMP-1” from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **108**. However, the voice packets **512** associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are discarded or stored. If the voice packets **512** are stored, then they can be subsequently processed by the communication device **108** for conversion of speech to text, and/or for subsequent output of audio. Notably, the communication device **108** is not in its muted state. The communication device **108** also does not have its speech-to-text conversion function enabled.

At the communication device **112**, the voice packets **510** are processed for outputting voice associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” from a user interface (e.g., user interface **302** of FIG. 3) of the communication device **112**. However, the voice packets **512** associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are processed to convert speech to text. The text associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” is displayed in an interface window of a display screen (as shown in FIG. 5) of the communication device **112**. The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. A time stamp (e.g., “10h01”) and an identifier of a member of the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” (e.g., “Peter”) can also be displayed in the interface window of the display screen. The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 5), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **112** is monitoring communications associated with one or more talk groups or social media profiles. The communication device **112** also has its speech-to-text conversion function enabled for select talk groups (including low priority talk group “LTG-2”) or select social media profiles (including low priority social media profile “LSMP-2”).

FIGS. 6-7 are intended to illustrate exemplary processes for providing group calls that are useful for understanding the present invention. As evident from FIGS. 6-7, network equipment (e.g., server **114**) of network **104** of FIG. 1 implements a speech-to-text conversion function. The speech-to-text conversion function is
5 employed when the network **104** of FIG. 1 receives a communication addressed to a communication device **106, 108, 112** that has its speech-to-text conversion function enabled. If the speech-to-text conversion function of the network **104** is employed, then voice packets are processed for converting speech to text. The text is then communicated from the network **104** to the communication device that has its speech-
10 to-text conversion function enabled. In this regard, it should be understood that the communication device is configured to send a communication to the network **104** indicating that its speech-to-text conversion function has been enabled or disabled for one or more talk groups or social media profiles. The network **104** includes a storage device for keeping track of which communication devices have their speech-to-text
15 conversion functions enabled for one or more talk groups or social media profiles.

Also in some embodiments, the text is analyzed at the network **104** to determine if a word and/or a phrase is contained therein. If the word and/or phrase is contained in the text, then the network **104** generates a command message for outputting an audible and/or visible indicator. The network **104** may also generate a
20 command to trigger an event (e.g., data logging or email forwarding) if the word and/or phrase is contained in the text. The command message(s) is(are) communicated from the network **104** to the communication device. In response to the command message(s), an indicator is output and/or an event is triggered by the communication device.

25 The speech-to-text conversion can be accomplished at the network **104** using speech recognition algorithms. Speech recognition algorithms are well known to those having ordinary skill in the art, and therefore will not be described herein. However, it should be understood that any voice recognition algorithm can be used without limitation. For example, a Hidden Markov Model (HMM) based speech
30 recognition algorithm and/or a Dynamic Time Warping (DTW) based speech

recognition algorithm can be employed by the network **104**. Embodiments of the present invention are not limited in this regard.

Referring now to FIG. 6, there is provided a conceptual diagram of a third exemplary process for providing a group call that is useful for understanding the present invention. As shown in FIG. 6, the exemplary process begins when a user **602** of communication device **102** initiates a group call for a talk group “TG-1” or social media profile “SMP-1”. The group call can be initiated by depressing a button of the communication device **102** (e.g., the PTT button **218** of FIG. 2). After initiating the group call, the user **602** speaks into the communication device **102**. In response to the reception of a voice signal at the communication device **102**, the communication device **102** processes the signal to generate voice packets **610**. The voice packets **610** are communicated from the communication device **102** to the network **104**. The voice packets **610** are addressed to the communication devices **106**, **108**, **112**.

At the network **104**, the voice packets **610** are processed to convert speech to text. The network **104** forwards voice packets **610** to communication device **108** which does not have its speech-to-text function enabled. The network **104** communicates the text in text messages or IP packets **612** to the communication devices **106**, **112** which have their speech-to-text conversion function enabled at least for the talk group “TG-1” or social media profile “SMP-1”. Notably, the network **104** can also store the voice packets **610** and/or text messages or IP packets **612** for subsequent processing by the network **104** and/or for subsequent retrieval by communication devices **106**, **108**, **112**.

At the communication device **106**, the text messages or IP packets **612** are processed for outputting text to a user thereof. As shown in FIG. 6, the text is displayed in an interface window of a display screen (e.g., display screen **228** of FIG. 2) of the communication device **106**. The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. A time stamp (e.g., “10h01”) and an identifier of a member of the talk group or social media profile (e.g., “Peter”) are also displayed on the display screen (e.g., display screen **228** of FIG. 2). The identifier can include, but is not limited to, a textual identifier (as

shown in FIG. 6), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **106** is in its muted state and/or has its speech-to-text conversion function enabled at least for the talk group “TG-1” or social media profile “SMP-1”. In the muted state, the audio output of the portable communication device **106** is muted.

At the communication device **108**, the voice packets **610** are processed for outputting voice from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **108**. Notably, the communication device **108** is not in its muted state. Also, the communication device **108** does not have its speech-to-text conversion function enabled.

At the dispatch center communication device **112**, the text messages or IP packets **612** are processed to output text to a user thereof. The text is displayed on a user interface (e.g., user interface **302** of FIG. 3) of the communication device **112**. A time stamp (e.g., “10h01”) and an identifier of a member of a talk group or social media profile (e.g., “Peter”) are also displayed in an interface window of the user interface (e.g., user interface **302** of FIG. 3). The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 6), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **112** is monitoring communications associated with one or more talk groups or social media profiles. The communication device **112** also has its speech-to-text conversion function enabled for select talk groups (including talk group “TG-1”) or select social media profiles (including social media profile “SMP-1”).

Referring now to FIG. 7, there is provided a conceptual diagram of a fourth exemplary process for providing a group call that is useful for understanding the present invention. As shown in FIG. 7, the process begins when a user **702** of communication device **102** initiates a group call for a high priority talk group “HTG-1” or high priority social media profile “HSMP-1”. The group call can be initiated by depressing a button of the communication device **102** (e.g., the PTT button **218** of FIG.

2). After initiating the group call, the user **702** speaks into the communication device **102**. In response to the reception of a voice signal at the communication device **102**, the communication device **102** processes the signal to generate voice packets **710**. The voice packets **710** are communicated from the communication device **102** to the network **104**. The voice packets **710** are addressed to the communication devices **106, 108, 112**.

A user **704** of a communication device **706** also initiates a group call for a low priority talk group “LTG-2” or a low priority social media profile “LSMP-2”. The group call can be initiated by depressing a button of the communication device **706** (e.g., the PTT button **218** of FIG. 2). After initiating the group call, the user **704** speaks into the communication device **706**. In response to the reception of a voice signal at the communication device **706**, the communication device **706** processes the signal to generate voice packets **712**. The voice packets **712** are communicated from the communication device **706** to the network **104**. The voice packets **712** are addressed to the communication devices **106, 108, 112**.

The network **104** forwards the voice packets **710** associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” to the communication devices **106, 108, 112**. However, the network **104** processes the voice packets **712** associated with a low priority talk group “LTG-2” or low priority social media profile “LSMP-2” to convert speech to text. The network **104** communicates the text in text messages or IP packets **714** to the communication devices **106, 112** which have their speech-to-text conversion function enabled at least for the low priority talk group “LTG-2” or low priority social media profile “LSMP-2”. The network **104** can also store the voice packets **710** and/or **712** for subsequent processing by the network **104** for conversion of speech to text, and/or for subsequent retrieval by communication devices **106, 108, 112**. The network **104** can also store the text messages or IP packets **714** for subsequent retrieval and processing.

At the communication device **106**, the voice packets **710** are processed for outputting voice associated with a member of the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” to a user thereof. The voice can be

output from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **106**. The text messages or IP packets **714** are processed to output text associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” to the user thereof. The text associated with the low priority talk group “LTG-2” or low
5 priority social media profile “LSMP-2” is displayed in an interface window of a display screen (e.g., display screen **228** of FIG. 2) of the communication device **106**. The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. A time stamp (e.g., “10h01”) and an identifier of a member of the low priority talk group “LTG-2” or low priority social media profile
10 “LSMP-2” (e.g., “Peter”) can also be displayed in the interface window of the display screen (e.g., display screen **228** of FIG. 2). The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 7), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **106** is not in its muted state and has its
15 speech-to-text conversion function enabled at least for the low priority talk group “LTG-2” or low priority social media profile “LSMP-1”.

At the communication device **108**, the voice packets **710** are processed for outputting voice associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” to a user thereof. The voice can be output
20 from a speaker (e.g., speaker **226** of FIG. 2) of the communication device **108**. Notably, if the voice packets **712** associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are also communicated from the network **104** to the communication device **108**, then the communication device **108** can discard the voice packets **712** or store the same in a storage device thereof for
25 subsequent retrieval and processing. Notably, the communication device **108** is not in its muted state. The communication device **108** also does not have its speech-to-text conversion function enabled.

At the communication device **112**, the voice packets **710** are processed for outputting voice associated with the high priority talk group “HTG-1” or high
30 priority social media profile “HSMP-1” to a user thereof. The voice can be output

from a user interface (e.g., a user interface **302** of FIG. 3) of the communication device **112**. The text messages or IP packets **714** associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are processed to output text to the user of the communication device **112**. The text associated with the low

5 priority talk group “LTG-2” or low priority social media profile “LSMP-2” is displayed in an interface window of a display screen (as shown in FIG. 7) of the communication device **112**. The interface window can include, but is not limited to, a scrolling text banner, a chat window and a history window. A time stamp (e.g., “10h01”) and an identifier of a member of the low priority talk group “LTG-2” or low

10 priority social media profile “LSMP-2” (e.g., “Peter”) can also be displayed in the interface window of the display screen. The identifier can include, but is not limited to, a textual identifier (as shown in FIG. 7), a numeric identifier, a symbolic identifier, an icon based identifier, a color based identifier and/or any combination thereof. Notably, the communication device **112** is monitoring communications associated

15 with one or more talk groups or social media profiles. The communication device **112** also has its speech-to-text conversion function enabled for select talk groups (including low priority talk group “TG-2”) or select social media profiles (including low priority social media profile “SMP-2”).

Exemplary Method Embodiments Of The Present Invention

20 Each set of FIGS. 8A-8C and 9A-9C provides a flow diagram of an exemplary method for providing group calls using a communication system (e.g., the communication system **100**) that is useful for understanding the present invention. More particularly, FIGS. 8A-8C show an exemplary method in which the communication devices (e.g., communication devices **102**, **106**, **108**, **112** of FIG. 1)

25 perform speech-to-text conversion operations. FIGS. 9A-9C show an exemplary method in which network equipment (e.g., server **114** of FIG. 1) of a network (e.g., network **104** of FIG. 1) perform speech-to-text conversion operations.

Referring now to FIGS. 8A-8C, there is provided a flow diagram of a first exemplary method **800** for providing group calls that is useful for understanding

the present invention. As shown in FIG. 8A, the method **800** begins at step **802** and continues with step **804**. In step **804**, a group call is initiated at a first communication device of a high priority talk group “HTG-1” or social media profile “HSMP-1”. Also, a group call is initiated at a second communication device of a low priority talk group “LTG-2” or low priority social media profile “LSMP-2”. Thereafter, users of the first and second communication devices speak into microphones thereof. In effect, speech signals are received at the first and second communication devices in step **806**. Next, step **808** is performed where voice packets are communicated from each of the first and second communication devices to a third communication device via a network. The third communication device is a member of the high priority talk group “HTG-1” or high priority social media profile “HSMP-1”. The third communication device is also a member of the low priority talk group “LTG-2” or low priority social media profile “LSMP-2”. The voice packets can also be communicated from each of the first and second communication devices to a fourth communication device of a console/dispatch center. If the voice packets are communicated to the fourth communication device of the console/dispatch center, then the method **800** continues with step **832** of FIG. 8B.

Referring now to FIG. 8B, step **832** involves receiving the voice packets communicated from the first and second communication devices at the fourth communication device of the console/dispatch center. After receiving the voice packets, decision steps **834** and **838** are performed. Decision step **834** is performed to determine if a speech-to-text conversion function for the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” is enabled. If the speech-to-text conversion function is not enabled for the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” [**834:NO**], then step **836** is performed. In step **836**, speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” is output to a user of the fourth communication device via a user interface (e.g., a speaker) thereof. If the speech-to-text conversion function is enabled for the high priority talk group “HTG-1” or high

priority social media profile “HSMP-1” [834:YES], then the method **800** continues with step **842**, which will be described below.

Step **838** is performed to determine if a speech-to-text conversion function is enabled for the low priority talk group “LTG-2” or low priority social media profile “LSMP-1”. If the speech-to-text conversion function is not enabled for the low priority talk group “LTG-2” or low priority social media profile “LSMP-1” [838:NO], then step **840** is performed. In step **840**, speech associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-1” is output to a user of the fourth communication device via a user interface (e.g., a speaker) thereof. If the speech-to-text conversion function is enabled for the low priority talk group “LTG-2” or low priority social media profile “LSMP-1” [838:YES], then the method **800** continues with step **842**.

Step **842** involves processing the voice packets to convert speech into text. Next, an optional step **844** is performed where the text is scanned to identify one or more pre-defined or pre-selected words and/or phrases. Upon completing the scan of the text, a decision step **846** is performed to determine if a pre-defined or pre-selected word and/or phrase was identified in the text. If the text contains at least one pre-defined or pre-selected word and/or phrase [846:YES], then step **848** is performed where an indicator is output to a user of the fourth communication device. The indicator can include, but is not limited to, an audible indicator and a visible indicator. Step **848** can additionally or alternatively involve triggering other actions (e.g., data logging and email forwarding). Subsequently, step **850** is performed which will be described below.

If the text does not contain one or more pre-defined or pre-selected words and/or phrases [846:NO], then step **850** is performed where the text is stored in a storage device of the fourth communication device. The text can be stored as a text string. Step **850** also involves outputting the text to the user of the fourth communication device via a user interface. Thereafter, step **852** is performed where the method **800** returns to step **802** or subsequent processing is performed.

Referring again to FIG. 8A, a decision step **812** is performed subsequent to receiving the voice packets communicated from the first and second communication device at the third communication device in step **810**. The decision step **812** is performed to determine if the third communication device is in its muted state. If the third communication device is not in its muted state [**812:NO**], then the method **800** continues with a decision step **854** of FIG. 8C, which will be described below. If the third communication device is in its muted state [**812:YES**], then the method **800** continues with a decision step **816**. Decision step **816** is performed to determine if a speech-to-text conversion function of the third communication device is enabled. If the speech-to-text conversion function of the third communication device is not enabled [**816:NO**], then step **818** is performed where the voice packets are discarded or stored in a storage device of the third communication device. Thereafter, step **830** is performed where the method **800** returns to step **802** or subsequent processing is performed.

15 If the speech-to-text conversion function of the third communication device is enabled [**816:YES**], then the method **800** continues with step **820**. In step **820**, the voice packets are processed to convert speech to text. Next, an optional step **822** is performed where the text is scanned to identify one or more pre-defined or pre-selected words and/or phrases. Upon completing the scan of the text, a decision step

20 **824** is performed to determine if the pre-defined or pre-selected word and/or phrase was identified in the text. If the text contains at least one pre-defined or pre-selected word and/or phrase [**824:YES**], then step **826** is performed where an indicator is output to a user of the third communication device. The indicator can include, but is not limited to, a visible indicator and an audible indicator. Step **826** can additionally

25 or alternatively involve triggering other actions (e.g., data logging and email forwarding). Subsequently, step **828** is performed which will be described below.

 If the text does not contain one or more pre-defined or pre-selected words and/or phrases [**824:NO**], then step **828** is performed where the text is stored in a storage device of the third communication device. The text can be stored as a text

30 string. Step **828** also involves outputting the text to the user of the third

communication device via a user interface. Thereafter, step **830** is performed where the method **800** returns to step **802** or subsequent processing is performed.

Referring now to FIG. 8C, decision step **854** is performed to determine if a speech-to-text conversion function of the third communication device is enabled.

5 As noted above, step **854** is performed if the third communication device is not in its muted state. If the speech-to-text conversion function of the third communication device is not enabled [**854:NO**], then step **856** is performed where the speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” is output to a user of the third communication device via a user
10 interface (e.g., a speaker). In a next step **858**, voice packets associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are discarded or stored in a storage device of the third communication device. Thereafter, step **872** is performed where the method **800** returns to step **802** or subsequent processing is performed.

15 If the speech-to-text conversion function of the third communication device is enabled [**854:YES**], then step **860** is performed where speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” is output to a user of the third communication device via a user interface thereof (e.g., a speaker). In a next step **862**, the voice packets associated with the low
20 priority talk group “LTG-2” or low priority social media profile “LSMP-2” are processed to convert text to speech. Next, an optional step **864** is performed where the text is scanned to identify one or more pre-defined or pre-selected words and/or phrases. Upon completing the scan of the text, a decision step **866** is performed to determine if at least one pre-defined or pre-selected word and/or phrase was identified
25 in the text. If the text contains at least one pre-defined or pre-selected word and/or phrase [**866:YES**], then step **868** is performed where an indicator is output to a user of the third communication device. The indicator can include, but is not limited to, a visible indicator and an audible indicator. Step **868** can additionally or alternatively involve triggering one or more other events (e.g., data logging and email forwarding).
30 Subsequently, step **870** is performed which will be described below.

If the text does not contain one or more pre-defined or pre-selected words and/or phrases [866:NO], then step 870 is performed where the text is stored in a storage device of the third communication device. The text can be stored as a text string. Step 870 can also involve outputting the text to the user of the third
5 communication device via a user interface. Thereafter, step 872 is performed where the method 800 returns to step 802 or subsequent processing is performed.

Referring now to FIGS. 9A-9C, there is provided a flow diagram of a second exemplary method 900 for providing group calls that is useful for understanding the present invention. As shown in FIG. 9A, the method 900 begins at
10 step 902 and continues with step 904. In step 904, a group call is initiated by a first communication device of a high priority talk group "HTG-1" or high priority social media profile "HSMP-1". A group call is also initiated at a second communication device of a low priority talk group "LTG-2" or low priority social media profile "LSMP-2". Thereafter, users of the first and second communication devices speak
15 into microphones thereof. In effect, speech signals are received at the first and second communication devices in step 906. Next, step 908 is performed where voice packets are communicated from each of the first and second communication devices to a network. Notably, the voice packets are addressed to a third communication device of the high and low priority talk groups "HTG-1", "LTG-2" or social media profiles
20 "HSMP-1", "LSMP-2". The voice packets can also be addressed to a fourth communication device of a dispatch center.

After receiving the voice packets at network equipment of the network in step 910, decision steps 912 and 924 are performed. Decision step 912 is performed to determine if a speech-to-text conversion function of the third
25 communication device is enabled. If the speech-to-text conversion function of the third communication device is not enabled [912:NO], then the step 914 is performed where the voice packets are forwarded to the third communication device. Step 914 can also involve storing the voice packets associated with one or more of the talk groups "HTG-1", "LTG-2" or social media profiles "HSMP-1", "LSMP-2" in a
30 storage device of the network for subsequent retrieval and processing thereby.

In a next step **916**, the voice packets are received at the third communication device. Thereafter, the voice packets are processed in step **918** to output speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” to a user of the third communication device. The
5 speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” is output to the user via a user interface of the third communication device. If the voice packets associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” are also communicated to the third communication device, then step **920** is performed where these voice
10 packet are discarded or stored in a storage device of the third communication device. Upon completing step **920**, step **934** is performed where the method **900** returns to step **902** or subsequent processing is performed.

If the speech-to-text conversion function of the third communication device is enabled [**912:YES**], then the method **900** continues with step **936** of FIG.
15 9B. Referring now to FIG. 9B, step **936** involves indentifying voice packets associated with the high and low priority talk group “HTG-1”, “LTG-2” or social media profiles “HSMP-1”, “LSMP-2”. Upon completing step **936**, the method **900** continues with steps **938** and **944**.

Step **938** involves forwarding voice packets associated with the high
20 priority talk group “HTG-1” or high priority social media profile “HSMP-1” to the third communication device. In step **940**, the voice packets are received at the third communication device. At the third communication device, the voice packets are processed to output speech associated with the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” to a user of the third communication
25 device. The speech can be output via a user interface (e.g., a speaker). Thereafter, step **962** is performed where the method **900** returns to step **902** or subsequent processing is performed.

Step **944** involves processing the voice packets associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” for
30 converting speech to text. In a next step **946**, the text is stored in a storage device of

the network for subsequent retrieval and processing thereby. The text can be stored in a log file of the storage device. Thereafter, an optional step **948** is performed where the text is scanned to identify at least one pre-defined or pre-selected word or phrase.

If one or more pre-defined or pre-selected words or phrases was
5 identified [**950:YES**], then step **952** is performed where the network equipment generates at least one command for outputting an indicator and/or triggering other events (e.g., data logging and email forwarding). The text and command(s) are then communicated from the network to the third communication device in step **954**. After receipt of the text and command(s) at the third communication device in step **958**, the
10 text and/or an indicator is output to a user thereof in step **960**. The indicator can include, but is not limited to, an audible indicator and a visible indicator. Step **960** can also involve taking other actions (e.g., data logging and email forwarding) at the third communication device. Subsequently, step **962** is performed where the method **900** returns to step **902** or subsequent processing is performed.

If one or more pre-defined or pre-selected words or phrases was not
15 identified [**950:NO**], then step **956** is performed where the text associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” is forwarded from the network to the third communication device. After receipt of the text at the third communication device in step **958**, step **960** is performed. In step
20 **960**, the text associated with the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” is output to a user of the third communication device via a user interface. Thereafter, step **962** is performed where the method **900** returns to step **902** or subsequent processing is performed.

Referring again to FIG. 9A, the decision step **924** is performed to
25 determine if a speech-to-text conversion function of the fourth communication device is enabled. If the speech-to-text conversion function of the fourth communication device is not enabled [**924:NO**], then step **926** is performed where the voice packets are forwarded from the network to the fourth communication device. Notably, the voice packets include voice packets associated with the high and low priority talk
30 groups “HTG-1”, “LTG-2” or priority social media profiles “HSMP-1”, “LSMP-2”.

After receiving the voice packets at the fourth communication device in step **928**, step **930** is performed where the voice packets are processed to combine the speech associated with the talk groups “HTG-1”, “LTG-2” or priority social media profiles “HSMP-1”, “LSMP-2”. The combined speech is then output to a user of the fourth communication device in step **932**. Thereafter, step **934** is performed where the method **900** returns to step **902** or subsequent processing is performed.

If the speech-to-text conversion function of the fourth communication device is not enabled [**924:YES**], then the method **900** continues with steps **964** and **966** of FIG. 9C. Referring now to FIG. 9C, step **964** is performed to determine if the speech-to-text conversion function of the fourth communication device is enabled for the high priority talk group “HTG-1” or high priority social media profile “HSMP-1”. If the speech-to-text conversion function of the fourth communication device is enabled for the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” [**964:YES**], then the method **900** continues with steps **980-999** which will be described below.

If the speech-to-text conversion function of the fourth communication device is not enabled for the high priority talk group “HTG-1” or high priority social media profile “HSMP-1” [**964:NO**], then the method **900** continues with step **968**. Step **968** involves identifying voice packets associated with the respective talk group (e.g., high priority talk group “HTG-1”) or social media profile (e.g., high priority social media profile “HSMP-1”). In a next step **970**, the identified voice packets associated with the respective talk group or social media profile are forwarded from the network to the fourth communication device. After receiving the voice packets at the fourth communication device in step **972**, step **974** is performed where the voice packets are processed to output speech associated with the respective talk group or social media profile to a user of the fourth communication device. In step **976**, the speech associated with the respective talk group or social media profile is output via a user interface of the communication device. Thereafter, step **999** is performed where the method **900** returns to step **902** or subsequent processing is performed.

The decision step **966** is performed to determine if a speech-to-text conversion function of the fourth communication device is enabled for the low priority talk group “LTG-2” or low priority social media profile “LSMP-2”. If the speech-to-text conversion function of the fourth communication device is not enabled
5 for the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” [**966:NO**], then the method continues with steps **968-999** which are described above. If the speech-to-text conversion function of the fourth communication device is enabled for the low priority talk group “LTG-2” or low priority social media profile “LSMP-2” [**966:YES**], then the method continues with step **980**.

10 Step **980** involves identifying voice packets associated with a respective talk group (e.g., low priority talk group “LTG-2”) or social media profile (e.g., low priority social media profile “LSMP-2”). In a next step **982**, the identified packets are processed for converting speech to text. The text can be stored as a log file in a storage device of the network in step **984**. As such, the text can be
15 subsequently retrieved and processed by the network equipment and/or other communication devices. After completing step **984**, an optional step **986** is performed where the text is scanned to identify at least one pre-defined or pre-selected word or phrase.

If one or more pre-defined or pre-selected words or phrases was
20 identified [**988:YES**], then step **990** is performed where the network equipment generates at least one command for outputting an indicator and/or triggering one or more other events (e.g., data logging and email forwarding). The text and command(s) are then communicated from the network to the fourth communication device in step **992**. After receipt of the text and command(s) at the fourth
25 communication device in step **996**, the text and/or at least one indicator is output to a user of the fourth communication device in step **998**. The indicator can include, but is not limited to, an audible indicator and a visible indicator. Step **998** can also involve taking other actions (e.g., data logging and email forwarding) at the fourth communication device. Subsequently, step **999** is performed where the method **900**
30 returns to step **902** or subsequent processing is performed.

If one or more pre-defined or pre-selected words or phrases was not identified [988:NO], then step 994 is performed where the text associated with the respective talk group (e.g., the low priority talk group "LTG-2") or social media profile (e.g., low priority social media profile "LSMP-2") is forwarded from the network to the fourth communication device. After receipt of the text at the fourth communication device in step 996, step 998 is performed. In step 998, the text associated with the respective talk group (e.g., the low priority talk group "LTG-2") or social media profile (e.g., low priority social media profile "LSMP-2") is output to a user of the fourth communication device via a user interface. Thereafter, step 999 is performed where the method 900 returns to step 902 or subsequent processing is performed.

All of the apparatus, methods and algorithms disclosed and claimed herein can be made and executed without undue experimentation in light of the present disclosure. While the invention has been described in terms of preferred embodiments, it will be apparent to those of skill in the art that variations may be applied to the apparatus, methods and sequence of steps of the method without departing from the concept, spirit and scope of the invention. More specifically, it will be apparent that certain components may be added to, combined with, or substituted for the components described herein while the same or similar results would be achieved. All such similar substitutes and modifications apparent to those skilled in the art are deemed to be within the spirit, scope and concept of the invention as defined.


CLAIMS

1. A method for minimizing loss of voice data in a Land Mobile Radio (LMR) communication system in which individual LMR devices are assigned to more than
5 one talk group, comprising:
 receiving a first transmitted voice communication from a first LMR device for a first talk group to which said first LMR device and a second LMR device have been assigned;
 receiving a second transmitted voice communication from a third LMR device
10 for a second talk group to which said first LMR device and said third LMR device have been assigned, said second transmitted voice communication occurring at a time at least partially concurrent with said first transmitted voice communication; and
 responsive to concurrently receiving said first and second transmitted voice communications, automatically preserving a speech information content of said
15 second transmitted voice communication by performing at least one action.
2. The method according to claim 1, wherein said action comprises converting said speech information content to text.
- 20 3. The method according to claim 2, wherein said action further comprises displaying said text at said second LMR device.
4. The method according to claim 2, wherein said converting is performed at said second LMR device.
25
5. The method according to claim 2, wherein said converting is performed at a network server remote from said second LMR device.
6. The method according to claim 2, further comprising providing at least one
30 time stamp for said text.

7. The method according to claim 2, further comprising providing at least one identifier for said text to associate said text with said third LMR device.
8. The method according to claim 2, wherein said action further comprises
5 storing said text for subsequent use.
9. The method according to claim 8, wherein said action further comprises converting said text, which has been stored, to speech and presenting said speech as audio at said second LMR device.
- 10
10. The method according to claim 1, wherein said action comprises storing said speech information content for later presentation at said second LMR device.
11. The method according to claim 1, further comprising:
15 if an audio output of said second LMR device is set to a mute condition, automatically converting to text at least one of said first transmitted voice communication and said second transmitted voice communication.
12. The method according to claim 1, further comprising generating at least one
20 signal to notify a user that said preserving step has been performed.
13. A Land Mobile Radio (LMR) communication system in which individual LMR devices of a plurality of LMR devices are assigned to more than one talk group, comprising:
25 a receiver configured for
- (a) receiving a first transmitted voice communication from a first LMR device for a first talk group to which said first LMR device and a second LMR device have been assigned, and
- (b) receiving a second transmitted voice communication from a third
30 LMR device for a second talk group to which said first LMR device and said

- third LMR device have been assigned, said second transmitted voice communication occurring at a time at least partially concurrent with said first transmitted voice communication; and
- at least one processor configured to automatically preserve a speech
- 5 information content of said second transmitted voice communication by performing at least one action in response to said concurrent reception of said first and second transmitted voice communications at said receiver.

1/13

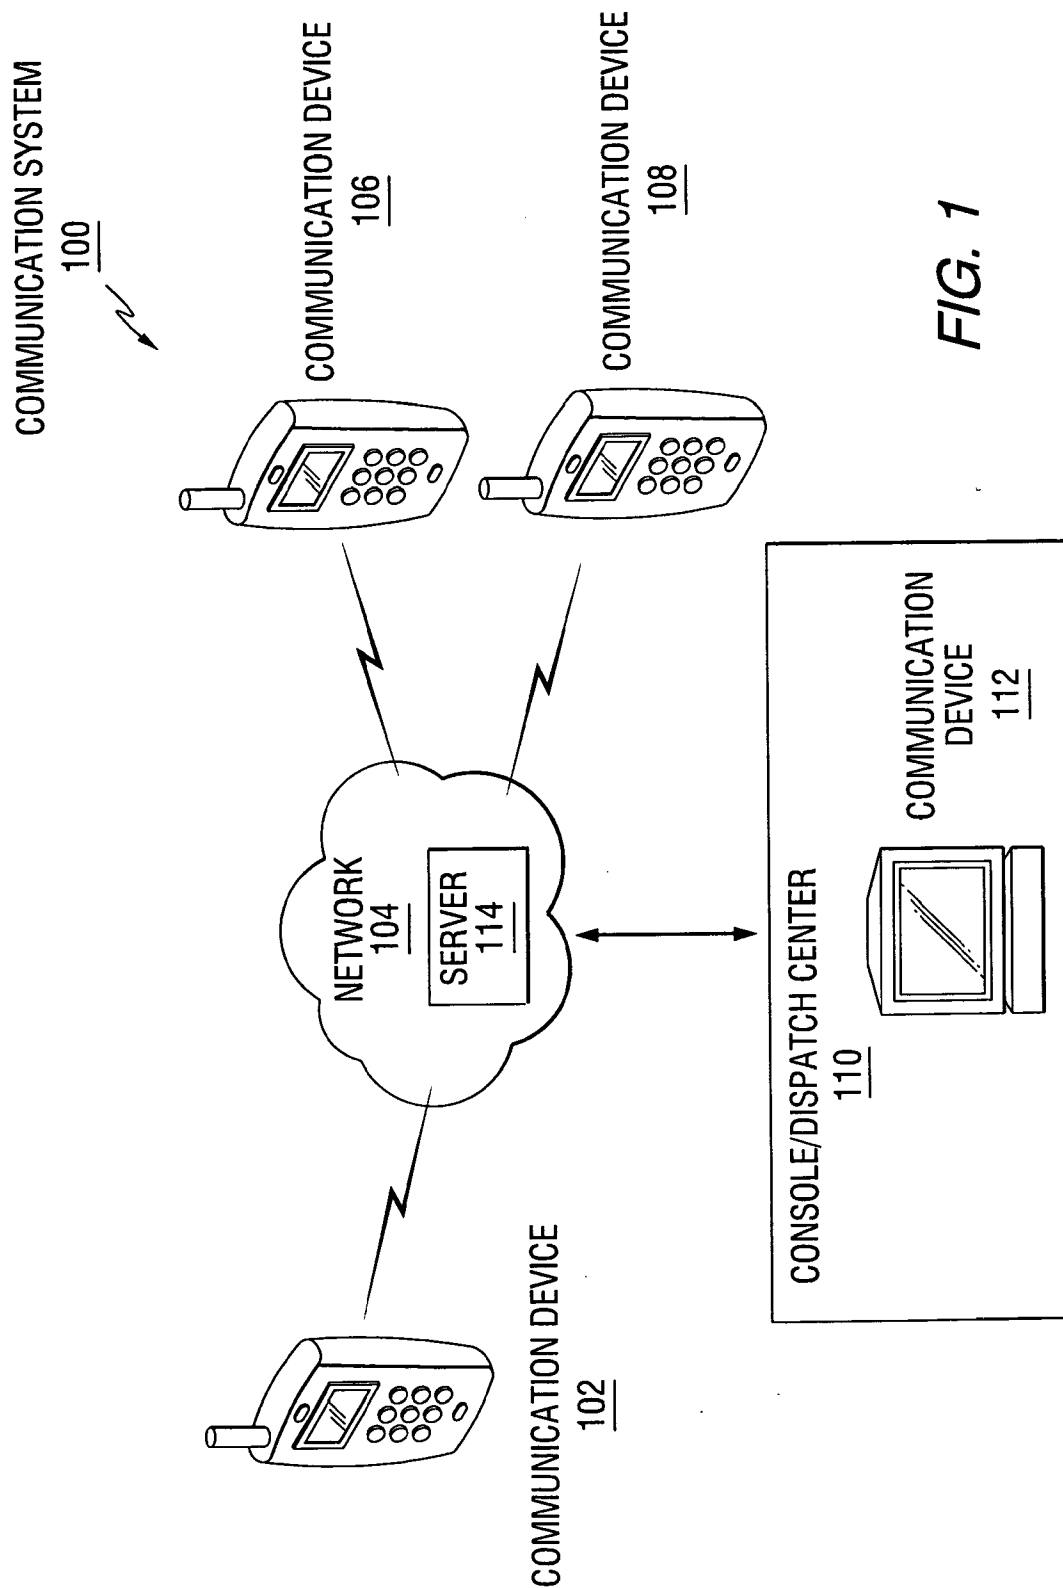

2/13

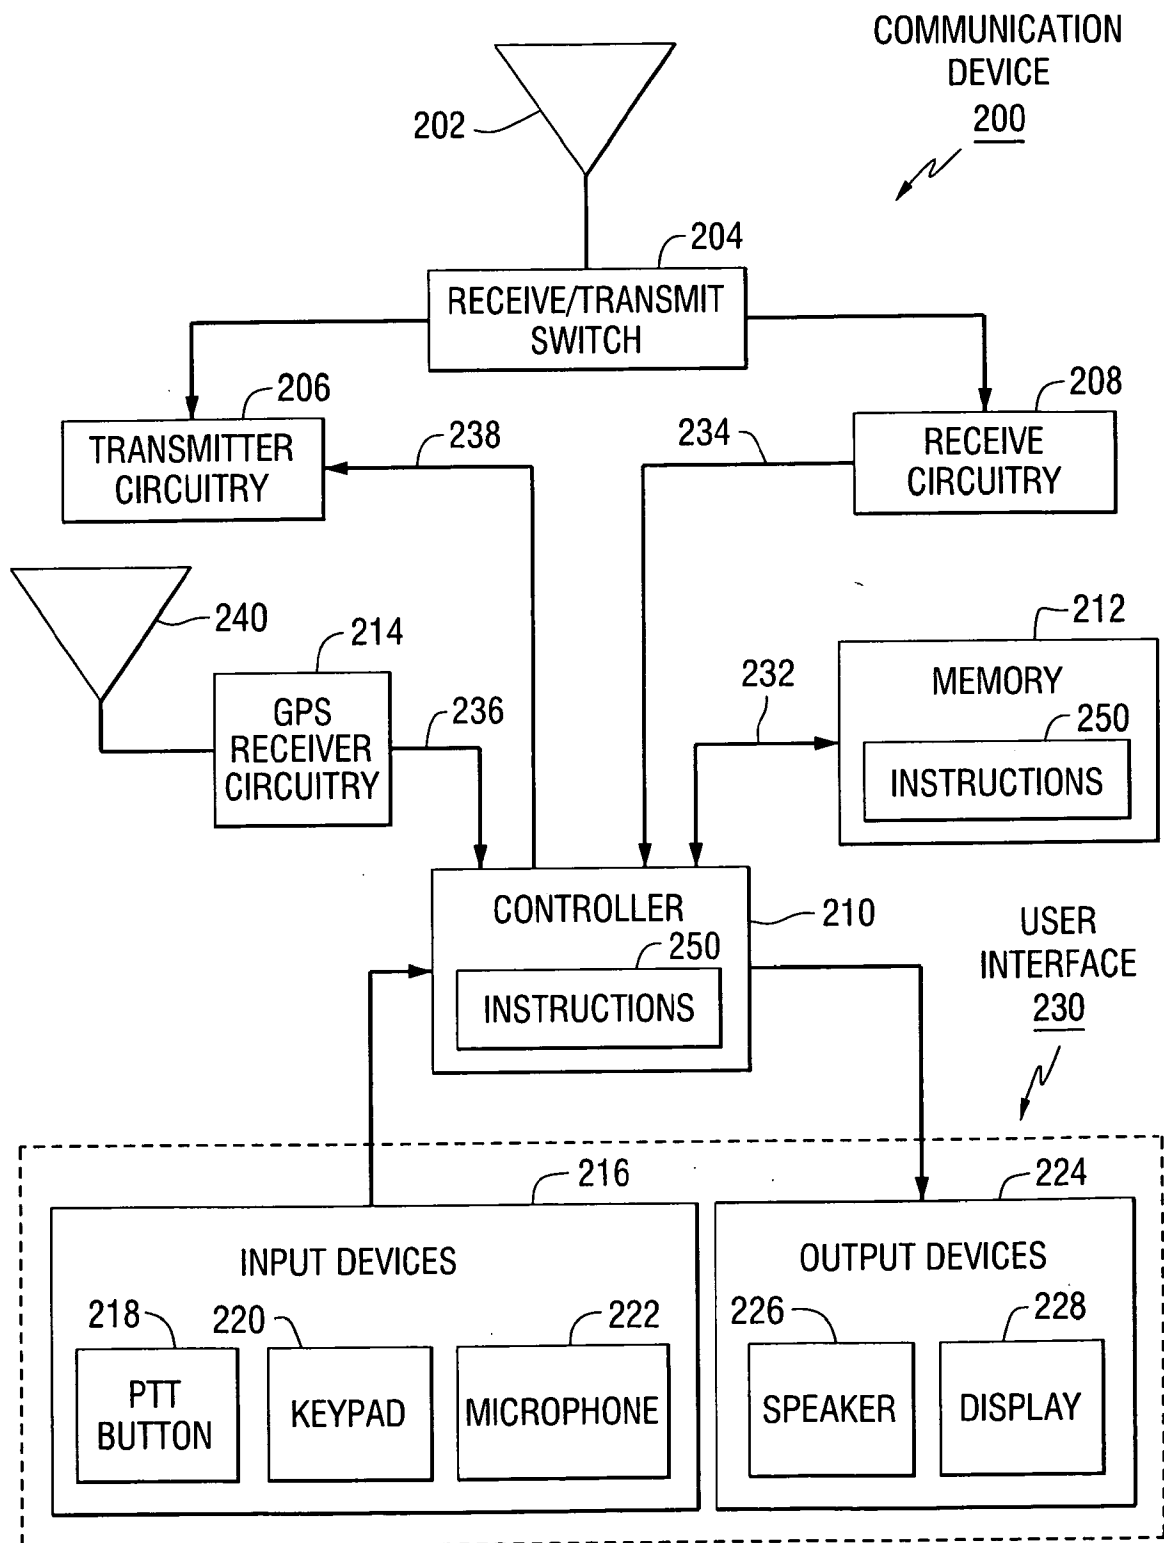
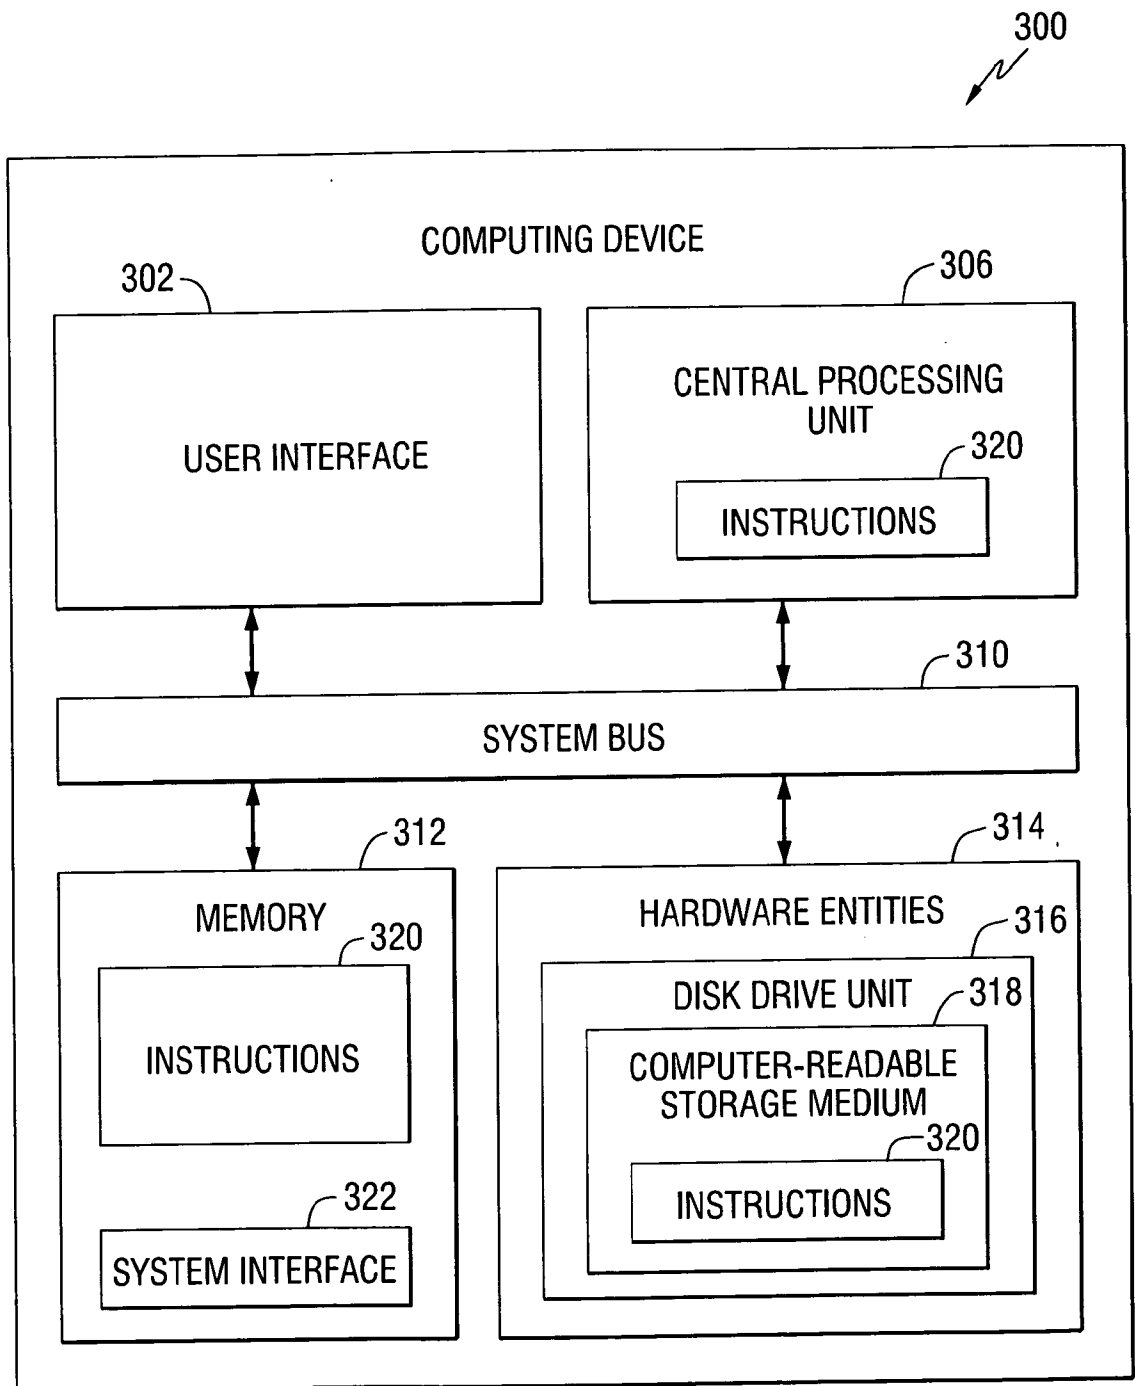


FIG. 2

3/13

**FIG. 3**

4/13

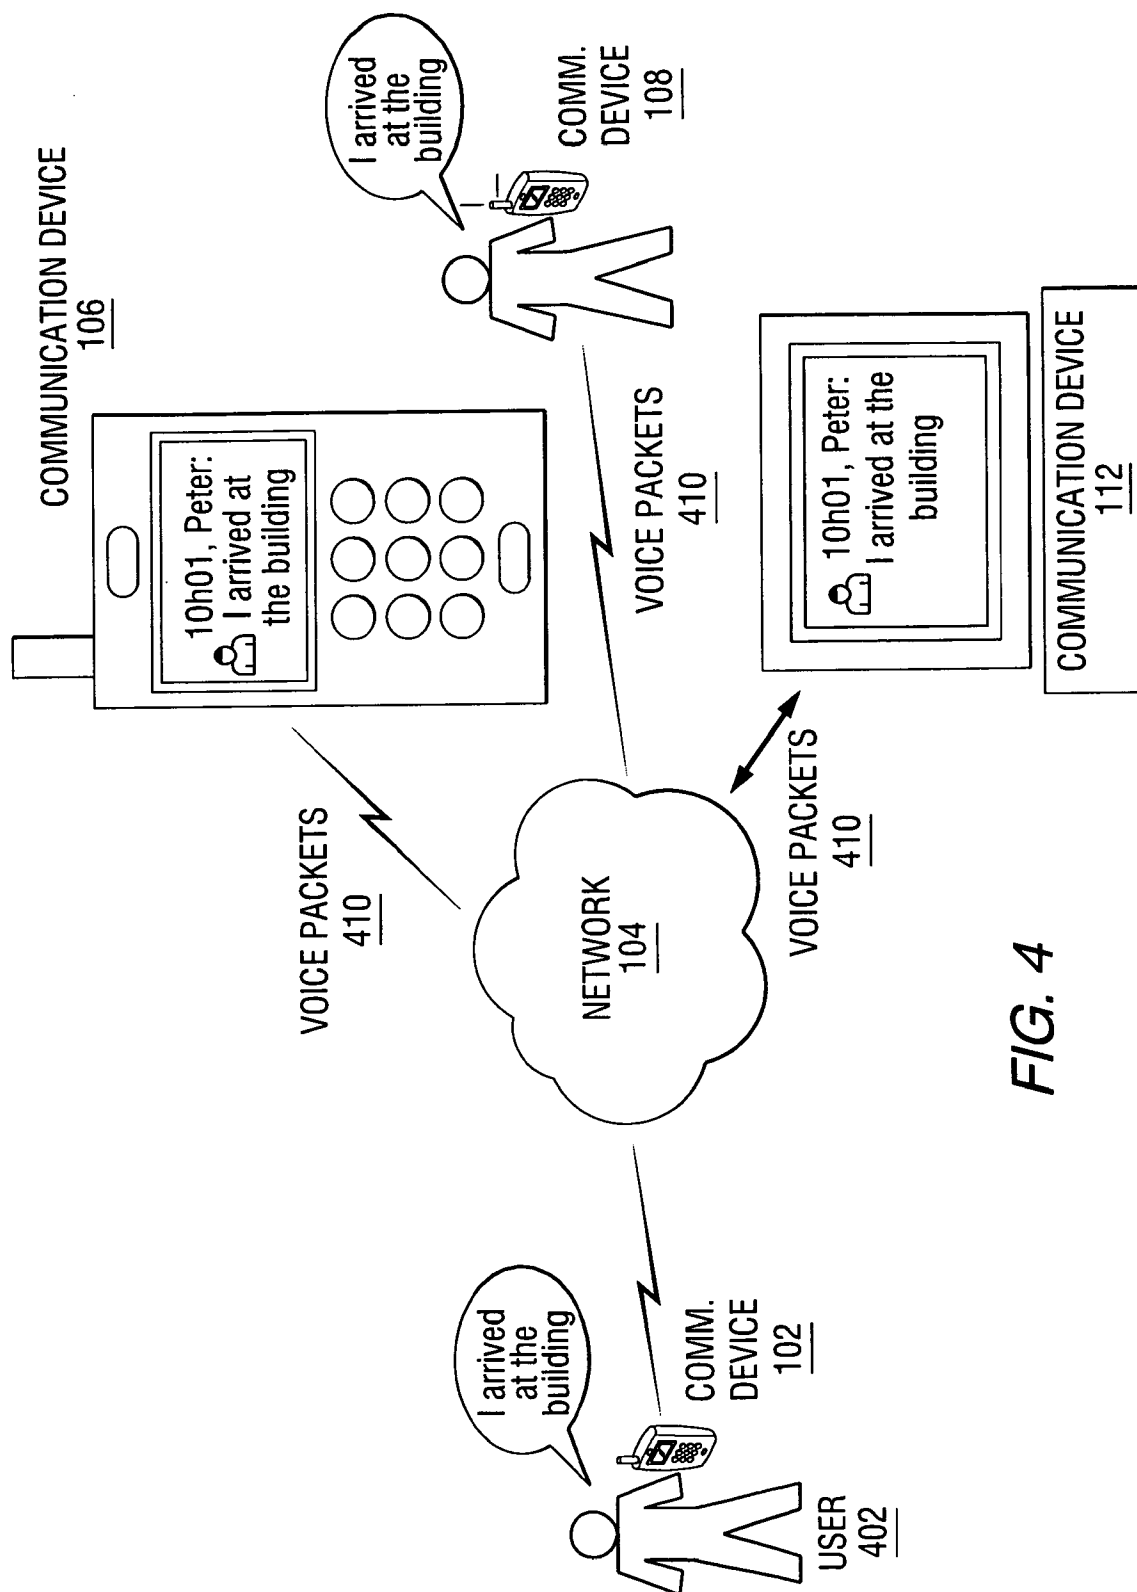


FIG. 4

5/13

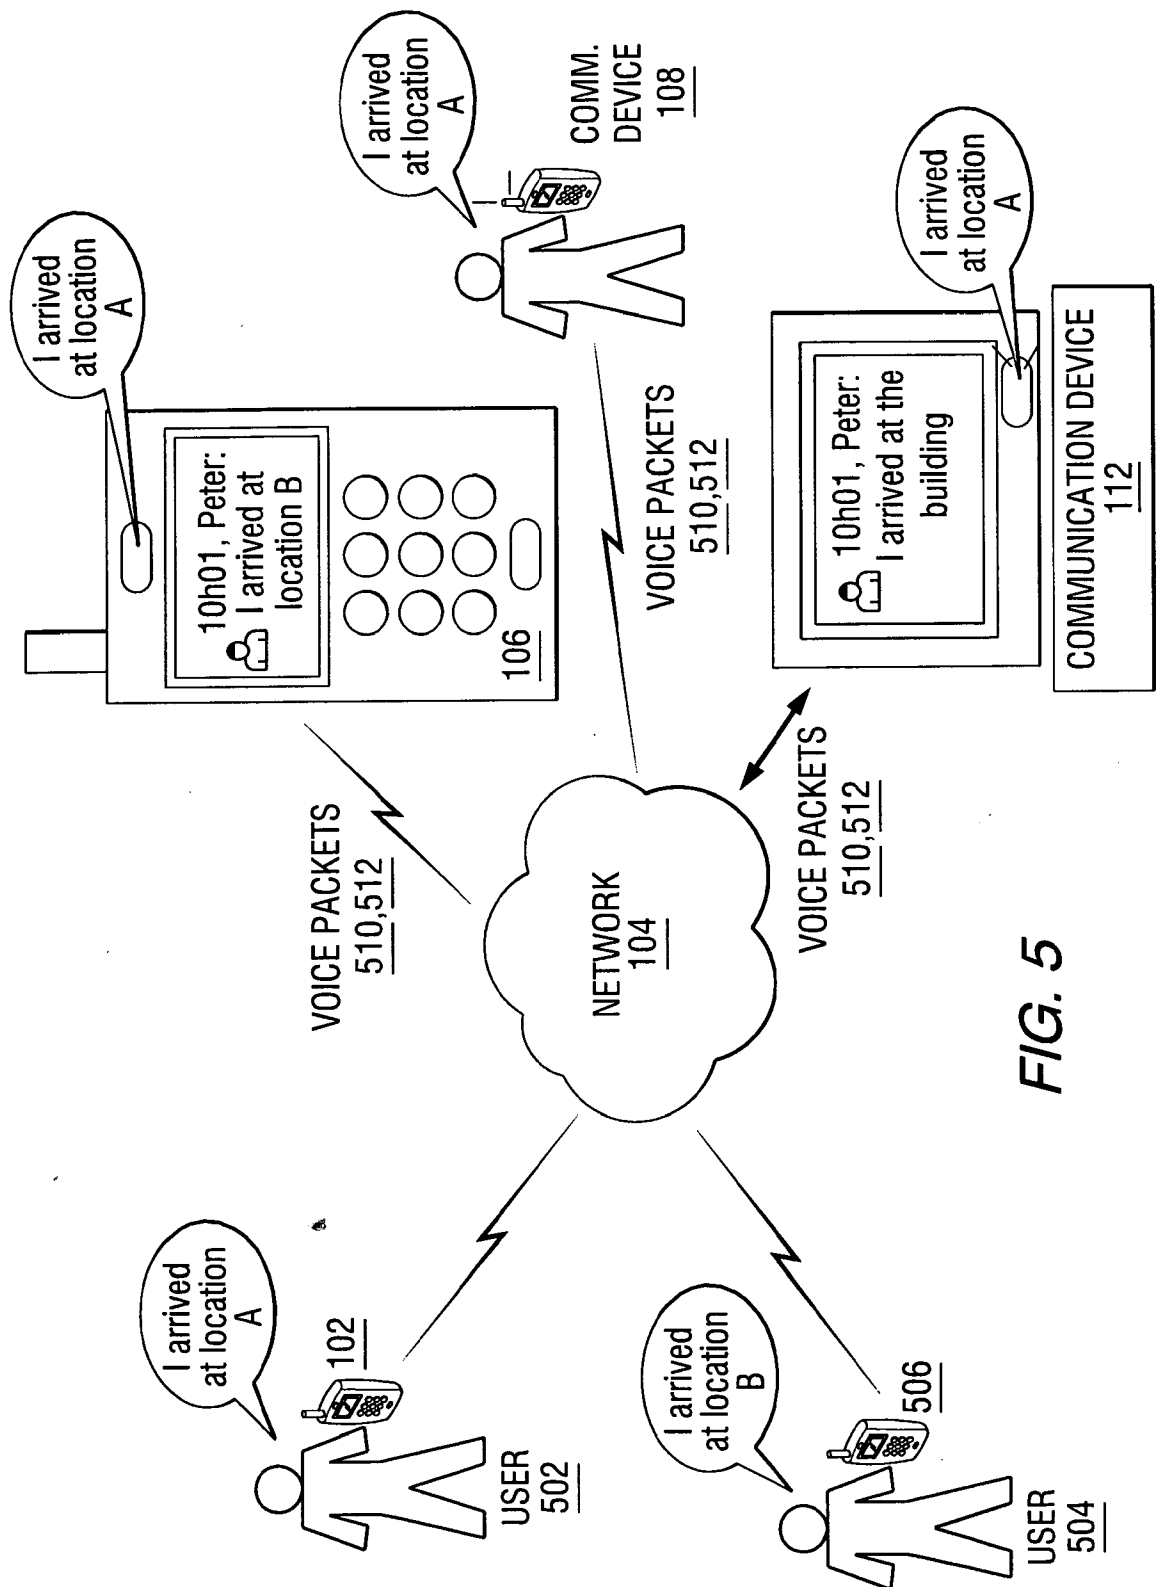


FIG. 5

6/13

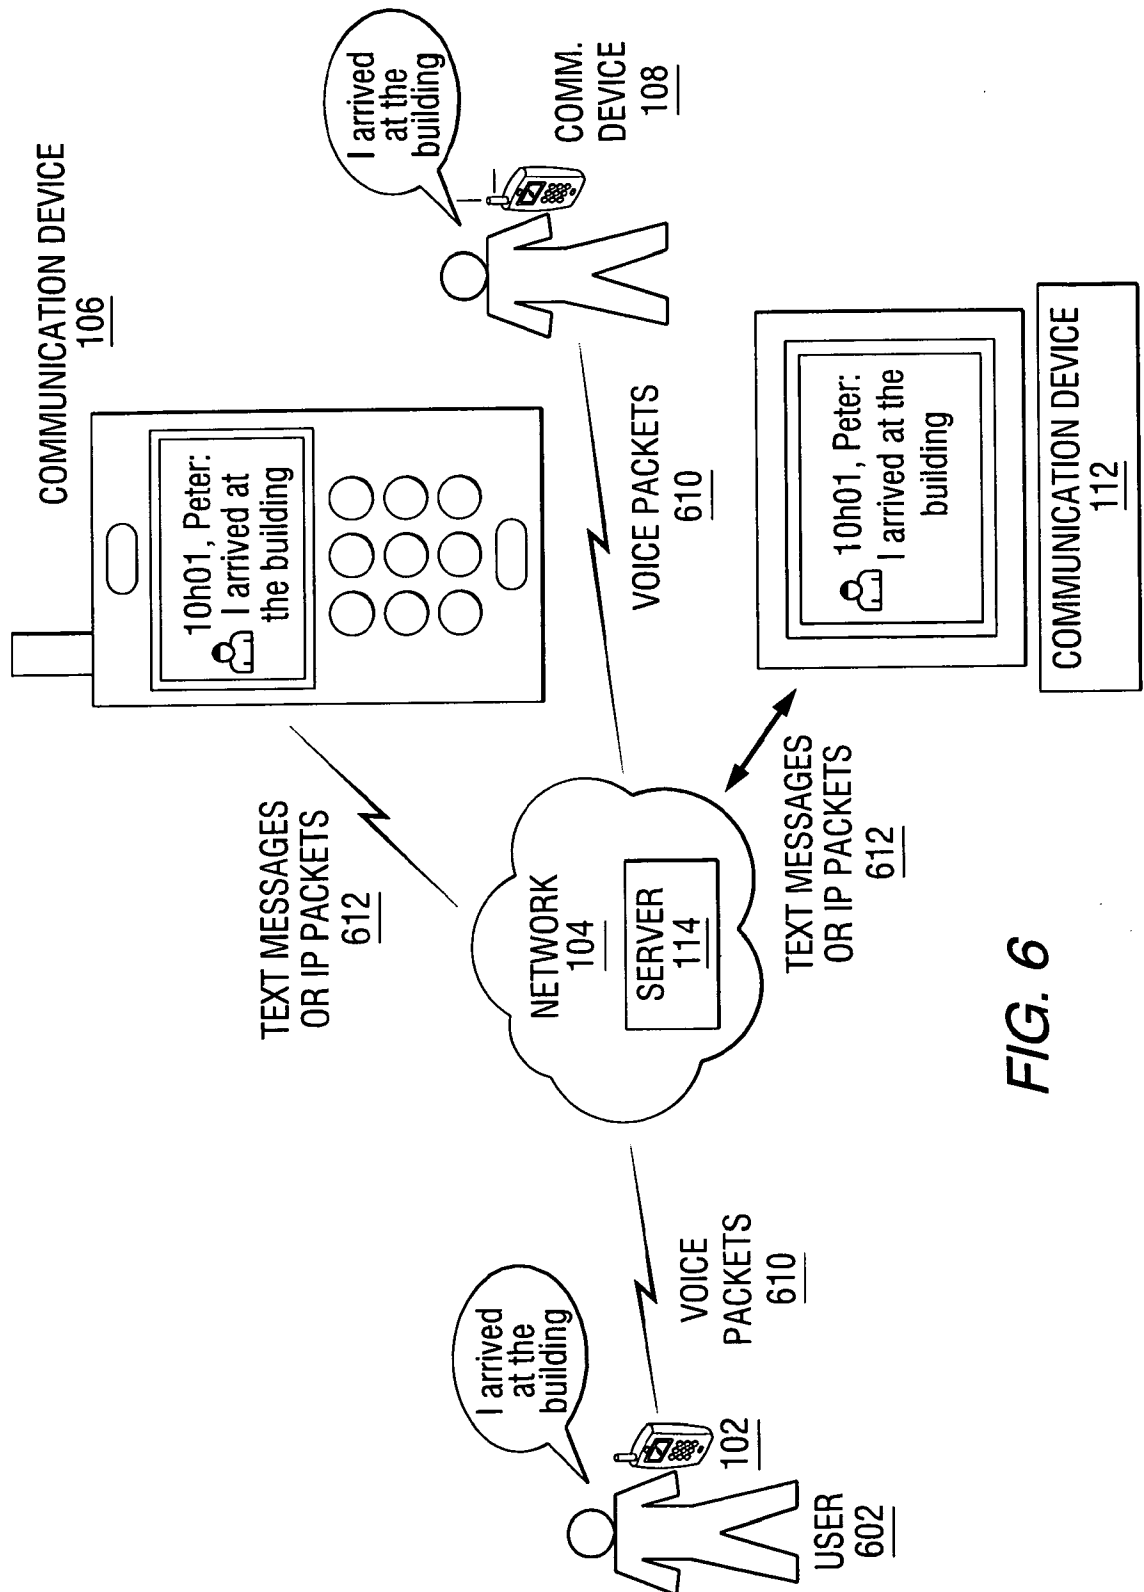


FIG. 6

7/13


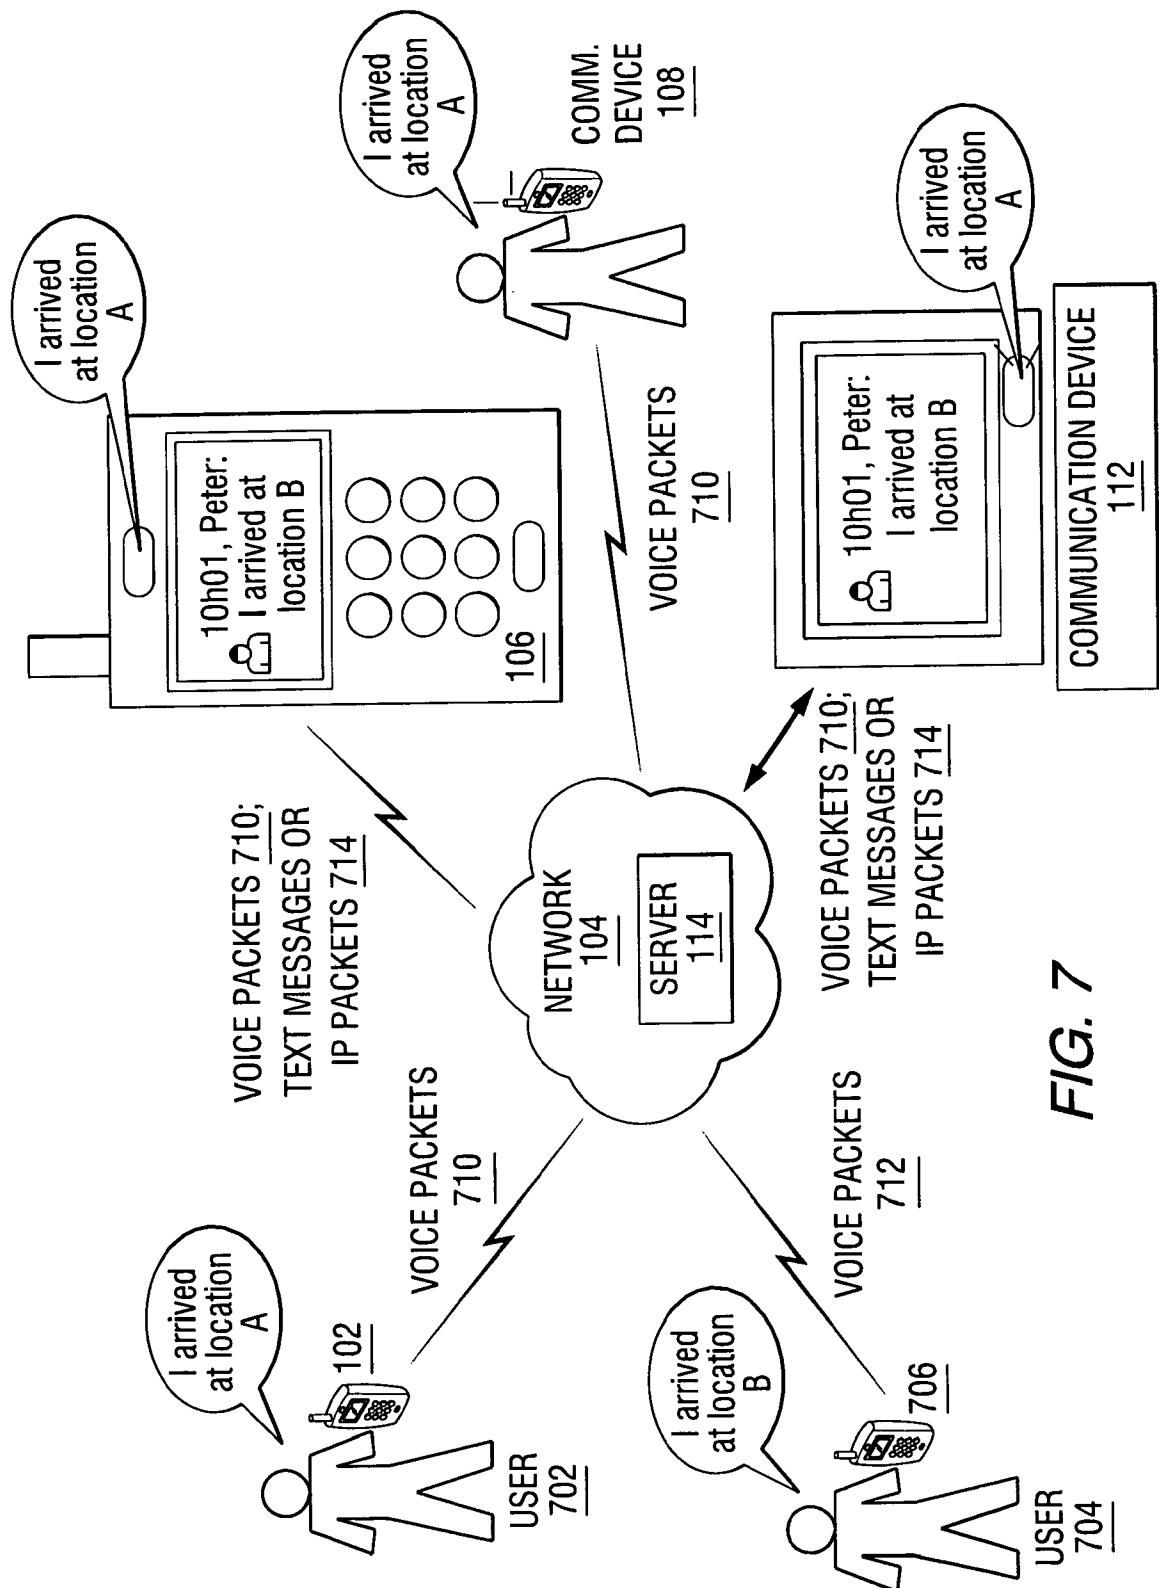


FIG. 7

8/13

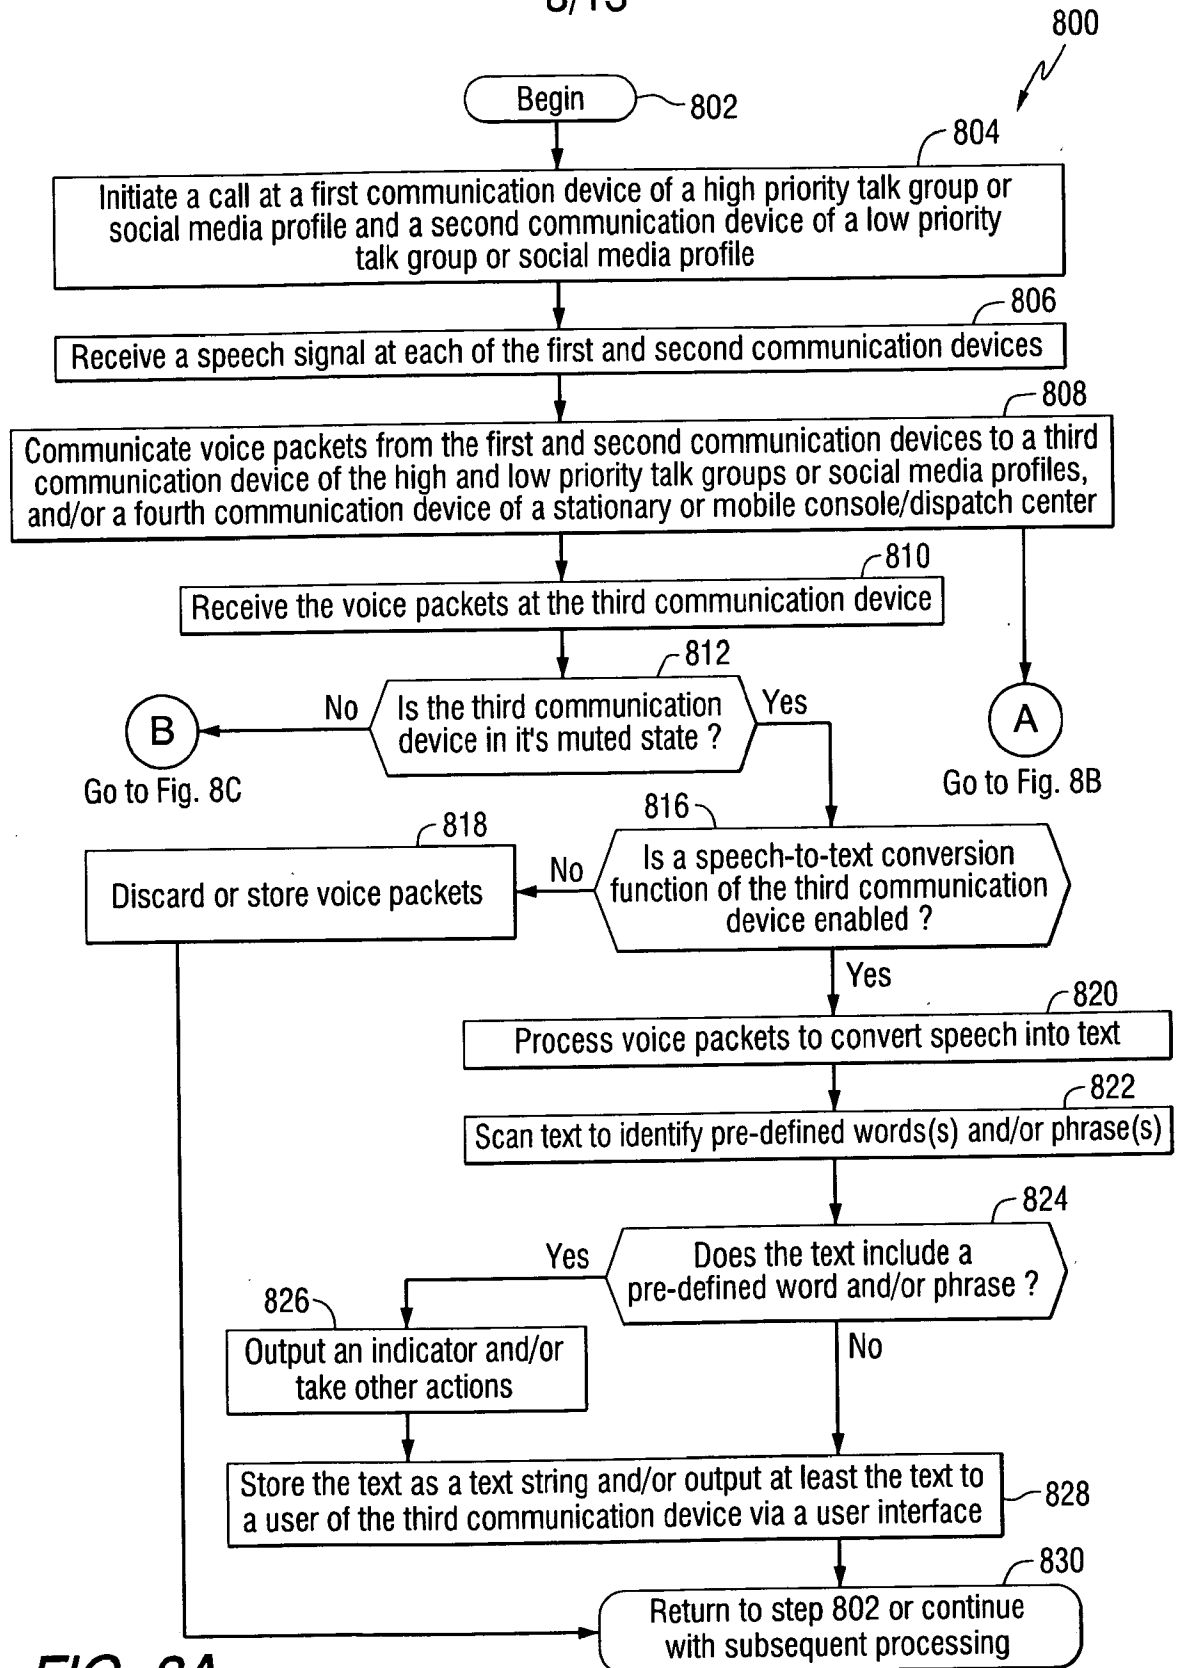

9/13

From Fig. 8A



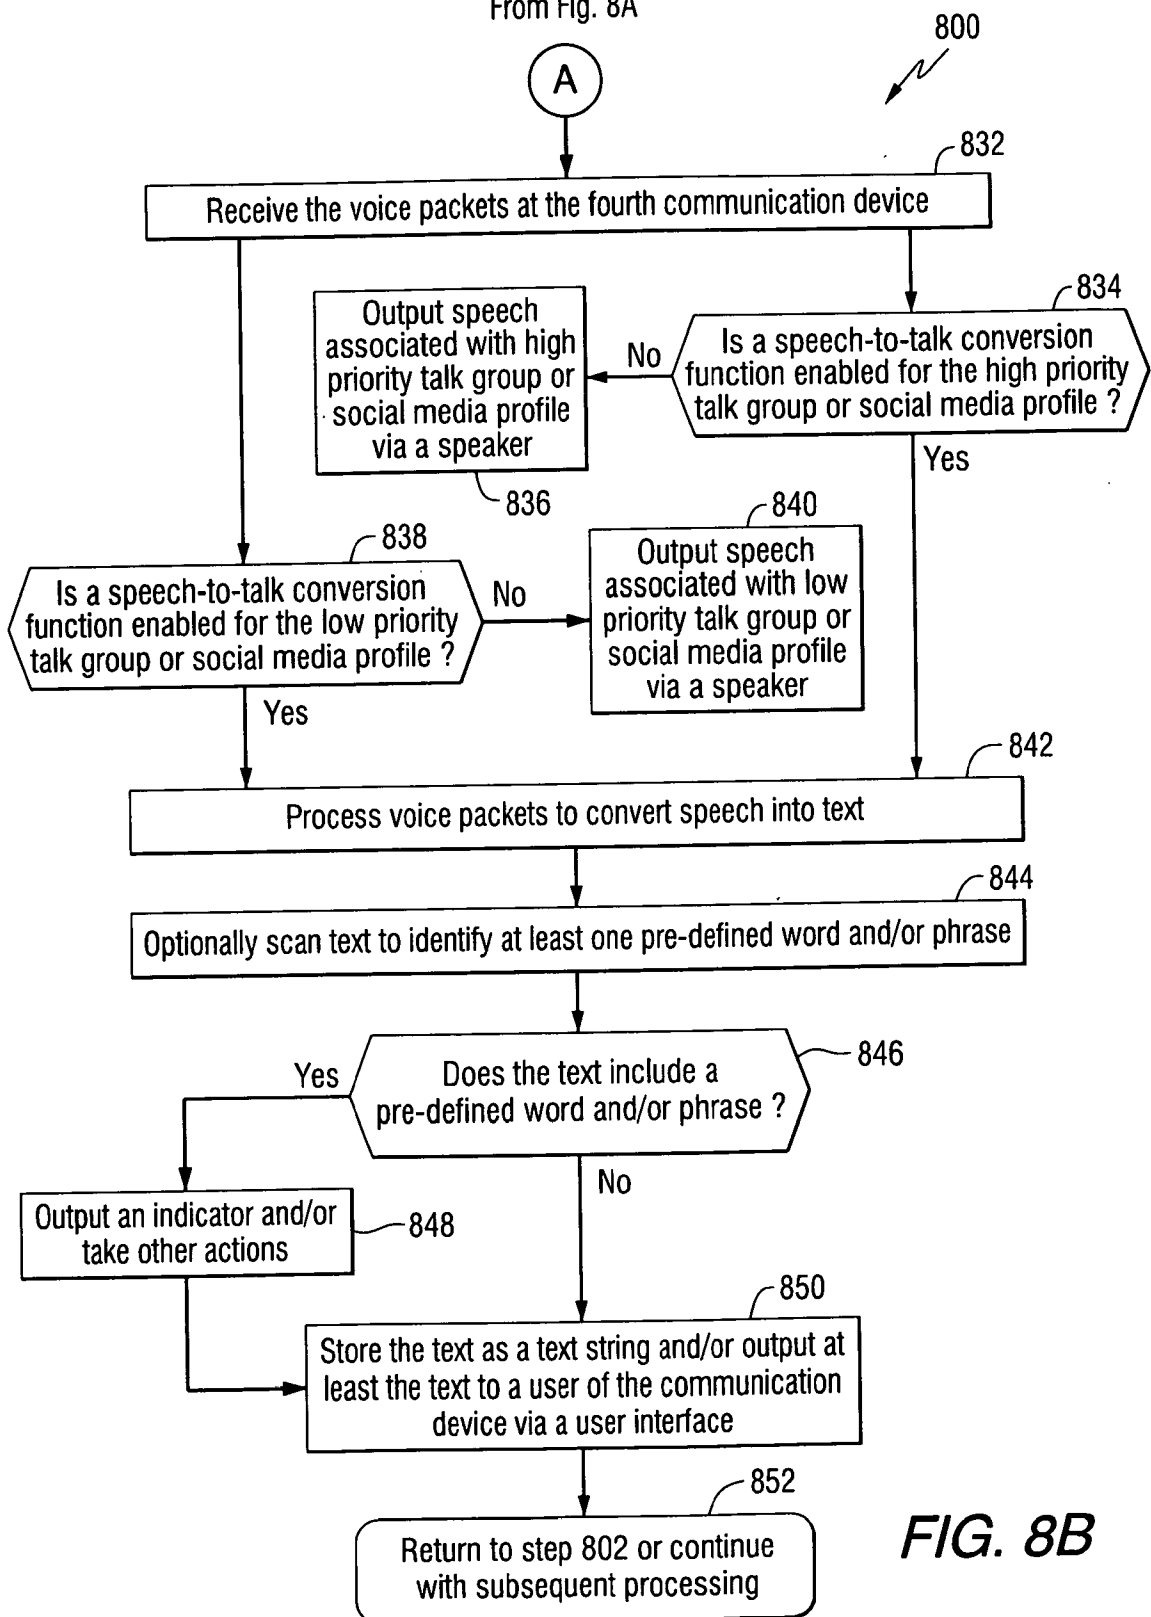


FIG. 8B


10/13

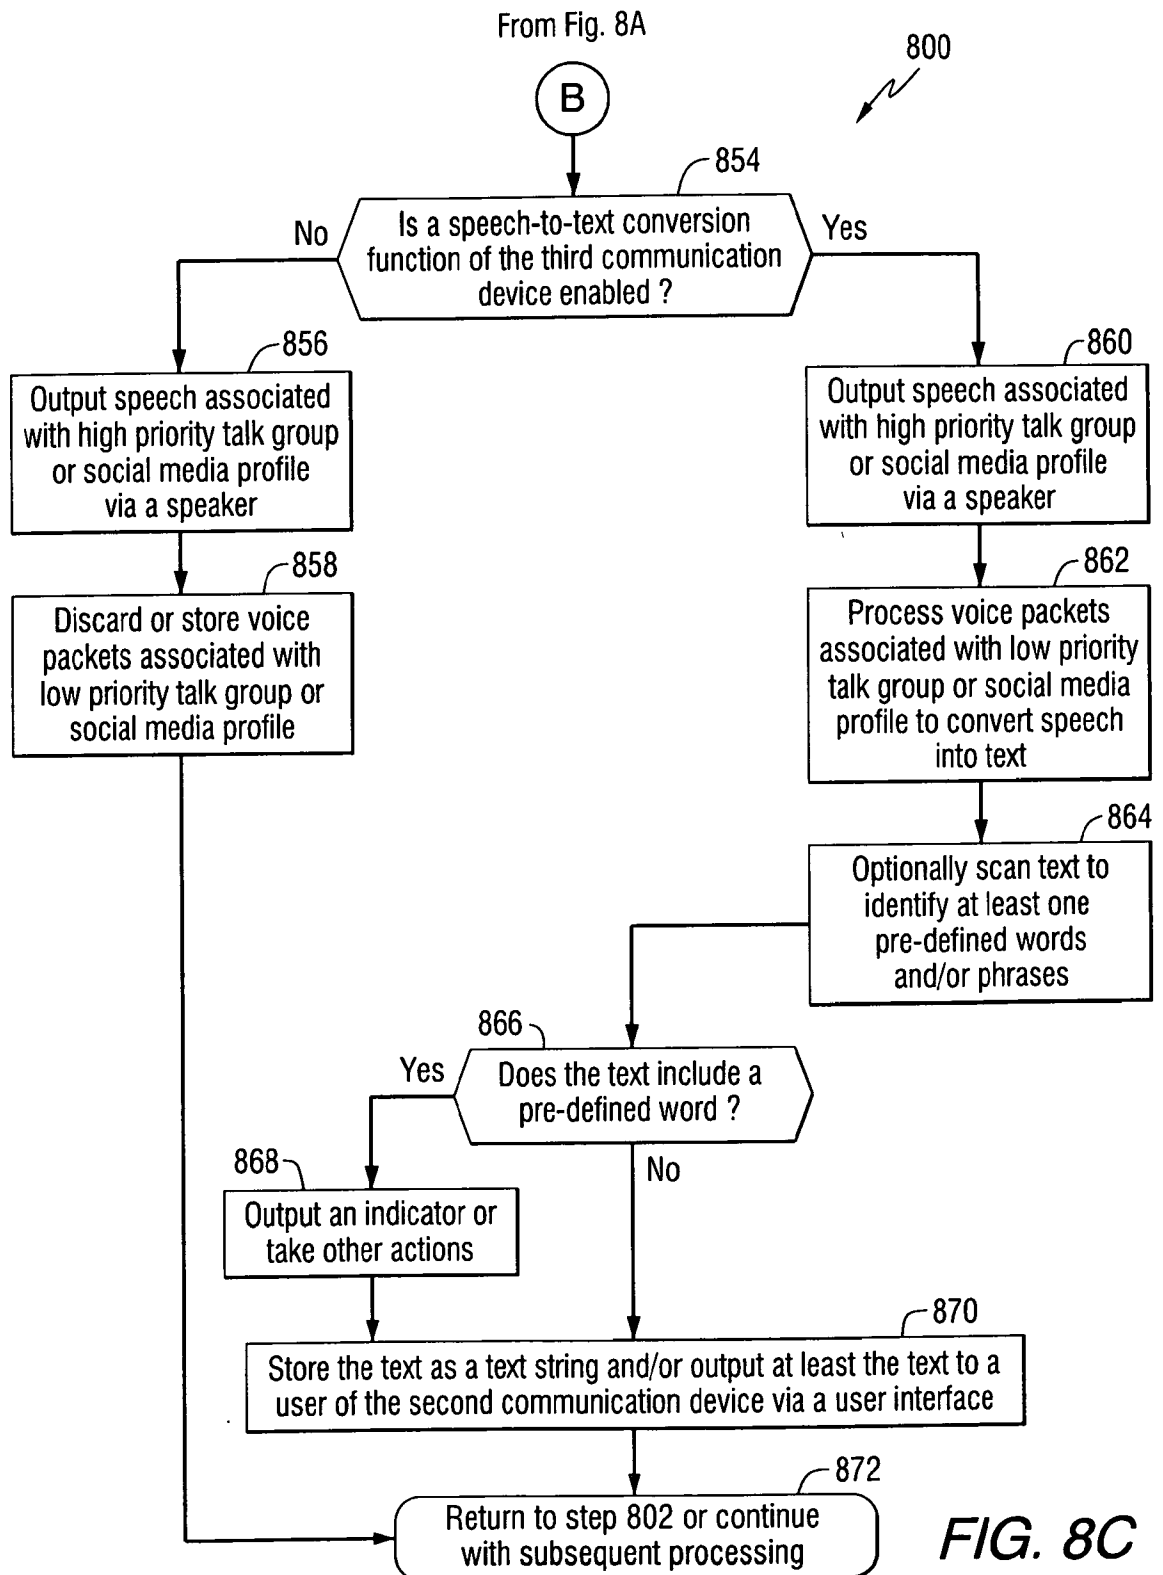

11/13

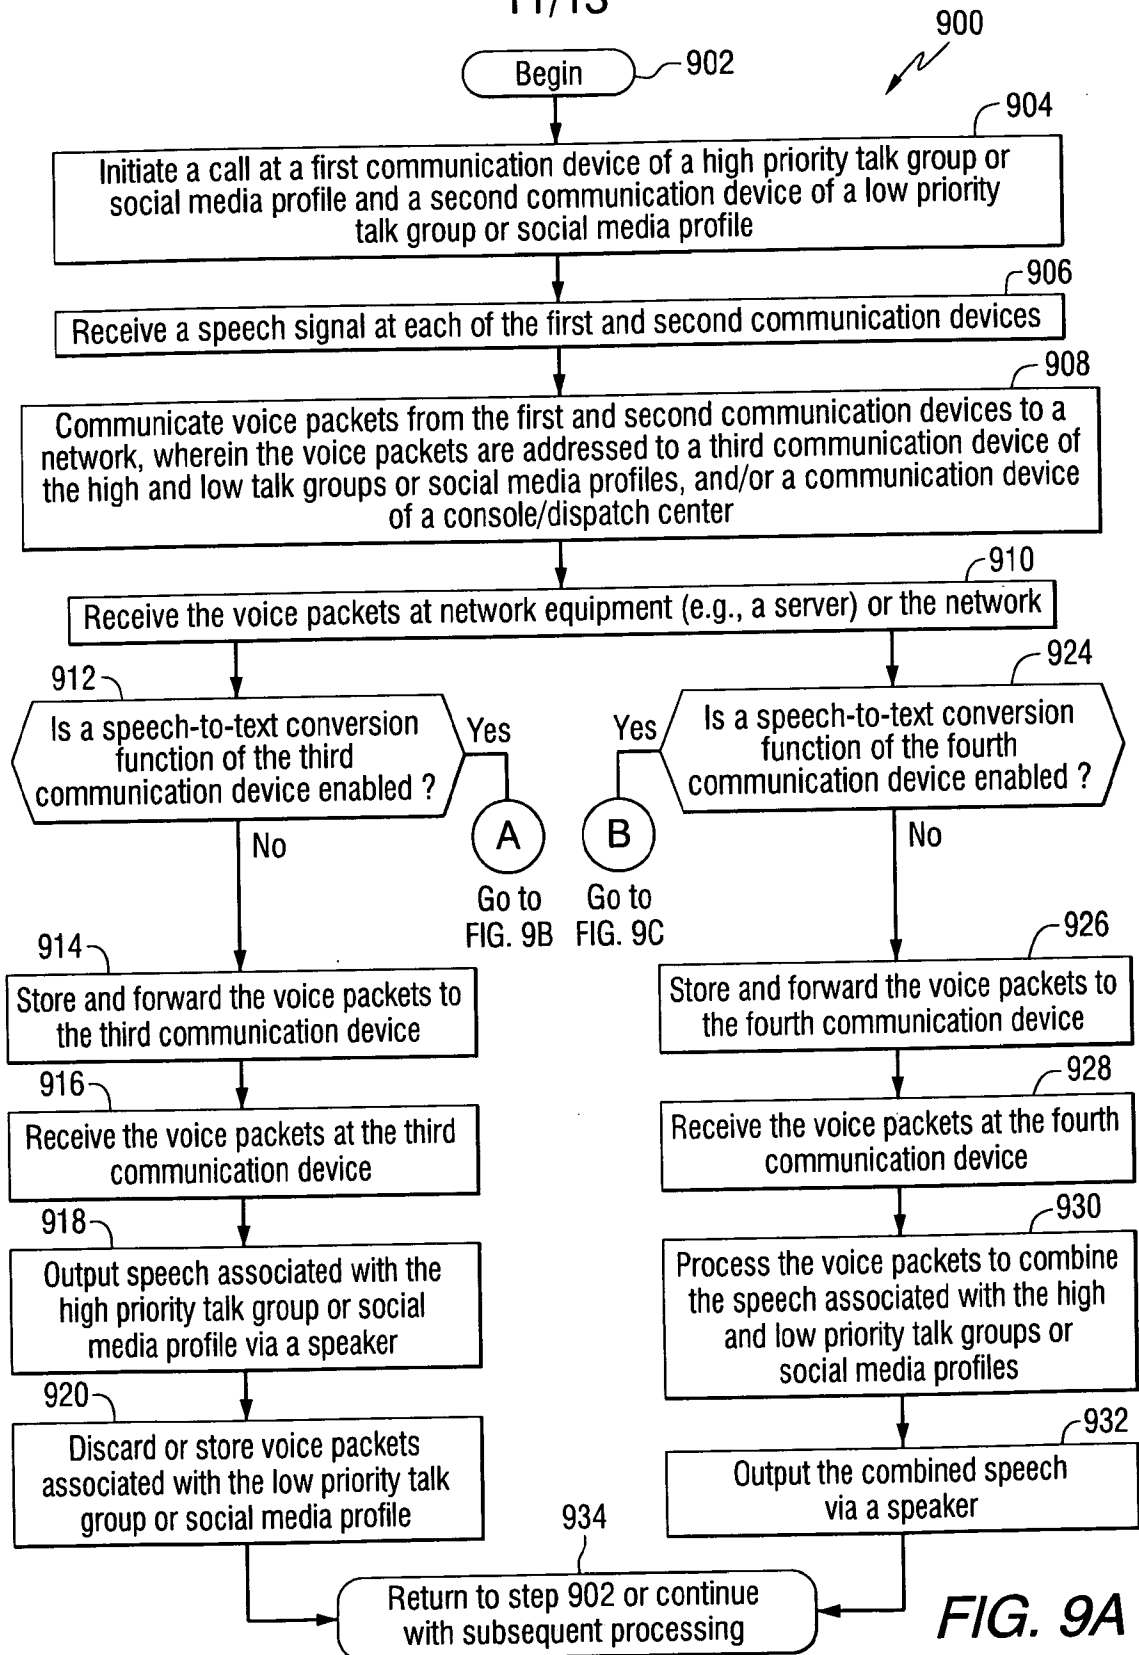

12/13
From FIG. 9A

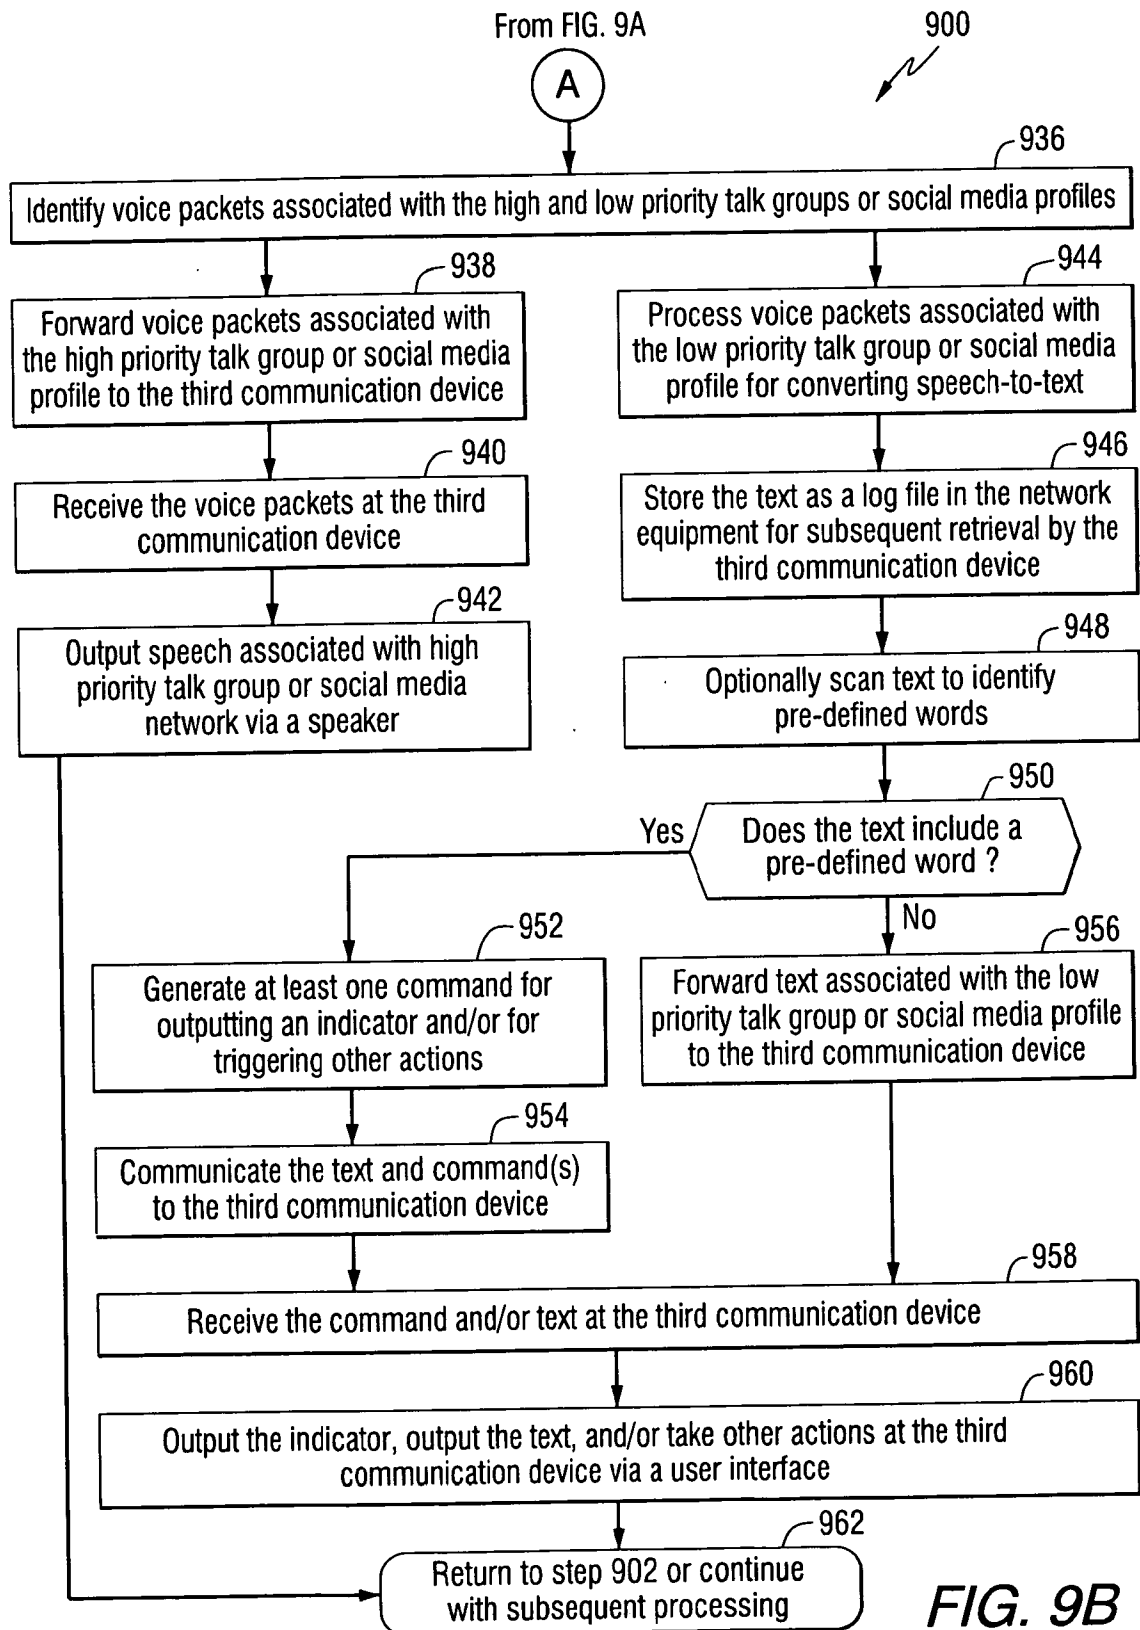

13/13

From FIG. 9A

(B)

900

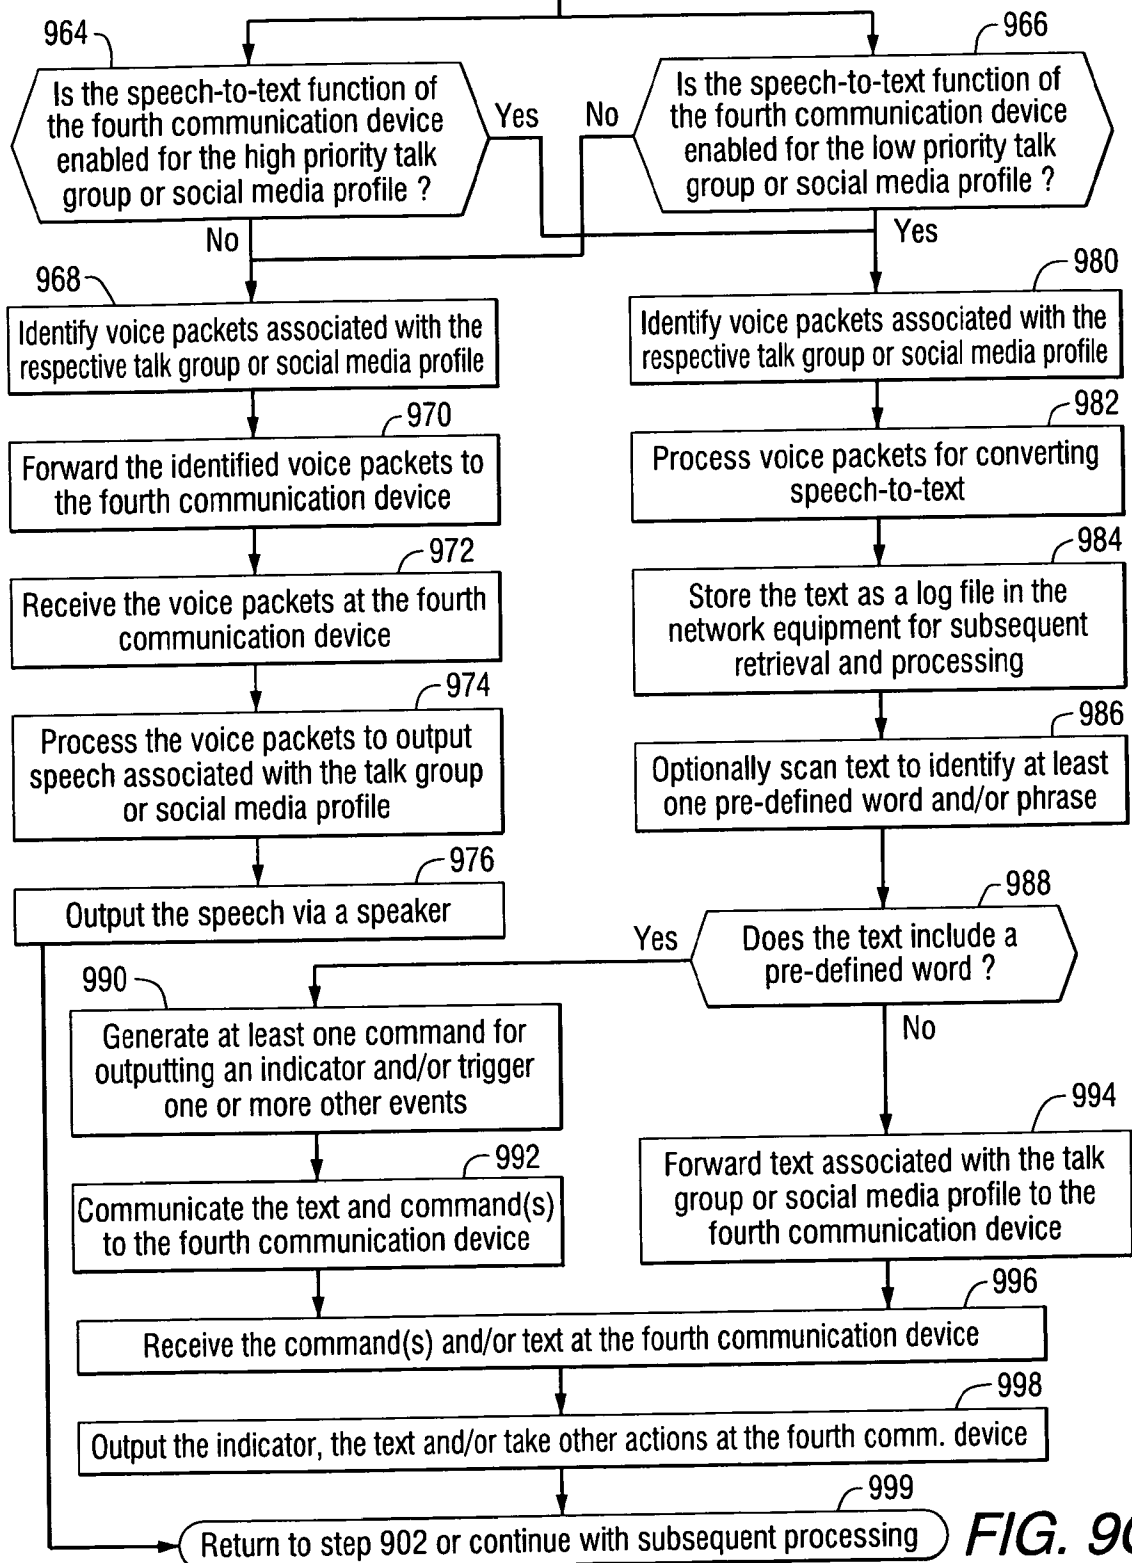


FIG. 9C

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2011/022764

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W4/10

ADD. G10L15/26 H04M3/56

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W H04M G10L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 808 997 A1 (SAMSUNG ELECTRONICS CO LTD [KR]) 18 July 2007 (2007-07-18)	1-5,9-13
Y	abstract paragraph [0006] - paragraph [0011] paragraph [0045] - paragraph [0052]	6-8
Y	WO 03/071774 A1 (CISCO TECH IND [US]) 28 August 2003 (2003-08-28) abstract page 21, line 4 - line 9 page 14, line 29 - line 31 ----- -/-	6-8



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 May 2011

Date of mailing of the international search report

23/05/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Petit, Sebastian

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2011/022764

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 835 015 A2 (AT & T CORP [US]) 8 April 1998 (1998-04-08) abstract column 2, line 15 - column 5, line 58; figure 1 column 6, line 55 - column 8, line 33; figures 3-4 -----	1-13
A	US 2005/021344 A1 (DAVIS BRENT L [US] ET AL) 27 January 2005 (2005-01-27) the whole document -----	1-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2011/022764

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
EP 1808997	A1	18-07-2007	US	2007178925 A1		02-08-2007

WO 03071774	A1	28-08-2003	AU	2003215153 A1		09-09-2003
			CA	2473147 A1		28-08-2003
			CN	1636384 A		06-07-2005
			EP	1477017 A1		17-11-2004
			US	7236580 B1		26-06-2007

EP 0835015	A2	08-04-1998	CA	2215651 A1		02-04-1998
			JP	3437068 B2		18-08-2003
			JP	10224477 A		21-08-1998
			US	5894504 A		13-04-1999

US 2005021344	A1	27-01-2005	CN	1817025 A		09-08-2006
			WO	2005013596 A1		10-02-2005
			JP	2006528804 T		21-12-2006
			KR	20060130004 A		18-12-2006
