



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F16H 15/38	A1	(11) International Publication Number: WO 97/01718 (43) International Publication Date: 16 January 1997 (16.01.97)
<p>(21) International Application Number: PCT/GB96/01465</p> <p>(22) International Filing Date: 19 June 1996 (19.06.96)</p> <p>(30) Priority Data: 9513141.3 28 June 1995 (28.06.95) GB</p> <p>(71) Applicant (for all designated States except US): TOROTRAK (DEVELOPMENT) LIMITED [GB/GB]; 101 Newington Causeway, London SE1 6BU (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): GREENWOOD, Christopher, John [GB/GB]; 113 Fossdale Moss, Leyland, Preston, Lancashire PR5 3WS (GB).</p> <p>(74) Agent: TREVOR-BRISCOE, David, William; British Technology Group Limited, Patents Dept., 101 Newington Causeway, London SE1 6BU (GB).</p>		<p>(81) Designated States: BR, CN, JP, KR, MX, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: CONTINUOUSLY-VARIABLE-RATIO TRANSMISSION OF THE TOROIDAL-RACE ROLLING-TRACTION TYPE</p>		
<p>(57) Abstract</p>		
<p>A roller control system for a continuously-variable-ratio transmission (CVT) of the toroidal-race rolling-traction type. The system includes an operating mechanism having a first part (5, 6) operable to control the position of the roller centre along the torus centre circle but incapable of defining the tilt angle (36) adopted by the roller (7), and a second part comprising a mechanical link (13) connected to the roller bearings and operable to control the tilt angle (36). The link (13) lies substantially parallel to the plane of the roller (7) and is constrained to pass through a predetermined single point (14).</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

CONTINUOUSLY-VARIABLE RATIO TRANSMISSION OF THE TOROIDAL-RACE ROLLING-TRACTION TYPE.

This invention relates to continuously-variable ratio transmissions ("CVT's") of the toroidal-race rolling-traction type and especially to means for controlling the orientation of the rollers in the variators, that is to say the ratio-varying components, of such CVT's.

Figure 1 is a simplified representation of part of one known variator, viewed in a direction perpendicular to the common axis N of the two discs G and J. A single roller A, which will in practice be one of a set of three disposed at equal angular intervals around the axis N, transmits traction between part-toroidal races F and H in discs G and J respectively, and is mounted within a carriage C to rotate about a centre and axis (B) both of which are defined by and fixed relative to the carriage. A rod P connects the carriage C to a piston D which has freedom to move axially within a fixed cylinder E, and also to tilt slightly as it does so without losing seal.

Such a variator has been found to work efficiently in a so-called "torque-controlled" CVT where a pressure generated hydraulically (by means not shown) in cylinder E exerts a force on piston D, which for equilibrium must balance the reaction force resulting from the resultant torque at the contact between the roller A and the races F and H. Roller A changes its angle of orientation (or "tilt angle"), and thus the ratio it transmits between discs G and J, by tilting about the axis of rod P, and it has been found that each position of the centre of piston D, within its range of axial movement within cylinder E, correlates with a unique tilt angle of the roller A. In other words, each equilibrium tilt angle of the roller is uniquely defined by just three points, namely the locations of contact of the roller A with races F and H and the location of the centre of the piston D. Such a variator, and the CVT of which it is part, is described and shown in more detail in Patent EP-B-0444086.

As is well known in this art, the centre of the roller is at all times constrained to follow the centre circle of the torus to which races F and H conform. That centre circle must lie in the mid-plane M of the torus. Rod P, which as already noted defines the tilt axis of the roller, is inclined to that plane at an angle L, known as the castor angle. The advantages of operating a toroidal-race variator with a substantial degree of castor angle, say of the order of 15°, are well known in the art.

It will be seen that in the apparatus of Figure 1, as is typical in the prior art, the axis of movement of the component which applies the reaction force (the piston D) and the axis of tilt (the rod P) coincide at the third of the three points by which each angular setting of the roller is uniquely defined. This coincidence imposes constraints upon the location and orientation of certain components, particularly the cylinder E, and thus on the overall dimensions of the variator. For example, because the axis of cylinder E is inclined to the transverse mid-plane M by the castor angle L, the radius at which the cylinder is located relative to the disc axis N exceeds the radius of the discs themselves. If it did not, a corner of the cylinder would be at risk of fouling the disc J.

According to the present invention such constraints are diminished, thus providing greater freedom to locate the equivalent of cylinder E so as to minimise the overall dimensions of the variator, by separating the functions of reaction force generation and tilt control so as to avoid the two axes coinciding at the third point, in the manner just described. Such separation occurs also in the unusual CVT described in Patent Specification US-A-3933054, but there the tilt control of each roller is achieved by a shaped slot, in which runs a pin fixed to the roller bearings and projecting in a direction coaxial with the roller itself. Such a construction has two particular disadvantages. Firstly that any pin-and-slot engagement is inherently liable to wear and friction. Secondly that the orientation and minimum length of the pin, relative to the roller, is such that whenever the two discs tend to move slightly in unison in either direction along their common axis, as they tend to do continually in use under varying loads, the consequent effect of the pin-and-slot engagement will be to cause the roller to tend to "steer" to a new tilt angle, thus changing the transmitted ratio although no such change has been demanded. The present invention relies on a different tilt control mechanism, which requires no pin-and-slot connection and which is inherently less prone to cause any ratio change in response to axial movements of the discs.

The present invention is defined by the claims, the contents of which are to be read as included within the description of this specification, and the invention will now be described by way of example with reference to the following further figures of diagrammatic drawings in which:-

Figure 2 shows one roller control mechanism, viewed along the axis of the roller;
Figure 3 is a partial view in the direction of the arrow III in Figure 2;
Figure 4 is another partial view, in the direction of the arrow IV in Figure 2; and
Figure 5 shows part of another embodiment of the invention.

5 Figure 2 shows a source 1 of hydraulic power connected, by way of conduits 3, 4
and of a central programmed control system 2 of a kind appropriate to torque control, to
opposite ends of a cylinder 5 containing a piston 6. The roller 7 is rotatably mounted
within a carriage 8, which is attached to the piston 6 by way of a rod 9. Items 7, 8, 9 and 6
correspond with items A, C, P and D in Figure 1 to the extent that the hydraulic forces
10 generated within cylinder 5 are controlled so as to balance the torque reaction forces
generated at the contacts between the roller 7 and discs 10 and 11, so bringing the CVT into
equilibrium with the roller at the tilt angle appropriate to that torque reaction. In Figure 1,
however, both the centre of roller A and its axis of rotation were fixed relative to
carriage C. In Figure 2, as will be further explained, the carriage 8 determines only the
15 centre of rotation of the roller. Its axis of rotation, and thus also the perpendicular tilt axis
about which it tilts to change ratio, is determined by a rod 13 which can slide through, but
is radially constrained by, an aperture 14 formed in a member 15 which is either fixed to
or part of the fixed structure of the CVT. In Figures 2 and 3 it is shown fixed to cylinder 5.

Figure 3 shows that piston 6 comprises a two-part cylindrical sleeve 17, the
20 ends 18, 19 of which pass through sealed apertures in the opposite end walls of cylinder 5.
The sleeve 17 also has a central part 20 of enlarged diameter, which carries a seal 21 and
thus moves as a piston within the central chamber 22 of cylinder 5. Within the central
part 20 of the sleeve 17 fits a ring 25, in the middle of which a member 26 is free to rotate
in the manner of a spherical bearing. Rod 9 is fixed to member 26. This form of piston is
25 thus essentially of a kind shown in more detail in patent publication WO 92/11475 and has
the advantage that the rod 9 is free to rotate through a conical angle but is out of contact
with the hydraulic fluid in cylinder 5, so avoiding the need there would be for flexible seals
around the rod if it were attached to a conventional piston, and was therefore exposed to
the cylinder fluid.

As Figure 3 also shows, carriage 8 supports roller 7 by way of a rod 28 to which is fixed the inner half 29 of a spherical bearing. Thus, as has already been said, carriage 8 fixes only the centre and not also the axis of rotation of roller 7. As Figures 3 and 4 together show, the outer half 30 of the spherical bearing is held by the inner wall of a sleeve 31 which is attached (by way of a second carriage 16 which fits with good clearance within the jaws of carriage 8) both to the rod 13 and to a ball race 32 about which the roller 7 spins.

Because of the two spherical joints at 25/26 and 29/30 the piston/cylinder combination 5/6, which can be regarded as a first part of the roller operating mechanism, can exert thrust on the roller 7 to balance its reaction forces against the discs 10 and 11, but cannot define the ratio angle adopted by the roller. In contrast the rod 13 and associated parts, together constituting a second part of the operating mechanism, can exert no such thrust, but define both the axis about which the roller tilts to change ratio and the angle (the "castor angle" 36) which that axis makes with the torus mid-plane 35.

In terms of the explanation of the operation of a torque-controlled CVT given in the third paragraph of this specification, in Figure 2 each equilibrium tilt angle of the roller 7 now correlates with a unique triangle of which the fixed aperture 14 is always the vertex, but the locations of the two roller/disc contacts and the distances between each of those contacts and the vertex are unique. It should also be noted that the axes of rod 13 and roller 7 are coplanar and intersect at the roller centre, so reducing to a minimum any steer effect that the rod will impose on the roller in response to axial movements of the discs 10, 11 under load.

In Figure 2 the axis of cylinder 5 is shown aligned with the torus mid-plane 35: alternatively, it could for instance be offset from that plane but parallel to it. Because the cylinder axis is no longer aligned with the roller tilt axis (as it is, for instance, in the detailed embodiments of EP-B-0444086) the structure of cylinder 5 can now be located with more freedom, and notably at a substantially smaller radius relative to the common axis of the discs, and the relative simplicity of the rod 13 and the other parts that define the tilt axis enable them to be located at a smaller radius still. Possibly, as indicated in Figure 2, the entire structure of the cylinder 5, the rod 13 and the member 15 may be

accommodated within the imaginary cylinder of which the two discs 10 and 11 constitute the end walls.

In the alternative construction shown in outline in Figure 5 the aperture 14, instead of being formed in a member 15 fixed to the structure of the CVT as a whole, is now formed in a flange 40 formed at the forward tip of end 18 of the sleeve 17. The aperture 14 therefore moves with the piston 6, and each equilibrium tilt angle of the roller 7 (not shown in Figure 5) correlates with a trio of unique locations, namely the two roller/disc contacts and the instantaneous location of the aperture 14, which of course now reflects the position within its stroke of the piston 6. With this embodiment, it is necessary to ensure that the aperture 14 follows a predetermined path as the piston 6 moves back and forth. This would not be assured if the piston 6 were of conventional, circular outline and were free to rotate, as well as move axially, relative to the cylinder 5. Such rotation can be prevented, and the predetermined movement of aperture 14 therefore assured, by a guide pin 41 projecting axially forward from the structure of the cylinder 5 and passing through a second aperture 42 in the flange 40. Alternatively rotation could be prevented by making the end 18 of sleeve 17 of non-circular outline where it passes through the front wall of the cylinder 5.

CLAIMS

1. A roller control system for a continuously-variable-ratio transmission (CVT) of the toroidal-race rolling-traction type including an operating mechanism having a first part operable to control the position of the roller centre along the torus centre circle but
5 incapable of defining the tilt angle adopted by the roller, and a second part comprising a mechanical link connected to the roller bearings and operable to control the tilt angle, in which the link lies substantially parallel to the plane of the roller and is constrained to pass through a predetermined single point.
2. A roller control system according to Claim 1 in which the first part comprises a
10 piston movable along an axis parallel to the plane of the torus centre circle.
3. A roller control system according to Claim 2 in which the piston axis lies in the plane of the torus centre circle.
4. A roller control system according to any preceding claim in which the predetermined single point is fixed relative to the structure of the CVT.
- 15 5. A roller control system according to any preceding claim when including the limitations of Claim 2 in which the piston is prevented from rotating about its axis of movement.
6. A roller control system according to any preceding claim in which the link is substantially coplanar with the roller.
- 20 7. A roller control system according to any preceding claim in which the second part of the operating mechanism lies at no greater radius, relative to the axis of the torus, than the first part.
8. A roller control system according to Claim 7 in which both parts of the operating mechanism lie wholly within the radius of the discs between which the roller is transmitting
25 traction.

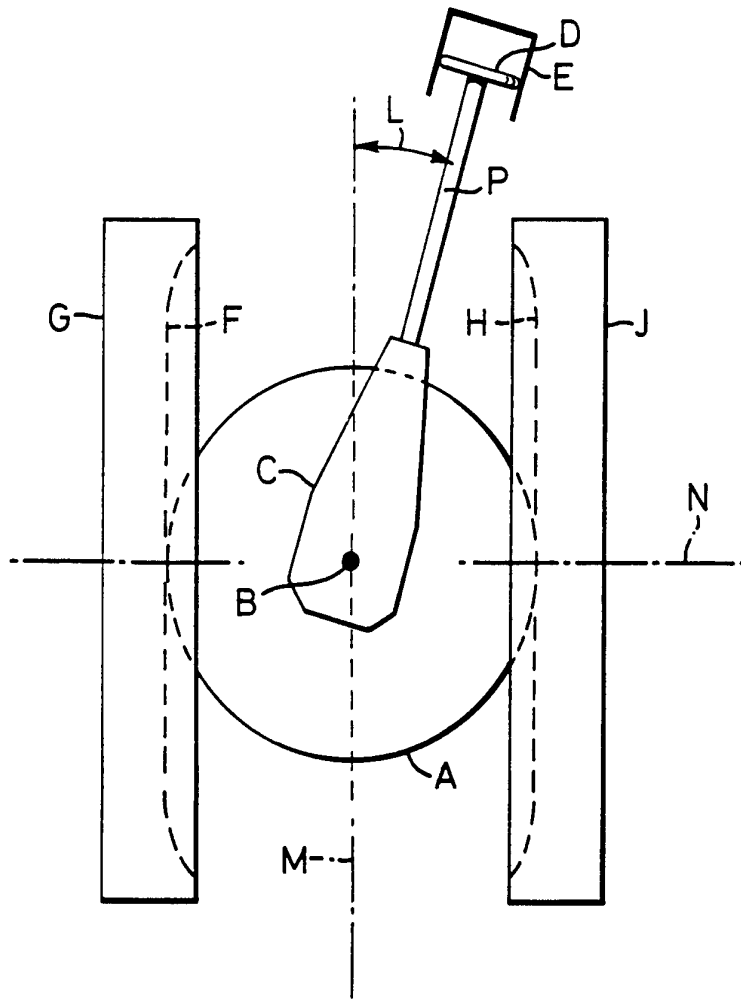


Fig. 1

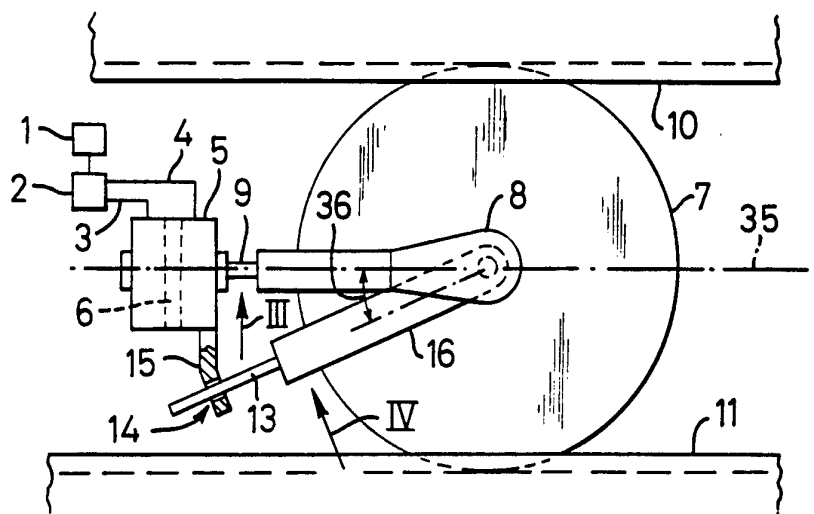


Fig. 2

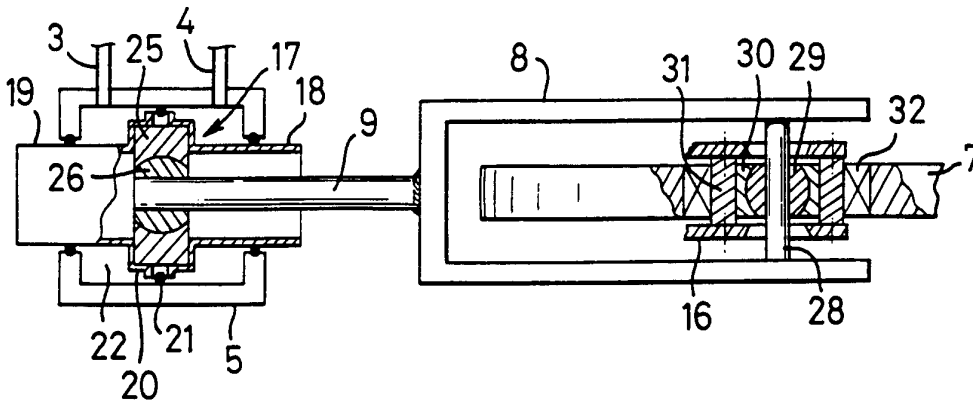


Fig. 3

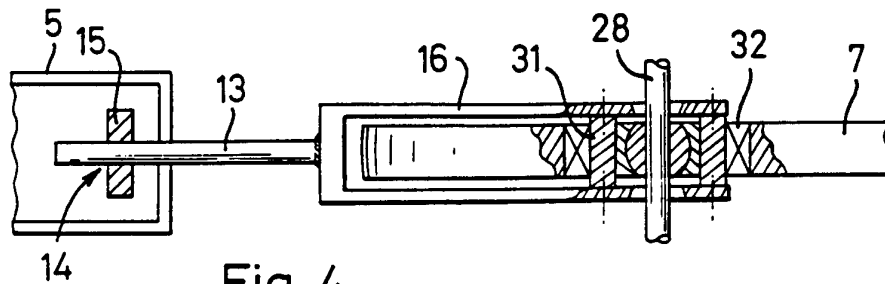


Fig 4

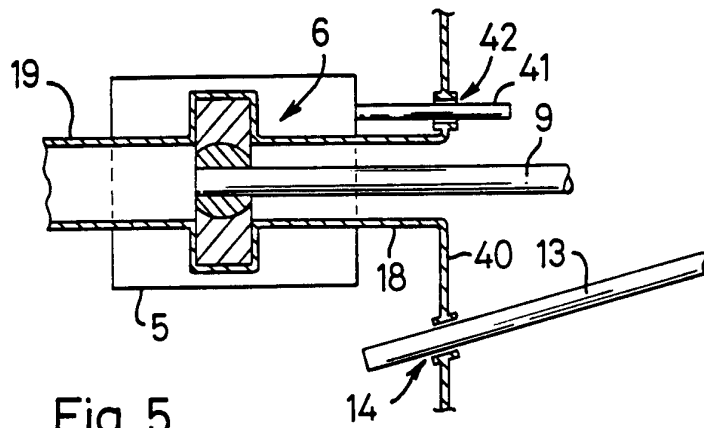


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/01465

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 F16H15/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,1 134 202 (NATIONAL RESEARCH) 20 November 1968 see page 3; figure 3	1-3,6-8
A	---	
A	EP,A,0 413 342 (NISSAN) 20 February 1991 see abstract; figures 1,3	1-3
A	---	
A	WO,A,92 11475 (TOROTRAK) 9 July 1992 cited in the application see abstract; figures 1-4	1-3
A	---	
A	EP,A,0 444 086 (TOROTRAK) 4 September 1991 cited in the application see the whole document	1-3
A	---	
A	US,A,3 933 054 (SUNSTRAND) 20 January 1976 cited in the application see abstract; figure 2	1-3

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search 28 August 1996	Date of mailing of the international search report 03.09.96
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Flores, E
--	--

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 96/01465

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-1134202		NONE	
EP-A-0413342	20-02-91	JP-B- 2501911	29-05-96
		JP-A- 3074667	29-03-91
		DE-D- 69017792	20-04-95
		DE-T- 69017792	13-07-95
		US-A- 5048359	17-09-91
WO-A-9211475	09-07-92	AU-B- 9097091	22-07-92
		DE-D- 69108931	18-05-95
		DE-T- 69108931	24-08-95
		EP-A- 0561949	29-09-93
		ES-T- 2072748	16-07-95
		GB-A,B 2267133	24-11-93
		JP-T- 6507223	11-08-94
		US-A- 5423727	13-06-95
EP-A-0444086	04-09-91	AU-B- 631386	26-11-92
		AU-B- 4620889	12-06-90
		CA-A- 2003334	21-05-90
		WO-A- 9005860	31-05-90
		GB-A- 2227287	25-07-90
		JP-T- 4502954	28-05-92
		PL-B- 165076	30-11-94
		RU-C- 2004863	15-12-93
		US-A- 5423727	13-06-95
		US-A- 5395292	07-03-95
		CA-A- 2008770	30-07-90
US-A-3933054	20-01-76	DE-A- 2531399	29-01-76
		FR-A- 2278997	13-02-76
		GB-A- 1500763	08-02-78
		JP-A- 51012057	30-01-76