(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
7 January 2016 (07.01.2016)

WIPO | PCT

(10) International Publication Number
WO 2016/003405 A1

(51) International Patent Classification:
E21B 17/02 (2006.01) *E21B 17/04* (2006.01)

(21) International Application Number:
PCT/US2014/044832

(22) International Filing Date:
30 June 2014 (30.06.2014)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **HALLIBURTON ENERGY SERVICES, INC.** [US/US]; 3000 N. Sam Houston Parkway E., Houston, Texas 77032 (US).

(72) Inventor: **MACDONALD, Lorn Scott**; Spillwood, Resaurie, Inverness, Scotland 1V2 7NH (GB).

(74) Agents: **PRATT, John S.** et al.; Kilpatrick Townsend & Stockton LLP, 1100 Peachtree Street, Suite 2800, Atlanta, Georgia 30309 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

WO 2016/003405 A1

(54) Title: SHAPE-MEMORY ALLOY ACTUATED FASTENER

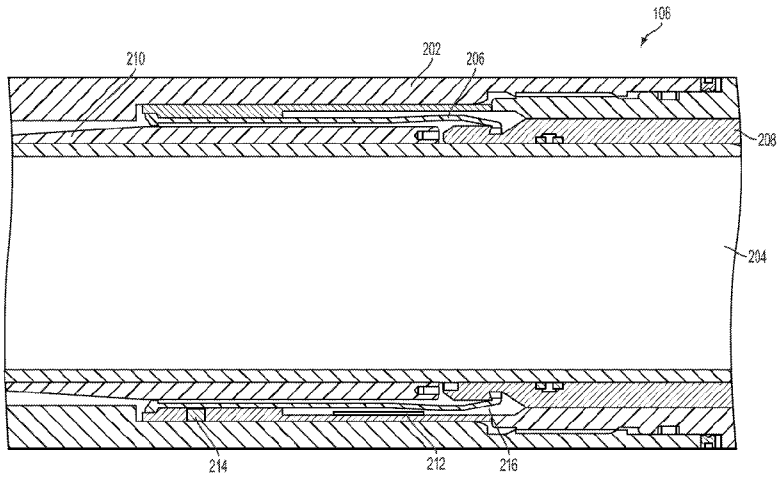


FIG. 2

(57) Abstract: An assembly includes a fastener deployable in a wellbore and actuated by a shape-memory alloy. The shape-memory alloy releaseably interlocks multiple components deployed in the wellbore. The physical shape of the shape-memory alloy can be selectively changed between a first shape and a second shape.

SHAPE-MEMORY ALLOY ACTUATED FASTENER

Technical Field

[0001] The present disclosure relates generally to devices for fastening components to each other. More specifically, but not by way of limitation, this disclosure relates to a fastener actuated by a shape-memory alloy.

Background

[0002] One or more fasteners (e.g., latches, bolts, lugs, and clamps) can mechanically interlock two or more components of a system together. Fasteners can be releasable. That is, some fasteners can be selectively disengaged to free the interlocked components from one another. Typically, fasteners can be actuated (i.e., selectively engaged or disengaged) by hand, motor, or by applying hydraulic pressure to the fastener. Actuating a fastener by hand, however, can be impractical or impossible when the fastener is in a remote location, such as in a wellbore. Actuating a fastener via a motor can be inefficient and impractical, as motors can be large in size, expensive, prone to mechanical failures, and require significant power for operation. Further, actuating a fastener via hydraulic pressure can be too time consuming and uncontrollable for some applications. Accordingly, it can be challenging to quickly, remotely, and selectively actuate a fastener.

Brief Description of the Drawings

[0003] FIG. 1 is a cross-sectional view of one embodiment of a well system that can include a shape-memory alloy actuated fastener according to one embodiment of the present disclosure.

[0004] FIG. 2 is a cross-sectional side view of a well system component shown in FIG. 1 according to one embodiment of the present disclosure.

[0005] FIG. 3 is a cross-sectional side view of a shape-memory alloy actuated fastener in a first position according to one embodiment of the present disclosure.

[0006] FIG. 4 is a cross-sectional side view of the shape-memory alloy actuated fastener shown in FIG. 3 in a second position according to one embodiment of the present disclosure.

[0007] FIG. 5 is a cross-sectional side view of the well system component shown in FIG. 2 in which the shape-memory alloy actuated fastener has released a receiving component according to one embodiment of the present disclosure.

[0008] FIG. 6 is a cross-sectional side view of a well system component with a shape-memory alloy actuated fastener according to another embodiment of the present disclosure.

[0009] FIG. 7 is a perspective view of the shape-memory alloy actuated fastener in the well-system component of FIG. 6 according to one embodiment of the present disclosure.

[0010] FIG. 8 is a perspective view of a system with a shape-memory alloy actuated fastener according to another embodiment of the present disclosure.

[0011] FIG. 9 is a flow chart of an example of a process for using a shape-memory alloy actuated fastener according to one embodiment.

Detailed Description

[0012] Certain aspects and features of the present disclosure are directed to a shape-memory alloy actuated fastener. The shape-memory alloy actuated fastener can be, or can be included in, a latch (e.g., a collet latch or C-latch), bolt, lug, clamp,

spring, threaded connector, dog, or wire. The shape-memory alloy actuated fastener can include a shape-memory alloy. A shape-memory alloy can include an alloy of metals with atoms that can be arranged in two different crystal structures. Each crystal structure can define a physical shape for the shape-memory alloy. At colder temperatures, the atoms can be arranged in one crystal structure, which can define one physical shape (i.e., the low-temperature shape) for the shape-memory alloy. When heated above a transition temperature, the atoms can rearrange to the other crystal structure, which can define another physical shape (i.e., the high-temperature shape) for the shape-memory alloy. In some embodiments, the shape-memory alloy can substantially revert back to its low-temperature shape when cooled back below the transition temperature. By heating or cooling the shape-memory alloy, the shape-memory alloy can change between two physical shapes. Because the fastener can include the shape-memory alloy, the fastener can change between two physical shapes upon the heating or cooling of the fastener.

[0013] The fastener can be configured for selectively interlocking or releasing (i.e., engaging or disengaging) multiple components. For example, in some embodiments, the fastener's low-temperature shape can be configured to interlock multiple components. The fastener's high-temperature shape can be configured to release the multiple components from one another. The fastener can interlock multiple components when in its low-temperature shape. When heated above a transition temperature, the fastener can change into its high-temperature shape and release the multiple components from one another. In some embodiments, when cooled back below the transition temperature, the fastener can change substantially back into its low-temperature shape, which can again interlock the multiple components. In this way, the fastener can be actuated by selectively heating or

cooling the fastener. Further, in some embodiments, the fastener's high-temperature shape and low-temperature shape can be reversed. That is, in some embodiments, the fastener's high-temperature shape can be configured to interlock multiple components, while the fastener's low-temperature shape can be configured to release the multiple components from one another.

[0014] In one example, the shape-memory alloy actuated fastener can be a part of a valve deployed in a wellbore. A wellbore is a hole drilled in a subterranean formation as part of a well system (e.g., for extracting fluid or gas from the subterranean formation). The valve can control the flow of fluid or gas through the wellbore. The valve can include a shape-memory alloy actuated fastener which, when in its low-temperature shape, can interlock multiple valve components to effectively close the valve. When closed, the valve can prohibit fluid or gas from flowing through the wellbore. A temperature-control device, for example a heating blanket, can be positioned within the valve or otherwise thermally coupled to the shape-memory alloy actuated fastener. A well operator can operate the temperature-control device, for example, by transmitting power to the temperature-control device. The temperature-control device can heat the shape-memory alloy actuated fastener above a transition temperature, which can cause the shape-memory alloy actuated fastener to change its physical shape to its high-temperature shape. Upon changing to its high-temperature shape, the shape-memory alloy actuated fastener can release the valve components to effectively open the valve. When open, the valve can permit fluid or gas to flow through the well system. In some embodiments, the temperature-control device can cool the shape-memory alloy actuated fastener back below the transition temperature, which can cause the shape-memory alloy actuated fastener to substantially change its physical shape

back into its low-temperature shape. In this way, the well operator can quickly, remotely, and selectively control the valve via the shape-memory alloy actuated fastener.

[0015] Although the shape-memory alloy actuated fastener was described in the above example as part of a well-system component, a shape-memory alloy actuated fastener can be used in a variety of other contexts to perform numerous functions. For example, in some embodiments, a shape-memory alloy actuated fastener can be used with, or be a part of, an automobile, aircraft, boat, computer, appliance, furniture piece, machine, toy, sports equipment, electrical system, or other device. Further, embodiments can include multiple shape-memory alloy actuated fasteners configured in any number of ways.

[0016] These illustrative examples are given to introduce the reader to the general subject matter discussed here and are not intended to limit the scope of the disclosed concepts. The following sections describe various additional features and examples with reference to the drawings in which like numerals indicate like elements, and directional descriptions are used to describe the illustrative aspects but, like the illustrative aspects, should not be used to limit the present disclosure.

[0017] FIG. 1 is a cross-sectional view of one embodiment of a well system 100 that can include a shape-memory alloy actuated fastener according to one embodiment of the present disclosure. The well system 100 includes a wellbore 102. In some embodiments, the wellbore 102 can be cased and cemented, as shown in FIG. 1. In other embodiments, the wellbore 102 can be uncased or the casing may not be cemented.

[0018] The wellbore 102 can include a tubular string 104, for example, a lower completion assembly. The tubular string 104 can be positioned in the lower portion

112 of the wellbore 102. Annulus 110 can be formed between the tubular string 104 and the wellbore 102.

[0019] The wellbore 102 can also include a well-system component 108, for example, an isolation barrier valve, packer, plug, sliding sleeve, running tool, setting tool latching tool, shear joint, travel joint, or another type of valve (e.g., a safety valve, flapper valve, or ball valve). In some embodiments, the well-system component 108 can include a shape-memory alloy actuated fastener (discussed further with respect to FIG. 2). The well-system component 108 can also include a temperature-control device (e.g., a heating device or cooling device) for actuating the shape-memory alloy actuated fastener.

[0020] The wellbore 102 can further include another tubular string 106, for example, an upper completion assembly. The tubular string 106 can be positioned in the upper portion 114 of the wellbore 102. Although depicted in this example as connected to the well-system component 108, in some embodiments, the tubular string 106 can be disconnected from the well-system component 108. Further, some embodiments may not include the tubular string 104 or the tubular string 106, and may include other well-system components.

[0021] FIG. 2 is a cross-sectional side view of the well-system component 108 shown in FIG. 1 according to one embodiment of the present disclosure. In some embodiments, the well-system component 108 is, or can include, a valve, for example, an isolation barrier valve. An isolation barrier valve can isolate the lower portion of the wellbore from an upper portion of the wellbore, which can prevent or minimize fluid or gas communication between the lower portion of the wellbore and the upper portion of the wellbore.

[0022] The well-system component 108 can include a housing 202. A tube 204 can be disposed within the housing 202 for communicating fluid or gas through the well-system component 108. Further, the well-system component 108 can include a shape-memory alloy actuated fastener 206, for example, the shape-memory alloy actuated fastener 206 depicted in FIG. 3.

[0023] FIG. 3 is a cross-sectional side view of a shape-memory alloy actuated fastener 206 in a first position according to one embodiment of the present disclosure. In this example, the shape-memory alloy actuated fastener 206 is a collet latch.

[0024] The shape-memory alloy actuated fastener 206 can include a body 306. In some embodiments, the body 306 can include a ring shape. In other embodiments, the body 306 can include another shape, for example a square, triangular, rectangular, or trapezoidal shape. In some embodiments, the body 306 can include a cavity, for example, for allowing one or more components to fit through the body 306.

[0025] An annular array of fingers 302 can extend from an end of the body 306. In this example, the annular array of fingers 302 extends from both ends of the body 306. The fingers 302 can include enlarged ends 304. In some embodiments, the enlarged ends 304 can be positioned on the ends of the fingers 302. The enlarged ends 304 can releaseably interlock with a component, for example, a component of a valve in a wellbore. In some embodiments, the enlarged ends 304 can include a back-angle configuration for interlocking with a component. That is, the enlarged ends 304 can angle backwards towards the body 306 of the shape-memory alloy actuated fastener 206. In other embodiments, the enlarged ends 304 can include other configurations for interlocking with a component, for example, a

90-degree configuration. A 90-degree configuration can include enlarged ends 304 that extend perpendicularly (i.e., 90 degrees) from the fingers 302.

[0026] The shape-memory alloy actuated fastener 206 can include a shape-memory alloy, which can include, for example, nickel (Ni), titanium (Ti), copper (Cu), aluminum (Al), zinc (Zn), iron (Fe), manganese (Mn), silicon (Si), hafnium (Hf), palladium (Pd), or gold (Au). In some embodiments, the shape-memory alloy actuated fastener 206 can include, for example, Ni-Ti, Ni-Al, Cu-Al-Ni, Cu-Zn-Al, Fe-Mn-Si, Fe-Ni-Co-Ti, Ni-Ti-Hf, or Ni-Ti-Pd.

[0027] In some embodiments, the entire shape-memory alloy actuated fastener 206 can include a shape-memory alloy. In other embodiments, one or more parts of the shape-memory alloy actuated fastener 206, for example the fingers 302 and/or the enlarged ends 304, can include the shape-memory alloy.

[0028] In some embodiments, one or more parts of the shape-memory alloy actuated fastener 206 that directly releasably couple with a component can include the shape-memory alloy. For example, in some embodiments, the enlarged ends 304 of the shape-memory alloy actuated fastener 206 can include a shape-memory alloy, and can directly interlock with or release a component. In other embodiments, the shape-memory alloy can cause (e.g., directly or indirectly) a part of the shape-memory alloy actuated fastener 206, which may not include the shape-memory alloy, to releaseably couple with a component. For example, the body 306 of the shape-memory alloy actuated fastener 206 can include a shape-memory alloy. The shape-memory alloy can be configured to cause the annular array of fingers 302 and the enlarged ends 304, which may not include a shape-memory alloy, to releaseably couple with a component. In some embodiments, the shape-memory alloy can push, pull, move, or otherwise interact with a part of the shape-memory alloy actuated

fastener 206, which can cause the shape-memory alloy actuated fastener 206 to releaseably interlock with a component.

[0029] Further, in some embodiments, the shape-memory alloy actuated fastener 206 can include multiple shape-memory alloys. For example, in some embodiments, the shape-memory alloy actuated fastener 206 can include multiple shape-memory alloys with different transition temperatures. Different components of the shape-memory alloy actuated fastener 206 can be actuated at different times by applying different amounts of heat to the shape-memory alloy actuated fastener 206.

[0030] Returning to FIG. 2, the shape-memory alloy actuated fastener 206 can interlock with a receiving component 208, for example, a latch crossover. When the shape-memory alloy actuated fastener 206 is interlocked with the receiving component 208, the receiving component 208 can keep a closure component (e.g., a ball) in the well-system component 108 in a closed position. This can close the well-system component 108, which can, for example, prevent or minimize fluid or gas communication through the well-system component 108.

[0031] Further, the well-system component 108 can also include a power supply 214, for example, one or more C-sized batteries. Although the power supply 214 is depicted in this example as disposed within the well-system component 108, in other embodiments, the power supply 214 can be positioned elsewhere, for example, the power supply 214 can be coupled to other well-system components or positioned aboveground.

[0032] An operator (e.g., a well operator) can control the power supply 214. In some embodiments, an operator can control the power supply 214 via a computing device (not shown), which can be in communication with the power supply 214. The computing device can include a processor interfaced with other hardware via a bus.

A memory, which can include any suitable tangible (and non-transitory) computer-readable medium such as RAM, ROM, EEPROM, or the like, can include program components that configure operation of the computing device. The computing device can also include input/output interface components and additional storage.

[0033] Further, each of the computing device and the power supply 214 can include a communication device (not shown) for communicating with one another. In some embodiments, the communication device can include one or more of any components that facilitate a network connection. For example, in some embodiments, the communication device can be wireless and can include wireless interfaces such as IEEE 802.11, Bluetooth, or radio interfaces for accessing cellular telephone networks (e.g., transceiver/antenna for accessing a CDMA, GSM, UMTS, or other mobile communications network). In other embodiments, the communication device can be wired and can include interfaces such as Ethernet, USB, or IEEE 1394.

[0034] The power supply 214 can be in communication with a temperature-control device 212, for example a heating blanket (e.g., a ceramic heating blanket). The temperature-control device 212 can be coupled to or in thermal communication with the shape-memory alloy actuated fastener 206. In some embodiments, an area 216 surrounding the temperature-control device 212 can be insulated, for example, to prevent heat loss. Upon receiving the power from the power supply 214, the temperature-control device 212 can heat or cool the shape-memory alloy actuated fastener 206. This can cause the shape-memory alloy actuated fastener 206 to change its physical shape, for example, as shown in FIG. 4.

[0035] FIG. 4 is a cross-sectional side view of the shape-memory alloy actuated fastener shown in FIG. 3 in a second position according to one embodiment

of the present disclosure. In some embodiments, one or more fingers in the annular array of fingers 302 in the shape-memory alloy actuated fastener 206 can bend radially outward. This can increase the diameter of the annular array of fingers 302. In other embodiments, one or more of the fingers in the annular array of fingers 302 can bend radially inward, which can decrease the diameter of the annular array of fingers 302. Further, in some embodiments, the length or width of one or more of the fingers in the annular array of fingers 302 can increase or decrease or size.

[0036] Further, in some embodiments, the body 306 or the enlarged ends 304 can change physical shape, for example, to enhance the decoupling or releasing of a component. For example, in some embodiments, the enlarged ends 304 can change shape from a back-angled configuration to a 90-degree configuration. Any number of shape-memory alloy actuated fastener 206 parts can change physical shape at any number of transition temperatures, and any configuration of physical shapes may be possible.

[0037] Returning again to FIG. 2, as noted above, upon receiving the power from the power supply 214, the temperature-control device 212 can cause the shape-memory alloy actuated fastener 206 to change shape (e.g., change to its high-temperature shape). As the shape-memory alloy actuated fastener 206 changes shape, the shape-memory alloy actuated fastener 206 can release from the receiving component 208, for example, as shown in FIG. 5. In some embodiments, the shape-memory alloy actuated fastener 206 and/or the receiving component 208 can be coated with a low friction coating, for example, to enhance the decoupling or releasing of the shape-memory alloy actuated fastener 206 from the receiving component 208.

[0038] Upon the shape-memory alloy actuated fastener 206 releasing the receiving component 208, in some embodiments, the receiving component 208 can move, for example, to a different position (e.g., to the right as viewed in each of FIGS. 2 and 6). In some embodiments, pressure, gravity, springs, or other means can aid in the receiving component 208 moving to the different position. In some embodiments, when in the different position, the receiving component 208 can keep the closure component in the well-system component 108 in an open position. This can allow fluid or gas communication through the well-system component 108. Unlike with traditional well-system components (e.g., a traditional isolation barrier valve), which can rely on slow, inefficient, and unpredictable hydraulic pressure cycling for remote actuation, in some embodiments, an operator can remotely, quickly, and selectively actuate a well-system component 108 via a shape-memory alloy actuated fastener 206.

[0039] In some embodiments, the well-system component 108 can include additional, fewer, or different components. For example, the well-system component 108 can include any number or configuration of shape-memory alloy actuated fasteners 206, a piston, spring (e.g., a power spring), washer, O-ring, seal, hydraulic power assembly or component, screw, transducer, housing, or lock ring. Further, in some embodiments, the well-system component 108 can include an indexing mandrel 210, which is radially positioned between the housing 202 and the tube 204. The indexing mandrel 210 can be used for actuating a well-system component 108 via hydraulic pressure cycling. In some embodiments, an operator can use multiple actuation systems (e.g., a shape-memory alloy actuated fastener 206 and hydraulic pressure cycling) for operating the well-system component 108.

[0040] FIG. 6 is a cross-sectional side view of the well-system component 108 with a shape-memory alloy actuated fastener according to another embodiment of the present disclosure. In some embodiments, the well-system component 108 of FIG. 6 is, or can include, a valve, for example, an isolation barrier valve. The well-system component 108 of FIG. 6 can also include the housing 202, the tube 204, the indexing mandrel 210, the temperature-control device 212, and the power supply 214, which can be configured substantially the same of FIG. 6 as described with respect to FIG. 2. Further, the well-system component 108 can include a shape-memory alloy actuated fastener 602, for example, the shape-memory alloy actuated fastener shown in FIG. 7.

[0041] FIG. 7 is a perspective view of the shape-memory alloy actuated fastener 602 in the well-system component 108 of FIG. 6 according to one embodiment of the present disclosure. In this example, the shape-memory alloy actuated fastener 602 is a C-ring.

[0042] The shape-memory alloy actuated fastener 602 can include a body 704. In some embodiments, the body 704 can include a cylindrical shape. Disposed within the body 704 can be a cylindrically-shaped cavity 710, such that the end of the body 704 includes a ring shape. In other embodiments, the body 704 can include another shape, for example a square, triangular, rectangular, or trapezoidal shape. In some embodiments, the body 704 can include a cavity, for example, for allowing one or more components to fit through the body 704.

[0043] A connector 706 can extend from the end of the body 704. The connector 706 can join the cross-sectional end of the body 704 to a locking member 708. In some embodiments, the locking member 708 can include a C-shape. In

other embodiments, the locking member 708 can include another shape, for example, a square, ring, circle, triangle, rectangle, or trapezoid shape.

[0044] In some embodiments, the entire shape-memory alloy actuated fastener 602 can include a shape-memory alloy. In other embodiments, one or more parts (i.e., components) of the shape-memory alloy actuated fastener 602, for example the body 704 or the locking member 708, can include one or more shape-memory alloys. Further, in some embodiments, the shape-memory alloy actuated fastener 602 may not include the body 704 or the connector 706. That is, in some embodiments, the shape-memory alloy actuated fastener 602 can only include the locking member 708.

[0045] Returning to FIG. 6, in some embodiments, one piece of the shape-memory alloy actuated fastener 602 (e.g., the body 704) can be coupled to the well component 606. Another piece of the shape-memory alloy actuated fastener 602 (e.g., the locking member 708) can interlock with a receiving component 604. When the shape-memory alloy actuated fastener 602 is interlocked with the receiving component 604, the receiving component 604 can keep a closure component (e.g., a ball) in the well-system component 108 of FIG. 6 in a closed position. This can close the well-system component 108 of FIG. 6, which can prevent or minimize fluid or gas communication through the well-system component 108.

[0046] The well-system component 108 of FIG. 6 can also include the temperature-control device 212 in communication with the power supply 214, as described with respect to FIG. 2. An operator can actuate the power supply 214, which can transmit power to the temperature-control device 212. The temperature-control device 212 can heat or cool the shape-memory alloy actuated fastener 602, which can cause the shape-memory alloy actuated fastener 602 to change into

another physical shape, for example, to its high-temperature shape. In some embodiments, the high-temperature shape can include a physical shape in which a piece of the shape-memory alloy actuated fastener 602 (e.g., the locking member 708) has radially expanded or increased in diameter. Upon changing its physical shape, the shape-memory alloy actuated fastener 602 can release the well component 606 from the receiving component 604. In some embodiments, this can cause the well component 606 to be able to move, for example, to a different position (e.g., to the right as viewed in FIG. 6). In some embodiments, pressure, gravity, springs, or other means can aid in the well component 606 moving to the different position. In some embodiments, when in the different position, the well component 606 can keep the closure component (not shown) in the well-system component 108 of FIG. 6 in an open position. This can allow fluid or gas communication through the well-system component 108 of FIG. 6.

[0047] Further, in some embodiments, multiple shape-memory alloy actuated fasteners 602 can be used in sequence or in concert. For example, multiple shape-memory alloy actuated fasteners 602 with the same transition temperature, different transition temperatures, or that interlock different combinations of components can be used in sequence or in concert. For example, in some embodiments, the well-system component 108 of FIG. 6 can include multiple shape-memory alloy actuated fasteners 602 actuated by different transition temperatures. Actuating the multiple shape-memory alloy actuated fasteners 602 at different times via different transition temperatures can provide greater control over actuation of the well-system component 108 of FIG. 6.

[0048] FIG. 8 is a perspective view of a system 800 with a shape-memory alloy actuated fastener according to another embodiment of the present disclosure.

In some embodiments, the system 800 can include an electrical component 810. The electrical component 810 can include, for example, a computer, cellular telephone, resistor, capacitor, inductor, integrated circuit component, power supply, processor, microcontroller, memory, or motor. The electrical component 810 can be coupled to a conductor 802 (e.g., a wire or circuit board trace). The conductor 802 can include any suitable conductive material, for example, copper, tin, iron, aluminum, gold, or silver. Another electrical component 810 can be coupled to another conductor 804 (e.g., a wire or circuit board trace). The conductor 804 can include any suitable conductive material, for example, copper, tin, iron, aluminum, gold, or silver.

[0049] In some embodiments, the conductors 802, 804 can be releasably coupled by a shape-memory alloy actuated fastener 806. Further, in some embodiments, the conductors 802, 804 can be conductively coupled by the shape-memory alloy actuated fastener 806. The shape-memory alloy actuated fastener 806 can include a shape-memory alloy that includes any conductive material, for example, copper. In the example shown in FIG. 8, the shape-memory alloy actuated fastener 806 includes clasps 808 for releasably coupling the conductors 802, 804. The clasps 808 can include a shape-memory alloy. In other embodiments, the shape-memory alloy actuated fastener 806 may not include the clasps 808.

[0050] In some embodiments, the system 800 can also include a temperature-control device 812. The temperature control device 812 can be in communication with a power supply 814. In some embodiments, an operator can actuate the power supply 814, which can transmit power to the temperature-control device 812. In other embodiments, a processor can actuate the power supply 814. For example, in some embodiments, the system 800 (e.g., the electrical component 810) can include

a temperature sensor. The temperature sensor can send signals to a processor, which can be positioned within the electrical component 810 or elsewhere. The processor can determine, based on the signals from the temperature sensor, whether a temperature associated with the electrical component 810 or the system 800 has surpassed a threshold. If the threshold has been surpassed, the processor can operate, for example via the power supply 814, the temperature-control device 812. The temperature-control device 812 can heat or cool the shape-memory alloy actuated fastener 806, which can cause the shape-memory alloy actuated fastener 806 to change into another physical shape. This can decouple or couple the conductors 802, 804.

[0051] In some embodiments, the system 800 can change temperature independent from the temperature-control device 812, for example, as a result of thermal energy from an electrical circuit or electrical circuit component (e.g., a processor). The changed temperature of the system 800 can cause the shape-memory alloy actuated fastener 806 to change into another physical shape, for example, to its high-temperature shape.

[0052] In some embodiments, the high-temperature shape or low-temperature shape can include a physical shape in which a piece of the shape-memory alloy actuated fastener 806 (e.g., the clasps 808) can move, fold, bend, or expand. For example, the high-temperature shape can include a shape in which the clasps 808 fold more than 90 degrees, as depicted by the arrows, such that the clasps 808 release their grip on the conductor 802. Further, in some embodiments, the shape-memory alloy actuated fastener 806 can bend backwards (i.e., in the direction into the page), releasing the conductor 802 from the conductor 804. In some

embodiments, this can sever the electrical connection between the conductors 802, 804, preventing electrical communication between the electrical components 810.

[0053] In one example, the electrical component 810 coupled to the conductor 802 can include a power supply. The electrical component 810 coupled to the conductor 804 can include a computer. The shape-memory alloy actuated fastener 806 can electrically couple the conductors 802, 804. In some embodiments, if the temperature inside the power supply or computer surpasses the transition temperature of the shape-memory alloy actuated fastener 806, the shape-memory alloy actuated fastener 806 can change its physical shape, for example, to its high-temperature shape. This can decouple or release the conductors 802, 804 from one another. Decoupling the conductors 802, 804 can break the electrical communication between the power supply and the computer, for example, shutting down the computer or otherwise preventing the overheating of the computer. In some embodiments, the system 800 can include an indicator (e.g., a LED or non-electronic indicator) to notify a user, for example, that the decoupling of the electrical component 810 was intentional. Upon the temperature inside the computer cooling below the transition temperature of the shape-memory alloy actuated fastener 806, the shape-memory alloy actuated fastener 806 can change its physical shape, for example, to its low-temperature shape. This can couple or interlock the conductors 802, 804 to each other, which can reestablish electrical communication between the power supply and the computer.

[0054] FIG. 9 is a flow chart of an example of a process for using a shape-memory alloy actuated fastener according to one embodiment.

[0055] In block 902, multiple components are interlocked with a fastener. The fastener can include a shape-memory alloy. The physical shape of the shape-

memory alloy can be selectively changeable between a first shape and a second shape. In some embodiments, the shape-memory alloy can change between physical shapes when heated above a transition temperature. In other embodiments, the shape-memory alloy can change between physical shapes when cooled below a transition temperature.

[0056] In block 904, the temperature-control device can heat the fastener above a transition temperature. In some embodiments, the temperature-control device can emit electromagnetic radiation for heating the fastener. In other embodiments, the temperature-control device can heat the fastener via thermal conduction. Any number or combination of heating or cooling methods can be used to heat or cool the fastener.

[0057] In block 906, the fastener can change from the first shape into the second shape. For example, in some embodiments, the fastener can change from its low-temperature shape into its high-temperature shape.

[0058] In block 908, the fastener can release two or more of the multiple components from each other. In some embodiments, the fastener can release all of the multiple components from each other. In other embodiments, the fastener can release fewer than all of the multiple components from each other.

[0059] In some embodiments, the temperature-control device can cool the fastener below the transition temperature. Further, the fastener can change from the second shape back into the first shape.

[0060] In some aspects, a system for a shape-memory alloy actuated fastener is provided according to one or more of the following examples.

[0061] Example #1: An assembly can include a fastener deployable in a wellbore. The fastener can include a shape-memory alloy for releaseably

interlocking multiple components deployable in the wellbore. The physical shape of the shape-memory alloy can be selectively changeable between a first shape and a second shape.

[0062] Example #2: The assembly of Example #1 may feature the fastener including multiple shape-memory alloys. Each of the multiple shape-memory alloys can have a different transition temperature.

[0063] Example #3: The assembly of any of Examples #1-2 may feature the fastener that is a collet latch or a C-latch.

[0064] Example #4: The assembly of any of Examples #1-3 may feature the shape-memory alloy causing the fastener to releaseably interlock the multiple components.

[0065] Example #5: The assembly of any of Examples #1-4 may feature the shape-memory alloy releasably interlocking the plurality of components. The first shape can be configurable for interlocking the plurality of components and the second shape can be configurable for releasing the plurality of components.

[0066] Example #6: The assembly of any of Examples #1-5 may feature the physical shape of the shape-memory alloy being changeable between the first shape and the second shape by heating or cooling the shape-memory alloy.

[0067] Example #7: The assembly of any of Examples #1-6 may feature a temperature-control device for heating or cooling the shape-memory alloy.

[0068] Example #8: The assembly of any of Examples #1-7 may feature the a valve deployable in the wellbore. The fastener can be usable with the valve in the wellbore. The valve can include a receiving component to which the fastener can be releaseably coupled. The receiving component can be moveable to open or close the valve.

[0069] Example #9: The assembly of any of Examples #1-8 may feature the valve being an isolation barrier valve. The valve can also include an indexing mandrel for opening the valve.

[0070] Example #10: A system can include a fastener. The fastener can include a shape-memory alloy for releasably interlocking multiple components deployable in a wellbore. The physical shape of the shape-memory alloy can be selectively changeable between (i) a first shape configurable for interlocking the multiple components and (ii) a second shape configurable for releasing the multiple components. The system can also include a temperature control device for heating or cooling the shape-memory alloy to change the shape-memory alloy between the first shape and the second shape.

[0071] Example #11: The system of Example #10 may feature a power source for operating the temperature-control device.

[0072] Example #12: The system of any of Examples #10-11 may feature the fastener including multiple shape-memory alloys. Each of the multiple shape-memory alloys can have a different transition temperature.

[0073] Example #13: The system of any of Examples #10-12 may feature the fastener including a collet latch or a C-latch.

[0074] Example #14: The system of any of Examples #10-13 may feature the shape-memory alloy causing the fastener to releaseably interlock the multiple components.

[0075] Example #15: The system of any of Examples #10-14 may feature a valve deployable in a wellbore. The fastener can be usable with the valve in the wellbore. The valve can include a receiving component to which the fastener can be

releaseably coupled. The receiving component can be moveable to open or close the valve.

[0076] Example #16: The system of any of Examples #10-15 may feature the valve being an isolation barrier valve. The valve can also include an indexing mandrel for opening the valve.

[0077] Example #17: A method can include interlocking multiple components deployed in a wellbore with a fastener that can include a shape-memory alloy. The physical shape of the shape-memory alloy can be selectively changeable between a first shape and a second shape. The method can also include heating the fastener, by a temperature-control device, above a transition temperature. The method can further include changing the fastener from the first shape to the second shape. Finally, the method can include releasing the multiple components from one another.

[0078] Example #18: The method of Example #17 may feature heating the fastener by the temperature-control device responsive to the temperature-control device receiving a power from a power source positioned in a wellbore.

[0079] Example #19: The method of any of Examples #17-18 may feature cooling the fastener, by the temperature-control device, below the transition temperature. The shape-memory alloy can change from the second shape to the first shape.

[0080] Example #20: The method of any of Examples #17-19 may feature moving at least one of the multiple components to open the valve in the wellbore.

[0081] The foregoing description of certain embodiments, including illustrated embodiments, has been presented only for the purpose of illustration and description and is not intended to be exhaustive or to limit the disclosure to the precise forms

disclosed. Numerous modifications, adaptations, and uses thereof will be apparent to those skilled in the art without departing from the scope of the disclosure.

Claims

What is claimed is:

1. An assembly, comprising:

a fastener deployable in a wellbore, the fastener comprising a shape-memory alloy for releaseably interlocking a plurality of components deployable in the wellbore, wherein a physical shape of the shape-memory alloy is selectively changeable between a first shape and a second shape.

2. The assembly of claim 1, wherein the fastener comprises a plurality of shape-memory alloys, and wherein each of the plurality of shape-memory alloys has a different transition temperature.

3. The assembly of claim 1, wherein the fastener is a collet latch or a C-latch.

4. The assembly of claim 1, wherein the shape-memory alloy causes the fastener to releaseably interlock the plurality of components.

5. The assembly of claim 1, wherein the shape-memory alloy releasably interlocks the plurality of components, and wherein the first shape is configurable for interlocking the plurality of components and the second shape is configurable for releasing the plurality of components.

6. The assembly of claim 1, wherein the physical shape of the shape-memory alloy is changeable between the first shape and the second shape by heating or cooling the shape-memory alloy.

7. The assembly of claim 6, further comprising a temperature-control device for heating or cooling the shape-memory alloy.

8. The assembly of claim 1, further comprising a valve deployable in the wellbore, wherein the fastener is usable with the valve in the wellbore, wherein the valve comprises a receiving component to which the fastener is releaseably coupled, and wherein the receiving component is moveable to open or close the valve.

9. The assembly of claim 8, wherein the valve is an isolation barrier valve, and wherein the valve further comprises an indexing mandrel for opening the valve.

10. A system, comprising:

a fastener comprising a shape-memory alloy for releaseably interlocking a plurality of components deployable in a wellbore, wherein a physical shape of the shape-memory alloy is selectively changeable between (i) a first shape configurable for interlocking the plurality of components and (ii) a second shape configurable for releasing the plurality of components; and

a temperature-control device for heating or cooling the shape-memory alloy to change the shape-memory alloy between the first shape and the second shape.

11. The system of claim 10, further comprising a power source for operating the temperature-control device.

12. The system of claim 10, wherein the fastener comprises a plurality of shape-memory alloys, and wherein each of the plurality of shape-memory alloys has a different transition temperature.

13. The system of claim 10, wherein the fastener is a collet latch or a C-latch.

14. The system of claim 10, wherein the shape-memory alloy causes the fastener to releaseably interlock the plurality of components.

15. The system of claim 10, further comprising a valve deployable in the wellbore, wherein the fastener is usable with the valve in the wellbore, wherein the valve comprises a receiving component to which the fastener is releaseably coupled, and wherein the receiving component is moveable to open or close the valve.

16. The system of claim 15, wherein the valve is an isolation barrier valve, and wherein the valve further comprises an indexing mandrel for opening the valve.

17. A method, comprising:

interlocking a plurality of components deployed in a wellbore with a fastener comprising a shape-memory alloy, wherein a physical shape of the shape-memory alloy is selectively changeable between a first shape and a second shape;

heating the fastener, by a temperature-control device, above a transition temperature;

changing the shape-memory alloy from the first shape to the second shape; and

releasing the plurality of components from one another.

18. The method of claim 17, wherein the heating the fastener by the temperature-control device is responsive to the temperature-control device receiving a power from a power source positioned in a wellbore.

19. The method of claim 17, further comprising:

cooling the fastener, by the temperature-control device, below the transition temperature; and

changing the shape-memory alloy from the second shape to the first shape.

20. The method of claim 17, further comprising:

moving at least one of the plurality of components to open the valve in the wellbore.

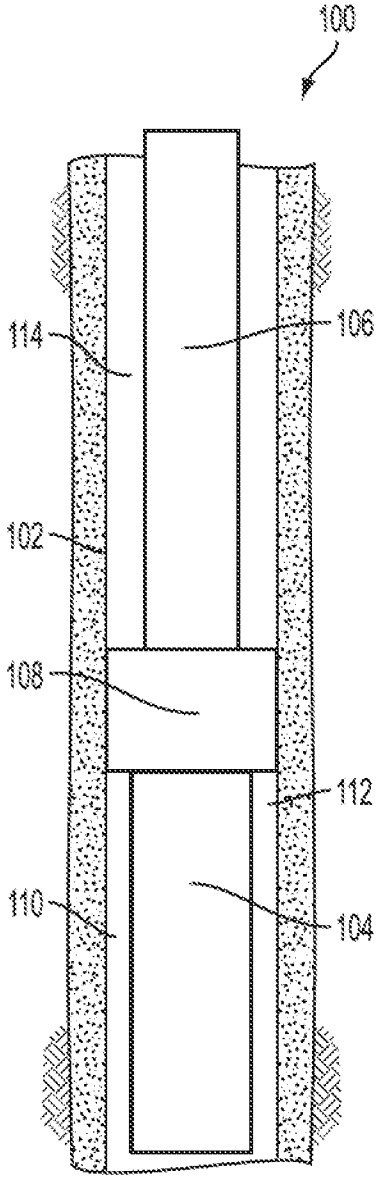


FIG. 1

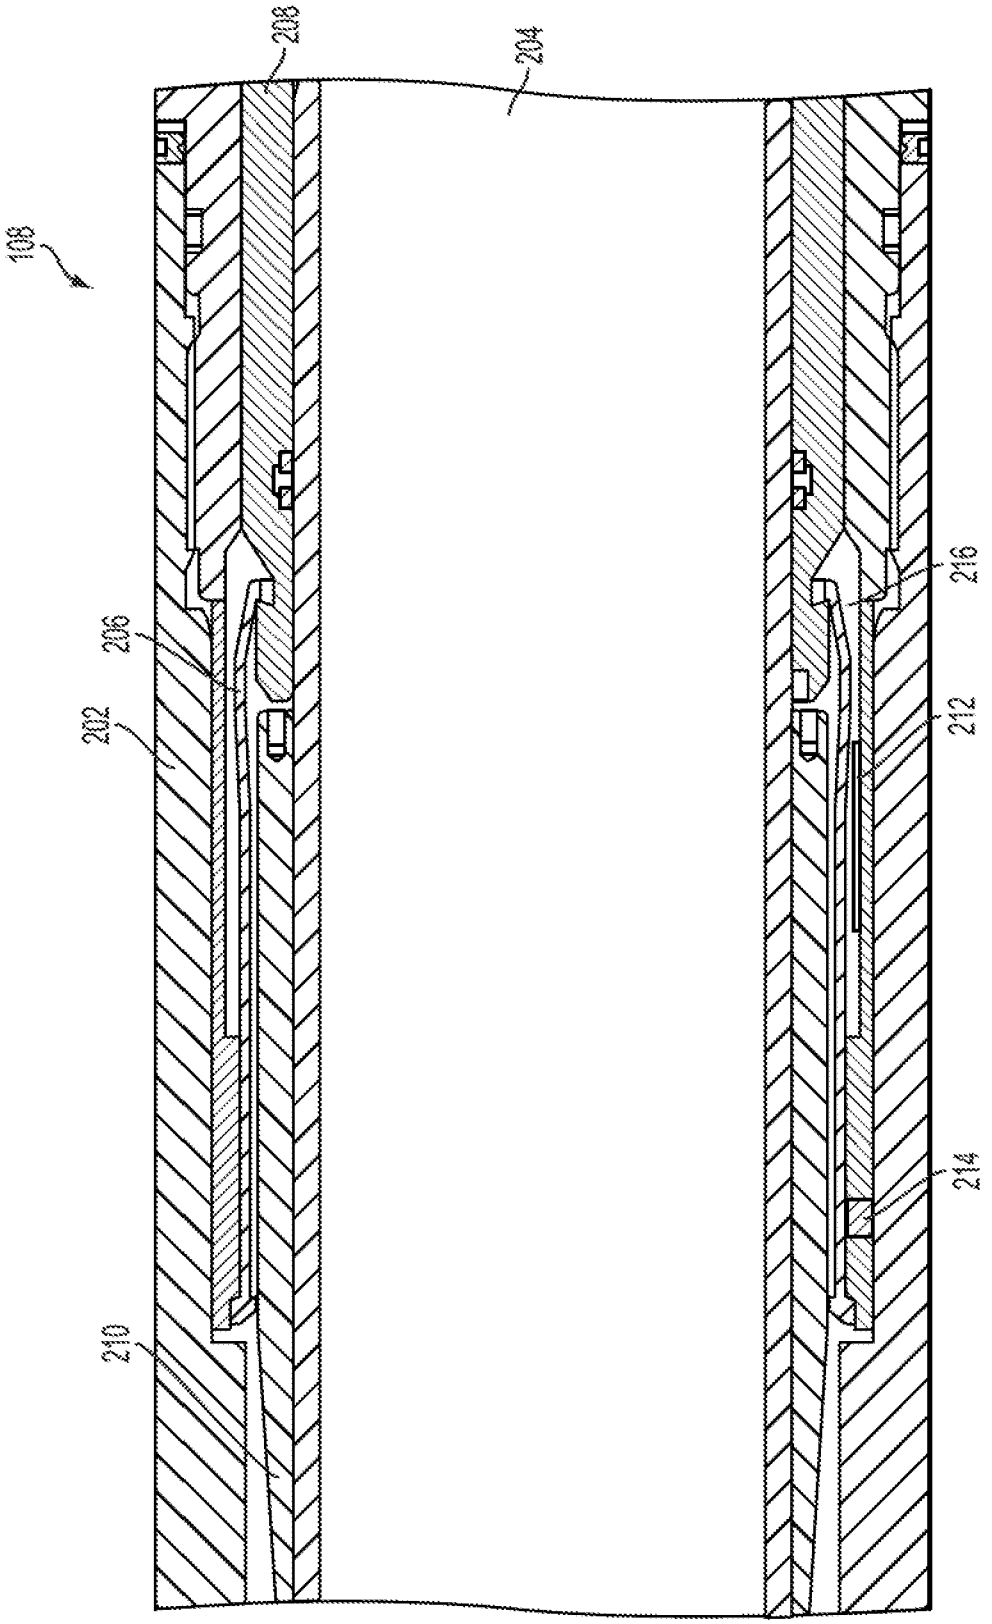


FIG. 2

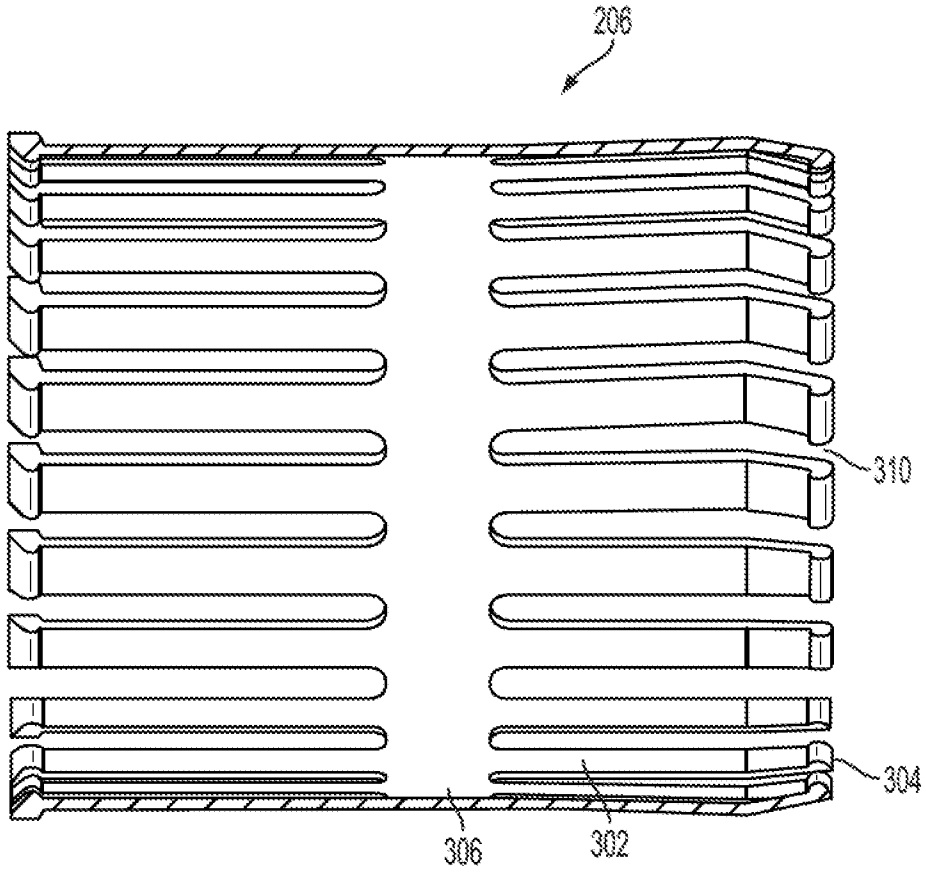


FIG. 3

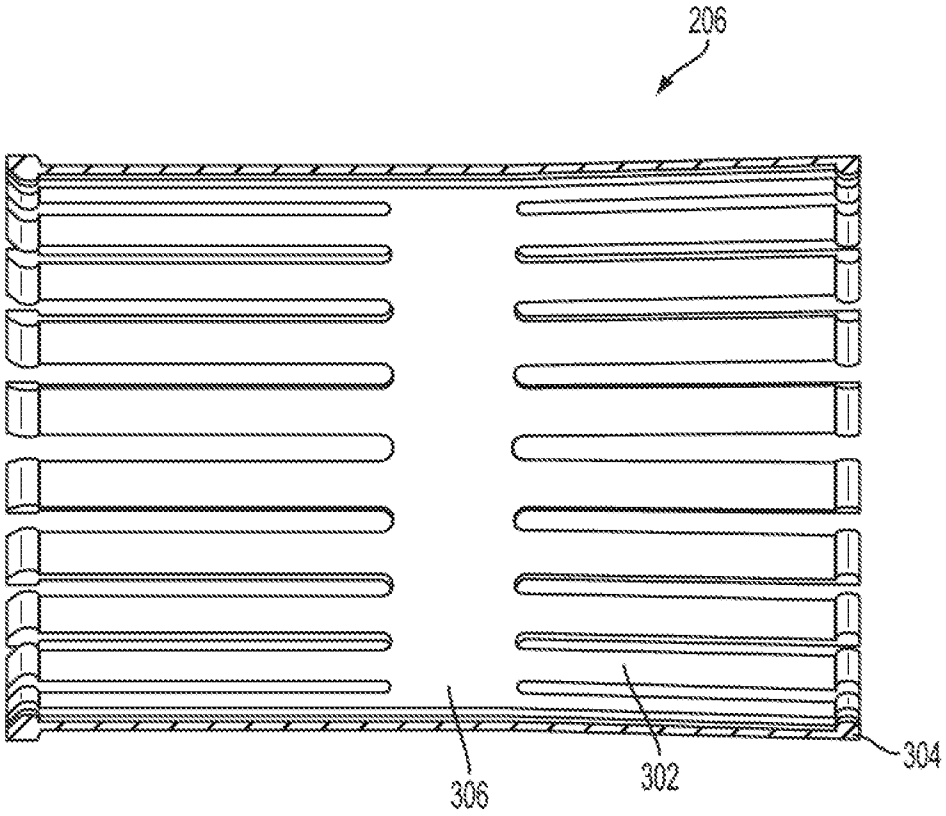


FIG. 4

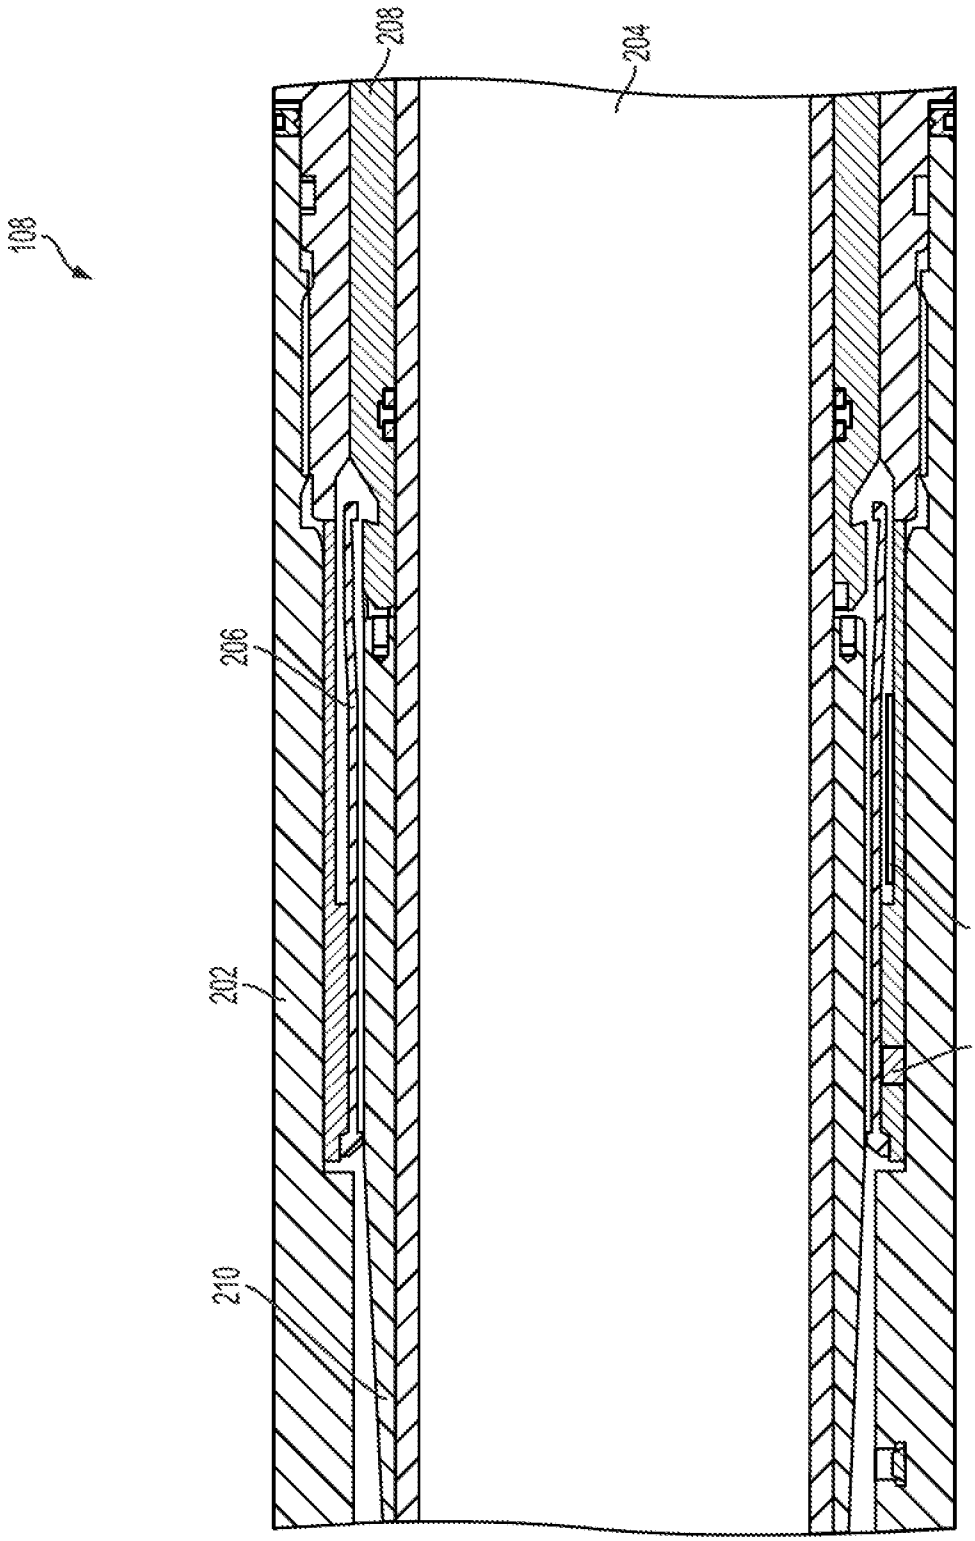


FIG. 5

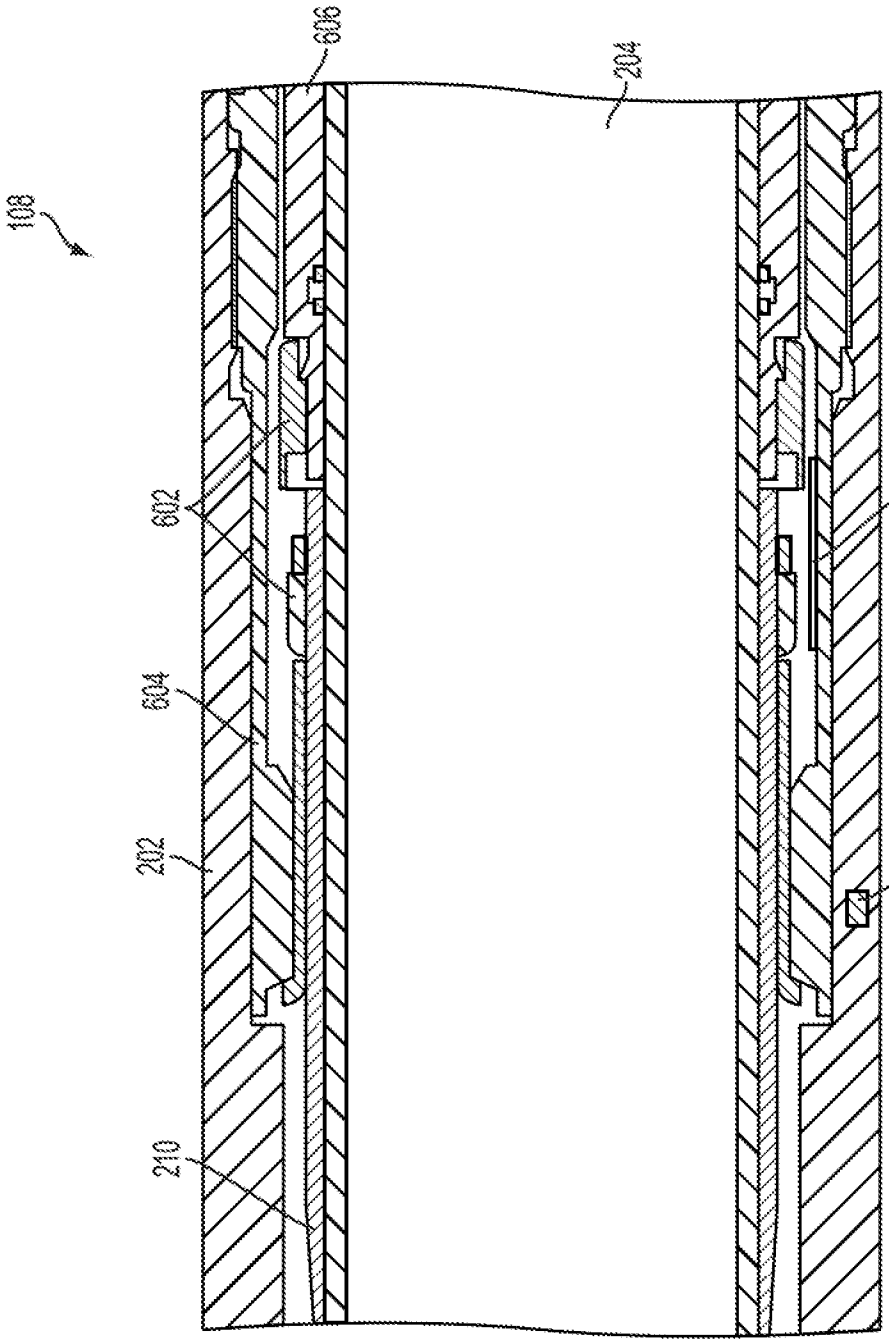


FIG. 6

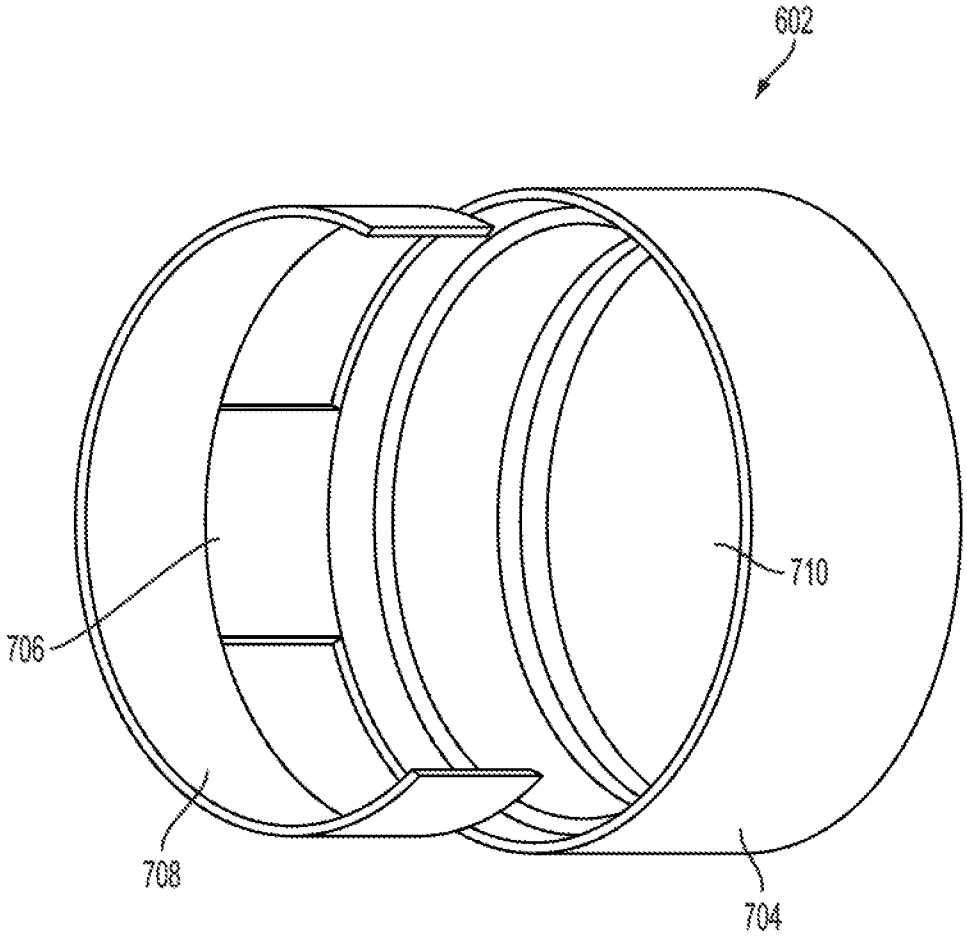


FIG. 7

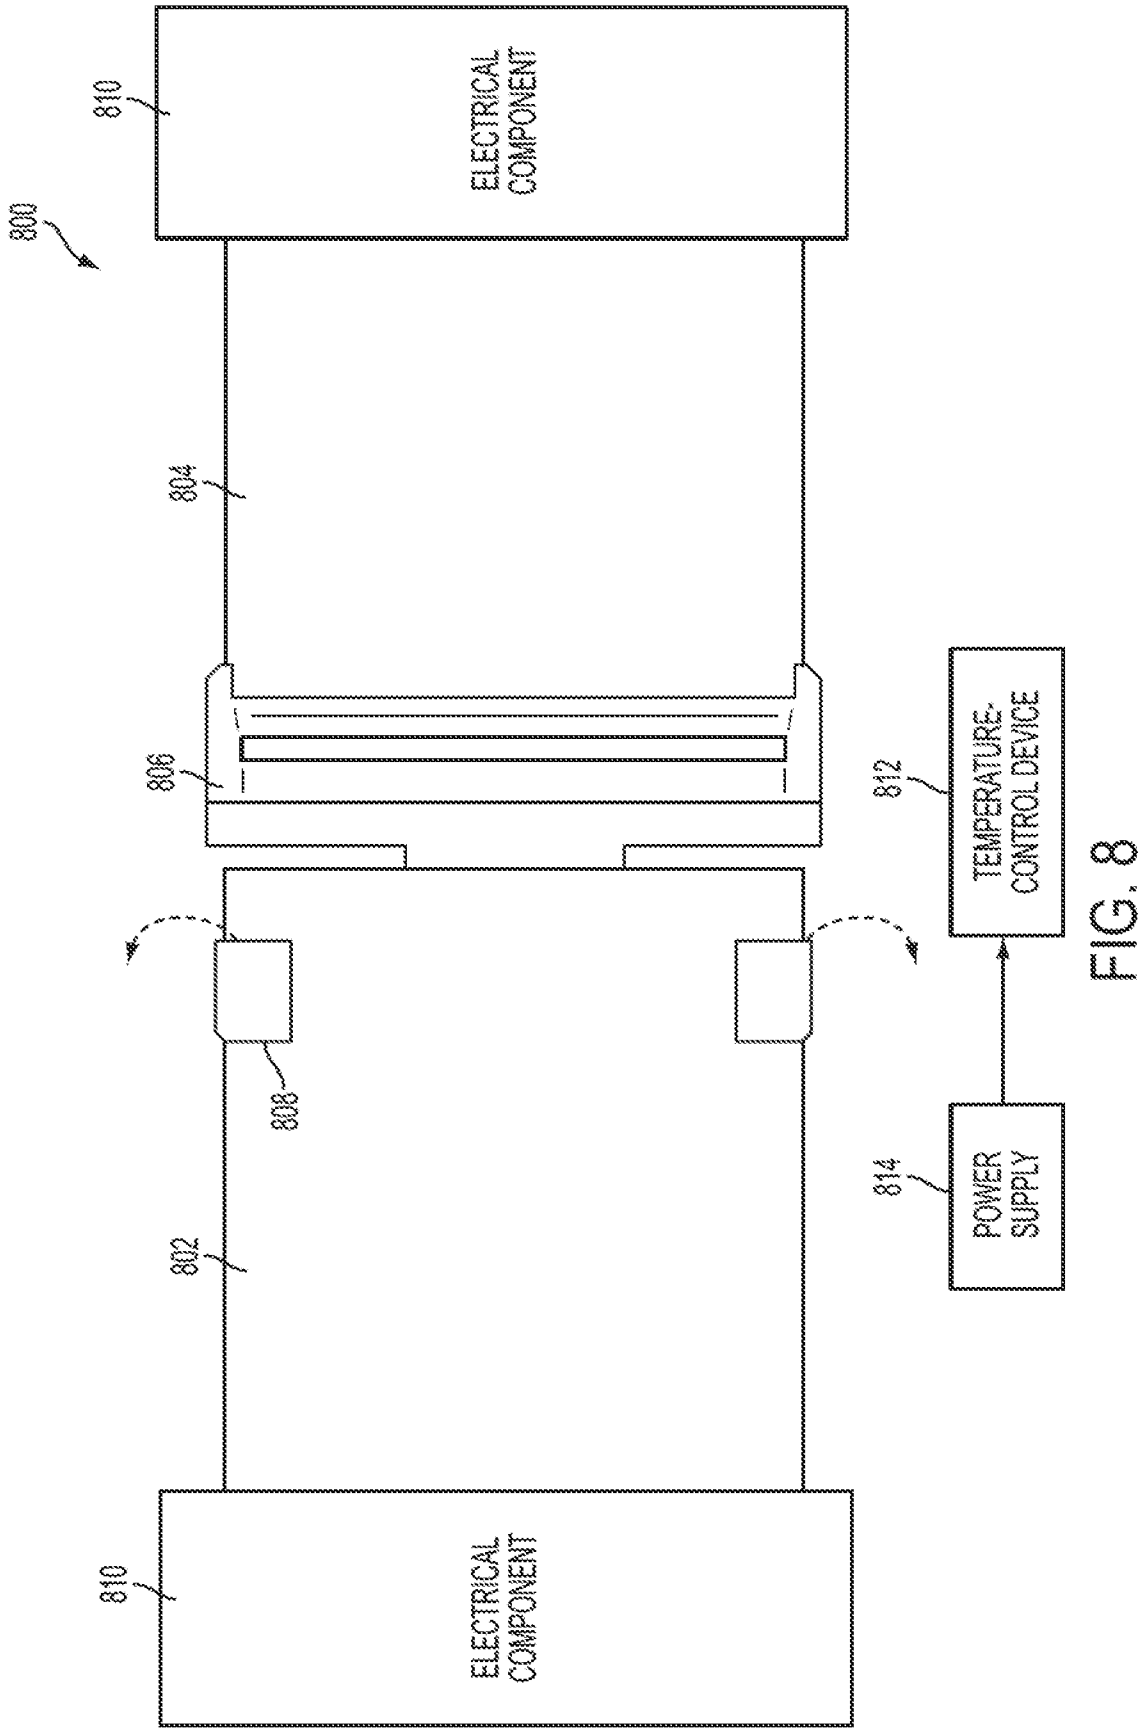

800
810
ELECTRICAL COMPONENT
804
806
808
812
TEMPERATURE-CONTROL DEVICE
814
POWER SUPPLY
802
810
ELECTRICAL COMPONENT

FIG. 8

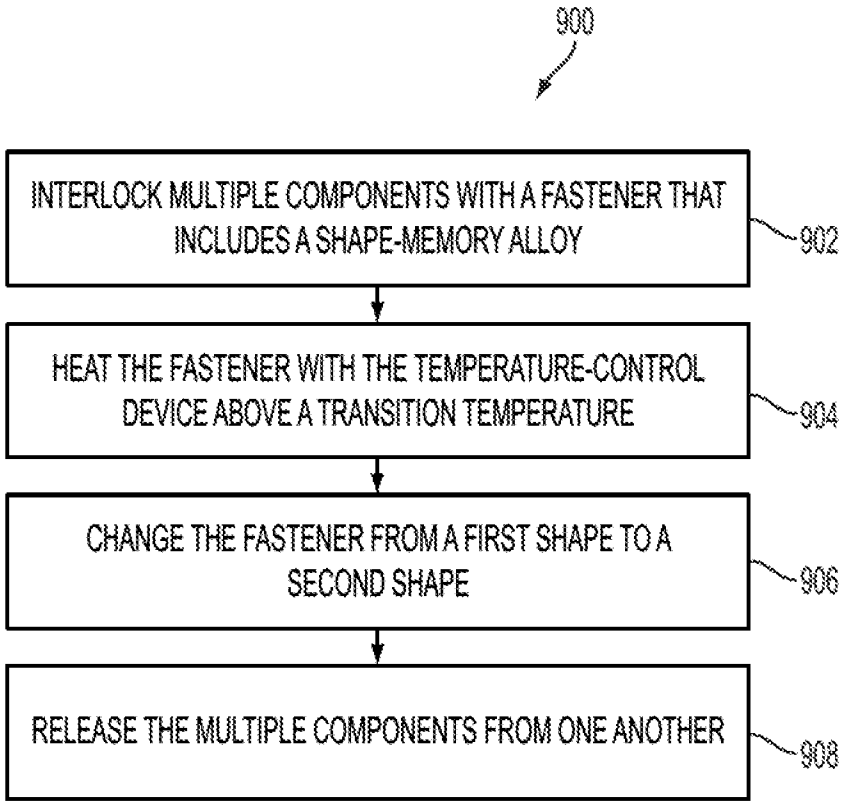

900
INTERLOCK MULTIPLE COMPONENTS WITH A FASTENER THAT INCLUDES A SHAPE-MEMORY ALLOY
902
HEAT THE FASTENER WITH THE TEMPERATURE-CONTROL DEVICE ABOVE A TRANSITION TEMPERATURE
904
CHANGE THE FASTENER FROM A FIRST SHAPE TO A SECOND SHAPE
906
RELEASE THE MULTIPLE COMPONENTS FROM ONE ANOTHER
908

FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/044832

A. CLASSIFICATION OF SUBJECT MATTER

E21B 17/02(2006.01)i, E21B 17/04(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B 17/02; E21B 33/128; A44B 21/00; F16B 25/00; E21B 43/00; E21B 33/13; E21B 36/00; E21B 17/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: wellbore, fastener, shape-memory alloy, interlock, component, physical shape, changeable, valve, temperature control device, and power source

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008-0264647 A1 (LI, YANMEI) 30 October 2008 See paragraphs [0023]-[0035] and figures 9-10.	1-2,4-7,10,12,14,17,19
Y		3,11,13,18
A		8-9,15-16,20
Y	US 2007-0071575 A1 (RUDDUCK et al.) 29 March 2007 See paragraph [0247] and figures 1-4.	3,13
Y	US 2012-0055667 A1 (INGRAM et al.) 08 March 2012 See abstract and paragraph [0099].	11,18
A	US 2013-0087334 A1 (BUYTAERT et al.) 11 April 2013 See paragraphs [0048]-[0050] and figures 1-2.	1-20
A	US 2005-0172462 A1 (RUDDUCK et al.) 11 August 2005 See abstract and figures 1-5.	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
26 March 2015 (26.03.2015)	**27 March 2015 (27.03.2015)**

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701, Republic of Korea
Facsimile No. ++82 42 472 7140

Authorized officer
PARK, Tae Wook
Telephone No. +82-42-481-3405

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044832

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008-0264647 A1	30/10/2008	CN 101294482 A	29/10/2008
US 2007-0071575 A1	29/03/2007	AU 2003-902259 D0	29/05/2003
		AU 2004-238393 A1	25/11/2004
		AU 2004-289712 A1	26/05/2005
		CA 2525445 A1	25/11/2004
		CN 101002031 A	18/07/2007
		CN 102400990 A	04/04/2012
		CN 102400990 B	20/08/2014
		CN 104132043 A	05/11/2014
		CN 1805822 A	19/07/2006
		CN 1805822 B	28/04/2010
		CN 1805822 C	28/04/2010
		CN 1926344 A	07/03/2007
		CN 1926344 B	30/11/2011
		EP 1635986 A1	22/03/2006
		EP 1635986 B1	10/04/2013
		EP 1697642 A1	06/09/2006
		EP 1697642 A4	09/04/2008
		EP 1787033 A1	23/05/2007
		EP 1834057 A2	19/09/2007
		EP 2302229 A2	30/03/2011
		EP 2302229 A3	20/06/2012
		EP 2302230 A2	30/03/2011
		EP 2302230 A3	20/06/2012
		JP 2007-501132 A	25/01/2007
		JP 2007-511714 A	10/05/2007
		JP 2012-229808 A	22/11/2012
		JP 2014-016038 A	30/01/2014
		JP 4778900 B2	21/09/2011
		JP 5261638 B2	14/08/2013
		JP 5519732 B2	11/06/2014
		US 2006-0272141 A1	07/12/2006
		US 2008-0127684 A1	05/06/2008
		US 2008-0277946 A1	13/11/2008
		US 2010-0011548 A1	21/01/2010
		US 7610783 B2	03/11/2009
		WO 2004-101216 A1	25/11/2004
		WO 2005-047714 A1	26/05/2005
		WO 2006-005130 A1	19/01/2006
		WO 2006-032082 A2	30/03/2006
		WO 2006-032082 A3	12/10/2006
US 2012-0055667 A1	08/03/2012	CA 2759401 A1	04/11/2010
		CA 2759401 C	16/12/2014
		CA 2856678 A1	04/11/2010
		EP 2425093 A1	07/03/2012
		US 2014-284046 A1	25/09/2014
		US 8763687 B2	01/07/2014

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2014/044832

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2010-127240 A1	04/11/2010
US 2013-0087334 A1	11/04/2013	CA 2741765 A1	01/04/2010
		EP 2340350 A2	06/07/2011
		EP 2604785 A1	19/06/2013
		US 2010-078173 A1	01/04/2010
		US 8360161 B2	29/01/2013
		WO 2010-037137 A2	01/04/2010
		WO 2010-037137 A3	05/05/2011
US 2005-0172462 A1	11/08/2005	AU 2003-240286 A1	06/01/2004
		AU 2005-200229 A1	10/02/2005
		AU 2005-224279 A1	29/09/2005
		CA 2489857 A1	31/12/2003
		CA 2560090 A1	29/09/2005
		CA 2560091 A1	29/09/2005
		CN 102506040 A	20/06/2012
		CN 1934360 A	21/03/2007
		CN 1950617 A	18/04/2007
		EP 1534964 A1	01/06/2005
		EP 1751434 A1	14/02/2007
		EP 1774183 A1	18/04/2007
		EP 2284404 A2	16/02/2011
		EP 2284404 A3	13/02/2013
		JP 2005-530115 A	06/10/2005
		JP 2007-529690 A	25/10/2007
		JP 2007-529691 A	25/10/2007
		US 2007-0189874 A1	16/08/2007
		US 7600301 B2	13/10/2009
		WO 04-001235 A1	31/12/2003
		WO 2005-090798 A1	29/09/2005
		WO 2005-090799 A1	29/09/2005