

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2013285524 B2**

(54) Title
Method and device for brewing a beverage

(51) International Patent Classification(s)
A47J 31/06 (2006.01)

(21) Application No: **2013285524**

(22) Date of Filing: **2013.07.02**

(87) WIPO No: **WO14/006050**

(30) Priority Data

(31) Number	(32) Date	(33) Country
12175406.3	2012.07.06	EP
13160324.3	2013.03.21	EP
13160328.4	2013.03.21	EP
13160326.8	2013.03.21	EP
13160325.0	2013.03.21	EP
12175405.5	2012.07.06	EP
13160342.5	2013.03.21	EP

(43) Publication Date: **2014.01.09**

(44) Accepted Journal Date: **2016.02.25**

(71) Applicant(s)
Unilever PLC

(72) Inventor(s)
Bittar, Ahmad;Cross, David Murray;Paton, Michael;Smith, Alistair David;Toon, Daniel Thomas

(74) Agent / Attorney
Davies Collison Cave, GPO Box 3876, SYDNEY, NSW, 2001

(56) Related Art
WO 2009/130311
WO 2007/042485
US 5813317
EP 1658796

(51) International Patent Classification:
A47J 31/06 (2006.01)

(21) International Application Number:

PCT/EP2013/063946

(22) International Filing Date:

2 July 2013 (02.07.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12175405.5	6 July 2012 (06.07.2012)	EP
12175406.3	6 July 2012 (06.07.2012)	EP
13160328.4	21 March 2013 (21.03.2013)	EP
13160324.3	21 March 2013 (21.03.2013)	EP
13160325.0	21 March 2013 (21.03.2013)	EP
13160326.8	21 March 2013 (21.03.2013)	EP
13160342.5	21 March 2013 (21.03.2013)	EP

(71) Applicant (for AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SC, SD, SG, SL, SZ, TT, TZ, UG, VC, ZA, ZM, ZW only): **UNILEVER PLC** [GB/GB]; a company registered in England and Wales under company no. 41424 of Unilever House,

100 Victoria Embankment, London, Greater London EC4Y 0DY (GB).


(71) Applicant (for all designated States except AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SC, SD, SG, SL, SZ, TT, TZ, UG, US, VC, ZA, ZM, ZW): **UNILEVER N.V.** [NL/NL]; Weena 455, NL-3013 AL Rotterdam (NL).

(71) Applicant (for US only): **CONOPCO, INC., D/B/A UNILEVER** [US/US]; 800 Sylvan Avenue, AG West, S. Wing, Englewood Cliffs, New Jersey 07632 (US).

(72) Inventors: **BITTAR, Ahmad**; PA Holdings Limited, PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6PD (GB). **CROSS, David, Murray**; PA Holdings Limited, PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6PD (GB). **PATON, Michael**; PA Holdings Limited, PA Consulting Group, Cambridge Technology Centre, Melbourn, Hertfordshire SG8 6PD (GB). **SMITH, Alistair, David**; Unilever R&D Colworth, Sharnbrook, Bedford, Bedfordshire MK44 1LQ (GB). **TOON, Daniel, Thomas**; PA Holdings Limited, PA Consulting Group,

[Continued on next page]

(54) Title: METHOD AND DEVICE FOR BREWING A BEVERAGE

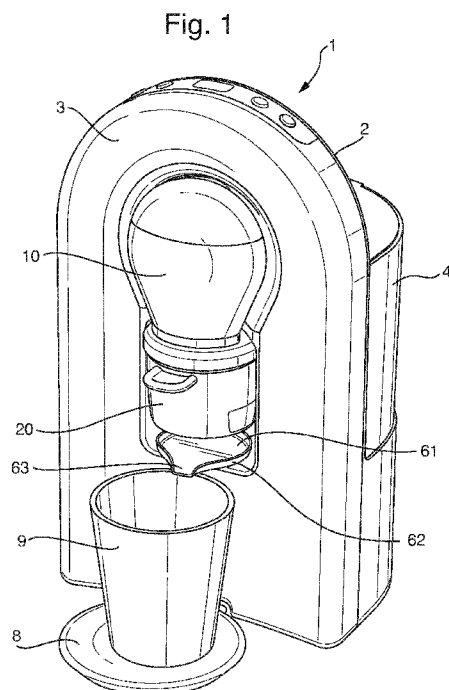

(57) Abstract: A method of preparing a tea beverage in a capsule-based brewing device is provided, the device comprising an infusion chamber (10); a capsule holder (20) sized and shaped so as to receive a capsule (30); a filter (25); an openable and closable passage (29) which terminates in an orifice (40); a vessel (60) located beneath the orifice (40) and having a spout (63); the method comprising the steps of: introducing liquid and infusible beverage material from the capsule (30) into the infusion chamber (10) so as to brew the beverage; and then after brewing has taken place for a sufficient time, opening the passage (29) to allow the beverage to flow from the infusion chamber (10) through the filter (25), along the passage (29), through the orifice (40), into the vessel (60) and out from the spout (63).



Cambridge Technology Centre, Melbourn, Hertfordshire
SG8 6PD (GB).

(74) **Agent: ASKEW, Sarah, E.;** Unilever PLC, Unilever Patent Group, Colworth House, Sharnbrook, Bedford, Bedfordshire MK44 1LQ (GB).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) **Date of publication of the international search report:**

27 March 2014

METHOD AND DEVICE FOR BREWING A BEVERAGE

Technical field of the invention

- 5 The present invention relates to a method and device for brewing a beverage. In particular, the invention relates to infused beverages such as tea that are brewed in a device having an infusion chamber.

Background to the invention

- 10 Beverages such as tea and coffee are usually prepared in the home using ground coffee, tea bags or loose-leaf tea. However, the long brewing time and mess after brewing are inconvenient.

- Devices for automatically brewing tea are known. One type of brewing device,
15 described for example in US 5 619 904 and WO 2008 / 058576 consists of a brewing container which fits on top of a tea pot. Leaf tea or other beverage material is placed in the brewing container, and hot water is then introduced. Once brewing has been completed, the liquid is transferred from the brewing container into the tea pot. The brewing container is then removed, and the beverage is
20 poured out of the tea pot into a cup. WO 2008 / 156283 discloses an extractor for extracting loose green tea leaves with pressurized hot water. After extraction, the beverage passes out of the extractor and out through a pipe.

- Automatic capsule-based coffee brewing devices are well known. Ground coffee
25 is provided in a single use capsule or cartridge, through which hot water is passed to brew the beverage. The spent coffee material is retained or collected in the capsule after brewing, which makes for easy disposal and no mess. These devices provide a convenient, rapid and consumer-friendly way of brewing beverages. However, whilst these devices are generally recognized by consumers
30 to provide good quality coffee beverages, similar devices for making tea have not

2013285524 19 Jan 2016

- 2 -

always achieved the same acceptance. Consumers often perceive tea from such a brewing device as not being of high quality.

5 Capsule-based devices for brewing tea have been designed which have a transparent infusion chamber, see for example, WO 2007 / 042485. The tea leaves immersed in the liquid are visible to the user whilst infusion takes place. After brewing, the tea beverage is dispensed vertically downwards from a spout beneath the infusion chamber. Whilst having a transparent infusion chamber helps to emphasize the quality and “tea-ness” of the beverage, as distinct from coffee making machines, it would nonetheless be desirable to improve the perception of the quality of beverages from devices for making tea. Hence it is an object of the present invention seeks to provide a method for brewing a tea beverage in a capsule-based brewing device which addresses this problem.

15

Brief description of the invention

In a first aspect, the present invention provides a method of preparing a tea beverage in a capsule-based brewing device, the device comprising

- an infusion chamber;
- 20 • a capsule holder sized and shaped so as to receive a capsule;
- a filter;
- an openable and closable passage which terminates in an orifice;
- a vessel located beneath the orifice and having a spout;

the method comprising the steps of:

- 25 a) introducing liquid and infusible beverage material from the capsule into the infusion chamber so as to brew the beverage;
 - b) after brewing has taken place for a sufficient time, opening the passage to allow the beverage to flow from the infusion chamber through the filter, along the passage, through the orifice, into the vessel and out from the spout.
- 30

- 3 -

In a second aspect the present invention provides a capsule-based brewing device, the device comprising

- an infusion chamber;
- a capsule holder sized and shaped so as to receive a capsule;
- 5 • a filter;
- an openable and closable passage which terminates in an orifice;
- a vessel located beneath the orifice and having a spout;
- means for introducing liquid and infusible beverage material from the capsule into the infusion chamber so as to brew the beverage;
- 10 • a valve for opening the passage to allow the beverage to flow from the infusion chamber through the filter, along the passage, through the orifice, into the vessel and out from the spout.

By dispensing the beverage via the vessel and spout, the beverage pours in an arc, rather than simply being dispensed vertically downwards from the orifice into the cup. This is reminiscent of tea poured from the spout of a tea pot, and emphasizes the quality and “tea-ness” of the beverage.

Detailed description of the invention

20 The term “beverage” refers to a substantially aqueous drinkable composition suitable for human consumption. Preferably the beverage comprises at least 85% water by weight of the beverage, more preferably at least 90% and most preferably from 95 to 99.9%.

25 The term “infusible beverage material” refers to tea plant material, herb plant material, fruit pieces and / or flower material (e.g. petals), which when steeped or soaked in an aqueous liquid release certain soluble substances into the liquid, e.g. flavour and/or aroma molecules. The term 'tea' refers to leaf and / or stem material from *Camellia sinensis* var. *sinensis* or *Camellia sinensis* var. *assamica*.

30 It also includes rooibos obtained from *Aspalathus linearis*. 'Tea' is also intended to include the product of blending two or more of any of these teas. The tea material

may be substantially fermented i.e. black tea, semi-fermented i.e. oolong tea, or substantially unfermented i.e. green tea. The term "herb plant material" refers to material which is commonly used as a precursor for herbal infusions. Preferably the herb plant material is selected from chamomile, cinnamon, elderflower, ginger, hibiscus, jasmine, lavender, lemongrass, mint, rosehip, vanilla and verbena. The tea material may additionally comprise fruit pieces (e.g. apple, blackcurrant, mango, peach, pineapple, raspberry, strawberry etc). The tea material can be flavoured and/or spiced, e.g. with bergamot, citrus peel and the like. For the avoidance of doubt, the term "infusible beverage material" does not include coffee material. Preferably the infusible beverage material is dried and has a moisture content of less than 30 wt %, preferably less than 20 wt % and most preferably from 0.1 to 10 wt %. Preferably the infusible beverage material is in the form of particles which have a size (i.e. longest diameter) of from about 2 to about 10mm, preferably 3 to 7mm.

The beverage preferably comprises at least 0.01% by weight tea solids. More preferably the beverage comprises from 0.04 to 3%, even more preferably from 0.06 to 2%, most preferably from 0.1 to 1 % by weight tea solids.

The term 'brewing' refers to the addition of a liquid, particularly hot water, to an infusible beverage material thereby to form a beverage. Brewing may be carried out at any temperature, but preferably in the range of 80 to 95°C.

The term "infusion chamber" means a vessel in which infusion of infusible beverage material takes place, and which is large enough both to allow the beverage material to move around in the liquid during infusion, and also to contain a substantial part, at least 50% of the volume of the final beverage. The term "infusion chamber" therefore does not refer to capsules inside which brewing takes place (as is typically the case in coffee machines).

The term “spout” means an element which channels and directs the flow of a liquid, so that the flow of the liquid on leaving the spout has a horizontal component, i.e. it does not flow in a purely vertical downwards direction. Preferably the spout is a projecting tube or gutter.

5

The term “capsule” includes cartridges, pods, and packages etc., e.g. a rigid or semi-rigid container in which infusible beverage material is or may be packaged. Preferably the capsule comprises a body part and a lid part, the lid part being attached to the body part so as to enclose the infusible beverage material within the capsule. The lid may be made of a thin film, such as foil.

10

The present invention will now be described with reference to the figures, wherein:

Figure 1 shows a brewing device according to the invention.

15 Figure 2 is a schematic diagram showing the functional main components of the device.

Figure 3 shows a capsule holder in cross-section

Figure 1 shows a brewing device according to the invention. The device **1** has a casing **2** with a front side **3** and a rear side **4**. An infusion chamber **10** is supported and held in place by a manifold (not shown). A water reservoir, heater, and pump (not shown) are located inside the rear **4** of the casing.

20

The infusible beverage material is provided in a capsule (not shown). The device has a capsule holder **20** sized and shaped so as to receive the capsule. The capsule holder **20** is shown in position for brewing, wherein the top of the capsule holder is in water-tight contact with the bottom of the infusion chamber **10**. In the embodiment shown in Figure 3, a filter **25** is located in the capsule holder. In an alternative embodiment (not shown) the capsule has a filter in the bottom of the body part. The filter preferably consists of a fine mesh made for example of stainless steel. The mesh size must be sufficiently small to catch small pieces of

25

30

beverage material but large enough to ensure that draining is not too slow. Preferably, the mesh size is from 100 to 500 microns, more preferably 150 to 300 microns.

5 Below the capsule holder there is a vessel **60** which has a spout **63**. At the bottom of the front side **3** of the casing there is a tray **8** on which a cup is placed when the beverage is dispensed. In the context of the present invention the term “vessel” refers to any object which provides a surface for the beverage to be dispensed onto. In the embodiment shown in Figure 1, the vessel **60** consists of a flat base
10 **61** having a sidewall **62** around its edge, apart from at the front where there is a spout **63**. The vessel could be a cup, a tray, a pipe or any other suitable object. The vessel could be an integral part of the device, for example part of the casing **2**, or a separate object (as in the embodiment shown in Figure 1).

15 Figure 2 is a schematic diagram showing the main functional components of the device. Water from the reservoir **50** is fed to the infusion chamber **10** via a water filter **52**, a water pump **54**, a heater **56** and a valve **57**. The capsule holder **20** holds a capsule **30**. Beneath the capsule holder **20** there is the vessel **60**, and a cup **9** which rests on a tray **8**. The valve **57** controls the route the water takes
20 between the heater **56** and the infusion chamber **10**. Firstly the water is pumped to the infusion chamber **10** via the capsule, in order to brew a beverage **70**. Subsequently, the valve **57** can re-direct the water such that it enters the brewing chamber **10** via a rinse head **18** in order to rinse and/or clean the brewing chamber **10**. There is also an air pump **58** which can pump air to the infusion
25 chamber, preferably via the capsule holder.

Figure 3 shows the capsule holder **20** in cross-section, containing a capsule **30**. In the lower part of the capsule holder, there is an openable and closable passage **29** through which the beverage flows during dispensing and which is closed by a
30 drain valve **21** during brewing and which terminates in an orifice **40**. In a preferred embodiment, the passage terminates in a plurality of orifices, more preferably

from 3 to 7, most preferably 4, 5 or 6 orifices. We have found that having a number of orifices of small diameter results in less dripping at the end of dispensing than a single orifice of a larger diameter.

- 5 In use, the device functions as follows. The user places a capsule containing infusible beverage material in the capsule holder. The capsule holder is then placed in communication with the infusion chamber to form a water-tight contact, so that the capsule holder and infusion chamber together form a vessel in which the brewing liquid can be held while brewing takes place. The capsule may have a
- 10 lid, which needs to be opened or removed in order to release the beverage material. In one embodiment, the lid is removed by the user before the capsule is inserted into the device. Alternatively, the lid is opened automatically by the device after the capsule is inserted into the capsule holder.
- 15 The device may have means for recognizing a capsule and / or reading information from a code on the capsule. This allows the capsule to be recognized by the device, so that the device can automatically set the parameters for the brewing operation, such as the brewing time, water temperature etc.. It also allows the device to be programmed so that it only operates if the correct type of
- 20 capsule is present. Thus a valid code signifies that an expected type of capsule is present, and an invalid code signifies an unexpected type of capsule, a capsule that has already been used or that no capsule is present. The recognition system can be of any suitable type, such as mechanical interlocking between the capsule and the capsule holder; optical recognition (e.g. by means of colour, fluorescence
- 25 or bar code), electrical, magnetic, radio-frequency identification (RFID) chip etc.. The device may also have means for allowing the user to adjust the parameters of the brewing operation, such as the brewing time, the cup size etc. The means may suitably consist of buttons or other inputs on the device, together with a control system.

Water is pumped from the reservoir to the heater, which is preferably a flow-through heater. The resulting hot water (and optionally steam) is then pumped to the capsule, for example through a needle. The influx of hot water pushes the infusible beverage material out from the opened capsule into the infusion chamber. The heater and pump are controlled so that the target brew temperature (which is typically in the range 80°C to 95°C) is achieved in the infusion chamber. Typically the water flow rate is in the range of 200 to 400ml/min, and the volume of water is 150 to 300ml, depending on the desired size of the beverage.

Air may be pumped into the capsule holder or directly into the infusion chamber to create bubbles in the beverage and thereby agitate the beverage material. This not only enhances the visual appearance, but also aids infusion and helps to prevent the beverage material from sticking to the sides of the infusion chamber. Moreover, the introduction of air releases aroma which can optionally be vented via a conduit to a vent located in the vicinity of the spout, thereby providing the user with the aroma of tea during brewing. In a preferred embodiment, the aroma passes from the infusion chamber through a conduit to an aroma vent located in the vicinity of, and preferably adjacent to the spout **63**. The brewing time, which typically ranges from 10 to 120 seconds, is preferably set by user input and / or information read from the capsule.

Once brewing has taken place for the required time the drain valve **21** is opened, allowing the beverage to drain from the infusion chamber. Preferably the opening of the drain valve is controlled automatically by the machine. The beverage flows from the infusion chamber through the filter **25**. Infusible beverage material is prevented from entering the passage by the filter. The beverage then flows through the passage **29**, out through the orifice(s) **40**, into the vessel **60** and finally pours through the spout **63** into a cup **9** which the user has already placed onto the tray **8**. Thus, rather than being dispensed vertically downwards into the cup, the beverage follows an arc, similar to that of tea poured from the spout of a tea pot. This emphasizes the “tea-ness” of the beverage, as distinct from coffee

2013285524 19 Jan 2016

- 9 -

making machines. In the embodiment shown in Figure 1, there is no direct connection between the vessel and the orifice. Thus the beverage is dispensed from the orifice and falls through free space, onto the vessel and out via the spout so that the consumer sees the tea pouring in an arc into the cup. Finally, after the beverage has
5 been dispensed, the user removes the used capsule and spent tea leaves. The free space beneath the capsule holder makes it easy to remove the capsule holder after brewing, so that the used capsule can be disposed of. Similarly this space facilitates insertion of the capsule holder with a new capsule before brewing. In contrast, if the bottom of the capsule holder were in close proximity to the vessel, it would be less
10 straightforward to remove and insert the capsule holder.

The various features of the embodiments of the present invention referred to in individual sections above apply, as appropriate, to other sections *mutatis mutandis*. Consequently features specified in one section may be combined with features
15 specified in other sections as appropriate. Various modifications of the described modes for carrying out the invention which are apparent to those skilled in the relevant fields are intended to be within the scope of the following claims.

Throughout this specification and the claims which follow, unless the context requires
20 otherwise, the word "comprise", and variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated integer or step or group of integers or steps but not the exclusion of any other integer or step or group of integers or steps.

25 The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as, an acknowledgement or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

The claims defining the invention are as follows:

1. A method of preparing a tea beverage in a capsule-based brewing device, the device comprising:
 - an infusion chamber;
 - a capsule holder sized and shaped so as to receive a capsule;
 - a filter;
 - an openable and closable passage which terminates in an orifice;
 - a vessel located beneath the orifice and having a spout;the method comprising the steps of:
 - a) introducing liquid and infusible beverage material from the capsule into the infusion chamber so as to brew the beverage;
 - b) after brewing has taken place for a sufficient time, opening the passage to allow the beverage to flow from the infusion chamber through the filter, along the passage, through the orifice, into the vessel and out from the spout.
2. A method as claimed in claim 1 wherein the infusible beverage material comprises tea plant material.
3. A method as claimed in claim 1 or claim 2 wherein the liquid is water.
4. A method as claimed in claim 3 wherein the water is at a temperature in the range of 80 to 95°C.
5. A method as claimed in any one of claims 1 to 4 wherein the vessel comprises a base having a peripheral sidewall and a spout.
6. A method as claimed in claim 5 wherein the vessel is a cup or a tray.
7. A method as claimed in any one of claims 1 to 6 wherein the beverage is dispensed from the orifice and falls through free space onto the vessel.

2013285524 19 Jan 2016

- 11 -

8. A capsule-based brewing device comprising
 - an infusion chamber;
 - a capsule holder sized and shaped so as to receive a capsule;
 - a filter;
 - 5 • an openable and closable passage which terminates in an orifice;
 - a vessel located beneath the orifice and having a spout;
 - means for introducing liquid and infusible beverage material from the capsule into the infusion chamber so as to brew the beverage;
 - 10 • a valve for opening the passage to allow the beverage to flow from the infusion chamber through the filter, along the passage, through the orifice, into the vessel and out from the spout.
9. A device as claimed in claim 8 wherein the vessel comprises a base having a peripheral sidewall and a spout.
- 15 10. A device as claimed in claim 9 wherein the vessel is a cup or a tray.
11. A device as claimed in any one of claims 8 to 10 wherein the vessel is not an integral part of the casing of the device.
- 20 12. A device as claimed in any one of claims 8 to 11 wherein there is a conduit for passing aroma from the infusion chamber to a vent located in the vicinity of the spout.

Fig. 1

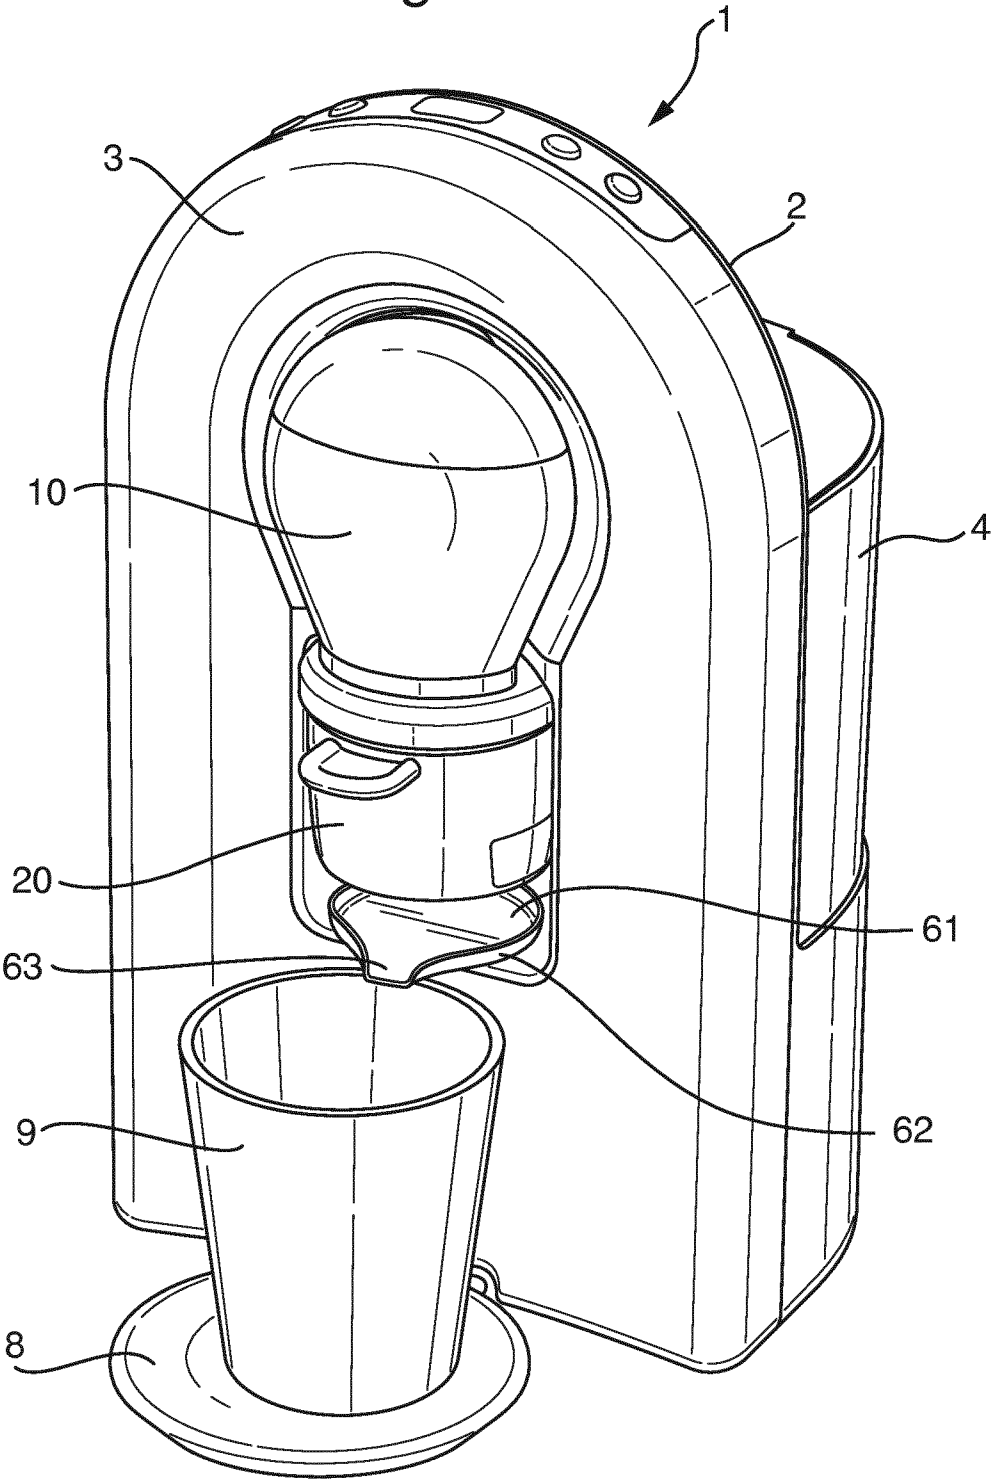


Fig. 2

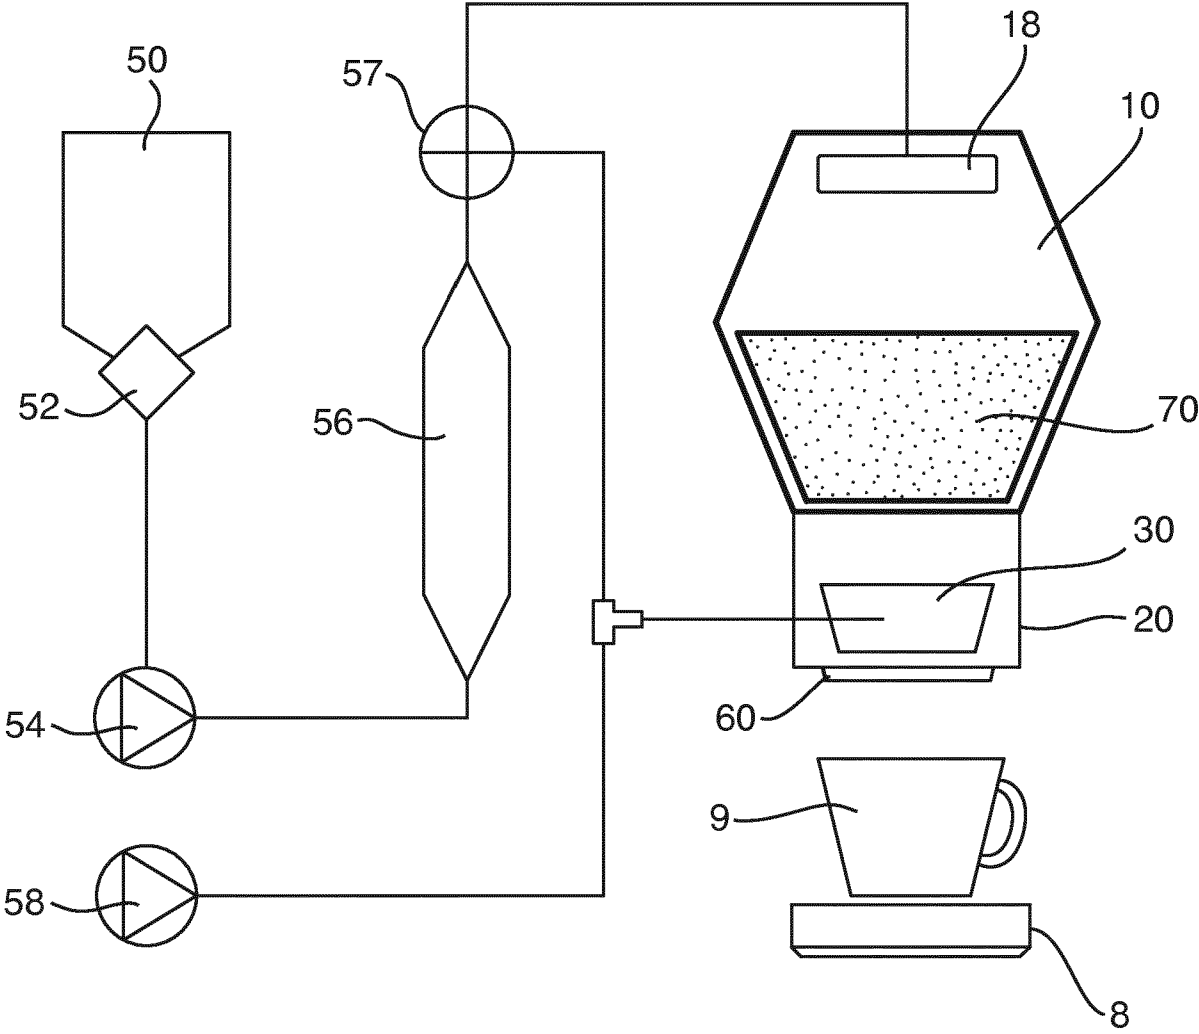


Fig. 3

