



- (51) **International Patent Classification:** Not classified
- (21) **International Application Number:**
PCT/EP2014/057316
- (22) **International Filing Date:**
10 April 2014 (10.04.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13163375.2 11 April 2013 (11.04.2013) EP
- (71) **Applicant:** NEC EUROPE LTD. [DE/DE]; Kurfür-
sten-Anlage 36, 69115 Heidelberg (DE).
- (72) **Inventors:** HOSSAIN, Mohammad Istiak; C/O Md.
Mokbul Hossain, Flat 5A, House 712, Road 10, Baitul
Aman Housing Society, Adabor, Dhaka, 1207 (BD).
KUNZ, Andreas; Schlatterstraße 5, 68542 Heddesheim
(DE). SAMDANIS, Konstantinos; Am Kronenburgerhof
9, 69221 Dossenheim (DE). ZHANG, Xiaowei; Espoir
201, Yoyogo 3-14-14, Shibuya-ku, Tokyo, Tokyo 1510053
(JP).
- (74) **Agent:** ULLRICH & NAUMANN; Schneidmühlstraße
21, 69115 Heidelberg (DE).

(81) **Designated States** (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) **Designated States** (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report (Rule 48.2(g))

(54) **Title:** A METHOD AND A NETWORK STRUCTURE FOR PROVIDING DEVICE CONNECTIVITY TO A RADIO AC-
CESS NETWORK

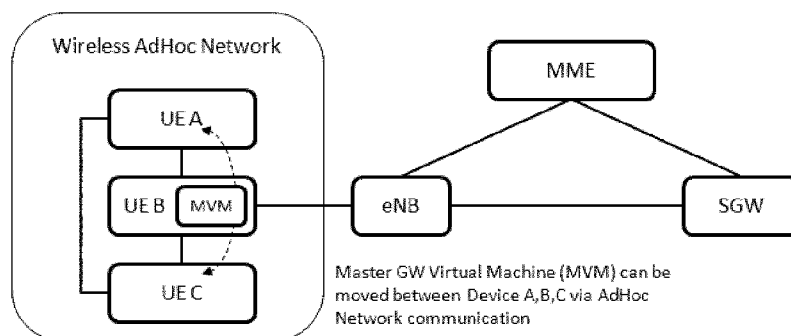


Fig. 2

(57) **Abstract:** For allowing a very resource and energy efficient connectivity and communication of devices to and with the radio access network a method for providing device connectivity to a radio access network is claimed, wherein at least two devices are connectable or connected to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network with a possibility of a direct connection between said devices. The method is characterized in that connection information used for a connection between a first device of said at least two devices and the radio access network is provided for a second device of said at least two devices, so that the second device is enabled to connect to the radio access network based on said connection information. Further, an according network structure is claimed, preferably for carrying out the above mentioned method.

A METHOD AND A NETWORK STRUCTURE FOR PROVIDING DEVICE CONNECTIVITY TO A RADIO ACCESS NETWORK

5 The present invention relates to a method for providing device connectivity to a radio access network, wherein at least two devices are connectable to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network with a possibility of a direct connection between said devices. Further, the present invention relates to a network structure for providing connectivity of devices to a radio access network, wherein at least
10 two devices are connectable to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network with a possibility of a direct connection between said devices.

15 A method and an according network structure for providing connectivity of devices to a radio access network are known from prior art. There are various use cases wherein at least two devices are connectable to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network. Further, a direct connection between said devices within the wireless local network is possible.

20 3GPP LTE networks aim to provide broadband connectivity to multiple users enhancing the service quality. Among the different services offered by LTE, new evolving services that take advantage of the LTE ubiquitous coverage involve no human participation and hence introduce new requirements beyond the traditional ones. Such requirements are different because of the plurality of Machine Type
25 Communication, MTC, devices and the need to transmit small data at infrequent periods. 3GPP has already specified the network architectures for supporting such MTC devices and services, while currently is exploring ways to optimize the network usage for supporting large number of MTC devices, see 3GPPTS 23.682.

30 In particular, it is estimated that large numbers of MTC devices are affiliated with a single MTC user. The MTC user owns a MTC Server which is allied with a number of MTC devices. This server and devices are connected through a packet switched network owned by a mobile network operator via an Access Point Name, APN,

using Gi interface. Typically, if there are 'n' numbers of MTC users who own 'm' numbers of MTC devices (n x m) number of devices need to transmit small data, and for each individual transmission the radio and S1 bearer needs to be re-established when moving from ECM_IDLE to ECM_CONNECTED state per device.

Such a process can cause congestion considering the associated signaling required in combination with the high number of MTC devices, which may try to access the network almost simultaneously: (1) to attach to the network or (2) to activate/modify/deactivate a connection. Use cases are given in 3GPP TS 22.368.

When many or each device needs to send small amounts of data, then the Radio Resource Control, RRC, connection setup, radio bearer setup and S1 bearer setup generate more signaling than the size of the user data payload that has to be transmitted.

This results in a large amount of network resources necessary for the connectivity of the devices and for the communication of the devices with elements of the radio access network.

Prior art:

1. K. Lee and J. Shin "A Group Based Communication Scheme Based on the Location Information of MTC Devices in cellular Networks"

In this paper authors focused on a group based communication where this scheme groups a number of connections that are triggered by closely located UEs if a certain application of the UEs triggers a number of connections to request the same user data. For an example, a number of audiences in a concert hall may try to receive a pamphlet as they enter the hall. Or like a certain bunch of closely located devices upgrading the firmware. In these cases, this group base communication is used to utilize the downlink data transmission. So this scheme is effectively providing a multicasting solution, which groups UEs based on location information that is made available to the network via complementary MTC devices.

2. RADIO BEARERS FOR MACHINE TYPE COMMUNICATION

WIPO Patent Application WO/2012/041363

5 A radio bearer sharing scheme for wireless machine type communication, MTC, especially for a group of MTC devices with small traffic in the same cell. A group of MTC devices served in the same cell is treated as one user equipment. An MTC device ID is used to uniquely identify such an MTC device on the MTCu interface with a base station in a cell. All the MTC devices in a group share the same radio network identifier and the MTC group identifier, and can be distinguished by the
10 device index in the group. The base station allocates one radio bearer over the MTCu interface for the small sessions of the devices, which have similar QoS requirements (QCI parameter and Layer 2 parameters) and the same MTC server. The data transmission scheduling information is signalled from the base station to the MTC devices in the same group, which may be achieved without over the air
15 signalling if the timing of the UL signal is linked to a corresponding DL transmission interval. Then the devices transmit data packets one by one accordingly. Within the MTCu DRB, the compressed ID is added into the PDCP PDU header to identify the packets belonging to different MTC devices. Only updates need to be communicated between the MTC devices and the base station
20 in the case that the device members of an MTC group change.

3. Lin et.al, System and Method for Group Communication in 3GPP Machine-to-Machine networks, US 2012/0296968, Nov. 2012

25 This invention proposes a method to group M2M devices together and associating such groups of devices with a M2M gateway that provides connectivity towards the network and can also identify devices within the group. The proposed scheme is static, having a fixed M2M gateway. Our invention adopts the concept of M2M gateway in terms of connectivity but in our proposal M2M gateway is the one that
30 uses the virtual bearer and can change dynamically. In addition our scheme introduces the concept of virtual bearer that can be shared by all devices in the group and also introduces security measures.

4. S-Y. Lien, K-C. Chen, Y. Lin, "Towards Ubiquitous Massive Accesses in 3GPP Machine-to-Machine Communications", IEEE Communications Magazine, Vol.49, No.4, Apr. 2011.

5 Prior M2M grouping methods focus on efficient radio resource management, grouping M2M Devices according to their QoS requirements. Their purpose is to organize M2M Devices into QoS-specific groups based on expected packet arrival rates and maximum tolerable delays to be capable to estimate and schedule radio resource accordingly with the objective to allocate adequate resource for M2M
10 services without disturbing other applications.

Thus, it is an object of the present invention to improve and further develop a method and a network structure for providing device connectivity to a radio access network for allowing a very resource and energy efficient connectivity and
15 communication of devices to and with the radio access network.

In accordance with the invention, the aforementioned object is accomplished by a method comprising the features of claim 1 and by a network structure comprising the features of claim 21.
20

According to claim 1 the method is characterized in that connection information used for a connection between a first device of said at least two devices and the radio access network is provided for a second device of said at least two devices, so that the second device is enabled to connect to the radio access network based
25 on said connection information.

According to claim 21 the network structure is characterized by means for providing connection information used for a connection between a first device of said at least two devices and the radio access network for a second device of said
30 at least two devices, so that the second device is enabled to connect to the radio access network based on said connection information.

According to the invention it has been recognized that for allowing a very resource and energy efficient behavior a connection information of a first device can also be

used for a second device, if said connection information is provided for the second device in a suitable way. Thus, connection information which has been used for a connection between a first device and the radio access network can at least partially be used for a second device, so that the second device is enabled to connect to the radio access network based on said connection information. This has the advantage that for example a bearer needs not to be re-established for each individual data transmission between a device and the radio access network or an element of the radio access network. The generation of for example a RRC connection setup, radio bearer setup and S1 bearer setup is not necessary for each individual data transmission of sometimes only small user data payload that has to be transmitted. The signaling process and/or bearer re-establishment procedures can be reduced by the inventive method and network structure.

Thus, a very resource and energy efficient connectivity and communication of devices to and with the radio access network is allowed.

Within a preferred embodiment the connection information can comprise at least one connection parameter and/or at least one bearer parameter and/or at least one radio bearer parameter. Thus, the connection information can comprise various parts which can provide for connection between different elements of the radio access network.

With regard to a very efficient method the connection information can be provided for the second device, if a data transmission from the first device to the radio access network or vice versa is finished or if there is a data transmission pause of a definable length. As soon as the first device can be inactive, as all necessary data has been transmitted to a target element, the connection information can be provided for the second device, as the first device does no longer need the connection. Depending on an individual situation a data transmission pause can be defined, when the provision of the connection information to another device seems to be necessary.

Within a concrete preferred embodiment the connection information can be moved or transmitted from said first device to said second device and/or activated within

said second device. A movement of the connection information from said first device to said second device is a very simple proceeding within the inventive method. The connection information can be activated within said second device, if the connection information has reached the second device in any way. Within a preferred embodiment the connection information can be stored within a virtual device. Particularly in this case, the connection information can be retrieved or transmitted from the virtual device to the second device directly. In this case, also the first device could have received a connection information from the virtual device at first.

For performing the necessary steps regarding connectivity and/or data transmission, the virtual device can run on any hardware device without any requirements on the hardware or on the hardware of the first device or of the second device. Thus, no special hardware has to be provided for the virtual device. This simplifies the method and network structure of the present invention.

Within a further preferred embodiment the virtual device can be a functionality which can be moved between or activated within said devices that belong to said group. Such a virtual functionality is in line with actual virtual network structures and can be implemented easily within present network structures.

Within a further preferred embodiment the virtual device can be linked to a specific radio bearer or bearer that can be shared by different devices. This is a simple realisation of the inventive method with the possibility of reusing a bearer.

For providing a very reliable data transmission between devices and elements of the radio access network only one of the first and second devices can be or is active at one point in time. There could be provided specific measures for avoiding that more than one device uses the connection information at the same time.

Depending on individual circumstances and situations there can be members of the group, i.e. devices, which are not directly connectable to the radio access network due to reduced or not present network radio coverage. Thus, one or more of the devices of the group are not connectable or connected directly to the radio

access network. Particularly in this case the connection of such devices can be provided by other devices which are directly connectable to the radio access network and which are also in connection with the device or devices which are not directly connectable to the radio access network. Thus, within a preferred embodiment said first or second device being directly connected to the radio access network can have the functionality of a Master Device or Master Machine or Master Gateway for assisting other devices of the group which are not connectable or connected directly to the radio access network in gaining access or a connection to the radio access network. Such an embodiment can provide connectivity for devices that have no direct access to the radio access network compensating for poor network planning.

Within a further preferred embodiment said first or second device being directly connected to the radio access network can broadcast or announce a group ID via the wireless local network to other devices. Such a group ID can identify devices regarding an access to the radio access network for providing a very simple access to the radio access network.

The generation or definition of the group of devices depends on individual situations and parameters. Within a preferred embodiment the group can be formed on the basis of geographical information, a service requirement and/or a potential load limit. However, other parameters can be important for generating or defining the group. A characterizing feature of the group can be the possibility of a direct connection between all group members, i.e. devices.

Preferably, at least one of said devices can be a Machine Type Communication, MTC, device. Further preferred, all devices are MTC devices which can communicate with each other.

Within a concrete embodiment the wireless local network is an ad-hoc network, WLAN network or Bluetooth network. The radio access network can be preferably a LTE network. Generally, said at least two devices can be connectable to a radio access network via an access point. Such an access point can be an eNodeB, eNB.

After a movement or switch of the connection information the first device's prior connection between the access point and at least one further functional element of the radio access network can be maintained. Thus, a prior connection can be partially or fully maintained beginning from the access point in the direction of elements of the radio access network or further elements which are connectable to the radio access network. Such an at least one further functional element of the radio access network can be a Serving Gateway, SGW.

Based on the present invention it is possible to minimize the Mobility Management Entity, MME, NAS signalling and the S1 and radio bearer re-establishment procedures.

Important advancements and challenges that the present invention addresses are the following:

- Provides efficient bearer management for small data transmission, reducing potential congestion.
- Provides connectivity for MTC devices that have no direct macro cellular access compensating for poor network planning.
- Introduces a security method at master gateway, i.e. the MTC device that assists other devices with no macro cellular connectivity to gain access, can authorize other MTC devices to gain macro cellular access.

Further important aspects of embodiments of the present invention are listed as follows:

- 1) A method and system according to the invention can provide embodiments where two or more devices use the same radio access network and where the radio bearer/connection parameters from one device to the network can be used by another device, implemented by one or more features of

- a. Transferring state information from one device to another device.

- b. The state information is stored in a virtual device.
 - c. The virtual device runs on the hardware of the host device, e.g. could be like an application running on the host device.
 - d. The virtual device is the functionality that can be moved or activated within other host devices that belong to the same group.
 - e. The virtual device is linked to a specific radio bearer that can be shared by different devices.
- 2) A special group bearer is shared by devices within the group that have connectivity and the capability, in a way that only the active device can decode the signal of the downlink shared channel.
- a. Only one device can be active at one point in time.
- 3) Connectivity support of devices without direct macro-cellular network connectivity using alternatively ad hoc technology via the virtual device.

Embodiments of the present invention can provide the following advantages:

- 1) Efficient bearer management/sharing for supporting small data infrequent transmissions of a group of MTC devices.
- 2) Enabling the connectivity of the devices without macro cellular connectivity.
- 3) Coordination between master gateways and devices without direct macro-cellular connectivity regarding group bearer utilization, optionally provide smart schemes for battery consumption balancing of those devices.
- 4) Bearer configuration transmission/parameter via the wireless ad hoc network between the master gateways.

Further advantages can be summarized as follows:

Saves configuration signaling for bearer management over the cellular network, e.g. NAS messages such as service request, radio bearer setup, S1 bearer setup, RACH. Moving the MVM between devices with coverage enables the MME to provide smart schemes for battery consumption balancing of those devices.
5 Extension of coverage via wireless ad-hoc technology is possible.

There are several ways how to design and further develop the teaching of the present invention in an advantageous way. To this end it is to be referred to the patent claims subordinate to patent claim 1 on the one hand and to the following
10 explanation of preferred examples of embodiments of the invention, illustrated by the drawing on the other hand. In connection with the explanation of the preferred embodiments of the invention by the aid of the figure, generally preferred embodiments and further developments of the teaching will be explained. In the drawings

15 Fig. 1 is illustrating an overview of an embodiment of a network structure of the present invention,

20 Fig. 2 is illustrating an overview of a further embodiment of a network structure according to the invention,

Fig. 3 is illustrating an overview of a further embodiment of a network structure according to the invention,

25 Fig. 4 is illustrating an embodiment of a call flow of an embodiment of a method according to the invention,

Fig. 5 is illustrating a call flow of an embodiment of a method according to the invention and

30 Fig. 6 is illustrating an embodiment of a use case of energy saving of macro cells.

An embodiment of the present invention exploits the use of two diverse means of device connectivity based on: (i) a wireless Ad-Hoc network, device-to-device, e.g. WLAN, ZigBee, Bluetooth, LTE direct etc., which connects devices directly and (ii) a wireless network with macro coverage, e.g. 3GPP GERAN/UTRAN/E-UTRAN or 3GPP2 or IEEE 802.xy networks that provide Internet and core network access to devices within the access point range. Embodiments of the present invention explore the connectivity potential of both access technologies with the aim of improving the conventional bearer management scheme, introducing a virtual bearer, utilizing Network Function Virtualization, NFV, technology while enhancing coverage. Some devices within the coverage of a particular cell of an Access Point have sufficient while other have very poor or no coverage. Hence the present proposal optionally can provide a coverage solution under poor coverage conditions.

It is envisioned that the devices within the coverage of a cell may be connected to each other automatically/directly via the wireless Ad-Hoc network technology. The devices within the vicinity of the access point that receive good coverage may attach to the wireless network via the access point directly. Once such devices attach to the network, the Management Entity, e.g. MME in 3GPP networks, of the wireless network should provide a Group ID that associates each attached device to a particular predetermined group, which may be formed combining device location, Quality of Service, QoS, or other device service requirements. The way that groups are formed could be based on geographical information, service requirements, i.e. same QoS - bearer requirements, and on potential load limits, i.e. how much load it can be scheduled from a particular device set. The devices attached to the macro cellular network directly, then broadcast/announce the Group ID via the wireless Ad-Hoc network to devices without or with poor coverage that cannot attach to the wireless network directly. It should be noted, that the present invention focuses on a single hop transmission within the Ad-Hoc part and is not considering multi-hopping, i.e. more than two Ad-Hoc hops.

When a macro cellular directly attached device needs to transmit data or when an Ad-Hoc network connected device needs to transmit data via the macro cellular attached device, the device may use the Group ID as identity to obtain access.

The Management Entity can identify the Group ID and initiates the corresponding resource reservation, which accommodates the desired QoS from the Gateway to the device. The device that has direct macro cellular access configures itself as a Master GW, which can serve other devices connected via the wireless Ad-Hoc network and announces its capability in the wireless Ad-Hoc network. It should be noted that there may be only one device configured as a Master GW within one group. Fig. 1 provides an overview of the system described pointing out the major elements and their relation.

The Master GW may use a dedicated IP address for the communication and provides address/port number translation for the devices connected via the wireless Ad-Hoc network. The master device also is the one that uses the virtual bearer via an enabling mechanism that can shift bearer from one device to another, either by triggering certain pre-configured parameters or by copying the "bearer state". Once the Master GW has no further data to transmit, it will announce that it can give away its Master GW configuration. Other directly attached devices to the wireless network can request this capability from the current Master GW, which then shares/shifts the full configuration of the radio and network parameters to the new device. With that there is no need for further signaling to the wireless network.

The re-usage of the bearer assigned to the group minimizes the signaling for requesting resource allocation over the air interface of the wireless network and within the core network of the wireless network. Since the proposed scheme targets small data the time dedicated to each transmission is relatively short, hence the grouping phase bundles devices together in such a way to avoid introducing major transmission delays for other devices.

It is envisioned as another embodiment of the proposed scheme the use of the 3GPP mobile network as wireless network and 802.11 Wireless LAN as Ad-Hoc technology between the UEs or devices. Generally, it has to be noted that within this document the term "User Equipment, UE" is used synonymously with the term "device". The following describes in more detail how an E-UTRAN/EPC variant would be realized, but of course it is not limited to and would work also with other

wireless network technologies, such as e.g. GERAN/UTRAN or 3GPP2 or IEEE 802.xy networks. A Radio, S1 and S5/S8 bearer is shared among a specific device group for the communication among the attached UE group members within one cell, where only one UE of the group – Master GW Virtual Machine, MVM – can receive transmit at one point in time. All group members – UEs – are located in the same cell or within the vicinity of UEs that reside in the same cell, as shown in Fig. 2.

As a basic assumption all UEs that belong to a group are belonging to the same subscription and the group is preconfigured in the Home Subscriber Server, HSS, or dynamically assembled based on e.g. cell ID, location, subscription information etc.. This information is then downloaded to the MME e.g. at time of Attach with the subscription information. The MME may also provide a list for the sequence/pattern how the MVM is moved between and which UEs.

The MVM is acting as a virtual UE, reusing the hardware of the host UE. The MVM is the functionality that can be moved or activated within other UEs that belong to the same group. The MVM contains all relevant information or connection information about the relevant protocol states like radio, RRC, PDCP state etc., including information like RNTI, group keys, group IMSI, group TMSI, Group IP address etc. After moving the MVM to another UE, the UE may inform the eNB and the eNB may change the group RNTI or other information so that only the UE hosting the MVM is able to decode the Downlink Control Information, DCI. Timing advance may need to be readjusted when transferring the MVM to another UE due to the different geographic location and the resulting effects on the air interface.

Downlink data is DCI masked with RNTI, only the MVM can read the DCI and can do mapping of downlink packets to the respective UE connected via the Ad-Hoc network. Optionally the MVM could also instruct the respective UE to listen to the DCI with the group RNTI to read the data directly.

UEs in the vicinity of the wireless Ad-Hoc network may connect to each other directly by using a second interface via the Ad-hoc networking, e.g. WLAN, ZigBee, Bluetooth, LTE direct etc., shown in Fig. 2 and Fig. 3 respectively. All UEs

that are under LTE coverage will initially attach to the network. The MME may select one UE and sends corresponding Group information relevant for setting up the MVM, e.g. Group IMSI, Group Key, Group TMSI, etc., and for the group identification from the network, e.g. MME, HSS. Optionally the MME may send the group information to all UEs in the same group which are attaching to the network.

Only UEs with LTE coverage can configure themselves with the MVM, since they are the only ones to provide backhaul connectivity for the UEs without LTE coverage connected via the Ad-Hoc network. The UE that may be hosting the MVM would be preferably one with low mobility or simply being static. For sharing the radio bearer, not the same security context is used by the UEs instead the same group key allocated to the UEs who are authorized to join the group. All other devices without LTE Access are clients of the UE hosting the MVM. It is assumed that the communication between MVM and UEs without LTE coverage is secured by means of the wireless Ad-Hoc technology. UE A in Fig. 3 has no LTE coverage, wherein UE B has LTE coverage.

Fig. 4 shows the call flow for providing connectivity to group members without LTE coverage via the UE hosting the MVM:

1. UE B performs cell reselection and camps on the eNB.
2. UE B sends a message, e.g. ATTACH REQUEST or Tracking Area Update, TAU – in case it is already attached, and moved into a new cell – to the MME, the MME assembles the Group Information – e.g. Group IMSI, Group ID, Group Key, Group TMSI, etc. – based on subscriber profile, location etc.. The MME provides the Group Information to the UE B in the answer message, e.g. ATTACH ACCEPT/TAU ACCEPT. The MME may also provide a list for the sequence/pattern how the MVM is moved between and which UEs.
3. UE B configures the MVM and announces/broadcasts the Group ID via wireless Ad-Hoc technology. UEs without LTE coverage but within the vicinity of the Ad-Hoc network could learn in this way the Group ID. UEs

without LTE coverage can potentially belong to several groups, only UEs with LTE coverage can preferably belong to only one group, indicated in the ATTACH_ACCEPT by the MME. Step 3 and 4 could be also executed after the ATTACH of the MVM with step 6.

5

4. UE A finds and connects to UE B via wireless Ad-Hoc technology, i.e. UE A joins the group instead of being directly attached to the eNB.

10

5. The MVM of UE B sends an ATTACH REQUEST to the MME using the Group IMSI as identity. The MME detects the Group IMSI and checks whether no other host UE is currently attached using the Group IMSI, else it rejects the request. The MME sets up a bearer for this Group IMSI. The PGW assigns an IP address for the Group IMSI. The UE may indicate its identity, e.g. IMSI for more granular charging at the PGW as current user.

15

6. UE B announces that it is the UE hosting the MVM via wireless Ad-Hoc technology, so that all members in the group know the state of the token and the particular device that currently transmits/receives data via the group bearers.

20

7. UE A sends data to UE B via wireless Ad-Hoc technology; it could also send a request for sending data first at this point. UE A may include its identity, e.g. IMSI, IMEI, ICSI etc.

25

8. UE B performs Address/Port Translation for UE A. UE B may collect charging records for the UE A and provide them to the application server before releasing the token.

30

9. UE B sends data of UE A to the final destination via the group bearer to the PGW. UE B may include its own identity as well as the identity received from UE A for more granular charging or policy control at the PGW. The UE B could also wait until it received a preconfigured amount of data or even start the Group ATTACH until a certain amount of data is reached.

The UE hosting the MVM may distribute the EPS bearer context – security –, SRB, DRB, EEA0, APN, IP address information etc. to all the group members via the Ad-Hoc network and may generate a token for the usage of the Group Bearers. The token may be signed by the UE hosting the MVM so that the MME can recognize that the next UE hosting the MVM received the token from the current one. Then the UE hosting the MVM transmits its own data first before it may pass the token to other UEs that need to transmit data.

Fig. 5 shows how the MVM configuration is transferred from one UE to another one:

1. UE A is attached to the eNB and authenticated to the network, UE B is hosting the MVM.
2. UE B has no further data to transmit/receive. In case the MME already provided a sequence/pattern of UEs that would receive the MVM after their respective serving time, the UE B would send it directly to UE A as indicated in step 6, assuming here that UE A would be the next one on the list. In that case steps 3,4 & 5 are skipped.
3. UE B announces via the wireless Ad-Hoc technology that it can give away the MVM, i.e. it can release the token to another UE.
4. UE A wants to transmit data.
5. UE A announces via wireless Ad-Hoc technology that it wants the MVM from UE B, i.e. UE A requests the token from UE B.
6. UE B sends MVM to UE A, consisting of EPS bearer context – security –, SRB, DRB, EEA0, APN, IP address information, PDCCP state, RRC state etc. This information may be signed by the UE B so that the MME can see that the UE A received the token correctly from the current UE hosting the MVM.

7. UE A configures the MVM and announces that it is UE hosting the MVM via wireless Ad-Hoc technology, so that UEs without LTE coverage know that UE A is the new contact point for sending/receiving data.

5 8. There are two options that may be executed:

a. UE A may inform the eNB about the MVM move and the eNB may change the group RNTI or other information so that only the UE hosting the MVM is able to decode the DCI.

10 b. UE A may send a TAU to the MME using the Group ID as identity and it may include the signature of the UE B to let the MME know that it received the token from UE B. The UE A may indicate its IMSI for more granular charging at the PGW as current user. The MME
15 detects the Group ID and the change of UE that is using the group bearer.

9. UE A sends its data to the final destination via the group bearer and the PGW of the network.

20 If there is no data to transmit and no other UE is requesting the MVM, then the eNB will release the radio and S1 bearer, e.g. after a timer expired. The current UE hosting the MVM recognizes that the Group bearer is sent to idle mode and announces this via the Ad-Hoc network. This means that the next UE within LTE
25 coverage has to perform a Service Request to activate the Group Radio Bearer and S1 bearer again. The parameters on the radio and S1 side may change and would have to be announced again latest when the UE does not want to transmit any data anymore.

30 Fig. 6 depicts a use case of energy saving of macro cells, i.e. switching off macro cells in times of low premium traffic, e.g. at night.

In this scenario, the cell 7 is populated by a huge number of machine to machine, M2M, devices like sensors etc. that need to communicate to a server frequently. In

order to provide the required coverage, the above described method is used. For power saving reasons, the MME provides a smart pattern of moving the MVM between the devices at the cell border that still have coverage of the same eNB.

- 5 Many modifications and other embodiments of the invention set forth herein will come to mind the one skilled in the art to which the invention pertains having the benefit of the teachings presented in the foregoing description and the associated drawings. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments
- 10 are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

Claims

1. A method for providing device connectivity to a radio access network, wherein at least two devices are connectable or connected to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network with a possibility of a direct connection between said devices,
c h a r a c t e r i z e d in that connection information used for a connection between a first device of said at least two devices and the radio access network is provided for a second device of said at least two devices, so that the second device is enabled to connect to the radio access network based on said connection information.
2. A method according to claim 1, wherein the connection information comprises at least one connection parameter and/or at least one bearer parameter and/or at least one radio bearer parameter.
3. A method according to claim 1 or 2, wherein the connection information is provided for the second device, if a data transmission from the first device to the radio access network or vice versa is finished or if there is a data transmission pause of a definable length.
4. A method according to one of claims 1 to 3, wherein the connection information is moved or transmitted from said first device to said second device and/or activated within said second device.
5. A method according to one of claims 1 to 3, wherein the connection information is stored within a virtual device.
6. A method according to claim 5, wherein the virtual device runs on any hardware device or on the hardware of the first device or of the second device.

7. A method according to claim 5 or 6, wherein the virtual device is a functionality which can be moved between or activated within said devices that belong to said group.

5 8. A method according to one of claims 5 to 7, wherein the virtual device is linked to a specific radio bearer or bearer that can be shared by different devices.

9. A method according to one of claims 1 to 8, wherein only one of the first and second devices can be or is active at one point in time.

10

10. A method according to one of claims 1 to 9, wherein one or more of the devices of the group are not connectable or connected directly to the radio access network.

15

11. A method according to claim 10, wherein said first or second device being directly connected to the radio access network has the functionality of a Master Device or Master Machine or Master Gateway for assisting other devices of the group which are not connectable or connected directly to the radio access network in gaining access or a connection to the radio access network.

20

12. A method according to one of claims 1 to 11, wherein said first or second device being directly connected to the radio access network broadcasts or announces a group ID via the wireless local network to other devices.

25

13. A method according to one of claims 1 to 12, wherein the group is formed on the basis of geographical information, a service requirement and/or a potential load limit.

30

14. A method according to one of claims 1 to 13, wherein at least one of said devices is a Machine Type Communication, MTC, device.

15. A method according to one of claims 1 to 14, wherein the wireless local network is an ad-hoc network, WLAN network or Bluetooth network.

16. A method according to one of claims 1 to 15, wherein the radio access network is a LTE network.

17. A method according to one of claims 1 to 16, wherein said at least two devices are connectable to a radio access network via an access point.

18. A method according to claim 17, wherein the access point is an eNodeB, eNB.

19. A method according to one of claims 1 to 18, wherein the first device's prior connection between the access point and at least one further functional element of the radio access network is maintained.

20. A method according to claim 19, wherein said at least one further functional element of the radio access network is a Serving Gateway, SGW.

21. A network structure for providing device connectivity to a radio access network, preferably for carrying out the method according to any one of claims 1 to 20, wherein at least two devices are connectable or connected to a radio access network and wherein said at least two devices are members of a group of devices within a wireless local network with a possibility of a direct connection between said devices,

characterized by means for providing connection information used for a connection between a first device of said at least two devices and the radio access network for a second device of said at least two devices, so that the second device is enabled to connect to the radio access network based on said connection information.

1/5

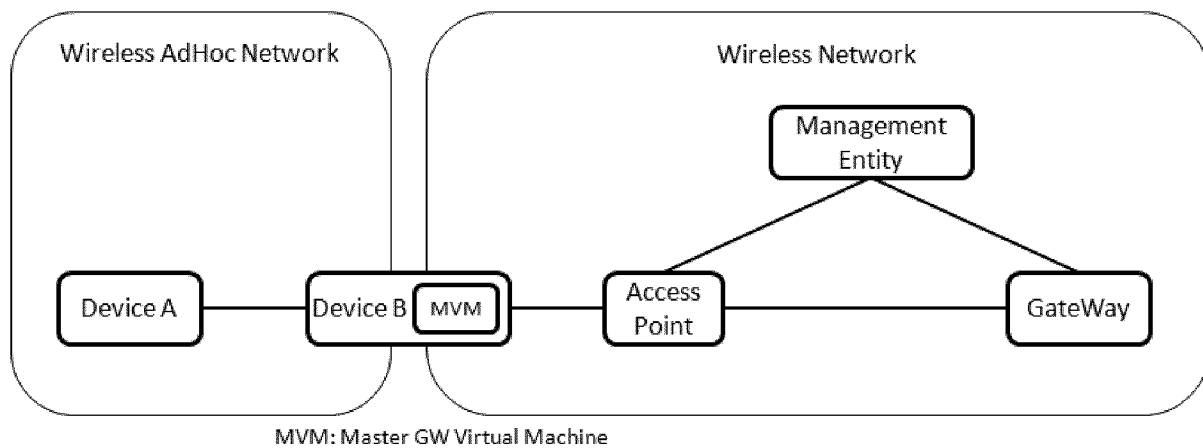


Fig. 1

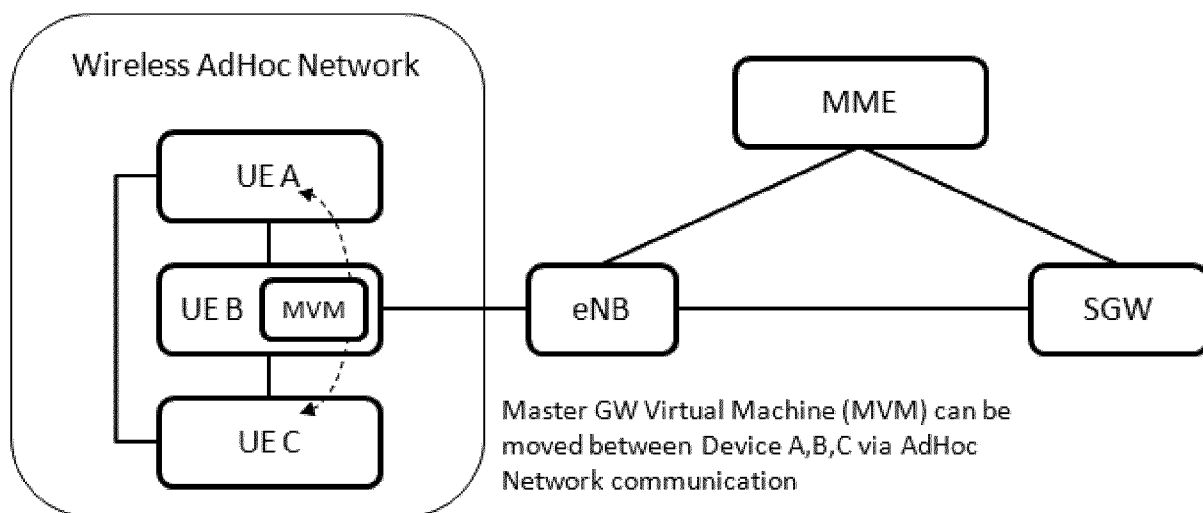


Fig. 2

2/5

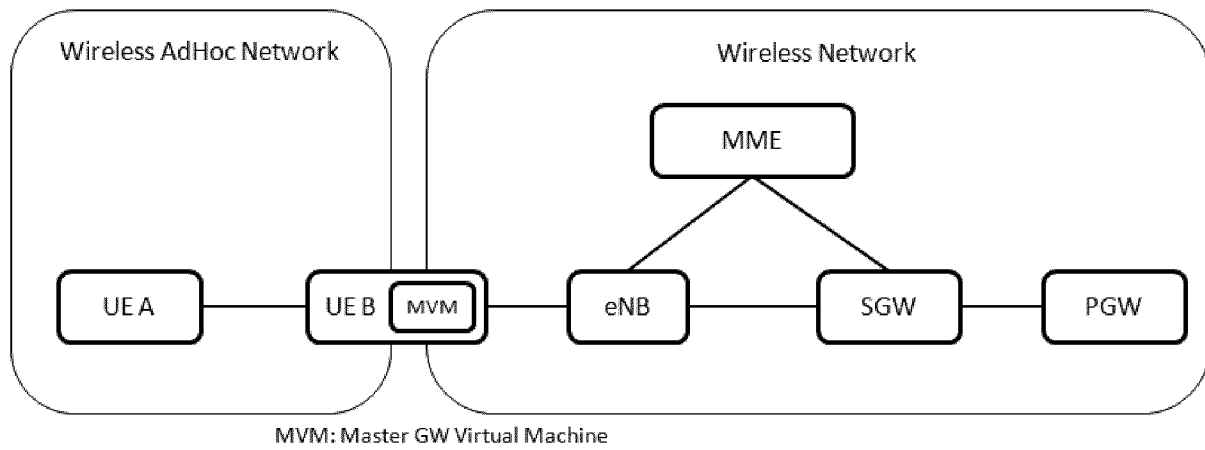


Fig. 3

3/5

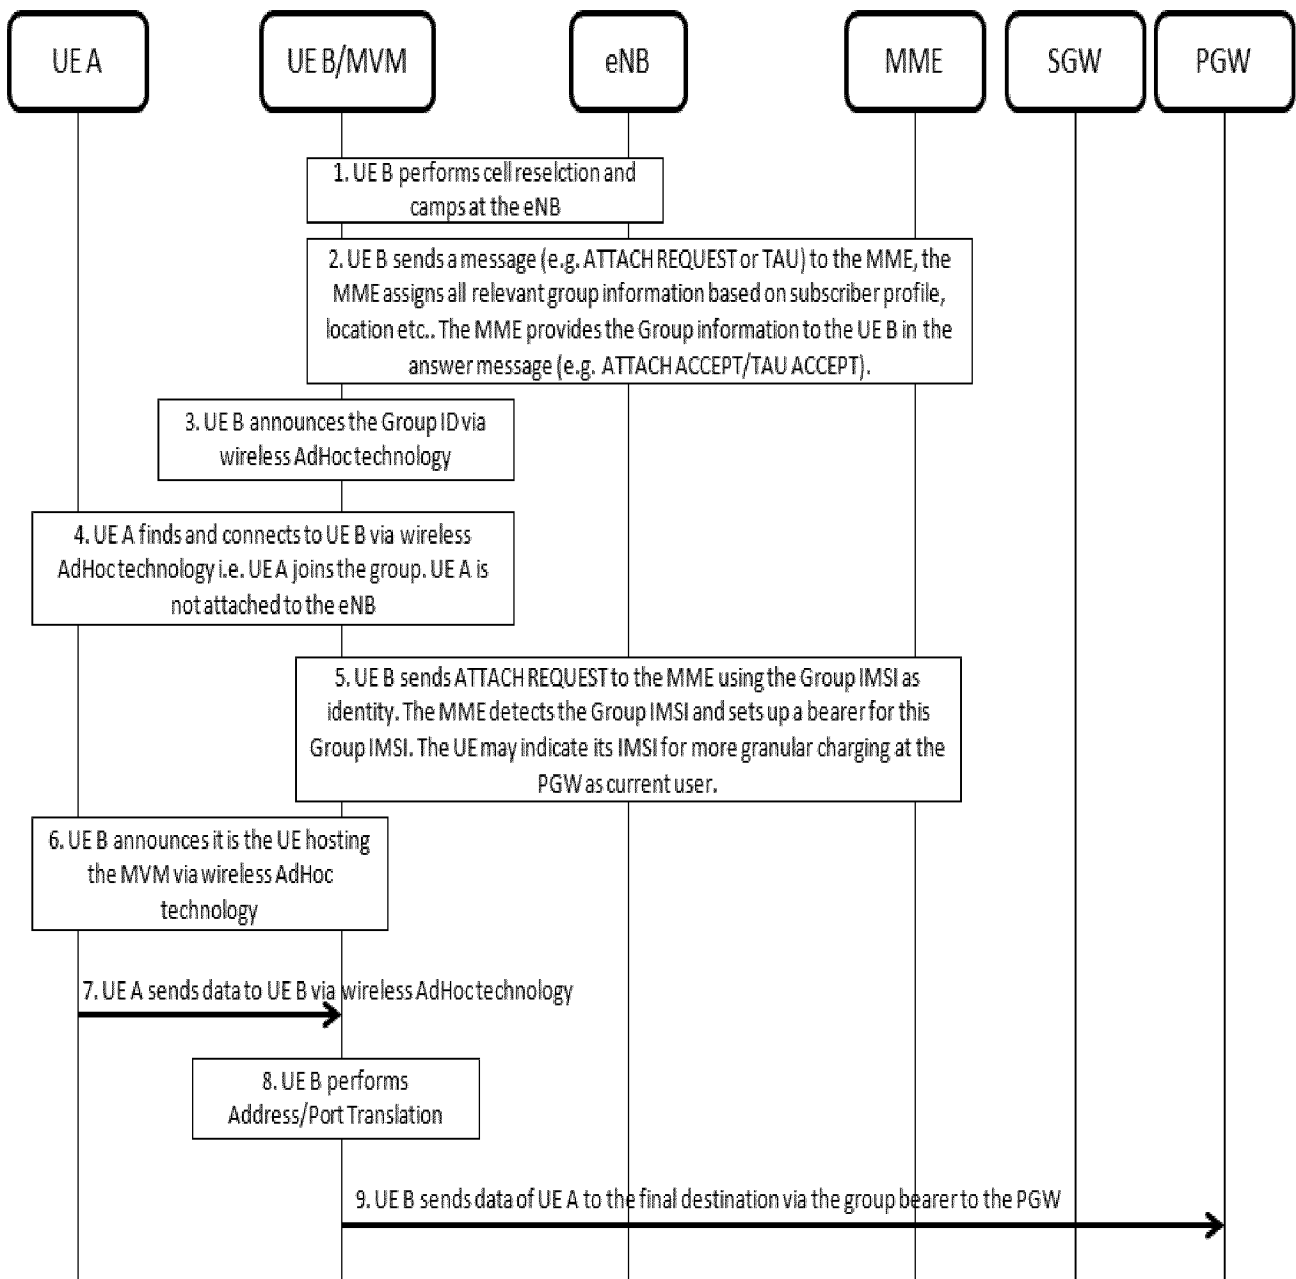


Fig. 4

4/5

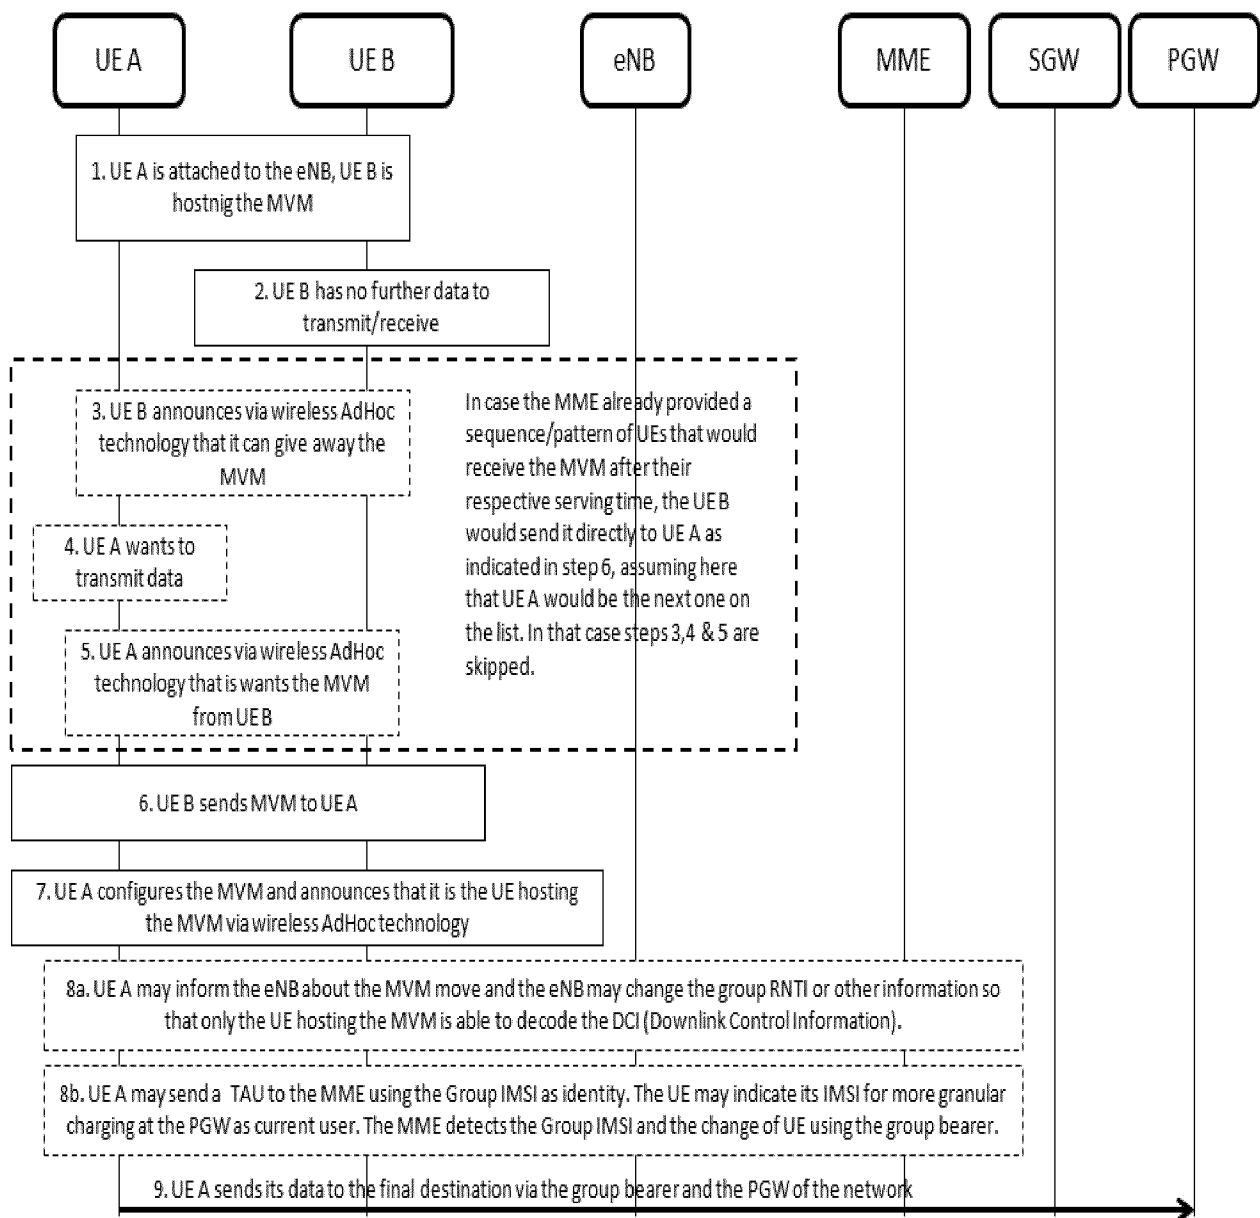


Fig. 5

5/5

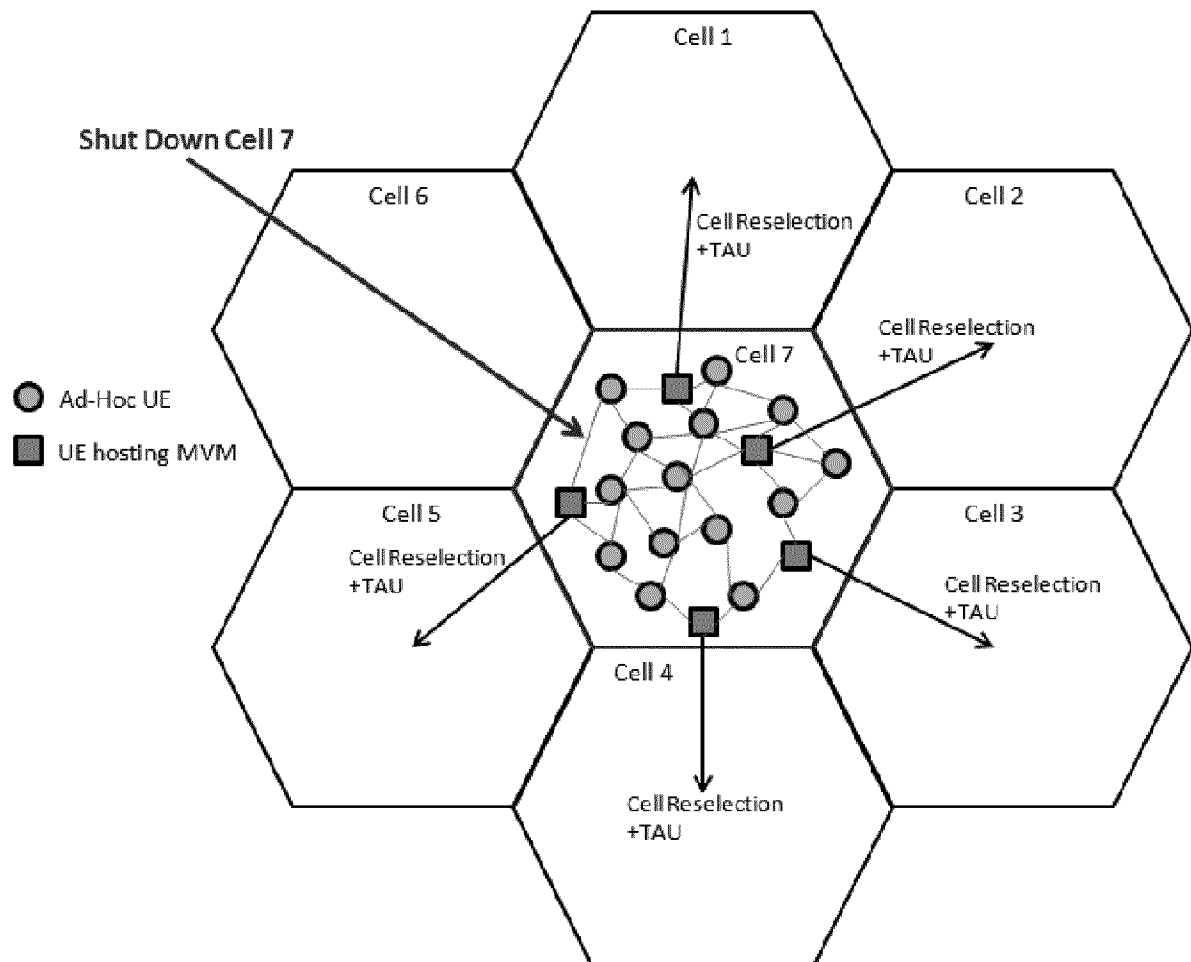


Fig. 6