




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> :		A1	(11) International Publication Number: <b>WO 96/39707</b>
<b>H01H 13/70, G02F 1/1343</b>			(43) International Publication Date: 12 December 1996 (12.12.96)
(21) International Application Number:	PCT/US96/08359		(81) Designated States: CA, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date:	3 June 1996 (03.06.96)		
(30) Priority Data:	08/466,167	6 June 1995 (06.06.95)	US
(71) Applicant:	RAYCHEM CORPORATION [US/US]; 300 Constitution Drive, Mail Stop 120/6600, Menlo Park, CA 94025-1164 (US).		
(72) Inventor:	JONES, Philip, J.; 1365 Cloud Avenue, Menlo Park, CA 94025 (US).		
(74) Agents:	CHAO, Yuan et al.; Raychem Corporation, Intellectual Property Law Dept., Mail Stop 120/6600, 300 Constitution Drive, Menlo Park, CA 94025-1164 (US).		

## (54) Title: FLEXIBLE ELECTRODE-BEARING ARTICLE

## (57) Abstract

An improved electrode for use in displays, including those of the touchscreen type, has a conductive polymeric material disposed over the electrode material at those regions where the electrode is subject to flexing in use, thereby putting the electrode material at risk of cracking. The conductive polymeric material bridges any cracks which may develop, thus providing electrical continuity.

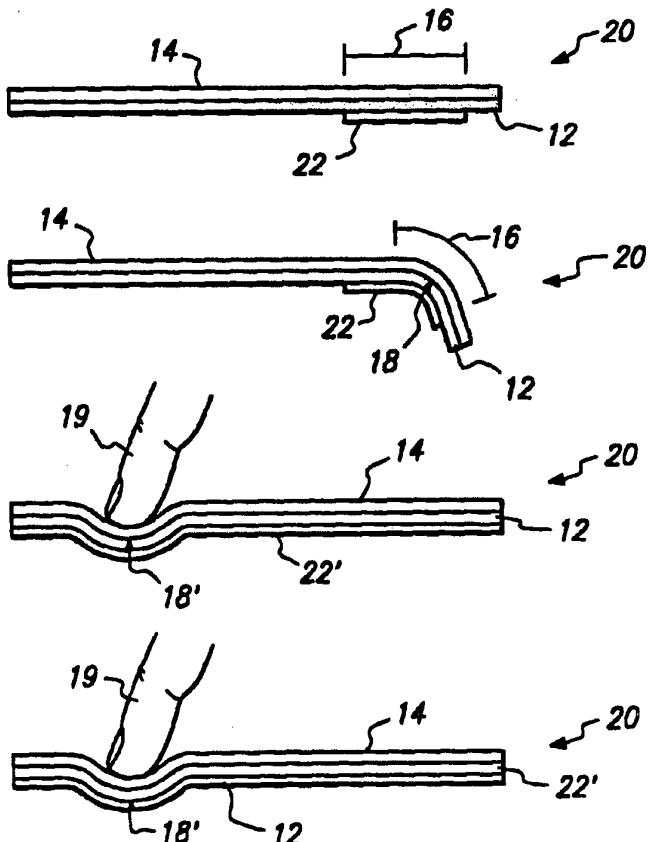

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

## FLEXIBLE ELECTRODE-BEARING ARTICLE

Technical Field of the Invention

This invention relates to a flexible electrode-bearing article for use in displays.

5

Background of the Invention

Many electronic devices have a display where information is visually output to an user. In devices having a "touchscreen" display, the display also serves as an information input function, the user inputting information by touching an appropriate area of the screen, for example one of the displayed 10 words "YES" or "NO" to answer a question posed by the device.

A combination frequently found in displays is a thin electrode material (e.g., indium tin oxide) supported by a polymer sheet (e.g., polyester). Either or both of the electrode material and the polymeric material may be transparent. 15 Such a combination and its preparation is generally described in Stoddard, US 4,838,656 (1989). In a non-touchscreen type display, such combination may form the front and/or rear electrodes for a liquid crystal display, of the direct view or projection type. Illustrative disclosures include Reamey et al., US 5,405,551 (1995); Jones, 5,398,081 (1995); Lau, US 5,395,550 (1995); Reamey, 20 US 5,335,101 (1994); Raychem, published PCT application WO 93/18431 (1993); Pearlman, US 4,992,201 (1991); and Parker, US 4,669,828 (1987). In a touchscreen display, such a combination may form the touch-operative part of the display. Illustrative touchscreen disclosures include Kent, US 5,220,136 (1993); Talmadge, Jr., et al., US 4,822,957 (1989); Talmadge, Jr., et al., US 25 4,777,328 (1988); Gibson et al., US 4,220,815 (1980); and Zenk et al., US 4,085,302 (1978). Further, such a combination may find use in membrane-type switches, either alone or in combination with a liquid crystal display. See, for example, Fergason et al., US 4,789,858 (1988). The disclosures of the aforementioned disclosures are incorporated herein by reference.

30

In either instance, the electrode/substrate combination may be subject to flexing in use. In a liquid crystal display, the combination may be bent in

order to fit into narrow spaces at the periphery of the display, for attachment to leads connecting the electrodes to drive circuitry. In a touchscreen display, the combination is depressed by the inputting touch, to create an electrical contact with an underlying conductor. The electrode material is relatively fragile and 5 may crack or break upon a particular severe flexure or upon repeated flexures, each of which individually is not particularly severe but which cumulatively cause the electrode material to fail. When the electrode material fails, electrical continuity is lost, leading to malfunction of the display.

#### Summary of the Invention

10 The present invention provides an improved electrode structure, in which the electrode material is protected against such failure. Accordingly there is provided an electrode-bearing article, comprising:

15 a supporting material;  
an electrode material disposed over said supporting material, including over a region of said supporting material which is subject to flexing in use, rendering said electrode material susceptible to cracking at such region; and  
20 a conductive polymeric material disposed in contact with said electrode material in said region of said supporting subject to flexing in use, said conductive polymeric material (a) comprising a blend of an intrinsically conducting polymer and a non-conductive polymer and (b) having a Young's modulus of less than 100 kg/cm<sup>2</sup>.

#### Brief Description of the Drawing(s)

25 FIG. 1a through 1c depict a prior art electrode material/supporting material combination and the problems associated therewith.

FIG. 2a through 2d depict an electrode material/supporting material combination in accordance with this invention.

#### Description of the Preferred Embodiments

30 FIG. 1a depicts a prior art electrode-bearing article 10, in which a thin layer of electrode material 12 is supported by supporting material 14. (The thickness of electrode material and supporting material 14 have been greatly

exaggerated for clarity.) Region 16 of article 10 is subject to flexing in use. FIG. 1b shows the same article, with region 16 flexed or bent, such as when making connection with leads to drive circuitry. Consequently, electrode material 12 can develop a crack or rupture 18, leading to an electrical discontinuity. FIG. 1c shows the same article, when used in a touchscreen display. Pressure is applied by an input means 19 (such as a finger, as shown, or a stylus, not shown), depressing the touched area to form an electrical contact with an underlying conductor (not shown). As a result of such depression, supporting material 14 and electrode material 12 are both flexed.

5      10      Because of an accumulation of flexes or a particular hard press by input means 19, a crack 18' may form, again leading to electrical discontinuity. In the instance of FIG. 1c compared to FIG. 1b, the region of article 10 subject to flexing in use is the entire touch-operative surface, as denoted by numeral 16'.

15      This problem is solved by the present invention, as illustrated in FIG. 2a through 2d, where numerals repeated from prior figures denote the same elements. FIG. 2a shows electrode-bearing article 20 having electrode material 12 supported by supporting material 14. Disposed over electrode material 12 in flexing region 16 is a thin layer of conductive polymeric material 22. When 20      article 20 is flexed at region 16 (FIG. 2b), electrode material 12 may develop a crack 18. But because conductive polymeric material 22 bridges the crack, electrical continuity is not lost and no malfunction of the associated device occurs. Instead of disposing conductive polymeric material 22 over electrode material 12 only at region 16, it may be more practical to dispose it over the 25      entire surface of electrode material 12, thereby avoiding the expense or difficulties associated with patterning. Further, such an approach provides flex protection at other regions of article 20, which are not anticipated to be flexed in use but which may be inadvertently flexed.

30      FIG. 2c illustrates the invention in the context of a touchscreen display. Again, the deflection imparted by input means 19 causes electrode material 12 to flex and crack, but the presence of conductive polymeric material 22' bridging crack 18' prevents loss of electrical continuity.

35      FIG. 2d depicts an alternative embodiment of the invention, in which the positions of electrode material 12 and conductive polymeric material 22' are

reversed, that is, conductive polymeric material 22' is interposed between supporting material 14 and electrode material 12. Those skilled in the art will appreciate that this alternative embodiment is also applicable to the invention as shown in FIG. 2a-2b.

5

The conductive polymeric material is a blend of an intrinsically conducting polymer (hereinafter "ICP") and a non-conductive polymer. The ICP provides the necessary electrical conductivity, while the non-conductive polymer provides the desirable mechanical properties. Such blends are 10 available from Al-Coat, of Ness-Ziona, Israel, in the form of a polyaniline-based spin-coatable solution. Disclosures of other suitable blends include Heeger et al., US 5,246,627 (1993); Cao et al., US 5,232,631 (1993); the Regents of University of California, published international application WO 91/11325 (1991); Andreatta et al., "Processing Of Conductive Polyaniline-UHMW 15 Polyethylene Blends From Solutions In Non-Polar Solvents," *Synth. Met.* 55, pp. 1017-22 (1993); Laakso et al., "Synthesis And Characterization Of Conducting Polymer Blends Of Poly(3-Alkylthiophenes)," *Synth. Met.* 37, pp. 145-50 (1990); and "Neste Conducting Polymers" (brochure), by Neste-Uniax New Technology Development (undated); the disclosures of which are 20 incorporated herein by reference.

ICP's are organic polymers which have an extensive, highly conjugated  $\pi$ -electron network in the backbone and which may be doped to impart or enhance the conductive properties. See, for example, MacDiarmid et al., *Front. 25 Polym. Res. [Proc. Int. Conf.]*, 1st, pp. 259-70 (1991) (Plenum, New York). Exemplary suitable ICP's include polypyrrole, polythiophene, polyacetylene, poly(phenylene vinylene), poly(phenylene sulfide), poly(*p*-phenylene), polyaniline, and poly(heterocycle vinylene). Polyaniline is preferred. A reference herein to an ICP is understood to subsume the substituted variants 30 thereof. For example "polypyrrole" subsumes poly(alkoxy pyrrole) and poly(alkyl pyrrole).

The non-conductive polymer's primary purpose is to provide a matrix for imparting the desired mechanical properties of the conductive polymeric 35 material, as ICP's themselves often are fragile and/or intractable materials. Suitable non-conductive polymers include polyolefins (e.g., polyethylene and

polypropylene), polystyrene, poly(vinyl chloride), acrylonitrile-butadiene-styrene copolymer (ABS), aliphatic polyamide (e.g., nylon), aromatic polyamide (e.g., poly(p-phenylene terephthalamide)), acrylic polymers, methacrylate polymers (e.g., poly(methyl methacrylate)), polycarbonate, polysiloxane, 5 polybutadiene, ethylene-vinyl acetate copolymer, elastomers (e.g. EPDM rubber), and fluoropolymers (e.g., polytetrafluoroethylene).

A wide range in the ratio of ICP to non-conductive polymer is permissible, depending on the desired balance of electrical and mechanical 10 properties. Preferably, the weight ratio of ICP to non-conductive polymer is between 1 to 99 and 99 to 1, with a ratio between 9 to 1 and 1 to 9 being more preferred.

The conductive polymeric material should not be too stiff, and therefore 15 its Young's modulus should be less than 100 kg/cm<sup>2</sup>, preferably less than 10 kg/cm<sup>2</sup>. Otherwise, it may reduce the flexibility of the electrode-bearing article or be itself subject to breaking during flexing. For similar considerations, the layer of conductive polymeric material should be as thin as possible while retaining the necessary minimum conductivity. Preferably the thickness is less 20 than 1  $\mu\text{m}$  thick, more preferably less than 0.2  $\mu\text{m}$  thick. As a general guide, the flexural stiffness of the article including the conductive polymeric material should be less than twice that of the corresponding article without the conductive polymeric material.

25 The conductive polymeric material can be applied as a solution over the electrode material by a variety of techniques, such as spin coating, dip coating, spray coating, knife coating, knife-over-roll coating, screen printing, and the like, followed by evaporation of the solvent.. The solvent can be an organic solvent such as decalin, tetrahydrofuran, chloroform, and toluene. Those 30 skilled in the art will understand that some adjustment of the viscosity and rheological properties of the solution may be needed to accommodate a particular application technique and that such adjustment can be effected by varying the molecular weight and/or concentration of the non-conductive polymer.

The electrode material can be any one of a number of metal oxides or metals which are depositable onto a substrate as a thin film by deposition techniques such as vacuum evaporation, sputtering, or chemical vapor deposition. Exemplary electrode materials include indium tin oxide ("ITO"), 5 indium oxide, tin oxide, antimony oxide, gold, gold-nickel alloy, and nickel. ITO is preferred.

The supporting material can be any one of a number of polymers available in sheet or film form, such as polyester (especially poly(ethylene 10 terephthalate) ("PET"), available commercially under the tradename Mylar), poly(vinyl chloride), poly(ether sulfone), polycarbonate, polyimide, and poly(ether imide).

As noted above, the conductive polymeric material can be disposed 15 substantially over the entire surface of the electrode material or of the electrode-bearing article, to avoid the process difficulties and expense associated with patterning. In such instances, the conductive polymeric material should have a high enough surface resistance (low enough surface conductance) so as not to interfere with the operation of the electrode, i.e., 20 preferably greater than 100 ohm/square and more preferably greater than 1000 ohm/square.

In a preferred embodiment, the conductive polymeric material, the electrode material, and the supporting material all are substantially 25 transparent, permitting viewing of underlying displayed information or the transmission of light from a backlighting source. Such a particularly preferred combination is polyaniline, ITO, and PET. PET sheets pre-coated with ITO are available commercially from a number of vendors. Such sheets can be etched 30 to provide the desired ITO electrode pattern, and then the polyaniline can be deposited thereon. It is of course understood that where transparency is not a functional requirement (for example, in ITO bus lines), then none of the three elements needs to be transparent.

By way of illustration and not of limitation of my invention, the 35 following experiments were performed. Strips (3 x 0.5 inches) were cut from a 0.007 inch thick sheet of ITO-coated polyester from Dynapro to provide five

control samples (hereinafter referred to as CONTROL 1-5). Squares (3 x 3 inches) of the same polyester were coated with a polyaniline-based conductive polymeric material on the ITO side by Al-Coat, Israel. The coated squares were cut into 3 x 0.5 inch strips to provide samples according to the invention 5 (hereinafter referred to as INVENTION 1-3).

In a folding test, strips were folded by hand and creased between forefinger and thumb, with the conductive side on the outside of the crease, and then unfolded. Resistance was measured with a digital voltmeter with contacts 10 made to the strips close to the center of the strip ends. The results are provided in TABLE I. They show that the resistance after folding of the CONTROL samples is greater than that of the INVENTION samples by about one order of magnitude or more.

TABLE I Hand Creasing Test		
Sample	Resistance (ohms)	
	Before Folding	After Folding
CONTROL 1	283	$35 \times 10^6$
CONTROL 2	262	$34 \times 10^6$
CONTROL 3	298	$52 \times 10^6$
INVENTION 1	321	$1.46 \times 10^6$
INVENTION 2	285	$3.70 \times 10^6$

15

In a second test, samples were rolled around a 5/8 inch steel cylinder mandrel. Resistances were measured after each rolling and are provided in TABLE II. The results show that the sample of this invention withstands 20 rolls without developing any significant increase in resistance, compared to the CONTROL samples, whose resistances increased by at least one order of magnitude within 10 rolls.

TABLE II  
Mandrel Rolling Test

Roll Number	Resistance (ohms)		
	CONTROL 4	CONTROL 5	INVENTION 3
0	267	283	276
1	260	290	284
2	267	292	286
3	345	335	306
4	535	374	316
5	880	452	310
6	2,020	808	326
7	2,150	1,400	326
8	2,620	2,810	331
9	2,950	2,980	347
10	4,780	4,330	370

After ten rolls, the CONTROL and INVENTION samples were subjected to the crease test as described above. The results are provided in TABLE III. Again, the INVENTION sample was clearly superior, having a final resistance  
5 which was lower by about two orders of magnitude.

TABLE III  
Hand Creasing Test After Ten Rolls

Sample	Resistance (ohms)	
	Before Folding	After Folding
CONTROL 4	4,780	$>300 \times 10^6$
CONTROL 5	4,330	$>300 \times 10^6$
INVENTION 3	370	$2.70 \times 10^6$

The foregoing detailed description of the invention includes passages which are chiefly or exclusively concerned with particular parts or aspects of  
10 the invention. It is to be understood that this is for clarity and convenience, that a particular feature may be relevant in more than just passage in which it is disclosed, and that the disclosure herein includes all the appropriate

combinations of information found in the different passages. Similarly, although the various figures and descriptions thereof relate to specific embodiments of the invention, it is to be understood that where a specific feature is disclosed in the context of a particular figure, such feature can also  
5 be used, to the extent appropriate, in the context of another figure, in combination with another feature, or in the invention in general.

Claims

What is claimed is:

1. An electrode-bearing article, comprising  
5 a supporting material; an electrode material disposed over said supporting material, including over a region of said supporting material which is subject to flexing in use, rendering said electrode material susceptible to cracking at such region; and  
10 a conductive polymeric material disposed in contact with said electrode material in said region of said supporting subject to flexing in use, said conductive polymeric material (a) comprising a blend of an intrinsically conducting polymer and a non-conductive polymer and (b) having a Young's modulus of less than 100 kg/cm<sup>2</sup>.  
15
2. An electrode-bearing article according to claim 1, wherein said intrinsically conducting polymer is selected from the group consisting of polypyrrole, polythiophene, polyacetylene, poly(phenylene vinylene), poly(phenylene sulfide), poly(*p*-phenylene), polyaniline, and poly(heterocycle vinylene).  
20
3. An electrode-bearing article according to claim 2, wherein said intrinsically conducting polymer is polyaniline.
- 25 4. An electrode-bearing article according to claim 1, wherein said non-conductive polymer is selected from the group consisting of polyolefins, polystyrene, poly(vinyl chloride), acrylonitrile-butadiene-styrene copolymer, aliphatic polyamide, aromatic polyamide, acrylic polymers, methacrylate polymers, polycarbonate, polysiloxane, polybutadiene, ethylene-vinyl acetate copolymer, elastomers, and fluoropolymers.  
30
5. An electrode-bearing article according to claim 1, wherein the conductive polymeric material has a Young's modulus of less than 10 kg/cm<sup>2</sup>.
- 35 6. An electrode-bearing article according to claim 1, wherein the conductive polymeric material has a thickness of less than 1  $\mu$ m.

7. An electrode-bearing article according to claim 1, wherein the electrode-bearing article has a flexural stiffness which is less than twice that of the corresponding article without the conductive polymeric material.

5

8. An electrode-bearing article according to claim 1, wherein said electrode material is selected from the group consisting of indium tin oxide, indium oxide, tin oxide, antimony oxide, gold, gold-nickel alloy, and nickel

10 9. An electrode-bearing article according to claim 1, wherein said supporting material is selected from the group consisting of polyester, poly(vinyl chloride), poly(ether sulfone), polycarbonate, polyimide, and poly(ether imide).

15 10. An electrode-bearing article according to claim 1, wherein said supporting material is poly(ethylene terephthalate), said electrode material is indium tin oxide, and said intrinsically conducting polymer is polyaniline.

20 11. An electrode-bearing article according to claim 1, wherein said conductive polymeric material is disposed substantially over the entire surface of the electrode material.

25 12. An electrode-bearing article according to claim 1, wherein said conductive polymeric material has a surface resistivity greater than 100 ohm/square.


13. An electrode-bearing article according to claim 1, wherein said conductive polymeric material is disposed on the surface of said electrode material away from said supporting material.

30


14. An electrode-bearing article according to claim 1, wherein said conductive polymeric material is disposed between said electrode material and said supporting material.

15. An electrode-bearing article according to claim 1, wherein the weight ratio of intrinsically conducting polymer to non-conductive polymer is between 99 to 1 and 1 to 99.


**FIG. 1a**  
(PRIOR ART)

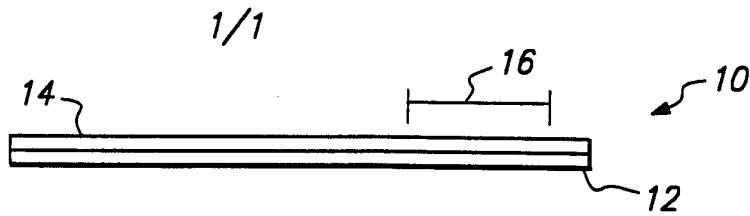


**FIG. 1b**  
(PRIOR ART)

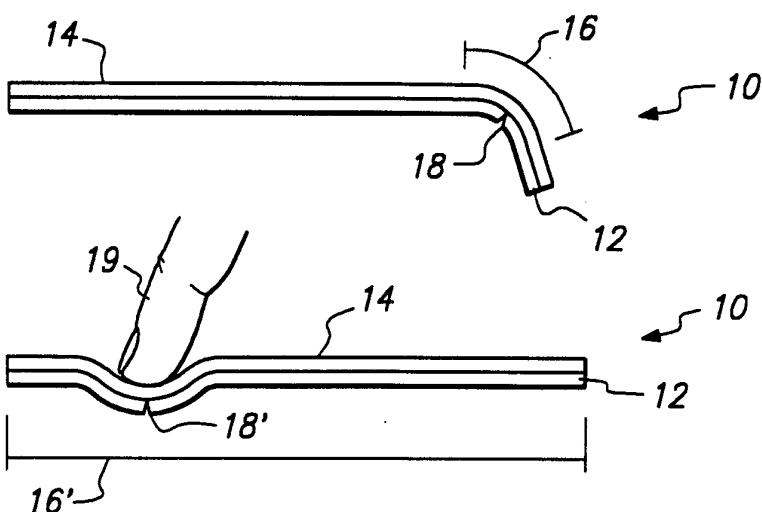


**FIG. 1c**  
(PRIOR ART)

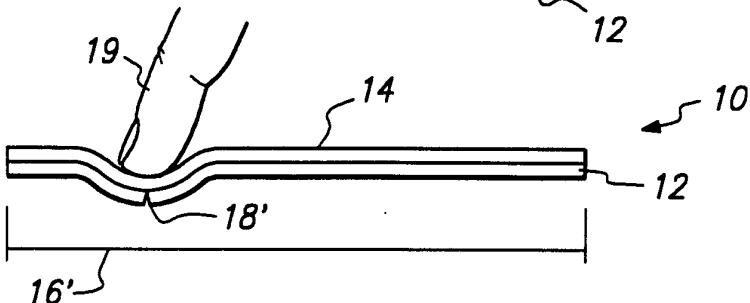


**FIG. 2a**

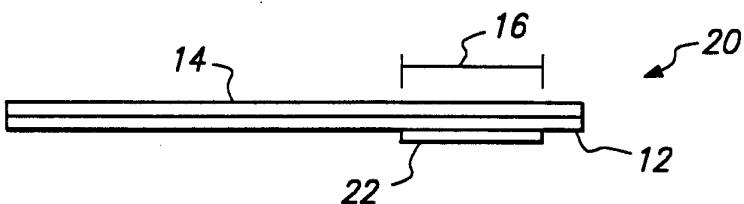


**FIG. 2b**

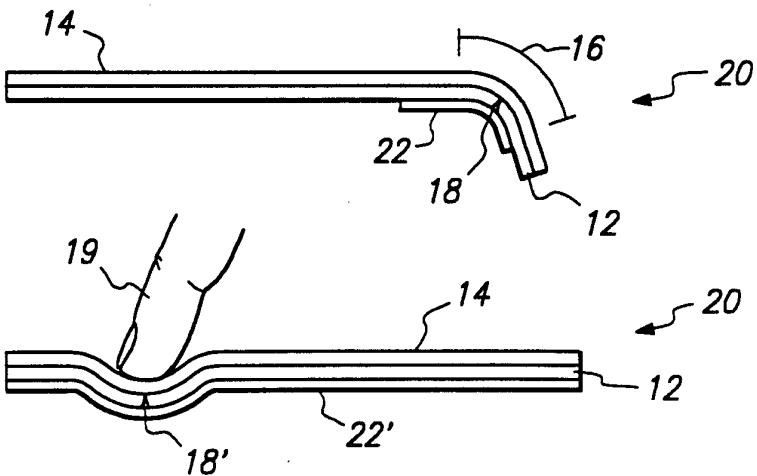

**FIG. 2c**

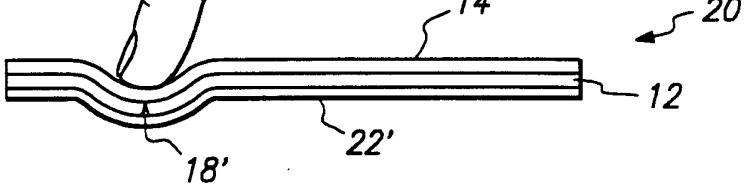

**FIG. 2d**

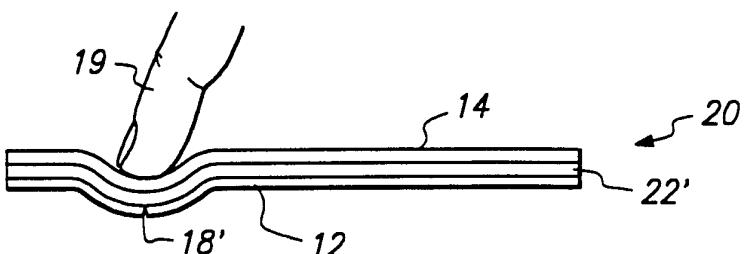

# INTERNATIONAL SEARCH REPORT

Inte:  onal Application No

PCT/US 96/08359

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 6 H01H13/70 G02F1/1343

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 6 H01H G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,5 193 668 (FUKUCHI SHUNSEI ET AL) 16 March 1993 see column 5, line 51 - line 64 ---	1-4, 8-13,15
Y	GB,A,2 278 204 (SHARP KK) 23 November 1994 see page 21 see page 27, last paragraph - page 29, paragraph 2 ---	1-4, 8-13,15
Y	EP,A,0 400 953 (SEIKO EPSON CORP) 5 December 1990 see column 2, line 33 - column 3, line 9 ---	1-4, 8-13,15 -/-

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

\* Special categories of cited documents :

- \*'A' document defining the general state of the art which is not considered to be of particular relevance
- \*'E' earlier document but published on or after the international filing date
- \*'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*'O' document referring to an oral disclosure, use, exhibition or other means
- \*'P' document published prior to the international filing date but later than the priority date claimed

\*'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*'&' document member of the same patent family

1

Date of the actual completion of the international search

8 October 1996

Date of mailing of the international search report

11. 10. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.  
Fax (+ 31-70) 340-3016

Authorized officer

Libberecht, L

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/08359

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	APPLIED PHYSICS LETTERS, vol. 60, no. 22, 1 June 1992, pages 2711-2713, XP000269942 YONG CAO ET AL: "SOLUTION-CAST FILMS OF POLYANILINE: OPTICAL-QUALITY TRANSPARENT ELECTRODES" see abstract ---	1-4, 8-13,15
Y	MACROMOLECULES, vol. 20, no. 4, April 1987, EASTON US, pages 749-753, XP002015326 O.NIWA ET AL: "Polypyrrole-Based Conducting Polymer Alloy Films: Physical Properties and Film Morphology" see abstract ---	1-4, 8-13,15
Y	EP,A,0 128 529 (BASF AG) 19 December 1984 see abstract ---	1-4, 8-13,15
A	PATENT ABSTRACTS OF JAPAN vol. 017, no. 412 (P-1583), 30 July 1993 & JP,A,05 080068 (MATSUSHITA ELECTRIC WORKS LTD), 30 March 1993, see abstract ---	1
A	PATENT ABSTRACTS OF JAPAN vol. 94, no. 011 & JP,A,06 316070 (SEIKO EPSON CORP), 15 November 1994, see abstract ---	1
A	SYNTHETIC METALS, vol. 55, 1993, pages 1017-1022, XP000602798 A.ANDREATTA ET AL: "Processing of Conductive Polyaniline-UHMW Polyethylene Blends from Solutions in Non-Polar Solvents" cited in the application see abstract ---	1
A	SYNTHETIC METALS, vol. 37, 1990, pages 145-150, XP000602722 J.LAAKSO ET AL: "Synthesis and Characterization of Conducting Polymer Blends of Poly(3-Alkylthiophenes)" cited in the application see abstract -----	1

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No

PCT/US 96/08359

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US-A-5193668	16-03-93	JP-A-	4012421	17-01-92
GB-A-2278204	23-11-94	JP-A- US-A-	6332014 5517343	02-12-94 14-05-96
EP-A-0400953	05-12-90	JP-A- JP-A- JP-A- JP-A- US-A-	3003026 3003027 3003028 3156818 5179460	09-01-91 09-01-91 09-01-91 04-07-91 12-01-93
EP-A-0128529	19-12-84	DE-A- JP-A-	3321071 60009016	13-12-84 18-01-85