

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
12 February 2009 (12.02.2009)

PCT

(10) International Publication Number  
**WO 2009/019300 A1**

- (51) International Patent Classification:  
*H04L 12/46* (2006.01)
- (21) International Application Number:  
PCT/EP2008/060384
- (22) International Filing Date: 7 August 2008 (07.08.2008)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
07114014.9 8 August 2007 (08.08.2007) EP
- (71) Applicant (for all designated States except US): **Packet-Front Systems AB** [SE/SE]; Isafjordsgatan 35, S-164 40 Kista (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ÖMAN, Andreas** [SE/SE]; Emågatan 17, S-12846 Bagarmossen (SE).
- (74) Agent: **HYDEN, Martin**; Rouse Patents, 1st Floor, 228-240 Banbury Road, Oxford Oxfordshire OX2 7BY (GB).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(54) Title: VLAN DATA FRAMING AND TRANSMISSION

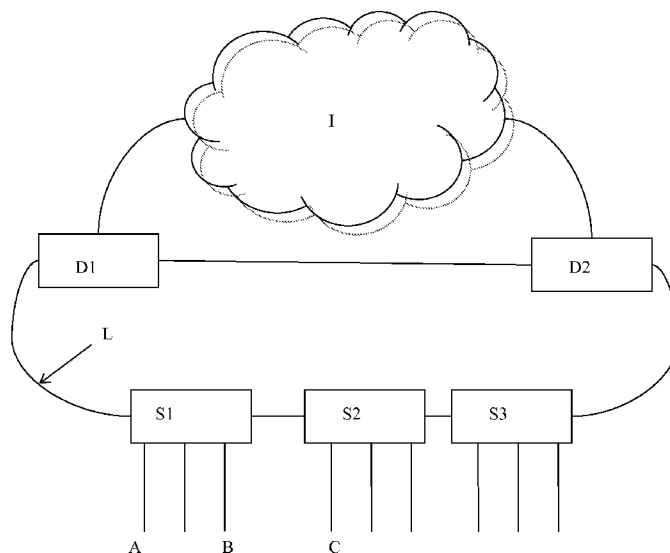


Figure 1

(57) Abstract: A method of framing data for transmission to or from one of a number of users connected to a VLAN data network, comprising dividing the data into frames including a header and a payload, the header comprising a portion of one of two selectable values assigned according to whether the data is to be transmitted from or to a user, wherein the header comprises a VLAN tag including a Tag Protocol ID (TPID) portion and a Tag Control Information (TCI) portion, a first TPID value being assigned to data to be transmitted from the user and a second, different, TPID value being assigned to data to be transmitted to a user.

WO 2009/019300 A1

**Description****VLAN Data Framing and Transmission****Technical field**

[0001] This invention relates to methods for framing data for transmission in VLAN data networks, and to methods of transmitting such data in such networks.

**Background art**

[0002] A virtual local area network, commonly known as a vLAN or as a VLAN, is a way of creating one or more independent logical networks within a physical network. A VLAN consists of a network of computers that behave as if connected to the same link layer network, even though they may actually be physically connected to different segments of a LAN. VLANs are configured through software rather than hardware, making them extremely flexible. One advantage of VLANs emerges when physically moving a computer to another location: it can stay on the same VLAN without the need for any hardware reconfiguration. Several VLANs can co-exist within a single physical network.

[0003] VLANs operate at the layer 2 (data link layer) of the OSI model. Users in a VLAN connect to the network via one or more layer 2 switches. These in turn connect to the wider network via distribution routers (or equivalent switches). Because the users in a given VLAN are logically on the same network, it is theoretically possible for there to be direct user-to-user communication without the need for routing or for the communication to pass through devices such as the distribution router with security function (e.g. firewalls). Such a communication path is inherently insecure and as such can be undesirable in networks to which the public have access.

[0004] The primary protocol currently used in configuring VLANs is IEEE 802.1Q, which describes how traffic on a single physical network can be partitioned into VLANs by tagging each frame or packet with extra bytes to denote the virtual network to which the packet belongs. For Ethernet frames using Ethernet II framing, 802.1Q sets the EtherType value in the Ethernet header to Tag Protocol ID (TPID) 0x8100, identifying this frame as an 802.1Q frame. It then inserts extra bytes of Tag Control Information (TCI) after the TPID, followed by other bytes containing the frame's original

EtherType. The TCI includes a VLAN ID field (VID) indicating the particular VLAN to which a frame belongs. Together the TPID and TCI are called the VLAN Tag.

- [0005] Previously, direct user-to-user communication has been prevented by configuring the switches such that data originating with a user (upstream traffic) is assigned a first VID and that data with this VID is not transmitted directly to a user, only to a distribution router. The distribution routers are configured to assign a second, different VID to data for transmission to a user connected to a VLAN (downstream traffic). Essentially, the system creates two VLANs: one for upstream traffic, and one for downstream traffic. For example, EP1039698 discloses method and apparatus for grouping a node in multiple VLANs using a port based VLAN grouping paradigm. A unique frame tagging approach is used for explicit VLAN identification, wherein a packet transmitted by a node is explicitly associated one of multiple VLANs by way of the tag protocol identifier/virtual LAN identifier combination in the tag header inserted in the packet.
- [0006] The use of the split VLAN described above leads to an asymmetric traffic flow. Where devices in the physical network have to interact with the data for routing, this is not necessarily a problem. However, problems can occur for physical devices that merely pass traffic on. It is therefore an object of the invention to provide a method of data framing that avoids the need to provide a split VLAN.

#### **Disclosure of the invention**

- [0007] This invention provides a method of framing data for transmission to or from one of a number of users connected to a VLAN data network, comprising dividing the data into frames including a header and a payload, the header comprising a portion of one of two selectable values assigned according to whether the data is to be transmitted from or to a user, wherein the header comprises a VLAN tag including a Tag Protocol ID (TPID) portion and a Tag Control Information (TCI) portion, a first TPID value being assigned to data to be transmitted from the user and a second, different, TPID value being assigned to data to be transmitted to a user.

- [0008] The TCI portion typically includes a VLAN ID field specifying the VLAN to which the frame belongs.
- [0009] By assigning the TPID value to indicate upstream or downstream traffic, it is possible to assign the same VLAN ID to frames for transmission to or from the same user in a specific VLAN.
- [0010] In one embodiment, the first TPID value is assigned for data transmitted from a user at a layer 2 switch to which the user is connected (upstream traffic) and the second TPID value is assigned for data transmitted to a user at a distribution router forming part of the network to which the user is connected downstream traffic.
- [0011] The invention also provides a method of communicating data between first and second users connected via a VLAN, comprising:
- sending data from the first user to a layer 2 switch to which it is connected for delivery to the second user;
  - framing the data according to a method as defined above so as to assign a first TPID value indicative of data being sent from a user;
  - forwarding the framed data to a distribution router in the network comprising the VLAN;
  - re-framing the data at a distribution router in the network comprising the VLAN according to a method as claimed in any preceding claim so as to assign a second TPID value indicative of data being sent to a user;
  - forwarding the re-framed data to a layer 2 switch to which the second user is connected; and
  - transmitting the data to the second user.
- [0012] The first and second users can be connected to the same layer 2 switch or to different layer 2 switches.
- [0013] Other changes can be made within the scope of the invention.

#### **Brief description of the drawings**

- [0014] Figure 1 shows a schematic of an embodiment of a VLAN system to which the invention applies.

#### **Mode(s) for carrying out the invention**

- [0015] In a simplified schematic data network shown in Figure 1, a number of users A, B, C, ... (i.e. computers) are connected to a network via respective layer 2 switches S1, S2, S3 etc. The layer 2 switches S are

connected to each other and to a network core (Internet) I via distribution routers D1, D2 to form a loop L. The distribution routers D1, D2 are also connected to each other. As will be appreciated, the actual physical structure of the network may be much more complex than shown here but the overall functional relationship between the various parts remains essentially the same.

[0016] A VLAN V is defined to include users A, B and C. As can be seen, user C is connected to a different layer 2 switch (S2) to users A and B (S1). Other users are either part of other VLANs or are directly connected to the network on their own.

[0017] Data for transmission over the VLAN includes a frame header which is attached to a data payload and provides information to allow its transmission on the network and delivery to the intended address. The header H will include a destination address (i.e. where the data is to be sent) portion DST, a source address (i.e. where the data originated) portion SRC, and an EtherType portion ET. For Ethernet frames using Ethernet II framing, 802.1Q sets the EtherType value in the Ethernet header to Tag Protocol ID (TPID) 0x8100, identifying this frame as an 802.1Q frame. It then inserts extra bytes of Tag Control Information (TCI) after the TPID, followed by other bytes containing the frame's original EtherType. The TCI includes a VLAN ID field (VID) indicating the particular VLAN to which a frame belongs. Together the TPID and TCI are called the VLAN Tag. The payload P follows this header. The basic structure of the header is:

[DST][SRC][ET(TPID=0x8100)(TCI(VID))][other header values].

[0018] In order to prevent direct communication via the layer 2 switch(es) using the conventional technique discussed above, the first layer 2 switch assigns a first VID for upstream traffic. Any layer 2 switch receiving this data frame will only pass it upstream and so prevents direct communication with another user (who would be downstream of the switch).

[0019] When the data frame reaches the distribution router D upstream of the desired recipient, the router D amends the header to have a new VID indicative of downstream traffic. Thus, when the frame reaches the layer 2

switch S, it is passed on to the correct user according to the destination address.

[0020] As is discussed above, this use of two VIDs means that traffic is essentially running on two separate VLANs, but with asymmetric traffic flows. This invention provides a technique by which a single, logical VLAN can accommodate both upstream and downstream traffic. The invention allows assignment of different TPID values according to whether traffic is upstream or downstream. For example, an upstream header applied at the layer 2 switch can have the following structure:

[DST][SRC][ET(TPID=0x8100)(TCI(VID))][other header values]

while the downstream header applied at the distribution router can have the structure:

[DST][SRC][ET(TPID=0x9100)(TCI(VID))][other header values].

[0021] In both cases, the same VID is used, meaning that the assigned VLAN has both upstream and downstream traffic, unlike the asymmetric traffic flow of the conventional technique described above.

[0022] In the case of the present invention, the layer 2 switches respond to the different TPID values in a similar way to the different VID values of the conventional technique. Consequently, a layer 2 switch receiving a frame with a TPID value indicating upstream traffic (assigned by the originating layer 2 switch) will only forward the frame on towards the distribution router, whereas a layer 2 switch receiving a frame with a TPID value indicating downstream traffic (assigned by the distribution router) is permitted to pass this on to the addressed, directly-connected user (DST address).

[0023] Since the same VID (VLAN) is used for both upstream and downstream traffic, the number of separately available VLANS for a given system is twice what it would be using the conventional technique, thus providing greater capacity and flexibility.

[0024] Other changes can be made while remaining within the scope of the invention.

## Claims

1. A method of framing data for transmission to or from one of a number of users connected to a VLAN data network, comprising:
  - sending data from a first user to a first layer 2 switch;
  - dividing the data in the first layer 2 switch into frames including a header and a payload, the header comprising a portion of one of two selectable values assigned according to whether the data is to be transmitted from or to a user, wherein the header comprises a VLAN tag including a Tag Protocol ID (TPID) portion and a Tag Control Information (TCI) portion, a first TPID value being assigned in the first layer 2 switch to be indicative of data being transmitted from the user;
  - forwarding the framed data from the first layer 2 switch to a distribution router comprising the VLAN;
  - reframing the data in the distribution router so as to assign a second, different, TPID value which is indicative of data being transmitted to a second user;
  - forwarding the re-framed data from the distribution router to a second layer 2 switch to which the second user is connected; and
  - transmitting the data from the second layer 2 switch to the second user.
2. A method as claimed in claim 1, wherein the TCI portion includes a VLAN ID field specifying the VLAN to which the frame belongs.
3. A method as claimed in claim 1 or 2, comprising assigning the same VLAN ID to frames for transmission to or from the same user in a specific VLAN.
4. A method as claimed in any preceding claim, comprising assigning the first EtherType value for data transmitted from a user at a layer 2 switch to which the user is connected.
5. A method as claimed in any preceding claim comprising assigning the second EtherType value for data transmitted to a user at a distribution router forming part of the network to which the user is connected.
6. A method as claimed in claim 1, wherein the first and second users are connected to the same layer 2 switch or to different layer 2 switches.

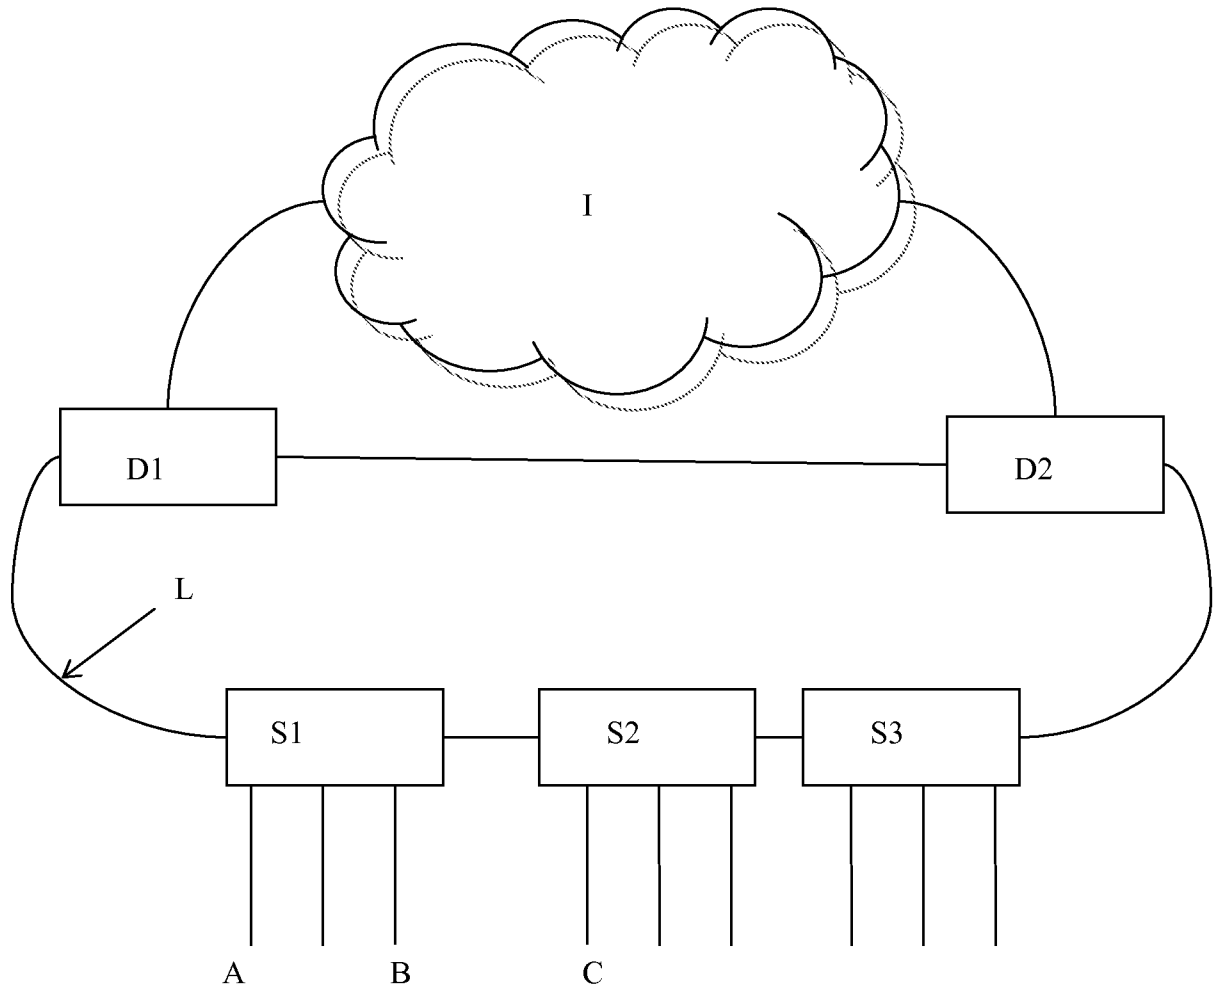


Figure 1

# INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2008/060384

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> INV. H04L12/46				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b>				
Minimum documentation searched (classification system followed by classification symbols) H04L				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	EP 1 039 698 A (NORTEL NETWORKS LTD [CA]) 27 September 2000 (2000-09-27) figures 1,3 column 2, paragraph 5 column 5, paragraph 15 column 6, paragraph 16 column 7; claim 7	1-7		
A	US 6 680 945 B1 (MERCHANT SHASHANK [US] ET AL) 20 January 2004 (2004-01-20) figures 4-7 column 2, lines 45-67 column 3, lines 1-47 column 6, lines 21-45 column 10, lines 1-39	1-7		
-/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <span style="margin-left: 200px;"><input checked="" type="checkbox"/> See patent family annex.</span>				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> <li>*A* document defining the general state of the art which is not considered to be of particular relevance</li> <li>*E* earlier document but published on or after the international filing date</li> <li>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</li> <li>*O* document referring to an oral disclosure, use, exhibition or other means</li> <li>*P* document published prior to the international filing date but later than the priority date claimed</li> </ul> </td> <td style="width: 50%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> <li>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</li> <li>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</li> <li>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</li> <li>*&amp;* document member of the same patent family</li> </ul> </td> </tr> </table>			<ul style="list-style-type: none"> <li>*A* document defining the general state of the art which is not considered to be of particular relevance</li> <li>*E* earlier document but published on or after the international filing date</li> <li>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</li> <li>*O* document referring to an oral disclosure, use, exhibition or other means</li> <li>*P* document published prior to the international filing date but later than the priority date claimed</li> </ul>	<ul style="list-style-type: none"> <li>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</li> <li>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</li> <li>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</li> <li>*&amp;* document member of the same patent family</li> </ul>
<ul style="list-style-type: none"> <li>*A* document defining the general state of the art which is not considered to be of particular relevance</li> <li>*E* earlier document but published on or after the international filing date</li> <li>*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</li> <li>*O* document referring to an oral disclosure, use, exhibition or other means</li> <li>*P* document published prior to the international filing date but later than the priority date claimed</li> </ul>	<ul style="list-style-type: none"> <li>*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</li> <li>*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</li> <li>*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</li> <li>*&amp;* document member of the same patent family</li> </ul>			
Date of the actual completion of the international search	Date of mailing of the international search report			
4 November 2008	11/11/2008			
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Mircescu, Alexander			

INTERNATIONAL SEARCH REPORT

International application No  
PCT/EP2008/060384

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 6 885 657 B1 (RABENKO TED F [US] ET AL)                      26 April 2005 (2005-04-26)                      figures 5,6                      column 4, lines 13-24                      column 6, lines 7-31                      column 9, lines 35-50                      column 11, lines 4-35</p>	1-7

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2008/060384

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1039698	A	27-09-2000 CA US 2293231 A1 6430621 B1	29-06-2000 06-08-2002
US 6680945	B1	20-01-2004 NONE	
US 6885657	B1	26-04-2005 US 2005152346 A1	14-07-2005