



(72) LAIB, Douglas M., US

(72) HODGES, Samuel E., US


(71) DART INDUSTRIES INC., US

(51) Int.Cl.<sup>6</sup> A47B 88/20, A47B 88/00

(30) 1997/07/23 (08/898,933) US

(54) **MODULES DE COMPARTIMENTATION POUR TIROIR**

(54) **DRAWER ORGANIZER**

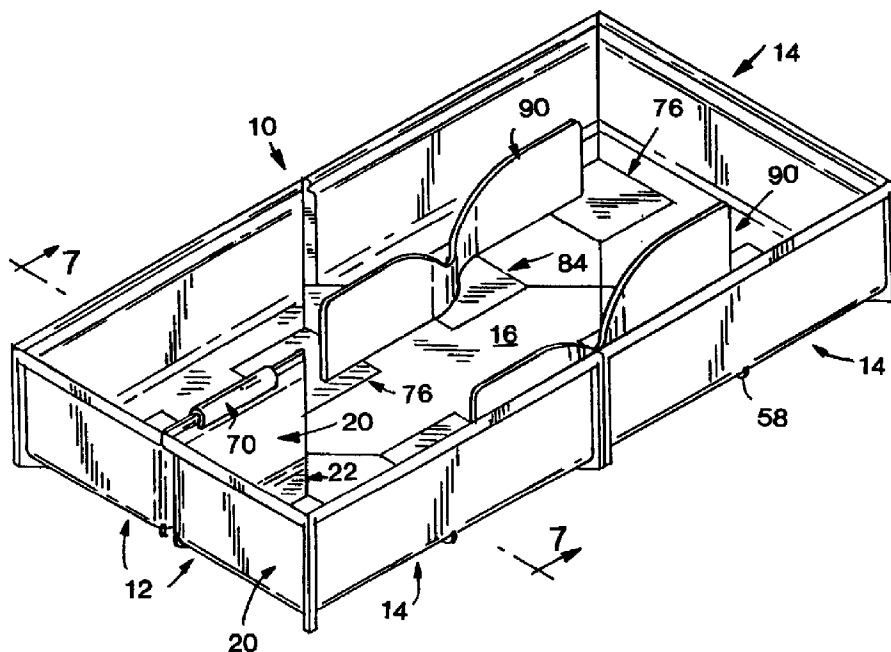

(57) Des composantes multiples assemblables sont mises en prise au moyen de connecteurs placés en travers de bords en aboutement sur des composantes adjacentes et reçues dans des évidements que comportent les panneaux de base de composantes adjacentes de manière à former une surface supérieure plane. Des composantes choisies ont des parois verticales qui peuvent être assemblées dos à dos au moyen d'agrafes. Les connecteurs peuvent comporter des saillies vers le bas se mettant en prise dans des ouvertures qu'il y a au fond des évidements, certains connecteurs choisis ayant des divisions allongées qui y sont montées et qui font saillie vers le haut.

(57) Multiple assemblable components are engaged by connectors positioned across abutment edges on adjacent components and received within recesses in the base panels of adjacent components to form a planar upper surface. Selected ones of the components have vertical walls which can be connected in back-to-back relation to each other by clips. The connectors can include depending projections engaged within openings in the recess bottoms, with selected connectors having upwardly projecting elongate dividers mounted thereto.

ABSTRACT OF THE DISCLOSURE

Multiple assemblable components are engaged by connectors positioned across abutment edges on adjacent components and received within recesses in the base panels of adjacent components to form a planar upper surface. Selected ones of the components have vertical walls which can be connected in back-to-back relation to each other by clips. The connectors can include depending projections engaged within openings in the recess bottoms, with selected connectors having upwardly projecting elongate dividers mounted thereto.

DRAWER ORGANIZERBACKGROUND OF THE INVENTION

The invention is broadly concerned with drawers and means for facilitating organization of drawer contents.

The conventional drawer is normally devoid of any interior dividers or means for separately grouping the contents of the drawer. This is a particularly undesirable feature in kitchen drawers wherein multiple kitchen utensils of several different types are to be stored. In attempting to address this problem, custom-made drawers can be provided with fixed partitions or partitions which can be selectively positioned in pre-formed wall slots. The problem is also conventionally addressed by providing multiple compartment drawer inserts or trays of wood or an appropriate synthetic resinous material.

Such known systems for dividing the interior of a drawer are inherently rather limited in that the user of the drawer must adhere to an arrangement of the drawer compartments dictated by the manufacturer of the drawer or by the uniform pre-manufactured divider trays received therein.

SUMMARY OF THE INVENTION

The present invention involves a drawer organizer construction utilizing multiple separate components or modules which can be assembled by the ultimate user in any of a substantial variety of arrangements for an accommodation to the interior of drawers of substantially any configuration in a manner as to provide interior divided compartments in accord with the specific requirements of the user.

The components, when assembled, are particularly adapted to form an organizer which, in addition to having a divided or partitioned interior, forms a self-contained tray having peripheral side walls and a base with a smooth planar upper surface, presenting the appearance and unity of a pre-formed tray without the inherent limitations of such a pre-formed tray.

Another significant feature of the invention is the ability of the organizer, and in particular the components thereof, to be readily and easily disassembled for cleaning, rearrangement, and the like.

Basically, the drawer organizer includes corner components and side components, both of which have a base

panel and at least one wall panel. A base component, without walls, is also provided as are a plurality of connectors in the nature of substantially flat plates which engage within keeper recesses formed in adjacent portions of edge joined ones of the components, the thickness of the connector plates being equal to the depth of the recesses to provide a desired flush surface. The connectors and recesses cooperate in a manner whereby lateral separation of the connected components is precluded, thus avoiding any unintentional or accidental disassembly within a drawer. As designed, selective ones of the connectors can include divider panels integral with the upper surface thereof and extending therebeyond into overlying relation to adjacent ones of the basic components.

In selected arrangements of the components, the walls of adjacent components can parallel and engage each other. In such cases, wall clips will be used to releasably fix the adjacent walls to each other and further stabilize the overall construction.

These and other features and objects of the invention will become readily apparent from the more detailed description following hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a top perspective view of one form of assembled drawer organizer;

FIGURE 2 is a top plan view illustrating a different assembly of the components;

FIGURE 3 is an exploded perspective view illustrating selected ones of the individual components, connectors and clip of the assembly of Figure 1;

FIGURE 4 is a bottom perspective view of a connector;

FIGURE 5 is a bottom perspective view of the assembly of Figure 1;

FIGURE 6 is a top perspective view of a corner component;

FIGURE 7 is a cross-sectional view taken substantially on a plane passing along line 7-7 in Figure 1;

FIGURE 8 is an enlarged cross-sectional detail through an engaged connector retaining lug;

FIGURE 9 is a top plan view of an assembly, similar to the assembly of Figure 2, wherein the connectors utilize a different form of retaining lug;

FIGURE 10 is a top perspective view of a corner component modified to accommodate the different form of lug;

FIGURE 11 is a bottom perspective view of the connector and modified lugs thereon;

FIGURE 12 is an enlarged cross-sectional detail taken substantially on a plane passing along line 12-12 in Figure 9;

FIGURE 13 is a top perspective view illustrating a further variation utilizing annular connectors and semi-circular recesses;

FIGURE 14 is a top perspective view of a corresponding corner component;

FIGURE 15 is an enlarged cross-sectional detail taken substantially on a plane passing along line 15-15 in Figure 13;

FIGURE 16 is an enlarged cross-sectional detail through a pair of connector joined adjacent components;

FIGURE 17 is an exploded perspective view illustrating the components and connectors of the assembly of Figure 13;

FIGURE 18 is a top perspective view of an assembly of a further variation of components wherein the walls are defined by alternating vertical flutes and ridges in a generally sinusoidal pattern;

FIGURE 19 is a top plan view of a corner component of the assembly of Figure 18;

FIGURE 20 is an enlarged elevational view of a clip utilized to secure parallel back-to-back walls of the components of Figure 18; and

FIGURE 21 is a bottom plan view of the clip of Figure 20.

#### DESCRIPTION OF PREFERRED EMBODIMENTS

The drawer organizer 10, as noted in particular in Figures 1 and 2, is an arrangement or assembly of the basic components or modules which individually and collectively, in the manner of a kit, define the invention. These components include, but are not necessarily limited to, corner components 12, side components 14, and base components 16.

Each corner component 12 includes a triangular base panel 18 with peripheral edges comprising a pair of equal length edges at substantially  $90^\circ$  to each other, and a third edge therebetween completing the triangle. Walls 20, integral with the base panel 18, extend vertically from the two equal length peripheral edges and are preferably integrally joined at the corners defined therebetween. The third base panel edge, designated by reference numeral 22, is a free linear



abutment edge forming an angle of substantially  $45^\circ$  with the two other edges. The base panel 18, immediately adjacent this edge 22, is downwardly offset and defines a right isosceles triangular recess 24 with one side of the recess 24 along the free edge 22 and with the recess opening through this edge. The recess is of a constant depth, with the bottom 26 of the recess paralleling the remainder of the base panel 18. The recess 24 is centrally located along the base edge 22 and terminates well inward of the opposed ends of the edge 22. Finally, a pair of keepers or keeper slots 28 are provided through the bottom 26 of the recess 24 centrally along and spaced slightly inward of the two converging inner edges of the recess. These slots 28, noting the detail of Figure 8, have wide mouths with inwardly and downwardly tapering side camming walls.

Referring again to the corner component walls 20, the upper edge portion of each wall is slightly outwardly offset and has a full length inwardly directed bead 30 therealong defining a full length undercut groove 32 immediately therebelow and along the inner face of the corresponding wall 20. The free vertical edge 34 of each of the walls 20 is slightly wider than the thickness of the body of the wall 20

and projects to the rear thereof a distance equal to the offset of the upper edge portion to combine therewith in reinforcing the periphery of the corner components 12. Each of these edges 34 is formed at substantially 45° along the height thereof to align in the same plane as the base panel free edge 22 and, when meeting with similarly formed wall edges, define a substantially right angular recess to receive a corner of the base component 16, or alternately to position adjacent walls at right angles to each other as will be noted in Figure 2.

As it is desirable to slightly elevate the floor of the organizer 10, the corner component base panel 18 has, along the full length of the free edge 22, a depending flange 36 which extends below the bottom of the recess 24 and which has a front face coplanar with the edge face. Noting Figure 6 in particular, it will be seen that the edge 22 and integral flange 36 present the appearance of a wide planar edge surface which continues through and coplanar with the lower portions of the free vertical edges 34 at the opposed ends thereof.

A second support flange 38, integral with the under or bottom surface of the base panel 18, bisects the angle at the corner between the walls 20 and extends from the corner to the

downwardly offset portion of the base panel which defines the recess 24. As will be appreciated, the height of the flange 38 is equal to that of the flange 36, both of which extend below the recess-defining offset as will be best noted in Figure 5 and the detail of Figure 8.

Turning now to the side components 14, each of these components comprises a base panel 40 configured as a right angle isosceles triangle with two free edges 42 of equal length and of a length equal to the free edge 22 of the corner component 12. The third or rear edge of the base panel 40, which extends at 45° to the free edges 42, has an integral wall 44 coextensive therewith and projecting upwardly therefrom. The wall 44 duplicates the walls 20 in cross section, and includes an offset upper portion with a defined inwardly directed bead 46 and underlying groove 48. Integral depending flanges 50 are coextensive and coplanar with the free edges 42 and with the lower portions of the beveled wall edges 52. These edges 52, similar to the edges 34, are defined by rearwardly directed flange-like portions which are slightly wider than the thickness of the wall panel 44 itself, with the beveled surface being at substantially 45° to

correspond to the angles of the free edges 42 relative to the rear wall-mounting edge.

The base panel 40, immediately adjacent each free edge 42, is downwardly offset to provide a pair of right isosceles triangular recesses 54 which duplicate the corner component recesses 24 and are similarly provided with a pair of keepers or keeper slots 56 through each recess bottom.

As an additional support for the base panel 40, a third support flange 58 is integral with and depends from the bottom surface of the base panel 40, extending inwardly from the rear edge thereof toward the forward apex defined by the converging free edges 42. This flange 58, as illustrated in Figure 5, will normally terminate at some point between the recess-defining offsets.

The third component, the base component 16, comprises a flat base panel 60 of a square configuration with each edge 61 comprising an abutment edge and being of equal or substantially equal length with the free edge 22 of the corner component 12 and the free edges 42 of the side component 14. The base panel 60, immediately adjacent each of the edges, is downwardly offset to define a right isosceles triangular recess 62 opening outward centrally of each edge. These

recesses 62 duplicate the recesses 24 and 54 and similarly include two keepers or keeper slots 64. It is to be appreciated that the defined recesses 24, 54 and 62 are so located relative to their respective edges as to align, upon an alignment of the components, and define a composite recess with four equal sides.

The base panel 60 on the base component 16, for an appropriate elevation thereof, is also provided, as best seen in Figure 5, with depending edge flanges 66 coextensive with and providing coplanar outer faces with each of the base component edges. Similar support flanges 68 extend transversely across the undersurface of the base panel 60 between the inner apex ends of diametrically opposed recesses 62.

As will be appreciated from Figures 1 and 2, the components 12, 14 and 16 can be arranged in a variety of configurations, providing custom formed drawer organizers. Note, for example, in Figure 1 wherein two corner components 12 are arranged with walls 20 placed back to back and extending into the interior of the organizer. In such case, a flexibly resilient mounting clip 70, in the nature of a split sleeve, can be snap-locked over the wall beads 30 and engaged

within the grooves 32. Each such clip 76, noting the cross-sectional detail of Figure 7, can have the mouth-defining lower edges of the opposed walls thereof provided with beads 72 which, upon being snap-engaged within the grooves 32, provide for a positive locking of the walls 20 to each other.

As an alternate to use of the corner components in this manner, attention is directed to Figure 2 wherein the corner components 12 actually define a pair of corners of the organizer.

In assembling the components, after the desired layout is determined, the free edges of the adjacent components are brought into intimate engagement with each other. As previously indicated, these edges are all of the same length and thus define smooth full length abutment edges with the central recesses of each pair of abutment edges aligning to define composite rectangular recesses. These composite recesses in turn closely receive connectors 76, each comprising a flat square plate 78 closely conforming to and of equal height with the composite recess defined by two adjacent recesses, for example recesses 24 and 62. The connector plate 78 in turn includes four depending lugs 80 integral with the lower surface thereof and located centrally of and adjacent

each of the four connector plate edges and aligned so as to engage, by a snap-lock engagement, through corresponding ones of the recess slots 28, note particularly Figure 8. The lugs 80 are elongate and slightly arcuate in cross section, defining a slightly curled lower edge portion which, upon a positioning of the connector 76, resiliently flexes slightly outward as it moves along the camming surfaces of the corresponding slot 28 until such time as the lower edge portion of the lug 80 passes beyond or below the bottom of the corresponding recess and, through the inherent resiliency or biasing nature thereof, moves to a position slightly underlying the bottom immediately to one side of the corresponding slot 28. As will be noted in Figure 8, the slot is of a width allowing for the slight lateral flexing of the lug 80 required to properly engage the lug. It is contemplated that the length of each of the lugs 80 be only slightly less than the length of the slots 28 for rather close reception therein. The connector, when so mounted, precludes lateral separation of the joined components, while still allowing for disassembly for repositioning, cleaning, and the like.

The assemblage of components and connectors also includes connectors 84, each of which includes a planar square plate 86 with four depending elongate lugs 88 which duplicate the plate 78 and lugs 80 of the connector 76. In addition, the connector 84 includes, preferably integral with the plate, an upwardly projecting divider 90 extending transversely thereacross and beyond a pair of opposed side edges of the plate 86 an appreciable distance at least sufficient to partially overlap the connectors 76 securing adjoining components. The divider 90 may be linear or, as illustrated, have end lengths laterally offset from each other through an arcuate central portion directly overlying the plate 86 as illustrated. Such dividers, positioned adjacent a side wall of the organizer as the dividers in Figure 1, will provide a divided compartment with a large area for, as an example, the enlarged head of soup spoons and a narrow adjacent portion for the handles thereof. As such, a particularly useful customization of the organizer is possible.

Figure 3 is of particular interest in illustrating all of the components as well as several of the connectors and divider-connectors used to assemble the organizer 10 of Figure



1, thus giving a clear picture as to the organization and alignment of the components.

Figures 9-12 illustrate a second embodiment of the invention, along with a slightly different organizer arrangement (Figure 9), wherein the only difference from the embodiment of Figures 1-8 resides in the manner in which the connectors 76 and 84 are secured. Accordingly, like reference numerals have been applied to like parts.

The specific difference resides in the provision of snap-locking split plugs 94 at one pair of diametrically opposed corner portions of the connector base plate 78, 86 for snap-locking engagement through a pair of keepers or keeper openings 96, one located through the bottom of a corresponding recess immediately inward of the inner apex thereof. The keeper openings, noting the cross-sectional detail of Figure 12, will have peripheral walls of an inverted conical configuration for a resilient inward flexing or camming of the opposed arcuate portions 98 of the received plug 94. One of these arcuate portions 98 will preferably have an outwardly directed bulbous lower edge or extension 100 to engage beneath the surface of the base panel of the corresponding component for a positive interlock of the connector and the component.

Figure 12 also illustrates a slight downward and outward flaring of the two plug sections 98 relative to each other to ensure a tight engagement of the plugs when the connector is fully seated. Incidentally, as with the first embodiment, the thickness of the connector base plates 78 and 86 is equal to the depth of the recesses 24, 54 and 62.

A further embodiment of the invention is illustrated in Figures 13-17. Again in this embodiment, the difference from the first completely described embodiment resides solely in the manner in which the components are joined against lateral separation. As such, like reference numerals have been applied to like ones of the components and common features thereof.

The basic connectors 104 are each in the nature of a flat annular plate with an inner circular periphery 106 defining a circular opening, and an outer circular periphery 108. The outer periphery 108, at mid-height thereon, has a small annular bead 110 completely thereabout.

The recesses 112 located in the base panels of the components 12, 14 and 16, comprise flat semi-circular arcs, the opposed ends of which open through the forward edges of the base panels. These arced recesses in each instance define

a central semi-circular portion 114 at the full height of the base panel. The semi-circular edge of this semi-circular portion 114 includes small rounded projections 116 at approximately three spaced points therealong, such projections 116 being inwardly directed toward the formed recess 112.

Upon a positioning of the components in an assembly, the recesses 112 in adjacent edges combine to define a composite annular recess which receives a connector 104 in surrounding relation to the circular central portion defined by the adjacent semi-circular portions 114. So assembled, the adjacent semi-circular portions 114 act in effect as keepers for the annular connector 104 precluding a lateral separation of the components.

The peripheral bead 110 on the connector 104 and the small projections 116 on each semi-circular portion 114 facilitate insertion of the annular connector 104 within the combined recesses 112 and ensure a snug yet non-binding reception. This is particularly significant with regard to the divider-mounting connector 118 wherein the flat annular plate 120 duplicates the plate 104 with the divider 122 fixed diametrically thereacross so as to project radially beyond the outer periphery and overlies the central opening. The divider

122 can have laterally offset end portions or may be formed in a single plane. Further, as the connector plate 120 is annular and received within a composite annular recess, it is possible to rotate the connector 118 with the divider 122 thereon to provide a degree of variation in the compartment or chamber formed thereby in the assembled organizer. Such a rotational adjustment is facilitated by the outer peripheral bead 110 on the connector and the projections 116 on the composite circular central portion formed by the combined portions 114.

Noting Figures 15 and 16 in particular, it will be appreciated that the recesses 112, as with the previously described triangular recesses, are formed by a downward offsetting of the bottom panels of the associated components, thus maintaining a desired constant thickness of material.

A final illustrated embodiment is presented in Figures 18-21. This embodiment differs from the embodiment of Figures 13-17 principally in the construction of the walls 20' and 44' of the corner components 12' and the side components 14'. The base component 16' is the same as in the embodiment of Figure 13. In light of the substantial similarities of this embodiment with the previously described embodiments and the

duplicate functions of the components and various other elements, like reference numerals have been applied with the addition of a prime (') as a recognition of the substantially duplicate nature of such parts.

Each of the walls 20' and 44' has the body thereof of constant thickness and defined by a series of vertical inwardly and outwardly directed alternating flutes 126 and ribs 128. Basically, each wall, in horizontal cross section, is formed in a generally sinusoidal configuration.

The walls have coextensive top flanges 130, the inner edges of which follow and are coplanar with the inner surface of the corresponding wall panel 20', 44', while the outer edge 132 thereof is linear and in a vertical plane at or slightly beyond the formed ribs on the outer surface of the corresponding wall panel 20', 44'. The opposed vertical edge portions 134 of the walls extend to the plane of the linear rear edge 132 of the top flange 130 and have beveled forward faces thereof in the plane of the free edge of each component base panel, for example edge 22' of base panel 18' in Figure 19.

Noting Figure 18, it will be seen that the divider-mounting connector 118' mounts a planar divider 136 as an

alternate divider configuration to the previously illustrated dividers. This divider, as with the previously described dividers, has the opposed radially extending portions thereof at a substantially greater height than the intermediate portion thereof which directly mounts to the corresponding connector plate 120'.

In order to retain back-to-back walls 20' of adjacent components 12', as illustrated in Figure 18, a clip 138, detailed in Figures 20 and 21, is used. The clip 138 has a bight 140 at the upper end thereof and a pair of elongate laterally spaced legs 142 depending therefrom and slightly downwardly diverging to terminate in slightly rounded lower ends 144. The bight 140 is of a length as to allow for a snug reception of the two depending legs 142 in back-to-back flutes 126 provided in a pair of back-to-back walls 20'. The slightly downwardly diverging legs allow for easy alignment and reception of the clip 138 over the walls with a gradual tightening of the walls against each other as the clip 138 approaches its final seated position.

Finally, appropriate support flanges, similar to those described and possibly best illustrated in Figure 5, are integrally formed along and coplanar with the free edges of

the various components as well as along selected intermediate portions of the undersurface of the corresponding component base panels to define a slightly elevated floor to the organizer.

From the foregoing, it will be appreciated that drawer organizers of a variety of configurations and internal portioning can be defined from selected assemblages of unique corner, wall and base components with the components fixedly secured in a desired configuration by connectors engageable within upwardly opening recesses communicating with duplicate recesses in adjoining components. The connectors present smooth upper surfaces with the component base panels for a smooth bottom to the assembled organizer with lateral separation being prevented by cooperating means on the connectors and the components. Such means preferably comprise depending locking lugs on the connectors engaged within slots in the bottom of the connector receiving recesses.

Alternately, the connector can be provided with split plugs received within cooperating openings, or the connector can be in the nature of an annular flat ring received within semi-circular recesses and precluded from lateral withdrawal by a semi-circular portion about which the semi-circular recess is

defined. Provision is also made for securing selected ones of the component walls in back-to-back relationship.

The foregoing is considered illustrative of the invention. While several embodiments have been presented, it is to be appreciated that other embodiments as fall within the parameters of the claims following hereinafter are also to be considered within the scope of the invention.



CLAIMS

1. A drawer organizer comprising multiple components selectively assemblable in adjacent relationship, each of said components including a base panel having at least one abutment edge, said abutment edges, upon an assembly of said components in an adjacent relationship, each being immediately adjacent an abutment edge of an adjacent component, and connectors for releasably joining pairs of adjacent components, each of said connectors releasably engaging with the base panels of one pair of adjacent components and extending across the corresponding adjacent abutment edges of said one pair of adjacent components.

2. The drawer organizer of claim 1 wherein said connectors each comprises a connector plate positionable in overlying relation to the base panels of a pair of adjacent components, and keeper means on each base panel for releasably engaging with an overlying connector plate.

3. The drawer organizer of claim 2 wherein said keeper means comprises at least one opening defined through said base panel of each component, said connectors further

comprising at least one depending projection on each said connector plate selectively receivable through a base panel opening upon a positioning of said connector plate in overlying relation to the corresponding base panel.

4. The drawer organizer of claim 3 wherein said at least one opening in each base panel comprises a pair of elongate slots aligned at approximately right angles to each other, said connector projections comprising four elongate lugs on each connector plate snap-engagable within the elongate slots of two adjacent base panels.

5. The drawer organizer of claim 4 including a recess defined in each component base panel and opening through the abutment edge of the base panel for alignment with a corresponding recess in an adjacent base panel, the recesses in a pair of adjacent base panels defining a predetermined configuration, each of said connector plates having a configuration conforming to the predetermined configuration of a pair of adjacent base panel recesses for close reception therein, said openings being defined in said recesses.

6. The drawer organizer of claim 5 wherein said base panels, other than for said recesses, have planar upper surfaces, said recesses being of a predetermined constant depth, said connector plates having planar upper surfaces and being of a thickness substantially equal to the depth of said recesses to define a planar surface with said base panel upper surfaces.

7. The drawer organizer of claim 6 wherein said connector plates are square and each of said recesses is shaped as a right isosceles triangle.

8. The drawer organizer of claim 7 wherein said component base panels comprise at least three edges including said abutment edge, selected ones of said base panels including a wall fixed thereto along at least one of said edges other than said abutment edge and projecting upward from the associated base panel.

9. The drawer organizer of claim 8 including elongate supports on each of said components, said supports depending below said base panels for retention of each base panel in an elevated position relative a support surface.

10. The drawer organizer of claim 7 wherein each of said lugs is resiliently flexible and has a laterally offset lower edge portion, each of said slots having camming edges for receiving and laterally flexing said lower edge portions of said lugs upon engagement of said lugs within said slots.

11. The drawer organizer of claim 2 including a recess defined in each component base panel and opening through the abutment edge thereof for alignment with a corresponding recess in an adjacent base panel, the recesses in a pair of adjacent base panels defining a predetermined configuration, said connector plates having a configuration conforming to said predetermined configuration of a pair of adjacent base panel recesses for close reception therein, said base panels, other than for said recesses, have planar upper surfaces, said recesses being of a predetermined constant depth, said connector plates having planar upper surfaces and being of a thickness substantially equal to the depth of said recesses.

12. The drawer organizer of claim 11 wherein said connector plates are square and each of said recesses is shaped as a right isosceles triangle.

13. The drawer organizer of claim 11 wherein at least one connector plate has an elongate divider affixed thereto and projecting vertically thereabove, said divider extending longitudinally across the associated connector plate and longitudinally therebeyond.

14. The drawer organizer of claim 11 wherein said component base panels comprise at least three edges including said abutment edge, selected ones of said base panels including a wall fixed thereto along at least one of said edges other than said abutment edge and projecting upward from the associated base panel.

15. The drawer organizer of claim 14 wherein said walls have inner faces with recesses defined therein, said components being selectively assemblable with walls on adjacent components in parallel adjacent engagement and clip means selectively engagable over the adjacent walls and received within the wall recesses for releasable fixing of the adjacent walls to each other.

16. The drawer organizer of claim 14 wherein selected ones of said base panels are in the form of right isoceles triangles and selected others of said base panels are square.

17. The drawer organizer of claim 16 wherein selected ones of said triangle base panels include a single abutment edge and a wall extending upward from each of said remaining two edges, selected others of said triangular base panels including two abutment edges and a single wall extending from the third edge thereof, said square base panels being devoid of walls and comprising four abutment edges.

18. The drawer organizer of claim 13 wherein said divider has opposed longitudinal end portions laterally offset toward opposite sides of the divider.

19. The drawer organizer of claim 11 wherein said connector plates are of a flat annular configuration with inner and outer annular peripheries, said recesses comprising, in each base panel, a semi-circular recess having opposed ends opening through a corresponding abutment edge and defining a semi-circular projection at said abutment edge between said recess ends wherein said recesses, in a pair of adjacent

abutment edges of adjacent components define a composite annular recess about a circular composite central projection for reception of an annular connector plate within said composite annular recess in a manner as to preclude lateral separation of said adjacent abutment edges, said semi-circular projections comprising said keeper means on each base panel.

20. The drawer organizer of claim 2 wherein at least one connector plate has an elongate divider affixed thereto and projecting vertically thereabove, said divider extending longitudinally across the associated connector plate and longitudinally therebeyond.

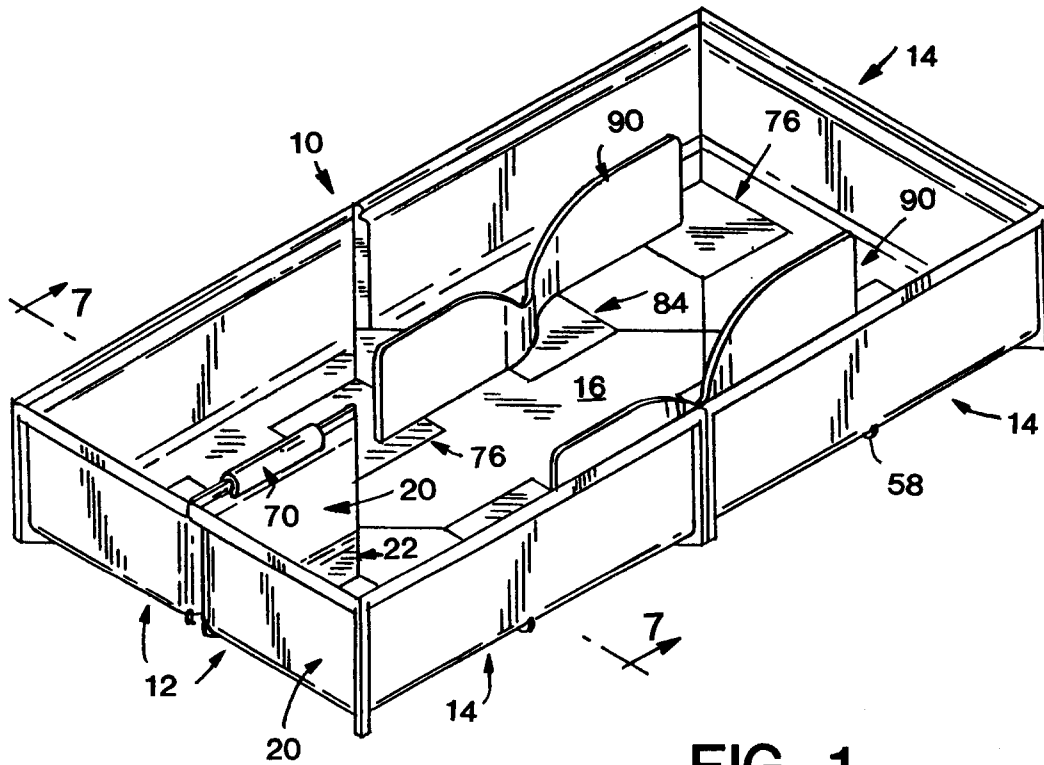


FIG. 1

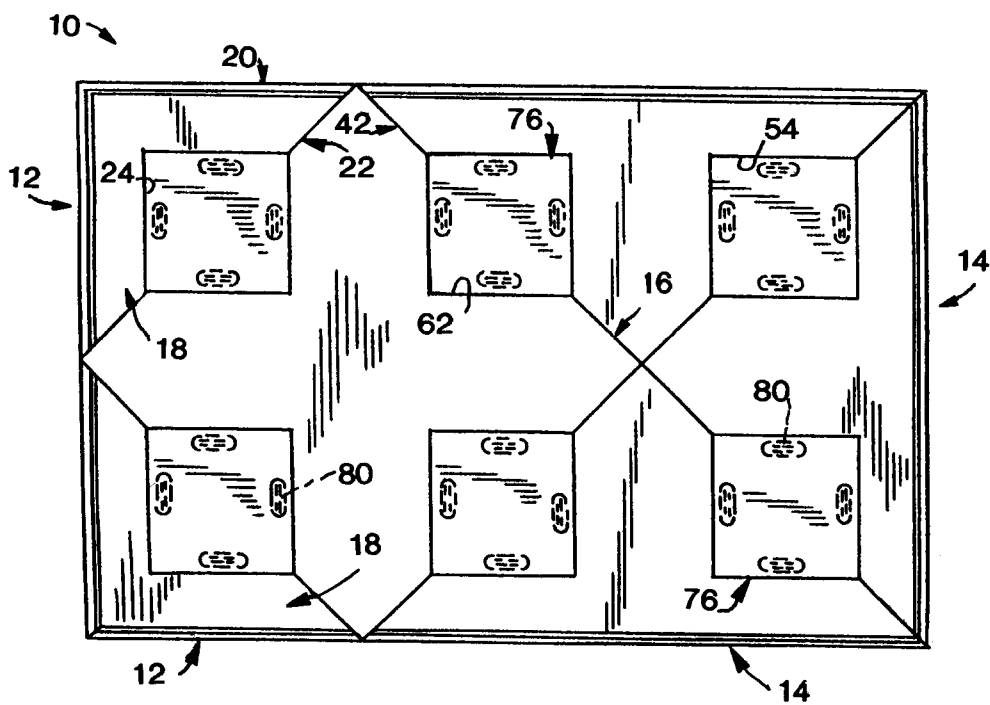


FIG. 2



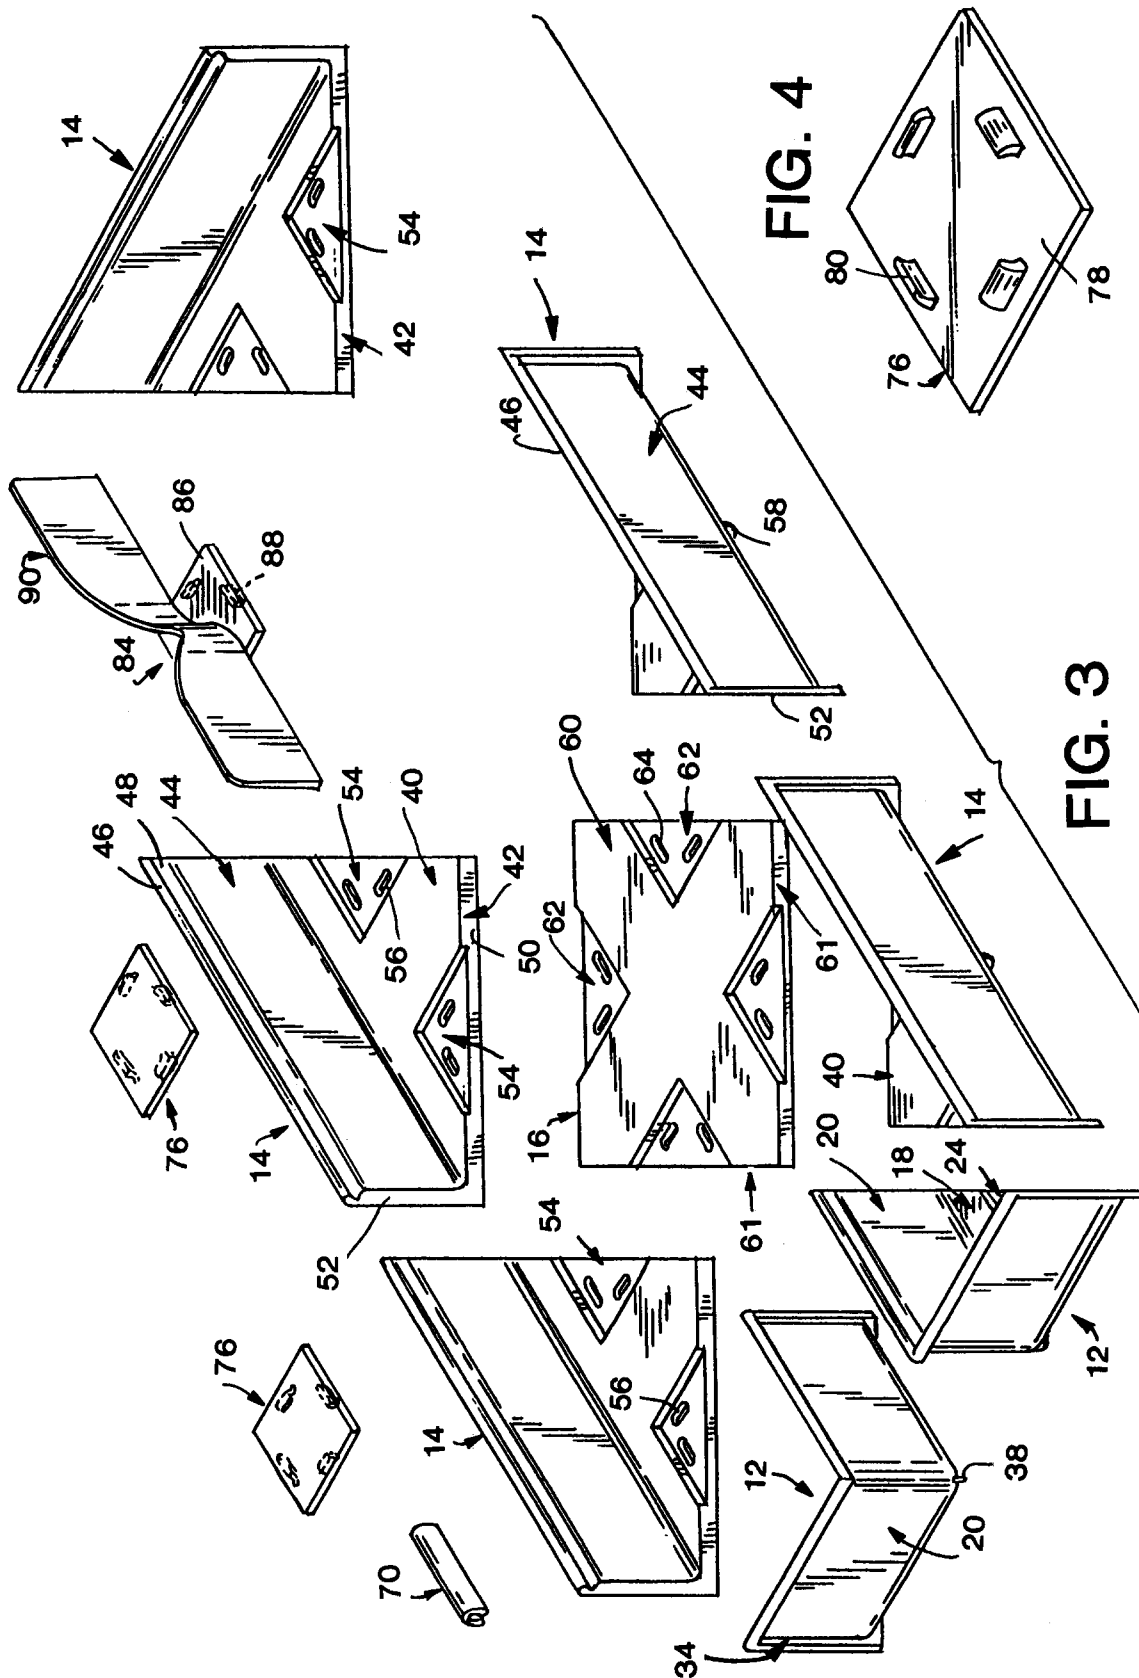
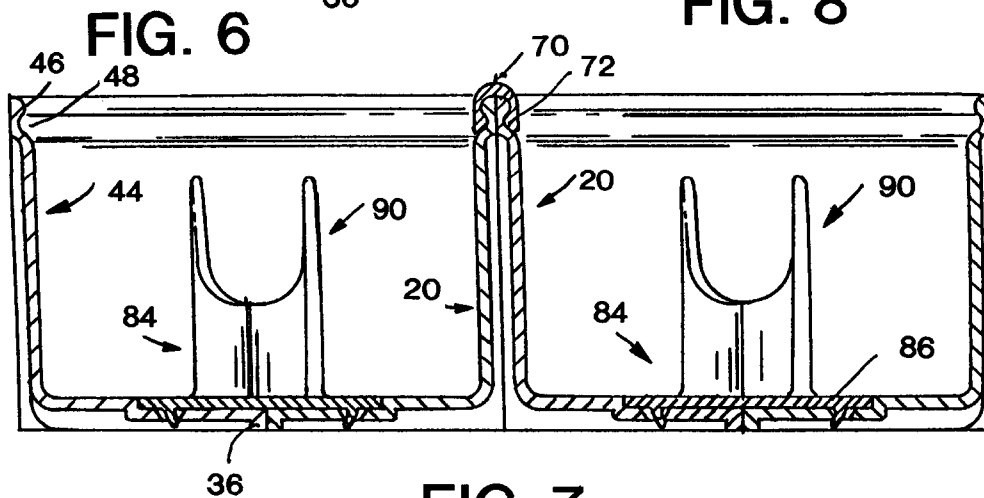
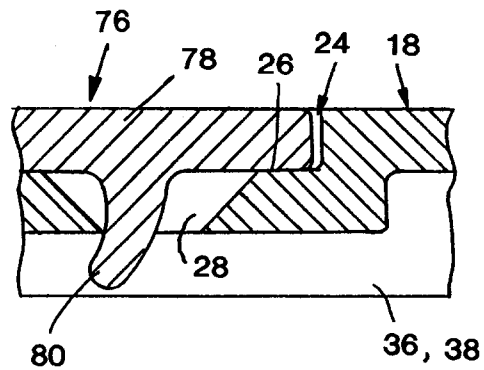
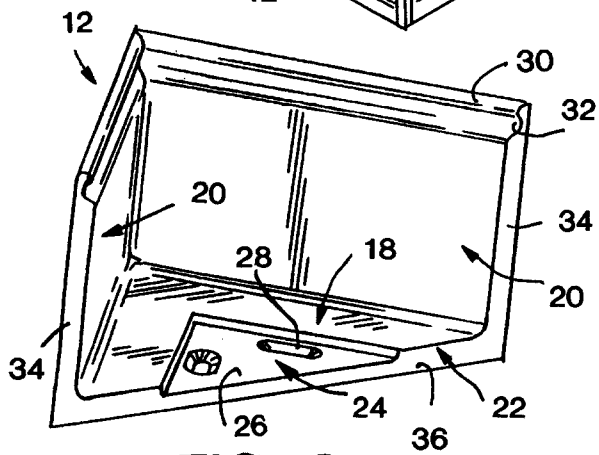
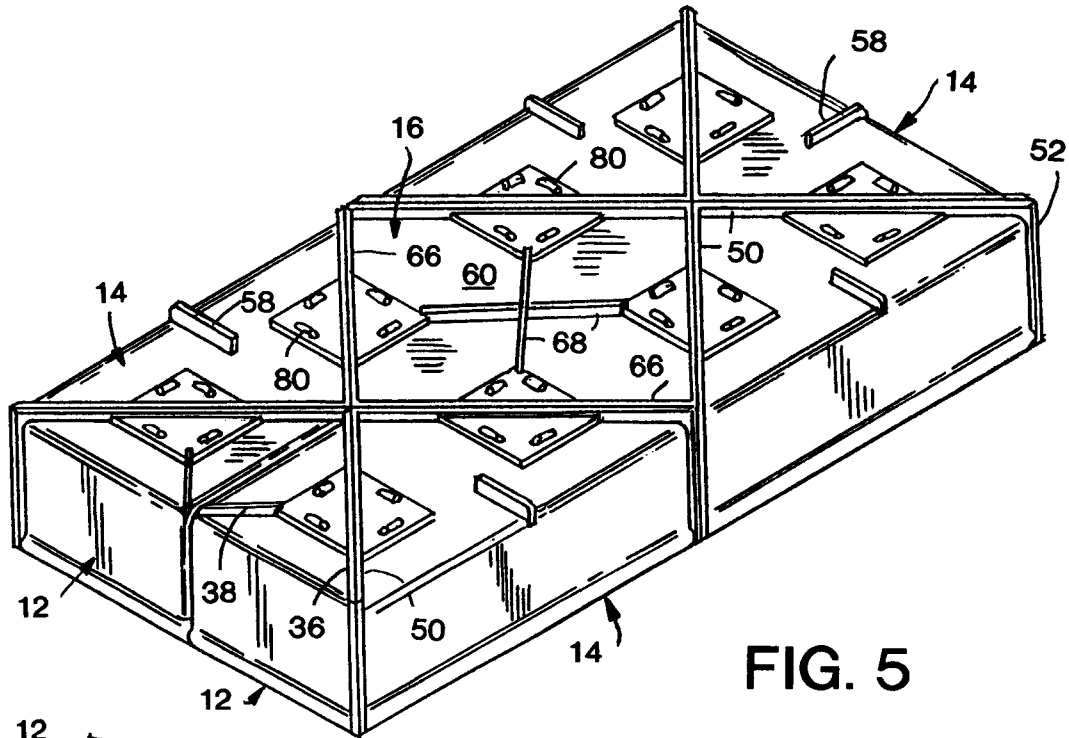


FIG. 4

FIG. 3



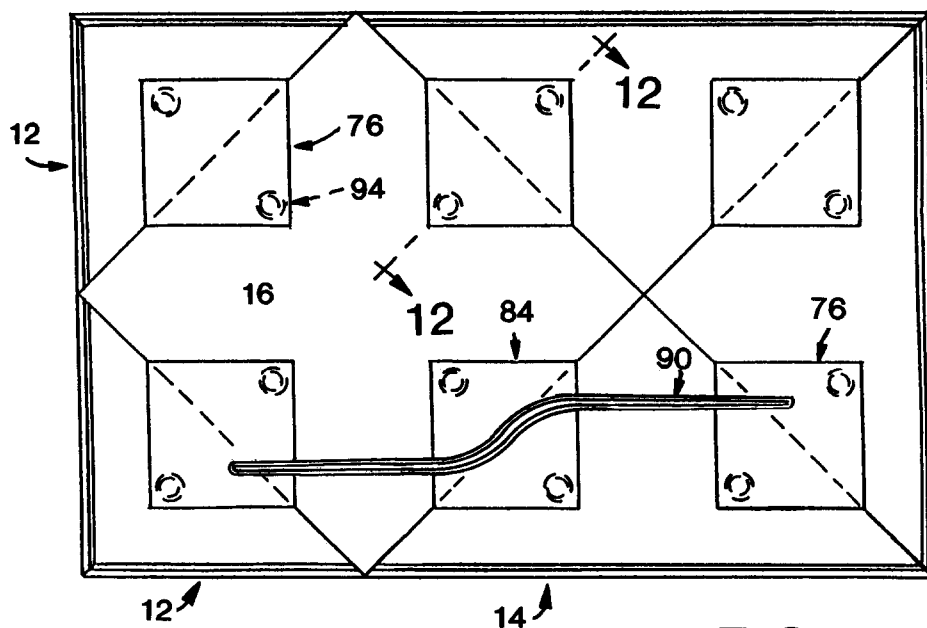


FIG. 9

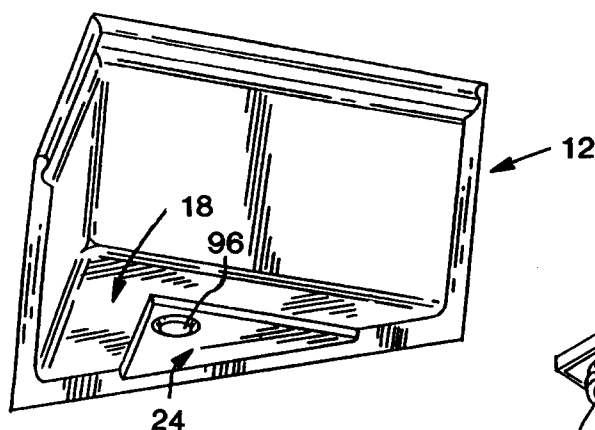


FIG. 10

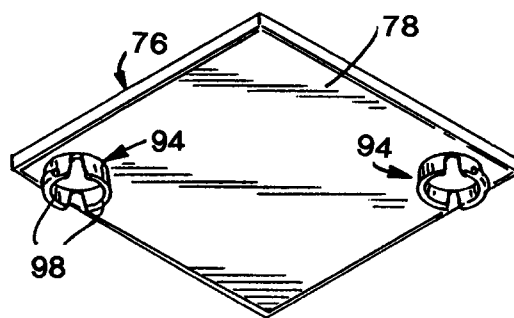


FIG. 11

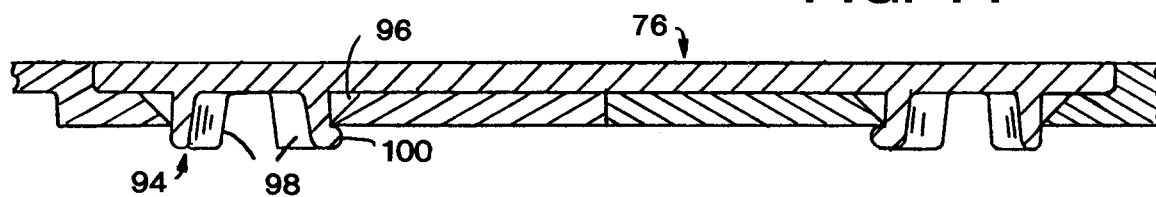


FIG. 12

FIG. 13

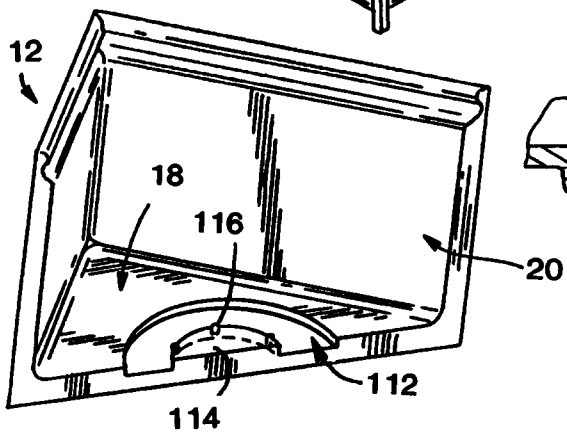
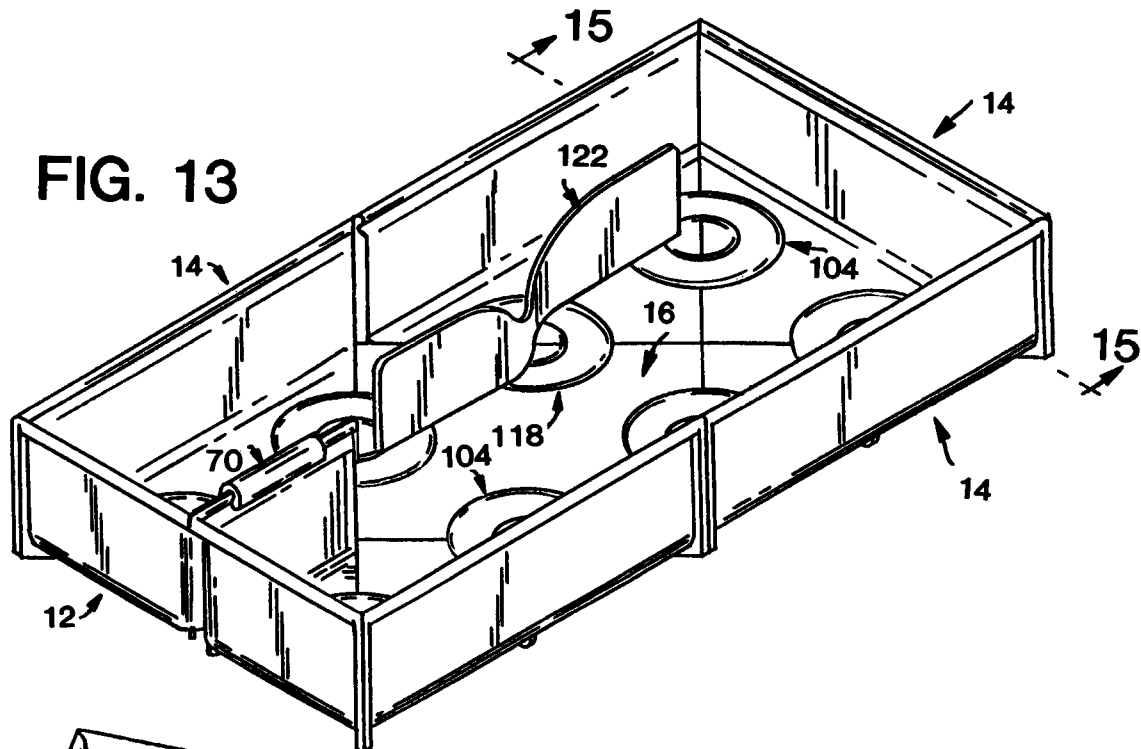


FIG. 14

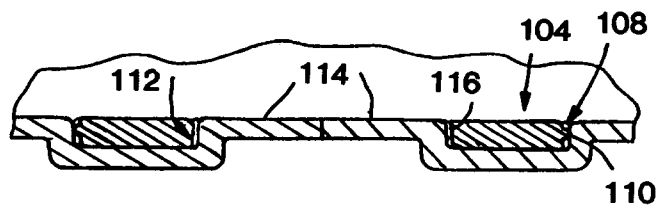


FIG. 15

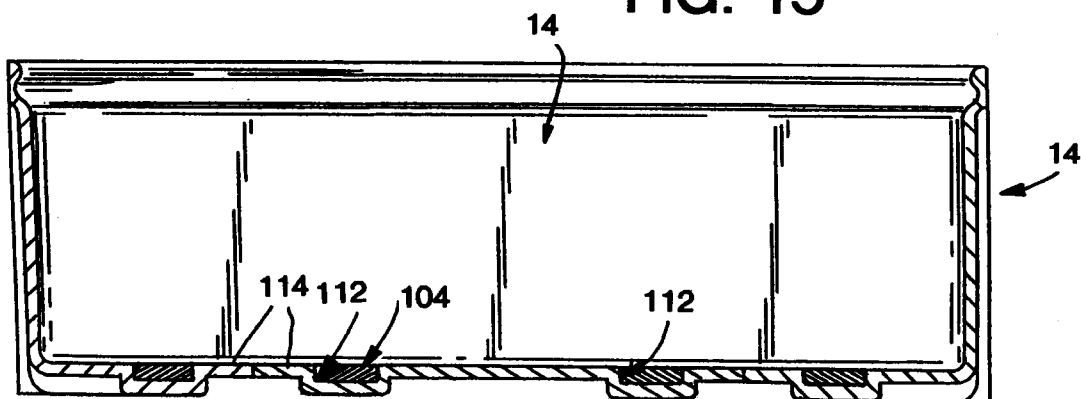


FIG. 16

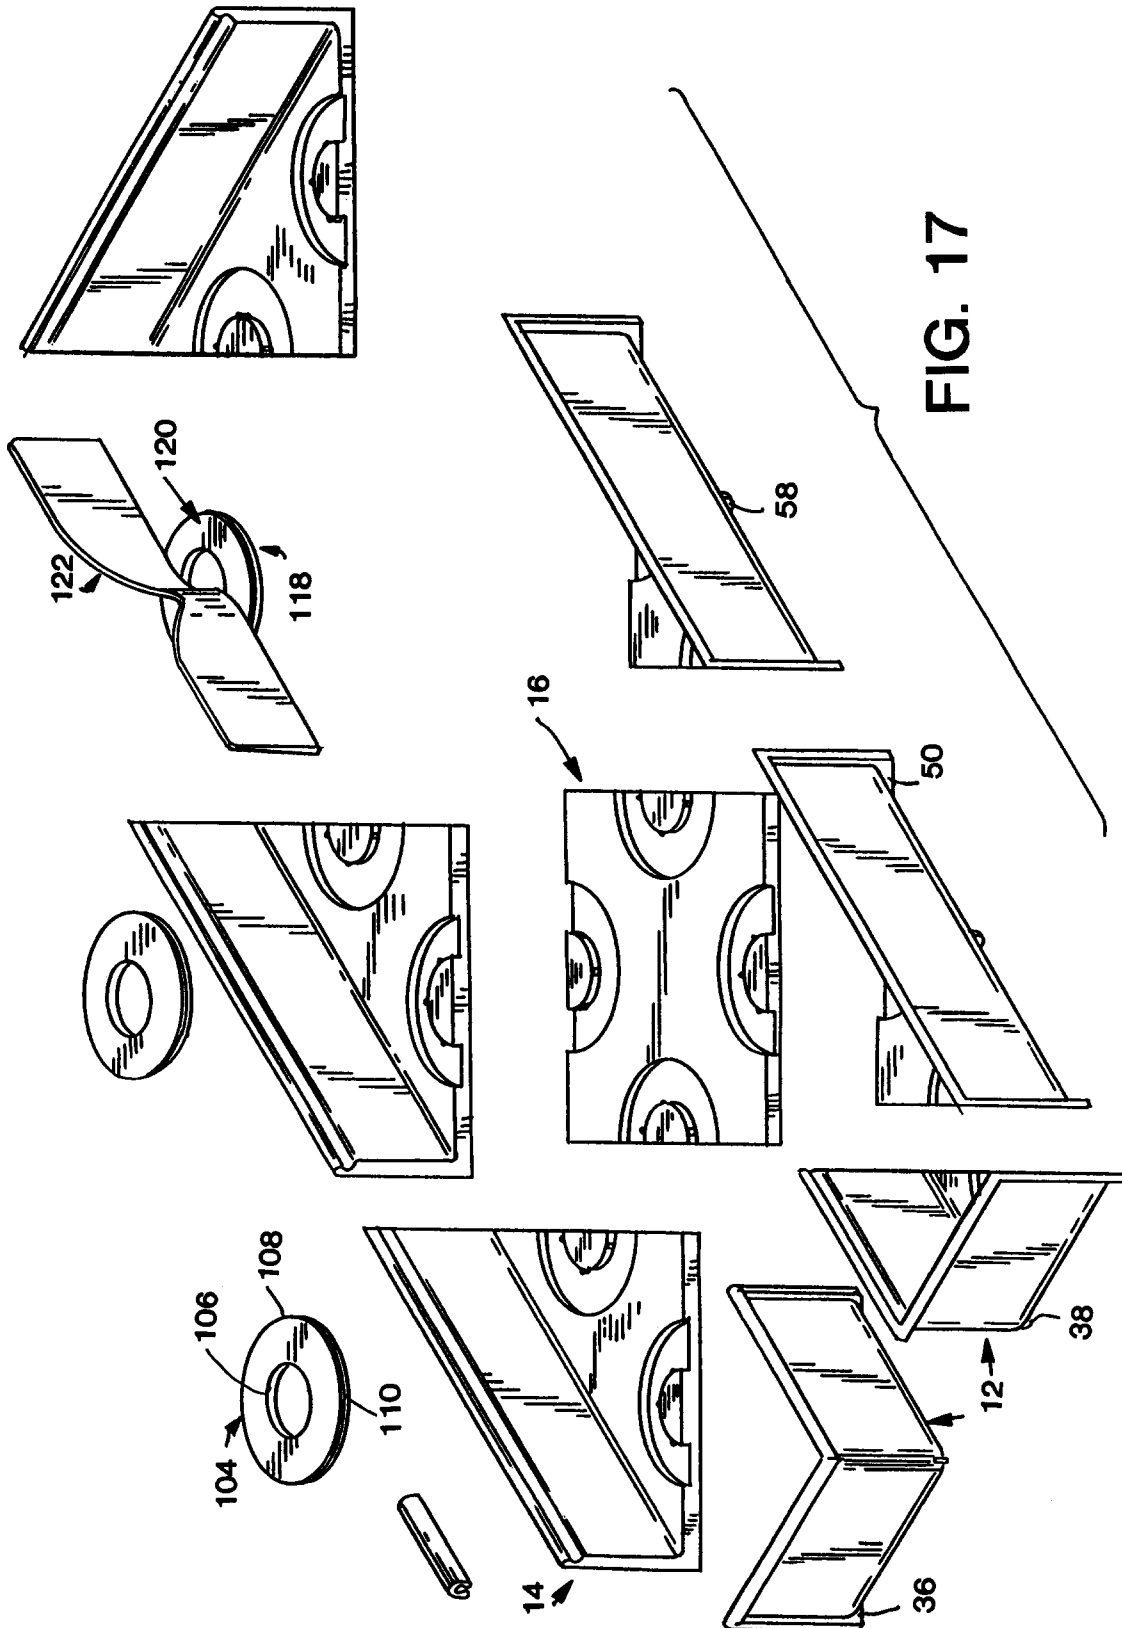


FIG. 17

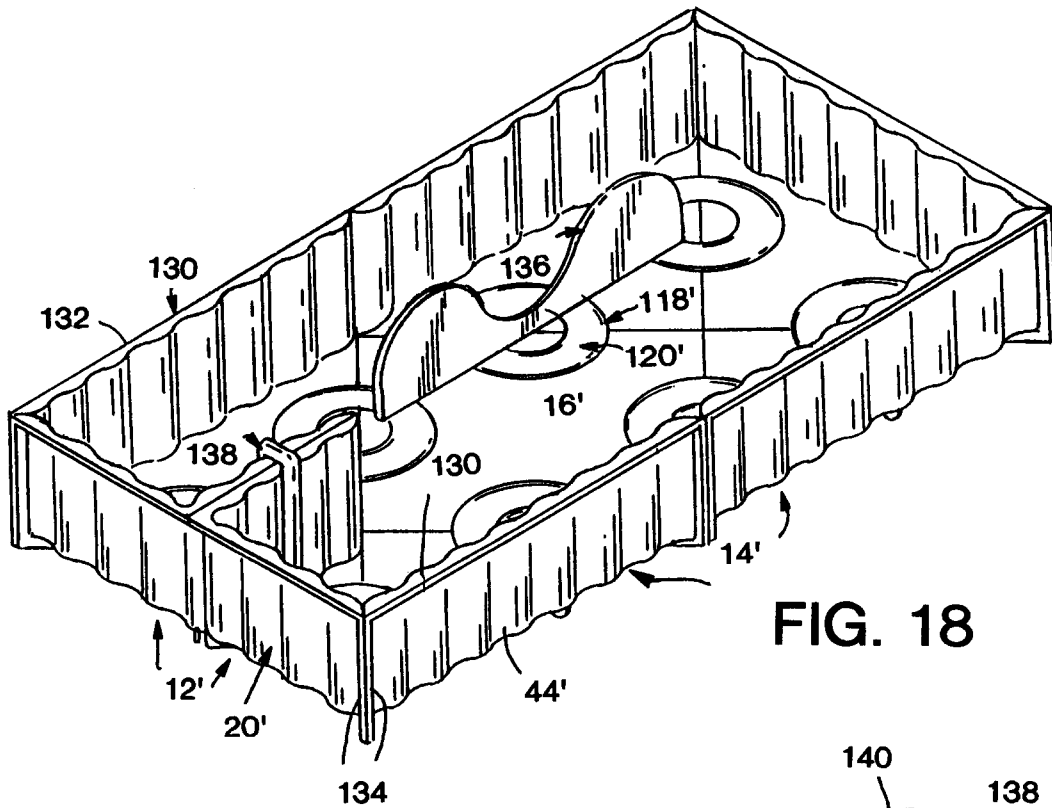


FIG. 18

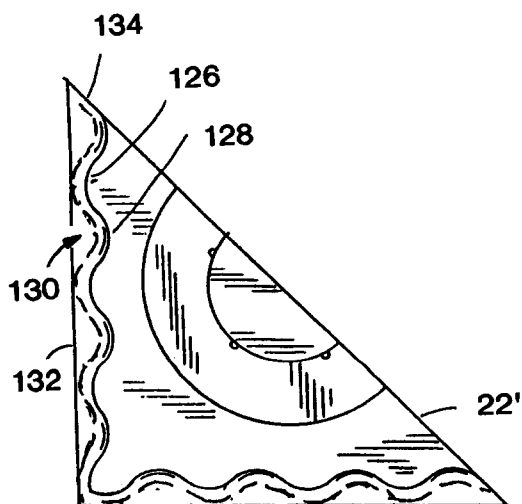


FIG. 19

FIG. 20





FIG. 21

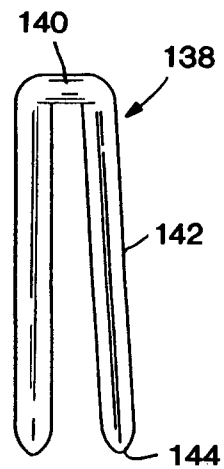