



US007213298B2

(12) **United States Patent**
Cipolla et al.

(10) **Patent No.:** **US 7,213,298 B2**
(45) **Date of Patent:** **May 8, 2007**

(54) **CLUTCHLESS SELF-PROPELLED VACUUM CLEANER AND NOZZLE HEIGHT ADJUSTMENT MECHANISM THEREFOR**

(75) Inventors: **Mark E. Cipolla**, Chardon, OH (US);
Steven J. Paliobeis, Painesville, OH (US)

(73) Assignee: **Royal Appliance Mfg. Co.**,
Glenwillow, OH (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

3,218,876 A	11/1965	Berger
3,220,043 A	11/1965	Lampe
3,451,495 A	6/1969	Bayless et al.
3,581,591 A	6/1971	Ziegler et al.
3,618,687 A	11/1971	Ripple et al.
3,823,791 A	7/1974	Sheler
3,854,164 A	12/1974	Schmitz
3,896,892 A	7/1975	Kohls et al.
3,938,216 A	2/1976	Schmitz et al.
3,942,604 A	3/1976	Black, III
4,052,767 A	10/1977	Dutcher
4,111,372 A	9/1978	Hicks
4,171,554 A *	10/1979	Tschudy 15/359
4,249,281 A	2/1981	Meyer et al.

(21) Appl. No.: **11/473,293**

(22) Filed: **Jun. 22, 2006**

(Continued)

(65) **Prior Publication Data**

US 2007/0000085 A1 Jan. 4, 2007

FOREIGN PATENT DOCUMENTS

JP 1-185233 7/1989

Related U.S. Application Data

(62) Division of application No. 10/339,191, filed on Jan. 9, 2003.

Primary Examiner—Theresa T. Snider
(74) *Attorney, Agent, or Firm*—Fay Sharpe LLP

(51) **Int. Cl.**
A47L 5/34 (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.** 15/340.2; 15/354; 15/356; 15/360

(58) **Field of Classification Search** 15/340.2, 15/340.3, 354, 356, 360; *A47L 5/34*
See application file for complete search history.


A clutchless, direct drive, self-propelled vacuum cleaner includes a nozzle base having a suction inlet and a housing pivotally mounted on the nozzle base. A suction source is mounted to one of the nozzle base and the housing. A filter chamber is located in one of the nozzle base and the housing. A drive motor is mounted to one of the nozzle base and the housing, the drive motor having an output shaft. A transmission is directly coupled to the output shaft of the motor. A driven wheel is directly coupled to the transmission. Also disclosed is a height adjustment mechanism for the vacuum cleaner, the height adjustment mechanism employing the drive assembly of the vacuum cleaner.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,356,663 A	10/1920	Spielman
1,447,814 A	3/1923	Paulus
1,459,946 A	6/1923	Camarata et al.
1,465,285 A	8/1923	Peterson
2,619,209 A	11/1952	Horn
2,814,063 A	11/1957	Ripple
2,950,772 A	8/1960	Dostal et al.

21 Claims, 11 Drawing Sheets

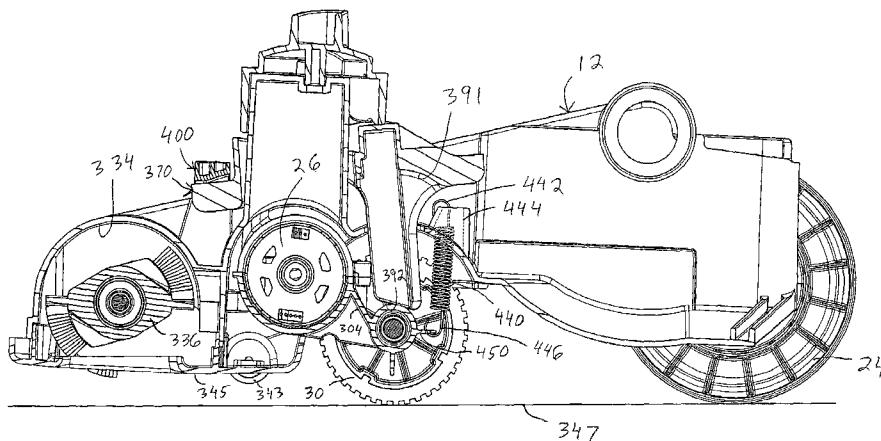


US 7,213,298 B2

Page 2

U.S. PATENT DOCUMENTS					
4,347,643	A	9/1982 Bair, III	5,944,635	A	8/1999 Butler, Jr.
4,434,865	A	3/1984 Tschudy et al.	5,974,622	A	11/1999 Louis et al.
4,615,071	A	10/1986 Frohbieter	6,061,869	A	5/2000 Ettes et al.
4,624,027	A	11/1986 Martin	6,076,230	A *	6/2000 Harsh 15/354
4,754,520	A *	7/1988 Steadings et al. 15/360	6,102,022	A	8/2000 Schave
4,766,640	A	8/1988 Martin et al.	6,108,862	A	8/2000 Frederick et al.
5,042,109	A	8/1991 Stephens	6,169,258	B1	1/2001 Roney
5,056,175	A	10/1991 Stein et al.	6,449,792	B1	9/2002 Myers
5,077,823	A	12/1991 Barry et al.	6,658,692	B2	12/2003 Lenkiewicz et al.
5,115,537	A	5/1992 Meyer et al.	6,741,051	B2	5/2004 Chu
RE34,286	E	6/1993 Toyoshima et al.	2001/0039691	A1	11/2001 Bobrosky et al.
5,269,042	A	12/1993 Stephens et al.	2002/0170137	A1	11/2002 Coates et al.
5,285,550	A	2/1994 Meyer et al.	2002/0174507	A1	11/2002 Kasper et al.
5,335,740	A	8/1994 Meyer et al.	2004/0134019	A1	7/2004 Cipolla et al.
5,455,886	A	10/1995 Glenn et al.	2004/0134020	A1	7/2004 Conner et al.
5,504,971	A	4/1996 McCormick	2004/0135537	A1	7/2004 Conner et al.
5,831,261	A	11/1998 Plesko	2005/0071056	A1	3/2005 Tondra et al.

* cited by examiner

FIG. 1

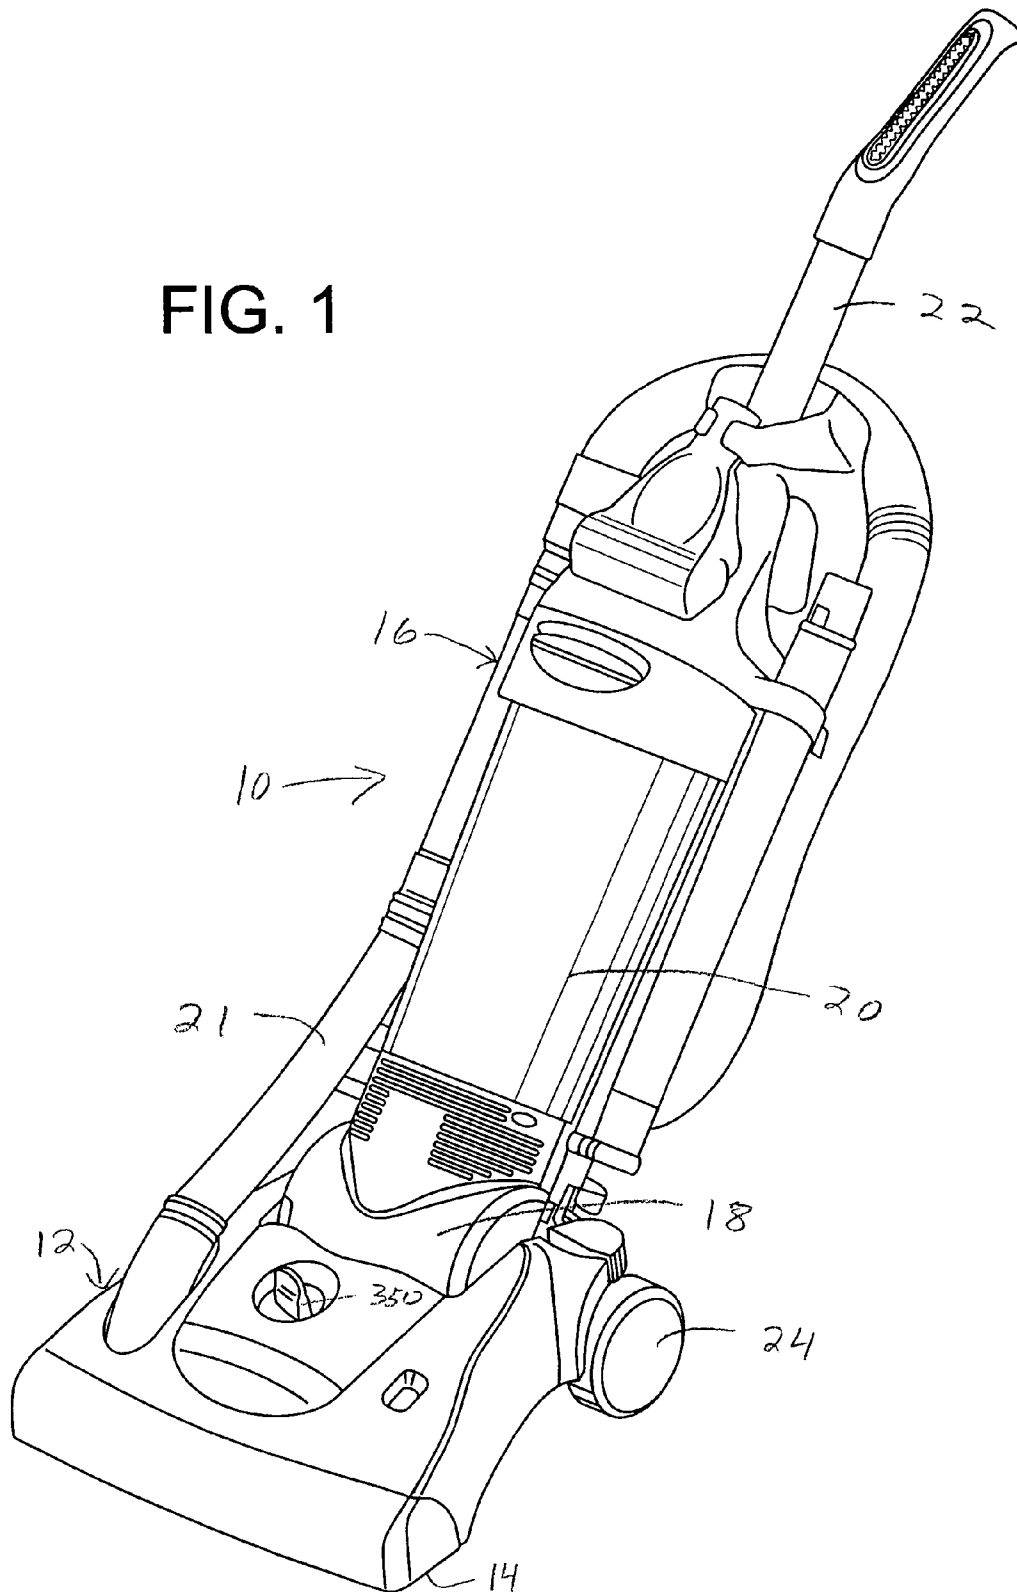

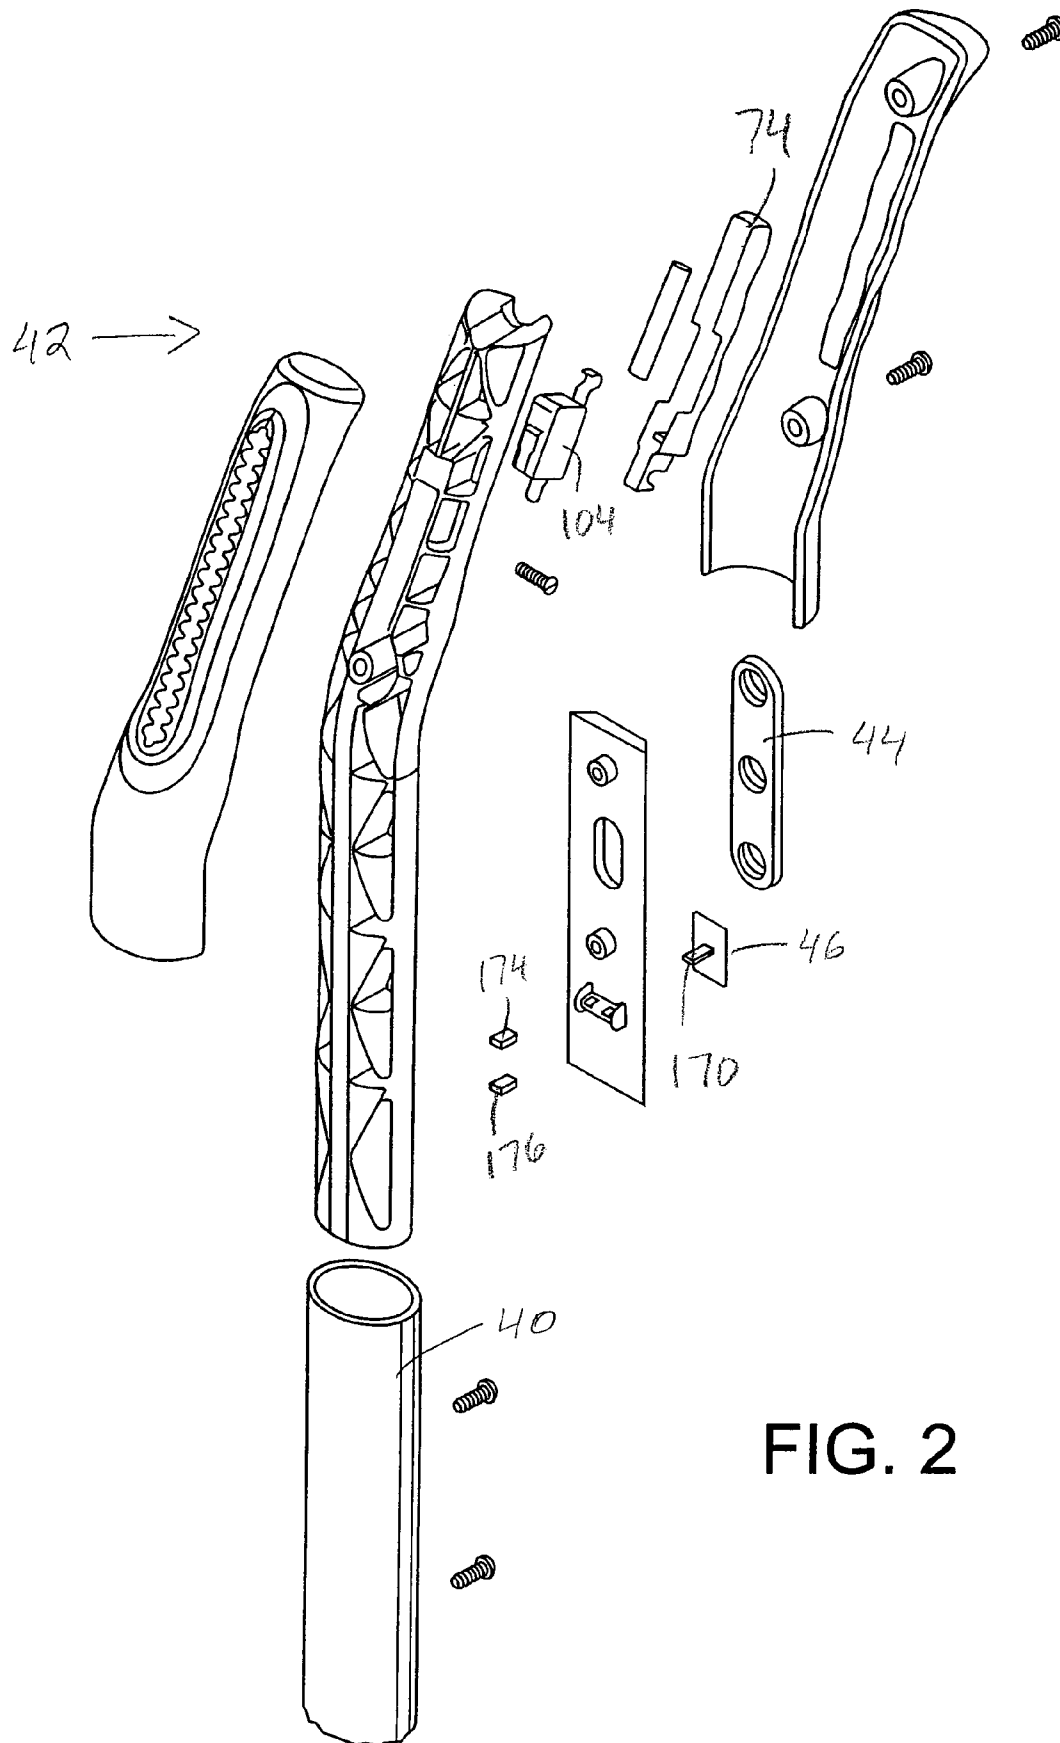


FIG. 2

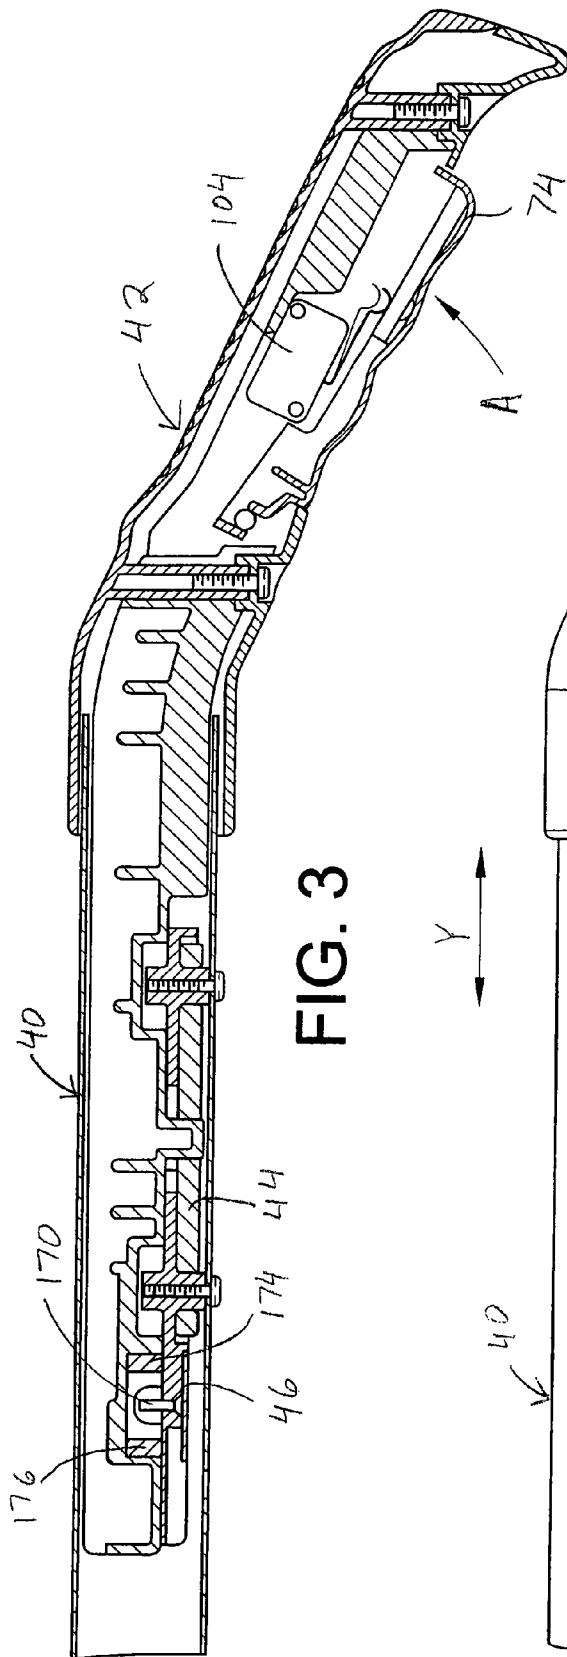


FIG. 3

Y

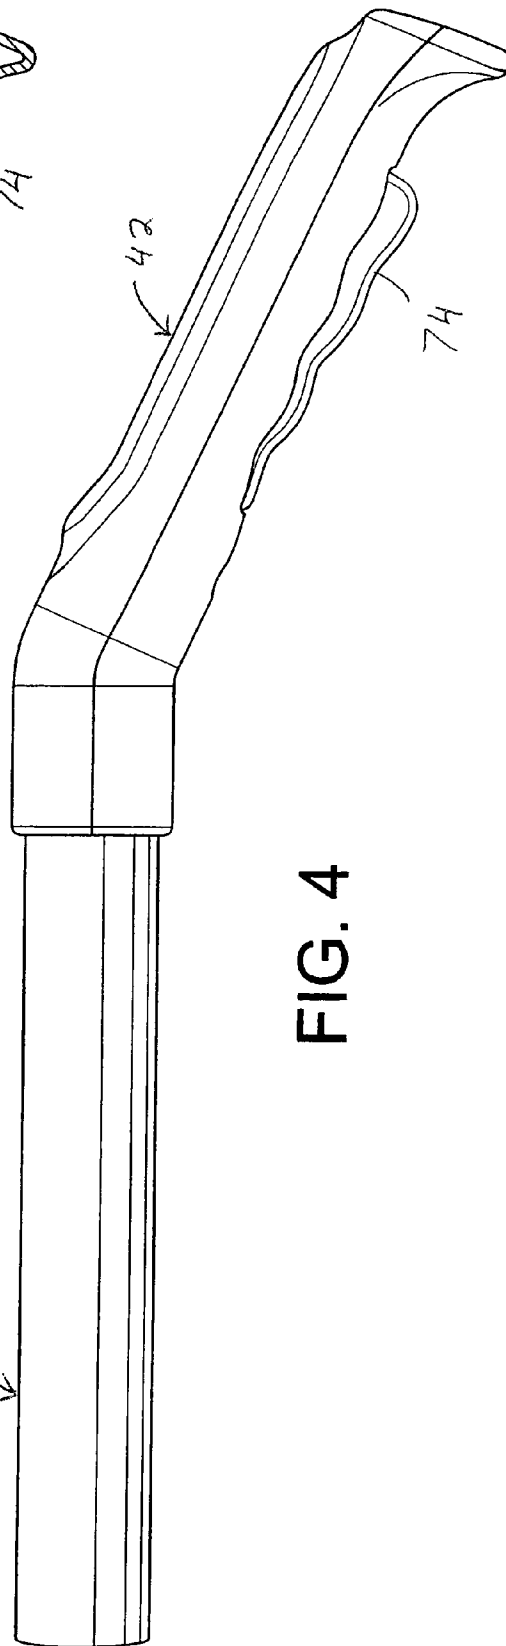
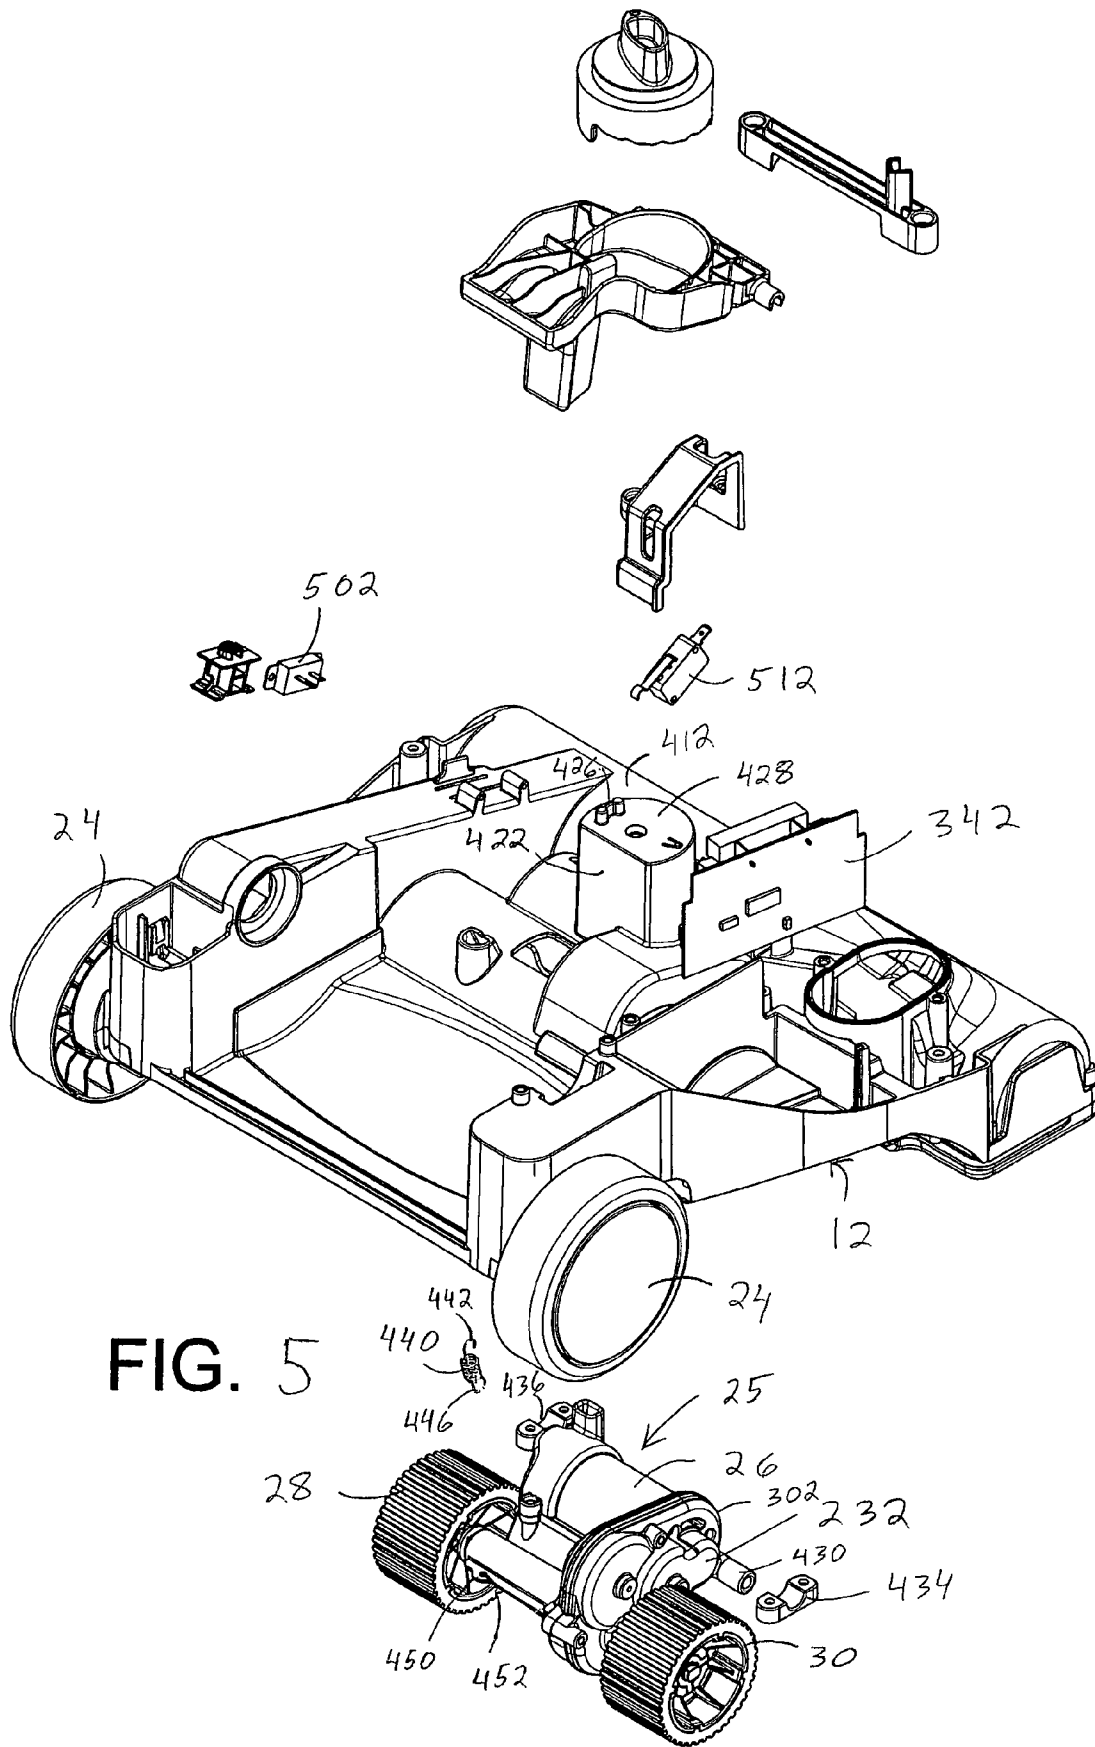


FIG. 4



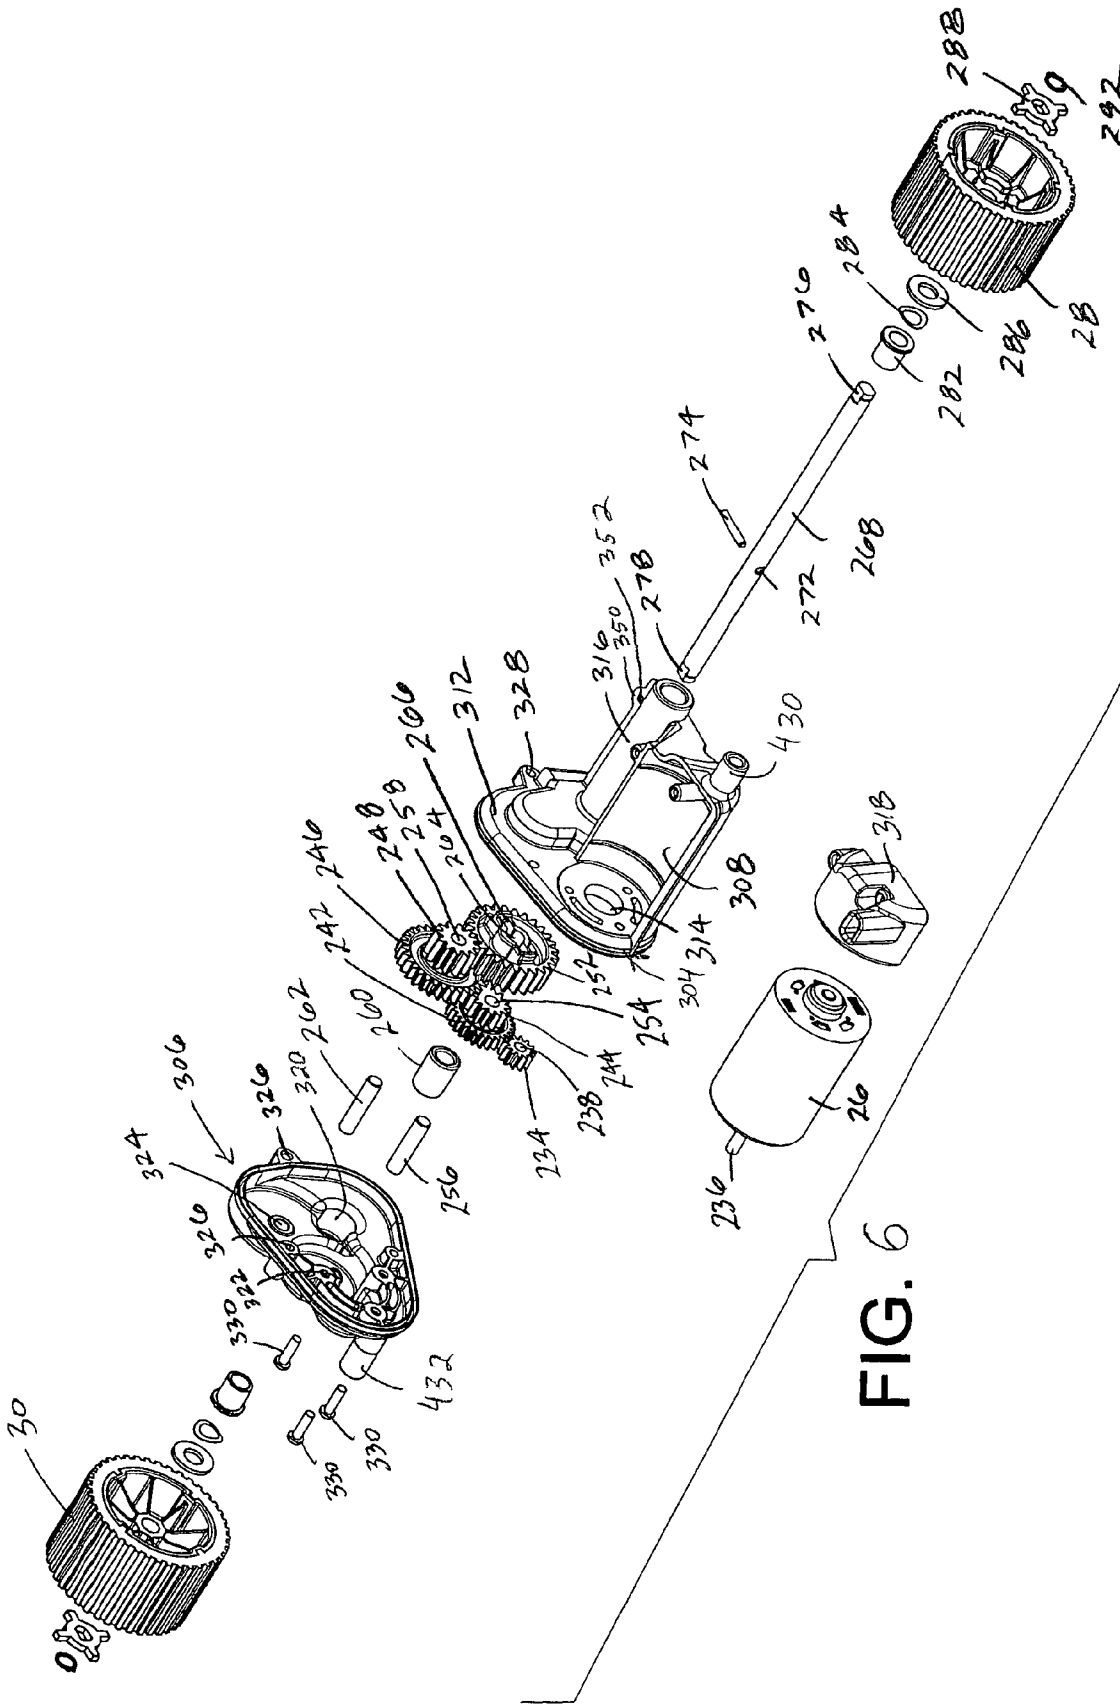


FIG. 6

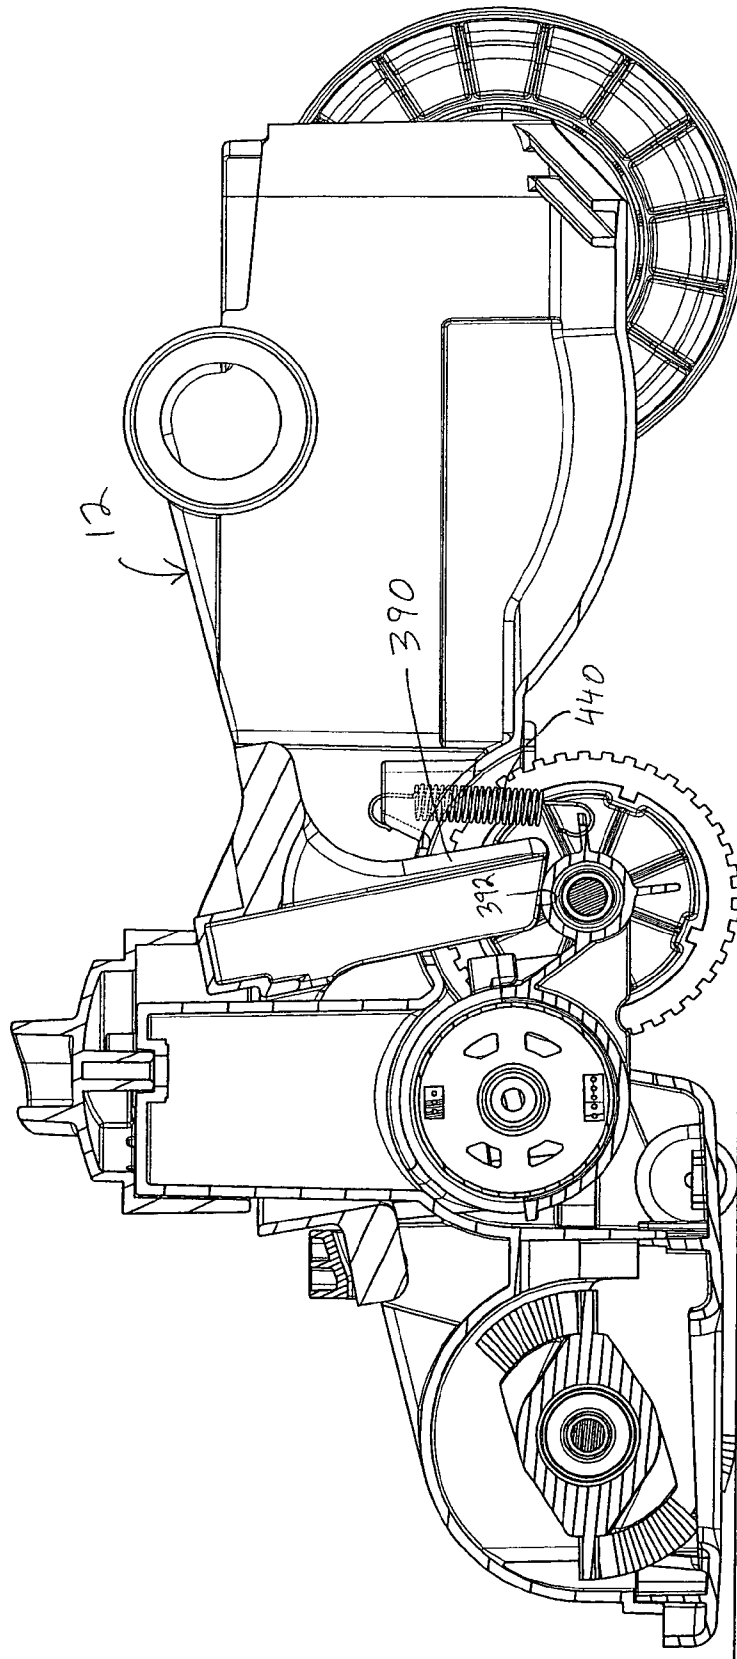


FIG. 7

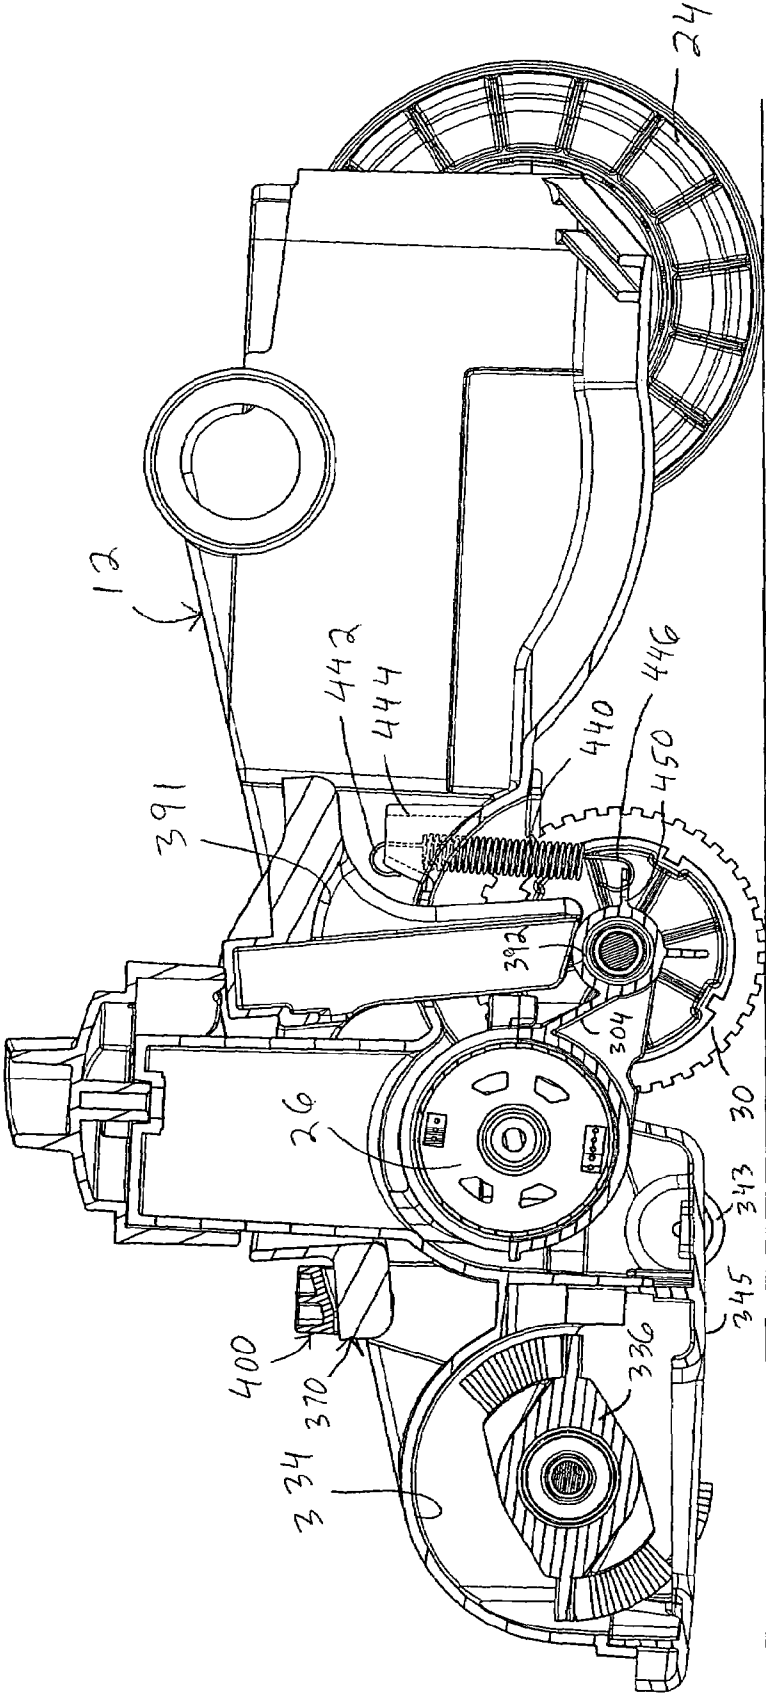


FIG. 8

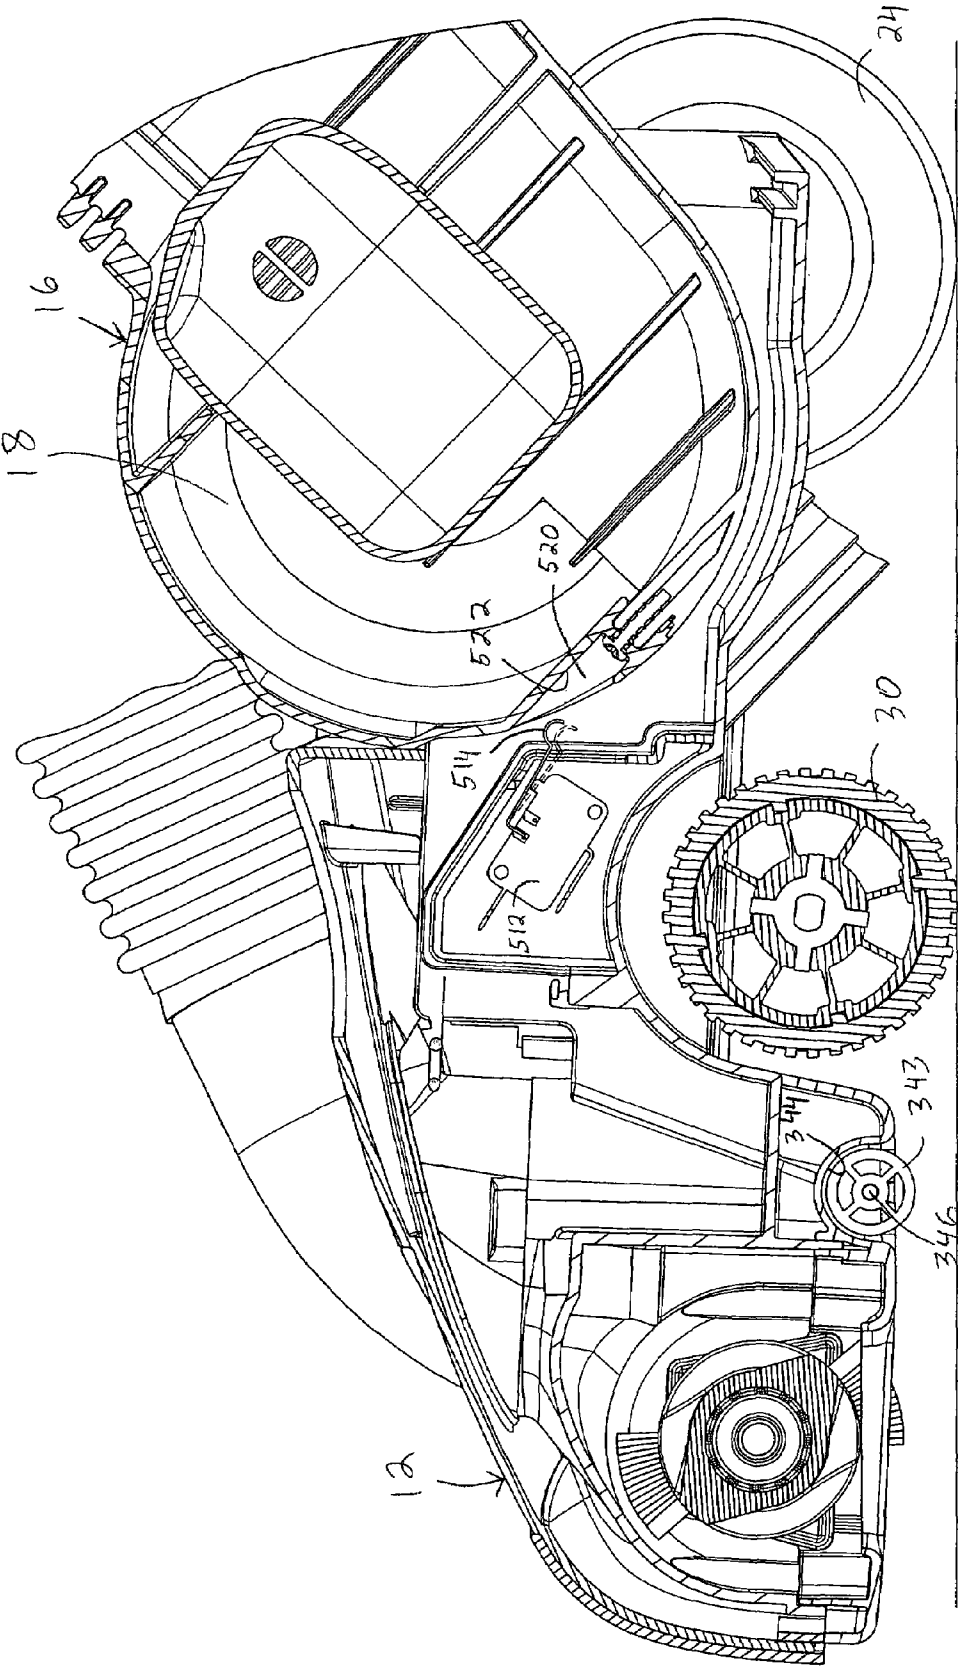


FIG. 9

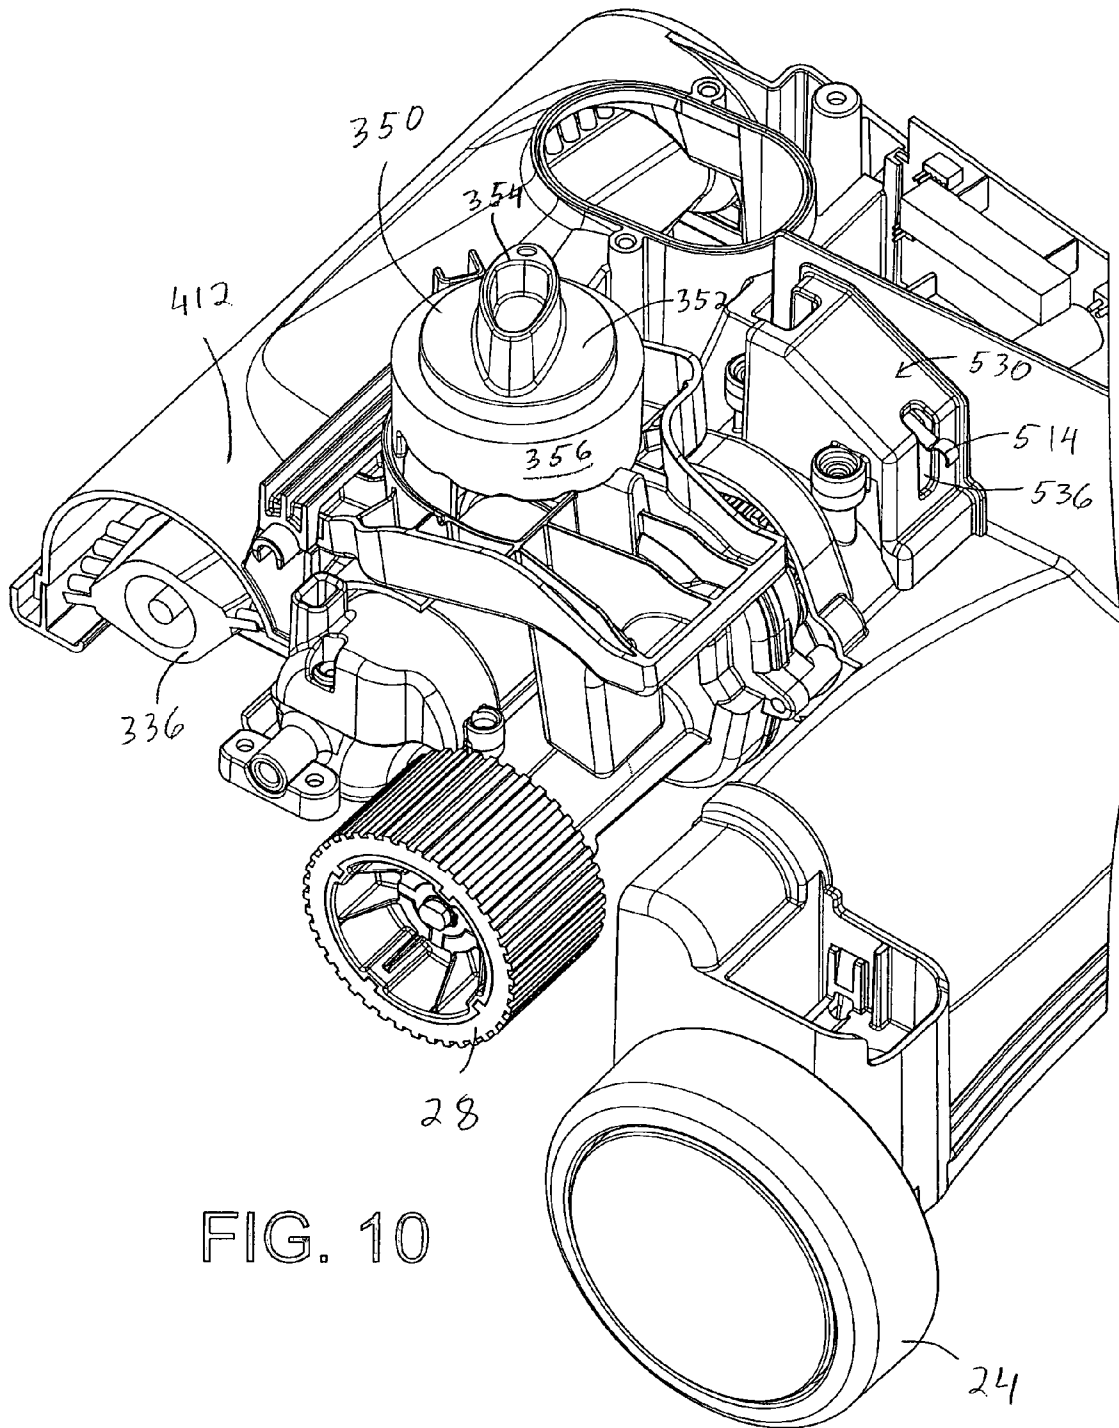


FIG. 10

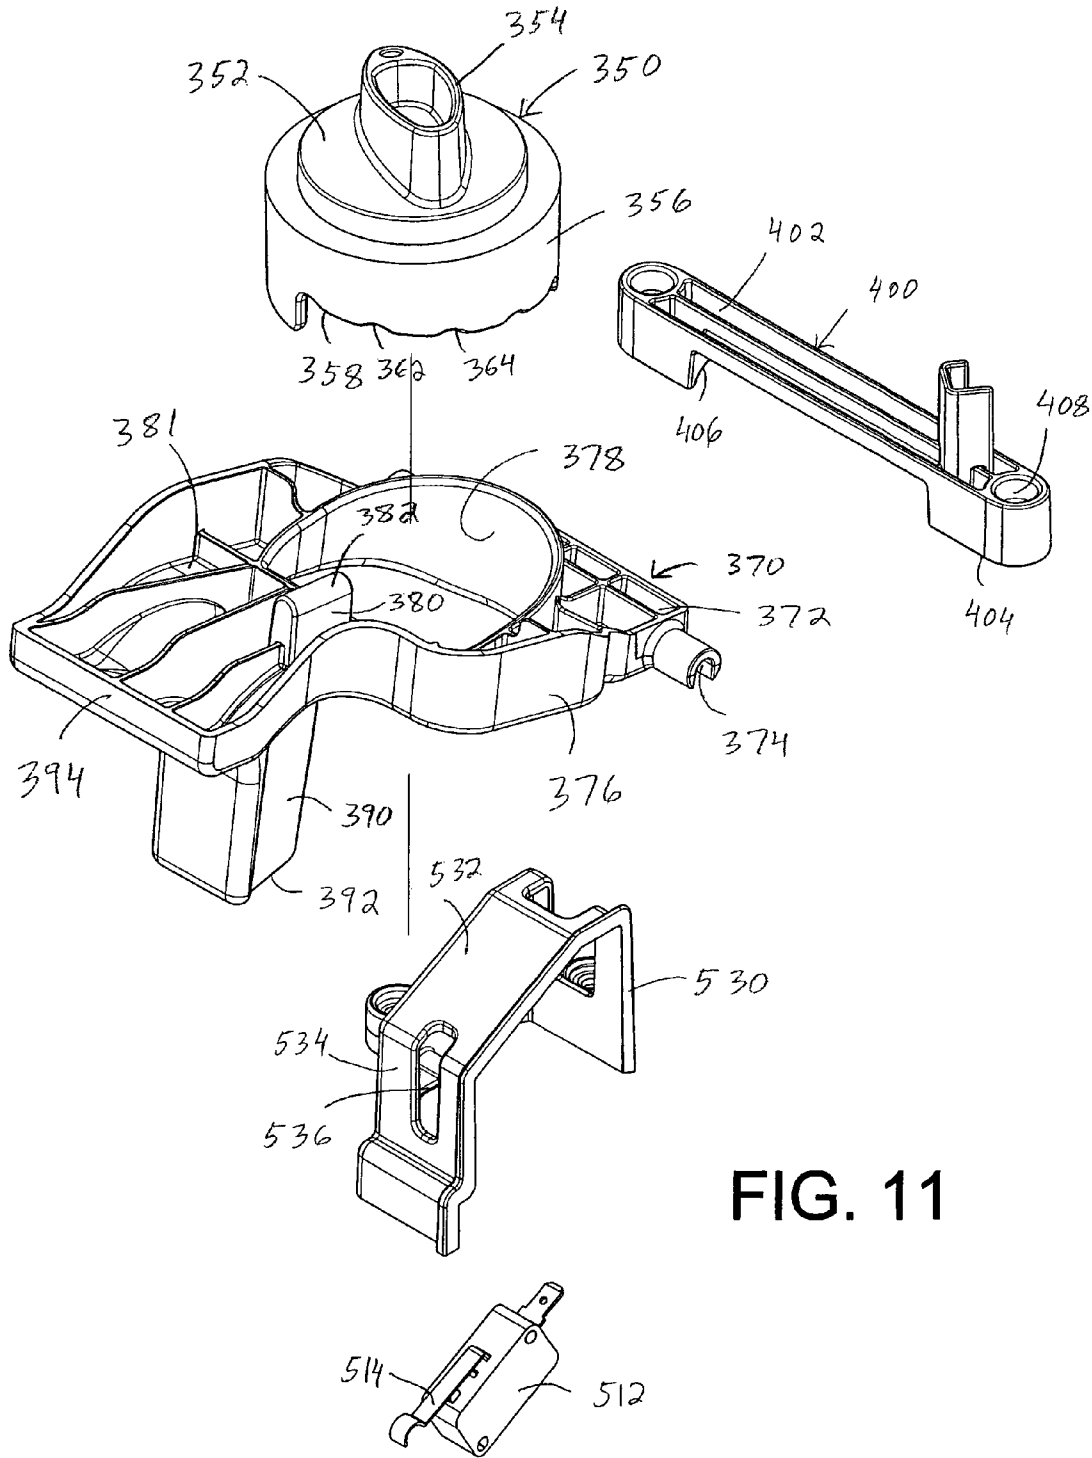


FIG. 11

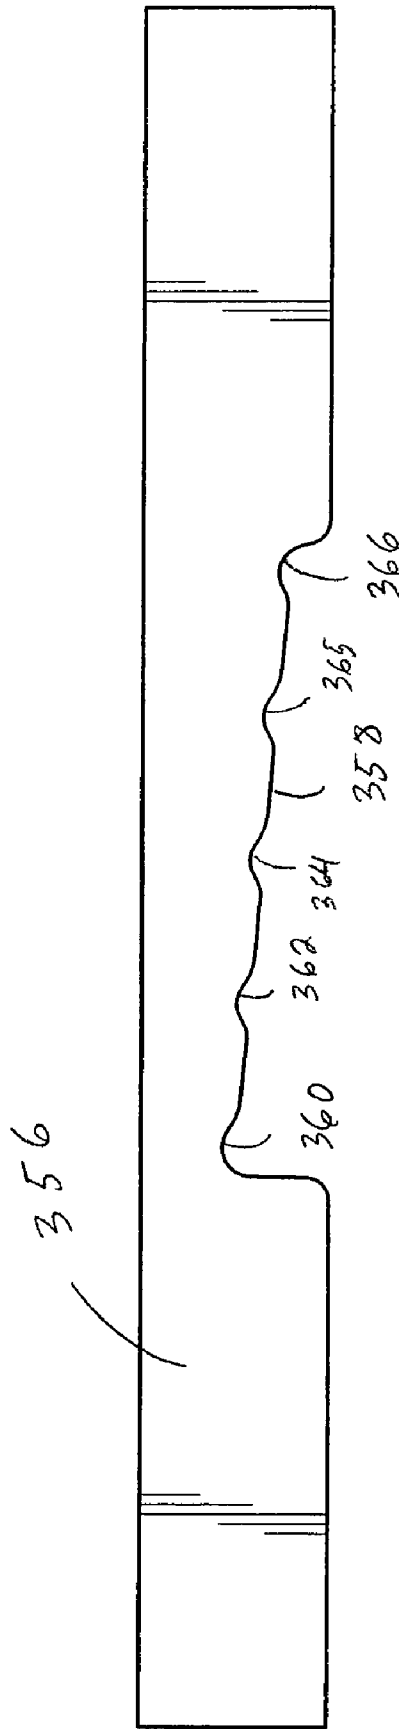


FIG. 12

1

**CLUTCHLESS SELF-PROPELLED VACUUM
CLEANER AND NOZZLE HEIGHT
ADJUSTMENT MECHANISM THEREFOR**

BACKGROUND OF THE INVENTION

This application is a divisional application of U.S. patent application Ser. No. 10/339,191 which was filed on Jan. 9, 2003 and is still pending.

The present invention relates to vacuum cleaners. More specifically, the invention relates to self-propelled vacuum cleaners.

Known self-propelled vacuum cleaners include an electric motor disposed in a nozzle base of the cleaner for driving a set of driven wheels. The drive motor, via a clutch, exerts a driving force on the driven wheels in the direction of movement desired by the operator. Some operators value self-propelled vacuum cleaners because they are easier to move from place to place while vacuuming a room.

In the prior art self-propelled vacuum cleaners, a clutch mechanism is provided to allow the motor, which normally rotates only in a single direction, to drive the vacuum cleaner in both a forward and a reversed direction. It is apparent that clutches add to the complexity of the vacuum cleaner power drive system. Accordingly, it would be desirable to have a clutchless direct drive type vacuum cleaner.

As is well known, vacuum cleaners also include height adjustment mechanisms to enable the vacuum cleaner to be employed on carpeting of various heights or on bare floors. Conventionally, the nozzle base had to include both drive wheels for the power drive mechanism and separate rollers or wheels which were coupled to the nozzle height adjustment mechanism of the vacuum cleaner. Accordingly, it would be desirable to provide a drive mechanism which can also serve as part of a height adjustment mechanism for the vacuum cleaner in order to reduce the number of parts in the nozzle base, thereby reducing both the complexity and the cost of manufacture of the nozzle base.

SUMMARY OF THE INVENTION

According to the present invention, a new and improved self-propelled vacuum cleaner is provided. More particularly, in accordance with one aspect of the invention, a clutchless direct drive, self-propelled vacuum cleaner comprises a nozzle base having a suction inlet and a housing pivotally mounted on the nozzle base. A suction source is mounted to one of the nozzle base and the housing. A filter chamber is located in one of the nozzle base and the housing. A drive motor is mounted to one of the nozzle base and the housing, the drive motor having an output shaft. A transmission is directly coupled to the output shaft of the motor and a driven wheel is directly coupled to the transmission.

In accordance with another aspect of the invention, a direct drive self-propelled vacuum cleaner is provided. More particularly, in accordance with this aspect of the invention, a nozzle base having a suction inlet is provided and a housing is pivotally mounted on the nozzle base. A suction source is mounted to one of the nozzle base and the housing. A filter chamber is located in one of the nozzle base and the housing. A drive motor is mounted to one of the nozzle base and the housing with the drive motor having an output shaft. A control is located in one of the housing and the nozzle base for directing a rotational direction and speed of the drive motor. A transmission is directly coupled to the output shaft of the drive motor. A driven wheel is directly coupled to the transmission.

2

In accordance with still another aspect of the invention, a height adjustment mechanism is provided for a self-propelled vacuum cleaner. The height adjustment mechanism comprises a nozzle base having a suction inlet, an upright housing pivotally mounted to the nozzle base and a suction source mounted to one of the nozzle base and the upright housing. A filter chamber is located in one of the nozzle base and the upright housing. A drive motor is mounted on a motor housing pivotally connected to the nozzle base. A driven wheel is connected to the drive motor. A height adjustment control is mounted to the nozzle base and a cam is connected to the height adjustment control. A height adjustment lifter is pivotally mounted to the nozzle base and cooperates with the cam. The height adjustment lifter contacts the motor housing to rotate same and thus adjust a height of the suction inlet in relation to an associated subjacent support surface.

In accordance with yet another aspect of the present invention, a height adjustment mechanism is provided for a self-propelled vacuum cleaner. More particularly, in accordance with this aspect of the invention, a nozzle base having a suction inlet is provided. At least one wheel is rotatably mounted to the nozzle base for supporting the nozzle base on an associated subjacent support surface. A housing is connected to the nozzle base and a suction source is mounted to one of the nozzle base and the housing. A filter chamber is located in one of the nozzle base and the housing. A drive motor is mounted to the nozzle base, the drive motor having an output shaft. A driven wheel is coupled to the drive motor output shaft. A height adjustment control is mounted to the nozzle base and a cam is connected to the height adjustment control. A height adjustment lifter is pivotally mounted to the nozzle base and cooperates with the cam, wherein the height adjustment lifter contacts the motor housing to rotate same and thus adjust a height of the suction inlet in relation to the associated surface.

The advantages and benefits of the present invention will become apparent to those of ordinary skill in the art upon a reading and understanding of the following detailed description of the preferred embodiment.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings are only for purposes of illustrating a preferred embodiment of the present invention and are not to be construed as limiting same. The invention may take form in various components and arrangements of components and in various steps and arrangements of steps, a preferred embodiment of which will be illustrated in the accompanying drawings and wherein:

FIG. 1 is a perspective view illustrating a self-propelled upright vacuum cleaner in accordance with the present invention;

FIG. 2 is an enlarged exploded perspective view of an upper portion of the vacuum cleaner including a handle assembly;

FIG. 3 is an assembled side elevational view, in cross-section, of a handle assembly of FIG. 2;

FIG. 4 is a side elevational view of the handle assembly of FIG. 3;

FIG. 5 is an enlarged exploded perspective view of a base assembly of the vacuum cleaner of FIG. 1;

FIG. 6 is an enlarged exploded perspective view of a drive motor and transmission assembly of the vacuum cleaner of FIG. 1;

FIG. 7 is an enlarged side elevational view of the nozzle base of FIG. 1, in section, illustrating the drive wheels of a

3

power drive assembly of the vacuum cleaner in an up position and a nozzle adjacent a floor surface;

FIG. 8 is an enlarged side elevational view of the nozzle base of FIG. 1 illustrating the drive wheels of the power drive mechanism in a down position and the nozzle spaced from the floor surface;

FIG. 9 is an enlarged side elevational view of the nozzle base of FIG. 8 along another section;

FIG. 10 is a reduced perspective view of the nozzle base of FIG. 9;

FIG. 11 is an enlarged exploded perspective view of various height adjustment components and controls of the vacuum cleaner of FIG. 10; and,

FIG. 12 is a developed view of a side wall of a nozzle height adjusting knob of the vacuum cleaner of FIG. 11 illustrating a cam surface thereof.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the figures wherein the showings are for purposes of illustrating a preferred embodiment of the present invention and not for purposes of limiting same, FIG. 1 illustrates a self-propelled upright vacuum cleaner 10. The upright vacuum cleaner includes a nozzle base 12 having a suction inlet 14. An upright housing 16 is pivotally mounted on the base 12. A suction source 18, which conventionally includes a motor fan assembly is disposed in one of the base 12 and the upright housing 16. As best shown in FIG. 9, the motor is mounted in a lower portion of the upright housing 16.

A filter chamber 20 is mounted to one of the base and the upright housing. The suction source communicates the suction inlet 14, through conduits, such as the hose illustrated at 21, with the filter chamber 20, as is well known in the art. The filter chamber 20 and its communication with the suction inlet is discussed in greater detail in application Ser. No. 10/224,483 which was filed on Aug. 20, 2002 and is entitled "Vacuum Cleaner Having Hose Detachable at Nozzle". That application is incorporated herein by reference in its entirety. In order to allow a user to maneuver the vacuum cleaner, a handle assembly 22 is mounted to the upright housing 20. Also, a pair of rear wheels 24 (see FIG. 5) support the base 12 above the surface meant to be cleaned in order to facilitate movement of the vacuum cleaner across the surface.

With reference now to FIG. 5, the vacuum cleaner 10 includes a drive assembly 25 including a drive motor 26 operatively connected to driven wheels 28 and 30 such that the drive motor drives the wheels to propel the base. With reference again to FIG. 1, an operator of the vacuum cleaner can control the speed and direction of rotation of the wheels 28 and 30 by manipulating the handle assembly 22. The drive motor 26 is in communication via circuitry (not shown) with a sensor assembly, which will be described in more detail below, located in the handle assembly 22. As the operator manipulates the handle assembly 22, the drive motor 26 reacts to propel the base accordingly.

With reference now to FIG. 2, the handle assembly 22 includes an upper handle 40, a handle grip assembly 42, a neutral return spring 44 and a sensor assembly 46 that communicates through known electrical circuitry (not shown) to control the speed and direction of rotation of the motor 26. Additional description of the handle assembly, the neutral return spring and the sensor assembly is found in a patent application entitled "Self-propelled Vacuum Cleaner With Neutral Return Spring", Ser. No. 10/339,749, filed on

4

Jan. 9, 2003. The subject matter of that application is incorporated by reference hereinto in its entirety.

Briefly, a switch trigger 74 on the handle grip assembly 42 is employed to selectively actuate the drive motor 26. The switch trigger actuates a switch 104 which is electrically connected via circuitry (not shown) to a power cord (not shown) that can connect to an external power source. The power source supplies power to the suction source 18 and to the drive motor 26. To activate the switch 104, and thus to power the drive motor 26, the operator depresses the trigger 74 as depicted by arrow A in FIG. 3. Letting go of the trigger 74 will deactivate the drive motor 26. A separate switch (not visible in FIG. 1) is used to selectively power the suction source 18. As described in the copending application referenced above, the sensor assembly 46 can include a Hall effect probe 170 and a pair of spaced magnets 174 and 176. The neutral return spring has inherent damping characteristics to reduce the possibility of directing the motor to quickly change from a forward rotation to a backward rotation, and back again, instead of simply stopping its rotation when a pulling or pushing force, indicated by arrow Y in FIG. 4, on the hand grip assembly 42 is stopped by the operator.

As mentioned, the operator manipulates the handle assembly 22 to control the direction and speed of rotation of the drive motor 26. To this end, and with reference again to FIG. 5, the drive motor 26 can be a brushless DC reversible motor. Accordingly, a rectifier (not shown) is positioned somewhere in the electronic circuitry to convert AC power of an external power source to DC power for the motor. Of course, it should be recognized that an AC motor could be provided as well, thus obviating the need for a rectifier. The motor 26 drives a transmission 232 which in turn drives the wheels 28 and 30. The motor 26 is illustrated to be a direct drive motor, thus, eliminating the need for a clutch in the transmission to reverse the direction of rotation of the transmission and the driven wheels 28, 30.

With reference now to FIG. 6, the transmission 232 includes a pinion gear 234 driven by an output shaft 236 of the motor 26. The output shaft 236 is received in an opening 238 in the pinion gear 234. The pinion gear drives a first gear 242 which includes a toothed extension 244. The extension 244 intermeshes with and drives an intermediate gear 246, that also includes an extension 248. Intermeshing with the extension 248 is a sprocket 252 driven thereby. The first gear 242 and the extension 244 include an opening 254 to receive a first gear shaft 256. The intermediate gear 246 and the extension 248 include an opening 258 to receive a second gear shaft 262. A gear spacer 260 is positioned between the first gear 242 and its housing.

The sprocket 252 includes an opening 264 having a keyed notch 266. Received in the opening 264 is an axle 268. The axle 268 includes a bore 272 to receive a pin 274. The pin 274 is received in the keyed notch 266 to lock the axle 268 to the sprocket 252. Accordingly, as the sprocket 252 rotates, it turns the axle 268. Mounted on the axle 268 are the driven wheels 28 and 30. Although a specific type of transmission has been described herein, it should be apparent to one of ordinary skill in the art that the invention encompasses many different types of transmissions.

Included on the axle 268 is a first squared end 276 that is received in an opening (not shown) in the first wheel 28 and a second squared end 278 that is received in an axle opening in the second wheel 30. A bearing 282, a curved washer 284 and a flat washer 286 are received on the axle 268. A wheel lock 288 and a retainer ring 292 are received on the squared end 276 to fasten the wheel 28 to the axle. A similar mounting arrangement is provided for the wheel 30.

5

Although a specific type of connection between the wheels **28** and **30** and the axle **268** has been disclosed, it should be apparent that the invention encompasses any type of connection between axles and wheels that is generally known in the art.

Enclosing the transmission **232** is a transmission housing **302** (FIG. 5). The transmission housing **302** includes a first half **304** and a second half **306** of a clam shell type housing. The first half **304** includes a well **308** to receive the motor **26**. The well abuts a wall **312** of the first clam shell half on one end. Protruding through an opening **314** in the wall **312** is the output shaft **236** of the motor **26**. The first half **304** of the housing also includes an axle housing **316** which comprises a hollow cylindrical portion that receives the axle **268**. A motor cover **318** mounts over the well **308** to secure the motor **26** in place when it is positioned in the well.

The second clam shell housing half **306** also includes an axle housing **320** to receive the axle **268**. Included in the second half **306** is a first shaft opening **322** to receive the gear shaft **256** of the first gear **242** and an intermediate shaft opening **324** to receive the gear shaft **262** of the intermediate gear **246**. Further, the second half also includes openings **326** that align with openings **328** on the first half **304** to receive conventional fasteners **330** for attaching the first housing half to the second housing half.

With reference now briefly to FIG. 8, the base **12** includes a cavity **334** to house a brushroll **336**. As shown in FIG. 5, a circuit board **342** is mounted to the base **12** and is electronically connected to the sensor assembly **46** described above. The sensor assembly **46**, which could also be termed a detector assembly, delivers a signal to the circuit board **342** which translates the signal to control the direction of rotation and speed of the motor **26**. The circuit board **342** can include various circuits to treat the electrical signal sent to the motor **26** and other controls for the motor. Such circuits and controls are disclosed in copending applications entitled "Control Circuitry for Enabling Drive System For Vacuum Cleaner", Ser. No. 10/339,097, filed on Jan. 9, 2003 and "Electronically Commutated Drive System For A Vacuum Cleaner", Ser. No. 10/339,122, filed on Jan. 9, 2003. The subject matter of these two applications is incorporated hereinto by reference in their entireties.

With reference now to FIG. 9, also provided on a nozzle base **12** is at least one roller **343** which is mounted in a roller well **344** defined on a bottom face **345** of the housing **12**. A roller axle **346** pivotally mounts the roller. It is apparent from FIG. 9 that the roller is located behind the brushroll **336** but in front of the drive wheels **28** and **30**. Two such rollers can, if desired, be located on the nozzle base bottom face **345**. The rollers are meant to support the nozzle base adjacent its nozzle opening **14** so as to prevent the nozzle opening from approaching a subjacent surface **347** too closely.

With reference now to FIG. 10, a height adjustment control **350** includes a top wall **352** extending from which is a knob **354**. Also provided is a side wall **356**. With reference now also to FIG. 12, defined in the side wall is a cam surface **358**. The cam surface includes first through fifth sections **360-366**, which are of different heights.

With reference now to FIG. 11, cooperating with the height adjustment control **350** is a height adjustment lifter **370** which includes a first end **372**. Defined in a first end, on opposed sides thereof, are stubs **374**. A central portion **376** of the lifter has a reversed D-shaped opening **378**. A first projection **380** extends from a first face **381** of the lifter **370**. A contact surface **382** is provided on a distal end of the projection **380**. As also shown in FIG. 7, a second projection

6

390 extends from a second surface **391** of the lifter. The second projection includes a contact surface **392**. Positioned opposite the first end **372** is a second end **394** of the lifter.

Connecting the lifter to the nozzle base **12** is a lifter clamp **400**. The clamp has an upper surface **402** and a lower surface **404**. Defined in the lower surface are channel sections **406**. The channel sections are meant to accommodate the lifter first end stubs **374** so as to allow a pivoting motion of the lifter first end in the channel sections. Transverse apertures **408** extend through opposed ends of the clamp for accommodating suitable fasteners (not illustrated) in order to secure the clamp in place on a pair of bosses (not visible) extending from an upper surface **412** (FIG. 10) of the nozzle base **12**.

With reference again to FIG. 5, a stub **422** extends from the upper surface **412**. The stub is suitably shaped and sized so as to fit through the opening **378** in the height adjustment lifter **370**. A suitable fastener (not illustrated) secures the height adjustment control **350** to the stub **422** thereby trapping the height adjustment lifter **370** in place. This is best illustrated in FIGS. 7 and 8. A stop **426** is defined on an upper surface **428** of the stub **422** to limit rotation of the control **350**.

The drive assembly, including the drive motor **26** and the transmission housing **302** to which the motor is mounted, together with the wheels **28** and **30**, is pivotally mounted on the nozzle base **12**. To this end, the transmission housing includes stubs **430** and **432**, as best shown in FIG. 6. The stubs are mounted in respective supports **434** and **436** (FIG. 5) that are secured via fasteners (not shown) to the nozzle base **12**. Thus, the drive assembly can pivot in relation to the nozzle base **12**.

In order to bias the power drive assembly (including the motor **26** and the wheels **28** and **30**) towards the nozzle base, a spring **440** is provided. As best shown in FIG. 8, the spring has a first end **442** which extends over a hollow protrusion **444** of the nozzle base **12**. A second end **446** of the spring is connected to the first half **304** of the transmission housing. For this purpose, an ear **450** defined on the first half **304** is provided with an aperture **452** to accommodate the spring second end **446**, as best shown in FIG. 5.

With reference again to FIG. 5, a speed selector switch **502** can be mounted to the nozzle base **12**. The selector switch can control the rotational speed of the motor **26**. Also mounted to the nozzle base is an enable switch **512**. With reference now also to FIG. 9, the enable switch **512** has an arm **514** which extends into a recess **520** defined in the upper housing **16**. To this end, when the upper housing is rotated towards a substantially upright position so that it is substantially perpendicular to the subjacent surface **347**, the arm **514** will contact a wall **522** of the recess thereby deactivating the drive motor **26**. As is evident from FIG. 11, a housing **530** encloses the enable switch **512** except that, defined in a rearwardly angled and a rear surface **534** upper surface **532** of the housing **530** is a slot **536**. As shown in FIG. 10, the arm **514** protrudes through the slot **536**.

As the height adjustment control **350** is rotated, various ones of the cam surface sections **360-366** come into contact with the contact surface **382** of the first projection **380** of the height adjustment lifter **370**. Since the control **350** is rotatably mounted on the stub **422** of the nozzle base **12**, and the cam surface sections **360-366** are disposed at different heights along the side wall **356**, the height adjustment lifter **370** is constrained to pivot up and down in relation to the nozzle base **12**. Such pivoting will cause the second projection contact surface **392** to push on the axle housing **316** of the transmission **232**. The drive assembly **25** is thus

7

rotated downwardly against the bias of spring 440, as is evident from a comparison of FIGS. 7 and 8. When the height adjustment control is again rotated to a lower height setting, both gravity and spring 440 will urge the drive assembly 25 to retract into the nozzle base 12, thus lowering the suction opening 14 towards the floor surface 347. Thus, the drive motor 26 serves two purposes, both as a means for propelling the nozzle base and as part of the height adjustment mechanism for the nozzle base.

While the motor 26 is illustrated as driving two wheels 28 and 30, it should be appreciated that the motor could drive only a single wheel or more than two wheels if so desired. Also, while the power drive motor is illustrated as being mounted to the nozzle base, it could, instead, be mounted to a suitably configured upright housing if so desired. In a design where the upright housing carries the rear wheels of the vacuum cleaner, the drive motor could be coupled to the rear wheels or to one or more separate wheels. In such a design, if coupled to the rear wheels, no extra drive wheels would be required. However, the drive mechanism would not then form part of the height adjustment system of the vacuum cleaner. While the preferred embodiment has been described with reference to such terms as "upper", "lower", "vertical", and the like, these terms are used for better understanding of the invention and with respect to the orientation of the vacuum cleaner and the surface to be cleaned. However, these terms are not meant to limit the scope of the invention.

The invention has been described with reference to a preferred embodiment. Obviously, modifications and alterations will occur to others upon a reading and understanding of the preceding detailed description. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims and the equivalents thereof.

Having thus described the preferred embodiments, the invention is now claimed to be:

1. A height adjustment mechanism for a self propelled vacuum cleaner comprising:

- a nozzle base having a suction inlet;
- an upright housing pivotally mounted to said nozzle base;
- a suction source mounted to one of said nozzle base and said upright housing;
- a filter chamber located in one of said nozzle base and said upright housing;
- a drive motor mounted to a motor housing pivotally connected to said nozzle base,
- a driven wheel connected to said drive motor;
- a height adjustment control mounted to said nozzle base;
- a cam connected to said height adjustment control;
- a height adjustment lifter pivotally mounted to said nozzle base and cooperating with said cam, wherein said height adjustment lifter contacts said motor housing to rotate same and thus adjust a height of said suction inlet in relation to an associated subjacent support surface.

2. The height adjustment mechanism of claim 1 wherein said height adjustment lifter comprises a protrusion and said drive motor housing comprises a portion which is contacted by said protrusion.

3. The height adjustment mechanism of claim 1 further comprising a clamp for pivotally mounting said height adjustment lifter to said nozzle base.

4. The height adjustment mechanism of claim 1 wherein said motor housing comprises a pair of opposed stubs which are mounted in supports secured to said nozzle base for allowing a pivoting motion of said motor housing on said nozzle base.

8

5. The height adjustment mechanism of claim 1 further comprising a roller mounted to said nozzle base for supporting at least a portion of said nozzle base on the associated surface.

6. A height adjustment mechanism for a self propelled vacuum cleaner comprising:

- a nozzle base having a suction inlet;
- at least one wheel rotatably mounted to said nozzle base for supporting said nozzle base on an associated subjacent support surface;
- a housing connected to said nozzle base;
- a suction source mounted to one of said nozzle base and said housing;
- a filter chamber located in one of said nozzle base and said housing;
- a drive motor mounted to said nozzle base, said drive motor having an output shaft;
- a driven wheel coupled to said drive motor output shaft;
- a height adjustment control mounted to said nozzle base;
- a cam connected to said height adjustment control;
- a height adjustment lifter pivotally mounted to said nozzle base and cooperating with said cam, wherein said height adjustment lifter contacts said motor housing to rotate same and thus adjust a height of said suction inlet in relation to the associated surface.

7. The height adjustment mechanism of claim 6 wherein said height adjustment lifter comprises a protrusion and said drive motor housing comprises a portion which is contacted by said protrusion.

8. The height adjustment mechanism of claim 6 further comprising a clamp for pivotally mounting said height adjustment lifter to said nozzle base.

9. The height adjustment mechanism of claim 6 wherein said motor housing comprises a pair of opposed stubs which are mounted in supports secured to said nozzle base for allowing a pivoting motion of said motor housing on said nozzle base.

10. The height adjustment mechanism of claim 6 further comprising a roller mounted to said nozzle base for supporting at least a portion of said nozzle base on the associated surface.

11. The height adjustment mechanism of claim 6 wherein said height adjustment control comprises a knob rotatably mounted to said nozzle base.

12. A height adjustment mechanism for a self propelled vacuum cleaner comprising:

- a nozzle base having a suction inlet;
- an upright housing pivotally mounted to said nozzle base;
- a suction source mounted to one of said nozzle base and said upright housing;
- a filter chamber located in one of said nozzle base and said upright housing;
- a drive assembly pivotally connected to said nozzle base, said drive assembly including a motor and a driven wheel; and,
- a height adjustor mounted to said nozzle base and cooperating with said drive assembly to adjust a height of said suction inlet in relation to an associated subjacent support surface.

13. The height adjustment mechanism of claim 12 wherein said height adjustor comprises a protrusion and said drive assembly further comprises a portion which is contacted by said protrusion.

14. The height adjustment mechanism of claim 13 wherein said drive assembly further comprises a motor housing which comprises a pair of opposed stubs which are

mounted in supports secured to said nozzle base for allowing a pivoting motion of said motor housing on said nozzle base.

15. The height adjustment mechanism of claim 12 further comprising a roller mounted to said nozzle base for supporting at least a portion of said nozzle base on the associated surface.

16. A height adjustment mechanism for a self propelled vacuum cleaner comprising:

- a nozzle base having a suction inlet;
- at least one wheel rotatably mounted to said nozzle base for supporting said nozzle base on an associated subjacent support surface;
- a housing connected to said nozzle base;
- a suction source mounted to one of said nozzle base and said housing;
- a filter chamber located in one of said nozzle base and said housing;
- a driven wheel coupled to a drive motor which is rotatably mounted to said nozzle base; and,
- a height adjustment control mechanism mounted to said nozzle base wherein said height adjustment control mechanism cooperates with said drive motor to adjust a height of said suction inlet in relation to the associated surface.

17. The height adjustment mechanism of claim 16 wherein said height adjustment control mechanism comprises a protrusion and said drive motor includes a portion which is contacted by said protrusion.

18. The height adjustment mechanism of claim 17 further comprising a housing for said drive motor, said drive motor housing being contacted by said protrusion.

19. The height adjustment mechanism of claim 18 wherein said motor housing comprises a pair of opposed stubs which are mounted in supports secured to said nozzle base for allowing a pivoting motion of said motor housing on said nozzle base.

20. The height adjustment mechanism of claim 16 further comprising a roller mounted to said nozzle base for supporting at least a portion of said nozzle base on the associated surface.

21. The height adjustment mechanism of claim 16 wherein said height adjustment control mechanism further comprises a knob rotatably mounted to said nozzle base.

* * * * *