



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau

(43) International Publication Date  
02 January 2020 (02.01.2020)



(10) International Publication Number  
**WO 2020/001981 A1**

- (51) International Patent Classification:  
*B04B 11/08* (2006.01)
- (21) International Application Number:  
PCT/EP2019/065387
- (22) International Filing Date:  
12 June 2019 (12.06.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
18179557.6 25 June 2018 (25.06.2018) EP
- (71) Applicant: **ALFA LAVAL CORPORATE AB** [SE/SE];  
P. O. Box 73, SE-221 00 LUND (SE).
- (72) Inventor: **BORGSTRÖM, Leonard**; Römbärsvägen 8,  
SE-135 42 TYRESÖ (SE).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,  
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,  
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: CENTRIFUGAL SEPARATOR

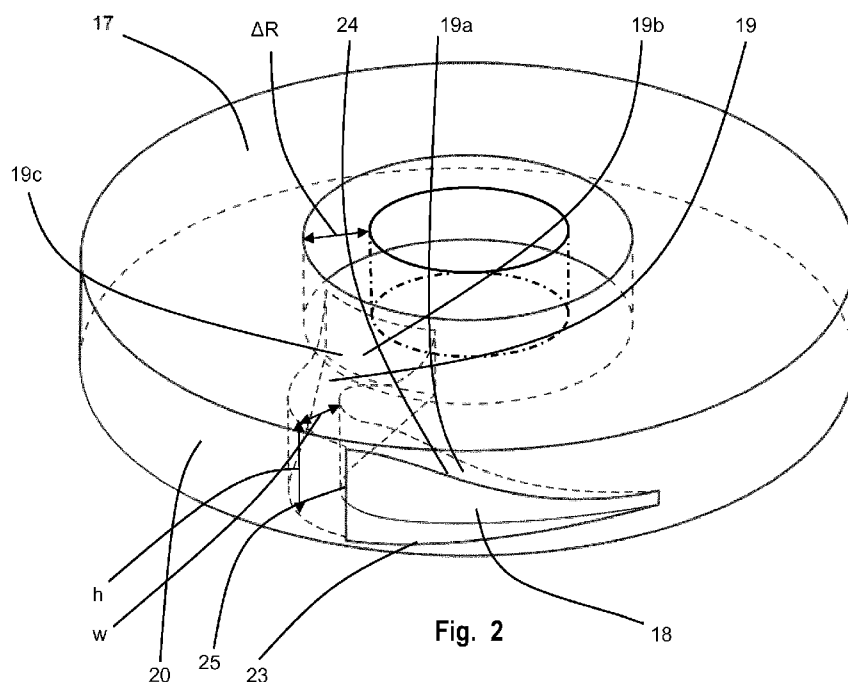


Fig. 2

(57) Abstract: A centrifugal separator having a device for the transformation of kinetic energy of a liquid rotating in a discharge chamber (12) around a rotational axis to pressure energy, comprising a discharge element (17) for the discharge of liquid out of the discharge chamber (12), which discharge element (17) has a radially outer part shaped as a body of revolution about the rotational axis and arranged to be located in a rotating liquid body in said discharge chamber (12), at least one outlet channel (19) formed in the discharge element (17) and having an inlet opening (18) located in a surface of the body of revolution and elongated in the liquid flow direction, the inlet opening (18) connecting to the interior of an outlet tube (16) via said outlet channel (19), wherein said outlet channel (19) having a defined axial height (h) and a defined width (w) which vary along their extension from the inlet opening (18) to the connection to said outlet tube (16) in such a way that a defined aspect ratio  $h/w$  decreases along at least a part (19b) of the extension

[Continued on next page]



WO 2020/001981 A1

**WO 2020/001981 A1** 

---

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— *of inventorship (Rule 4.17(iv))*

**Published:**

— *with international search report (Art. 21(3))*

---

of the outlet channel (19), and wherein a defined aspect ratio  $h/w$  being larger than 1 in an outer first part (19a) of said outlet channel (19) and decreasing to smaller than 1 in an inner second part (19b) of said outlet channel and wherein the height ( $h$ ) decreases inwardly along the length of said outlet channel (19).

## CENTRIFUGAL SEPARATOR

### AREA OF INVENTION

The present invention relates to centrifugal separators having a device  
5 for the transformation of kinetic energy of a liquid rotating in an outlet chamber  
around a rotational axis to pressure energy. This device comprises an element  
for the discharge of liquid out of said outlet chamber, which element has a  
radially outer part shaped as a body of revolution about the rotational axis and  
arranged to be located in a rotating liquid body in said outlet chamber, at least  
10 one outlet channel formed in the element and having an inlet opening located in  
a surface of the body of revolution and elongated in the liquid flow direction, the  
inlet opening connecting to the interior of an outlet tube via said outlet channel.

### BACKGROUND OF INVENTION

15 In a centrifugal separator which provided with an energy transformation  
device of the above form, parts of the rotor of the centrifugal separator form an  
outlet chamber, in which the liquid rotates. The outlet chamber is arranged to  
receive a separated liquid continuously from the separation chamber of the  
centrifugal rotor. This liquid forms a rotating liquid body in the outlet chamber.  
20 Centrally in the outlet chamber an outlet device is arranged, through which  
liquid is discharged out of the outlet chamber and further out of the centrifugal  
rotor. A centrifugal separator of this kind is shown in EP 0404923, for instance.

In many cases it is important that the energy transformation device can  
25 transform as much as possible of the energy stored in the rotating liquid to  
pressure energy. The maximum pressure which can be achieved is determined  
by the equation of Bernoulli for the pressure along a flow line of the liquid.

$$P_{\text{stat}} + P_{\text{dyn}} = \text{constant}$$

30

The static pressure  $P_{\text{stat}}$  at the inlet opening is composed of the  
pressure from the part of the rotating liquid body, which is located radially inside  
the inlet opening, and the pressure which acts on this part of the liquid body.

The dynamic pressure  $P_{\text{dyn}}$  is in each point along a flow line determined by the equation

5 
$$P_{\text{dyn}} = 1/2 \rho W^2$$

in which  $\rho$  is the density of the liquid and  $W$  being the flow rate of the liquid at the point looked upon.

10 Outside the inlet opening the liquid has a total pressure which is the sum of the static and dynamic pressure there. However, in the device in a centrifugal separator known by EP 0 404 923 much of the pressure is lost in the bend where the flow direction changes from mainly horizontal to mainly axial.

15 **DISCLOSURE OF INVENTION**

The object of the present invention is to provide a centrifugal separator having a device of the kind initially described for the transformation of kinetic energy of a rotating liquid to pressure energy, which device can recover a greater part of the static and the dynamic pressure in the rotating liquid than  
20 previously known such devices without involving an increasing risk for the admixture of air in the liquid, and with minimal pressure loss at said change from horizontal, radial to axial flow direction.

It is provided a centrifugal separator having a device for the transformation of  
25 kinetic energy of a liquid rotating in a chamber around a rotational axis to pressure energy, comprising an element for the discharge of liquid out of the chamber, which element has a radially outer part shaped as a body of revolution about the rotational axis and arranged to be located in the rotating liquid body, at least one outlet channel formed in the element and having an  
30 inlet opening located in a surface of the body of revolution and elongated in the liquid flow direction, the inlet opening connecting to the interior of an outlet tube via said outlet channel, wherein said outlet channel having a defined axial height ( $h$ ) and a defined width ( $w$ ) and wherein a defined aspect ratio  $h/w$  being larger than 1 in an outer first part of said outlet channel and decreasing to

smaller than 1 in an inner second part of said outlet channel and wherein the axial height (h) decreases inwardly along the length of said outlet channel

The cross-sectional area of the outlet channel is constant or increases along the outlet channel in the direction of flow therethrough.

5

To make the entrance to the channel effective the  $h/w$  is set larger  $>1$  at entrance, preferable in the interval 1.5 to 2. To make the transformation of kinetic energy to pressure effective the channel cross section should be not increased too fast. Also, the flow path change direction from horizontal, mainly radial to mainly axial at the connection between paring disc and the axial outlet channel. The radial extension of the axial channel ( $\Delta R$ ) is for number of practical reasons kept small. In the bend  $h$  transforms into  $\Delta R$ , where  $\Delta R$  is smaller than  $h$ . To make the transition horizontal, radial to axial with minimized pressure loss,  $h$  is reduced along flow path in the horizontal, radial part of the channel, while  $w$  is gradually increased in such rate that the channel cross section area is constant or gradually increasing. This allows to make the curvature of the bend from horizontal, radial to axial larger as measured relative channel heights or  $\Delta R$ . This reduces pressure loss at bend horizontal, radial to axial.

10  
15  
20

One execution is to extend the diffusor to the axial part of the channel.

Said aspect ratio may decrease from between 1.25-2.00 to 0.25-0.75.

25 Said aspect ratio may decrease from between 1.50-2.00 to 0.40-0.60.

Said decrease may be in an inner second part of said outlet channel, wherein said inner second part is attached to the said outlet tube.

30 Said inner second part may be extending essentially straight radially inwardly.

The outlet tube may be arranged coaxially around a stationary axial inlet tube.

The inner second part of the outlet channel attaches to the outlet tube by a bend directed upwards with a radius  $R_1$ .

5 The height (h) of the outlet channel may decrease by an upper wall of outlet channel which is sloping inwardly along the length of said outlet channel.

Said element may have 2 to 8 outlet channels.

10 Said element may have 4 to 7 outlet channels.

The cross-sectional area of the outlet channel may gradually increase along the outlet channel in the direction of flow therethrough.

15 Said cross section of the outlet channel may be substantially rectangular.

Said inlet opening may be formed in an essentially radially facing surface of the element.

20 The inlet opening may be of one of the following shapes: triangular, NACA duct profile or rectangular shape.

Further aspects of the invention are apparent from the dependent claims and the description.

## 25 **BRIEF DESCRIPTION OF THE DRAWINGS**

Further objects, features and advantages will appear from the following detailed description of several embodiments of the invention with reference to the drawings, in which:

30 Fig 1 schematically shows an axial section through a part of a centrifugal separator, which is provided with a device according to the invention,

Fig 2 schematically shows a dimensional view of an embodiment of a part in a device according to the invention.

## DETAILED DESCRIPTION OF EMBODIMENTS

A centrifugal separator shown in fig 1 comprises a rotor having a lower part 1 and an upper part 2 joined together axially by means of a locking ring 3 or  
5 in another suitable manner. Inside the rotor shown as an example, there is arranged an axially movable valve slide 4. This valve slide 4 delimits together with the upper part 2 a separation chamber 5 and is arranged to open and close an annular gap towards the outlet openings 6 for a component, which during operation is separated out of a mixture supplied to the rotor and is collected at  
10 the periphery of the separation chamber 5. The valve slide 4 delimits together with the lower part 1 a closing chamber 7, which is provided with an inlet 8 and a throttled outlet 9 for a closing liquid.

Inside the separation chamber 5 there is arranged a disc stack 10  
15 consisting of a number of conical separation discs held between a distributor 11 and the upper part 2. The upper part forms at its upper end, as shown in the figure, a ring-formed chamber 12 around the rotational axis, into which chamber 12 in this case a specific lighter liquid component of the mixture can flow from the separation chamber 5 via an inlet 13. The liquid present in the chamber 12  
20 during operation of the rotor forms a rotating liquid body having a radially inwards facing free liquid surface 14.

Centrally through the chamber 12 a stationary inlet tube 15 extends axially, which delivers fluid to be separated into the separation chamber. Around  
25 the inlet tube 15 there is arranged a stationary coaxial outlet tube 16 for the specific lighter liquid component collected in the chamber 12.

In the chamber 12, a device for the transformation of kinetic energy of liquid rotating in the chamber 12 to pressure energy is arranged, comprising a  
30 discharge element 17, for the discharge of liquid out of the chamber 12, arranged around the inlet tube 15 and connected to the outlet tube 16. The discharge element 17 is stationary but in an alternative outlet arrangement a similar outlet element can be arranged to rotate with a rotational speed which is lower than the rotational speed of the rotor.

The discharge element 17 extends radially outwards and has outside the radial level of the free liquid surface 14 of the rotating liquid body a part, which has at least one inlet opening 18. This inlet opening 18 is connected to the interior of the outlet tube 16 via an outlet channel 19 formed in the discharge element 17. The inlet opening 18 can be of a triangular, NACA duct profile, rectangular or other shape.

The discharge element 17 shown in fig 2 has a radially outer part shaped as a body of revolution about the rotational axis with a circular cylindrical surface 20, which during operation is positioned in the rotating liquid body in the chamber 12 and along which the liquid flows in a predetermined direction. In this example, the inlet opening 18 seen in the flow direction is delimited by two opposite side edges 23 and 24, which diverge from a common point and forward most in the flow direction in a way such that liquid crossing the side edges 23, 24 flows into the inlet opening 18 being scaled off from said free liquid surface 14. Downstream the inlet opening 18 is delimited by a cross edge 25, which is connected to the two side edges 23, 24. In the example shown in this figure, the outlet channel 19 has a confining surface which at the end of the inlet opening 18 meets the edge 25 and forms a smooth continuation of circular cylindrical surface 20 of the discharge element 17.

The outlet channel 19 has a defined height  $h$  and a defined width  $w$  which vary along its extension from its inlet opening 18 to its connection to said outlet tube 16. The height and the width may be used to define an aspect ratio  $h/w$  which thus also vary along the channel extension. It has been discovered that the aspect ratio, and especially the variation of the aspect ratio has an impact on the pressure loss in the discharge element. In fig. 2, the aspect ratio decreases radially toward the rotational axis. In the portions of the outlet channel 19 where the aspect ratio  $h/w$  decreases it is preferred if the decrease is continuous. In the embodiment according to fig. 2 the inner half of the outlet channel 19 discloses a decrease in the aspect ratio.

The outlet channel 19 comprises an outer first part 19a extending circumferentially in the rotational direction with a slight curve inwardly, growing

in abruptness, and said inner second part 19b attached to the outer first part 19a. The inner second part 19b is extending essentially straight radially inwardly.

5           The aspect ratio  $h/w$  is larger than 1 in said outer first part 19a of said outlet channel 19 and decreases to smaller than 1 in said inner second part 19b of said outlet channel 19. The height ( $h$ ) decreases inwardly along the length of said outlet channel 19.

10           The aspect ratio may decrease from between 1.25-2.00 to 0.25-0.75, preferably from between 1.50-2.00 to 0.40-0.60.

As can be seen in fig.2 the decrease of the aspect ratio is in an inner second part 19b of said outlet channel 19.

15

In order to further bring down pressure losses and unwanted mechanical impact on the streaming liquid the inner second part 19a of the outlet channel 19 is attached to the outlet tube 16 by a smooth direction change from radial to axial.

20

The inner second part 19b of the outlet channel 19 attaches to the outlet tube 16 by a bend directed upwards with a radius  $R1$ . The height ( $h$ ) of the outlet channel 19 decreases by an upper wall 19c of the outlet channel 19 which is sloping inwardly along the length of said outlet channel 19.

25

To make the entrance to the channel effective the  $h/w$  is set larger  $>1$  at entrance, preferable in the interval 1.5 to 2. To make the transformation of kinetic energy to pressure effective the channel cross section should be not increased too fast. Also, the flow path change direction from horizontal, mainly radial to mainly axial at the connection between paring disc and the axial outlet channel. The radial extension of the axial channel ( $\Delta R$ ) is for number of practical reasons kept small. In the bend  $h$  transforms into  $\Delta R$ , where  $\Delta R$  is smaller than  $h$ . To make the transition horizontal, radial to axial with minimized pressure loss,  $h$  is reduced along flow path in the horizontal, radial part of the

30

channel, while  $w$  is gradually increased in such rate that the channel cross section area is constant or gradually increasing. This allows to make the curvature of the bend from horizontal, radial to axial larger as measured relative channel heights or  $\Delta R$ . This reduces pressure loss at bend horizontal, radial to axial.

Said discharge element 17 may have one outlet channel 19 as is disclosed in fig. 2 but may instead have 2 to 8 outlet channels, preferably 4 to 7 outlet channels 19.

The cross-sectional area of the outlet channel 19 may be chosen to gradually increase along the outlet channel 19 in the direction of flow therethrough.

The cross section of the outlet channel 19 may be substantially rectangular. Other cross section configurations may be possible like triangular, multi-angled or other shapes.

The discharge element 17 may consist of a circular cylindrical disc.

The inlet opening 18 may have triangular, NACA duct profile or rectangular shape but other shapes may be possible.

Said inlet opening 18 is formed in an essentially radially facing surface of the discharge element 17.

In fig. 2 the discharge element 17 is stationary but embodiments where the discharge element is rotating is possible.

In fig. 2 the discharge chamber 12 is formed in a part of a rotary body 2 but embodiments where the discharge chamber 12 is formed in a stationary part is possible.

By designing a centrifugal separator having an energy transformation device as described in the above embodiments, the kinetic energy of the rotating liquid can be recovered and transformed into pressure energy much more effectively than has been previously possible.

5

In all the embodiments described above the inlet openings are formed in a circular cylindrical surface and facing radially. However, the invention is also applicable to devices having inlet openings which face in another direction, for instance axially.

10

The invention is not limited to the embodiments described above and shown on the drawings, but can be supplemented and modified in any manner within the scope of the invention as defined by the enclosed claims.

## CLAIMS

1. A centrifugal separator having a device for the transformation of kinetic energy of a liquid rotating in a discharge chamber around a rotational axis to pressure energy, comprising a discharge element for the discharge of liquid out of the discharge chamber, which discharge element has a radially outer part shaped as a body of revolution about the rotational axis and arranged to be located in a rotating liquid body in said discharge chamber, at least one outlet channel formed in the discharge element and having an inlet opening located in a surface of the body of revolution and elongated in the liquid flow direction, the inlet opening connecting to the interior of an outlet tube via said outlet channel, wherein said outlet channel having a defined axial height and a defined width, and wherein a defined aspect ratio  $h/w$  being larger than 1 in an outer first part of said outlet channel and decreasing to smaller than 1 in an inner second part of said outlet channel and wherein the height decreases inwardly along the length of said outlet channel.
2. A centrifugal separator according to claim 1, wherein the cross-sectional area of the outlet channel is constant or increases along the outlet channel in the direction of flow therethrough.
3. A centrifugal separator according to any one of claims 1 or 2, wherein said aspect ratio decreases from between 1.25-2.00 to 0.25-0.75.
4. A centrifugal separator according to any one of claims 1-3, wherein said aspect ratio decreases from between 1.50-2.00 to 0.40-0.60.
5. A centrifugal separator according to any one of claims 1-4, wherein said decrease in said aspect ratio is in said inner second part of said outlet channel.
6. A centrifugal separator according to claim 5, wherein said inner second part is extending essentially straight radially inwardly.

7. A centrifugal separator according to any one of claims 1-7, wherein the outlet tube is arranged coaxially around a stationary axial inlet tube.
8. A centrifugal separator according to any one of claims 1-7, wherein the inner second part of the outlet channel attaches to the outlet tube by a bend directed upwards with a radius  $R_1$ .
9. A centrifugal separator according to claim 8, wherein the height of the outlet channel decreases by an upper wall of the outlet channel which is sloping inwardly along the length of said outlet channel.
10. A centrifugal separator according to any one of claims 1-9, wherein said discharge element has 2 to 8 outlet channels.
11. A centrifugal separator according to claim 10, wherein said discharge element has 4 to 7 outlet channels.
12. A centrifugal separator according to any one of claims 1 to 11, wherein the cross-sectional area of the outlet channel gradually increases along the outlet channel in the direction of flow therethrough.
13. A centrifugal separator according to claim 12, wherein the cross section of the outlet channel is substantially rectangular.
14. A centrifugal separator according to any one of claims 1 to 13, wherein said inlet opening is formed in an essentially radially facing surface of the discharge element.
15. A centrifugal separator according to any one of claims 1-14, wherein the inlet opening is of one of the following shapes: triangular, NACA duct profile or rectangular shape.

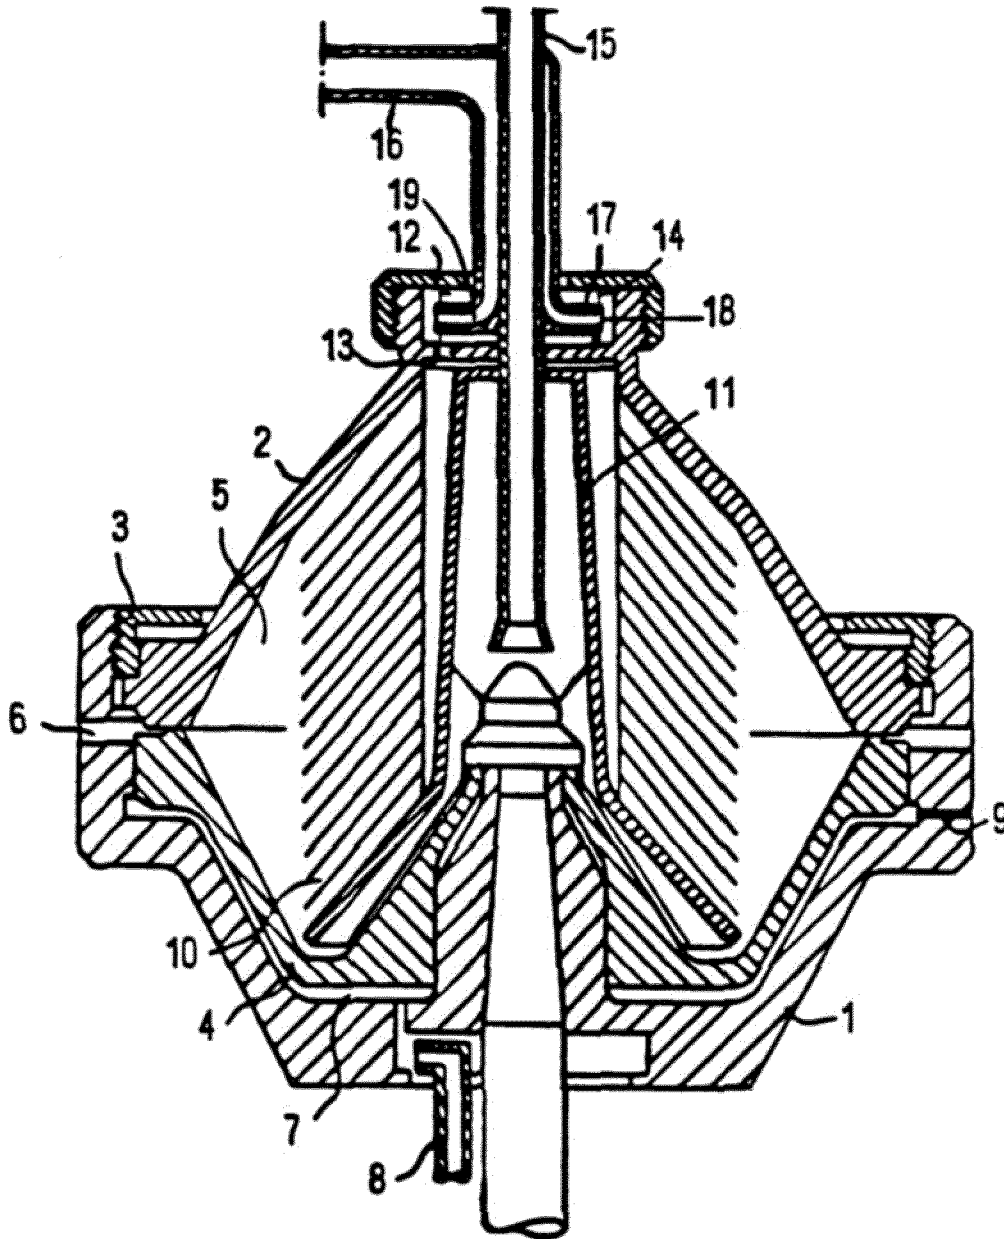


Fig. 1



