

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2015/044161 A1

(43) International Publication Date
2 April 2015 (02.04.2015)

(51) International Patent Classification:

F21V 5/00 (2006.01) *F21Y 101/02* (2006.01)
F21S 8/00 (2006.01) *F21Y 105/00* (2006.01)

(21) International Application Number:

PCT/EP2014/070296

(22) International Filing Date:

24 September 2014 (24.09.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13185683.3 24 September 2013 (24.09.2013) EP
14164755.2 15 April 2014 (15.04.2014) EP

(71) Applicant: **KONINKLIJKE PHILIPS N.V. [NL/NL]**
High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(72) Inventors: **DINGEMANS, Antonius, Petrus, Marinus**;
High Tech Campus 5, NL-5656 AE Eindhoven (NL). **VISSENBERG, Michel, Cornelis, Josephus, Marie**;
High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(74) Agents: **PET, Robert, Jacob** et al.; Philips Intellectual
Property & Standards, P.O. Box 220, NL-5600 AE Eind-
hoven (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: LIGHTING UNIT

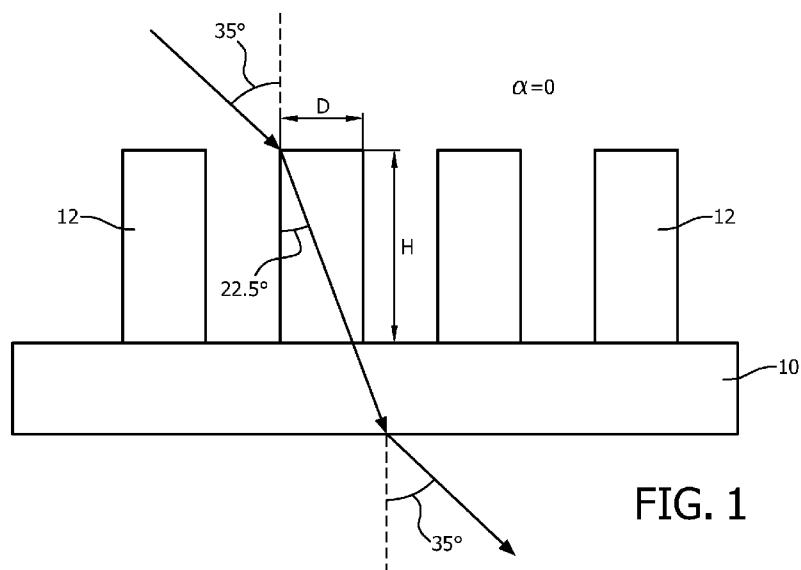


FIG. 1

(57) Abstract: A lighting panel comprises a light source and a light modifying panel positioned over the light source, in the form of a set of protrusions over the base, the protrusions facing the light source. The protrusions comprise circular/elliptical/polygonal cylinders or cone sections with a small cone taper angle.

Lighting unit

FIELD OF THE INVENTION

This invention relates to a lighting unit, such as a luminaire, which includes a panel for positioning between a light source and a space to be illuminated, in order to control the distribution of the light entering the space to be illuminated.

5

BACKGROUND OF THE INVENTION

Lighting panels in the form of a plate with multiple microlenses are known for use in luminaires, to hide the light source (such as a fluorescent tube or LED) and to deliver a preferred light distribution. The preferred light distribution can depend on national

10 guidelines. For example, a microlens optics plate is widely used in Europe and acrylic plates are widely used in North America. Typically, these are made by hot embossing which is a relatively costly batch process (highly dependent on the base material) and limited to plate materials. Three dimensional lenses or exit windows beyond a single curve are therefore hard to obtain.

15 WO 2005/083317 describes a microlens optics plate for use in luminaires. The plate is a transparent substrate with tapered protrusions that end in a sharp point or in a sharp edge. Most of the light enters the plate via the flat side and exits via refraction at a tapered conical surface. The plate transmits part of the light from a diffuse source within a limited intensity cone (the intensity distribution required to comply with EU regulations) and 20 recycles the remaining part back to the source, where it is reflected and has a second chance to pass the plate.

In designing office luminaires there are a number of optical problems that have to be taken into account.

The actual preferred light intensity distribution depends on the region. In 25 Europe, office luminaires have to comply with EN-12464-1 which prescribes certain horizontal task illumination Lux levels and has strict glare rules that limit the luminaire luminance at large angles with respect to the normal.

In North America the glare limits are less strict, which allows for more light at large angles. The advantage of this is a larger luminance spacing (giving lower cost) and

more vertical luminance (better lighting of the walls). The drawback is a lower utilisation efficiency (less light to the task area) and more glare.

Especially for LED lighting, it is necessary to reduce the brightness of the LED source. The high brightness of LEDs can give discomfort glare. High peak brightness typically means a dotty but efficient product. High brightness is especially problematic under angles that are directly in the field of view of an office worker. The luminaire directly above a person is not directly visible and can therefore have a higher brightness than further away when it is within a person's visual field. Typically, the visual field of a person looking straight ahead starts at about 35 degrees with respect to the vertical orientation. Therefore, there is no direct glare from luminaires at viewing angles between 0 and 35 degrees with respect to the vertical. In general, the discomfort glare by a high luminance source in the ceiling increases with increasing angle to the vertical plane (assuming that the people in the room look straight ahead or downward to a screen or desk).

Thus, high peak brightness should be avoided at large angles to the vertical (i.e. for rays with a large vector component in the plane of the luminaire exit window and ceiling), but higher values may be permitted at low angles (i.e. for rays directed downwardly from the ceiling). Since high homogeneity comes at the cost of decreasing optical efficiency, generally requiring more light recycling, it is preferable to homogenize the luminance only at higher viewing angles where it is really required.

SUMMARY OF THE INVENTION

The invention is defined by the claims.

According to the invention, there is provided a lighting panel, comprising:

a light source; and

a light modifying panel positioned over the light source for modifying the light output from the light source before it enters a space to be illuminated,

wherein the panel comprises a base and a set of protrusions over the base, the protrusions facing the light source,

wherein the protrusions comprise circular, elliptical or at least 5-sided

30 polygonal cylinders, or circular, elliptical or at least 5-sided polygonal cone sections, having a flat circular elliptical or polygonal top, wherein for cone sections the cone taper angle is less than 5 degrees.

The shape of the protrusions is preferably circular, although an equivalent effect can be obtained with a polygon with multiple sides or a slightly elliptical shape. Thus,

if the protrusions are polygonal, they have at least five sides to provide a substantially uniform angular distribution. The polygon is preferably a regular polygon, i.e. with rotational symmetry of order N where N is the number of sides.

This cylindrical shape (equivalent to a cone with zero taper angle), or shallow cone taper means the protrusions conserve beam shape along the radial direction (i.e. the average intensity profile as a function of angle to the optical axis is conserved, or slightly narrowed for the conical version), The protrusions homogenise the beam shape along the tangential direction, so that a non-rotationally symmetric input beam will be more symmetric after passing through the panel. The shallow or no tapering means the input area (at the tops) can occupy a large area. This means that light blocking features between the protrusions can be avoided.

This arrangement gives a higher peak brightness close to the optical axis (for example in the range 0-35 degrees), where the underlying light source is more visible and lower peak brightness (more uniform luminance) at angles directly in the field of view (for example in the range 35-90 degrees). The actual angles depend on the height to radius ratio of the protrusions.

The structure of the invention functions differently to a conventional optical scattering plate. A conventional scattering plate usually scatters the direction of the light both in the radial direction (changing the radial angle with respect to the optical axis of the beam) and in the tangential direction (changing the polar angle in the plane perpendicular to the optical axis).

In a luminaire, the radial intensity distribution defines the beam shape as projected into the space. This distribution is designed such to balance the light spreading in the room (wide distribution to keep the numbers of luminaires low and to provide good lighting on the walls) with the conflicting constraints on glare (which require reduced light at high radial angles). High light utilization is desired, so that light is aimed at desks for example. The tangential intensity distribution is usually uniform (i.e. for a given radial angle, the same intensity is provided to all directions in the room). Consequently, scattering light in the radial direction has a large impact on other beam properties like glare, while scattering in the tangential direction has less impact on the beam profile.

The optical structure of the invention provides scattering mainly in the tangential direction. As a result, the beam shape of a rotationally symmetric beam is not significantly changed. This means the system can homogenise the luminance without significantly altering a rotationally symmetric beam shape.

The advantage of this property is that the scattering plate can be kept the same for different beam shapes that may be required for different applications or regions. Thus, the optical design can have the same look and feel for luminaires with different beam shape light distributions.

5 By preserving beam shapes in this way, a light source which provides multiple beams can also be used. For example, a split beam luminaire is known which provides separate task and ambient beams. The optical system enables multiple different beams to pass to through the same system while preserving the beam shapes.

10 Thus, the invention is based on providing cones with a very small slant angle or even cylinders, so that the plate acts as a scattering plate that scatters mainly in tangential directions. This provides particular advantages for office lighting:

15 the plate reduces brightness by scattering in the tangential direction only, thus retaining incoming rotationally symmetric light distributions. In this way, beams which are radially pre-shaped before passing through the panel to be rotationally symmetric can conserve this symmetry;

the arrangement has high scattering with good brightness reduction, at angles in the field of view of an office worker or any other end-user; has a high transmission, therefore with little backscatter and little need for recycling, and this gives high overall efficiency;

20 the arrangement is easy to produce, for example using injection moulding processes;

it enables different light sources to be used, with different light distributions; it has a similar look and feel irrespective of the particular light distribution being sought;

25 it has a smooth (and optionally also flat) outer surface which is easy for maintenance / cleaning.

The cone taper angle can be less than 2 degrees, or less than 1 degree.

30 In one example, the protrusions each have a height H which satisfies $H > N(D - H * \tan \alpha)$, where α is the cone taper angle and D is the diameter of the tip, and N is given by $1/N = \tan(\sin^{-1}(\sin 35/n))$ where n is the refractive index of the panel material.

This formula determines the transition from high scattering (at high angles to the vertical) to low scattering (at low angles to the vertical). The low scattering regime is outside the visual field of view (which, in above formula taken to be 35 degrees and higher).

The light source preferably comprises an array of LEDs.

In one example, an array of beam shaping elements can be provided over the LED array, for example with one beam shaping element in the form of a lens over each LED. The beam shaping function is between the light source and the panel, and can be tuned to meet local needs.

5 The beam shaping elements can perform a beam shaping function, and can produce a beam with a good cut-off complying with EU office regulations. The same panel can be used with batwing-type beam shaping lenses to produce very broad beams particularly useful for the North American market.

The beam shaping element may be:

10 a lens per LED or per cluster of LEDs;

a collimator per (cluster of) LED(s), such as a TIR collimator or metallic reflector or white reflector;

a microlens plate covering a cluster of LEDs; or

optical foils with beam shaping surface structures (microlenses, microprisms)

15 covering an array of LEDs.

The beam shaping array can comprise at least first and second different types of structure. For example, different microlenses can be used with different properties for different types of illumination.

20 The base can comprise a light scattering surface on a side opposite the protrusions. The scattering can be limited, and can then enable direct view of the light source to be prevented, even from directly along the optical axis. A controlled diffuser (with limited scattering) between the light source and the panel can be used for the same purpose.

BRIEF DESCRIPTION OF THE DRAWINGS

25 Examples of the invention will now be described in detail with reference to the accompanying drawings, in which:

Fig. 1 shows a side view of the shape of one example of light modifying panel for use in a lighting unit of the invention;

30 Fig. 2a-c shows a side view of the effect of varying the cone angle for conical projections;

Fig. 3a-d shows a top view of possible arrangements of multiple protrusions;

Fig. 4 shows further examples of light modifying panel of the invention;

Fig. 5a-c shows one example of light modifying panel of the invention with dimensions;

Fig. 6 shows the way the panel of Figure 5 can be arranged with respect to an array of light sources;

Fig. 7 shows the light intensity distribution resulting from the arrangement of Figures 5 and 6;

5 Fig. 8 shows a polar plot for the light distribution resulting from the arrangement of Figures 5 and 6;

Figs. 9 to 11 show the perceived luminance at different angles with respect to the lighting unit;

Fig. 12 shows a first example of complete lighting unit of the invention;

10 Fig. 13 shows a second example of complete lighting unit of the invention including pre-shaping lenses;

Fig. 14a-d shows the light intensity distribution and polar plot for a system which generates task light and ambient light by use of pre-shaping lenses, before (Figure 14(a) and 14(c)) and after (Figure 14(b) and 14(d)) passage through the optical panel; and

15 Fig. 15 shows schematically a polygonal (hexagonal), elliptical and circular shape for the protrusions.

DETAILED DESCRIPTION OF THE EMBODIMENTS

The invention provides a lighting panel comprising a light source and a light 20 modifying panel positioned over the light source, in the form of a set of protrusions over a base, the protrusions facing the light source. The protrusions comprise circular/elliptical/polygonal cylinders or cone sections with a small cone taper angle.

Figure 1 shows the shape of one example of light modifying panel of the invention. The panel comprises a base 10 and a set of protrusions 12 over the base, the 25 protrusions facing the light source (not shown in Figure 1). In this example, the protrusions comprise circular cylinders having a flat circular top. They may instead comprise tapered cones, but with a small cone taper angle α (shown in Figure 5), in particular less than 5 degrees (whereas in Figure 1 $\alpha=0$). The height of the protrusions is shown as H and the diameter of the circular bottom and top is shown as D. For tapered cone sections the 30 parameter D is taken to be the smaller diameter at the cone tip.

This design provides an optimal scattering function with conservation of beam shape. The small tapering angle of less than 5 degrees, or preferably less than 2 or even 1 degree may be needed for injection moulding purposes, but no tapering is required for the scattering function.

The panel can be formed from a plastics material, such as polymethyl methacrylate ("PMMA") or polycarbonate.

For an optimum brightness reduction of luminance at viewing angles within the usual field of view (more than 35 degrees to the normal of the plate), the protrusions 5 should have a height H larger than a multiple N times the base diameter D of the protrusion. This multiple N depends on the refractive index of the panel and the medium in which the panel is situated. For a refractive index 1.49 (for PMMA) in air, the value N can be 2.4.

Thus $H > ND$. With $H > 2.4D$ for the example given of zero taper angle, no light rays at angles greater than 35 degrees can enter the protrusion at the top facet and exit at the 10 flat substrate without at least one interaction with the curved protrusion sidewall.

For slanted sidewalls with slant angle α , the aspect ratio of the protrusion is given by $H > N(D - H * \tan \alpha)$.

The value N is set to achieve the 35 degree threshold. It is given by:

$$1/N = \tan(\sin^{-1}(\sin 35/n)) \text{ where } n \text{ is the refractive index of the panel material.}$$

15 For $n=1.49$, this gives $N=2.40$, and for polycarbonate with $n=1.58$, it gives $N=2.57$. For typical materials, N is in the range 2.3 to 2.7.

Figure 2 is used to show the difference in optical function between a purely angular scattering plate and a collimating plate. The light intensity distribution before and after the panel is shown, above and below the panel. In each case, the intensity distribution 20 entering the panel is shown as a Lambertian distribution. Light 'a' under shallow is scattered in all directions (shown as a') and slightly refracted towards the vertical axis, depending on the tapering angle. Light 'b' under steep angles is little scattered.

The examples of Figure 2 are all within the scope of the invention. The cone taper angle is however exaggerated in the figure.

25 Figure 2(a) shows the effect of cylindrical protrusions. The protrusions scatter light rays 'a' at a large angle, but not the rays 'b' perpendicular to the panel. The beam shape is conserved, so that the Lambertian beam stays Lambertian.

When the protrusions are slightly conical as shown in Figure 2(b), the exit beam is slightly collimated, which may for example be enough to comply with North 30 American regulations for office lighting.

When the protrusions have an increased cone angle as shown in Figure 2(c), the exit beam is much more collimated, such that it can comply with EU regulations for office lighting.

The cylindrical structure of Figure 2(a) is the most light efficient but the less efficient structures are needed to meet office requirements.

The protrusions can be distributed in many ways. The total area covered with the protrusions should be relatively high.

5 Figure 3(a) shows a regular square orthogonal grid array of protrusions. Figure 3(b) shows a regular hexagonal grid array of protrusions. Figure 3(c) shows a square orthogonal grid array but rotated by 45 degrees. Figure 3(d) shows two grids with protrusions of different sizes, interleaved.

10 By having a small slant angle, the light input area (the flat tip of the protrusions) is kept large. This limits the area of the slanted facets that capture light, and means than blocking masks can be avoided, which otherwise may be needed to prevent that too much light enters the plate via the curved sides.

The arrangement of the invention can be used with additional measures to provide desired beam shaping.

15 In one example, beam shaping is provided using an injection-moulded lens array placed directly on the LEDs. Since rotationally symmetric beams are conserved by the panel, any rotationally symmetric beam may be generated in combination with the same panel design.

A disadvantage of the panel design can be overhead glare.

20 Light under limited angles from the vertical axis is little scattered which results in high peak luminance looking from right underneath.

To reduce the overhead glare, when looking back to the LED light source from directly underneath the luminaire, two possible solutions are shown in Figure 4.

Figure 4(a) shows the basic structure.

25 Figure 4(b) shows a texture 40 applied to the mould. Known standard textures can be used to provide for a limited (for example less than 15 degree FWHM) beam dispersion as represented by light paths b'.

Figure 4(c) shows the alternative of adding a diffuser 42 at the top facing the light source.

30 These improvements to address overhead glare have a negative trade-off for efficiency and mean that pre-shaped rotationally symmetric lighting distributions are no longer fully preserved. The use of diffusers on the top enables a modular approach so that they can be used only when desired.

Figure 5 shows a first example of light modifying panel of the invention with dimensions.

This example is for use with a light source in the form of bare LEDs. The panel comprises a plate with truncated cones that collimate the beam to such an extent that it 5 would be EU office compliant.

The dimensions of one protrusion are shown in Figure 5(a), which give a cone angle of 2.94 degrees ($\tan^{-1}(0.36/7.0)$). This angle is shown exaggerated in Figure 5.

For a refractive index 1.49, $N(D-Htana)$ for this shape is equal to:

$$2.4(2.88-7.0\tan2.94) = 6.048.$$

10 Thus, this example satisfies $H > N(D-Htana)$.

Figure 5(b) shows that the protrusions are arranged in an array, and Figure 5(c) shows a hexagonal distribution of the protrusions.

The total optical system efficiency can be greater than 90%, and as high as 95%.

15 This modest tapering angle of 3.44 degrees gives an intensity distribution with a reasonable beam cut-off for angles greater than 65 degrees, complying with EU regulations for glare.

Figure 6 shows the possible arrangement of the panel 60 over the LED array 62, and shows an example spacing of 40mm, and an overall luminaire dimension of 400mm 20 (for example square). The LED pitch is 60mm, and the pitch of the protrusions is 3.6mm (so it is clear that Figure 6 is not to scale in this respect).

Figure 7 shows the intensity distribution with respect to the angle to the normal and Figure 8 shows the polar plot.

The simulation to provide the results of Figures 7 and 8 finds a very high 25 optical efficiency of over 94%.

The luminance distribution of the exit window of the panel is shown in Figures 9 to 11. Figure 9 shows the luminance distribution viewed at zero degrees to the optical axis, namely directly beneath the luminaire.

Figure 10 shows the luminance distribution viewed at 35 degrees to the optical 30 axis, and Figure 11 shows the luminance distribution viewed at 65 degrees to the optical axis.

There is almost no brightness reduction at the perpendicular viewing direction. There is only slight Gaussian scattering at the exit surface. The luminance distribution is close to uniform at 65 degrees, which is a typical viewing angle at which luminaires are seen in a large office.

Figure 12 shows a luminaire based on the optical system. The figure shows a quarter cut-out of the total luminaire.

At the bottom side is a PCB 120 with an array of LEDs 122 that emit light with a Lambertian distribution. The optical exit window is the panel 124 with cylinders or truncated cones. For a cost-effective solution, the panel does not cover the complete area of a typical office luminaire (which is usually 60x60 cm or 30x120 cm or 60x120 cm), but a smaller area which is only 25-50% of the total area. The remaining area consists of a baffle 126 that reflects part of the light from the central area and forms a smooth transition from the bright exit window to the ceiling.

The exit window defined by the panel may be a flat plane, but it can instead be raised to enhance the brightness reduction by scattering. For this purpose, the panel may contain perpendicular transparent sidewalls 128 that may be formed together with the panel as a single injection moulded unit.

In order to ensure maximum scattering without changing the beam shape, the protrusions on these sidewalls should have the same orientation as the protrusions on the top side, namely vertically oriented cylinders or otherwise linear structured shapes.

Figure 13 shows a similar system, but with additional beam forming optics in the form of lens array plates 130 placed on the PCBs.

The lens arrays may be used to collimate the beam even further, either to improve the beam cut-off to improve glare reduction or to make a more narrow beam for other applications than general lighting.

Alternatively, the lens arrays may be of the batwing type, to broaden the beam.

In one specific example shown in Figure 13, the lens arrays 130 produce two distinct beams: a narrow beam for task lighting and a wide beam for ambient lighting. As shown in Figure 13, there are two different designs of microlens 132 and 134 for this purpose.

A challenge in the optical design of such a system is the balance between brightness reduction (strong scattering needed) and beam conservation (weak scattering needed).

This is achieved by decoupling the two properties. In this way, strong scattering can be obtained without broadening the beam. Furthermore, the total luminaire height can be made lower.

The effect of the truncated cones on pre-shaped beams is shown in the intensity plots of Figure 14.

Each graph of Figures 14(a) to 14(d) includes two curves, one for a cross section at a polar angle of 0 degrees, and one a cross section at a polar 90 degrees. The left hand plots are intensity distributions in Cartesian coordinates, the same intensity distributions are shown in the right hand plots in polar coordinates.

5 Figures 14(a) and 14(c) shows two complementary beams (a relatively narrow beam in Figure 14(a) representing task light and a wider “hollow” beam in Figure 14(c) representing ambient light). These together form a typical office lighting beam.

The use of two complementary beam patterns to form a split beam luminaire is for example described in WO2011/0369690 and WO2013/057644.

10 Figures 14(b) and 14(d) show the same beams after passing the optical plate according to one example of the invention. The beam shape is largely conserved with respect to polar angle distribution (little scattering in polar angle direction), but the beam is also made more rotationally symmetric around the optical axis (good scattering in tangential direction).

15 If the two plots for the two different angles are very different (as in Figures 14(a) and 14(c)) it indicates an asymmetric light distribution. The system of the invention can provide sufficient angular scattering to smooth out this original undesired property

These images thus show two significant effects.

20 (i) The beam rotational symmetry is improved by the angular scattering. The initial asymmetry of the input beams is an unwanted side effect of asymmetric low cost LEDs.

25 (ii) A background of diffuse light is created by light that passed through the intermediate area with slanted facets instead of through the cone tops. A limited amount of light also is distributed under high angles, up to 90 degrees. This can be seen based on the wider base curve.

The first effect is an advantage. The second effects is not desired. This effect may be reduced by reducing the slant angle. A slant angle as low as 1 degree or 0.5 degree can be used instead of the example of 3.4 degrees used in the simulations shown above.

30 The invention is of particular interest for indoor professional lighting, especially office applications. Typically, an array of luminaires is provided over a space to be illuminated. Although the invention is described with reference to LED lighting, the panel can be applied to a luminaire with other types of light source. The panel dimension of 40cmx40cm is of course only an example, which is representative for use as an overhead

office luminaire. Other dimensions will be appropriate for other uses, such as decorative lighting.

Designs according to embodiments of the invention can result in efficiency of around 90% compared to about 70% for existing microlens systems.

5 In the examples above, the light modifying panel is a flat plate with the protrusions. However, the overall plate may instead be curved. For example, the light source may be a point source without collimation and the substrate can then be a semi-sphere with a large radius, with the protrusions facing the source. In this case, the smooth semi-spherical surface is perpendicular to the light rays, which reduces unwanted Fresnel reflections. Thus, 10 the term panel should not be understood as requiring a flat planar panel, although this is indeed one preferred implementation.

As mentioned above, the protrusions can be circular, elliptical or polygonal, with 5 or more sides. Figure 15 shows schematically a polygonal (hexagonal), elliptical and circular shape for the protrusions. For a polygonal shape, the shape approximates a circle as 15 the number of sides is increased.

Other variations to the disclosed embodiments can be understood and effected by those skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a 20 plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measured cannot be used to advantage. Any reference signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. A lighting unit, comprising:
 - a light source; and
 - a light modifying panel positioned over the light source for modifying the light output from the light source before it enters a space to be illuminated,
- 5 wherein the panel comprises a base (10) and a set of protrusions (12) over the base, the protrusions facing the light source,
 - wherein the protrusions comprise circular, elliptical or at least 5-sided polygonal cylinders, or circular, elliptical or at least 5-sided polygonal cone sections, having a flat circular elliptical or polygonal top, wherein for cone sections the cone taper angle is
- 10 less than 5 degrees.
2. A unit as claimed in claim 1, wherein for cone sections, the cone taper angle is less than 2 degrees.
- 15 3. A unit as claimed in claim 1, wherein for cone sections, the cone taper angle is less than 1 degree.
4. A unit as claimed in any preceding claim, wherein the protrusions (12) each have a height H which satisfies $H > N(D - H * \tan \alpha)$, where α is the cone taper angle with $\alpha = 0$ for cylinders, D is the diameter of the tip, and N is given by $1/N = \tan(\sin^{-1}(\sin 35/n))$ where n is the refractive index of the panel material.
- 20 5. A unit as claimed in claim 4, wherein N is in the range 2.3 to 2.7.
- 25 6. A unit as claimed in any preceding claim, wherein the light source comprises an array of LEDs.
7. A unit as claimed in claim 5, further comprising a beam shaping optical arrangement (130) provided over the LED array.

8. A unit as claimed in claim 7, wherein the beam shaping optical arrangement performs a collimation function.

5 9. A unit as claimed in claim 7, wherein the beam shaping optical arrangement performs a batwing optical distribution function.

10. 10. A unit as claimed in any one of claims 7 to 9, wherein the beam shaping optical arrangement comprises at least first and second different types of lens (132,134).

10

11. A unit as claimed in any preceding claim, wherein the base comprises a light scattering surface (40) on a side opposite the protrusions.

15

12. A unit as claimed in any preceding claim, wherein the tips of the protrusions are provided with a scattering surface.


13. A unit as claimed in any preceding claim, further comprising a diffuser (42) between the light source and the panel.

20

14. A unit as claimed in any preceding claim, wherein the panel is injection moulded.

15. A unit as claimed in any preceding claim comprising a ceiling luminaire.

1/12

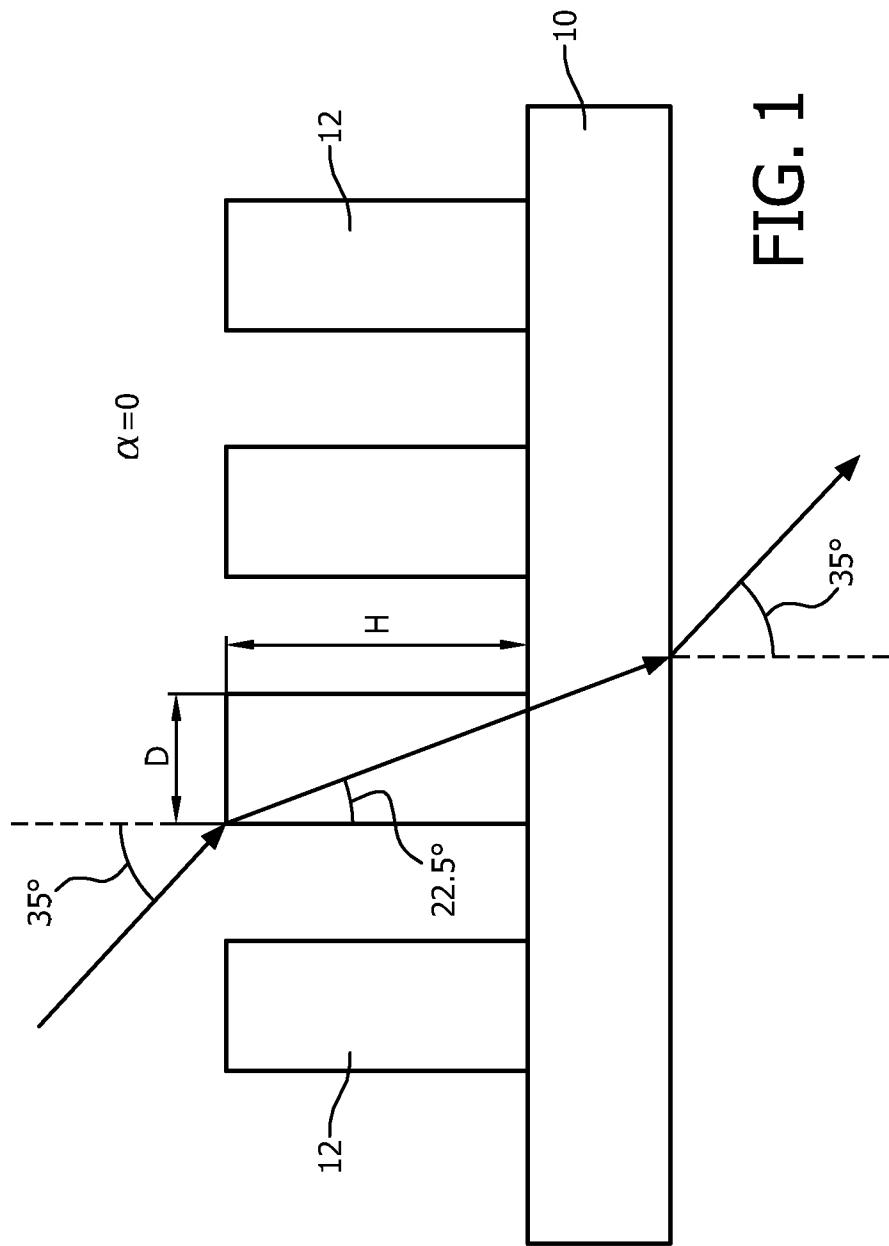

2/12

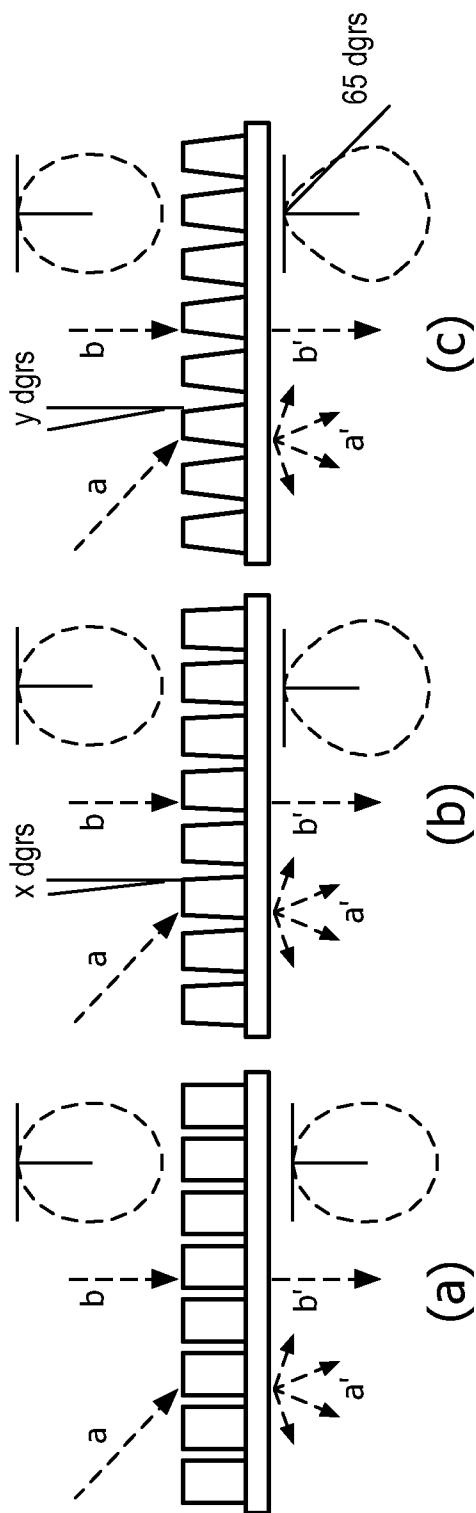


FIG. 2

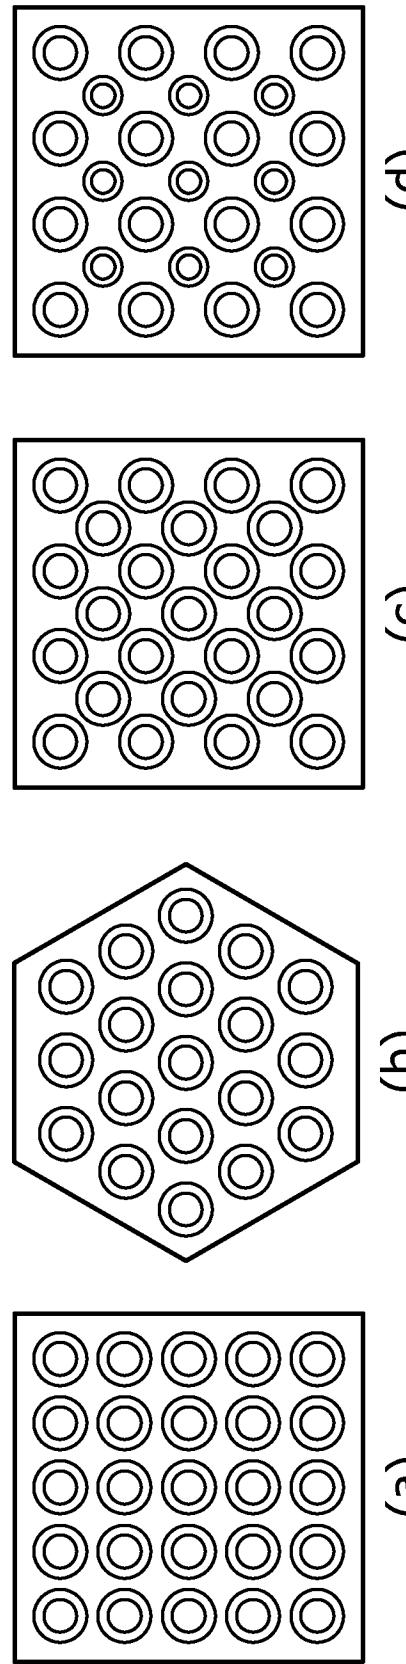


FIG. 3


(d)

(c)


(b)

(a)


3/12

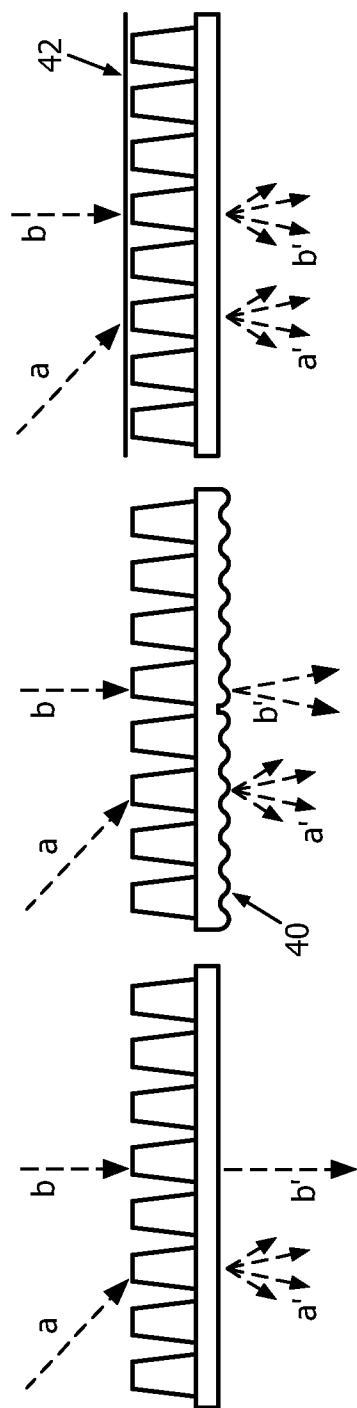


4/12

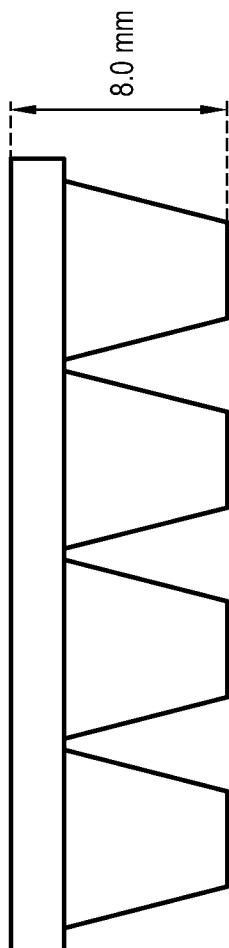

(b)

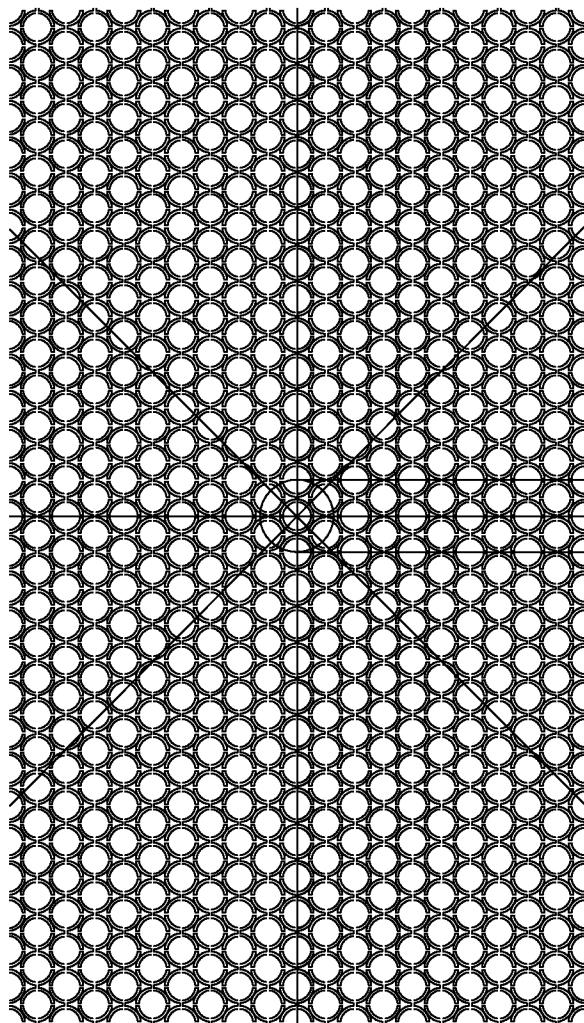

(c)

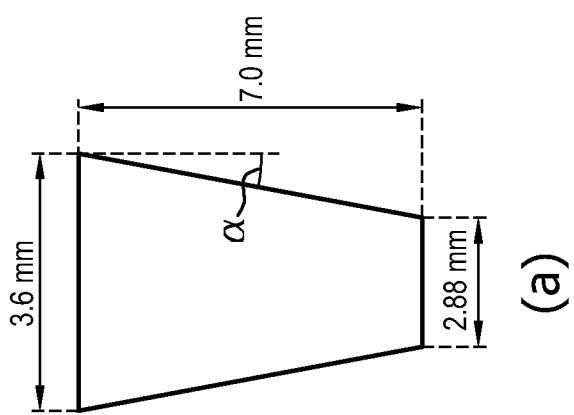

(a)

FIG. 5

5/12

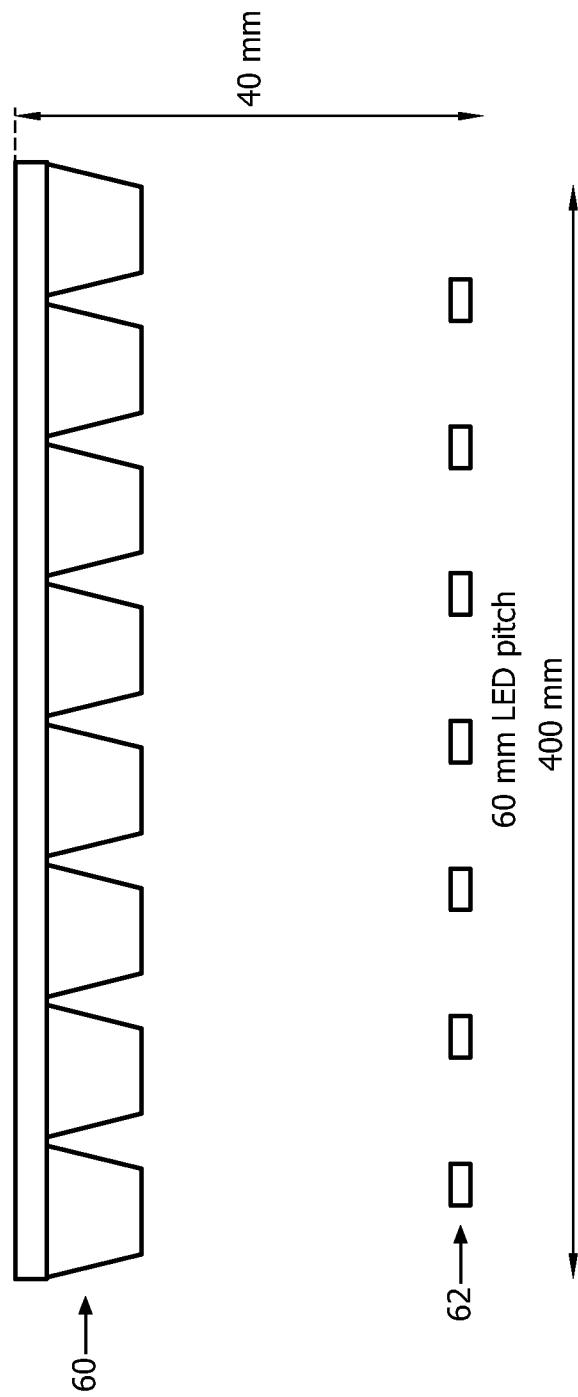


FIG. 6

6/12

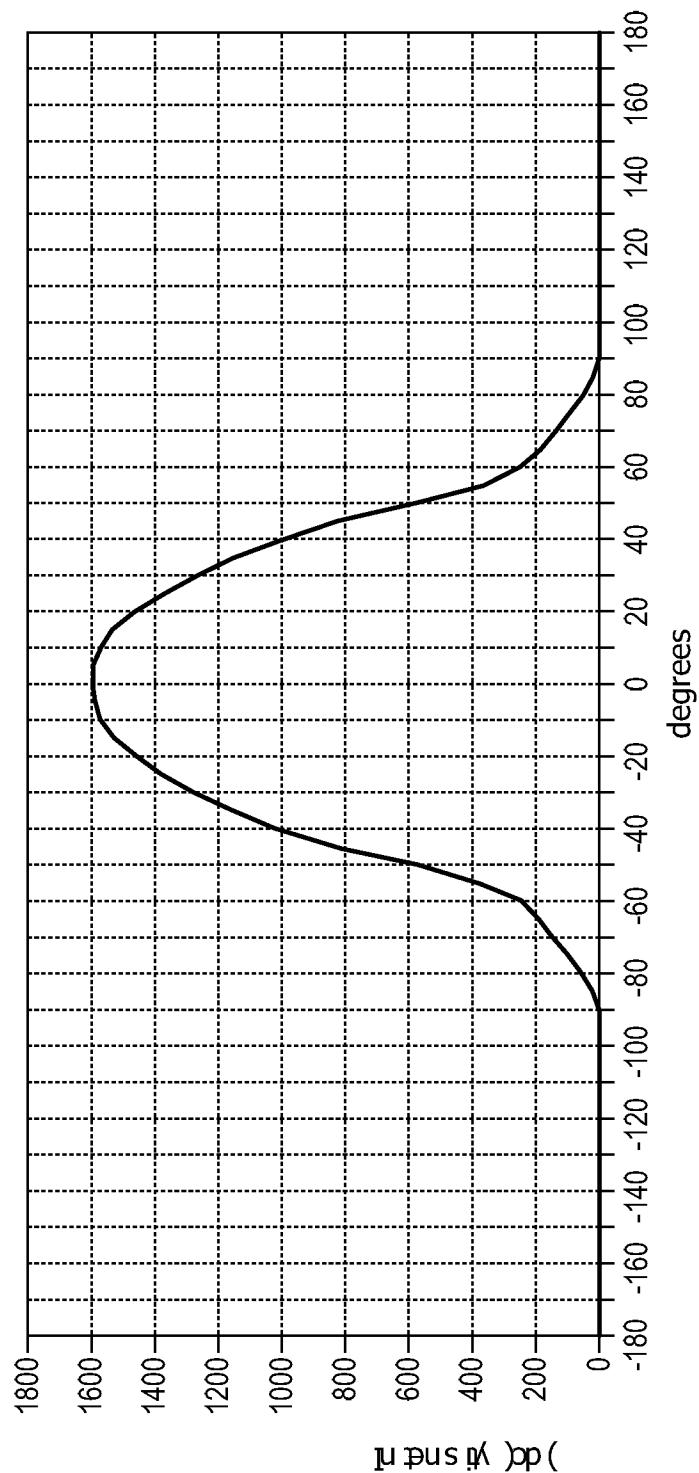


FIG. 7

7/12

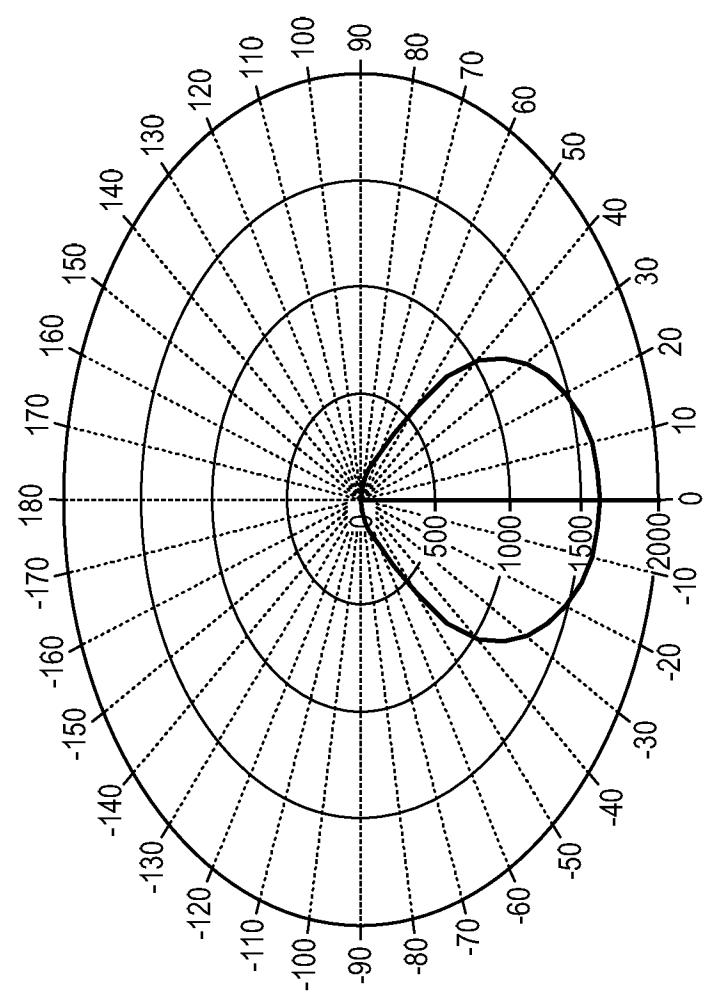


FIG. 8

8/12



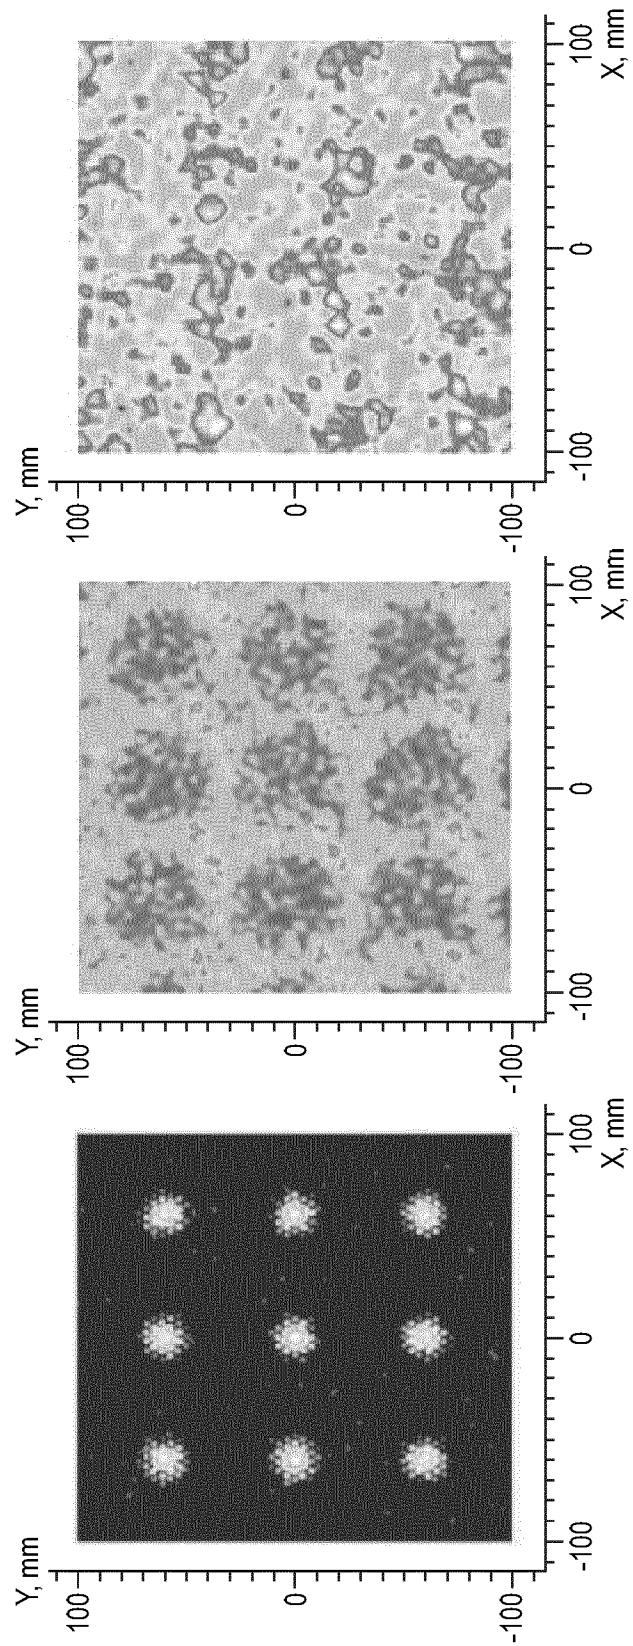


FIG. 11

FIG. 10

FIG. 9

9/12

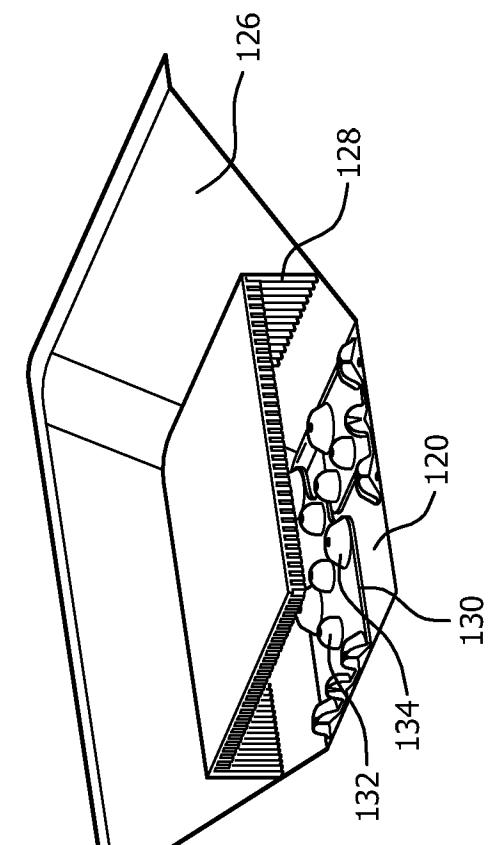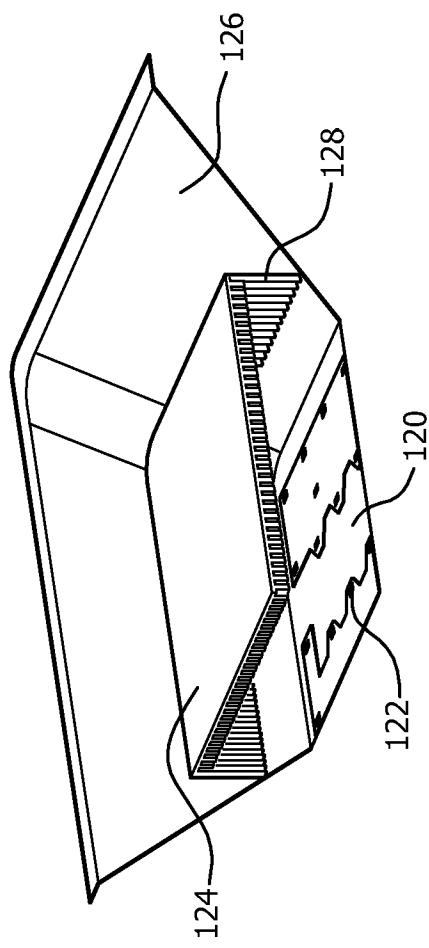

10/12

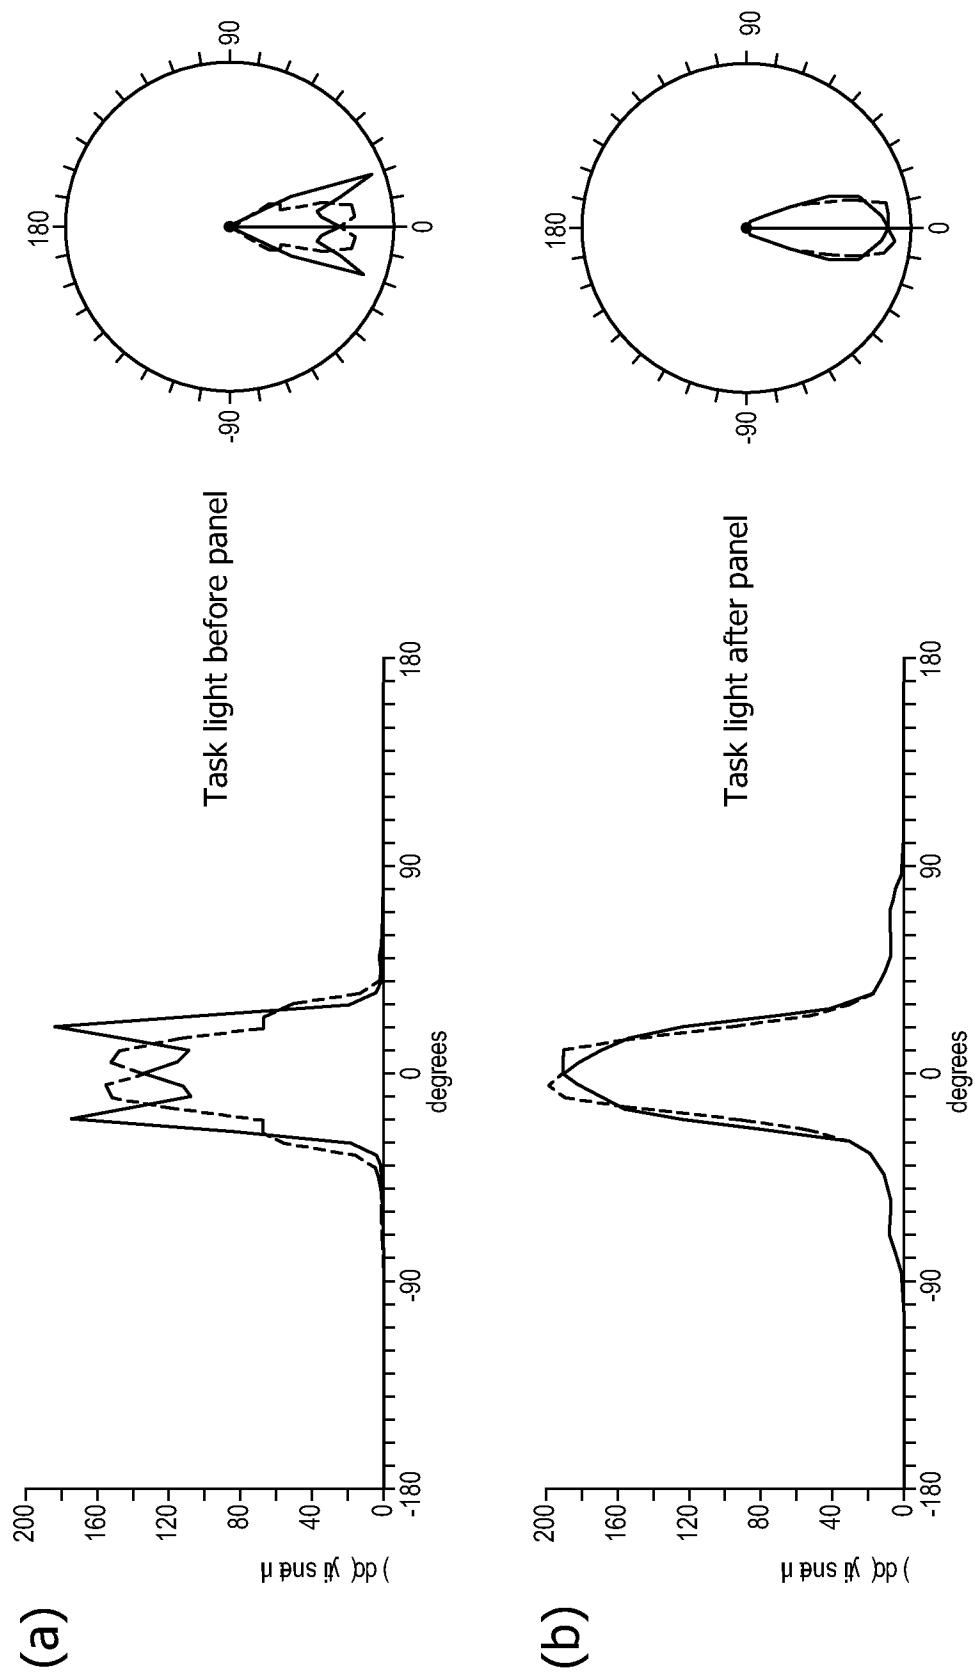


FIG. 14

11/12

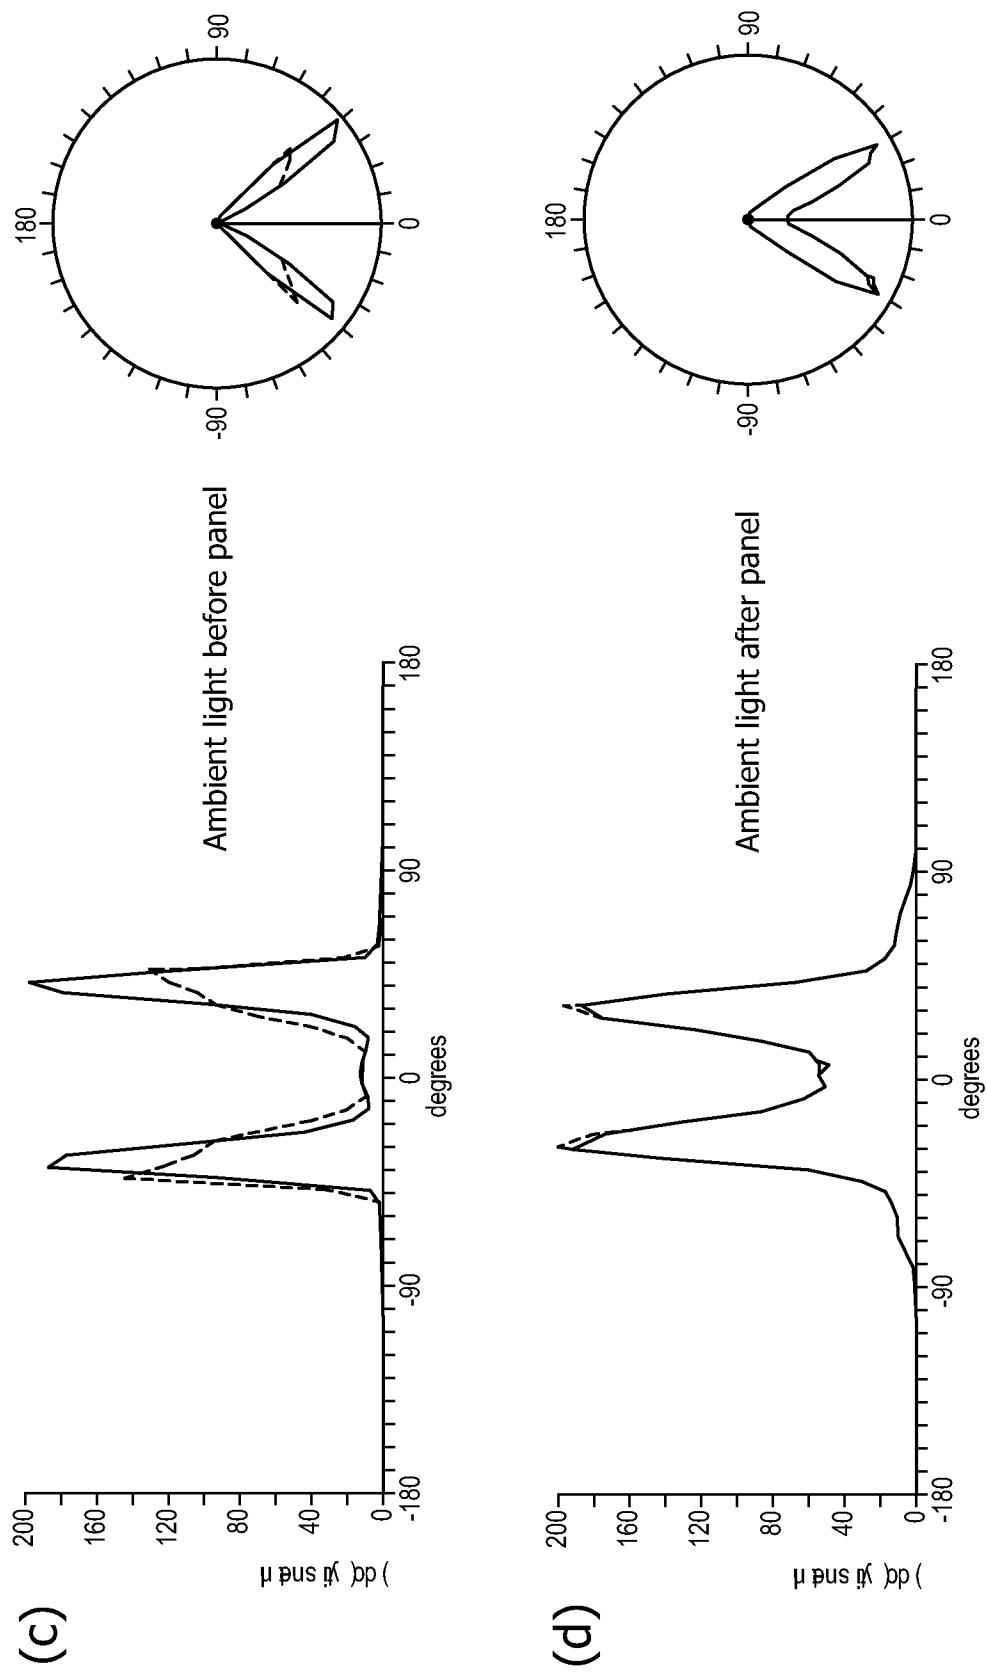


FIG. 14

12/12

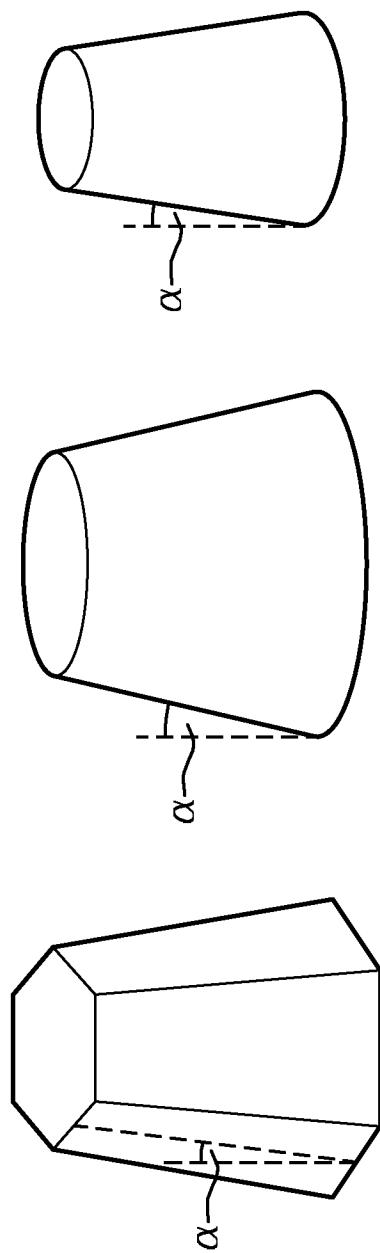


FIG. 15

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/070296

A. CLASSIFICATION OF SUBJECT MATTER
INV. F21V5/00 F21S8/00
ADD. F21Y101/02 F21Y105/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F21S F21V F21Y

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010/097809 A1 (MUNRO JAMES F [US] ET AL) 22 April 2010 (2010-04-22) figure 20 paragraphs [0078], [0079]	1,6,14, 15 11-13
X	DE 10 2006 009325 A1 (KARL JUNGBECKER GMBH & CO [DE]) 6 September 2007 (2007-09-06) figures 1-3 paragraph [0001] - paragraph [0006]	1-3,14, 15
X	EP 2 306 073 A2 (AUTOMOTIVE LIGHTING REUTLINGEN [DE]) 6 April 2011 (2011-04-06) figures 5, 6 pages 37, 42	1,6
		-/-

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
4 November 2014	12/11/2014
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Sacepe, Nicolas

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/070296

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2001/019748 A1 (BEESON KARL [US] ET AL) 6 September 2001 (2001-09-06) figure 17 paragraph [0072] ----- US 2010/177495 A1 (VAN OERS DENIS JOSEPH CAREL [NL] ET AL) 15 July 2010 (2010-07-15) figure 1 paragraph [0028] -----	11
Y	US 2002/048168 A1 (SEJKORA GUNTHER [AU] ET AL SEJKORA GUENTHER [AT] ET AL) 25 April 2002 (2002-04-25) the whole document -----	12,13
A	US 2011/286200 A1 (IIMURA KEIJI [JP] ET AL) 24 November 2011 (2011-11-24) the whole document -----	1-15
A		1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/EP2014/070296

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010097809	A1 22-04-2010	NONE	
DE 102006009325	A1 06-09-2007	NONE	
EP 2306073	A2 06-04-2011	CN 102032519 A DE 102009053581 B3 EP 2306073 A2	27-04-2011 03-03-2011 06-04-2011
US 2001019748	A1 06-09-2001	CA 2273050 A1 DE 69711072 D1 DE 69711072 T2 EP 0941502 A1 JP 2001505497 A KR 20000057318 A KR 20050100706 A TW 444140 B US 6010747 A US 6261664 B1 US 2001019748 A1 WO 9825181 A1	11-06-1998 18-04-2002 19-09-2002 15-09-1999 24-04-2001 15-09-2000 19-10-2005 01-07-2001 04-01-2000 17-07-2001 06-09-2001 11-06-1998
US 2010177495	A1 15-07-2010	CN 101755165 A EP 2167865 A1 JP 2010529612 A TW 200925514 A US 2010177495 A1 WO 2008149265 A1	23-06-2010 31-03-2010 26-08-2010 16-06-2009 15-07-2010 11-12-2008
US 2002048168	A1 25-04-2002	AT 244852 T AU 765828 B2 AU 4749700 A CA 2374023 A1 DK 1179158 T3 EP 1179158 A1 EP 1338845 A2 ES 2202127 T3 JP 2003500813 A NO 20015632 A NZ 515195 A PT 1179158 E US 2002048168 A1 WO 0071927 A1	15-07-2003 02-10-2003 12-12-2000 30-11-2000 04-08-2003 13-02-2002 27-08-2003 01-04-2004 07-01-2003 19-11-2001 29-04-2003 30-09-2003 25-04-2002 30-11-2000
US 2011286200	A1 24-11-2011	NONE	