




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : A61F 2/24</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/40176 (43) International Publication Date: 13 July 2000 (13.07.00)</p>
<p>(21) International Application Number: PCT/US99/30904 (22) International Filing Date: 22 December 1999 (22.12.99) (30) Priority Data: 09/223,442 30 December 1998 (30.12.98) US (71) Applicant: ST. JUDE MEDICAL, INC. [US/US]; One Lillehei Plaza, St. Paul, MN 55117 (US). (72) Inventors: KARI, Erik, E.; 6278 62nd Street, Albertville, MN 55301 (US). SCHROEDER, Richard, F.; 5497 East Danube Road N.E., Fridley, MN 55432 (US). KALGREEN, Jason; 102 Hoskins Court, #6G, Palo Alto, CA 94305 (US). (74) Agents: CHAMPLIN, Judson, K. et al.; Westman, Champlin & Kelly, P. A., Suite 1600 – International Centre, 900 Second Avenue South, Minneapolis, MN 55402–3319 (US).</p>	<p>(81) Designated States: BR, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	

(54) Title: TISSUE HEART VALVE HOLDER

(57) Abstract

A tissue valve holder (10) for holding a tissue heart valve bioprosthesis (100) such that the tissue valve (100) may be supported without contacting any surface, regardless of whether or not the valve (100) is in a container (200). The tissue valve holder (10) includes a holder assembly (14) adapted to be secured to the tissue valve (100). The holder assembly (14) may include a holder body (18) and a removable disk (20). The holder assembly (14) and the tissue valve (100) secured thereto rest on a support structure (16). The support structure (16) may comprise a support surface and a plurality of support legs (36). The support surface, in turn, may comprise an annular ring (38) with the support legs (36) connected thereto. The holder assembly (14) rests on the support surface with the tissue valve (100) suspended in the center of the ring (38).

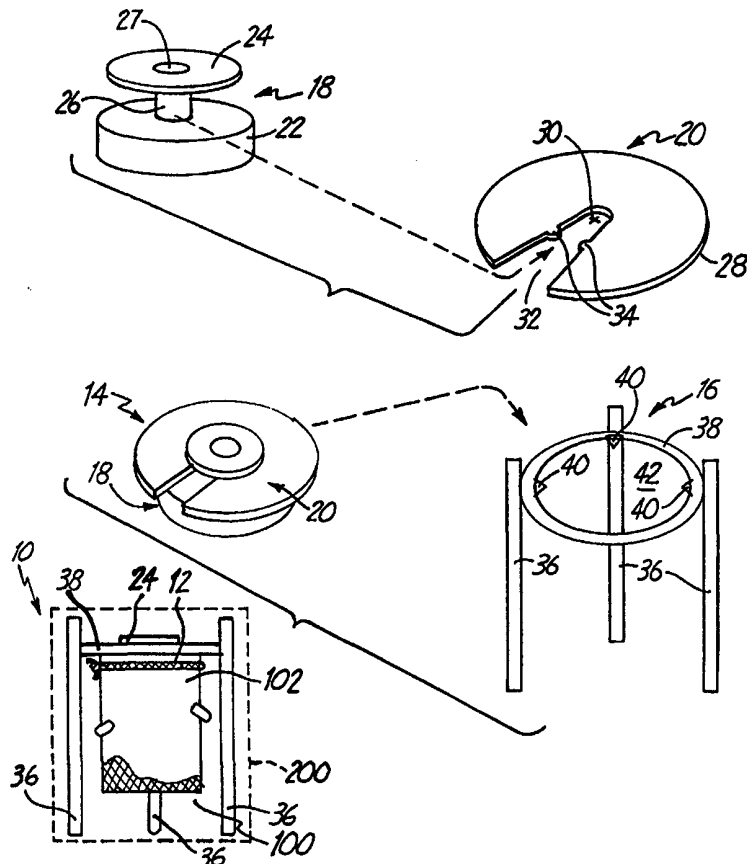

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TISSUE HEART VALVE HOLDER

FIELD OF THE INVENTION

The present invention generally relates to tissue heart valve bioprostheses. More specifically, the present invention relates to holders for tissue heart valve bioprostheses.

BACKGROUND OF THE INVENTION

Prosthetic valves are utilized to replace malformed, damaged, diseased or otherwise malfunctioning valves in body passageways, such as heart valves including the tricuspid valve, mitral valve, the aortic valve and the pulmonary valve. Such prosthetic heart valves are typically implanted into the heart either by open chest surgery, which requires a sternotomy, or by minimally invasive surgery, which requires a thoracotomy between adjacent ribs.

Heart valve prosthesis may be divided into two groups, namely tissue valves and mechanical valves. Typically, bioprosthetic tissue valves are harvested from a suitable animal, usually a porcine heart, prepared according to known methods, and may be mounted to a stent to facilitate implantation. Tissue valves prepared from pericardial tissue are also known in the art. Mechanical valves, by contrast, utilize synthetic materials to form a valve having a ball, a disk, a pair of leaflets (bileaflet), or a plurality of leaflets to regulate blood flow therethrough.

A number of packaging designs have been developed for holding and transporting tissue heart valve bioprostheses. One such design provides a tissue valve holder which suspends the tissue valve in a container having a storage solution. The tissue valve remains suspended in the solution and sealed within the

-2-

container until the valve is removed by the surgeon for implantation into a patient.

An example of such a packaging design is disclosed in U.S. Patent No. 5,560,487 to Starr. The packaging system disclosed in Starr utilizes a holder that suspends the tissue valve in a container of preservative. However, the holder is not able to suspend the tissue valve once removed from the container. In the case of a valved conduit, the holder disclosed in Starr does not maintain the shape of the tissue valve because only three points of contact are used to secure the aortic root of the valve to the holder.

Maintaining the tissue valve in suspension after removal from the container is desirable to prevent the valve from coming into contact with other surfaces which may not be sterile. Maintaining the shape of the valve in the container is desirable to avoid deforming or damaging the valve during shipping and handling. As such, an improved holder for holding a tissue valve is desirable.

SUMMARY OF THE INVENTION

The present invention provides an improved tissue valve holder for holding a tissue heart valve bioprosthesis such that the valve may be supported without contacting any surface, whether or not the valve is in a container, by utilizing a separate support structure. In addition, in one aspect, the present invention provides an improved tissue valve holder that maintains the shape of the valved conduit while packaged by utilizing a continuous contact interface between the holder and the aortic root of the valve.

The tissue valve holder of the present invention includes a holder assembly adapted to be

-3-

secured in the conduit outflow of the tissue valve using a securing member surrounding the conduit outflow. The holder assembly may include a holder body and a removable disk. The holder assembly and the tissue valve secured thereto rest on a support structure that includes a plurality of support legs and a support surface. The support surface may comprise an annular ring with the support legs connected thereto. The holder assembly rests on the annular ring with the tissue valve suspended in the center of the ring. The invention can be used with stented or stentless valves.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a perspective view of a tissue valve holder and associated parts in accordance with one embodiment of the present invention. Figure 1 particularly illustrates how the various parts may be assembled.

Figure 2 is a side view of the tissue valve holder of Figure 1 of the present invention and a handle for use therewith.

Figure 3A is a bottom view of a holder body for use in the tissue valve holder of the present invention.

Figure 3B is a side view of the holder body illustrated in Figure 3A.

Figure 3C is a perspective view of the holder body illustrated in Figure 3A.

Figure 4A is a top view of a disk for use in the tissue valve holder of the present invention.

Figure 4B is a side view of the disk illustrated in Figure 4A.

Figure 4C is a perspective view of the disk illustrated in Figure 4A.

-4-

Figure 5A is a side view of a support structure for use in the tissue valve holder of the present invention shown in Figure 1.

5 Figure 5B is a top view of the support structure illustrated in Figure 5A.

Figure 5C is a perspective view of the support structure illustrated in Figure 5A.

Figure 6 is an exploded view of a tissue valve holder in accordance with another embodiment.

10 Figures 7A and 7B are perspective views showing a handle and a holder body of Figure 6.

Figure 8 is an exploded view of a tissue valve holder in accordance with another embodiment of the present invention.

15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The following detailed description of the invention should be read with reference to the drawings which are not necessarily to scale and in which similar elements are numbered the same. The detailed description and drawings depict selected preferred
20 embodiments and are not intended to limit the scope of the invention.

FIG. 1 illustrates a valve holder 10 for holding a valved conduit 100. A valved conduit refers
25 to either a natural valved conduit, such as an aortic root, or a manufactured valved conduit which may be constructed from a combination of materials, such as a pericardial or synthetic conduit joined with either pericardial, synthetic, bioresorbable or porcine valve
30 leaflets. Tissue valve holder 10 includes two primary components, namely, a holder assembly 14 and a support structure 16. The holder assembly 14 may include a holder body 18 and a removable disk 20. Although illustrated as two separate components, holder assembly

-5-

14 may comprise an integral one piece construction without departing from the scope and spirit of the present invention.

5 Holder body 18 includes a base portion 22 and a cap portion 24. A neck portion 26 extends between the base portion 22 and the cap portion 24. Additionally, neck 26 may be round or slightly squared to limit rotational movement. Holder body 18 further includes a keyed hole 27 extending through the cap portion 24, the
10 neck portion 26 and the base portion 22 to receive a handle 300 as illustrated in FIG. 2.

 Base portion 22 is adapted to fit in the conduit outflow 102 of the tissue valve or valved conduit 100. The holder body 18 may be secured to the
15 tissue valve 100 by inserting the base portion 22 into the conduit outflow 102 and then tying a tape or cord 12 around the outside of the conduit outflow 102, to securely position but not damage valve 100, and not cause any tears in the valve 100. The tape or cord 12
20 may be made of a polymer fabric, suture or thread, such as polyester polyamide or polyterefluoroethylene (PTFE) or other suitable materials, such as elastic, rubber bands, or bioprosthetic materials, such as pericardium. Those skilled in the art will recognize that other means
25 may be utilized to secure the conduit outflow 102 of the valve 100 to the base portion 22 of the holder body 18.

 The base portion 22 of the holder body 18 may be generally cylindrical, having a continuous periphery such that a continuous interface is formed between the
30 base portion 22 and the conduit outflow 102 of the tissue valve 100. By providing a continuous interface, the base portion 22 prevents deformation and/or damage to the tissue valve 100 during shipping and handling.

-6-

Disk 20 includes a periphery 28 and a center 30. A main slot 32 extends from the periphery 28 to the center 30 of the disk 20. The main slot 32 is sized to accommodate the neck portion 26 of the holder body 18.

5 One or more protrusions 34 may be disposed along the inside edge of the main slot 32. The protrusions 34 are one way to establish an interference fit with the neck portion 26 of the holder body 18, although other mechanisms or configurations for protrusions 34 could be

10 utilized. In this manner, the neck portion 26 of the holder body 18 may be inserted into the main slot 32 and advanced towards the center 30 of the disk 20. When the neck portion 26 engages the protrusions 34, additional force is required to advance the neck portion 26 to the

15 center 30 of the disk 20. With this additional force, the neck portion 26 snaps into the center 30 of the disk 20 such that the protrusions 34 retain the neck portion 26 within slot 32 and thus the holder body 18 in the center 30 of the disk 20.

20 With the disk 20 positioned between the base portion 22 and the cap portion 24 of the holder body 18 such that the neck portion 26 is positioned in the main slot 32 of disk 20 adjacent the center 30, the holder assembly 14 may be placed on the support structure 16.

25 Support structure 16 may include a plurality of support legs 36 connected to an annular ring 38. Three support legs 36 may be utilized, but those skilled in the art will recognize that more or less than three support legs 36 may be utilized. Structure 16 can be any desired

30 shape, such as a continuous cylinder.

Annular ring 38 may optionally include protrusions 40 extending towards the center of the opening 42. The protrusions 40 are sized to provide a support surface or ledge on which the disk 20 rests. If

-7-

the protrusions 40 are not utilized, the annular ring 38 provides a support on which the disk 20 rests. With this arrangement, the holder body 18 and tissue valve 100 secured thereto are suspended in the open portion 42 of the annular ring 38. The tissue valve holder 10 with the tissue valve 100 secured thereto may be placed in a suitable container 200 and sealed by conventional means. The container 200 may contain a suitable storage solution, such as ethanol, glutaraldehyde, formaldehyde, or saline, to preserve the valve 100 until it is ready for implantation by a surgeon. By suspending the tissue valve 100, the holder 10 prevents undesirable contact with other surfaces, including container 200, regardless of whether the valve 100 remains in the container 200 or rests on another surface after removal from the container.

The holder body 18, the disk 20 and the support structure 16 may be made of polymer, such as a polysulfone, a polyacetyl or polyamide or other suitable biocompatible material capable of being sterilized. The holder body 18, the disk 20 and the support structure 16 may be made by injection molding, machined or other suitable manufacturing process.

The tissue valve holder of the present invention provides a number of advantages over prior art designs. For example, the tissue valve holder allows the tissue valve to remain suspended without contacting other surfaces regardless of whether or not the tissue valve holder and the tissue valve are in the container. This allows the valve to be sterilized without touching the container wall. Further, the tissue valve holder permits more consistent radiation dosage levels during sterilization because the valve is positioned in the same place in the container every time. In addition,

-8-

the tissue valve holder provides better support to the tissue valve, and in particular, the conduit outflow to reduce the likelihood of deformation and/or damage during shipping and handling.

5 The tissue valve holder also allows the surgeon to more quickly implant the valve, thus reducing patient cross-clamp time because the valved conduit is pre-positioned on a holder. This eliminates the need to manually manipulate the device in order to position the
10 device for implant. Furthermore, the tissue valve holder is easier to attach to the valve and easier to insert into the container.

FIG. 2 illustrates a side view of the holder body 18 and a handle 300 for use with the tissue valve
15 holder 10. For purposes of illustration only, the support structure 16 and the disk 20 have been omitted for sake of clarity. Handle 300 may be inserted into keyed hole 27 of the holder body 18 as indicated by arrow 302. Handle 300 may be locked or unlocked simply
20 by rotating the handle 300 in the keyed hole 27, or may be snap fit or threaded into hole 27. The details of the keyed hole 27 are illustrated by hidden lines as best seen in FIG. 3C. Handle 300 may be used to position and rotate the valve 100 into the desired
25 position in the patient's heart.

As discussed previously, the tissue valve 100 is secured to the holder body 18 by inserting the base portion 22 into the conduit outflow 102 and securing tape or cord 12 to the outside of the conduit outflow
30 102. The base portion 22 is secured to the conduit outflow 102 above the leaflets 105 and the coronary arteries 106. Base portion 22 may form a continuous interface with the inside surface of the conduit outflow 102 in order to maintain the shape of the valve 100.

-9-

FIGS. 3A, 3B and 3C illustrate various detailed views of the holder body 18. Specifically, FIG. 3A is a bottom view, FIG. 3B is a side view and FIG. 3C is an isometric view of the holder body 18.

5 Holder body 18 includes a base portion 22, a cap portion 24 and a neck portion 26 connected therebetween. Cap portion 24 has an outside diameter larger than the width of the main slot 32 of the disk 20, such that the cap portion 24 rests on the disk 20. Base portion 22 may

10 include a recess or cavity 21 to form an annular ridge 29. The annular ridge 29 of the base portion 22 preferably forms a continuous interface with the conduit outflow 102 attached thereto.

Holder body 18 further includes a keyed hole

15 27 to receive a handle 300 as illustrated in FIG. 2. Keyed hole 27 includes a pair of through slots 25 and a pair of dead end slots 23. The handle is placed into slots 25 and rotated into slots 23. The internal details of the keyed hole 27 are shown by hidden lines

20 in FIG. 3C.

Figures 4A, 4B and 4C illustrates various detailed views of the disk 20 for use in the tissue valve holder 10 of the present invention. FIG. 4A is a top view, FIG. 4B is a side view and FIG. 4C is a

25 perspective view of the disk 20. Disk 20 includes a periphery 28 and a center 30. A plurality of slots 35 are provided to accommodate the portion of the support legs 36 that extend above the annular ring 38 as shown in Figures 5A-5C. The number of slots 35 may be varied

30 to correspond to the number of support legs 36. Slots 35 may be omitted if the support legs 36 are attached to the periphery legs which may be integral with the annular ring 38 or if the protrusions 40 are used as the

-10-

support surface. Legs 36 can also be flush with ring 38, so that slots 35 may be omitted.

In the embodiment of FIGS. 4A,B,C, disk 20 has an outside diameter that is larger than the inside diameter of the annular ring 38 of the support structure 16 to permit the disk 20 to rest on and be supported on the annular ring 38. If the protrusions 40 are used, the outside diameter of the disk 20 may be smaller than the inside diameter of the annular ring 38 but larger than the inside diameter of the protrusions 40 to permit the disk 20 to rest on and be supported by the protrusions 40.

FIGS. 5A, 5B and 5C illustrate various detailed views of the support structure 16 for use with the tissue valve holder 10 of the present invention. Specifically, FIG. 5A is a side view, FIG. 5B is a top view and FIG. 5C is a perspective view of the support structure 16. Support structure 16 includes a plurality of support legs 36 attached to the annular ring 38. The outside diameter of annular ring 38 is sized to keep the valve 100 radially centered in the container 200. The support legs 36 may extend partially above the annular ring 38 and extend partially below the annular ring 38 to keep the tissue valve 100 vertically centered in the container 200. Support legs 36 extend below the annular ring 38 a sufficient distance to keep the tissue valve from touching any surface once removed from the container 200. In general, the legs can be integral with ring 38 circumference, can be positioned outside of ring 38, may be flush with top of ring 38, or can extend beyond ring 38.

Protrusion members 40 as illustrated in FIG. 1 may be used to provide a support surface for the disk 20 to rest on. If no protrusions 40 are utilized, as

-11-

illustrated in FIGS. 5A - 5C, the annular ring 38 provides a support surface for the disk 20 to rest on. With the holder body 18 secured in the main slot 32 of the disk 20, the holder assembly 14 and the tissue valve 100 secured thereto may be placed in the opening 42 of the support structure 16 with the disk 20 resting on the support surface 38 or 40 without contacting structure 16. In this position, the separate support structure 16 enables the holder 10 to suspend the tissue valve 100 without contacting any surface, whether or not the valve 100 is in a container 200 or on another surface after removal from the container 200.

To utilize this invention for valved conduit 100, the health professional opens container 200. Handle 300 is inserted into keyed hole 27 of holder assembly 18. Holder assembly 18 is lifted and removed from container 200. Preferably, support structure 16 remains in container 200. Disk 20 is removed from holder assembly 18, making valved conduit 100 ready for implant. The health professional then sutures the inflow edge 107 of valved conduit 100 to the valve annulus of the patient. Then, cord 12 around valved conduit 100 is released or cut, releasing valved conduit 100 from holder assembly 18. Holder assembly 18 is then withdrawn. The conduit outflow 102 of the valved conduit 100 is sutured into position.

FIG. 6 is an exploded perspective view of a tissue valve holder 320 in accordance with another embodiment. Tissue valve holder 320 is adapted to hold a subcoronary stentless tissue valve 322 which is carried on a holder body 324. Holder body 324 has three arms 326A, 326B and 326C which are sutured to the commissure posts 323 of valve 322. Removable disk 328 includes slot 330 formed therein which is adapted to

-12-

mate with holder body 324. Alternatively, the disks set forth in any of the embodiments herein can be hinged, collapsible or expandable. Valve 322 is suspended in support structure 332 which is generally cylindrical in shape and has two side openings 334 formed therein. Holder body 324 has a key hole formed therein adapted to receive a keyed handle 340 similar to that shown and described in U.S. Patent No. 5,843,177. Other attachment techniques in any of the embodiments herein can also be used, such as a snap fit, a threaded coupling, or a friction fit. Disk 328 rests within recess of lip 329 or on top surface of support structure 332 which can then be placed in a container, as illustrated in FIG. 1.

FIGS. 7A and 7B show coupling of handle 340 to holder body 324. As illustrated in FIG. 7A, distal tip 342 of handle 340 is inserted into keyed slot 344. Once inserted, handle 340 is rotated relative to holder body 324 as illustrated in FIG. 7B thereby locking key tabs 346 in holder body 324. A spring 348 provides a separation force between handle 340 and holder body 324. Holder body 324 includes a neck (not shown) similar to neck 26 shown in FIG. 1 for receiving disk 328. FIGS. 7A and 7B also show scalpel guides 350. Sutures (not shown) are used to secure valve 322 to holder body 324. Sutures run through holes 352 adjacent scalpel guides 350 having a notch which is aligned with the suture, such that a scalpel may be run through the notch, thereby severing the suture and releasing valve 322 from holder body 324.

FIG. 8 is an exploded view of a tissue valve holder 348 in accordance with another embodiment for holding stented tissue valves, either mitral or aortic valves 353. A holder 355 is sutured onto the inflow

-13-

edge of a mitral valve or the commissure posts of an aortic valve 353 and includes a threaded opening 354 formed therein. A holder support 356 includes a threaded screw 358 which is received in threaded opening 5 354. Holder support 356 includes radial extensions 360 each carrying protruding legs 362. Legs 362 abut the outer perimeter of valve 353 when holder support 356 is screwed into holder 355. A snap fit or friction fit can also be used. Holder support 356 fits into support 10 structure 332 such that valve 353 is supported therein. Holder 356 rests on or in the recess of lip 329 of support structure 332 or top edge of support structure 332 and can be positioned in a container 200 as illustrated in FIG. 1. In this embodiment, the 15 container is opened and tissue valve holder 348 is removed from container 200. Holder support 356 is threaded off of holder 355, and a handle is threaded in. Valve 353 is sutured into place. Sutures connecting valve 353 to holder 355 are cut, leaving the valve in 20 place, and handle and holder 355 are removed.

Although the preceding detailed description sets forth selected preferred embodiments, those skilled in the art will appreciate the scope and spirit of the invention with reference to the appended claims. For 25 example, any number of legs 36 can be used. Further, the holder may be used with any combination of configurations.

-14-

WHAT IS CLAIMED IS:

1. A support system for holding a tissue heart valve prosthesis, wherein the tissue valve includes a conduit having an outflow portion, the holder comprising:

a holder assembly adapted to partially fit in the outflow portion of the conduit of the tissue valve;

a securing member surrounding the outflow portion of the conduit to secure the tissue valve to the holder assembly;

a support structure having a plurality of support legs and a support surface, wherein the holder assembly rests on the support surface such that the valve is suspended without contacting any other surface.

2. A holder for holding a tissue heart valve prosthesis as in claim 1, wherein the holder assembly and the conduit have a continuous contact interface.

3. A holder for holding a tissue heart valve prosthesis as in claim 2, wherein the securing member and the conduit have a continuous contact interface.

4. A holder for holding a tissue heart valve prosthesis as in claim 1, wherein the support surface comprises an annular ring.

5. A holder for holding a tissue heart valve prosthesis as in claim 4, wherein the support legs are connected to the annular ring.

6. A holder for holding a tissue heart valve prosthesis as in claim 5, wherein the support legs extend partially above the annular ring.

-15-

7. A holder for holding a tissue heart valve prosthesis as in claim 6, wherein the three support legs are utilized.

8. A holder for holding a tissue heart valve prosthesis, wherein the tissue valve includes a conduit having an outflow portion, the holder comprising:

a holder assembly including a holder body and a disk, the holder body adapted to fit in the outflow portion of the conduit of the tissue valve;

a securing member surrounding the outflow portion of the conduit to secure the tissue valve to the holder body;

a support structure having a plurality of support legs and a support surface, wherein the disk rests on the support surface such that the valve is suspended without contacting any other surface.

9. A holder for holding a tissue heart valve prosthesis as in claim 8, wherein the holder body and the conduit have a continuous contact interface.

10. A holder for holding a tissue heart valve prosthesis as in claim 9, wherein the securing member and the conduit have a continuous contact interface.

11. A holder for holding a tissue heart valve prosthesis as in claim 8, wherein the support surface comprises an annular ring.

12. A holder for holding a tissue heart valve prosthesis as in claim 11, wherein the support legs are connected to the annular ring.

13. A holder for holding a tissue heart valve prosthesis as in claim 12, wherein the support legs extend partially above the annular ring.

-16-

14. A holder for holding a tissue heart valve prosthesis as in claim 13, wherein the three support legs are utilized.

15. A holder for holding a tissue heart valve prosthesis as in claim 12, wherein the holder body includes a base portion, a cap portion and a neck portion extending therebetween.

16. A holder for holding a tissue heart valve prosthesis as in claim 15, wherein the base portion of the holder body has an outside diameter less than an inside diameter of the annular ring.

17. A holder for holding a tissue heart valve prosthesis as in claim 16, wherein the disk has an outside diameter greater than the inside diameter of the annular ring.

18. A holder for holding a tissue heart valve prosthesis as in claim 17, wherein the disk has a periphery, a center and a main slot extending from the periphery to the center, the disk disposed between the base portion and the cap portion of the holder body with the main slot disposed about the neck portion such that the cap portion rests on the disk.

19. A holder for holding a tissue heart valve prosthesis as in claim 18, wherein the disk includes a plurality of peripheral slots sized to fit about a portion of the support legs that extend above the annular ring.

20. A holder for holding a tissue heart valve prosthesis as in claim 19, wherein the main slot includes one or more protrusions sized to interfere with the neck portion of the holder body such that the neck portion is releasably fixed in the center of the disk.

21. A holder for holding a tissue heart valve prosthesis as in claim 20, wherein the holder body

-17-

includes a keyed hole adapted to receive a holder handle.

22. A package for holding and transporting a tissue heart valve prosthesis, wherein the tissue valve includes a conduit having an outflow portion, the package comprising:

- a container having an interior and an interior surface;
- a holder assembly adapted to partially fit in the outflow portion of the conduit of the tissue valve;
- a securing member surrounding the outflow portion of the conduit to secure the tissue valve to the holder assembly;
- a support structure having a plurality of support legs and a support surface adapted to fit in the interior of the container, wherein the holder assembly rests on the support surface such that the valve is suspended without contacting the interior surface of the container.

23. A package for holding and transporting a tissue heart valve prosthesis as in claim 22, wherein the holder assembly and the conduit have a continuous contact interface.

24. A package for holding and transporting a tissue heart valve prosthesis as in claim 23, wherein the securing member and the conduit have a continuous contact interface.

25. A package for holding and transporting a tissue heart valve prosthesis as in claim 22, wherein the support surface comprises an annular ring.

-18-

26. A package for holding and transporting a tissue heart valve prosthesis as in claim 25, wherein the support legs are connected to the annular ring.

27. A package for holding and transporting a tissue heart valve prosthesis as in claim 26, wherein the support legs extend partially above the annular ring.

28. A package for holding and transporting a tissue heart valve prosthesis as in claim 27, wherein the three support legs are utilized.

29. A support system for holding a tissue heart valve prosthesis, wherein the tissue valve includes a conduit, the holder comprising:

- a holder assembly having a plurality of arms adapted to fit with commissure posts of the tissue valve;

- a suture coupling at least one of the arms to a commissure post of the tissue valve to secure the tissue valve to the holder assembly;

- a support structure having a plurality of support legs and a support surface, wherein the holder assembly fits in the support structure such that the valve is suspended from a holder body without contacting any other surface.

30. A holder for holding a tissue heart valve prosthesis as in claim 29 including a removable disk adapted to couple to holder assembly, wherein the removable disk rests on the support surface of the support structure.

31. A holder for holding a tissue heart valve prosthesis as in claim 30 wherein the removable disk

-19-

includes a slot formed therein adapted to engage the holder assembly.

32. A holder for holding a tissue heart valve prosthesis as in claim 29 wherein the support structure includes two side openings formed therein.

33. A holder for holding a tissue heart valve prosthesis as in claim 29 wherein the holder assembly includes suture holes and the holder body is sutured to the prosthesis.

34. A holder for holding a tissue heart valve prosthesis as in claim 33 wherein the holder assembly includes a scalpel guide having a notch formed therein adapted to guide a scalpel when cutting the suture.

35. A holder for holding a tissue heart valve prosthesis as in claim 29 wherein the holder assembly includes a keyed slot formed therein adapted to receive a tip of a handle having key tabs formed therein.

36. A holder for holding a tissue heart valve prosthesis as in claim 29 wherein the holder assembly is adapted for coupling to a heart valve prostheses in either a mitral or aortic configuration.

37. A holder for holding a tissue heart valve prosthesis as in claim 29 including a holder support adapted to couple to the holder assembly and wherein the holder support couples to the support structure.

38. A holder for holding a tissue heart valve prosthesis as in claim 37 wherein the holder support includes a threaded screw which is received in a threaded opening in the holder assembly.

39. A holder for holding a tissue heart valve prosthesis as in claim 37 wherein the holder support includes protruding legs adapted to abut an outer perimeter of the valve prosthesis.

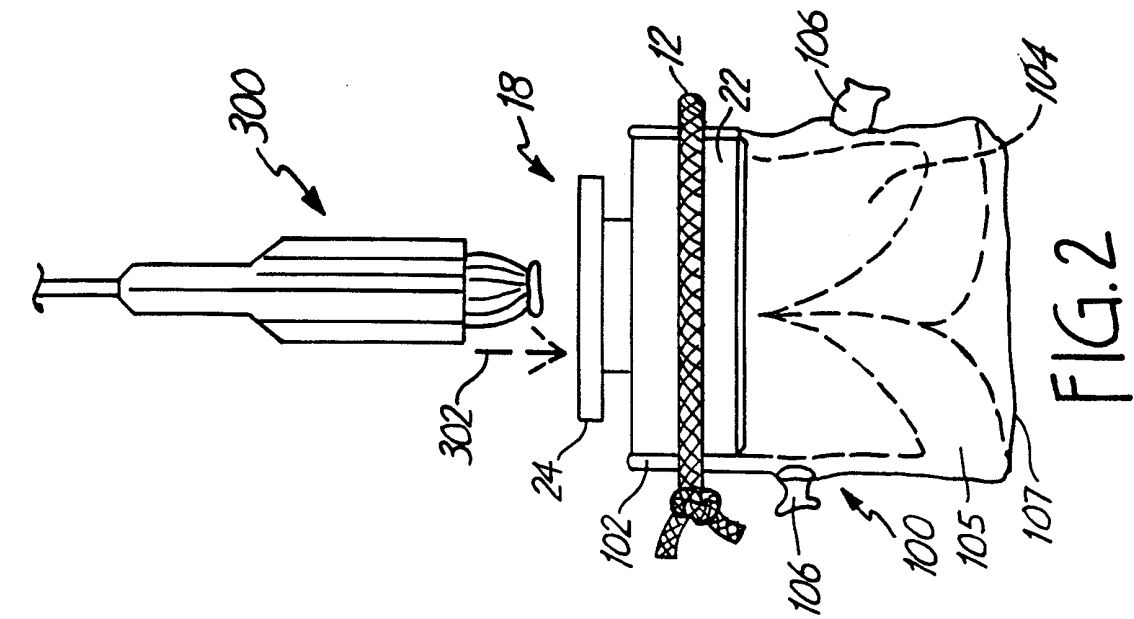


FIG. 2

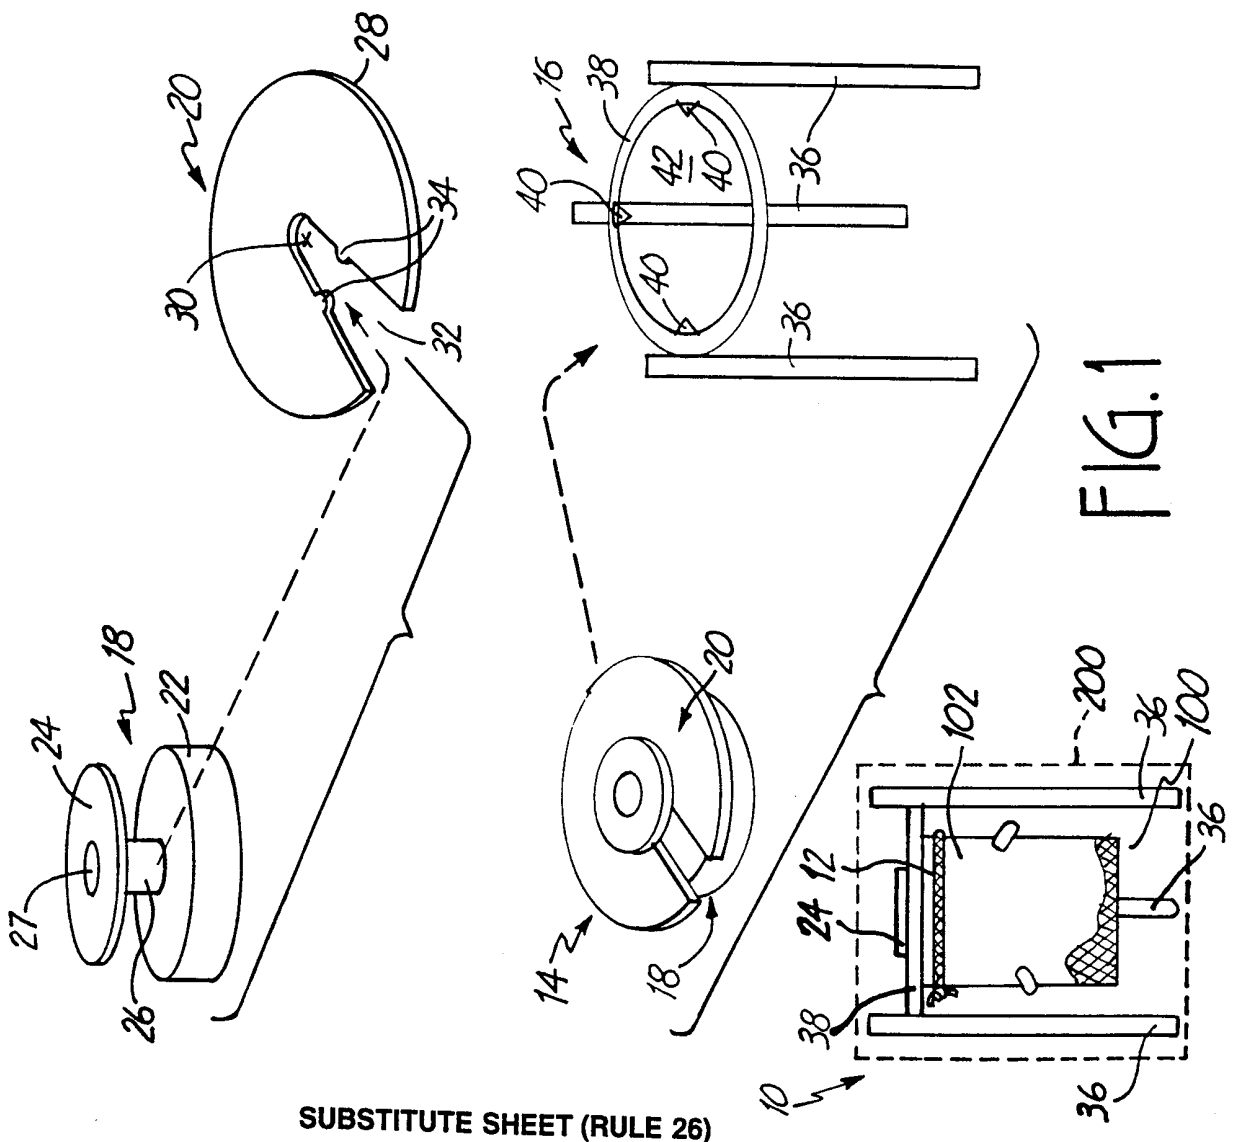
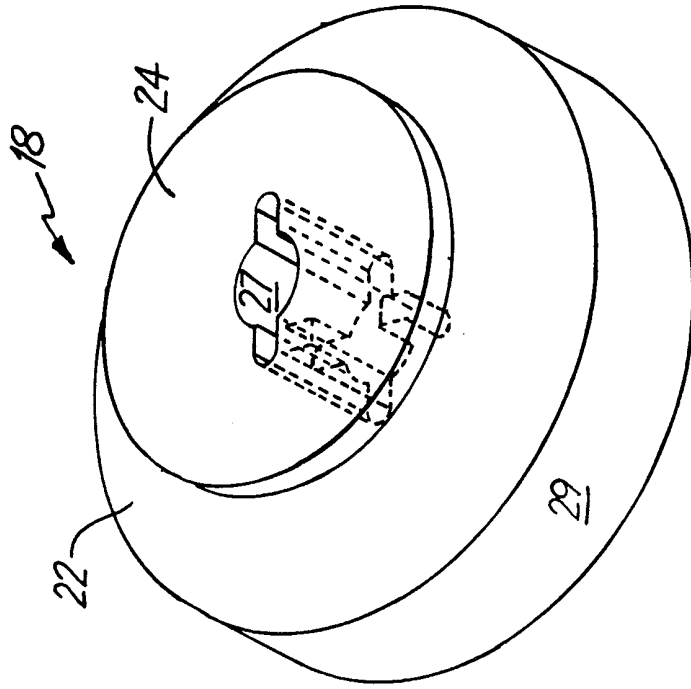
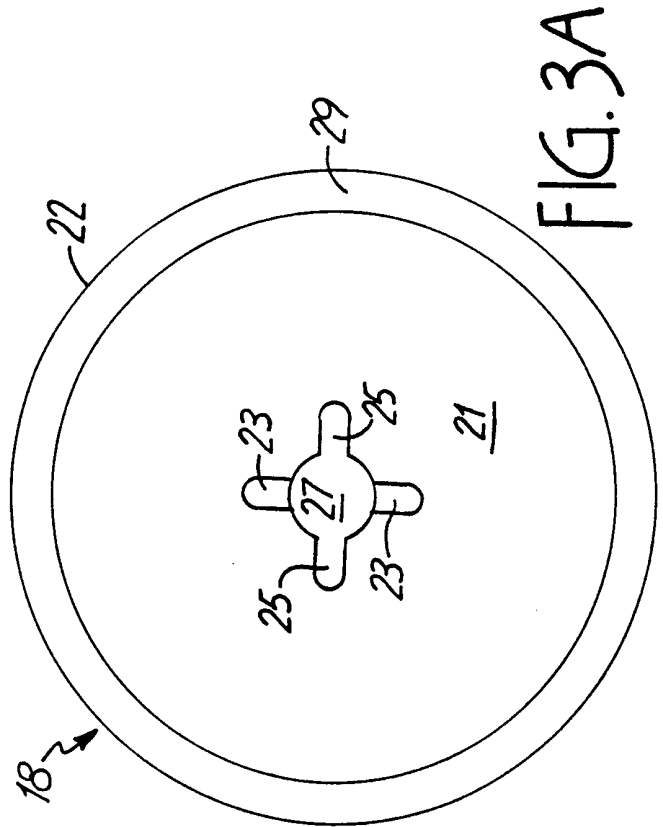
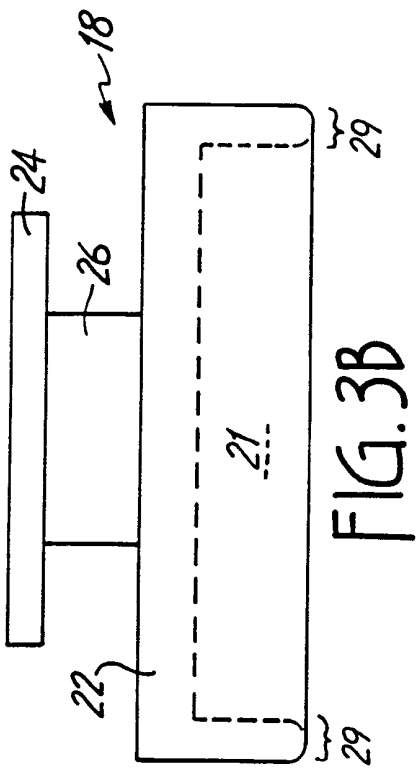


FIG. 1



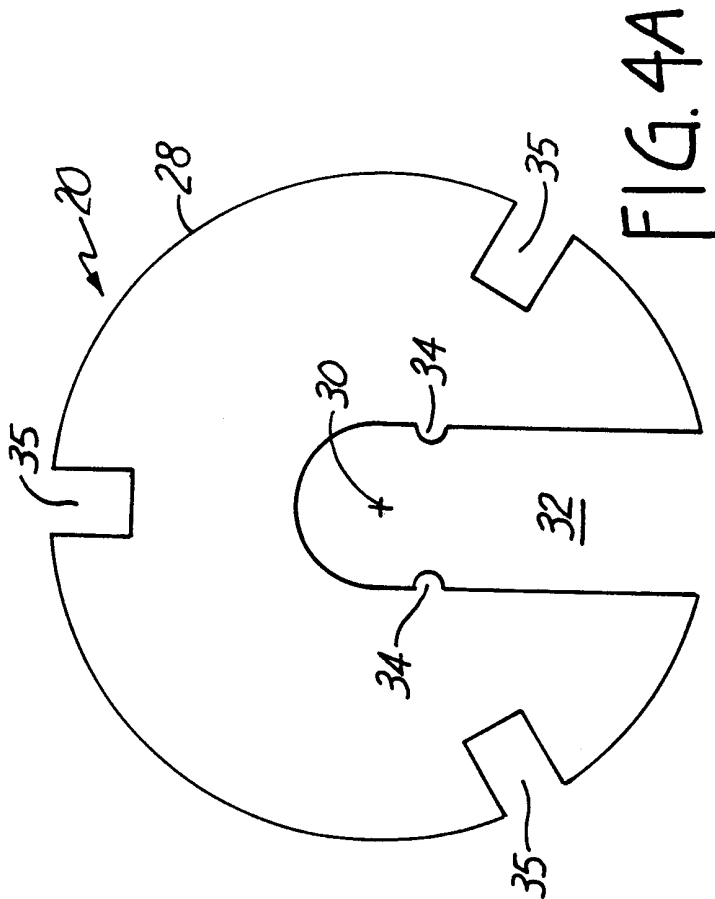


FIG. 4A

SUBSTITUTE SHEET (RULE 26)

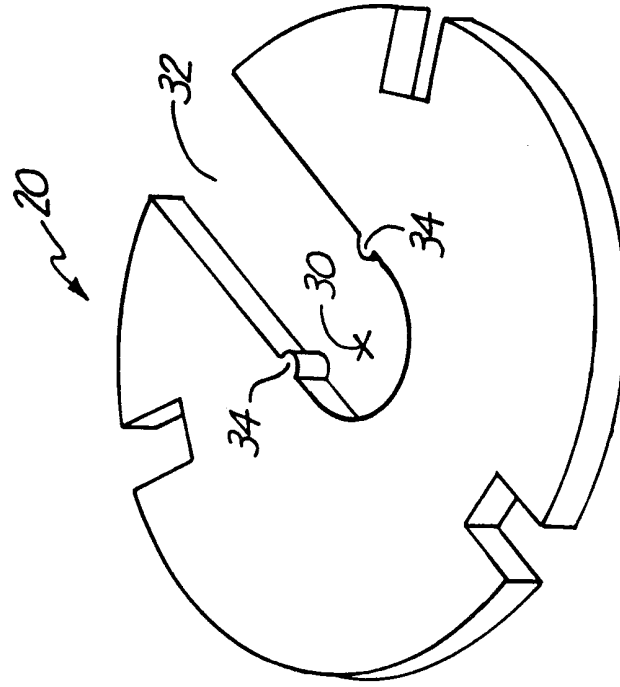


FIG. 4C

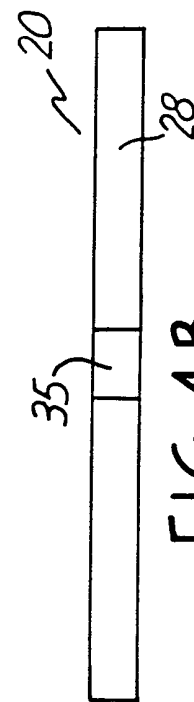


FIG. 4B

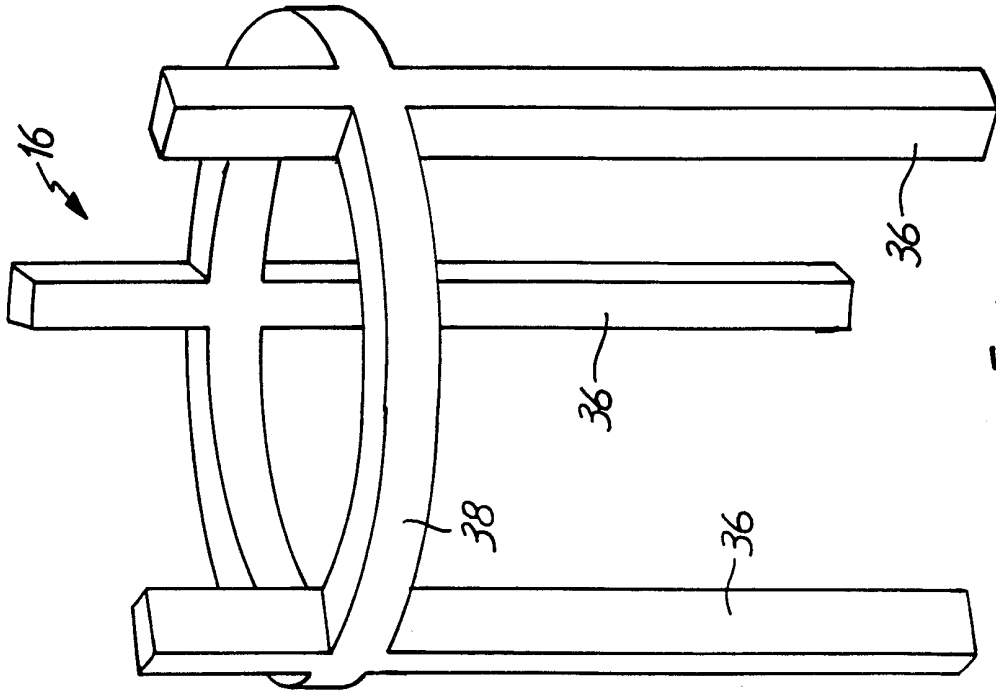


FIG. 5C

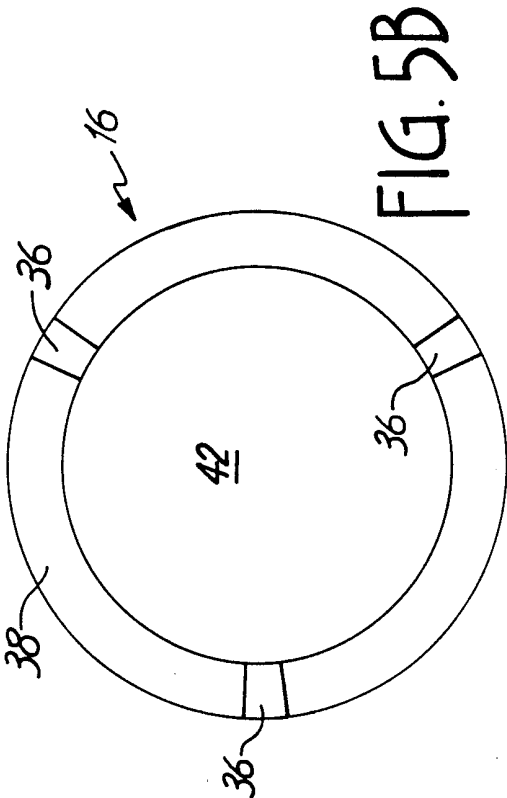


FIG. 5B

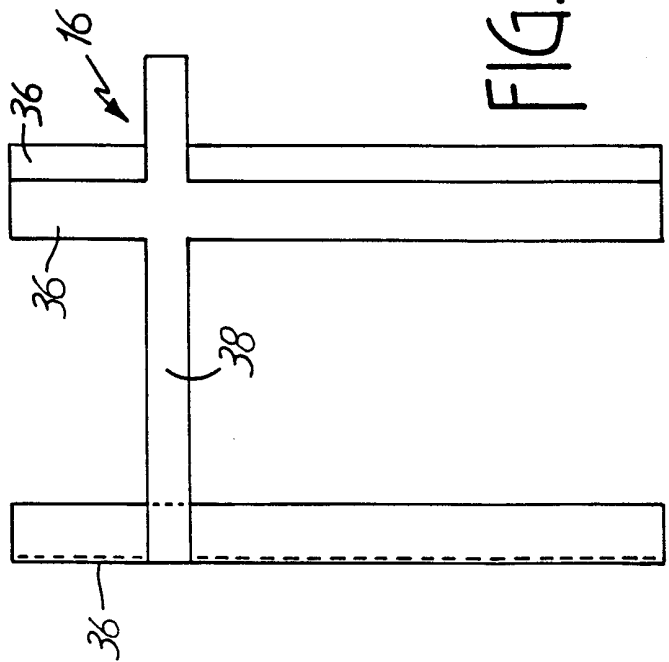


FIG. 5A

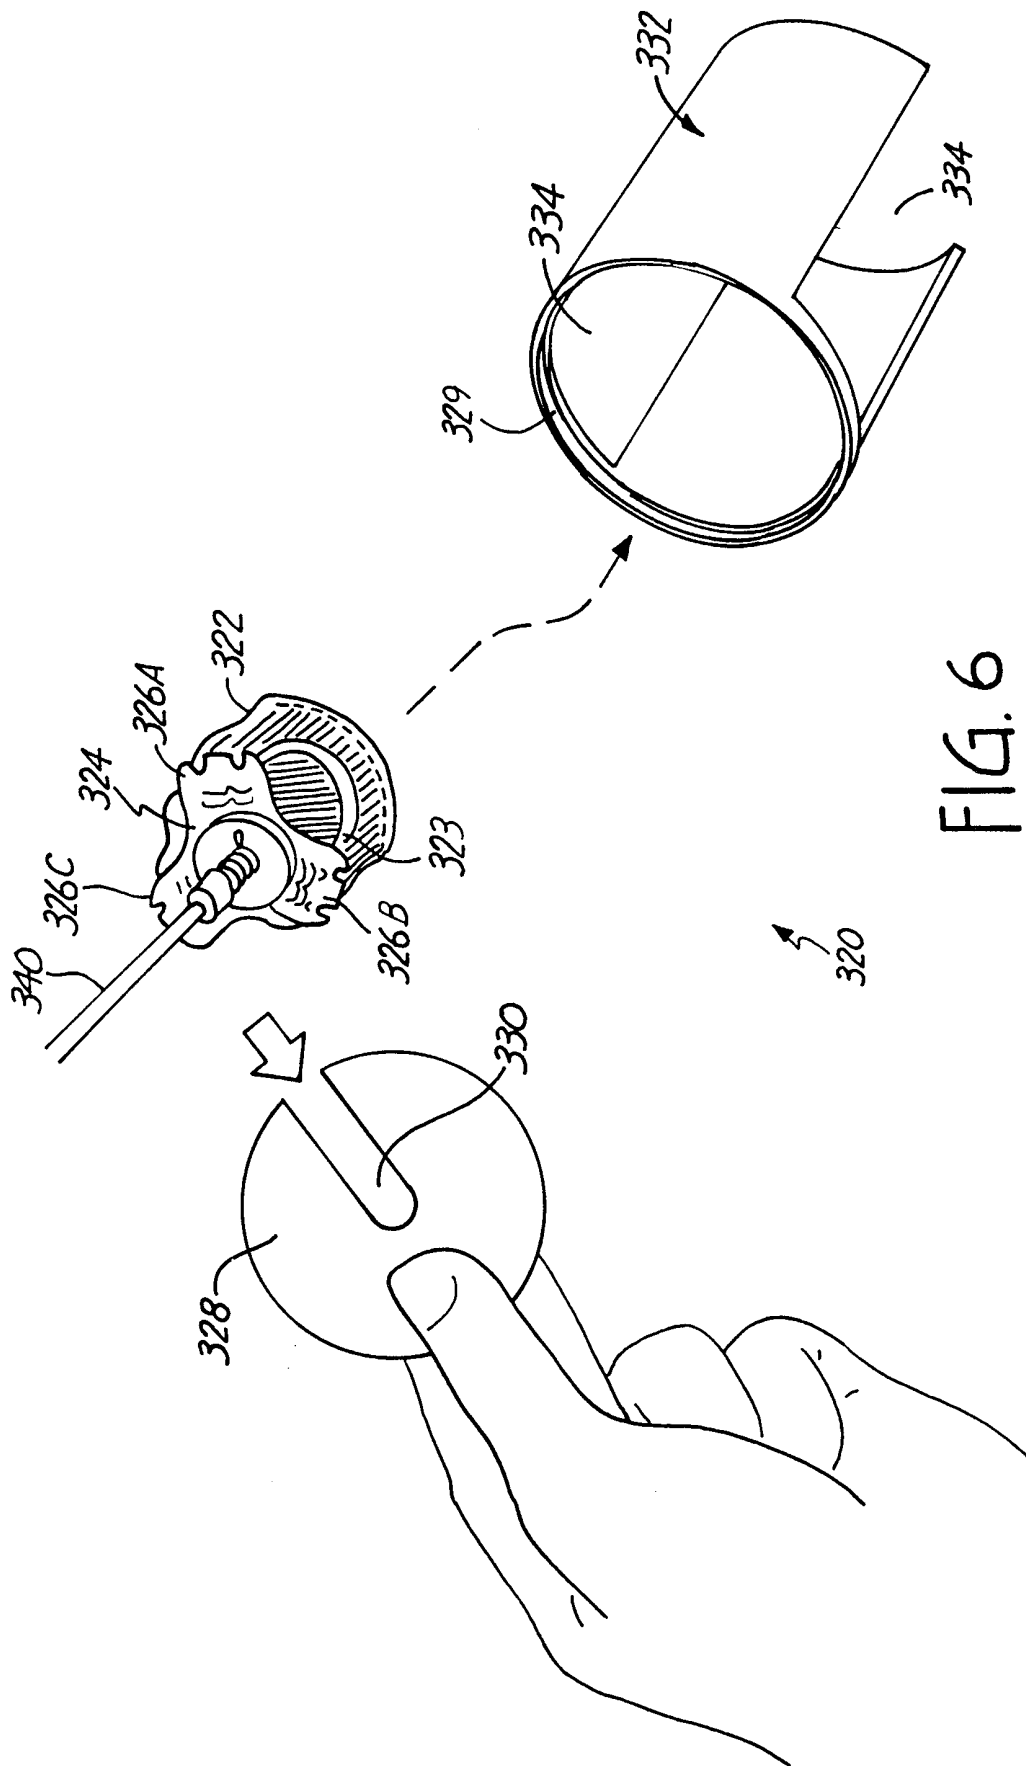


FIG. 6

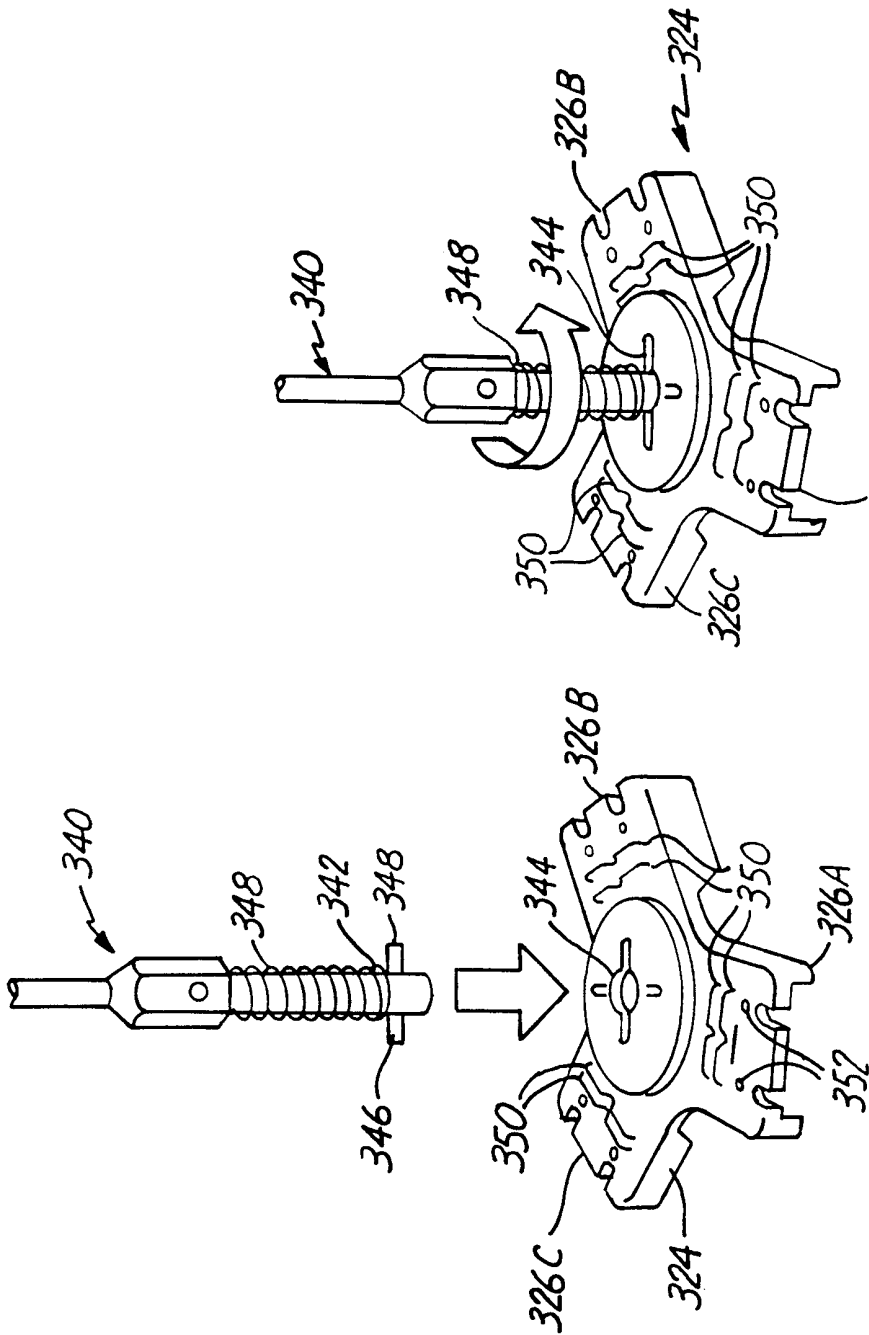


FIG. 7B

FIG. 7A

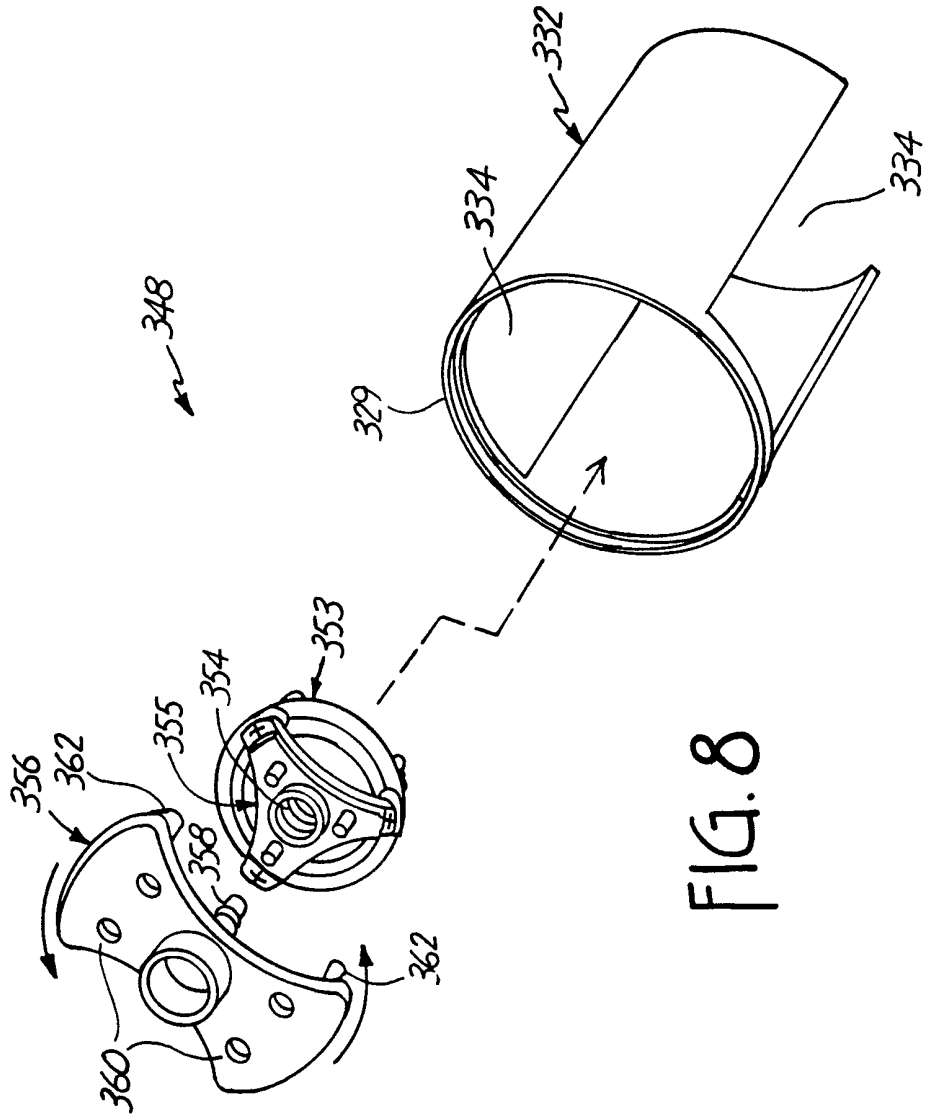


FIG. 8

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/30904

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 182 446 A (PENNY) 8 January 1980 (1980-01-08) the whole document ---	1,8,22, 29
A	US 4 211 325 A (WRIGHT) 8 July 1980 (1980-07-08) the whole document ---	1,8,22, 29
A	WO 98 14138 A (BAXTER INTERNATIONAL INC.) 9 April 1998 (1998-04-09) abstract; figures -----	1,8,22, 29

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

19 May 2000

Date of mailing of the international search report

29/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Smith, C

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/30904

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4182446 A	08-01-1980	NONE	
US 4211325 A	08-07-1980	NONE	
WO 9814138 A	09-04-1998	US 5800531 A AU 4496097 A	01-09-1998 24-04-1998