

I. Brooks,

Trace Buckle.

No. 10,937B.

Patented Nov. 22, 1870.

Fig. 1.


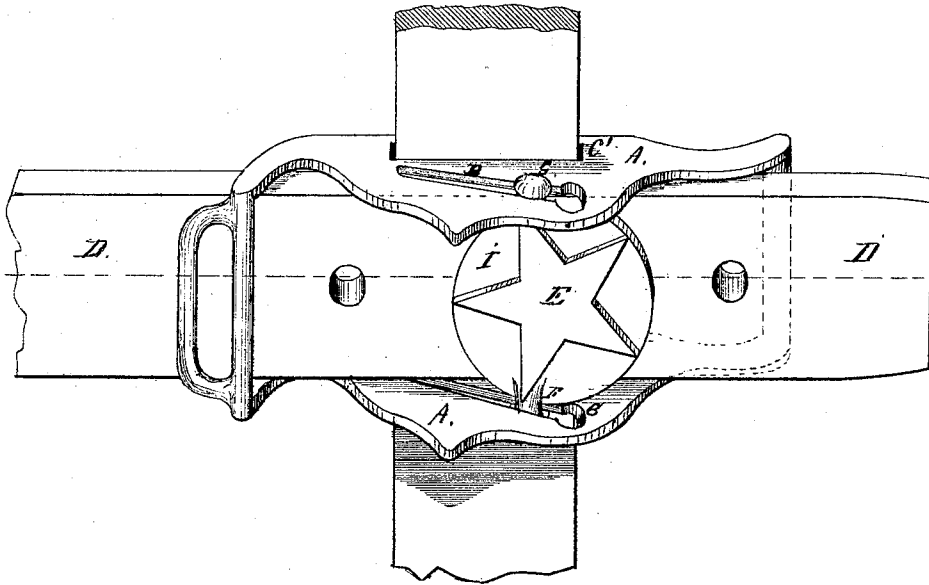


Fig. 2.

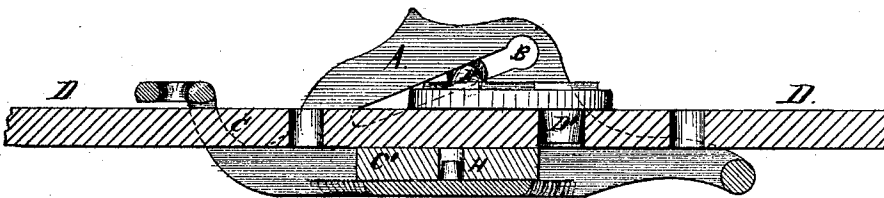

Witnesses:

B. J. Milldough
Charles Woodhead

Inventor.

Leroy Brooks

United States Patent Office.

LEROY BROOKS, OF MOUNT PLEASANT, IOWA.

Letters Patent No. 109,378, dated November 22, 1870.

IMPROVEMENT IN TRACE-BUCKLES.

The Schedule referred to in these Letters Patent and making part of the same.

I, LEROY BROOKS, of Mount Pleasant, in the county of Henry and State of Iowa, have invented a new and useful Improvement in Trace-Buckle, of which the following is a specification.

My invention relates to an improvement in the construction of trace-buckles, and consists in the combination and arrangement of parts, as hereinafter more fully described.

Description of the Accompanying Drawing.

Figure I is a top view.
Figure II is a side view.

General Description.

A is the frame of the buckle.
c c, the mortises on both sides of the frame, so that the billet from the back-band can pass through the buckle, and answer for the belly-band billet.

H is a small tongue on the center of the bottom plate, for adjustment of the billet, or to raise the hame-tug, or lower it, and to keep the billet in its place when the change of the trace is desired.

B B are inclined slots, with oval holes at the upper ends, so that the heads G G on the shoulders F F can pass through when the frame A is spread apart, and when sprung back there is no chance for the heads coming out.

F F are the shoulders which slide up and down in the inclined slots B B; and, when the same are slid down the slots, they will press on the trace; and,

when raised to the upper end of the slots, they will admit of the trace being taken out.

G G are the heads on the end of the shoulders to keep the frame A from spreading, so that the plate marked I will always remain in the frame.

The two points g g, that extend out to the shoulders, are to support them.

D' is the tongue, which goes in the trace, being formed on the under side of the plate.

The plate I presses down on the trace, which holds it firmly in its place, and, at the same time, the pressure on the billet is so great that it cannot be removed from its position.

By means of the mortises C' C' and tongue H on the bottom plate, there is considerable saving in the leather used, as well as labor, and also the necessity of two straps, generally used on the back-band, is obviated.

Having thus fully described my improvement,

What I claim, and desire to secure by Letters Patent, is—

The frame A, having inclined slots B B, mortises C' C', and tongue H, in combination with plate I, having tongue D', shoulders F F, and knobs or heads G G, all arranged as herein shown and described.

LEROY BROOKS.

Witnesses:

B. F. MILLSPAUGH,
CHARLES MOORHEAD.