




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : H05K 5/00, A47B 81/06, H04R 5/00, 1/02, 25/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/18814 (43) International Publication Date: 18 August 1994 (18.08.94)</p>
<p>(21) International Application Number: PCT/US94/00721 (22) International Filing Date: 27 January 1994 (27.01.94) (30) Priority Data: 014,182 5 February 1993 (05.02.93) US (71) Applicant: THOMSON CONSUMER ELECTRONICS, INC. [US/US]; 600 North Sherman Drive, Indianapolis, IN 46201 (US). (72) Inventor: FIELD, Daniel, John; 822 North State Road 135, Greenwood, IN 46142 (US). (74) Agents: TRIPOLI, Joseph, S. et al.; GE & RCA Licensing Management Operation, Inc., CN 5312, Princeton, NJ 08540 (US).</p>	<p>(81) Designated States: CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i></p>	

(54) Title: LOUDSPEAKER SYSTEM

(57) Abstract

The present invention concerns a multiple speaker loudspeaker system wherein an internal baffle (30) extends the full length of the interior volume dividing the interior volume (24) into two unequal portions (26, 28). The baffle (30) has folded portions (34, 36), which is not parallel to the walls of the enclosure. Loudspeakers (38, 40) are mounted onto the folded portions (26, 28) within a first volume (26, 28). The loudspeakers (38, 40) radiate sound into a second volume (26, 28). One of the first and second volume (26, 28) is ported in a bandpass configuration, to the outside of the enclosure. Thus, the non-parallel portions of the baffle (34, 36) reduce unwanted peaks and/or cancellations in the sound emanating from the enclosure. Additionally, the baffle (30) is secured along its width to top and bottom walls (20, 22) of the enclosure, thus also providing extra rigidity to the enclosure.

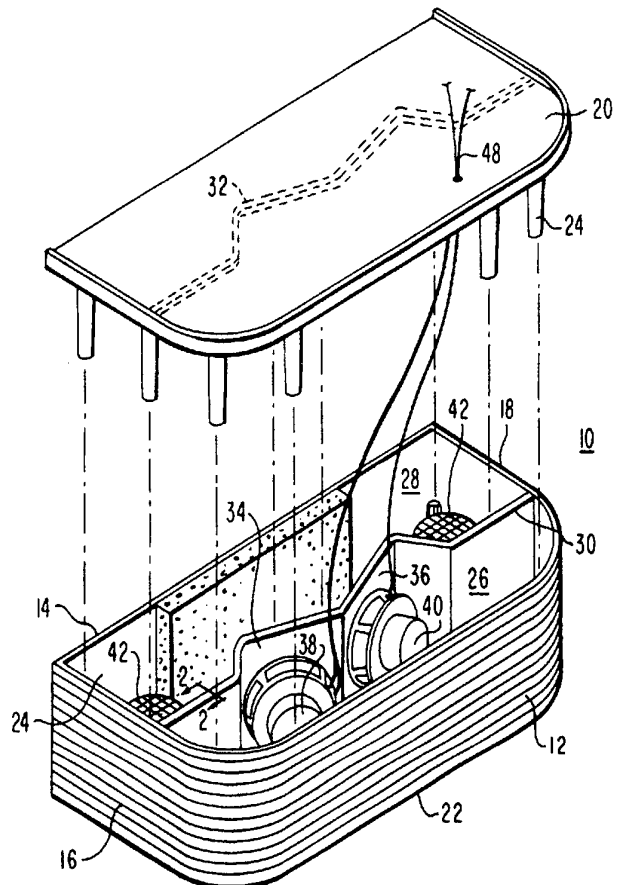

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LV	Latvia	SN	Senegal
CN	China	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
CZ	Czech Republic	LV	Latvia	TJ	Tajikistan
DE	Germany	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	US	United States of America
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	France	MN	Mongolia	VN	Viet Nam
GA	Gabon				

LOUDSPEAKER SYSTEM

BACKGROUND

The present invention relates to a sound system and
5 more particularly to a sound system for use with a television
receiver.

In loudspeaker systems, and particularly speaker
systems for reproducing bass, there is a substantial problem with
unwanted resonances and with the undesirable vibrations of
10 cabinet structures in response to signals at various frequencies.
These vibrations are particularly a problem for large enclosure
walls which have no intermediate support between their secured
edges. In order to prevent such vibrations, enclosure components
have to be more sturdy and/or heavy enough to either resist such
15 vibrations, or to bring the natural resonant frequencies of the
various cabinet structures below that of the signal frequencies. If
vibration can be reduced without resort to more sturdy or heavy
parts, the parts can be cost reduced, and the cost of shipping due
to a reduced weight can be realized.

20 It is desirable in a loudspeaker enclosure that parallel
surfaces be reduced to a minimum since parallel surfaces can set
up resonant/anti-resonant frequencies within the cabinet
(acoustic standing waves) and cause unwanted peaks and/or
cancellations in the idealized flat frequency response.
25 Additionally, such resonant frequencies set up vibration modes as
discussed above, which can cause extraneous sounds, such as buzz.

Recently, music systems have been designed that are
known as bandpass low frequency enclosures. These enclosures
acoustically filter out much of the harmonic distortion sound
30 components produced by woofer loudspeakers at high sound
levels. These arrangements use a subchamber which has a port
tube coupling the subchamber to the outside of the enclosure.
Such arrangements are shown in U.S. Patent Nos. 4,549,631 of
Bose, 5,033,577 of Veranth, and 5,092,424 of Schreiber et al.

SUMMARY OF THE INVENTION

Briefly, the present invention concerns a multiple speaker loudspeaker system wherein an internal baffle extends the full length of the interior volume dividing the interior volume into two unequal volumes. The baffle has folded portions, which is not parallel to the walls of the enclosure. Loudspeakers are mounted onto the folded portions within a first volume. The loudspeakers radiate sound into a second volume. One of the first and second volume is ported in a bandpass configuration, to the outside of the enclosure. Thus, the non-parallel portions of the baffle reduce unwanted peaks and/or cancellations in the sound emanating from the enclosure. Additionally, the baffle is secured along its width to top and bottom walls of the enclosure, thus also providing extra rigidity to the enclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is an exploded isometric view of the loudspeaker system according to aspects of the present invention.

Figure 2 is a cross-sectional view approximately along line 2-2 of Figure 1.

Figure 3 shows the loudspeaker system of the present invention mounted onto a television receiver.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the various Figures, the loudspeaker enclosure, generally designated 10, includes front and back walls 12, 14, side walls 16, 18, and top and bottom walls 20, 22, all of which define a volume 24. Volume 24 is divided into a first volume 26 and a second volume 28 by baffle 30. Baffle 30 is rigidly secured at its longitudinal ends to sidewalls 16, 18 and is further rigidly secured across its width within groove 33 of ridges 32 in top and bottom 22, 20 when the enclosure 10 is fully assembled. Top 22 is secured also to bottom 20 by screw attachment posts 24.

Baffle 30 is formed with a folded portions 34, 36 which partially face each other at angles of other than the 180 degrees for a planar baffle. Ridges 32 provide a close fit along the longitudinal length of baffle 30 so that baffle 30 provides additional rigidity to members 20, 22. A pair of loudspeakers 38, 40 are mounted onto respective folded portions 34, 36 within volume 26, with their sound output radiating into volume 28 and into a sound diffuser 37 mounted on front wall 12. In the exemplary embodiment, loudspeakers 38, 40 have a free air resonance of about 70 Hz, and a cabinet loaded resonance of about 80 Hz. In the exemplary embodiment, the sound generated by loudspeakers 38, 40 within volume 28 is coupled to the outside of the enclosure by a pair of vented ports 42. The relative dimensions of volumes 24, 26, and the positioning and size of vented ports 42 provide a bandpass low frequency filter for the produced sound. Enclosure 10 is designed to be mounted on top of a cabinet 44 of a television receiver 46 having a visual display device (not shown) with the vent ports 42 facing upwardly.

Loudspeakers 38, 40 are driven through leads 48 by signals from different channels. Additionally, since the two loudspeakers for different channels share the same undivided volume 26, the bass sounds from each of the channels emanating from vent ports 42 arrive at the listener at the same time, and do not exhibit any cancellation or interference commonly experienced in multiple loudspeaker systems.

Baffle 30, in addition to providing increased rigidity for enclosure 10, serves the dual purpose of its folded portions 34, 36 providing an acoustic structure which is not parallel to the sides of the cabinet. In this manner, unwanted peaks and/or cancellations are reduced for both of volumes 26 and 28. The non-parallelism provided by such an internal structure permits the maintaining a generally rectangular enclosure which is more aesthetically pleasing to the eye than a triangular prism or pyramid shape for the cabinet.

CLAIMS

1. A loudspeaker system:
a loudspeaker enclosure having a plurality of outer
5 walls (12,14,16,18,20,22),
a baffle (30) secured at opposite ends of its length to a
first pair of diametrically opposed outer walls (16,18), the baffle
dividing the enclosure into a first and second volume (26,28), the
enclosure having at least one vented port (42) between one of the
10 first and second volumes (26,28) and the outside of the enclosure,
a pair of loudspeakers (38,40) mounted on the baffle
(30) within the first volume (26,28) with the sound produced
being conducted outwardly from the enclosure through the at
least one vented ports (42),
15 the baffle (30) having at least a first and second
portions (34,36) folded towards each other at an angle of other
than 180 degrees, each of the pair of loudspeakers (38,40) being
mounted on a respective first and second portion (34,36).
- 20 2. The system of claim 1 wherein the baffle (30) is
additionally secured along its width between a second pair of
diametrically opposed outer walls (20,22) for providing additional
strength and rigidity to the enclosure.
- 25 3. The system of claim 1 wherein the system is
integral with a television receiver including a visual display
device, and provides sound program material for visual images
shown on the display device.
- 30 4. The system of claim 1 including means for driving
each of the pair of loudspeakers (38,40) with different signals.

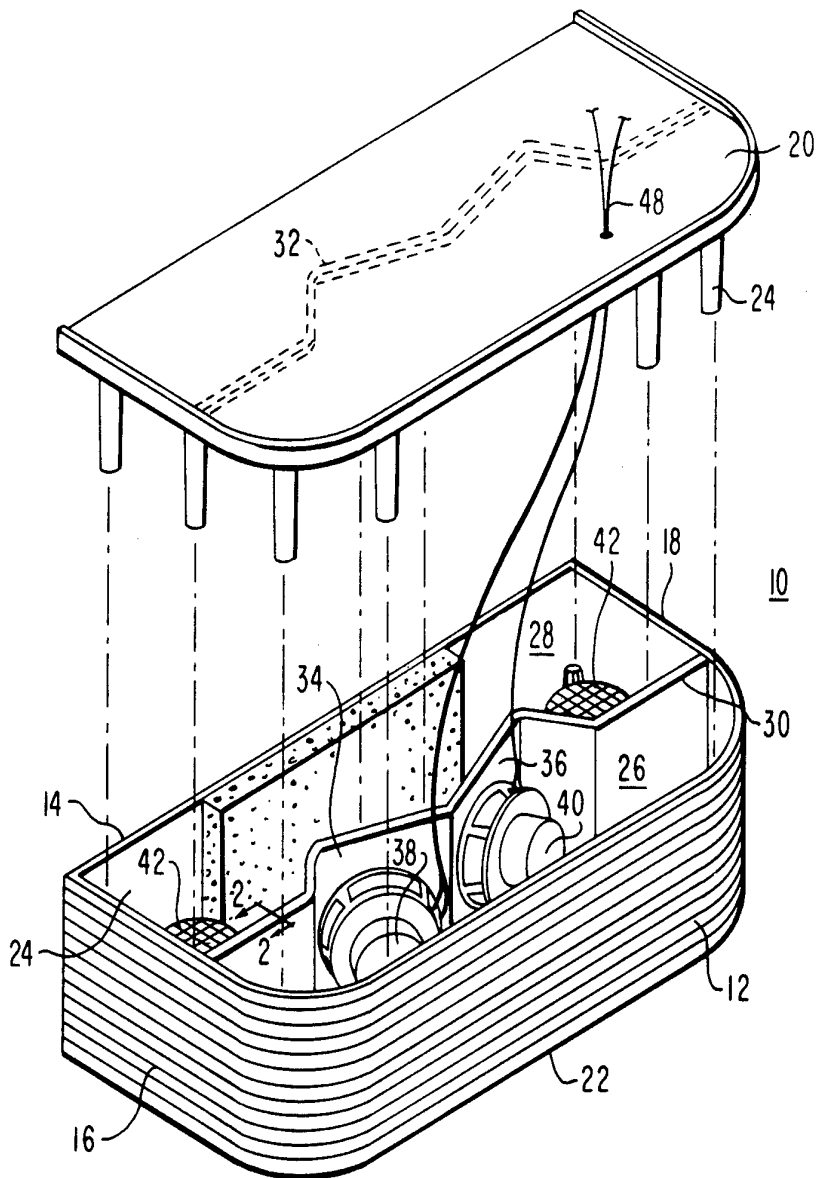


FIG. 1

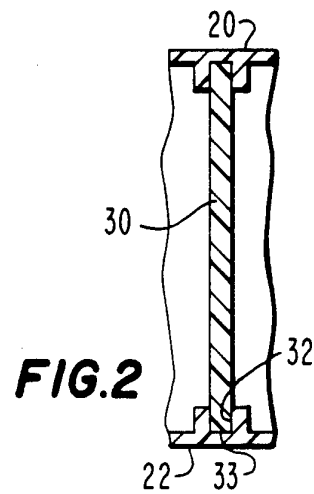


FIG. 2

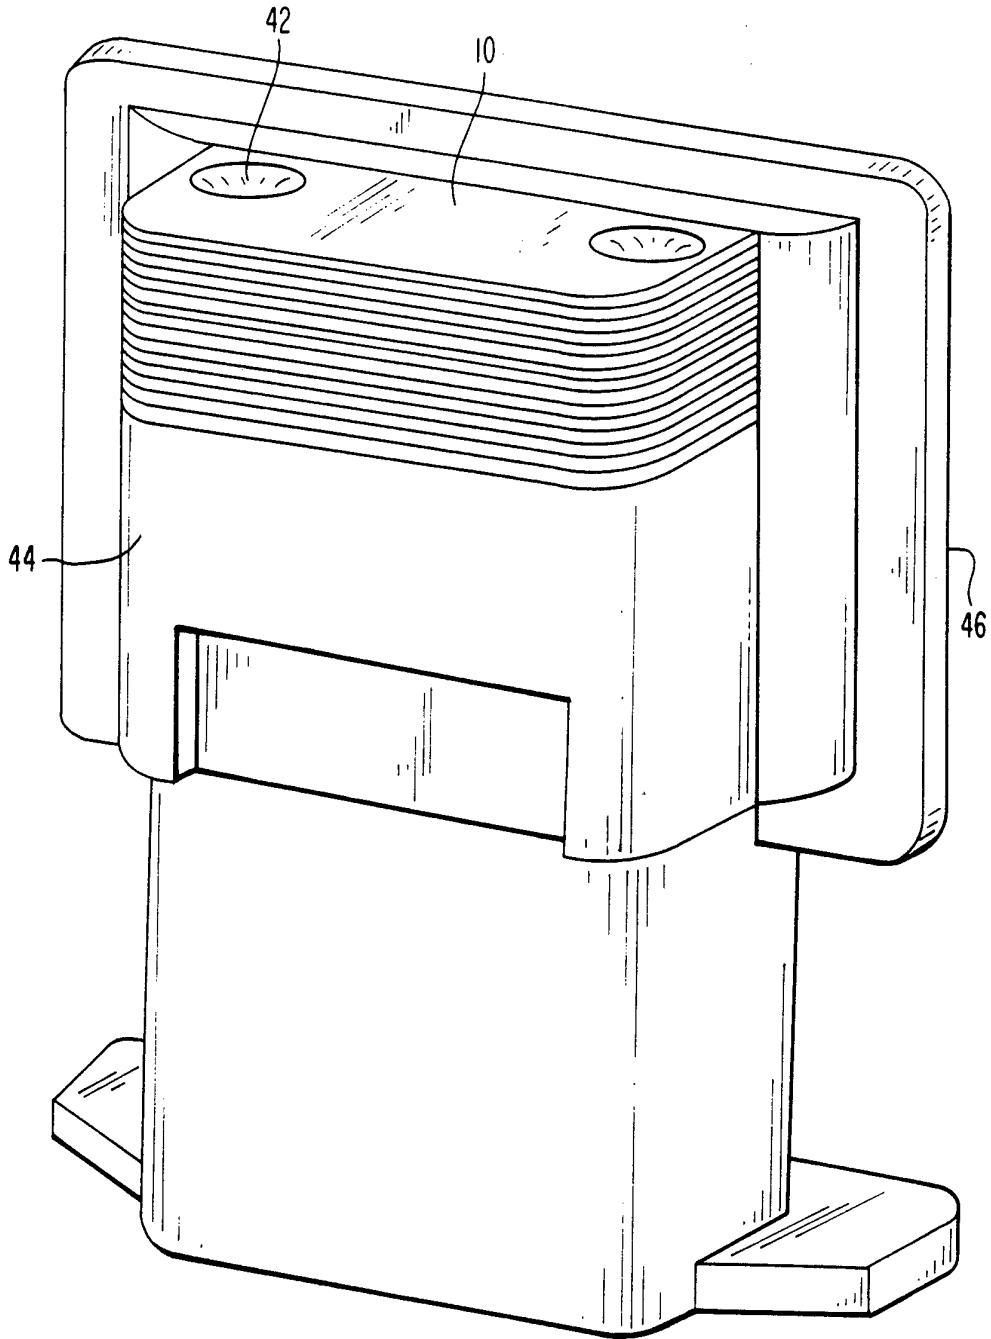


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US94/00721

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :H05K 5/00; A47B 81/06; H04R, 5/00, 1/02, 25/00

US CL :181/156, 145, 141, 154

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. :

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A, 3,862,366 (HUSZTY et al) 21 January 1975	1,2,4
A	US,A, 5,005,201 (RUMREICH et al) 02 April 1991	1-4
A	US,A, 5,036,946 (YOSHINO) 06 August 1991	1-4
A	US,A, 5,147,986 (COCKRUM et al) 15 September 1992	1,2,4
A	US,A, 5,092,424 (SCHREIBER et al) 03 March 1992	1,2,4
A	US,A, 5,181,247 (HOLL) 19 January 1993	1-4

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be part of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

11 MAY 1994

Date of mailing of the international search report

27 MAY 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

DANG, KHANH

Facsimile No. NOT APPLICABLE

Telephone No. (703) 308-1700