



(11) **EP 4 089 031 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.01.2024 Bulletin 2024/04

(21) Application number: **22172945.2**

(22) Date of filing: **12.05.2022**

(51) International Patent Classification (IPC):
B65D 77/04 ^(2006.01) **B65D 85/64** ^(2006.01)
B65D 5/50 ^(2006.01) **B65D 5/68** ^(2006.01)
B65D 81/107 ^(2006.01) **B65D 81/127** ^(2006.01)
B65D 5/02 ^(2006.01)

(52) Cooperative Patent Classification (CPC):
B65D 77/0413; B65D 5/0227; B65D 5/5054;
B65D 5/5069; B65D 5/68; B65D 81/107;
B65D 81/127

(54) **PACKED INSTALLATION KIT COMPRISING AN INSTALLATION ASSEMBLY WITH SUPPORT BEAMS AS COMPONENTS**

VERPACKTES INSTALLATIONSKIT, DAS EINE INSTALLATIONSANORDNUNG MIT STÜTZBALKEN ALS KOMPONENTEN UMFASST

KIT D'INSTALLATION EMBALLÉE COMPRENANT UN ENSEMBLE D'INSTALLATION AVEC DES POUTRES DE SUPPORT EN TANT QUE COMPOSANTS

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **12.05.2021 DK PA202170243**

(43) Date of publication of application:
16.11.2022 Bulletin 2022/46

(73) Proprietor: **VKR Holding A/S**
2970 Hørsholm (DK)

(72) Inventors:
• **Tollak, Tobias**
2970 Hørsholm (DK)
• **Schmidt, Birgit**
2970 Hørsholm (DK)

(74) Representative: **AWA Denmark A/S**
Strandgade 56
1401 Copenhagen K (DK)

(56) References cited:
EP-A1- 1 710 163 EP-A1- 2 778 086
DE-U- 1 906 464 IT-A1- UB20 160 095

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a packed installation kit for use in the installation of a roof window system comprising two window units and configured to be built in side by side in an inclined roof structure such that the roof window system defines a common height and a combined width in the mounted condition, said installation kit comprising a number of installation assemblies, each including one or more components, and optionally auxiliary equipment.

Background Art

[0002] Roof windows to be installed in inclined roof surfaces come in a variety of types, and are either installed as stand-alone window units, in which all sides of the roof window border on the roofing, or in configurations in which several window units are built together to combine into larger arrays providing a larger light influx into a room of a building, and in which only outer sides of the outermost window units border on the surrounding roofing.

[0003] Applicant's pending European patent applications with application numbers 21216869, 21216874, 21216881 and 21216882 show and describe roof window systems comprising two window units configured to be built in side by side in a roof structure. To facilitate installation, a number of assemblies are supplied, including support, insulating, stabilizing and cover assemblies. Additionally, auxiliary equipment such as underroof collars and vapour barrier collars are typically provided as well. While such assemblies are of great assistance to the installer, the various assemblies and the auxiliary equipment are typically provided separately and independently from the window units themselves. Since each assembly in turn includes a variety of differently sized components, logistical challenges in delivery of such a roof window system are substantial.

[0004] Furthermore, when installing windows in a roof, it is vital to ensure that the window units themselves are securely attached to the roof structure. In the above-mentioned roof window system, one of the installation assemblies includes a support assembly comprising as components two support beams to which the window units are fastened. Since the support beams thus carry a substantial load in the mounted condition of the roof window system, they need to be sturdy and robust. The material of the support beams may in principle be chosen arbitrarily, as long as the material has sufficient strength and wear properties. Typically, a wooden material is chosen, and may include laminated wooden beams such as Glulam beams, Kerto® beams etc. which are dimensionally stable, strong and light-weight. Even though the material chosen is relatively light-weight, the overall dimensions of the support beams render the supply line challenging. As the length of the support beams furthermore depends

on the width of the window units and the combined width in the mounted condition, the packed installation kit may weigh up to about 20-30 kg and have a length of about 2-3 m. Typically, items of such magnitude are supplied either as they are, i.e. unprotected, or wrapped in plastic. The former entails a risk of damage and/or smudging of the components, while the latter might sometimes be considered less desirable from an environmental point of view and furthermore offers only a reduced protection during handling. Document EP1710163 A1 discloses a packed installation kit for use in the installation of a roof window system.

[0005] With an ever-increasing awareness of environmental considerations and the wish to reduce or even eliminate the climate footprint of products and their packaging, there is a need for a possibility of delivering products safely in a more environmentally friendly way.

Summary of Invention

[0006] With this background, it is an object of the invention to provide a packed installation kit, which has a small and/or well-designed climate footprint, without increasing the risk of errors in the installation of the product and maintaining a good protection of the components of the installation kit during transportation.

[0007] In a first aspect, these and further objects are achieved with a packed installation kit of the kind mentioned in the introduction, which is furthermore characterised in that the components of a first set of installation assemblies of the installation kit are accommodated in a first packaging, that the components of a second set of installation assemblies of the installation kit comprise two support beams accommodated side-by-side in a second packaging comprising a rectangular telescopic tube packaging having two parts of corrugated cardboard, a first part of the second packaging having a first length extending between an end portion and an opening, and a second part having a second length extending between an end portion and an opening, and the support beams having a length within a pre-defined range, that the total length of the second packaging as defined by the sum of the length of the first part and the length of the second part exceeds the length of the support beams such that an overlap between the second part and the first part is provided in a supply condition of the installation kit within said pre-defined range of lengths of the support beams of the second set of installation assemblies, and that means are provided to reinforce at least one of the end portions, said means being selected from the group comprising provision of a plurality of cardboard layers at the end portion, provision of a shock-absorbing element at the end portion, and provision of an extended flap portion configured to overlap an exterior side of the second packaging.

[0008] By the provision of a telescopic packaging and two parts with individual lengths chosen to provide a suitable overlap within a range of the length of the two support

beams, the number of differently sized blanks to be kept in store is reduced drastically. An increased protection is achieved as compared to no packaging, or to a packaging of plastic material. Furthermore, a cardboard packaging has better performance from a sustainability point of view than plastic, since the cardboard packaging is suitable for easy recycling. In practice, this has the effect that the likelihood of the packaging material actually being recycled instead of just being disposed of as combustible waste is increased significantly, thus contributing to the overall sustainability of the roof window system.

[0009] It is to be understood that while paper and cardboard are usually made from wood-fibres, other plant fibres including fibres originating from straw, bamboo, bagasse, esparto, other grasses, hemp, flax, and cotton may also be used, including combinations of different types of fibres.

[0010] Based on the recognition that one of the challenges in providing suitable packaging for the support beams resides in preventing the support beams from moving in the longitudinal direction and thereby damaging the end portion(s) in case the packaging tilts or is dropped, reinforcement of the end portion(s) has proven a satisfactory solution. The protection of the end portions of the packaging by means of the reinforcement means entail increased safety against unintentional opening of the end portions.

[0011] In a presently preferred embodiment, the length of the first part is identical for various lengths of the components within said pre-defined range, the length of the first part being preferably 1400 to 1600 mm, more preferably about 1500 mm. In this way, the two support beams are enclosed either in full or to a large extent in the first part, for instance of above 50%. The second part closes off the packaging and provides suitable overlap. In a preferred further development of this embodiment, the length of the second part is selected in accordance with the length of the support beams, preferably such that a length is selected for a respective sub-range within said pre-defined range, the length of the second part in a shorter sub-range being preferably 1000 to 1400 mm, more preferably about 1200 mm, and wherein the length of the second part in a longer sub-range is preferably 1400 to 1600, more preferably about 1500 mm. In this way, a single size of the first part combined with a second part of two sizes is able to cover a full range of product sizes in a way which is advantageous from manufacturing, handling, cost and environmental points of view.

[0012] In a second aspect, a method of forming a packed installation kit of the first aspect is provided.

[0013] The method comprises the steps of:

providing at least one blank having such dimensions that it is able to form the second packaging in a folded state,
providing reinforcement means,
placing the components in the second packaging,
and

applying the reinforcement means to provide a supply condition of the packed installation kit.

[0014] In one embodiment, the method comprises the steps of providing two blanks which in a folded state form a first part and a second part, respectively, of the packaging

placing the components in the first part,
overlapping the second part with the first part to provide a supply condition of the packed installation kit.

[0015] The packaging may either be formed before inserting the two support beams constituting the components, or the components are first placed on the blank.

[0016] In one embodiment, the blank is a first blank which in the folded state forms the first part. Subsequently, the components which are at least partially enclosed by the first part are either positioned on a second blank, which in the folded state forms the second part before folding is carried out, or the second blank is formed to the second part before connecting the second part with the first part and the components.

[0017] These measures provide for full flexibility in the packaging process.

[0018] Other presently preferred embodiments and further advantages will be apparent from the subsequent detailed description and drawings.

Brief Description of Drawings

[0019] In the following description embodiments of the invention will be described with reference to the drawings, in which

Fig. 1 is an exploded perspective view of an installation kit with a packaging in an embodiment of the invention;

Fig. 2 is an exploded perspective view of the installation kit of Fig. 1 during a step of the packaging process;

Fig. 3a is a perspective view of the packed installation kit in the embodiment of Figs 1 and 2;

Fig. 3b is a view corresponding to Fig. 3a, of a detail of the second part of the packaging during a step of the packaging process;

Fig. 4 is a perspective view of a packed installation kit in another embodiment of the invention;

Figs 5 to 8 are perspective views of a roof window system with components of the installation kit in various embodiments of the invention;

Fig. 9 is a plan view of an embodiment of a first part of the packaging, shown as a blank before folding to form the first part; and

Fig. 10 is a view of the packed installation kit in a step during the packaging process.

Description of Embodiments

[0020] Referring initially to Fig. 1, an installation kit 100 according to the invention is shown in a partly packed condition. The installation kit 100 is intended for use in the installation of a roof window system 1 as shown in Fig. 5, with two window units 11, 12 to be installed side-by-side in an inclined roof structure 2 using the components of installation assemblies and auxiliary equipment of the packed installation kit 100 according to the innovation. In the configuration shown in Fig. 5, the roof structure comprises 2 a number of rafters and battens of which two rafters 21 on either side of the window units 11, 12 and one batten 22 are indicated. The roof structure 2 may include further and/or alternative parts.

[0021] The installation kit 1 here comprises a second set of installation assemblies 3, which is a support assembly 3 which has an upper support beam 31 and a lower support beam 32. The two support beams 31, 32 have identical lengths L3, identical heights H3 and identical widths, the sum of their widths being the common width B3. The support beams 31, 32 are shown side-by-side extending along the lengths of one another. A second packaging 103 is shown to accommodate the support beams 31, 32. In the embodiment shown, the second packaging 103 comprises a rectangular telescopic tube packaging which has two parts, a first part 1031 and a second part 1032, both of which are made of corrugated cardboard. The first part 1031 has first length L1, width B1 and height H1. Similarly, the second part 1032 has a second length L2, a width B2 and a height H2. As can be seen the sum of the first length L1 and the second length L2 exceeds the length L3 of the support beams 31, 32. The sum of the lengths L1 and L2, is denoted the total length of the second packaging. The first length L1 in Fig. 1 may for example be about 1500 mm while the second length L2 may be about 1200 mm and the length L3 may be about 1700 mm. The material thickness of the cardboard is about 3 mm, but could vary slightly. The first part 1031 has an opening 10310 at one longitudinal end of the first part 1031, and the opening 10310 has suitable dimensions for accommodating the two support beams 31, 32 lengthwise. An end portion 10316 of the first part 1031 is located opposite to the opening 10310. The end portion 10316 closes off the first part 1031. Similarly, the second part 1032 has an opening 10320 and an end portion 10326, which is seen to close off one longitudinal end of the of the second part 1032. When the support beams 31, 32 are packed and accommodated in the second packaging, the end portions 10316, 10326 may in some orientations of the packed installation kit, carry the load of the support beams 31, 32. As will be described in further detail below, the end portions 10316, 10326 may suitably be reinforced, with several layers of cardboard material, preferably corrugated cardboard, by an additional element such as a honeycomb element and/or by providing an additional folding flap.

[0022] The support beams 31, 32 are provided with

such dimensions and selected from such a material that they are able to provide sufficient strength and withstand wear typical of the conditions within a roof structure. Typically, a wooden material is chosen and may include laminated wooden beams such as Glulam beams, Kerto® beams etc., which are dimensionally stable, strong and light-weight. While the support beams 31, 32 are light-weight in comparison to materials such as steel, the dimensions alone render them cumbersome to handle and pack. Referring again briefly to Fig. 5, it is noted that the support beams 31, 32 extend between rafters 21 on either side of the first and second window units 11, 12.

[0023] Referring now to Fig. 2 which shows the installation kit of Fig. 1 during packing of the support beams 31, 32 of the support assembly 3 in the second packaging 103. The support beams 31, 32 are accommodated side-by-side in the first part 1031 of the second packaging 103. As can be seen the support beams 31, 32 are enclosed to a large extent in the first part 1031, but a portion thereof protrudes from the opening 10310. In this embodiment about 85 % of the support beams 31, 32 are accommodated in the first part 1031. The protruding portion of the support assembly 3, is seen to be shorter than the second length L2 of the second part 1032. The height H1 and width B1 of the first part 1031 is selected such that, when accounting for the thickness of the corrugated cardboard, a snug fit between the support assembly 3 and the interior surfaces of first part 1031 is provided. The snug fit between the first part 1031 and the support assembly, is preferably snug such that the support assembly 3 does not inadvertently slide in the first part 1031, during handling, but not so snug that it impedes unpacking of the of packed installation kit 1.

[0024] Referring now to Fig. 3a in which the second part 1032 of the second packaging 103 has been slid on to the support assembly 3 and the first part 1031 of the second packaging in a telescoping manner, to provide a supply condition of the installation kit. In this way the second part 1032 constitutes an outer part of the second packaging 103, and an overlap LO is provided between the first 1031 and second part 1032. As can be seen the length LO of the overlap in this embodiment substantially amounts to the difference between the length L3 and the sum of first L1 and second length L2. The first 1031 and second part 1032 having lengths L1 and L2 as shown in Figs 1 to 3, would provide an overlap LO in the supply condition for a predefined range of lengths L3 of the support beams 31, 32. The predefined range for the length L3 has an upper limit of less than the sum of the first L1 and second length L2, although a suitable overlap may in practice require the length L3 to be less than e.g. 95% of the length of sum of the first L1 and second length L2. In the embodiment of Figs 1 to 3, the length L3 is about 65 % of the sum of the first L1 and second length L2.

[0025] For a given range of products applicable within the roof window system, the length L3 will typically vary between about 1000 mm and up to 3000 mm. By selecting the lengths L1 and L2 suitably, the first part 1031 may

have the same length L1, here 1500 mm, throughout the full range, while the length L2 of the second part 1032 may be provided in two different sizes, one of 1200 mm to cover the lower sub-range and one of 1500 mm to cover the upper sub-range.

[0026] The height H2 and width B2 of the second part 1032 are selected to be greater than the corresponding height H1 and width B1 of the first part 1031, such that, accounting for the corrugated cardboard thickness of the second part, the second part 1032 can be slid on to the first part 1031 in the telescopic manner. The height H2 and width B2 is preferably further selected such that a snug fit between the interior surfaces of the second part 1032 and the exterior surfaces of the first part 1031 is provided. In this way the first and second parts of the second packaging is kept together in the supply condition.

[0027] It is presently preferred that the length L1 of the of the first part 1031 is identical for lengths L3 within a pre-defined range, while the length L2 of the second part is selected according in accordance with the length L3, optionally from a few pre-defined lengths L2, such as two pre-defined lengths L2. In the embodiment of Figs 1 to 3 the first length L1 is longer than the second length L2, which slightly improves the carbon footprint of the second packaging, as the first part 1031, has a smaller height H1 and width B1, than the second part 1032, thus reducing the amount of material used in the packaging.

[0028] The first part 1031 and the second part 1032 may further have fixating means for positioning the first part 1031 relative to the support beams 31, 32 and for positioning the second part 1032 relative to the support beams 31, 32 and/or the first part 1031. In Fig. 2, fixating means in the forms of clamps or staples 10330 are shown.

[0029] For closing off the end portion 10326, and also the opposite end portion 10316, a tape strip 10331 may be provided.

[0030] Fig. 3b shows a view of an embodiment of the second packaging 103, in which means are provided to reinforce the end portion 10326. In general, such means may be used individually or in combination. The reinforcement means comprise, non-exhaustively, provision of a plurality of cardboard layers at the end portion, provision of a shock-absorbing element at the end portion, and provision of an extended flap portion configured to overlap an exterior side of the second packaging.

[0031] In the embodiment shown, the reinforcement means comprise positioning a shock-absorbing element in the form of a honeycomb element 10332 between ends of the support beams 31, 32 (not visible) and the end portion 10326 of the second packaging 103. A counterpart honeycomb element 10332 may be provided at the other end portion 10316.

[0032] Further reinforcement means comprise the provision of several cardboard layers, in the embodiment shown in Fig. 3b in the form of three end flaps 10326a, 10326b, 10326c that in themselves provide reinforce-

ment. Here, they are supplemented by an extended flap portion 10326d configured to overlap an exterior side of the second packaging 103 once the end portion 10326 has been closed. The other end portion 10316 may be configured in a similar way. There may also be differences between the end portions 10316, 10326, for instance in case one end is designated to be a bottom end during storage.

[0033] Referring now to Fig. 4, which shows part of another embodiment of a packed installation kit 100 according to the invention. In addition to the second set of installation assemblies 3 packed in the second packaging 103, the packed installation kit 100 can in some embodiments further comprise a first set of installation assemblies 4, 5, 6, 7, 8 packed in a first packaging 101. Fig. 4 shows a set of first installation assemblies packed and accommodated in the first packaging 101, which first packaging further accommodates auxiliary equipment 96, 96a, 97, 98. The first set of installation assemblies 4, 5, 6, 7, 8, which are accommodated and packed in the first packaging 101, includes a first installation assembly which is here an insulating assembly 5, a second installation assembly which is here a stabilizing assembly 6, a third installation assembly which is here a support assembly 4 including four mounting brackets, a fourth installation assembly which is here a cover assembly comprising receiver brackets 7 and a fifth installation assembly which is here a cover plate 8. Elements not visible in Fig. 1 are denoted by a broken lead line to the respective reference numeral, typically because such elements are hidden in sub-packagings.

[0034] The packed installation kit 100 is in Fig. 4 shown in a condition where the first packaging 101 is open, allowing the components accommodated therein to be seen. When the packed installation kit is shipped and supplied the first packaging 101 will be closed, providing the installation kit in a supply condition. When the first packaging 101 is closed it will be a box shaped as rectangular prism of corrugated cardboard with a length extending in the longitudinal direction LP, a width in the width direction WP and a height in the height direction HP. The first packaging 101 is made of corrugated cardboard, which is sometimes called corrugated fibreboard. As can be seen the insulating assembly 5 is accommodated in the first packaging 101 as is, that is the components of the assembly are not packed in a sub-packaging nor is it fixated to the first packaging 110, whereas the mounting brackets 4, receiver brackets 7 and cover plate 8 are packed in sub-packaging of cardboard or paper material, namely cardboard box 104, cardboard box 107 and paper wrapping 108 respectively. The first packaging 101 further accommodates auxiliary equipment, namely underroof collar 96 packed in a plastic bag 196, tape roll 96a, a vapour barrier collar 97 packed in a plastic bag 197, a gutter element 98 and an installation manual (not shown). The plastic bags 196, 197 are intended for collection of waste, in particular plastic waste, during unpacking of the installation kit and installation the skylight

window system 1. Further details of the first packaging and the first set of installation assemblies may be found in Applicant's co-pending European patent application filed on the same day as the present application.

[0035] Referring now to Figs 5 to 8, the interaction between the installation assemblies of the installation kit 100 with the roof window system 1 will be described in more detail. In Figs 5 and 6, the roof window system 1 is shown from the exterior of the building and in Fig. 5 the first window unit 11 is mounted in the roof structure 2 and the second window unit 12 is being mounted next to the first window unit 11. In the mounted condition, the roof window system 1 has a combined width W and a common height H, both of which are seen to extend in parallel with the plane of the roof structure 2. The roof window system 1 is being installed using a support assembly 3, mounting brackets 4, an insulating assembly 5 and a stabilizing assembly 6. The upper support beam 31 and lower support beam 32 of the support assembly 3 are installed in the roof structure 2 and the roof window system 1 is fastened to them. The length L3 of the two support beams 31, 32 corresponds substantially to the combined width W of the roof window system 1. The insulating frame assembly 5 is a frame surrounding the roof window system 1 in the mounted position and the length of the side members of the frame slightly exceeds the common height H of the roof window system 1. In Fig. 6, both window units 11, 12 of the roof window system 1 are mounted in the roof structure 2 and auxiliary equipment is being installed. The auxiliary equipment is here an underroof collar 96 which is mounted around the roof window system 1 and a gutter element 98. Figs 7 and 8 show views of the roof window system 1 of Fig. 6 as seen from the interior of the building. Fig. 7 shows the roof window system when the vapour barrier collar 97 is installed after having been unpacked from its sub-packaging 197 which is here a plastic bag. Fig. 8 shows receiver brackets 7 being installed to receive and mount the cover plate 8.

[0036] The first packaging 101 may be closed and sealed by suitable means including adhesive, tape strips, clamps and/or staples. Closure and sealing of the second packaging 103 is carried out as described in the above. Opening of the packagings 101, 103 is typically carried out by tearing or cutting at suitable positions to expose the contents. It is also conceivable to include opening means in the form of tear strips to provide facilitated opening. If so, it is preferred that the tear strips are of the perforated type, i.e. not involving a thread or wire of plastic or metal material.

[0037] While the first part 1031 and the second part 1032 of the packaging 103 may be provided in the form presented in Figs 1 to 3b, i.e. folded to form a respective tubular shape, it is also conceivable to use a cardboard blank as a substrate during handling of the support assembly comprising the two support beams 31, 32, following which the cardboard material is folded and closed, thus wrapping the support beams 31, 32.

[0038] Referring now to Figs 9 and 10 which both show an embodiment of a first part 1031 of the second packaging 103 as a blank, which in a folded state forms the first part 1031 of the second packaging. Fig. 9 is a plan view of the blank. The blank is a sheet of corrugated cardboard which is provided with folding lines and cuts which define portions of the blank. At one longitudinal end of the blank there is four end flaps 10316a, 10316b, 10316c, 10316d, which in the folded condition form sections of the end portion 10316 of the first part. When the blank is folded the end flaps 10316a, 10316b, 10316c, 10316d overlap to close off the end portion 10316 of the first part 1031. The end portion 10316 will be reinforced as it will be formed of four layers of corrugated cardboard. The end flaps 10316a, 10316b, 10316c, 10316d may be fixated to each other by adhesive or glue between some or all the end flaps. In the embodiment shown, there are no flaps at the opposite end of the blank, and hence the first part 1031 folded from the blank will be open at that end, providing the opening 10310. Four folding lines extend longitudinally across the blank, segmenting the blank into a top portion 10311, side portion 10313, base portion 10314, further side portion 10312 and flap portion 10315. The side portions 10312, 10313 have identical widths and the top 10311 and base portions 10314 have identical widths, whereby the first part 1031 in the folded state will have rectangular cross-section. In the folded state of the blank of the first part 1031, the flap portion 10315 will overlap partly with the exterior surface of the top portion 10311, providing overlapping surfaces which may be fixated to each other e.g. by means of an adhesive or glue, or by means of clamps or staples.

[0039] In general, the amount of adhesive or glue used in the first packaging 101 and the second packaging 103 is preferably comparatively low, e.g. the mass of adhesive or glue is low compared to the mass of packaging, such as less than 2 %, less than 1.5 %, less than 1 %, less than 0.5 % or even less than 0.1 % by weight of the packaging.

[0040] To assist in the folding of the blank the folding lines can comprise a weakening of the corrugated cardboard materials, such as perforations, cuts or the cardboard material having been compressed at the folding line. The blank of the first part 1031 can be folded to form the first part 1031 prior to inserting the components 1031, 1032 of the support assembly 3 therein. Alternatively, the components 1031, 1032 can be placed on the blank of the first part 1031 whereupon the blank is folded around the components to form the first part 1031 as shown in Fig. 10. Here the components of the support assembly 3 are placed side-by-side on the base portion 10314 of the blank of the first part 1031, and subsequently the blank can be folded around the components to form the first part 1031 of the second packaging 103.

[0041] While Figs 9 and 10 only show a blank to constitute a first blank to form the first part 1031 of the second packaging 103, it is understood that a similar, second blank can be provided for the second part 1032. Such a

second blank to form the second part 1032 may be folded around the components of the support assembly 3 which are accommodated in the first part, similarly to the process of Fig. 10, to provide the supply condition of the packed installation kit 100.

[0042] Alternatively, it is possible to apply some of the principles underlying the present invention independently to a blank having such a length that the packaging to be formed is able to accommodate the full length of the components of the support assembly 3. In particular, the means for reinforcing the end portions are applicable. A plurality of end flaps including two, three or four end flaps may be provided at either end of the blank. The use of an overlapping flap portion, corresponding to the flap portion 10315, to cover the full length of such a packaging is conceivable. Fixating means in the forms of clamps or staples may be applied throughout the length of the packaging, partly to strengthen the coherence of the packaging itself, partly to provide additional retention of the components of the second set of installation assemblies in the length direction of the packaging, thus mitigating the effect of possible pressure or impact acting on the end portions in case the support beams move in the longitudinal direction of the second packaging.

List of reference numerals

[0043]

1 roof window system
11 first window unit
12 second window unit

2 roof structure
21 rafter
22 batten

3 support assembly
31 upper support beam
32 lower support beam

4 mounting bracket

5 insulating assembly

6 stabilizing assembly

7 receiver brackets

8 cover plate

96 underroof collar

96a tape roll

97 vapour barrier collar

98 gutter element

100 packed installation kit

101 first packaging

5 103 second packaging
1031 first part of second packaging
10310 opening
10311 top portion
10312 side portion
10 10313 side portion
10314 base portion
10315 flap portion
10316 end portion
10316a end flap
15 10316b end flap
10316c end flap
10316d end flap
1032 second part of second packaging
10320 opening
20 10326 end portion
10326a end flap
10326b end flap
10326c end flap
10326d extended end flap portion
25 10330 staples
10331 tape strip
10332 honeycomb element

104 sub-packaging for mounting brackets 4

30 107 sub-packaging for receiver brackets 7

108 sub-packaging for cover plate 8

196 sub-packaging for underroof collar 96

35 197 sub-packaging for vapour barrier collar 97

H common height of roof window system 1 in mounted condition

W combined width of roof window system 1 in mounted condition

40 B1 first width (of first part 1031 of second packaging 103)

H1 first height (of first part 1031 of second packaging 103)

45 L1 first length (of first part 1031 of second packaging 103)

B2 second width (of second part 1032 of second packaging 103)

50 H2 second height (of second part 1032 of second packaging 103)

L2 second length (of second part 1032 of second packaging 103)

B3 width of second set of installation assemblies (support assembly 3)

55 H3 height of second set of installation assemblies (support assembly 3)

L3 length of second set of installation assemblies (support assembly 3)

HP height direction of first packaging 101
 LP longitudinal direction of first packaging 101
 WP width direction of first packaging 101
 LO overlap between first part 1031 and second part 1032 of second packaging 103

Claims

1. A packed installation kit (100) for use in the installation of a roof window system comprising two window units (11, 12) and configured to be built in side by side in an inclined roof structure (2) such that the roof window system defines a common height (H) and a combined width (W) in the mounted condition, said installation kit (100) comprising a number of installation assemblies (3, 4, 5, 6, 7, 8), each including one or more components, and optionally auxiliary equipment (96, 96A, 97, 98),

characterised in that

the components of a first set of installation assemblies (4, 5, 6, 7, 8) of the installation kit (100) are accommodated in a first packaging (101), that

the components of a second set of installation assemblies (3) of the installation kit (100) comprise two support beams (31, 32) accommodated side-by-side in a second packaging (103) comprising a rectangular telescopic tube packaging having two parts (1031, 1032) of corrugated cardboard, a first part (1031) of the second packaging (103) having a first length (L1) extending between an end portion (10316) and an opening (10310), and a second part (1032) having a second length (L2) extending between an end portion (10326) and an opening (10320), and the support beams (31, 32) having a length (L3) within a pre-defined range, that

the total length of the second packaging (103) as defined by the sum of the length (L1) of the first part (1031) and the length (L2) of the second part (1032) exceeds the length (L3) of the support beams (31, 32) such that an overlap (LO) between the second part (1032) and the first part (1031) is provided in a supply condition of the installation kit (100) within said pre-defined range of lengths of the support beams (31, 32) of the second set of installation assemblies (3), and that

means are provided to reinforce at least one of the end portions (10316, 10326), said reinforcing means being selected from the group comprising

- provision of a plurality of cardboard layers at the end portion,
- provision of a shock-absorbing element at

the end portion, and

- provision of an extended flap portion configured to overlap an exterior side of the second packaging (103).

5

2. A packed installation kit (100) according to claim 1, wherein the first part (1031) of the second packaging (103) constitutes an inner part in the supply condition, the first part (1031) having such a width (B1) and height (H1) for a given material thickness of the corrugated cardboard that a snug fit between the interior of the first part (1031) of the second packaging (103) and the two support beams (31, 32) of the support assembly (3) accommodated side-by-side, the two support beams (31, 32) of the support assembly (3) preferably having identical heights (H3) and a total width (B3) which is the double of each support beam (31, 32).

10

15

20

25

30

35

40

45

50

55

3. A packed installation kit (100) according to claim 2, wherein the second part (1032) of the second packaging (103) constitutes an outer part in the supply condition, the second part (1032) having such a width (B2) and height (H2) for a given material thickness of the corrugated cardboard that a snug fit between the interior of the second part (1032) and the exterior of the first part (1031) is provided.

4. A packed installation kit (100) according to any one of the preceding claims, wherein the length (L1) of the first part (1031) of the second packaging (103) is longer than or equal to the length (L2) of the second part (1032) of the second packaging (103).

5. A packed installation kit (100) according to any one of the preceding claims, wherein the length (L1) of the first part (1031) of the second packaging (103) is identical for various lengths (L3) of the support beams (31, 32) within said pre-defined range, the length (L1) of the first part (1031) of the second packaging (103) being preferably 1400 to 1600 mm, more preferably about 1500 mm.

6. A packed installation kit (100) according to claim 5, wherein the length (L2) of the second part (1031) of the second packaging (103) is selected in accordance with the length (L3) of the support beams (31, 32), preferably such that a length is selected for a respective sub-range within said pre-defined range, the length (L2) of the second part (1032) of the second packaging (103) in a shorter sub-range being preferably 1000 to 1400 mm, more preferably about 1200 mm, and wherein the length (L2) of the second part (1032) of the second packaging (103) in a longer sub-range is preferably 1400 to 1600 mm, more preferably about 1500 mm.

7. A packed installation kit (100) according to any one

of the preceding claims, wherein fixating means (10330) are provided for positioning at least the first part (1031) of the second packaging (103) relative to the two support beams (31, 32) of the support assembly (3), preferably also fixating means for positioning the second part (1032) of the second packaging (103) relative to the first part (1031) and/or to the two support beams (31, 32).

8. A packed installation kit (100) according to any one of the preceding claims, wherein the reinforcement means comprise positioning a shock-absorbing element comprising at least one honeycomb element (10332) between ends of the support beams (31, 32) and the end portion (10326, 10316) of the second packaging (103), preferably one honeycomb element (10332) being provided at each end portion (10326, 10316).
9. A packed installation kit according to any one of the preceding claims, wherein the reinforcement means comprise the provision of a plurality of cardboard layers in the form of two, three or four end flaps (10316a, 10316b, 10316c, 10316c; 10326a, 10326b, 10326c), optionally combined with an extended flap portion (10326d) configured to overlap an exterior side of the second packaging.
10. A packed installation kit according to any one of the preceding claims, wherein the first packaging (101) comprises a box shaped as a rectangular prism, preferably of corrugated cardboard, having a length in a longitudinal direction (LP), a width in a width direction (WP) and a height in a height direction (HP) to provide a supply condition of the installation kit, and wherein the components of the first set of installation assemblies (4, 5, 6, 7, 8) of the installation kit (100) are accommodated in the first packaging (101) either as they are, or partially or entirely packed in a sub-packaging (104, 1063, 1064, 107, 108) of cardboard or paper material.
11. A method of forming a packed installation kit according to claim 1, comprising the steps of:
 - providing at least one blank having such dimensions that it is able to form the second packaging (103) in a folded state,
 - providing reinforcement means,
 - placing the components in the second packaging, and
 - applying the reinforcement means to provide a supply condition of the packed installation kit.
12. A method according to claim 11, comprising the steps of:
 - providing two blanks which in a folded state form

the first part (1031) and the second part (1032), respectively, of the second packaging (103), placing the components in the first part (1031), overlapping the second part (1032) with the first part (1031) to provide a supply condition of the packed installation kit.

13. A method according to claim 11 or 12, wherein the components are placed on the at least one blank before at least some of the folding operations have been carried out.
14. A method according to claims 12 and 13, wherein the components (31, 32) are placed on the first blank which in the folded state forms the first part (1031), before the folding is carried out, following which the components which are at least partially enclosed by the first part (1031) are either positioned on the second blank, which in the folded state forms the second part (1032) before folding is carried out, or the second blank is formed to the second part (1032) before connecting the second part (1032) with the first part (1031) and the components.
15. A method according to any one of claims 11 to 14, wherein the step of providing reinforcement means comprise one or more of the following operations:
 - providing the at least one blank with a plurality of cardboard layers,
 - providing at least one shock-absorbing element,
 - providing the at least one blank with an extended flap portion at one or both longitudinal ends of the blank.

Patentansprüche

1. Verpacktes Installationskit (100) zur Verwendung bei der Installation eines Dachfenstersystems, umfassend zwei Fenstereinheiten (11, 12) und dazu konfiguriert, nebeneinander in einer geneigten Dachstruktur (2) eingebaut zu werden, so dass das Dachfenstersystem im montierten Zustand eine gemeinsame Höhe (H) und eine kombinierte Breite (W) definiert, wobei das Installationskit (100) eine Anzahl von Installationsbaugruppen (3, 4, 5, 6, 7, 8), die jeweils eine oder mehrere Komponenten aufweisen, und optional Zusatzausrüstung (96, 96A, 97, 98) umfasst.

dadurch gekennzeichnet, dass

die Komponenten eines ersten Satzes von Installationsbaugruppen (4, 5, 6, 7, 8) des Installationskits (100) in einer ersten Verpackung (101) aufgenommen sind, dass die Komponenten eines zweiten Satzes von In-

stallationsbaugruppen (3) des Installationskits (100) zwei Stützbalken (31, 32) umfassen, die nebeneinander in einer zweiten Verpackung (103), die eine rechteckige Teleskoprohrverpackung mit zwei Teilen (1031, 1032) aus Wellpappe umfasst, aufgenommen sind, wobei ein erster Teil (1031) der zweiten Verpackung (103) eine erste Länge (L1) aufweist, die sich zwischen einem Endabschnitt (10316) und einer Öffnung (10310) erstreckt, und ein zweiter Teil (1032) eine zweite Länge (L2) aufweist, die sich zwischen einem Endabschnitt (10326) und einer Öffnung (10320) erstreckt, und die Stützbalken (31, 32) eine Länge (L3) innerhalb eines vordefinierten Bereichs aufweisen, dass die Gesamtlänge der zweiten Verpackung (103), wie durch die Summe der Länge (L1) des ersten Teils (1031) und der Länge (L2) des zweiten Teils (1032) definiert, die Länge (L3) der Stützbalken (31, 32) überschreitet, so dass eine Überlappung (LO) zwischen dem zweiten Teil (1032) und dem ersten Teil (1031) in einem Lieferzustand des Installationskits (100) innerhalb des vordefinierten Bereichs von Längen der Stützbalken (31, 32) des zweiten Satzes von Installationsbaugruppen (3) bereitgestellt ist, und dass

Mittel bereitgestellt sind, um mindestens einen von den Endabschnitten (10316, 10326) zu verstärken, wobei die Verstärkungsmittel aus der Gruppe ausgewählt sind, die umfasst:

- Bereitstellung einer Vielzahl von Wellpappeschichten am Endabschnitt,
- Bereitstellung eines stoßabsorbierenden Elements am Endabschnitt, und
- Bereitstellung eines erweiterten Laschenabschnitts, der dazu konfiguriert ist, eine Außenseite der zweiten Verpackung (103) zu überlappen.

2. Verpacktes Installationskit (100) nach Anspruch 1, wobei der erste Teil (1031) der zweiten Verpackung (103) im Lieferzustand eine inneres Teil bildet, wobei der erste Teil (1031) eine solche Breite (B1) und Höhe (H1) für eine bestimmte Materialdicke der Wellpappe aufweist, dass eine gute Passung zwischen dem Inneren des ersten Teils (1031) der zweiten Verpackung (103) und den zwei nebeneinander aufgenommenen Stützbalken (31, 32) der Stützbaugruppe (3) hergestellt wird, wobei die zwei Stützbalken (31, 32) der Stützbaugruppe (3) vorzugsweise identische Höhen (H3) und eine Gesamtbreite (B3), die das Doppelte jedes Stützbalkens (31, 32) beträgt, aufweisen.
3. Verpacktes Installationskit (100) nach Anspruch 2, wobei der zweite Teil (1032) der zweiten Verpackung

(103) im Lieferzustand einen äußeren Teil bildet, wobei der zweite Teil (1032) für eine gegebene Materialdicke der Wellpappe eine solche Breite (B2) und Höhe (H2) aufweist, dass eine gute Passung zwischen dem Inneren des zweiten Teils (1032) und dem Äußeren des ersten Teils (1031) bereitgestellt ist.

4. Verpacktes Installationskit (100) nach einem der vorhergehenden Ansprüche, wobei die Länge (L1) des ersten Teils (1031) der zweiten Verpackung (103) länger als die oder gleich der Länge (L2) des zweiten Teils (1032) der zweiten Verpackung (103) ist.

5. Verpacktes Installationskit (100) nach einem der vorhergehenden Ansprüche, wobei die Länge (L1) des ersten Teils (1031) der zweiten Verpackung (103) für verschiedene Längen (L3) der Stützbalken (31, 32) innerhalb des vordefinierten Bereichs identisch ist, wobei die Länge (L1) des ersten Teils (1031) der zweiten Verpackung (103) vorzugsweise 1400 bis 1600 mm, stärker bevorzugt etwa 1500 mm, ist.

6. Verpacktes Installationskit (100) nach Anspruch 5, wobei die Länge (L2) des zweiten Teils (1031) der zweiten Verpackung (103) entsprechend der Länge (L3) der Stützbalken (31, 32) ausgewählt ist, vorzugsweise so, dass für einen entsprechenden Teilbereich innerhalb des vordefinierten Bereichs eine Länge ausgewählt ist, wobei die Länge (L2) des zweiten Teils (1032) der zweiten Verpackung (103) in einem kürzeren Teilbereich vorzugsweise 1000 bis 1400 mm, stärker bevorzugt etwa 1200 mm, beträgt, und wobei die Länge (L2) des zweiten Teils (1032) der zweiten Verpackung (103) in einem längeren Teilbereich vorzugsweise 1400 bis 1600 mm, stärker bevorzugt etwa 1500 mm, beträgt.

7. Verpacktes Installationskit (100) nach einem der vorhergehenden Ansprüche, wobei Befestigungsmittel (10330) bereitgestellt sind, um zumindest den ersten Teil (1031) der zweiten Verpackung (103) relativ zu den zwei Stützbalken (31, 32) der Stützbaugruppe (3) zu positionieren, vorzugsweise auch Befestigungsmittel zum Positionieren des zweiten Teils (1032) der zweiten Verpackung (103) relativ zum ersten Teil (1031) und/oder zu den zwei Stützbalken (31, 32).

8. Verpacktes Installationskit (100) nach einem der vorhergehenden Ansprüche, wobei die Verstärkungsmittel das Positionieren eines stoßabsorbierenden Elements umfassen, das mindestens ein Wabenelement (10332) zwischen Enden der Stützbalken (31, 32) und dem Endabschnitt (10326, 10316) der zweiten Verpackung (103) umfasst, wobei vorzugsweise an jedem Endabschnitt (10326, 10316) ein Wabenelement (10332) bereitgestellt ist.

9. Verpacktes Installationskit nach einem der vorhergehenden Ansprüche, wobei die Verstärkungsmittel das Bereitstellen einer Vielzahl von Wellpappeschichten in der Form von zwei, drei oder vier Abschlusslaschen (10316a, 10316b, 10316c, 10316c; 10326a, 10326b, 10326c), optional kombiniert mit einem erweiterten Laschenabschnitt (10326d), der dazu konfiguriert ist, eine Außenseite der zweiten Verpackung zu überlappen, umfassen.

10. Verpacktes Installationskit nach einem der vorhergehenden Ansprüche, wobei die erste Verpackung (101) eine Kiste umfasst, die als ein rechteckiges Prisma geformt ist, vorzugsweise aus Wellpappe, mit einer Länge in einer Längsrichtung (LP), einer Breite in einer Breitenrichtung (WP) und einer Höhe in einer Höhenrichtung (HP), um den Lieferzustand des Installationskits bereitzustellen, und wobei die Komponenten des ersten Satzes von Installationsbaugruppen (4, 5, 6, 7, 8) des Installationskits (100) in der ersten Verpackung (101) entweder in ihrer ursprünglichen Form oder teilweise oder vollständig verpackt in einer Unterverpackung (104, 1063, 1064, 107, 108) aus Karton- oder Papiermaterial aufgenommen sind.

11. Verfahren zum Ausbilden eines verpackten Installationskits nach Anspruch 1, umfassend die Schritte:

Bereitstellen mindestens eines Zuschnitts, der solche Abmessungen aufweist, dass er in einem gefalteten Zustand die zweite Verpackung (103) ausbilden kann,
Bereitstellen von Verstärkungsmitteln,
Platzieren der Komponenten in der zweiten Verpackung, und
Anwenden der Verstärkungsmittel, um einen Lieferzustand des verpackten Installationskits bereitzustellen.

12. Verfahren nach Anspruch 11, umfassend die Schritte:

Bereitstellen von zwei Zuschnitten, die in einem gefalteten Zustand den ersten Teil (1031) beziehungsweise den zweiten Teil (1032) der zweiten Verpackung (103) ausbilden,
Platzieren der Komponenten im ersten Teil (1031),
Überlappen des zweiten Teils (1032) mit dem ersten Teil (1031), um einen Lieferzustand des verpackten Installationskits bereitzustellen.

13. Verfahren nach Anspruch 11 oder 12, wobei die Komponenten auf dem mindestens einen Zuschnitt platziert werden, bevor mindestens einige der Faltvorgänge ausgeführt werden.

14. Verfahren nach den Ansprüchen 12 und 13, wobei die Komponenten (31, 32) auf dem ersten Zuschnitt platziert werden, der im gefalteten Zustand den ersten Teil (1031) ausbildet, bevor die Faltung ausgeführt wird, wonach die Komponenten, die mindestens teilweise vom ersten Teil (1031) umschlossen sind, entweder auf dem zweiten Zuschnitt, der im gefalteten Zustand den zweiten Teil (1032) ausbildet, positioniert werden, bevor die Faltung ausgeführt wird, oder der zweite Zuschnitt zu dem zweiten Teil (1032) ausgebildet wird, bevor der zweite Teil (1032) mit dem ersten Teil (1031) und den Komponenten verbunden wird.

15. Verfahren nach einem der Ansprüche 11 bis 14, wobei der Schritt des Bereitstellens von Verstärkungsmitteln einen oder mehrere der folgenden Vorgänge umfasst:

- Bereitstellen des mindestens einen Zuschnitts mit einer Vielzahl von Wellpappeschichten,
- Bereitstellen mindestens eines stoßabsorbierenden Elements,
- Bereitstellen mindestens eines Zuschnitts mit einem erweiterten Laschenabschnitt an einem oder beiden Längsenden des Zuschnitts.

Revendications

1. Kit d'installation emballé (100) pour une utilisation dans l'installation d'un système de fenêtre de toit comprenant deux unités de fenêtre (11, 12) conçues pour être incorporées côte à côte dans une structure de toit inclinée (2) de telle sorte que le système de fenêtre de toit définisse une hauteur commune (H) et une largeur combinée (W) dans l'état posé, ledit kit d'installation (100) comprenant un certain nombre d'ensembles d'installation (3, 4, 5, 6, 7, 8), comprenant chacun un ou plusieurs composants et, éventuellement, un matériel auxiliaire (96, 96A, 97, 98), **caractérisé en ce que**

les composants d'un premier groupe d'ensembles d'installation (4, 5, 6, 7, 8) du kit d'installation (100) sont placés dans un premier emballage (101), **en ce que**

les composants d'un second groupe d'ensembles d'installation (3) du kit d'installation (100) comprennent deux poutres de support (31, 32) placées côte à côte dans un second emballage (103) comprenant un emballage tubulaire, télescopique, rectangulaire comportant deux parties (1031, 1032) en carton ondulé, une première partie (1031) du second emballage (103) présentant une première longueur (L1) s'étendant entre une partie d'extrémité (10316) et une ouverture (10310), et une seconde partie (1032)

- présentant une seconde longueur (L2) s'étendant entre une partie d'extrémité (10326) et une ouverture (10320), et les poutres de support (31, 32) présentant une longueur (L3) comprise dans une plage prédéfinie, **en ce que**
- la longueur totale du second emballage (103) telle que définie par la somme de la longueur (L1) de la première partie (1031) et de la longueur (L2) de la seconde partie (1032) est supérieure à la longueur (L3) des poutres de support (31, 32) de façon à créer, dans un état de livraison du kit d'installation (100), un chevauchement (LO) entre la seconde partie (1032) et la première partie (1031) compris dans ladite plage prédéfinie de longueurs des poutres de support (31, 32) du second groupe d'ensembles d'installation (3), et **en ce que**
- des moyens sont inclus pour renforcer au moins une des parties d'extrémité (10316, 10326), lesdits moyens de renforcement étant choisis dans le groupe comprenant
- inclusion d'une pluralité de couches de carton au niveau de la partie d'extrémité,
 - inclusion d'un élément d'amortissement des chocs au niveau de la partie d'extrémité et
 - inclusion d'une partie de prolongement de rabat conçue pour chevaucher un côté extérieur du second emballage (103).
2. Kit d'installation emballé (100) selon la revendication 1, dans lequel la première partie (1031) du second emballage (103) constitue une partie intérieure dans l'état de livraison, la première partie (1031) présentant, pour une épaisseur de matériau donnée du carton ondulé, une largeur (B1) et une hauteur (H1) telles qu'un ajustement serré existe entre l'intérieur de la première partie (1031) du second emballage (103) et les deux poutres de support (31, 32) de l'ensemble de support (3) placées côte à côte, les deux poutres de support (31, 32) de l'ensemble de support (3) présentant, de préférence, des hauteurs (H3) identiques et une largeur totale (B3) qui est le double de celle de chaque poutre de support (31, 32).
 3. Kit d'installation emballé (100) selon la revendication 2, dans lequel la seconde partie (1032) du second emballage (103) constitue une partie extérieure dans l'état de livraison, la seconde partie (1032) présentant, pour une épaisseur de matériau donnée du carton ondulé, une largeur (B2) et une hauteur (H2) telles qu'un ajustement serré existe entre l'intérieur de la seconde partie (1032) et l'extérieur de la première partie (1031).
 4. Kit d'installation emballé (100) selon l'une quelconque des revendications précédentes, dans lequel la longueur (L1) de la première partie (1031) du second emballage (103) est supérieure ou égale à la longueur (L2) de la seconde partie (1032) du second emballage (103).
 5. Kit d'installation emballé (100) selon l'une quelconque des revendications précédentes, dans lequel la longueur (L1) de la première partie (1031) du second emballage (103) est identique pour diverses longueurs (L3) des poutres de support (31, 32) dans ladite plage prédéfinie, la longueur (L1) de la première partie (1031) du second emballage (103) étant, de préférence, de 1400 à 1600 mm, plus préférentiellement d'environ 1500 mm.
 6. Kit d'installation emballé (100) selon la revendication 5, dans lequel la longueur (L2) de la seconde partie (1032) du second emballage (103) est choisie en fonction de la longueur (L3) des poutres de support (31, 32), de préférence de telle sorte qu'une longueur est choisie pour une sous-plage respective dans ladite plage prédéfinie, la longueur (L2) de la seconde partie (1032) du second emballage (103) dans une sous-plage de longueurs inférieures étant, de préférence, de 1000 à 1400 mm, plus préférentiellement d'environ 1200 mm, et dans lequel la longueur (L2) de la seconde partie (1032) du second emballage (103) dans une sous-plage de longueurs supérieures est, de préférence, de 1400 à 1600 mm, plus préférentiellement d'environ 1500 mm.
 7. Kit d'installation emballé (100) selon l'une quelconque des revendications précédentes, dans lequel sont inclus des moyens de fixation (10330) pour le positionnement au moins de la première partie (1031) du second emballage (103) relativement aux deux poutres de support (31, 32) de l'ensemble de support (3), de préférence également des moyens de fixation pour le positionnement de la seconde partie (1032) du second emballage (103) relativement à la première partie (1031) et/ou aux deux poutres de support (31, 32).
 8. Kit d'installation emballé (100) selon l'une quelconque des revendications précédentes, dans lequel les moyens de renforcement comprennent le positionnement d'un élément d'amortissement des chocs comprenant au moins un élément à structure en nid d'abeilles (10332) entre des extrémités des poutres de support (31, 32) et la partie d'extrémité (10326, 10316) du second emballage (103), de préférence un élément à structure en nid d'abeilles (10332) étant placé au niveau de chaque partie d'extrémité (10326, 10316).
 9. Kit d'installation emballé selon l'une quelconque des revendications précédentes, dans lequel les moyens de renforcement comprennent l'inclusion d'une plu-

ralité de couches de carton sous la forme de deux, trois ou quatre rabats d'extrémité (10316a, 10316b, 10316c, 10316c ; 10326a, 10326b, 10326c), éventuellement combinés avec une partie de prolongement de rabat (10326d) conçue pour chevaucher un côté extérieur du second emballage.

10. Kit d'installation emballé selon l'une quelconque des revendications précédentes, dans lequel le premier emballage (101) comprend une boîte en forme de prisme rectangulaire, de préférence en carton ondulé, présentant une longueur dans une direction longitudinale (LP), une largeur dans une direction de largeur (WP) et une hauteur dans une direction de hauteur (HP) pour former un état de livraison du kit d'installation, et dans lequel les composants du premier groupe d'ensembles d'installation (4, 5, 6, 7, 8) du kit d'installation (100) sont placés dans le premier emballage (101) soit tels quels, soit partiellement ou entièrement emballés dans un sous-emballage (104, 1063, 1064, 107, 108) en carton ou en papier.

11. Procédé de formation d'un kit d'installation emballé selon la revendication 1, comprenant les étapes suivantes :

préparer au moins une découpe présentant des dimensions telles qu'elle est propre à former le second emballage (103) dans un état plié, préparer des moyens de renforcement, placer les composants dans le second emballage et appliquer les moyens de renforcement pour former un état de livraison du kit d'installation emballé.

12. Procédé selon la revendication 11, comprenant les étapes suivantes :

préparer deux découpes qui, dans un état plié, forment, respectivement, la première partie (1031) et la seconde partie (1032) du second emballage (103), placer les composants dans la première partie (1031), joindre la seconde partie (1032) à la première partie (1031) avec un chevauchement pour former un état de livraison du kit d'installation emballé.

13. Procédé selon la revendication 11 ou 12, dans lequel les composants sont placés sur l'au moins une découpe avant l'exécution d'au moins certaines des opérations de pliage.

14. Procédé selon les revendications 12 et 13, dans lequel les composants (31, 32) sont placés sur la première découpe, qui, dans l'état plié, forme la première

re partie (1031), avant l'exécution du pliage, à la suite de quoi soit les composants qui sont au moins partiellement enveloppés par la première partie (1031) sont positionnés sur la seconde découpe, qui, dans l'état plié, forme la seconde partie (1032), avant l'exécution du pliage, soit la seconde découpe est mise en forme de façon à obtenir la seconde partie (1032) avant de joindre la seconde partie (1032) à la première partie (1031) et aux composants.

15. Procédé selon l'une quelconque des revendications 11 à 14, dans lequel l'étape d'inclusion de moyens de renforcement comprend une ou plusieurs des opérations suivantes :

- doter l'au moins une découpe d'une pluralité de couches de carton,
- inclure au moins un élément d'amortissement des chocs,
- doter l'au moins une découpe d'une partie de prolongement de rabat au niveau d'une extrémité longitudinale ou des deux extrémités longitudinales de la découpe.

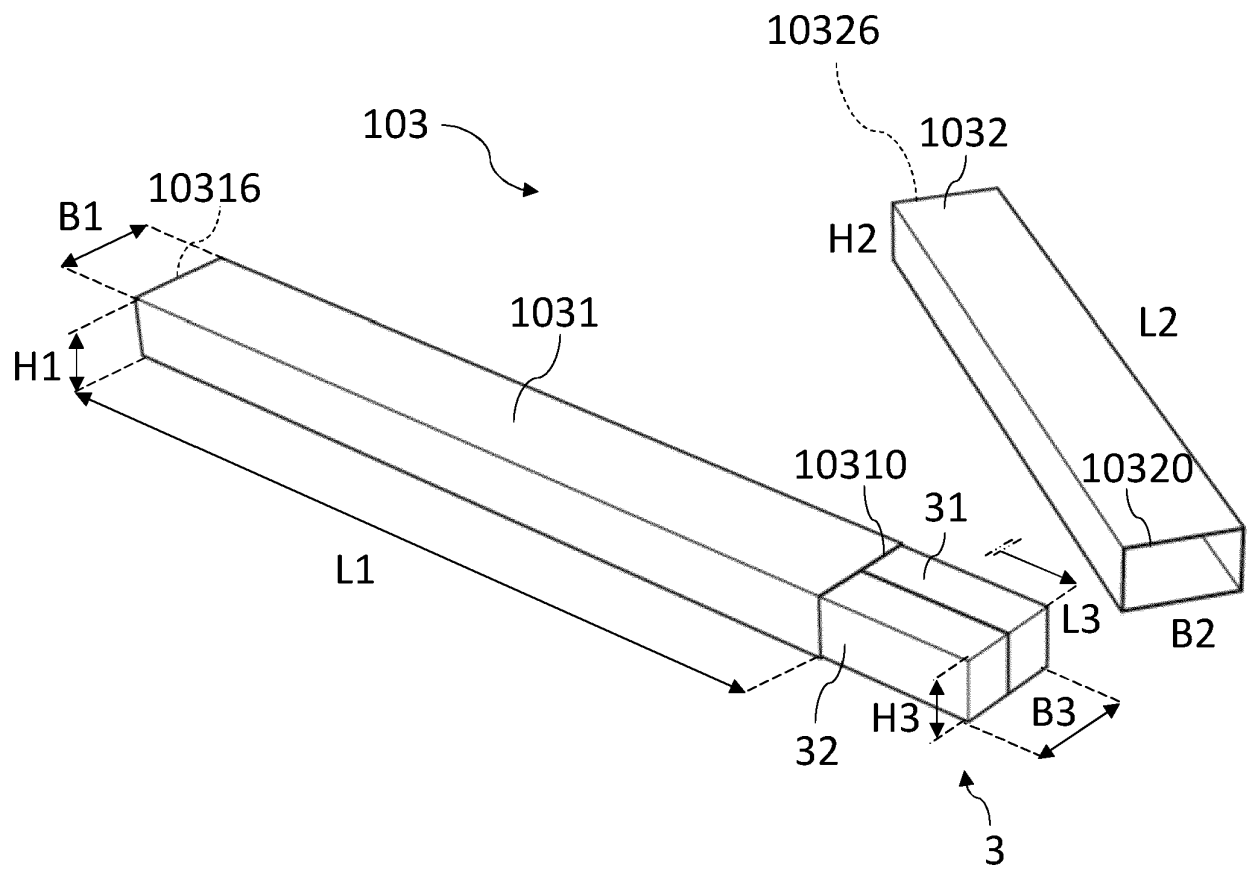


Fig. 1

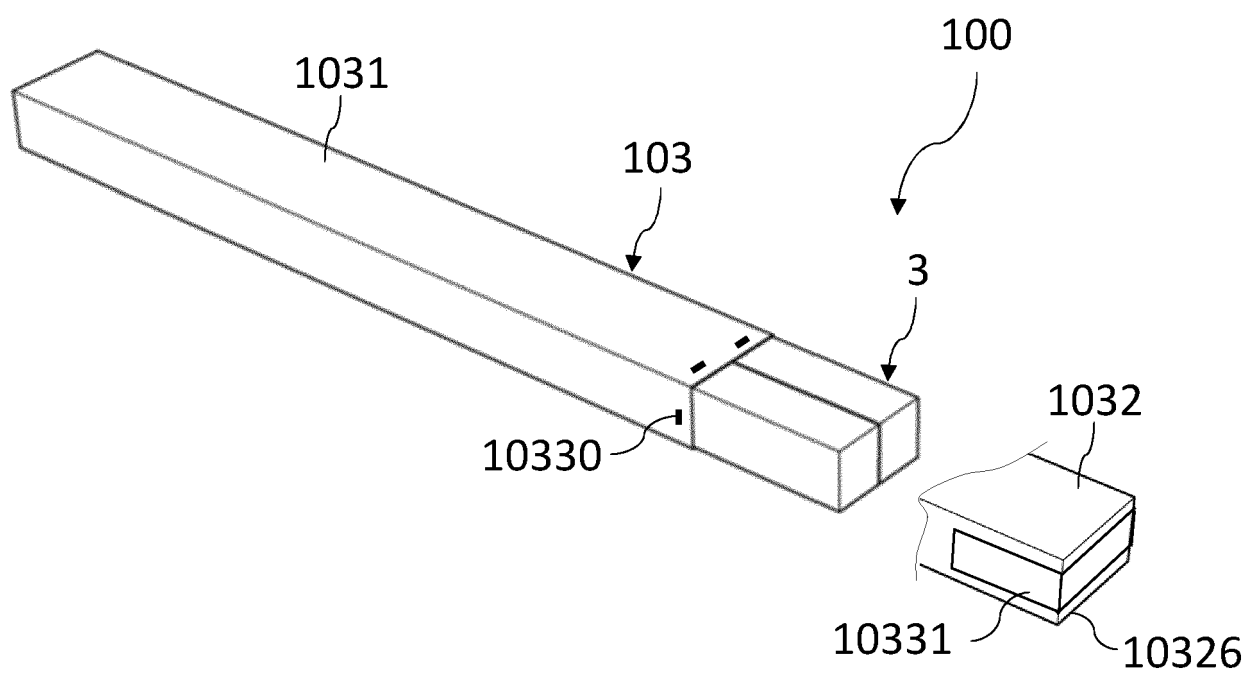


Fig. 2

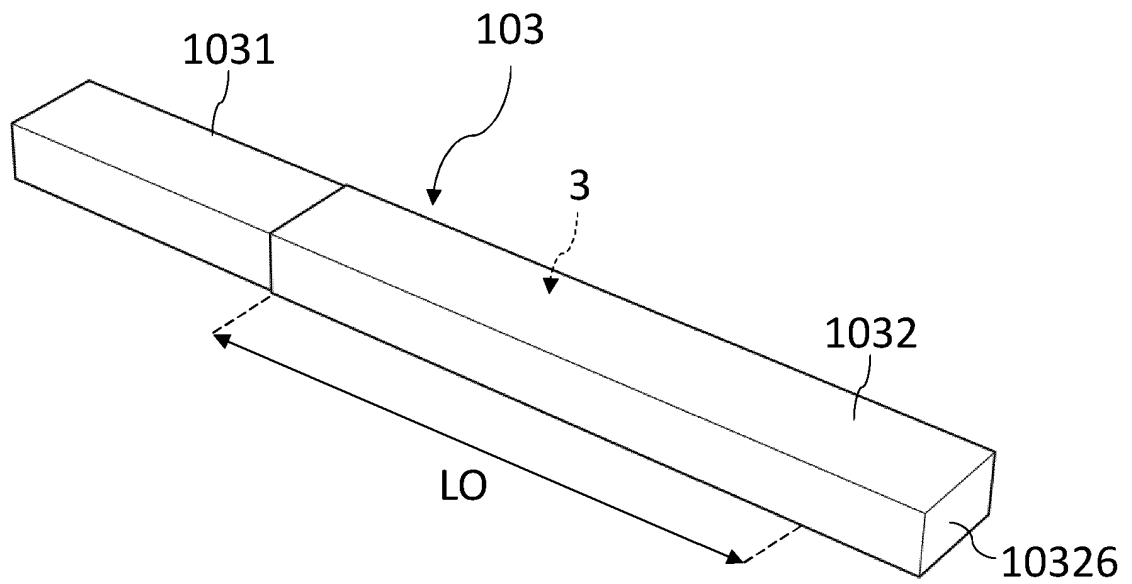


Fig. 3a

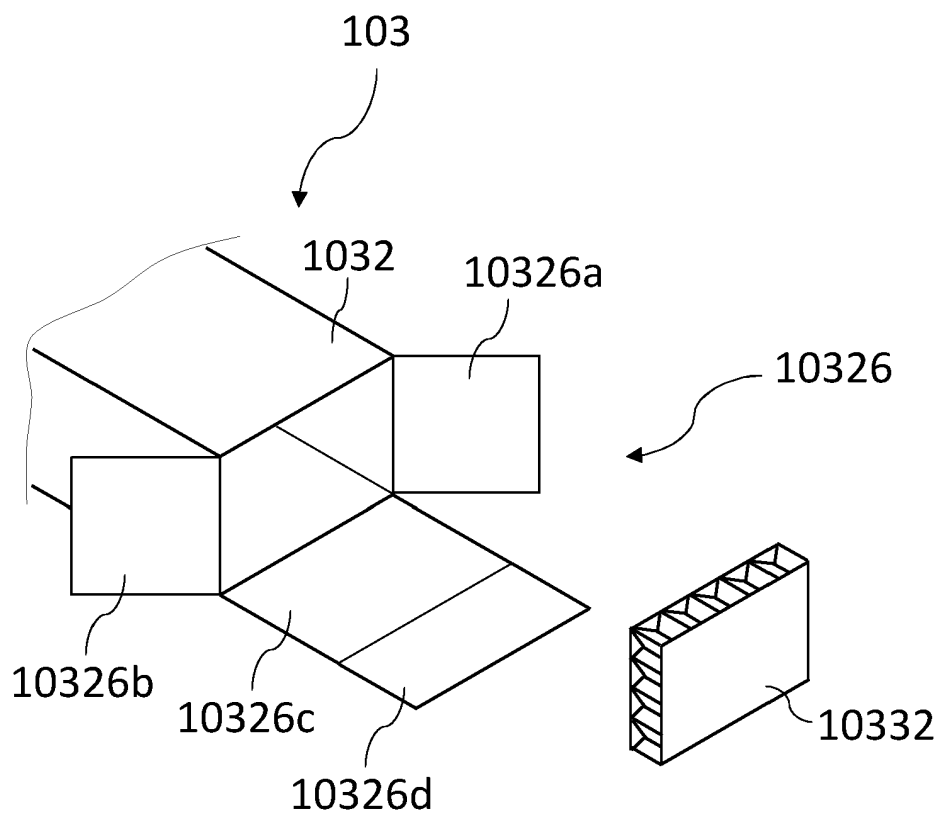


Fig. 3b

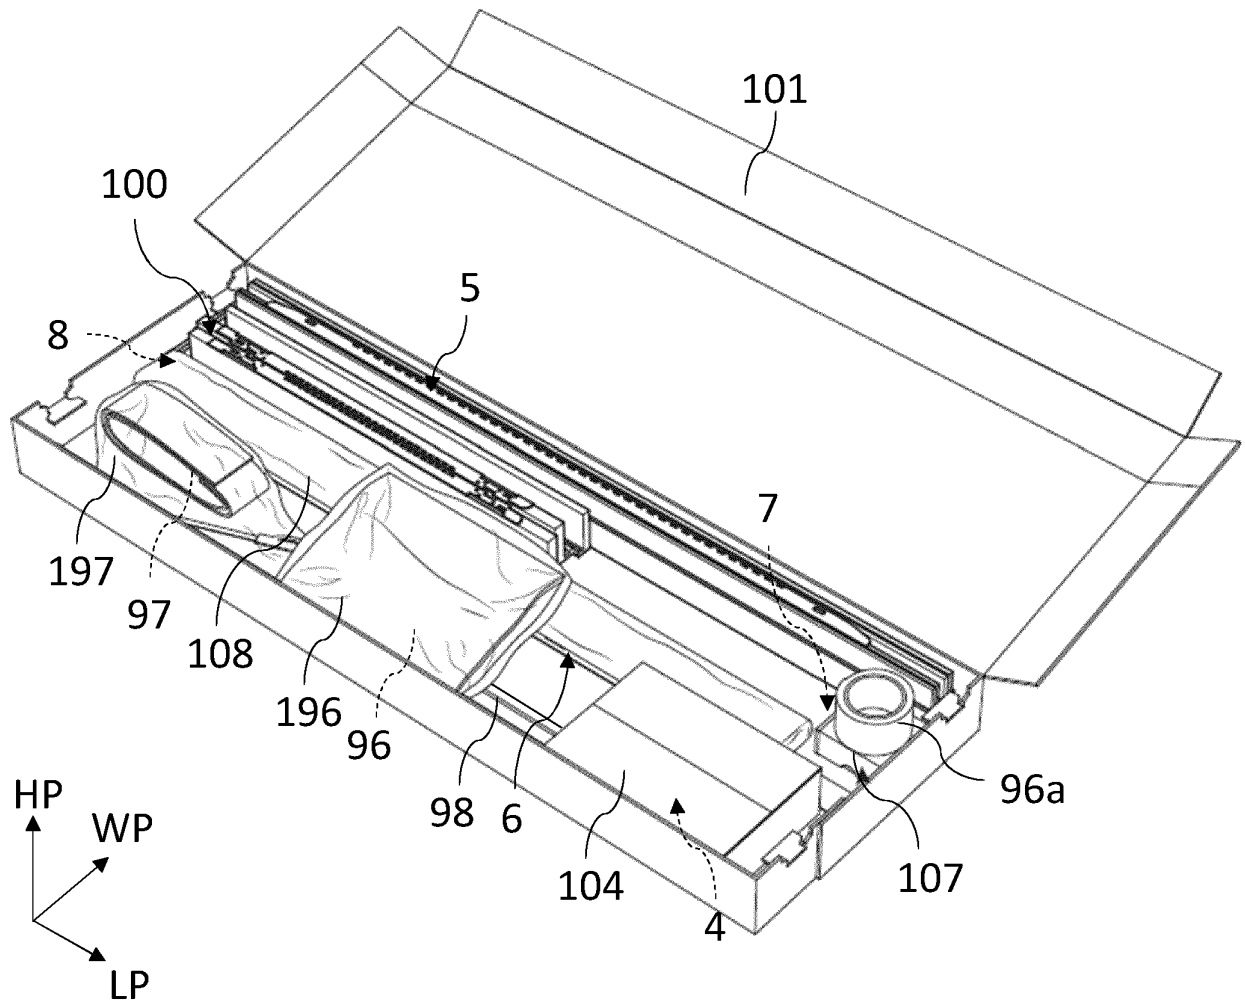
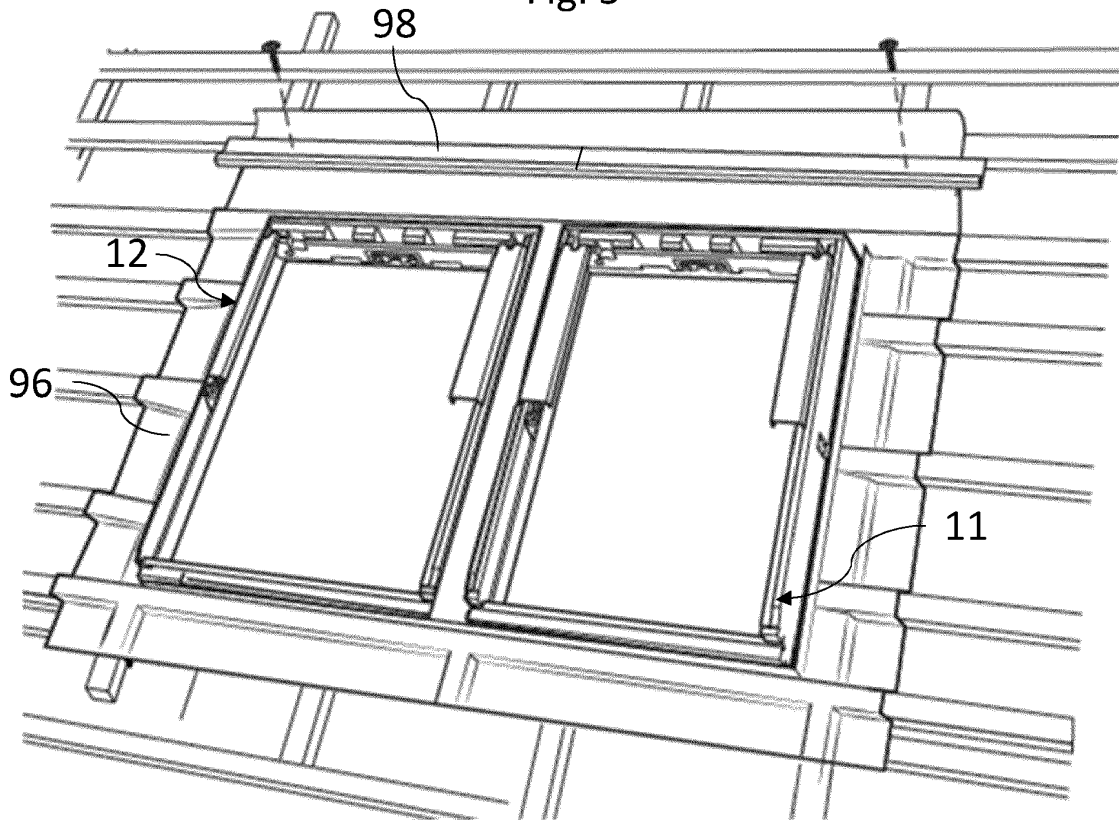
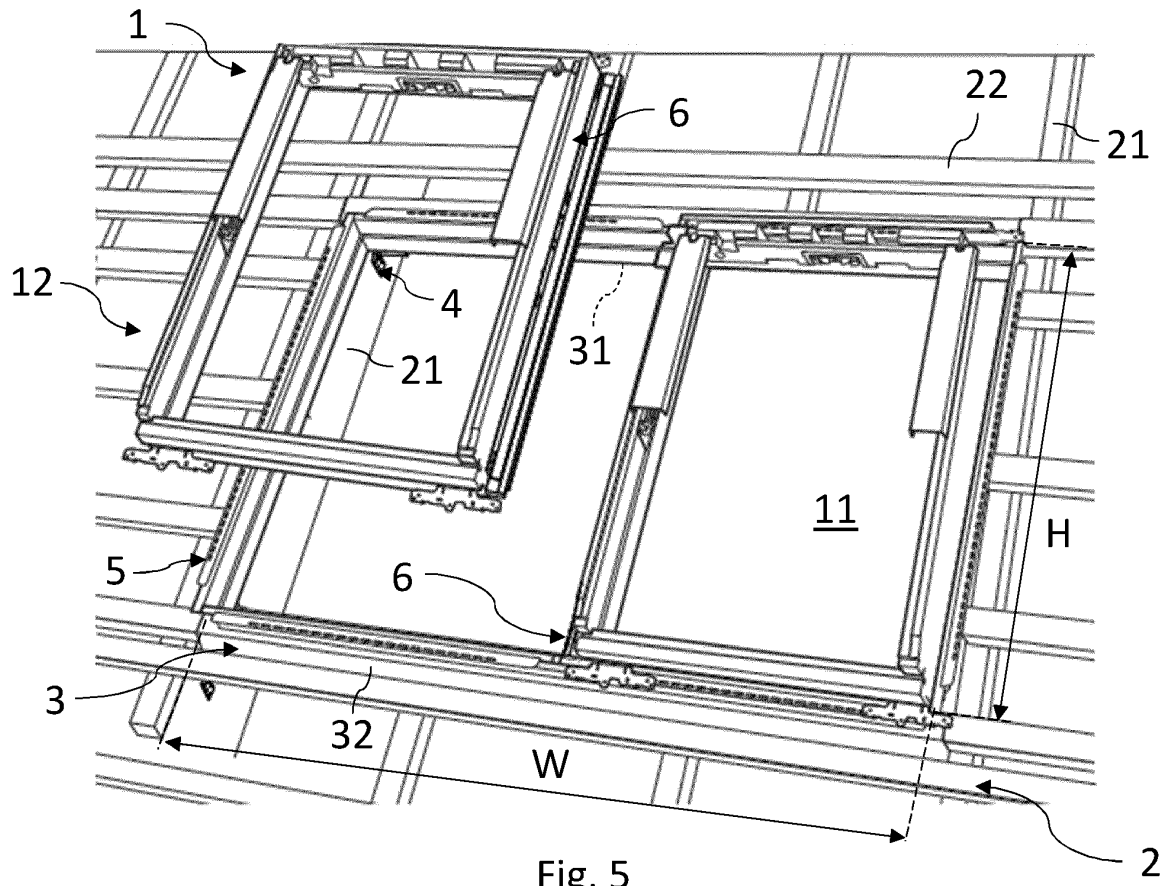


Fig. 4



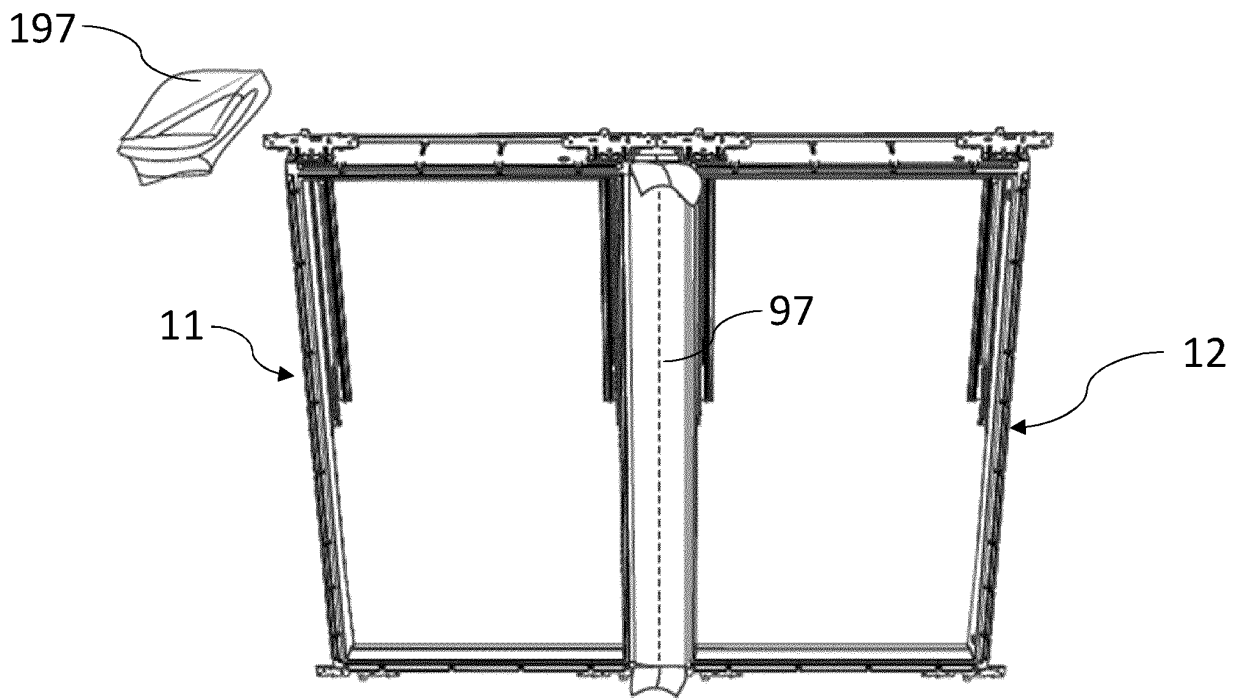


Fig. 7

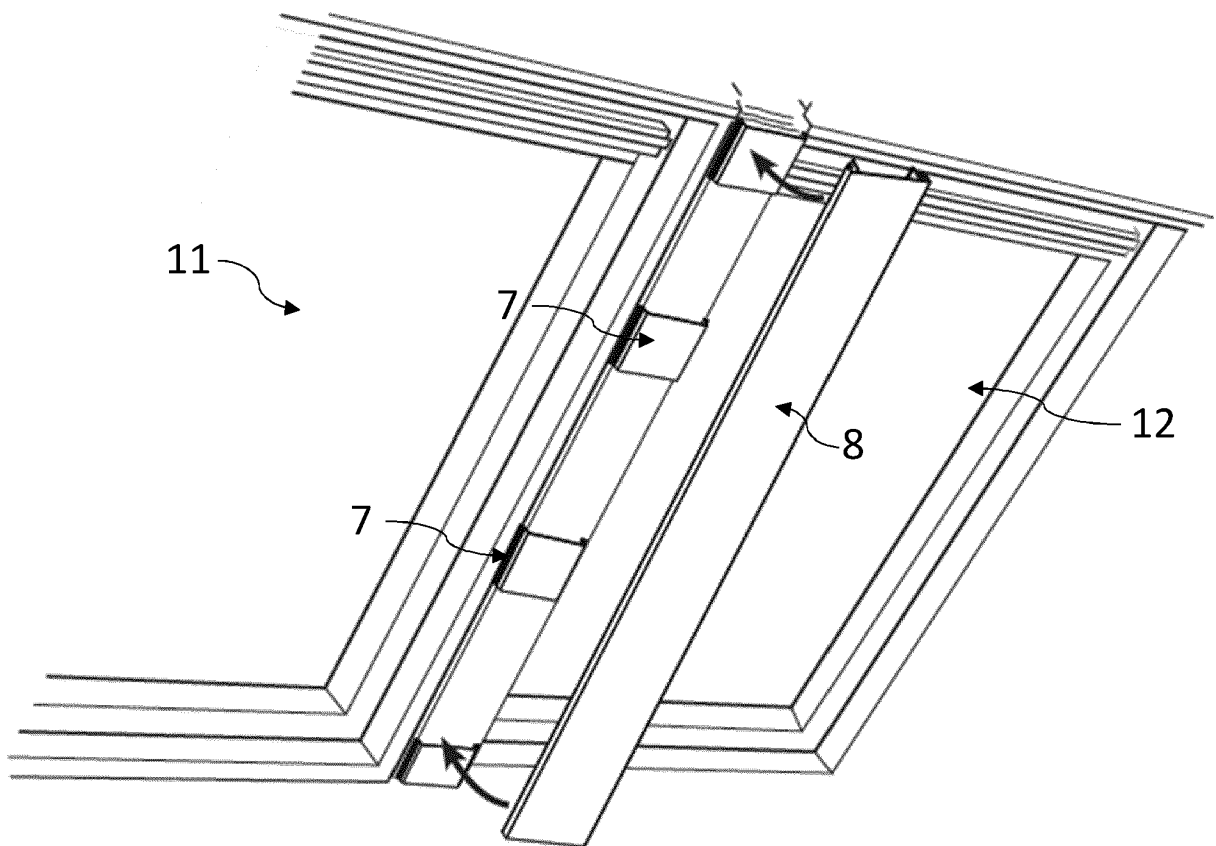


Fig. 8

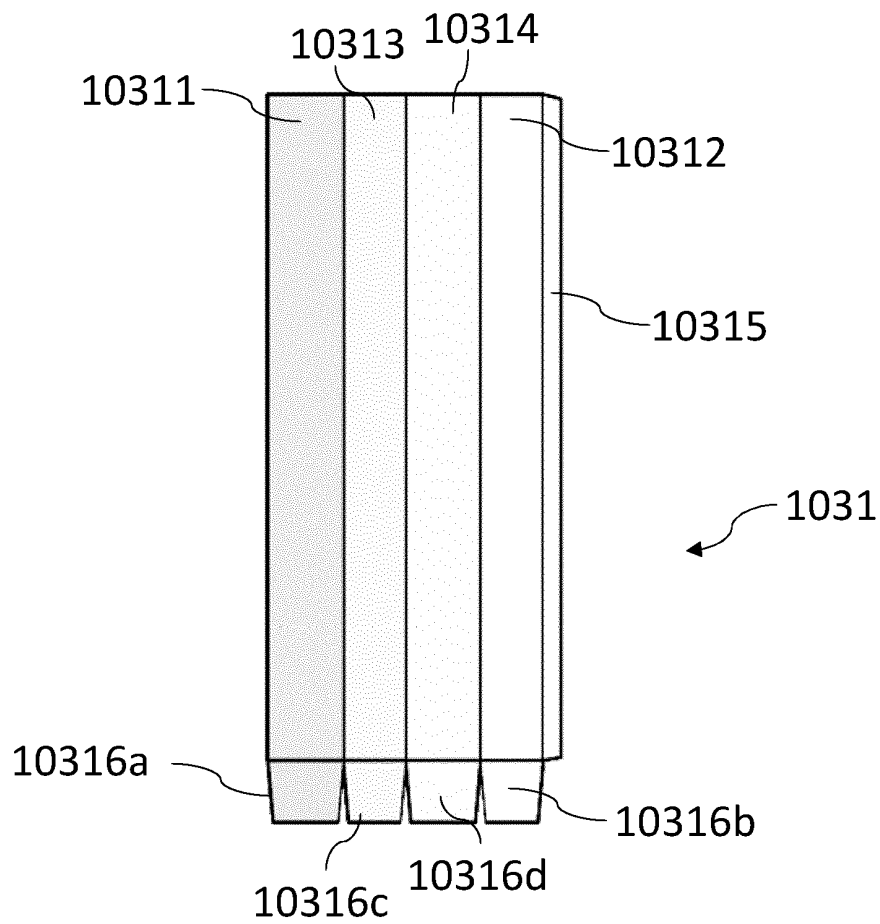


Fig. 9

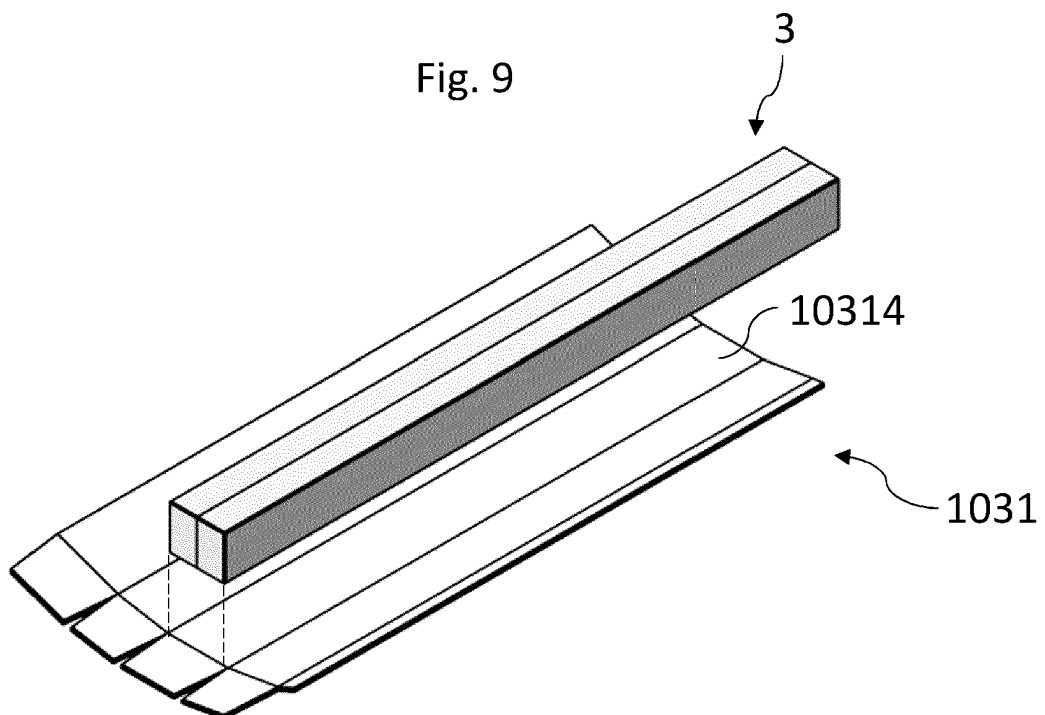


Fig. 10

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 21216869 A [0003]
- EP 21216874 A [0003]
- EP 21216881 A [0003]
- EP 21216882 A [0003]
- EP 1710163 A1 [0004]