




(86) Date de dépôt PCT/PCT Filing Date: 1997/07/30
(87) Date publication PCT/PCT Publication Date: 1998/02/12
(45) Date de délivrance/Issue Date: 2007/10/23
(85) Entrée phase nationale/National Entry: 1999/01/19
(86) N° demande PCT/PCT Application No.: US 1997/013287
(87) N° publication PCT/PCT Publication No.: 1998/005596
(30) Priorité/Priority: 1996/08/01 (US08/686844)

(51) Cl.Int./Int.Cl. *C02F 1/50* (2006.01),
C02F 1/68 (2006.01), *C02F 1/76* (2006.01),
C02F 1/78 (2006.01)
(72) Inventeurs/Inventors:
DENKEWICZ, RAYMOND P., JR., US;
RAFTER, JOHN D., US;
BOLLINGER, MARK A., US
(73) Propriétaire/Owner:
FOUNTAINHEAD TECHNOLOGIES, INC., US
(74) Agent: BERESKIN & PARR

(54) Titre : PURIFICATEUR D'EAU POUR CUVE THERMALE
(54) Title: WATER PURIFIER FOR A SPA

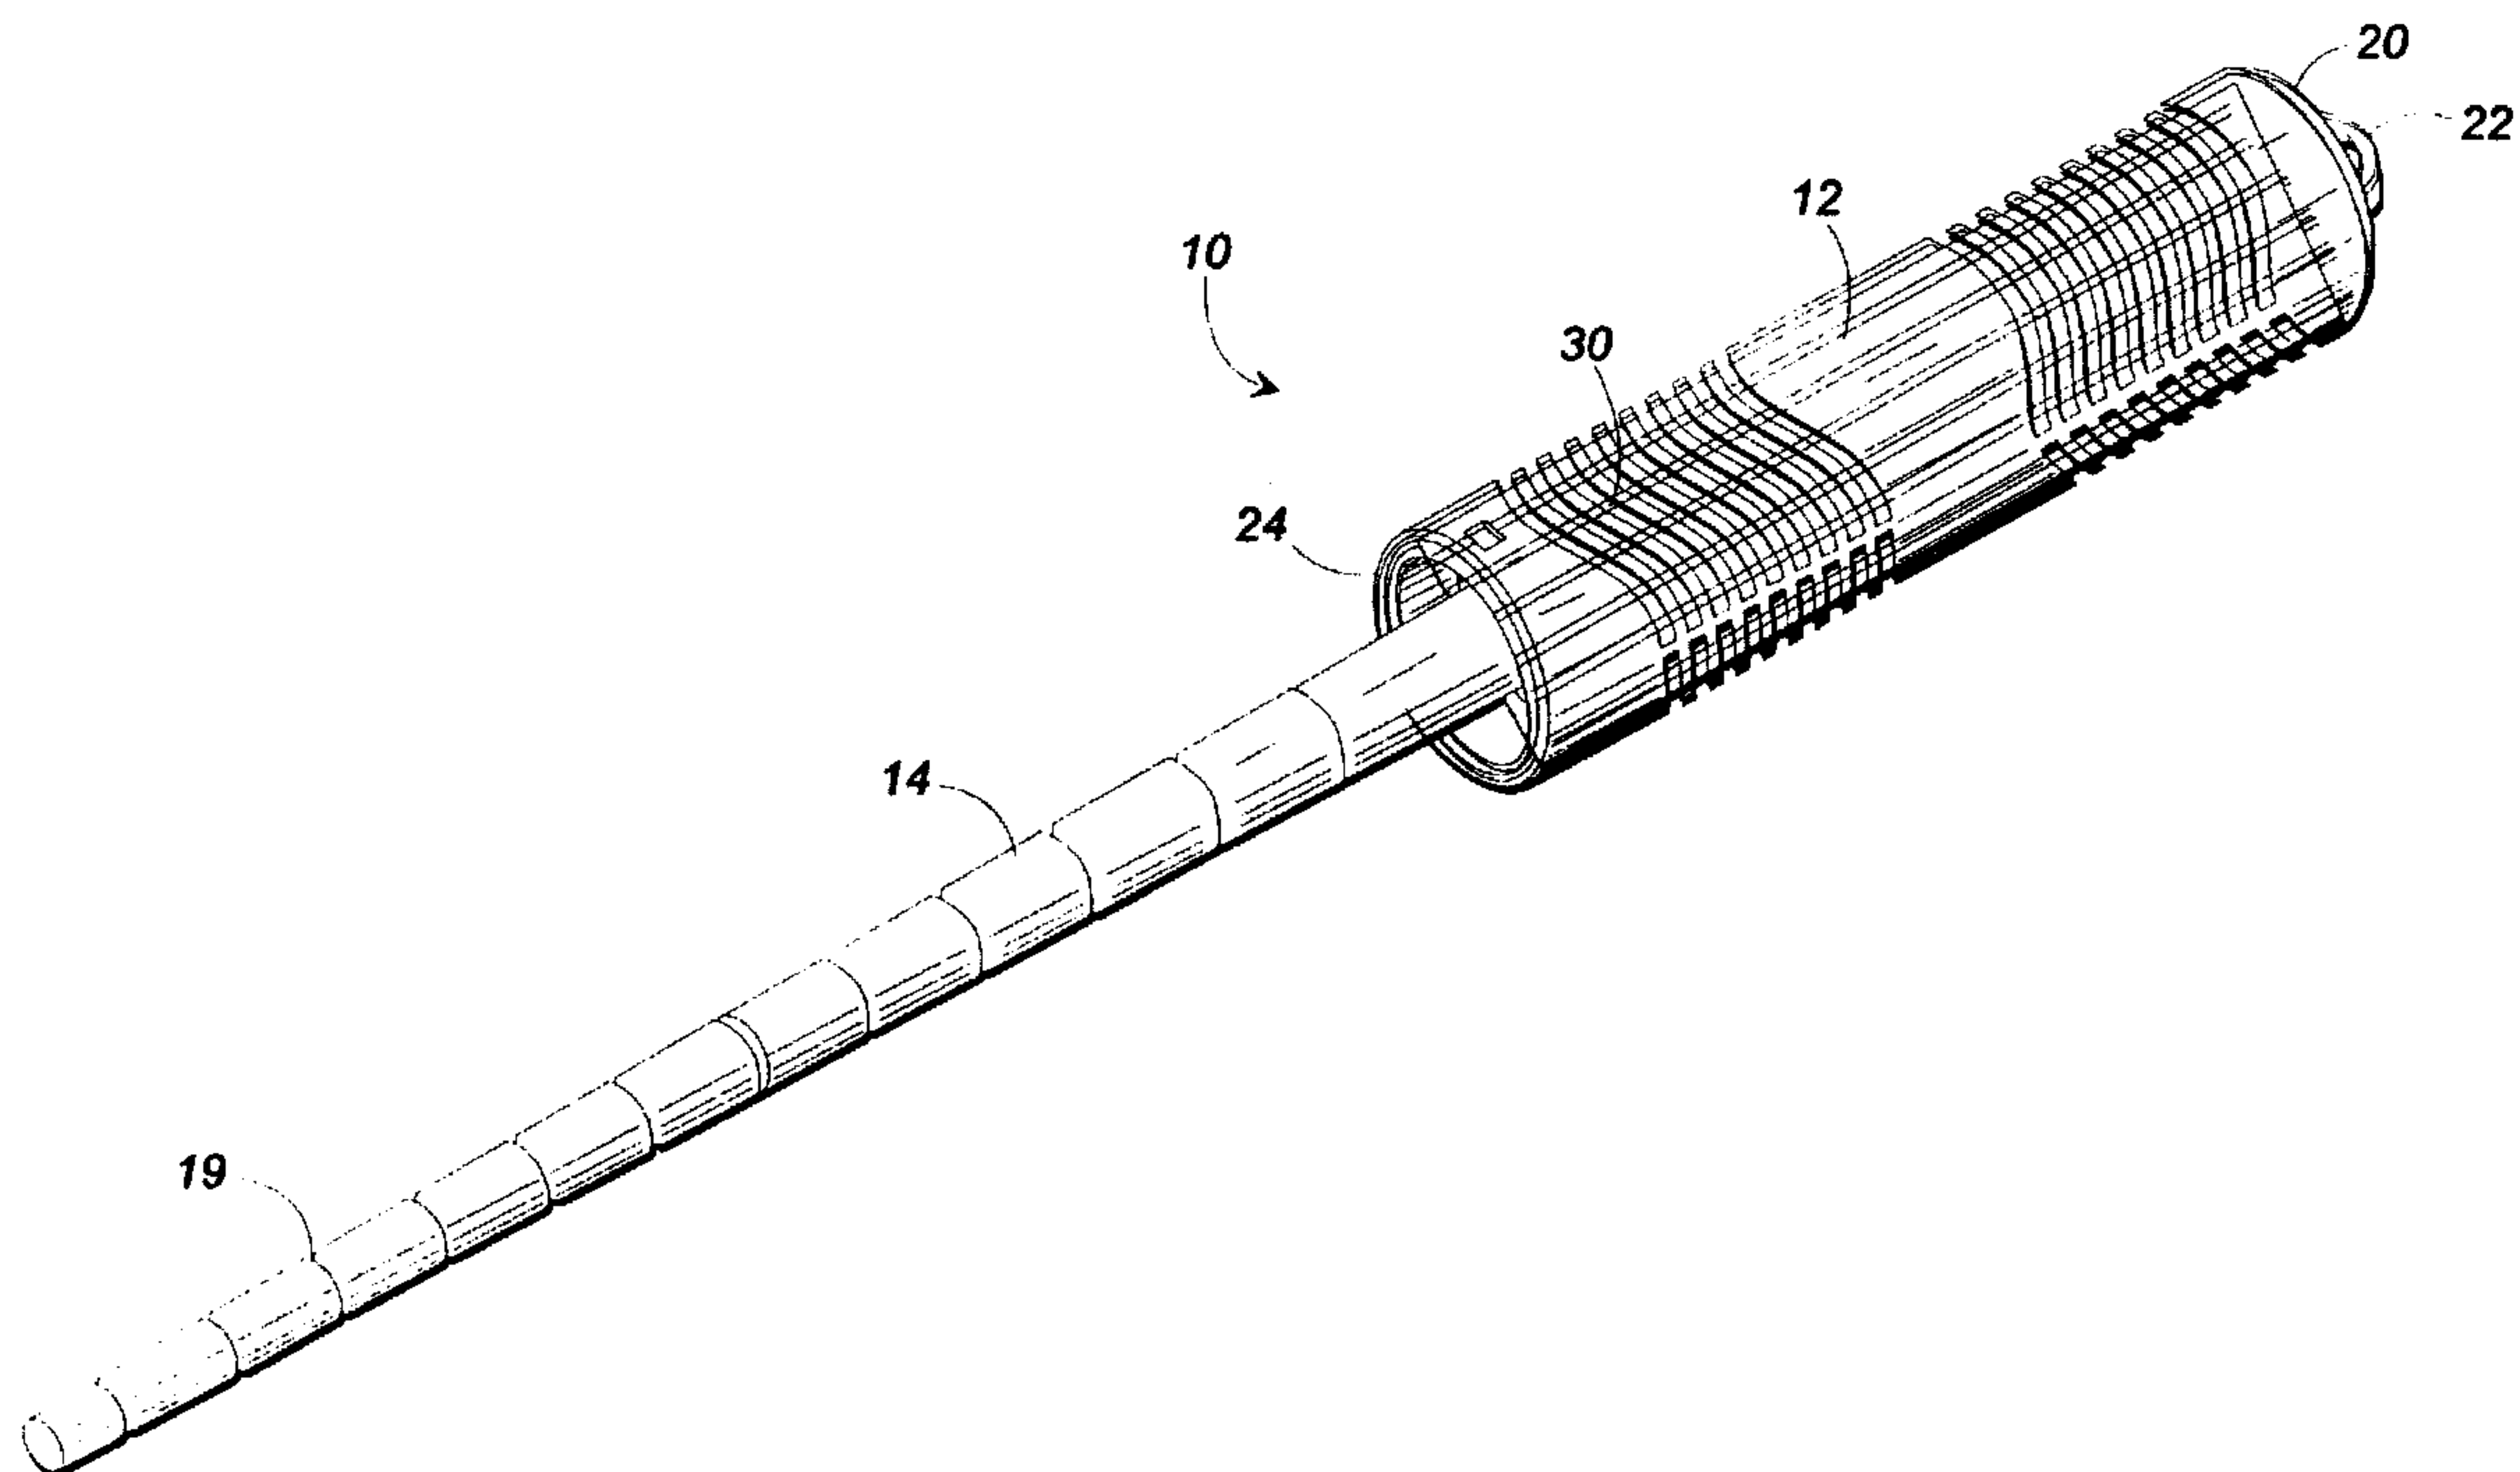

(57) Abrégé/Abstract:

A water purifier includes a housing that contains purification material for purifying the water. The water purifier is placed a flow of circulating water in the spa. The purification material preferably can be a silver-containing material.



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C02F 1/68, 1/50, 1/78, 1/76, 1/72	A1	(11) International Publication Number: WO 98/05596 (43) International Publication Date: 12 February 1998 (12.02.98)
(21) International Application Number: PCT/US97/13287 (22) International Filing Date: 30 July 1997 (30.07.97) (30) Priority Data: 08/686,844 1 August 1996 (01.08.96) US (71) Applicant: FOUNTAINHEAD TECHNOLOGIES, INC. [US/US]; 501 Valley Street, Providence, RI 02908 (US). (72) Inventors: DENKEWICZ, Raymond, P., Jr.; 222 Larchwood Drive, Warwick, RI 02886 (US). RAFTER, John, D.; Apartment 1, 141 Governor Street, Providence, RI 02906 (US). BOLLINGER, Mark, A.; 1739-T Royal Oak Drive, Pittsburgh, PA 15220 (US). (74) Agents: PRATT, John, S. et al.; Kilpatrick Stockton LLP, Suite 2800, 1100 Peachtree Street, Atlanta, GA 30309-4530 (US).		(81) Designated States: AU, CA, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: WATER PURIFIER FOR A SPA (57) Abstract A water purifier includes a housing that contains purification material for purifying the water. The water purifier is placed a flow of circulating water in the spa. The purification material preferably can be a silver-containing material.		

WATER PURIFIER FOR A SPA

Background of the Invention

The invention relates to water purifiers.

5 A spa is a small pool used for bathing or hydrotherapy in which water is heated and circulated. A typical spa has a volume of less than about 1,500 gallons. The spa can include hydrotherapy jet circulation, hot water/cold water mineral baths, air induction bubbles, or combinations thereof. Other common terminology for spas includes hydrotherapy pools, therapeutic pools, whirlpools, hot spas, hydrotherapy spas, or hot tubs.

10 Generally, the water in the spa is not drained, cleaned or refilled for each individual bather. Thus, it often is desirable to have a reliable water purification system for the spa. The water in a spa can be purified, for example, by adding chlorine to kill microorganisms that thrive in the warm water. The spa water is typically filtered as it is circulated.

Summary of the Invention

15 The present invention features a water purifier for purifying water in a spa. In general, the water purifier includes a housing having a diameter of less than 2 inches, an internal volume that is between 30 and 200 cubic centimeters, and openings that permit water to enter and exit the housing. The water purifier contains a purification material within the internal volume of the housing that purifies water in contact with the material.

The preferred housing is cylindrical and has a length less than 8 inches, more preferably less than 7 inches. The internal volume of the housing is preferably between 50 and 150 cubic centimeters.

25 The water purifier preferably includes a support attached to the housing that causes the housing to be retained in a flow of circulating water in the spa. The housing can be supported within the spa filter core or in a recessed area on the underside of the spa skimmer basket located in the circulation system of

the spa. The means for supporting can be a stem, umbrella, t-shaped apparatus, or other arrangement capable of retaining the housing within the spa filter core, or a press fitting for attaching to the underside of the skimmer basket.

5 Preferably, the stem is less than 12 inches long and is removable from the housing. The stem is preferably sectioned to facilitate adjusting the length of the stem (and overall length of the water purifier) for the particular spa filter core. Most preferably, the stem is composed of an upper piece that is 6 inches long and a lower piece that is 5 inches long that fit together via a friction
10 fitting to form a stem that is 10.5 inches long.

 The purification material preferably can be a silver-containing ceramic material, for example, a composition including silver, an aluminum oxide, and zinc.

 The water purifier can provide one or more of the following
15 advantages. Since the water purifier can be directly inserted into the core of the spa filter or attached to the underside of the skimmer basket of the spa, the water purifier can be used without modification of the plumbing system of the spa. When installed properly in the core of the spa filter, the preferred water purifier exerts little or no back-pressure on the filter as water is circulated. The
20 water purifier can be used in spas regardless of water flow rate.

 In addition, when the purification material is a silver-containing material, the water can be effectively purified using oxidizing agents other than chlorine alone (e.g., potassium peroxymonosulfate, ozone, or a combination thereof). The purification material and water purifier are not
25 adversely affected by the heat of the water in the spa.

 The water purifier is suitable for purifying water in spas having volumes of less than about 1,500 gallons. It is preferred that the water purifier receive filtered water.

The term "circulated," as used herein, means continuous flow of the water to expose the water to the water purifier, for example, as it is pumped through a filter. The circulated water passes through the skimmer of the spa and the spa filter core.

5 Other advantages and features of the invention will be apparent from the description of the preferred embodiment, and from the claims.

Brief Description of the Drawings

FIG. 1 is a perspective view of a water purifier.

FIG. 2 is a side plan view of the water purifier.

10 FIG. 3 is a side plan view of the water purifier, perpendicular to that shown in FIG. 2.

FIG. 4 is a side plan view of a second water purifier.

FIG. 5 is an end view of one end of the water purifier.

FIG. 6 is an end view of the other end of the water purifier.

15 FIG. 7 is a view of a spa filter core including the water purifier.

FIG. 8 is a view of a second spa filter core including the water purifier.

FIG. 9 is a view of a spa filter core including a third water purifier.

FIG. 10 is a view of a third spa filter core including the water purifier.

20 FIG. 11 is a view of a skimmer basket including the second water purifier.

Detailed Description

Referring to FIGS. 1-4, water purifier 10 has a housing 12 that is cylindrical and has a diameter of 1.25 inches and a length of 6.5 inches. Housing 12 has an internal volume of about 70 cubic centimeters for
25 containing the purification material. Housing 12 has openings 30 that permit water to enter and exit the housing and the internal volume. When water enters and exits the housing, the water contacts the surface of the purification material. Support stem 14 is attached to one end of housing 12 which causes

housing 12 to be retained within a spa filter core once the water purifier is placed in the filter core. Water purifier 10 generally can be made of a plastic or other suitable material, like PVC, polyethylene, polyacetal, polypropylene, glass filled polypropylene, talc filled polypropylene, or other moldable plastics. Suitable plastics have good chemical resistance (e.g., toward oxidation), good heat resistance (e.g., up to about 110°F), and good bending strength. The preferred water purifier 10 can withstand flow rates of 175 gallons per minute in a spa filter core at 110°F.

Referring to FIGS. 1-3, support stem 14 is composed of upper stem 16 and lower stem 18 which are removably attached by a friction fitting at the end of upper stem 16. Support stem 14 is 10.5 inches long, although the length of the stem can be adjusted. Lower stem 18 can be removed from the structure to adjust the position of water purifier 10 in the spa filter core. Alternatively, the length of support stem 14 can be adjusted by cutting off a portion of the stem at a serrated section 19 along the length of support stem 14. It is preferred that the stem material be brittle enough to allow the length to be adjusted by breaking at the serrations.

Referring to FIG. 4, an alternate water purifier 10 has a friction fitting 28 that attaches to the underside of a skimmer basket located on an end of housing 12.

Referring to FIGS. 1-6, housing 12 has top 20 which includes loop 22. Loop 22 simplifies retrieval of water purifier 10 from the core of the spa filter by providing an accessible area to grasp or hook. Housing 12 also has bottom 24 which includes knob 26. Knob 26 provides a location for removably-attaching support stem 14 to housing 12 by way of a friction fitting. Removable-attachment of support stem 14 to housing 12 permits the housing containing the purification material alone to be placed in more confined locations of the spa water to purify the water.

Referring to FIGS. 7-11, water purifier 10 is supported in a flow of circulating water in the spa within spa filter core 40 or on the underside of a skimmer basket 50. Water is circulated through filter core 40 or skimmer basket 50 and contacts water purifier 10. In contacting water purifier 10, the
5 water is exposed to purification material contained within housing 12.

In open top spa filter cores, as shown in FIGS. 7-9, water purifier 10 is installed by passing water purifier 10 through filter opening 42 in the top of filter core 40. Water purifier 10 is retained within filter core 40 by resting on support stem 14 which extends into pipe 44 at the base of filter core 40. The
10 length of support stem 14 is sufficient to suspend the housing at least 1 inch above the bottom of filter core 40. As mentioned above, the length of support stem 14 can be adjusted accordingly.

Referring to FIG. 8, filter core 40 can contain stand pipe 46 running the length filter core 40 and extending into pipe 44. Water purifier 10 can be
15 placed within standpipe 46 in this filter configuration.

Referring to FIG. 9, an alternate water purifier 10 has a support 50 attached to the top of water purifier 10 that retains the water purifier within filter core 40 by suspending it from the top of the filter core. The support 50 has an expanding section 52 that has a width that is greater than the diameter
20 of filter opening 42. Support 50 can be attached at either end of housing 12 to loop 22 by, for example, a hook or knob 26 by, for example, a friction fitting.

Referring to FIG. 10, water purifier 10 can be used in closed top spa filter systems. In a closed top system, water purifier 10 is inserted from the bottom and is positioned to rest on a shelf on the inside of filter core 40. Since
25 support stem 14 does not extend into pipe 44 in this filter system, stem 14 is shortened (e.g. upper section 16 is used alone) to retain water purifier 10 in the proper position in filter core 40.

Referring to FIG. 11, an alternative water purifier 10 can be attached to skimmer basket 50 by inserting friction fitting 28 into recess 52 located on the underside of skimmer basket 50. Skimmer basket 50 and water purifier 10 is placed in the spa skimmer where water purifier 10 is exposed to the flow of
5 circulating water in the spa.

The preferred purification materials are described, for example, in U.S. Pat. No. 5,352,369 and in U.S. Ser. No. 08/628,405, entitled "Self-Regulating Water Purification Composition" and filed April 5, 1996, which are incorporated herein by reference. Examples of these purification materials
10 include silver metal on a support. The support can be a ceramic and can include an inorganic oxide, e.g., an aluminum oxide. The silver can be chemically deposited on the ceramic support or dispersed as a powder, shavings, or turnings with the ceramic support. The preferred silver content of the purification material is between 0.1 and 10 weight percent. The
15 purification material can include a second metal, preferably zinc, copper, aluminum, iron, or manganese, most preferably, zinc.

The purification material is preferably formed into particles larger than the individual openings 30 in the water purifier, e.g., as pellets or as a monolithic foam, so that the material is adequately contained within housing
20 12. Alternatively, the purification material can be contained in a porous container, for example, a mesh bag.

It is preferred that the purification material be used in the presence of oxidizing agents dissolved in the water, such as, for example, ozone, low levels of chlorine (less than about 1 ppm), or potassium peroxymonosulfate
25 (less than about 30 ppm), or combinations thereof.

In addition to acting as an anti-microbial agent, the purification material can effectively remove metal ions, such as mercury, lead, cadmium, iron, manganese, copper, nickel, chromium, barium, and arsenate, particularly

when the purification material includes silver, an inorganic oxide such as alumina, and zinc. When zinc is included in the purification material, zinc ions can be released into the water which enhance disinfection of the water and provide algaestatic properties.

5 Other embodiments are within the claims.

1. A method of purifying water in a spa, comprising the steps of:
providing a water purifier having a housing containing a
5 purification material that kills bacteria in water and having openings that
permit water to enter and exit said housing within a flow of water in
said spa;

circulating water from said spa over said water purifier;

10 exposing said purification material contained in said housing to
said circulated water; and

using a support attached to said housing, retaining and
supporting said housing in the flow of said circulated water either (i)
within the core of a filter contained in the spa or (ii) by attaching the
housing to the underside of a skimmer basket contained in the spa.

15 2. A method of purifying circulating water in a vessel selected
from the group consisting of pools, spas, and hot tubs and
having a filter with a core having a diameter, comprising:

- 20 a. placing in the core of the filter a purification material,
contained in a housing of diameter substantially equal to
the diameter of the core, that kills bacteria in water; and
b. exposing the purification material to the circulating
water.

25 3. A method of purifying water in a vessel selected from the group
consisting of pools, spas, and hot tubs, comprising:

- a. pumping the water to circulate it in the vessel;

- 5 b. providing a housing having a plurality of openings and
 containing purification material being formed into
 particles either larger than each of the plurality of
 openings or contained in a porous container within the
 housing;
- 10 c. installing the housing in the vessel so that the housing is
 either (i) positioned within the core of a filter contained
 in the vessel or (ii) attached to the underside of a
 skimmer basket contained in the vessel; and
- d. contacting the water with the surface of the purification
 material by circulating the water within the housing.
- 15 4. The method of claim 1, wherein said water purifier is supported
 in a manner causing said water purifier to be retained within a
 spa filter core.
- 20 5. The method of claim 1, further comprising the step of dissolving
 an oxidizing agent in said water, wherein said purification
 material includes silver and a ceramic.
6. The method of claim 5, wherein said oxidizing agent comprises
 ozone, a low level of chlorine, or potassium peroxymonosulfate.
- 25 7. A method according to claim 3 further comprising dissolving an
 oxidizing agent in the water.


8. A method according to claim 7 in which (i) the step of installing the housing in the vessel comprises positioning the housing within the core of a filter contained in the vessel, (ii) the purification material comprises zinc, and (iii) the step of contacting the water with the surface of the purification material causes release of zinc ions.

9. A device for purifying circulated water contained in a vessel selected from the group consisting of pools, spas, and hot tubs, the device comprising:

- a. a housing containing a purification material that kills bacteria in water and having openings that permit water to enter and exit said housing within a flow of water in said spa; and
- b. means, comprising a support attached to the housing, for retaining and supporting the housing in the flow of the circulated water either (i) within the core of a filter contained in the vessel or (ii) by attaching the housing to the underside of a skimmer basket contained in the vessel.

AMENDED SHEET

1/5

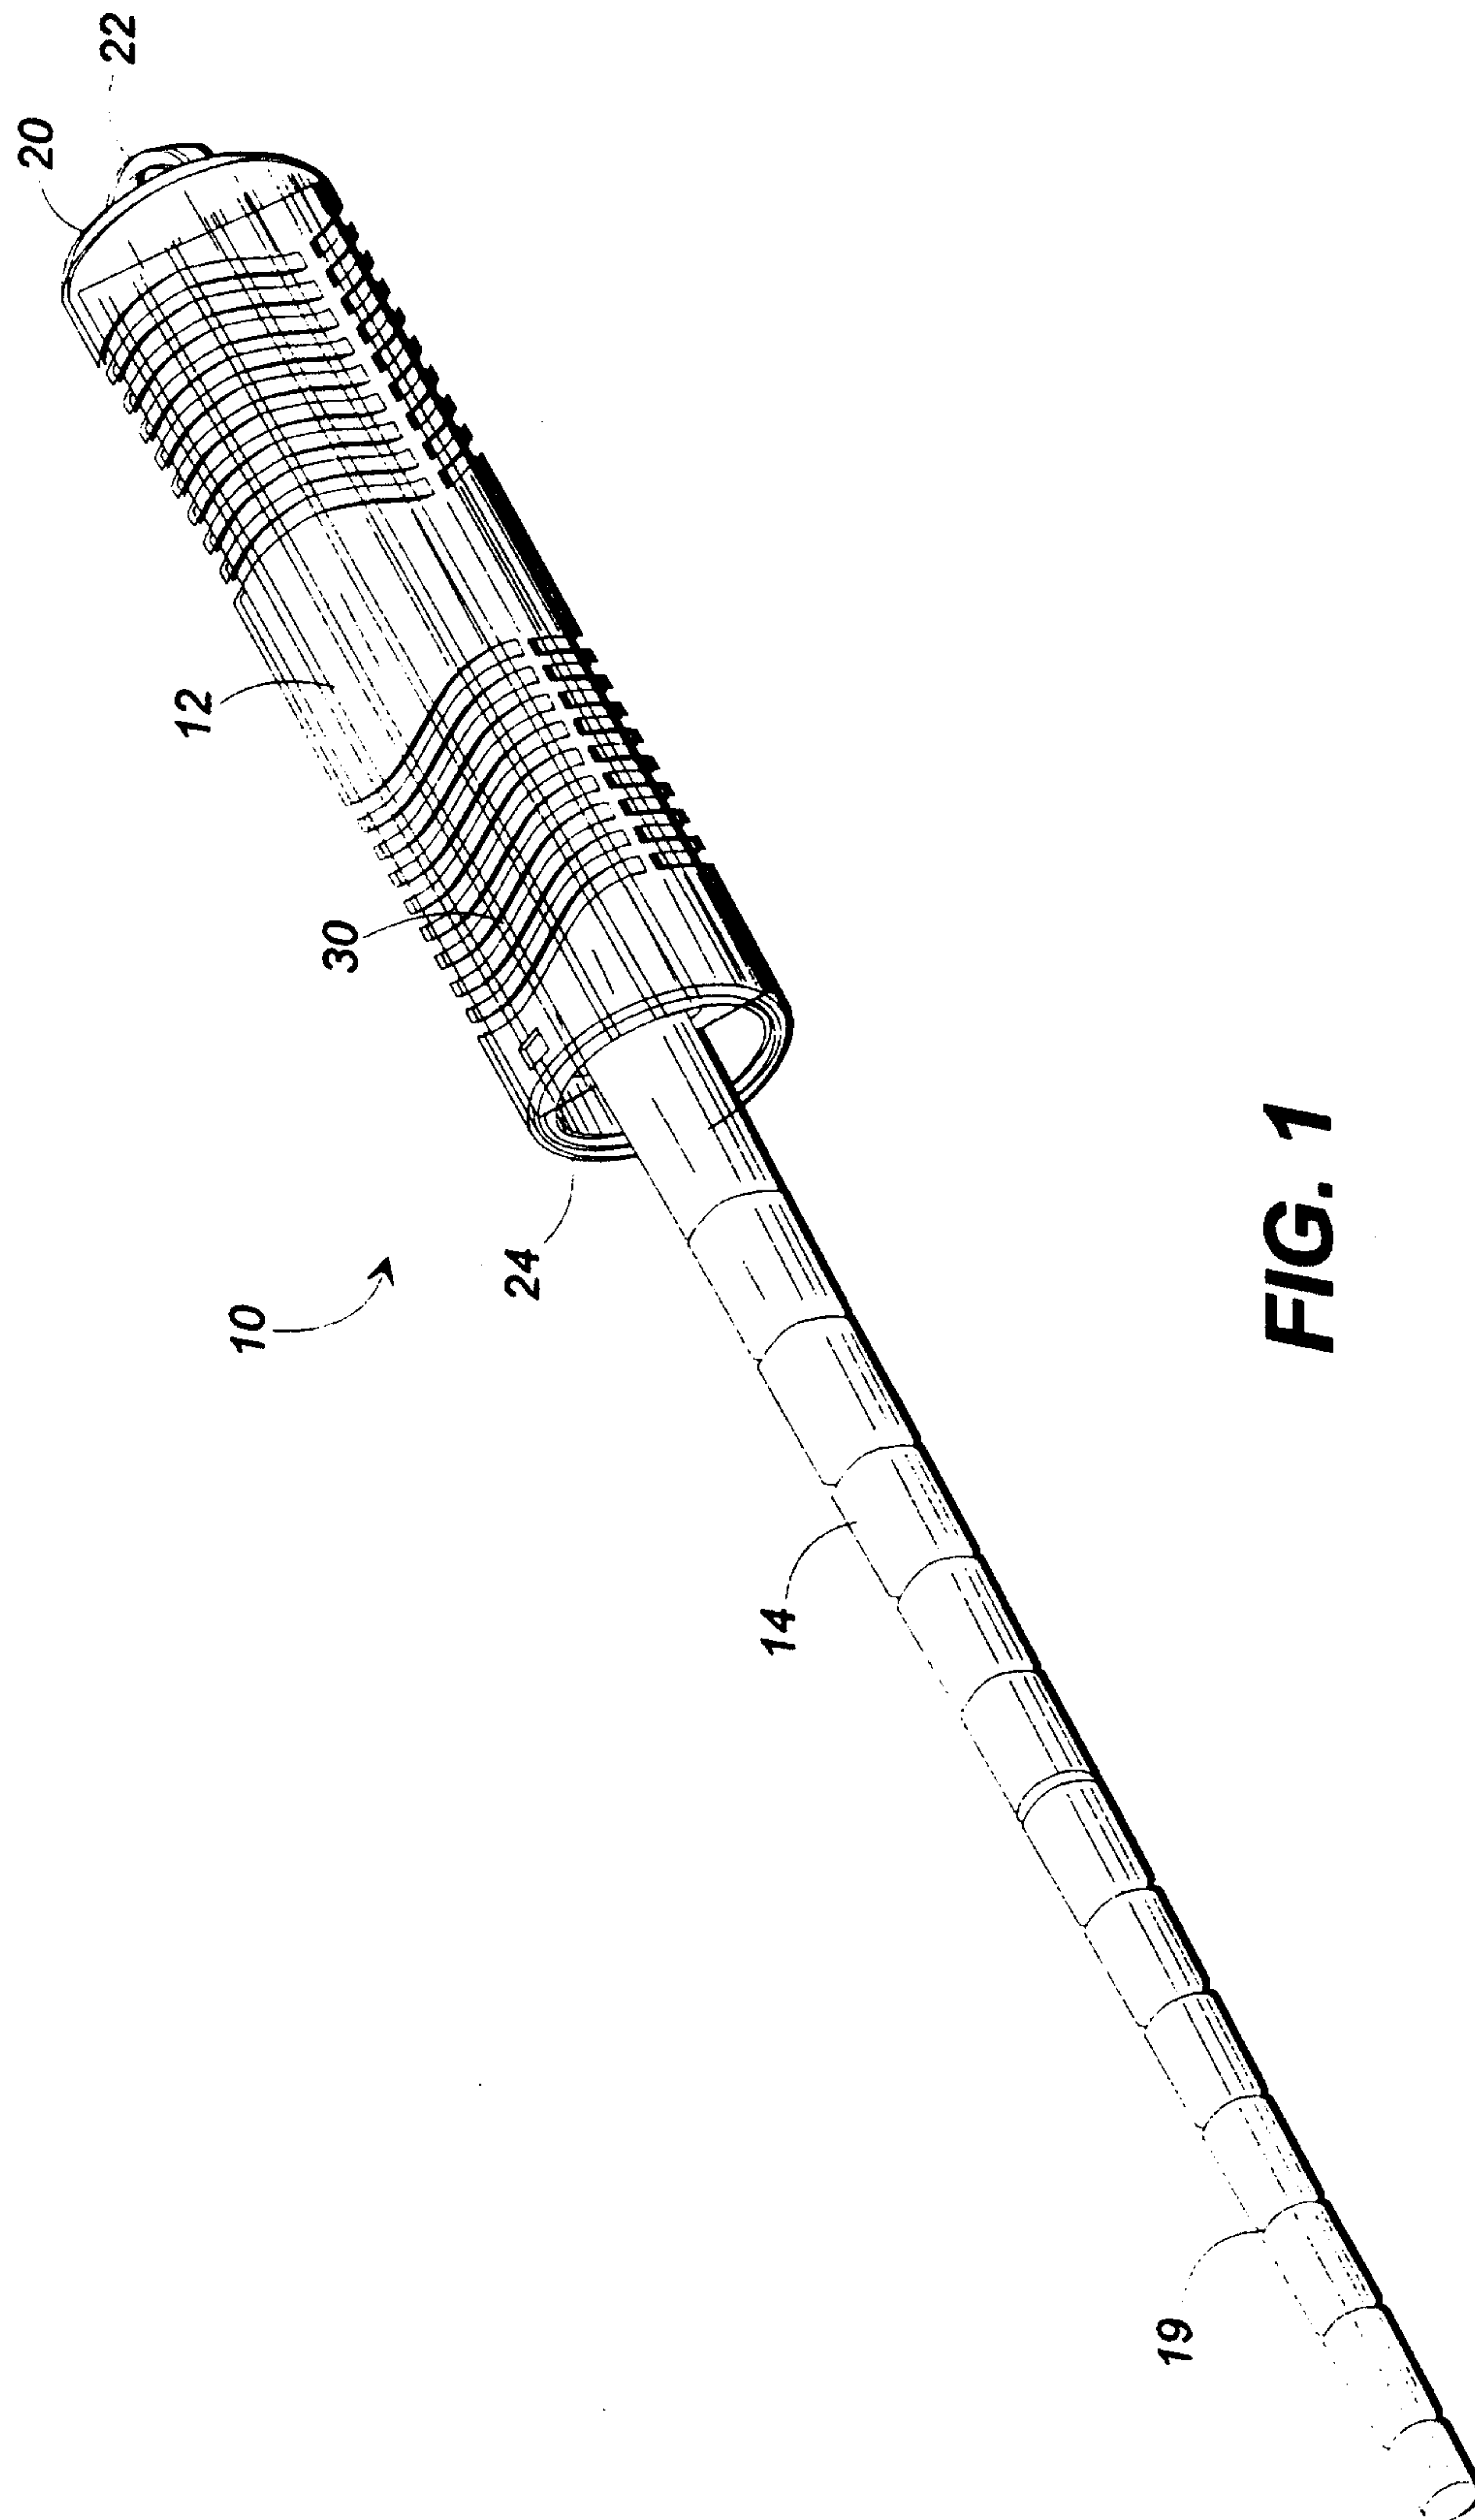**FIG. 1**

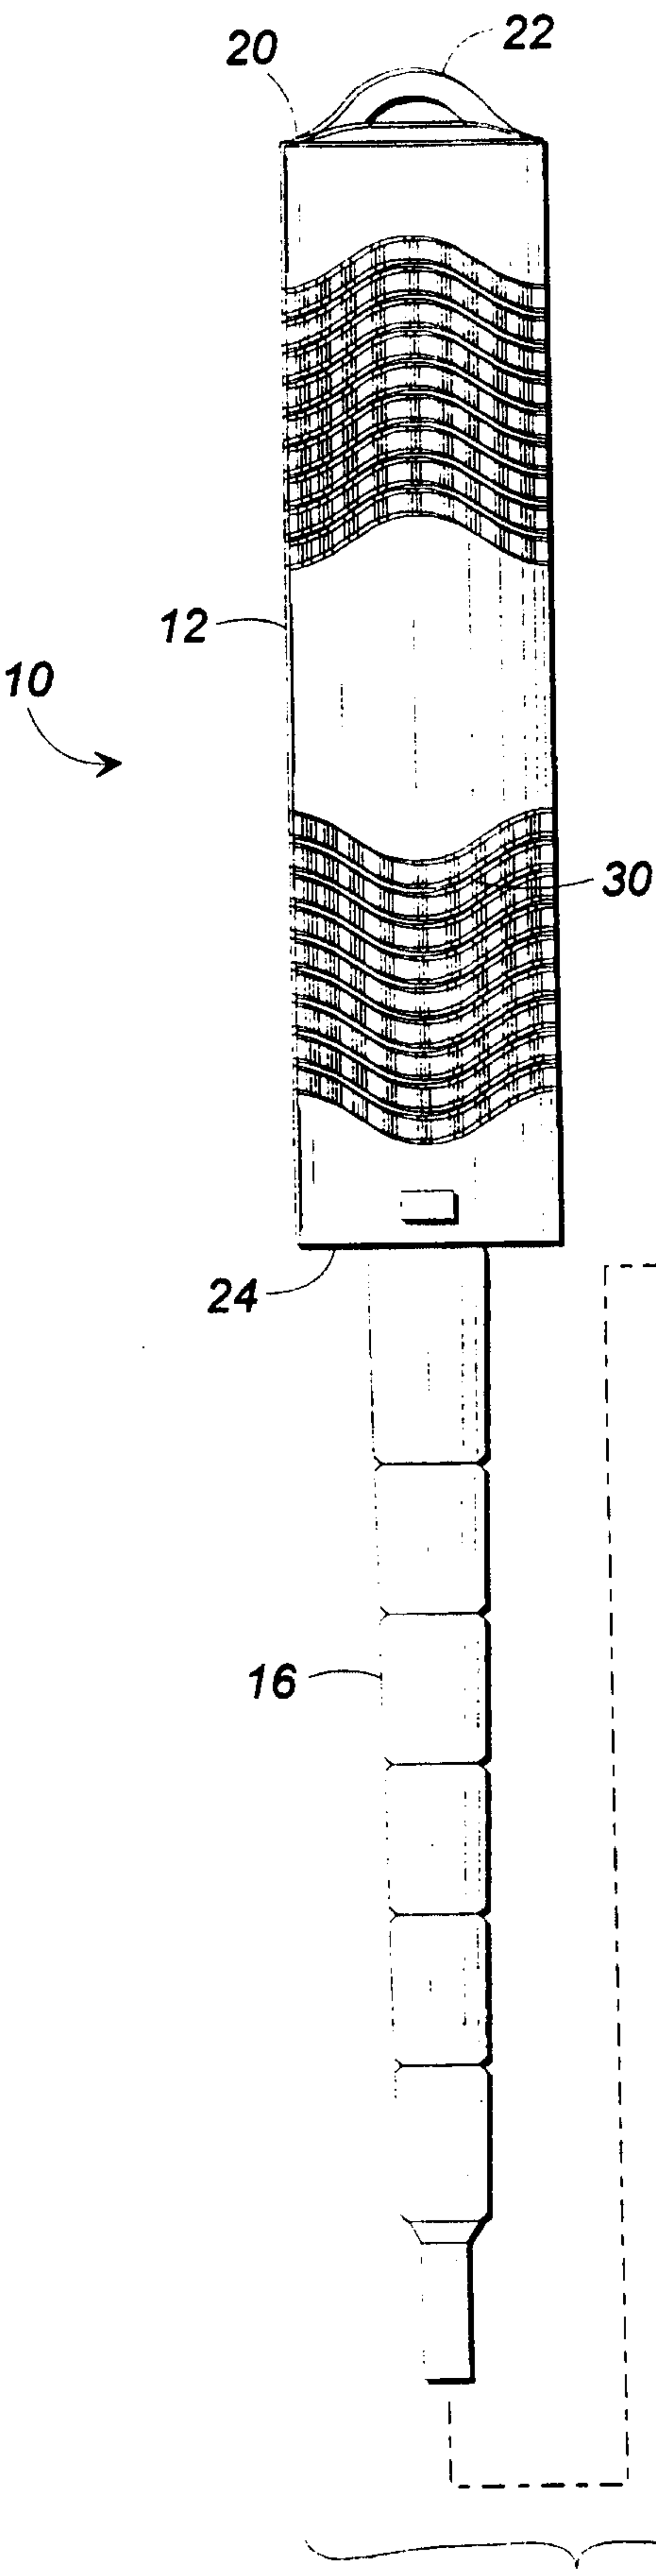


FIG. 2

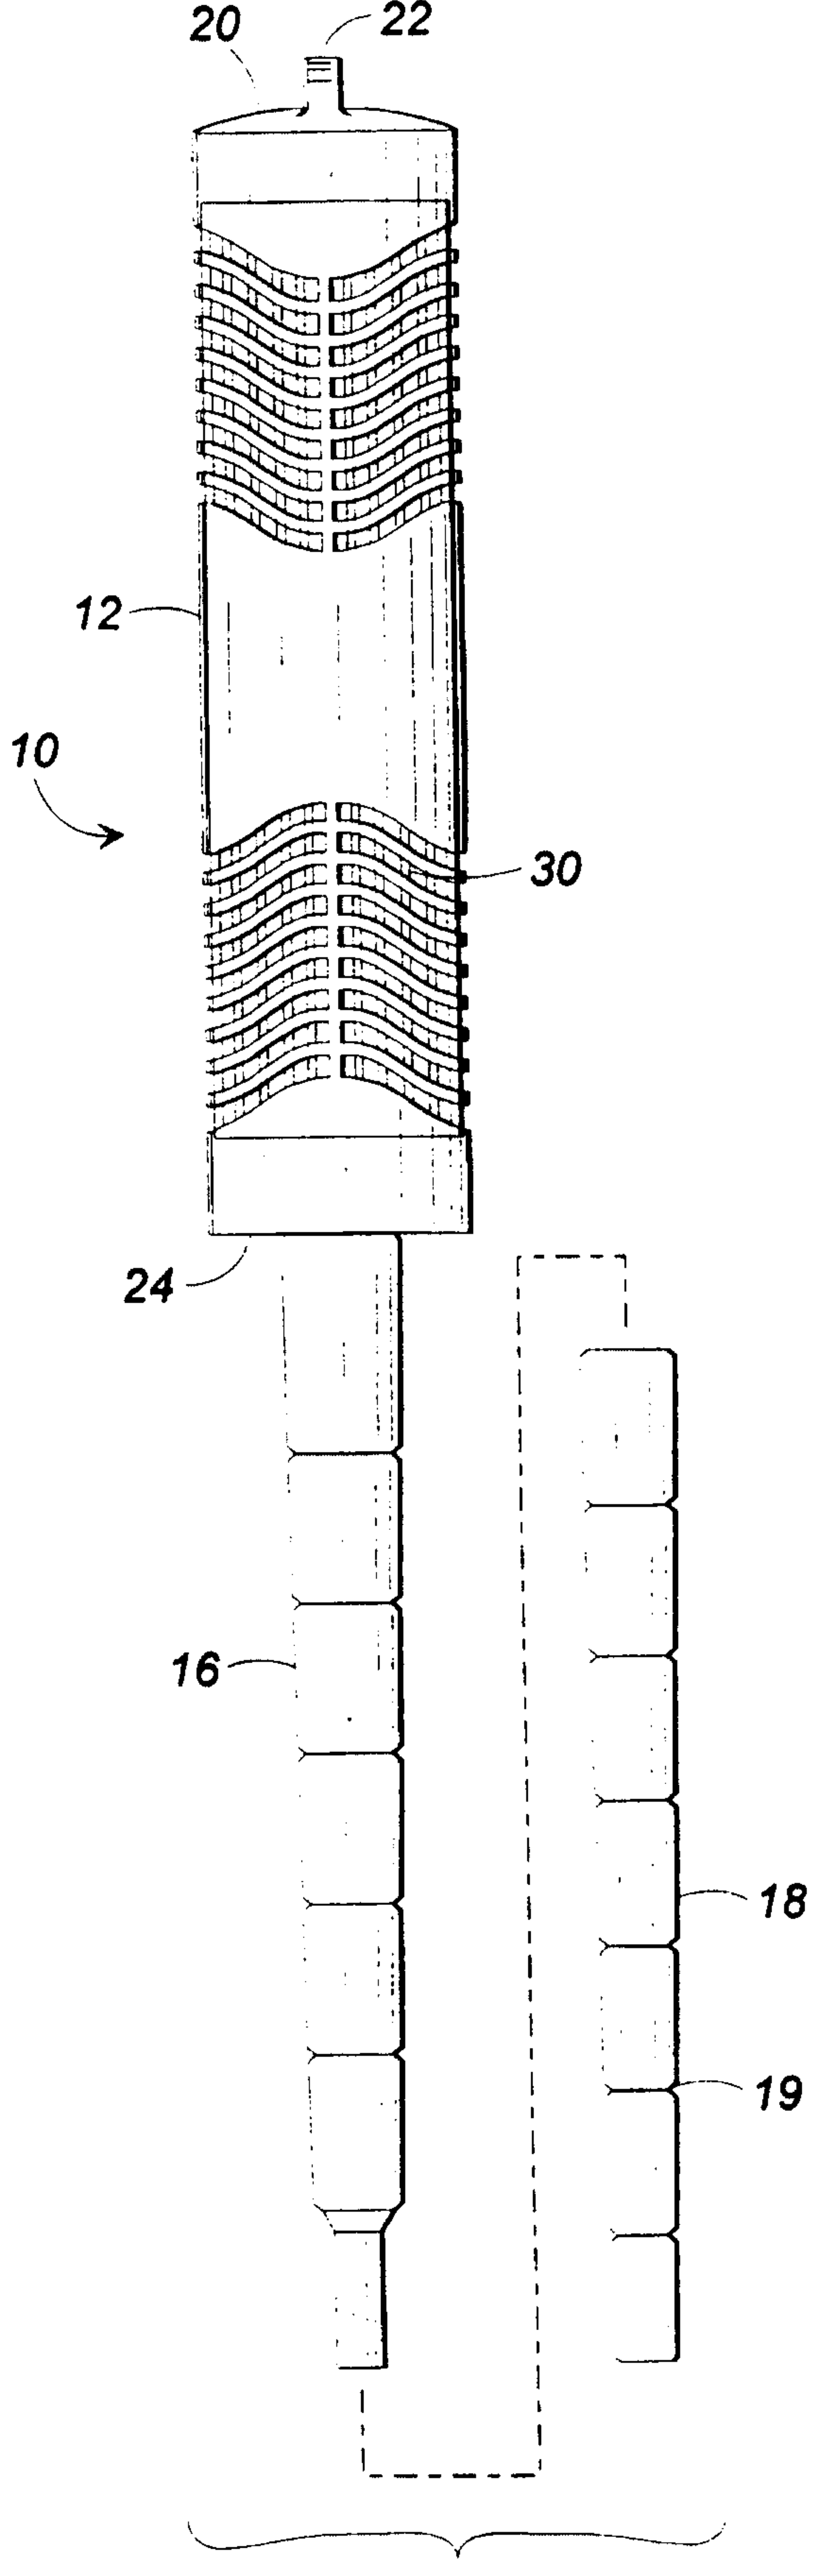
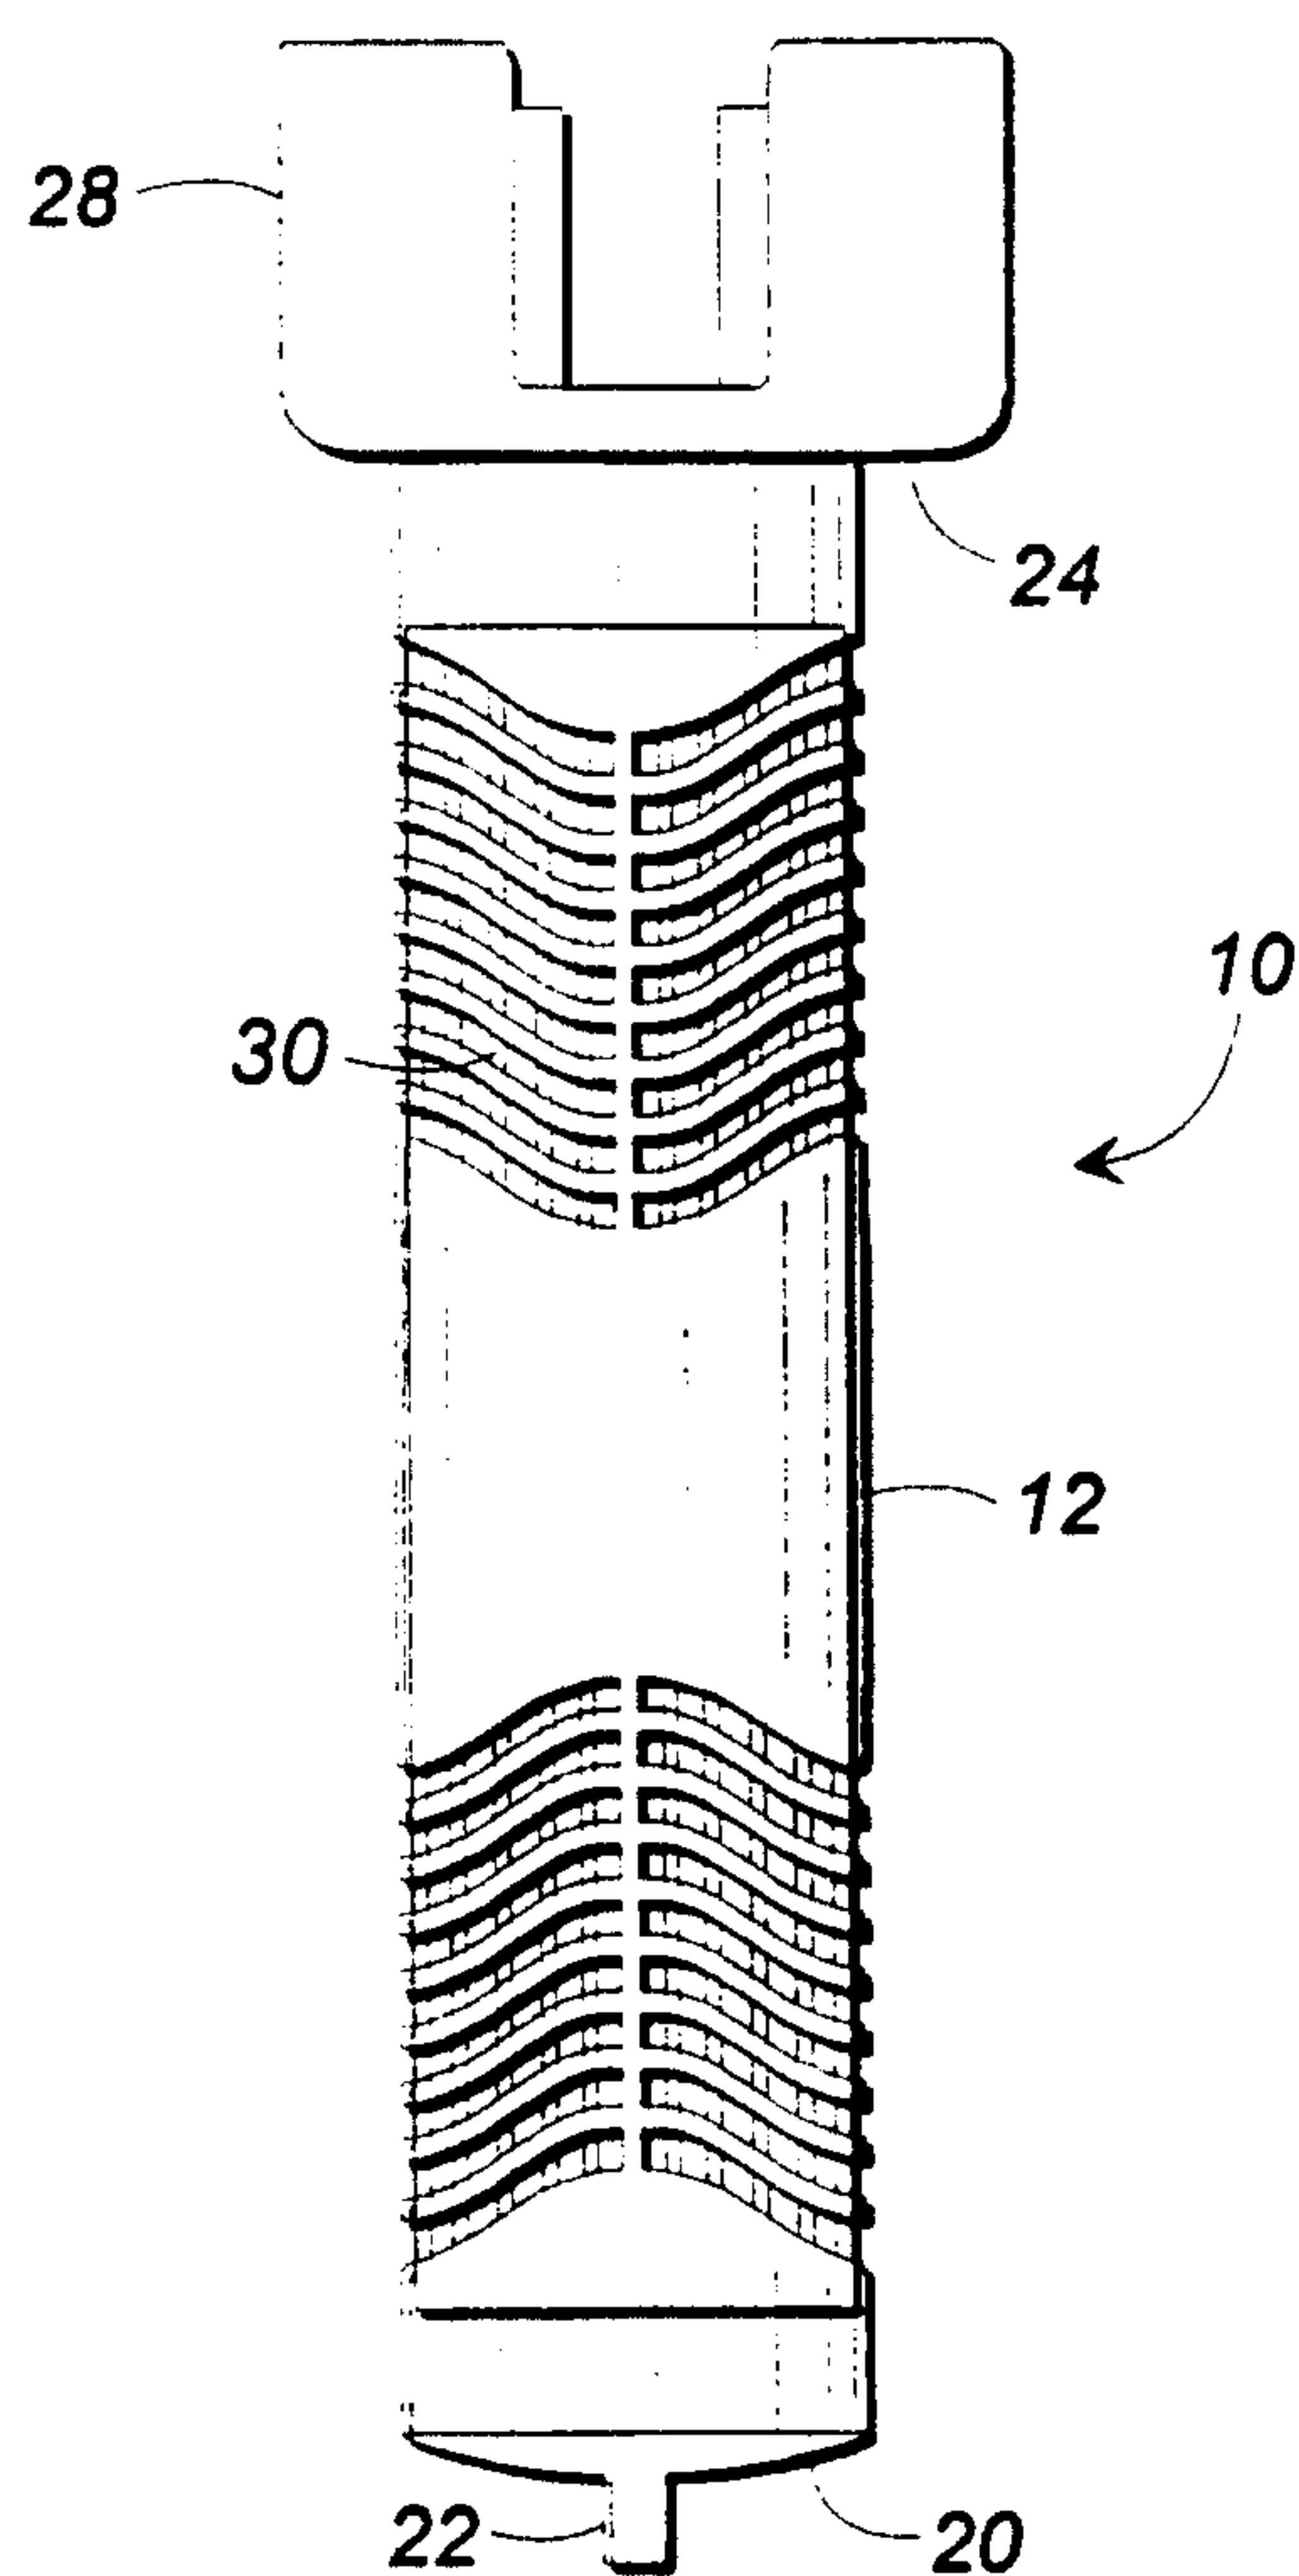
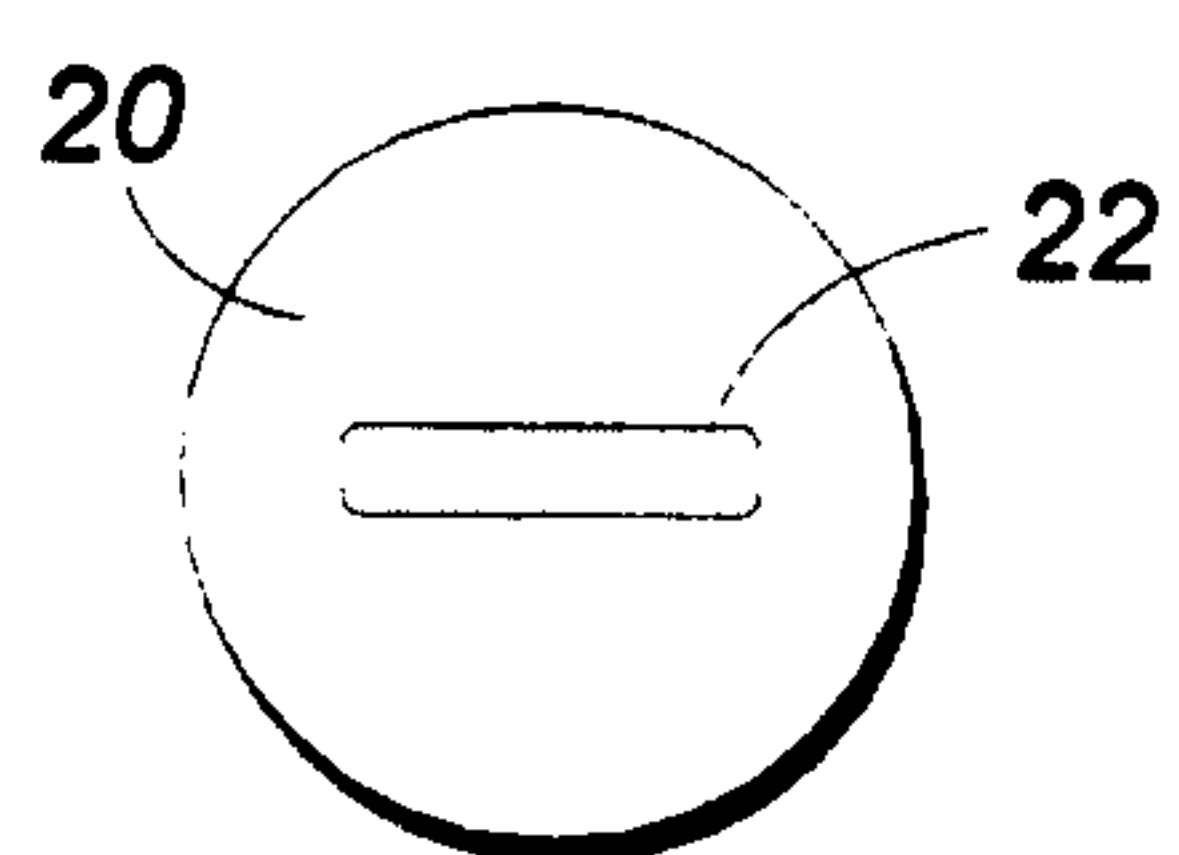
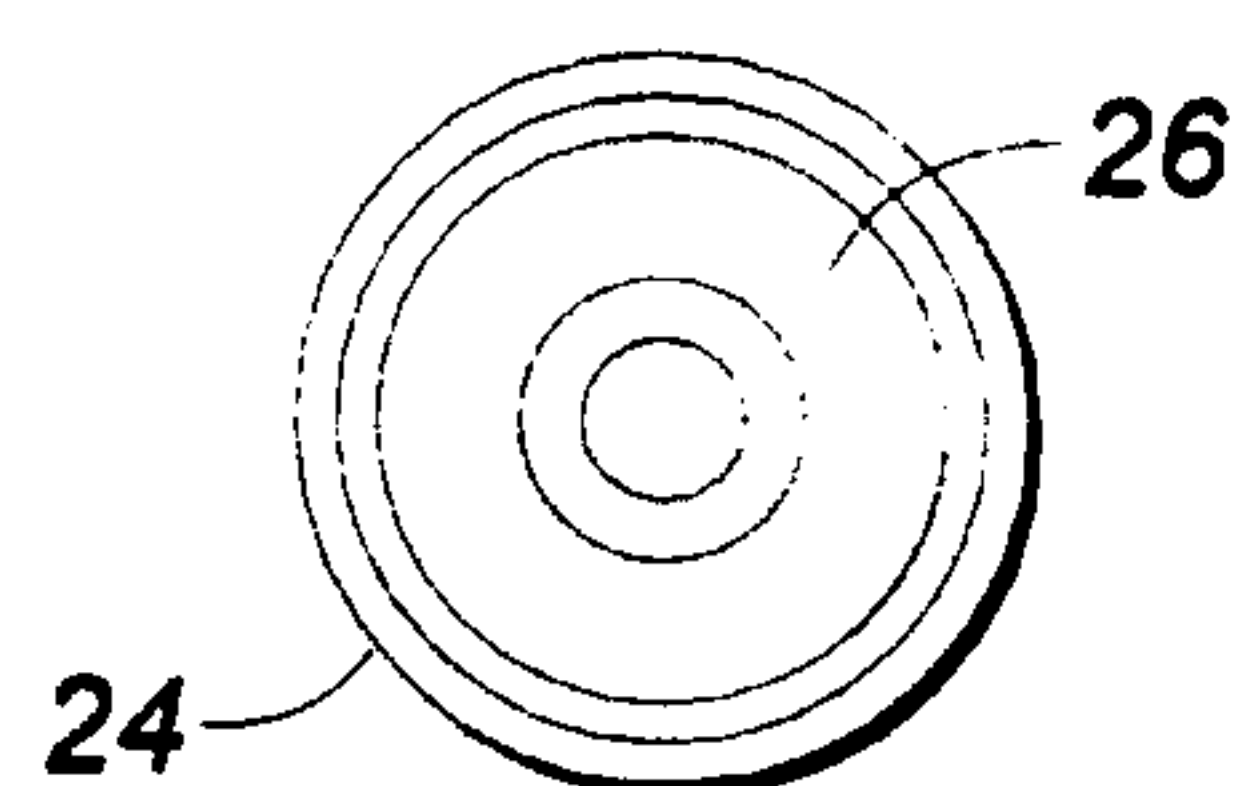


FIG. 3

3/5

**FIG. 4****FIG. 6****FIG. 5**

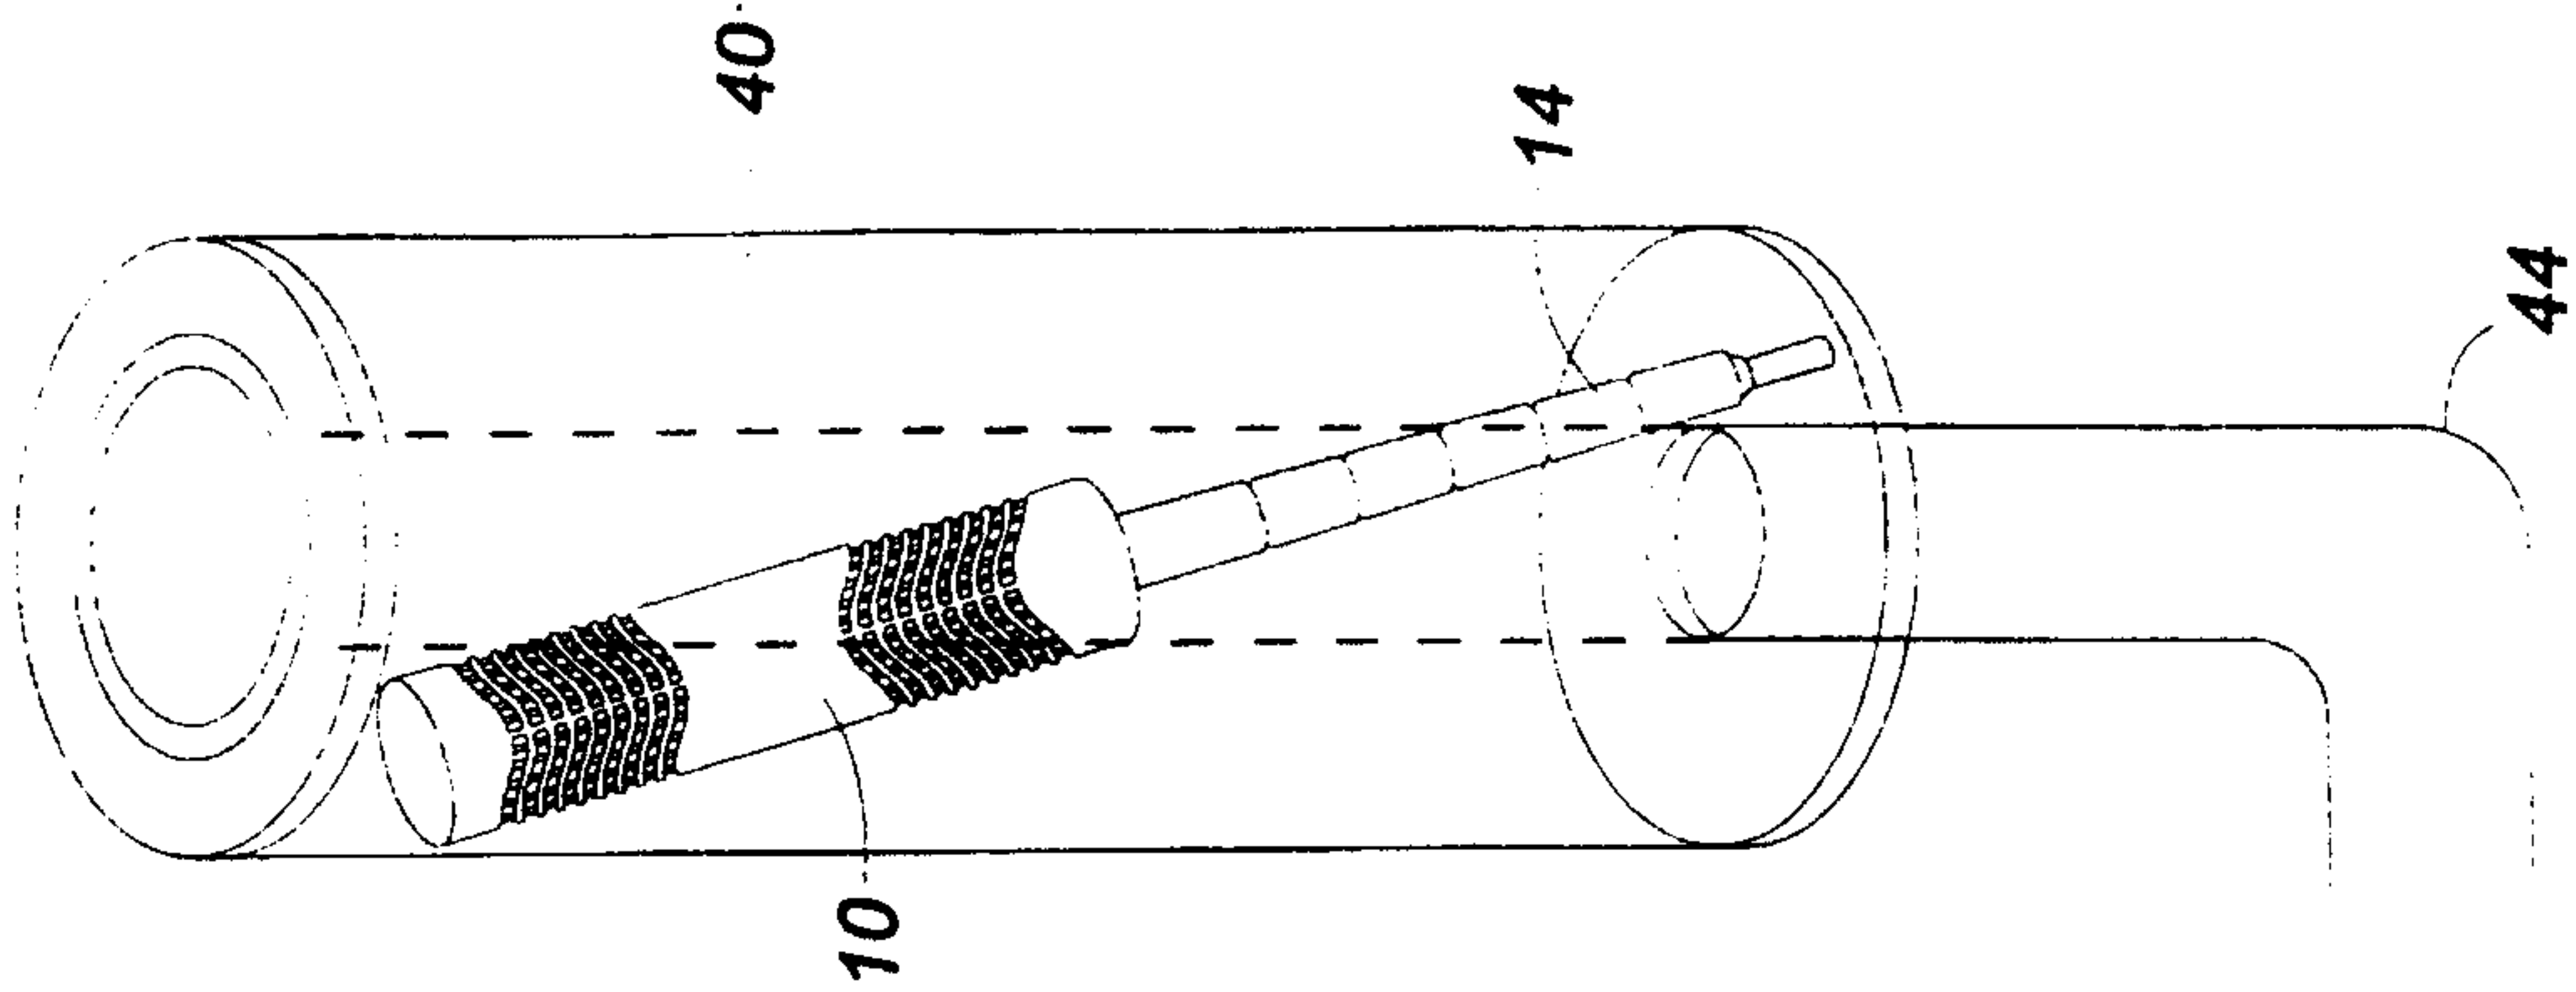


FIG. 7

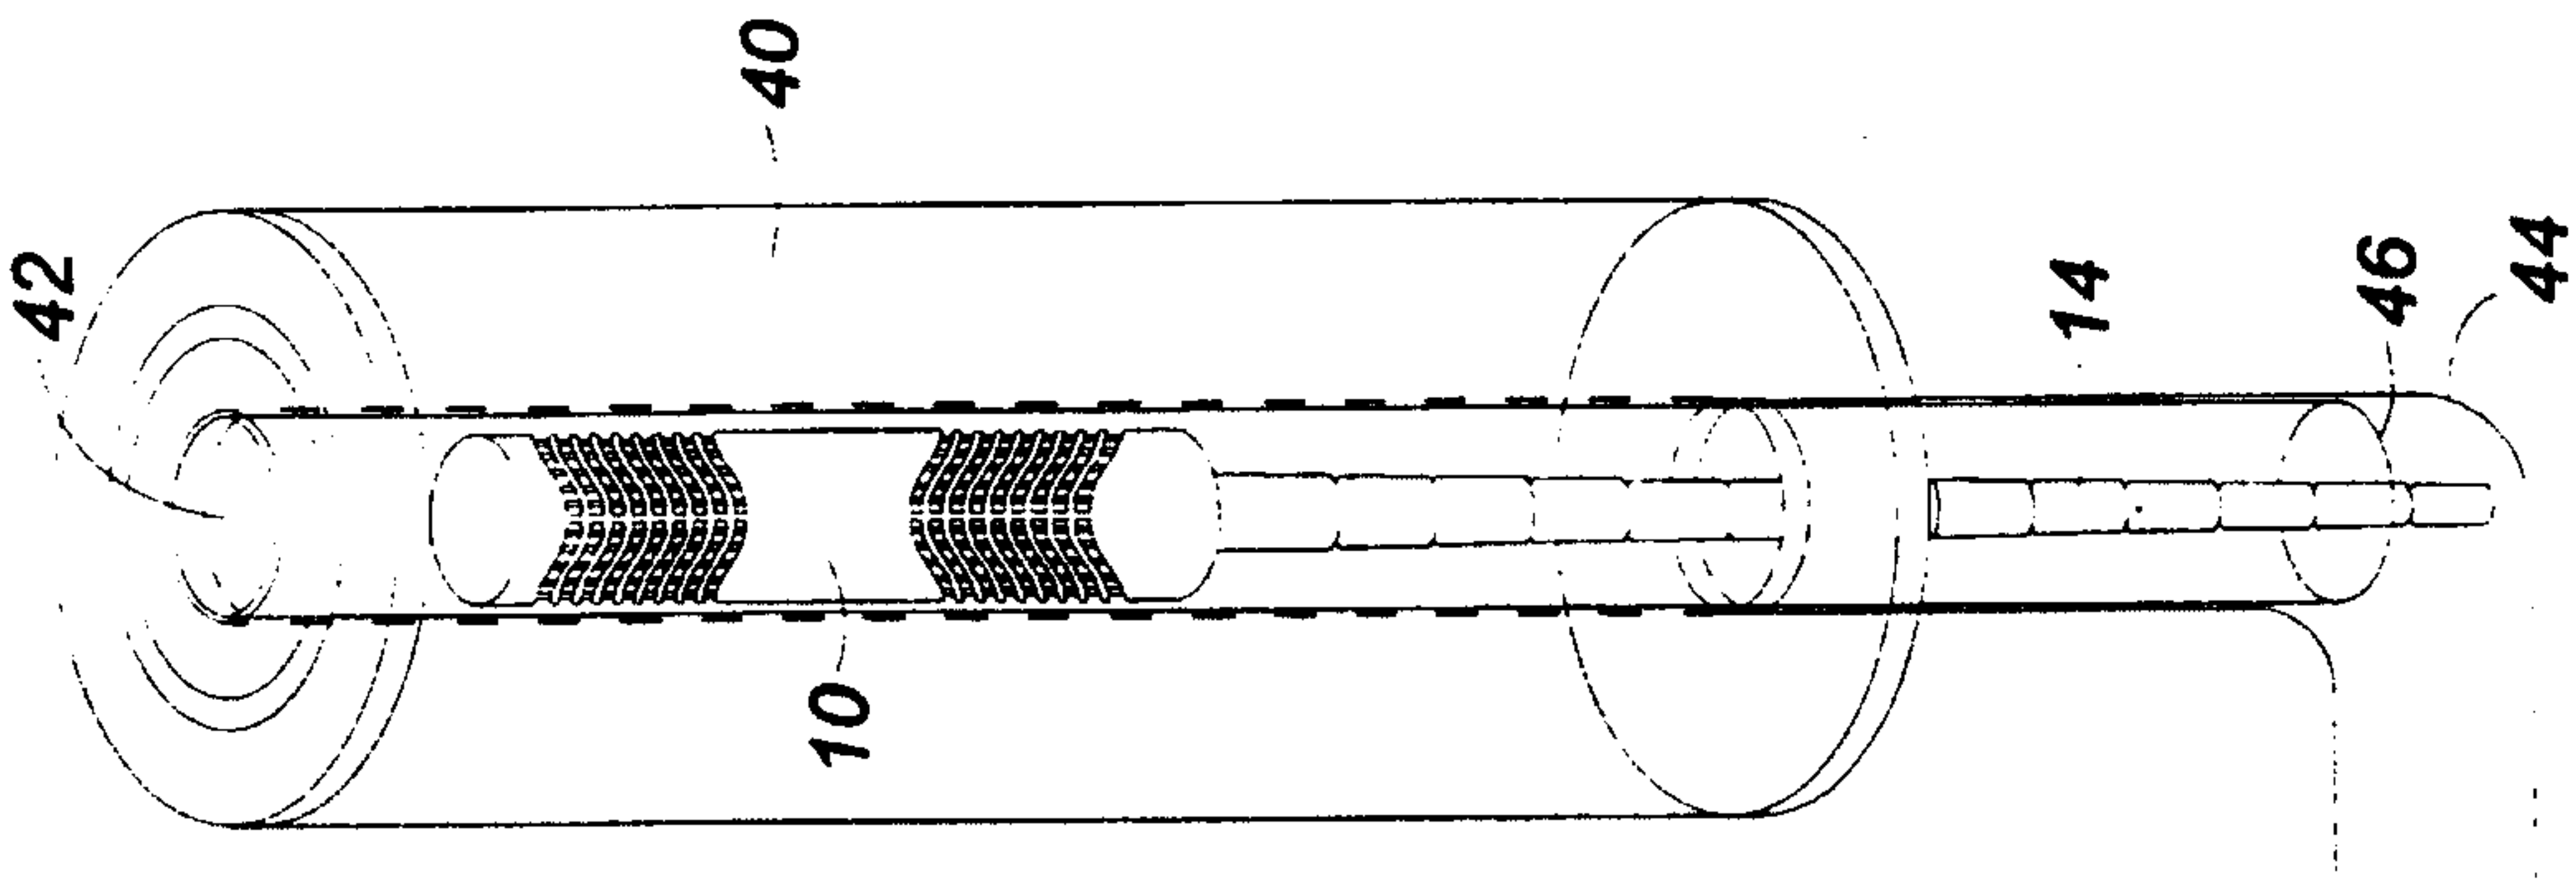


FIG. 8

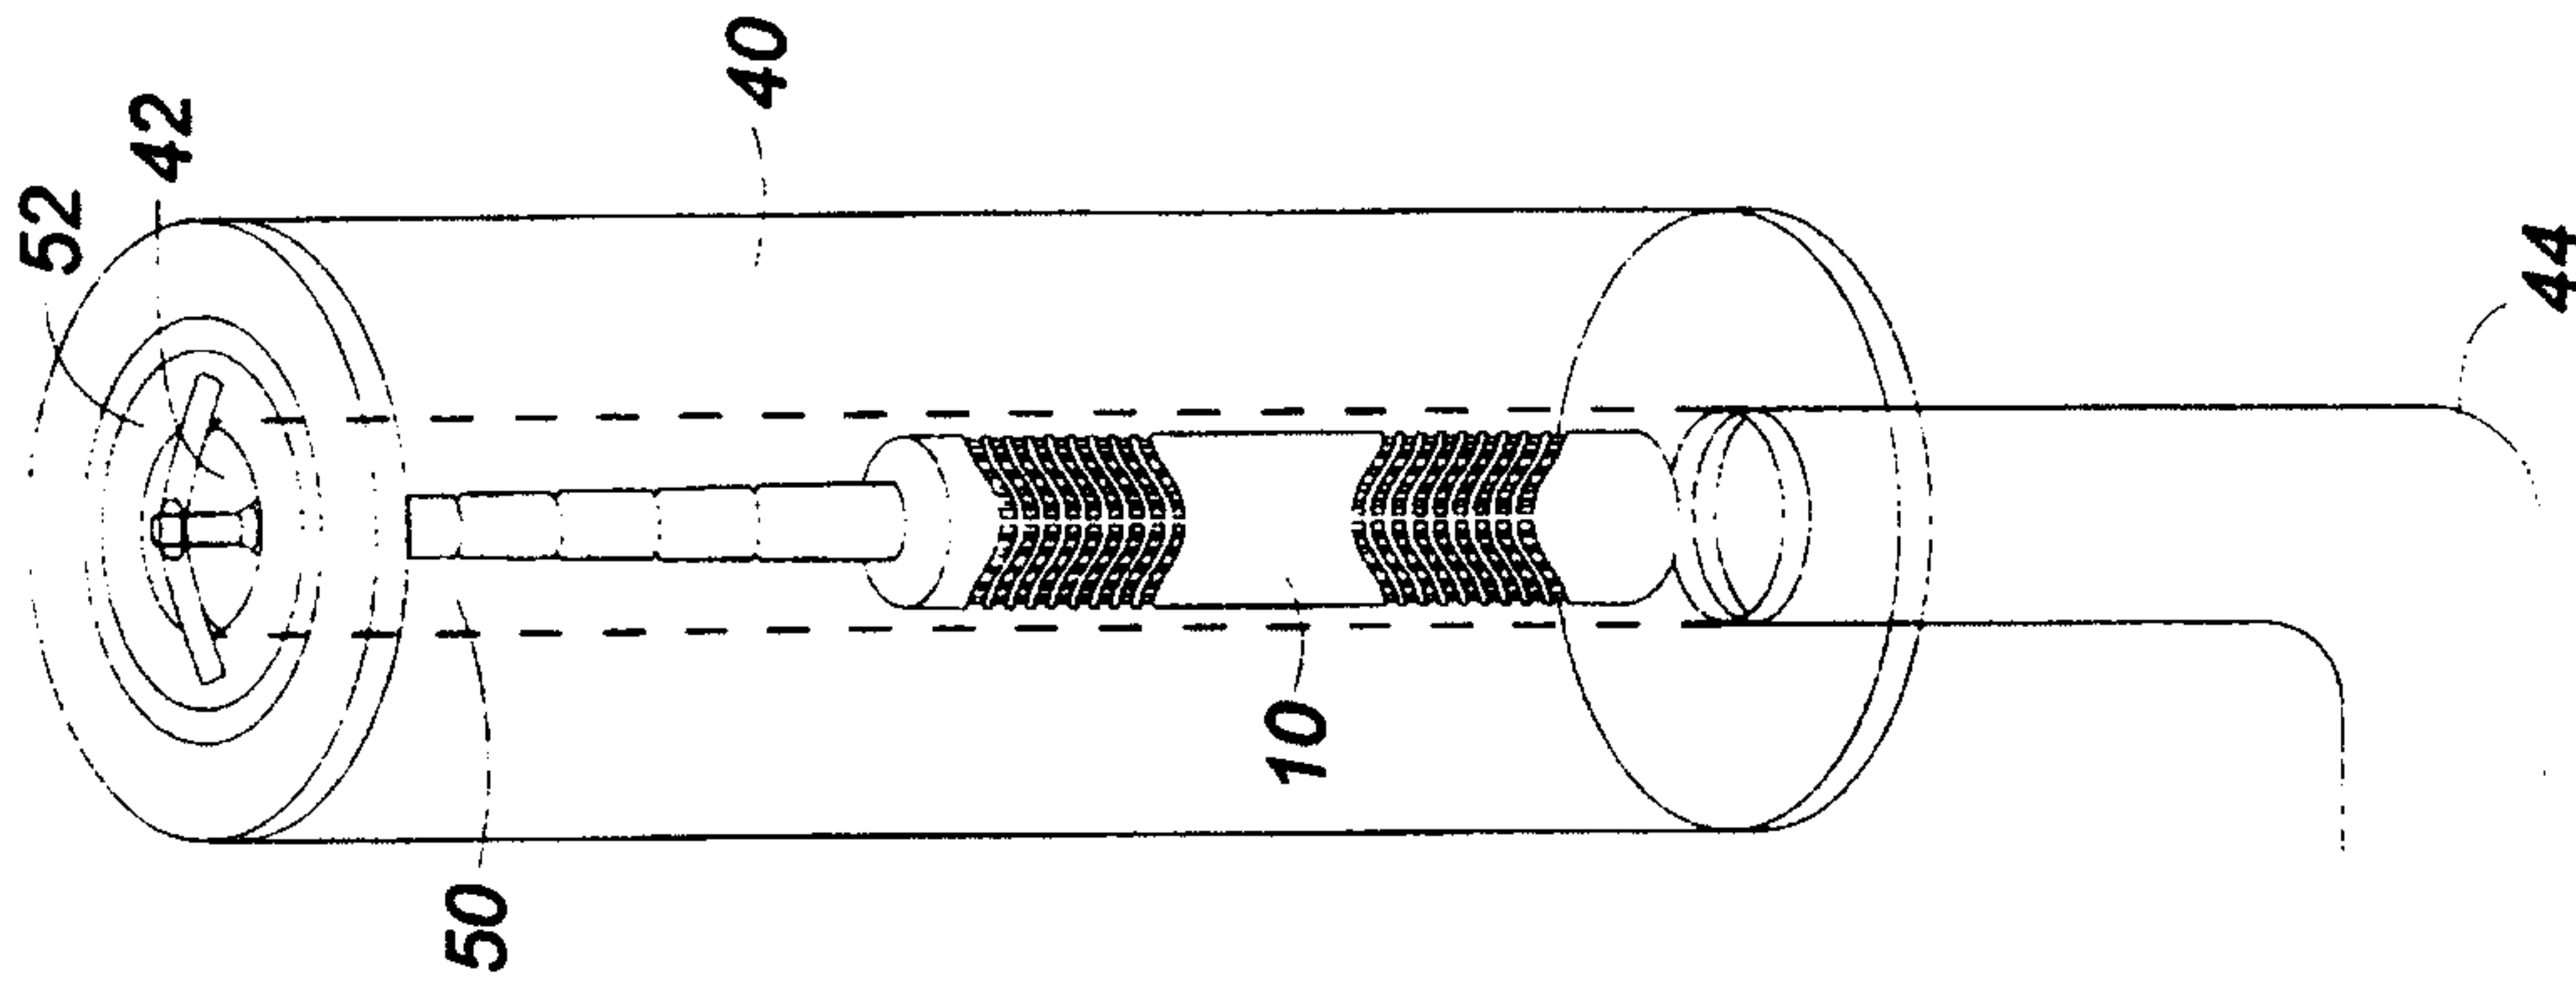


FIG. 9


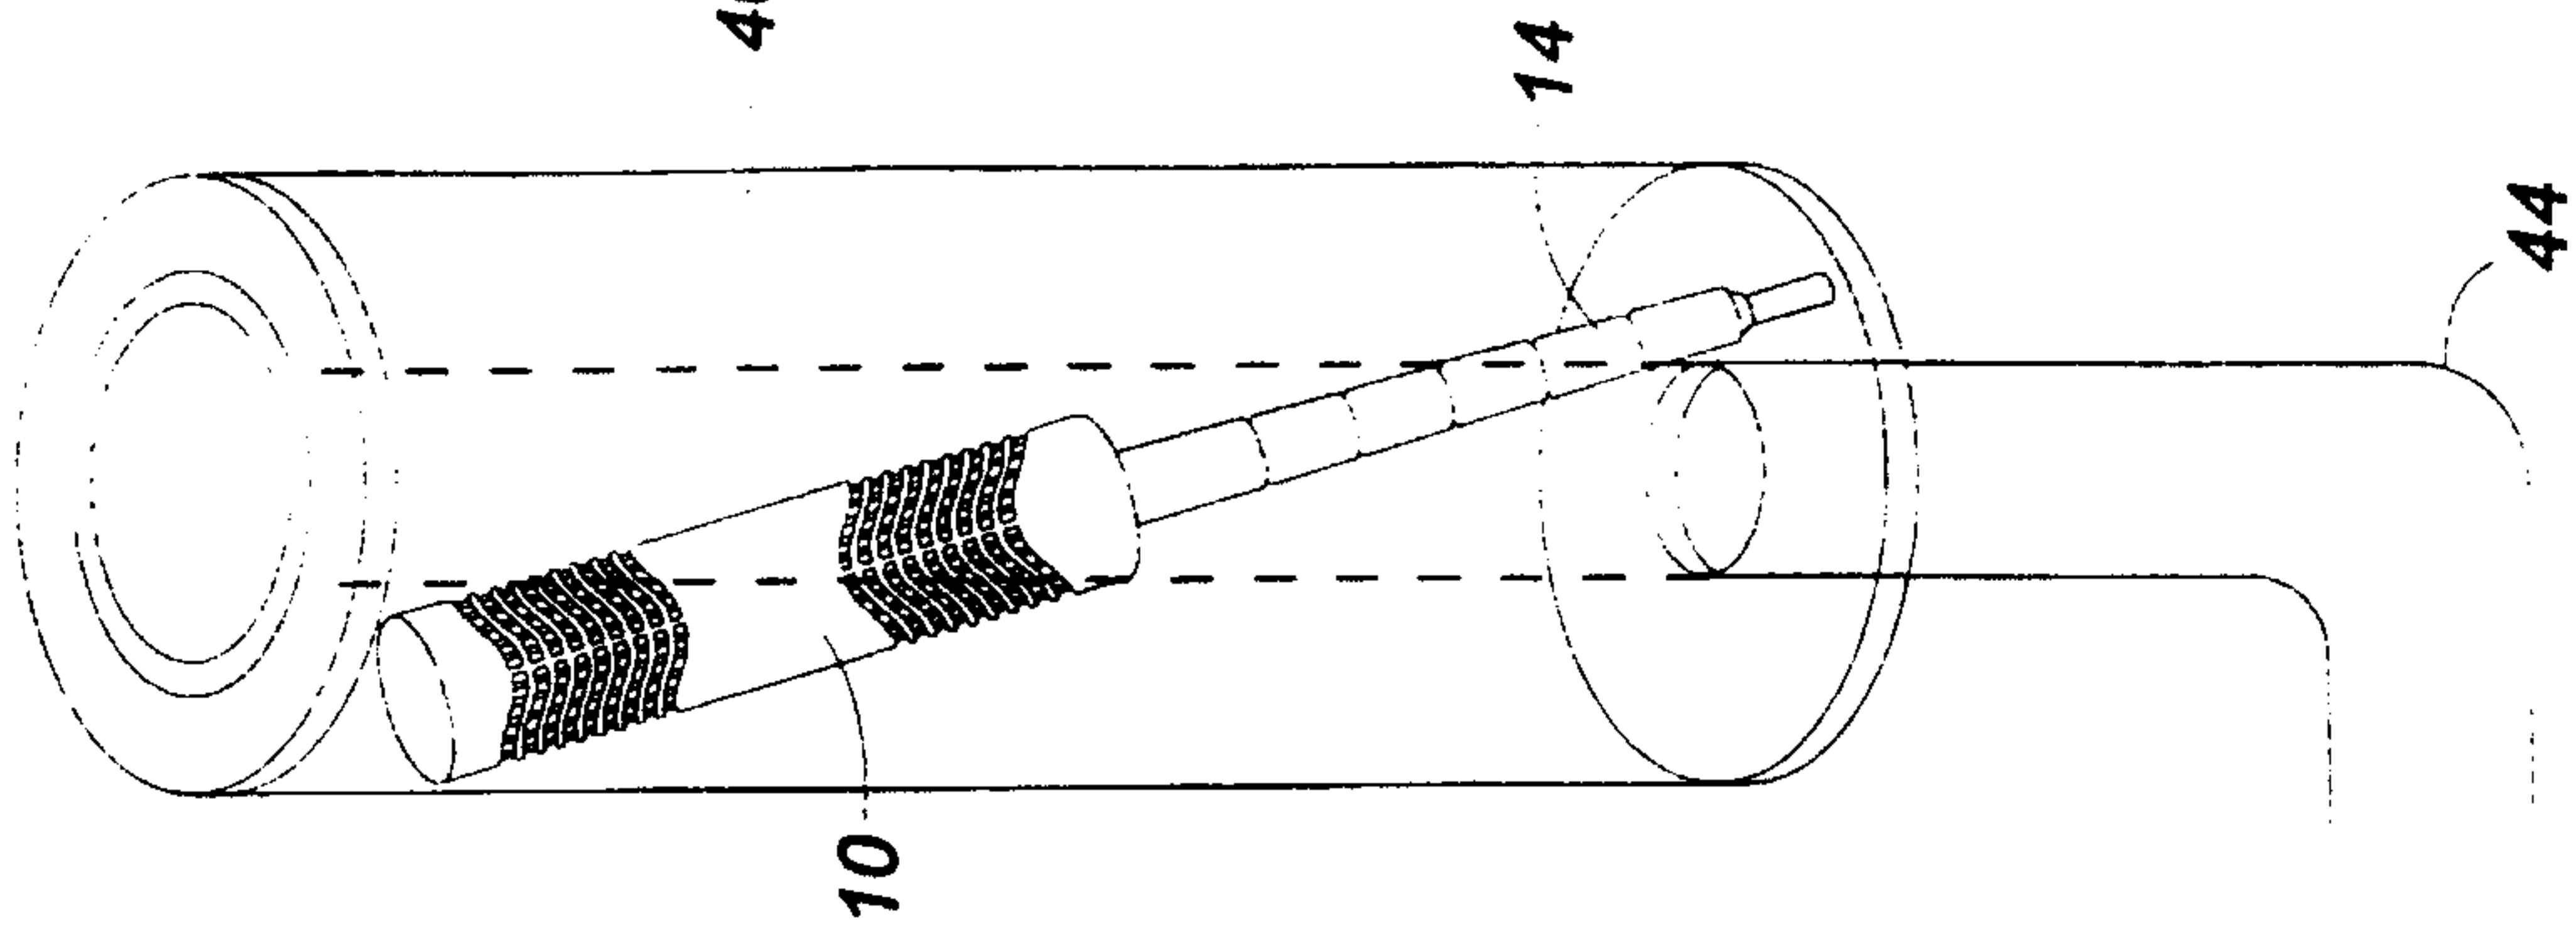


FIG. 10

5/5

**FIG. 11**

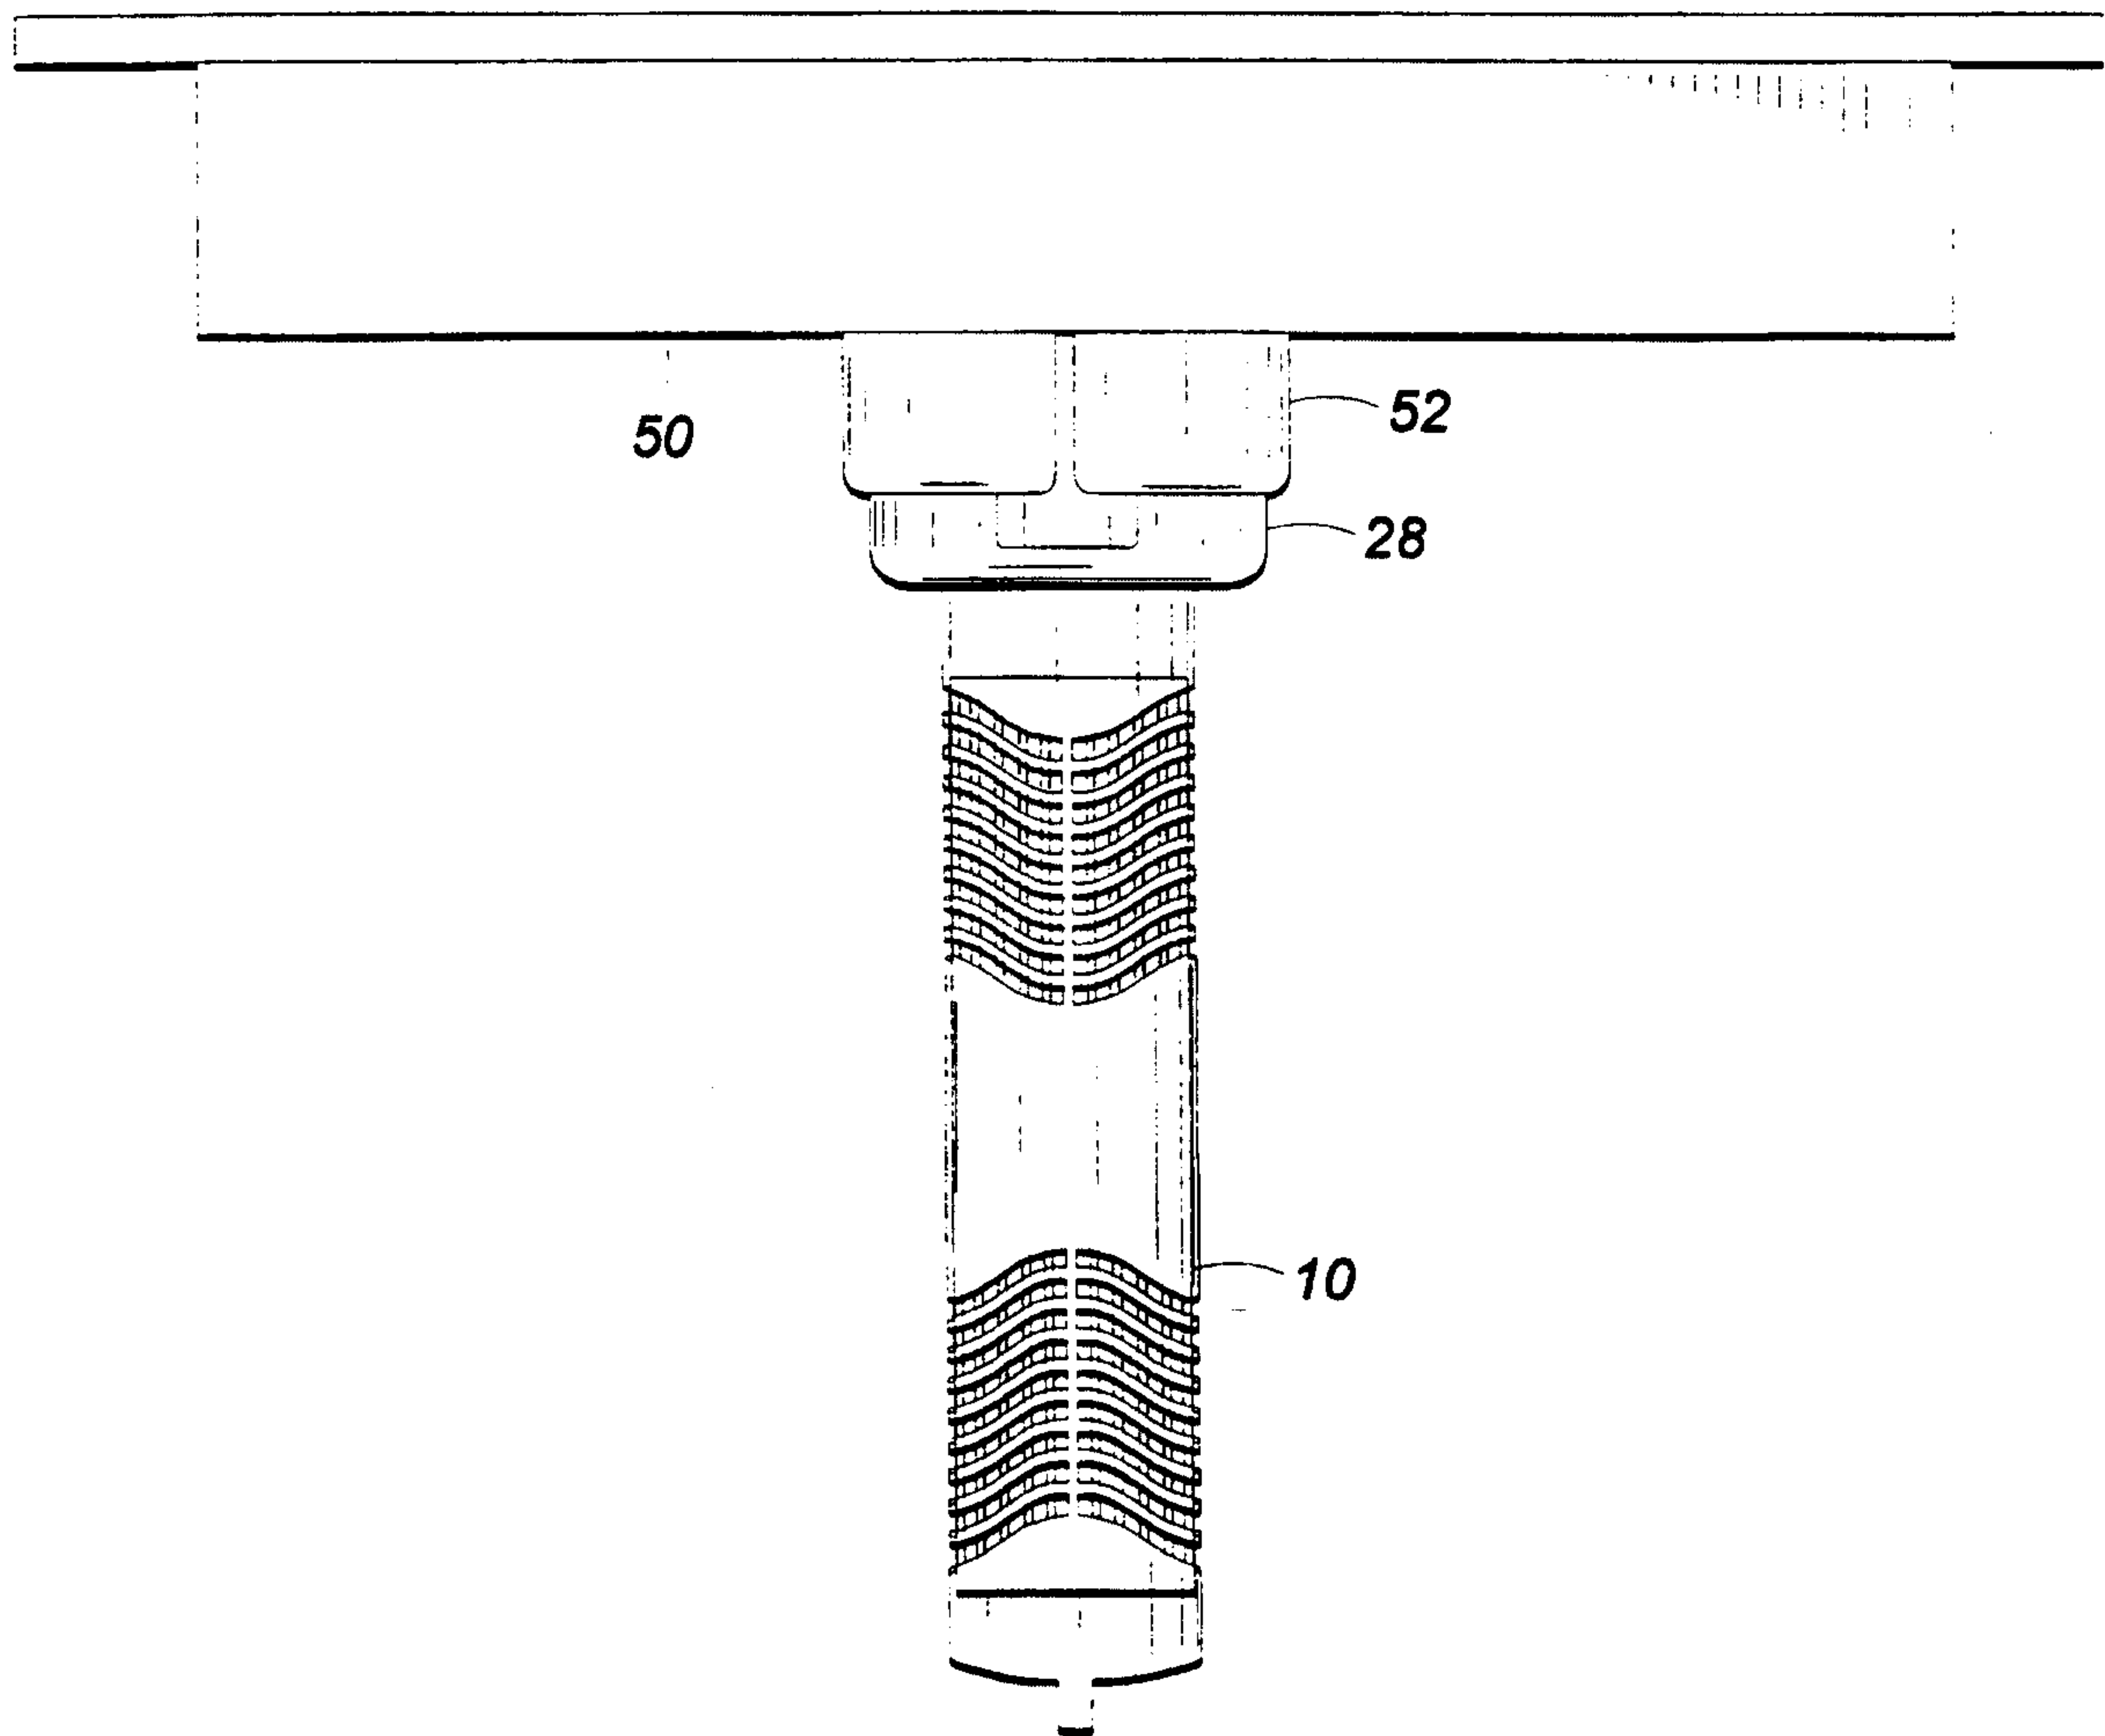