



(86) **Date de dépôt PCT/PCT Filing Date:** 2014/05/16
 (87) **Date publication PCT/PCT Publication Date:** 2014/11/27
 (85) **Entrée phase nationale/National Entry:** 2015/11/18
 (86) **N° demande PCT/PCT Application No.:** US 2014/038299
 (87) **N° publication PCT/PCT Publication No.:** 2014/189773
 (30) **Priorité/Priority:** 2013/05/20 (US13/897,771)

(51) **Cl.Int./Int.Cl.** *B01J 39/14* (2006.01),
B01J 29/06 (2006.01), *B09C 1/00* (2006.01),
C02F 1/28 (2006.01), *C02F 1/52* (2006.01),
C02F 1/58 (2006.01), *C02F 3/12* (2006.01),
C02F 9/00 (2006.01)
 (71) **Demandeur/Applicant:**
 VEOLIA WATER SOLUTIONS & TECHNOLOGIES
 SUPPORT, FR
 (72) **Inventeurs/Inventors:**
 DIMASSIMO, RICHARD, US;
 GUTSHALL, MICHAEL LEON, US;
 GAID, ABDELKADER, FR;
 BERNARD, SANDRA, GB
 (74) **Agent:** DIMOCK STRATTON LLP

(54) **Titre : SYSTEME ET PROCEDE D'ELIMINATION DE L'AMMONIUM, DE LA DBO SOLUBLE ET DES SOLIDES EN SUSPENSION A PARTIR D'UN FLUX D'EAUX USEES**
 (54) **Title: SYSTEM AND PROCESS FOR REMOVING AMMONIUM, SOLUBLE BOD AND SUSPENDED SOLIDS FROM A WASTEWATER STREAM**

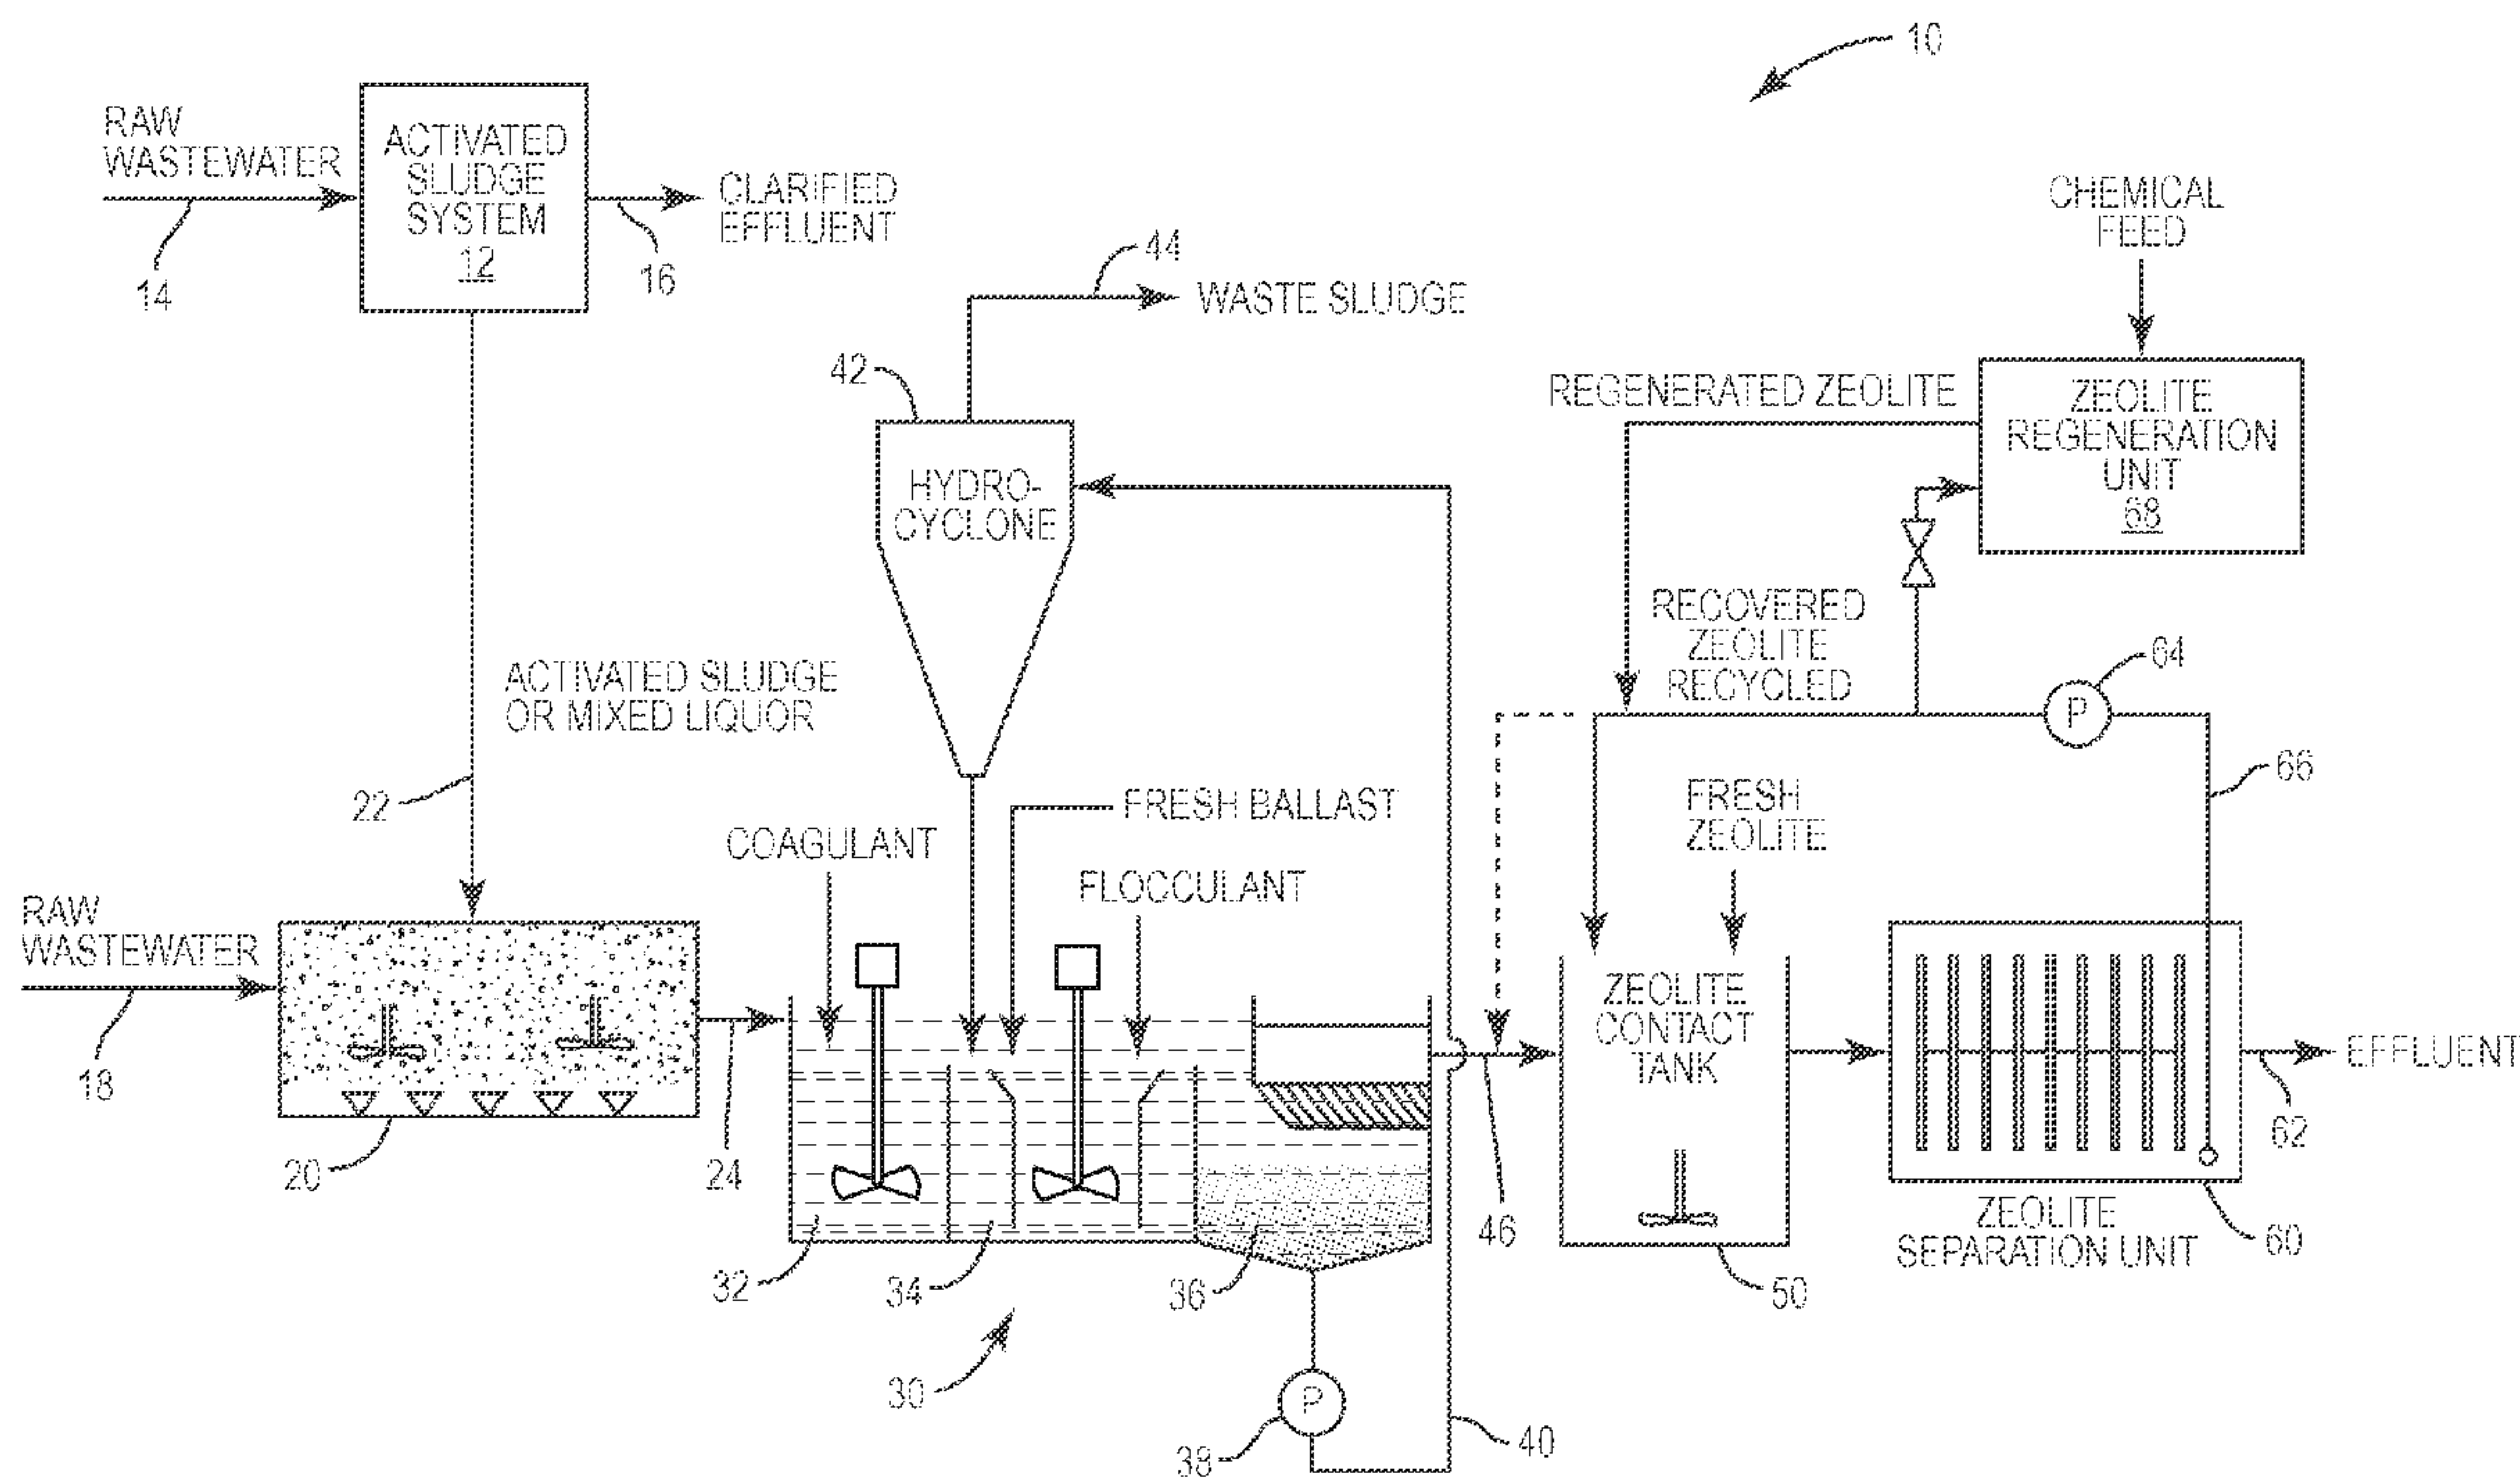


FIG. 1

(57) **Abrégé/Abstract:**

A method of treating wastewater includes removing BOD and ammonium from the wastewater. The wastewater is directed into a tank where it is mixed with mixed liquor or activated sludge from an activated sludge wastewater treatment system. The mixture of

(57) Abrégé(suite)/Abstract(continued):

wastewater and mixed liquor or activated sludge forms a mixed liquor stream. The mixed liquor stream is directed to a ballasted flocculation system where suspended solids is removed from the wastewater. This produces a clarified effluent that is directed to a zeolite tank. Clarified wastewater from the ballasted flocculation system is directed into the zeolite tank and mixed with zeolite. Zeolite is effective to remove ammonium from the wastewater. Thus, the process as a whole is effective in removing suspended solids, soluble BOD as a result of mixing the mixed liquor or activated sludge with the wastewater, and ammonium.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
27 November 2014 (27.11.2014)

WIPO | PCT

(10) International Publication Number
WO 2014/189773 A1

(51) International Patent Classification:

B01J 39/14 (2006.01) C02F 1/58 (2006.01)
B01J 29/06 (2006.01) C02F 3/12 (2006.01)
B09C 1/00 (2006.01) C02F 9/00 (2006.01)
C02F 1/28 (2006.01) C02F 103/00 (2006.01)
C02F 1/52 (2006.01)

(21) International Application Number:

PCT/US2014/038299

(22) International Filing Date:

16 May 2014 (16.05.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/897,771 20 May 2013 (20.05.2013) US

(71) Applicant: VEOLIA WATER SOLUTIONS & TECHNOLOGIES SUPPORT [FR/FR]; Immeuble L'Aquarene, 1 place Montgolfier, F-94417 Saint-Maurice (FR).

(72) Inventors; and

(71) Applicants (for US only): DIMASSIMO, Richard [US/US]; 12304 Peed Road, Raleigh, North Carolina 27614 (US). GUTSHALL, Michael Leon [US/US]; 212 Holly Green Lane, Holly Springs, North Carolina 27540 (US). GAID, Abdelkader [FR/FR]; 16, rue d'Alésia, F-75014 Paris (FR). BERNARD, Sandra [GB/GB]; 108 Whitecroft Road, Birmingham West Midlands R26 3RG (GB).

(74) Common Representative: VEOLIA WATER SOLUTIONS & TECHNOLOGIES SUPPORT; c/o Larry L. Coats, Coats & Bennett, PLLC, 1400 Crescent Green, Suite 300, Cary, North Carolina 27518 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

[Continued on next page]

(54) Title: SYSTEM AND PROCESS FOR REMOVING AMMONIUM, SOLUBLE BOD AND SUSPENDED SOLIDS FROM A WASTEWATER STREAM

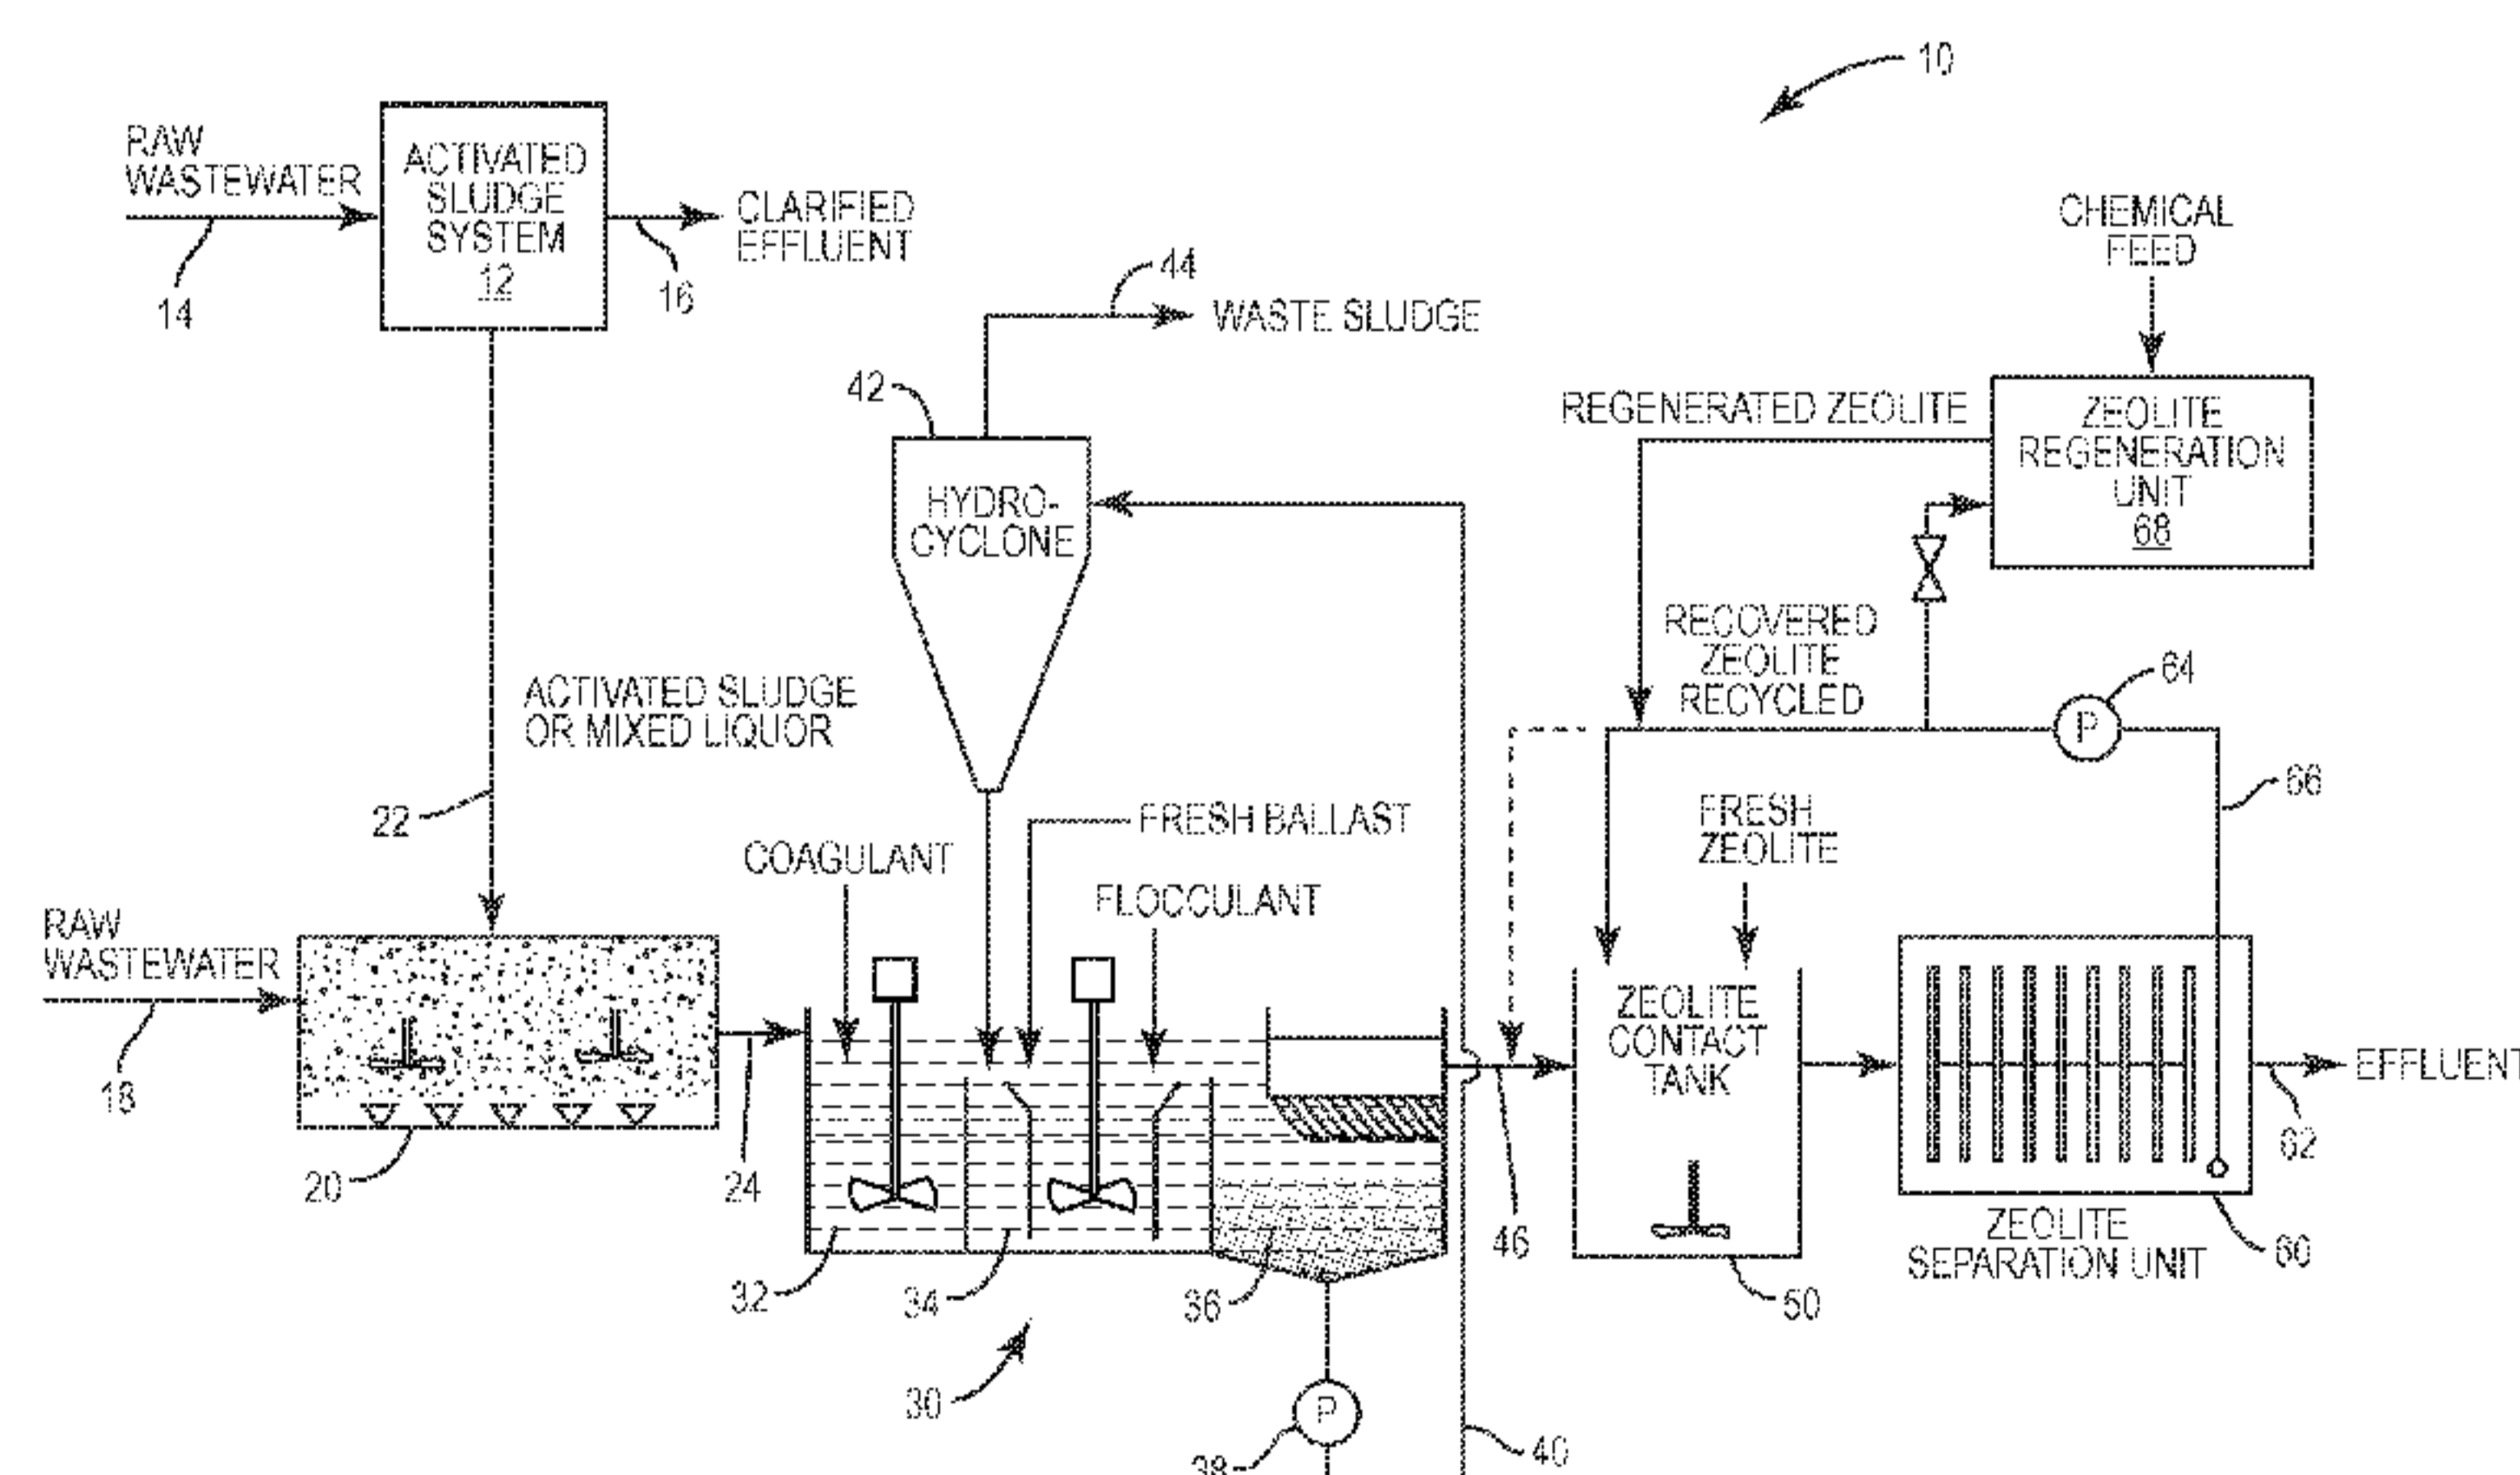


FIG. 1

(57) Abstract: A method of treating wastewater includes removing BOD and ammonium from the wastewater. The wastewater is directed into a tank where it is mixed with mixed liquor or activated sludge from an activated sludge wastewater treatment system. The mixture of wastewater and mixed liquor or activated sludge forms a mixed liquor stream. The mixed liquor stream is directed to a ballasted flocculation system where suspended solids is removed from the wastewater. This produces a clarified effluent that is directed to a zeolite tank. Clarified wastewater from the ballasted flocculation system is directed into the zeolite tank and mixed with zeolite. Zeolite is effective to remove ammonium from the wastewater. Thus, the process as a whole is effective in removing suspended solids, soluble BOD as a result of mixing the mixed liquor or activated sludge with the wastewater, and ammonium.

WO 2014/189773 A1

WO 2014/189773 A1



— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))* — *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

SYSTEM AND PROCESS FOR REMOVING AMMONIUM, SOLUBLE BOD AND SUSPENDED SOLIDS FROM A WASTEWATER STREAM

FIELD OF THE INVENTION

5 The present invention relates to wastewater treatment systems and more particularly to wastewater treatment systems designed to remove ammonium, soluble BOD and suspended solids.

SUMMARY OF THE INVENTION

10 The present invention entails a process for treating wastewater to remove ammonium, soluble BOD and suspended solids. In one embodiment, wastewater is directed to a contact tank. Mixed liquor or activated sludge from a separate activated sludge system is fed into the contact tank and mixed with the wastewater. This produces a mixture of wastewater and activated sludge or mixed liquor, and the mixture is referred to as a mixed liquor stream. The
15 mixed liquor stream is directed through a ballasted flocculation system. Since mixed liquor or activated sludge is in contact with the wastewater being treated, soluble BOD is biologically removed from the wastewater. Further, the ballasted flocculation system is effective to remove suspended solids. A clarified effluent is produced by the ballasted flocculation system. This clarified effluent is directed into a zeolite tank and mixed with zeolite particles. The zeolite is
20 effective in removing ammonium from the wastewater. The mixture of clarified effluent and zeolite is subjected to a solids-liquid separation process which separates the zeolite from the liquid portion of the clarified effluent. This solids-liquid separation process produces a second clarified effluent. In one embodiment, the separated zeolite is recycled to the zeolite tank and, in some cases, a portion of the zeolite is subjected to a regeneration process and the
25 regenerated zeolite is recycled back to the zeolite tank.

In another embodiment, the zeolite is utilized as a ballast in the ballasted flocculation system. In this case also, the zeolite functions to remove ammonium from the wastewater. At the same time, the zeolite, provided in the form of particles, is utilized to facilitate the settling of suspended solids or sludge. Here the suspended solids agglomerate around the zeolite
30 particles and this results in the relatively heavy zeolite particles and suspended solids settling at a relatively fast rate. In this embodiment, the wastewater is also directed to the contact tank where mixed liquor or activated sludge from a separate activated sludge system is mixed with the wastewater to form the mixed liquor stream. It is the mixed liquor stream with the biomass included that is directed to the ballasted flocculation system where the zeolite is used as a
35 ballast.

In another embodiment, the present invention is primarily used in wet weather conditions and in conjunction with a separate activated sludge system. Here, a main wastewater influent stream is directed into and through the activated sludge system and produces a clarified

effluent. In some cases, the activated sludge system does not have the capacity to handle excess water resulting from wet weather events. In this case, the process entails a wastewater treatment system that operates parallel to the existing activated sludge system and which is designed to handle at least a substantial portion of the water attributable to wet weather events.

5 This additional wastewater treatment system includes the contact tank for receiving activated sludge or mixed liquor from the activated sludge system. The water resulting from the wet weather condition is directed into the contact tank and mixed with the activated sludge or the mixed liquor from the separate activated sludge system. This produces the mixed liquor stream which is then directed to a ballasted flocculation system. Between the contact tank and the
10 ballasted flocculation system, soluble BOD is removed from the wastewater because of the presence of biomass in the wastewater. At the same time, the ballasted flocculation system is effective to remove suspended solids. As noted above, a downstream process utilizing zeolite can be employed to remove ammonium from the wastewater or, in the alternative, the zeolite can be utilized as a ballast in the ballasted flocculation system. In the latter case, the zeolite
15 functions to remove ammonium and serve as a ballast that facilitates the removal of suspended solids from the wastewater.

Other objects and advantages of the present invention will become apparent and obvious from a study of the following description and the accompanying drawings which are merely illustrative of such invention.

20

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic illustration of the system and process of the present invention.

Figure 2 is a schematic illustration of an alternative process where zeolite is utilized in a ballasted flocculation system as a ballast which is effective to remove ammonium and which
25 also facilitates the removal of suspended solids from the wastewater being treated.

Figure 3 shows an alternative process where both microsand and zeolite are mixed with the wastewater being treated.

EXEMPLARY EMBODIMENTS OF THE INVENTION

30 With further reference to the drawings, the wastewater treatment system of the present invention is shown therein and indicated generally by the numeral 10. As discussed above, the system of the present invention is designed to remove soluble BOD, suspended solids and ammonia from wastewater. In particular, when ammonia, NH_3 , is hydrated, it forms ammonium, NH_4^+ . The system and process of the present invention entails contacting the wastewater with
35 zeolite and through an ion exchange process and/or adsorption, the ammonium ion is removed from the wastewater. In one embodiment of the present invention, the system and process disclosed herein is particularly useful to deal with wet weather events and conditions. In this case, the system and process involves a main activated sludge system 12 that receives a main

wastewater influent and produces a clarified effluent. In some cases, such an activated sludge system 12 does not have the capacity to handle excess water produced by a wet weather event. The present invention entails a system and process for dealing with this excess water in such a way that soluble BOD, suspended solids and ammonium can be removed from the excess
5 water without the excess water being required to pass through the activated sludge system 12. This is accomplished by providing a parallel treatment system, that is a system that is operated parallel to the activated sludge system 12. As described below, the parallel system and process utilizes activated sludge from the activated sludge system to biologically treat the excess water passing in the system that runs parallel to the activated sludge system 12. By utilizing activated
10 sludge from the activated sludge system 12, soluble BOD is biologically removed from the water. At the same time, the present invention envisions that suspended solids can be removed from this excess water and still further ammonium in the excess water produced by the wet weather event can be removed. It should be pointed out that the present invention is not limited to simply handling excess water from wet weather conditions or events. The system and
15 process of the present invention may be used to effectively increase the capacity of an existing activated sludge system.

Turning to Figure 1, there is shown therein an activated sludge system 12. Note influent line 14 that directs raw wastewater to be treated into the activated sludge system 12. The raw wastewater is treated in any one of a variety of ways in the activated sludge system 12 and the
20 system produces a clarified effluent that passes therefrom through effluent line 16. Activated sludge system 12 produces return activated sludge, waste activated sludge and produces what is referred to as mixed liquor. Mixed liquor is formed when return activated sludge is mixed with incoming wastewater to be treated. Activated sludge system 12 includes one or more reactors that are utilized to biologically treat the wastewater and further includes a solids-liquid
25 separation unit such as a clarifier or a membrane separation unit, for example. Other types of solids-liquid separation units can be employed. As noted above, the activated sludge system 12 relies on biomass to remove contaminants and treat the wastewater passing in the system. Various biological wastewater treatment processes can be carried out by the activated sludge system 12. For example, biological processes for removing soluble BOD, phosphorus, heavy
30 metals and biological processes to nitrify and denitrify the wastewater can be employed in the activated sludge system 12.

As noted above, the present invention entails a wastewater treatment process that is operated in parallel with the activated sludge system 12. As seen in Figure 1, there is provided another wastewater influent line 18. Raw wastewater to be treated is directed through line 18
35 into a bio-contact tank 20. Bio-contact tank 20 includes a mixer and is aerated to enhance and maintain biological treatment. Connected between the activated sludge system 12 and the bio-contact tank 20 is an activated sludge feedline 22. Activated sludge feedline 22 is operative to direct activated sludge from the activated sludge system 12 into the bio-contact tank 20. It

should be appreciate that the activated sludge directed from the system 12 into the bio-contact tank 20 can assume various forms. It may be in the form of return activated sludge, waste activated sludge or may be in the form of mixed liquor. In any event, the activated sludge is mixed with the incoming wastewater from line 18 and this produces what is referred to as a mixed liquor stream which is directed via line 24 to a ballasted flocculation system indicated generally by the numeral 30.

In the case of the embodiment shown in Figure 1, the ballasted flocculation system 30 includes tanks 32 and 34 along with a settling tank 36. Both tanks 32 and 34 include a mixer. Disposed in tank 34 is a downdraft mixing tube that is utilized to mix a flocculant with the wastewater in tank 34. Upstream a coagulant can be mixed with the wastewater in tank 32 or even at a point upstream of tank 32. Sludge settles to the bottom of settling tank 36 and a pump 38 is utilized to pump the sludge to a hydrocyclone 42. The ballasted flocculation system 30 is operative to inject a ballast into the mixed liquor stream passing through the ballasted flocculation system 30. Various types of ballast can be used. In one embodiment, the ballast is microsand and, as will be discussed subsequently herein and as shown in Figure 2, the ballast may comprise zeolite particles. In any event, the sludge that settles to the bottom of settling tank 36 is pumped by pump 38 to the hydrocyclone 42. Hydrocyclone 42 separates the sludge from the ballast and recycles the ballast to the second tank 34 of the ballasted flocculation system 30. The separated sludge is directed as waste sludge from the hydrocyclone 42 via line 44.

Ballasted flocculation system 30 produces a clarified effluent that is directed therefrom via line 46. This clarified effluent is directed to a zeolite contact tank 50. Fresh or recycled zeolite is injected into the zeolite tank 50 and mixed with the clarified effluent. This contact time can vary depending on the concentration of ammonia in the water and the makeup and quality of the zeolite particles. In any event, the zeolite particles contact the clarified effluent and through an ion exchange process and/or an adsorption process, ammonia is reduced as a result of ammonium ions being taken up by the zeolite particles.

From the zeolite contact tank 50, the clarified effluent is directed to a zeolite separation unit 60 which separates the zeolite from the clarified effluent, producing an effluent having substantially no zeolite included. Various types of zeolite separation units can be employed. For example, filtration devices or settling devices can be used. Alternatively, rotary disc filters or rotary drum filters can be utilized to separate the zeolite particles from the clarified effluent. For a complete understanding of rotary disc filters and rotary drum filters one is referred to the disclosures found in U.S. Patent 7,597,805 and U.S. Patent Application 13/164863, the disclosures of which are expressly incorporated herein by reference.

Separated zeolite is pumped by pump 64 via line 66 from the zeolite separation unit 60. Zeolite is returned to the zeolite contact tank 50 or to a point upstream of the zeolite contact tank as indicated in dotted line in Figure 1. From time to time, the zeolite particles will need to

be regenerated. As shown in Figure 1, there is provided a line with an associated valve for directing some of the recovered zeolite particles to a zeolite regeneration unit 68. There is provided a chemical feed that is directed into the zeolite regeneration unit for regenerating or rejuvenating the zeolite particles. Regenerated zeolite particles are directed from the
5 regeneration unit 68 back to the zeolite contact tank 50 or to a point just upstream of the zeolite contact tank. There are various ways to regenerate the zeolite particles. In one example, the zeolite particles can be contacted with a sodium chloride solution at an appropriate pH of approximately 10. During the course of regeneration, sodium ions displace ammonium ions and other cations taken up or adsorbed during the wastewater treatment process.

10 Turning to Figure 2, the process shown therein is similar to that discussed above and depicted in Figure 1. The basic differences in the two processes is that in the case of the Figure 2 process zeolite is also used as a ballast. By utilizing zeolite as a ballast as opposed to microsand, for example, the zeolite performs the dual function of reducing the ammonium concentration in the mixed liquor stream passing through the ballasted flocculation system 30
15 and at the same time facilitates the removal of suspended solids. As shown in Figure 2, fresh zeolite is injected into the second tank 34 and mixed with a flocculant. In the process, ammonium ions are attracted to the zeolite particles through either an ion exchange process and/or an adsorption process. Thus, the mixing of the zeolite with the mixed liquor stream results in the up-take of ammonium and, hence, the reduction in ammonia in the mixed liquor
20 stream. At the same time, suspended solids will agglomerate around the particles of zeolite and will grow into floc. Because the specific gravity of zeolite particles is greater than the specific gravity of water (typically approximately 1.7 to approximately 2.2), then it follows that the zeolite particles having ammonium ions and suspended solids attached thereto will settle relatively fast in the settling tank 36. Settled zeolite particles and other sludge is pumped by pump 38 through
25 line 40 to the hydrocyclone 42 which separates the ballast or zeolite particles from waste sludge. Waste sludge is conveyed from the hydrocyclone 42 via line 44. Cleaned zeolite particles are then directed from the hydrocyclone into the second tank 34 of the ballasted flocculation system. It is appreciated that from time to time the zeolite particles will need to be regenerated. Thus, from time to time a portion of the cleaned zeolite particles leaving the
30 hydrocyclone 42 is directed to the zeolite regeneration unit 68. Here the zeolite particles are regenerated in order to improve their affinity for ammonium ions.

Figure 3 shows another embodiment of the present invention. The Figure 3 embodiment is similar to the process described and shown in Figure 2. However, in the Figure 3 process microsand is used as a ballast so long as the ammonia or ammonium concentration of the
35 influent wastewater stream is below a threshold limit. When the threshold limit is exceeded, then the process of the present invention injects zeolite into the second tank 34. Thus, in this embodiment, during certain periods of operation the process may include both microsand and zeolite. In this case, both microsand and zeolite function as a ballast to facilitate removing

suspended solids from the influent wastewater being treated. Zeolite particles injected into the ballasted flocculation system function as described above to reduce the concentration of ammonia by removing through ion exchange or adsorption ammonium ions in the wastewater. Thus, it follows that the system and process shown in Figure 3 can be controlled to selectively
5 utilize zeolite particles in the process when there is a need to remove ammonium ions. When there is no need or compelling reason to remove ammonium ions, then the system and process can be operated by utilizing microsand or other conventional ballast material to facilitate settling and removing suspended solids.

Referring to Figure 3, when both microsand and zeolite are injected into the ballasted
10 flocculation system, it follows that the sludge produced in settling tank 38 will include both microsand and zeolite. Pump 38 is operative to pump the sludge including the microsand and zeolite through line 40 to a separator which in the case illustrated comprises a hydrocyclone 42. Hydrocyclone 42 is effective in separating microsand from sludge and the zeolite particles. Because of the nature and physical characteristics of the microsand, zeolite and sludge, the
15 underflow produced by the hydrocyclone will generally include the microsand. The microsand separated by the hydrocyclone 42 is directed downwardly into the second tank 34 as shown in Figure 3. The overflow produced by the hydrocyclone 42 includes the sludge and zeolite. This overflow can be directed into line 80 or line 82 from the hydrocyclone 42. See Figure 3. More particularly, the sludge-zeolite mixture can be recycled through line 80 to the first tank 32 of the
20 ballasted flocculation system 30. In other cases, the sludge-zeolite mixture can be directed into line 82. In some cases, it is envisioned that the overflow including the sludge-zeolite mixture can be split with one portion of the mixture recycled to the ballasted flocculation system 30 via line 80 and the other portion directed into line 82. The sludge-zeolite mixture directed into line 82 is directed to a sludge-zeolite separation unit 84. The purpose of the sludge-zeolite
25 separation unit 84 is to separate the zeolite from the sludge. Separated sludge is directed from the separation unit 84 via line 86 where it is wasted or subjected to further treatment. The separated zeolite, termed used zeolite, is directed into line 88 which is effective to convey the used zeolite to the zeolite regeneration unit 88. As discussed before, the zeolite regeneration unit 88 is effective to regenerate or rejuvenate the used zeolite such that it can be returned to
30 the ballasted flocculation system and reused. In some cases, the used zeolite produced by the sludge-zeolite separation unit 84 has sufficient ion exchange capacity that regeneration is unnecessary. In this case, as an alternative, the used zeolite produced by the separation unit 84 can be directly recycled to the second tank 34 without being treated by the zeolite regeneration unit 88.

35 Zeolite is a naturally occurring mineral, but it also can be synthetically manufactured. Two of the most common natural forms of zeolite are clinoptilolite and mordenite. In one embodiment of the present invention, the selected zeolite is clinoptilolite. There are many varieties of zeolite but generally zeolites are porous structures that include a variety of cations

loosely held and which can be rather easily exchanged with other cations such as ammonium, NH_4^+ . Natural zeolites are hydrated aluminosilicates. They consist of an open, three-dimensional cage-like structure in a network of open channels extending throughout. Loosely bound, positively charged cations are attached at the junctures of the negatively charged aluminosilicate lattice structure. The aluminosilicate framework provides substantial strength and stability to the lattice structure.

Particle sizes of zeolite can vary. It is contemplated that in one embodiment of the present invention that the zeolite particles used in either the process depicted in Figure 1 or the process in Figure 2 would range in size from approximately 100 to approximately 150 microns. It is contemplated that zeolite particles of this particle size will be effective in substantially reducing the ammonia concentration in the wastewater being treated.

Ammonia is a nutrient that contains nitrogen and hydrogen. Its chemical formula is NH_3 in an un-ionized state and NH_4^+ in the ionized form. Total ammonia is the sum of both NH_3 and NH_4^+ . In removing ammonia from wastewater, an ammonia molecule (NH_3) is hydrated and this reaction produces ammonium (NH_4^+) which is readily exchanged for all or part of the calcium, potassium and magnesium contained in the zeolite particle. It is typical in wastewater treatment to measure ammonia in terms of ammoniacal nitrogen, $\text{NH}_3\text{-N}$. Typically in an example where the wastewater influent results from wet weather conditions, one would expect the concentration of $\text{NH}_3\text{-N}$ to be on the order of 5-30 mg/L. Use of zeolite as envisioned herein substantially reduce the ammoniacal nitrogen concentration of the wastewater being treated.

The present invention may, of course, be carried out in other ways than those specifically set forth herein without departing from essential characteristics of the invention. The present embodiments are to be considered in all respects as illustrative and not restrictive, and all changes coming within the meaning and equivalency range of the appended claims are intended to be embraced therein.

CLAIMS

What is claimed is:

1. A method of removing soluble BOD and ammonium from wastewater comprising:
 - a. directing mixed liquor or activated sludge from an activated sludge system to a tank;
 - b. directing the wastewater to be treated into the tank and mixing the wastewater with the mixed liquor or activated sludge to form a mixed liquor stream;
 - c. directing the mixed liquor stream to a ballasted flocculation system and removing BOD and suspended solids from the mixed liquor stream in the ballasted flocculation system and producing a clarified effluent;
 - d. directing the clarified effluent from the ballasted flocculation system to a zeolite contact tank;
 - e. mixing the clarified effluent with the zeolite in the zeolite contact tank such that the zeolite takes up ammonium in the clarified effluent; and
 - f. after the clarified effluent and zeolite are mixed in the zeolite tank, separating the zeolite and ammonium associated with the zeolite from the clarified effluent and producing a second clarified effluent.

2. The method of claim 1 wherein after separating the zeolite and associated ammonium from the clarified effluent, regenerating at least a portion of the zeolite and returning the regenerated zeolite to the zeolite contact tank or to a point upstream of the zeolite contact tank.

3. The method of claim 1 including directing a second wastewater stream into the activated sludge system and utilizing the activated sludge system to treat the second wastewater stream and wherein the activated sludge system produces a third clarified effluent.

4. The method of claim 3 wherein the wastewater directed to the tank arises, in part at least, as a result of a wet weather event.

5. The method of claim 1 wherein ammonium is removed from the mixed liquor stream by the cationic affinity of zeolite.

6. A method of removing soluble BOD and ammonium from wastewater comprising:
 - a. directing mixed liquor or activated sludge from an activated sludge system to a tank;
 - b. directing the wastewater to be treated to the tank and mixing the wastewater with the mixed liquor or activated sludge to form a mixed liquor stream;
 - c. directing the mixed liquor stream to a ballasted flocculation system;

- d. injecting zeolite ballast into the mixed liquor stream in the ballasted flocculation system and mixing the zeolite ballast with the mixed liquor stream;
- e. biologically removing the soluble BOD in the mixed liquor stream in the ballasted flocculation system;
- 5 f. removing ammonium from the mixed liquor stream through an ion exchange process where ions associated with the zeolite ballast are replaced by ammonium;
- g. removing suspended solids from the mixed liquor stream in the ballasted flocculation system by causing suspended solids in the mixed liquor stream to
- 10 agglomerate around the zeolite ballast; and
- h. separating the zeolite ballast having the ammonium ions and suspended solids associated therewith from the mixed liquor stream and producing a clarifying effluent.
- 15 7. The method of claim 6 including regenerating at least a portion of the zeolite ballast and recycling the regenerated zeolite ballast to the ballasted flocculation system where the regenerated zeolite ballast is mixed with the mixed liquor stream.
8. The method of claim 6 including directing a second wastewater stream into the activated
- 20 sludge system and utilizing the activated sludge system to treat the second wastewater stream and wherein the activated sludge system produces another clarified effluent.
9. The method of claim 8 wherein the wastewater directed to the tank arises, in part at least, as a result of a wet weather event.
- 25 10. The method of claim 1 wherein separating the zeolite and associated ammonium includes directing the clarified effluent and zeolite to a rotary disc or drum filter and separating the zeolite and associated ammonium from the clarified effluent.
- 30 11. The method of claim 1 wherein separating the zeolite and associated ammonium from the clarified effluent includes directing the zeolite and associated ammonium into a settling tank and settling the zeolite and associated ammonium in the settling tank.
12. A wastewater treatment system for removing suspended solids, BOD and ammonium
- 35 from wastewater, comprising:
- a. a tank;
- b. an activated sludge system;
- c. means for directing mixed liquor or activated sludge from the

- activated sludge system to the tank;
- d. a mixer associated with the tank for mixing the mixed liquor or activated sludge with the wastewater to be treated to form a mixed liquor stream;
- e. a ballasted flocculation system disposed downstream of the tank for receiving the mixed liquor stream;
- 5 f. the ballasted flocculation system operative to remove suspended solids and soluble BOD from the mixed liquor stream and to produce a first clarified effluent;
- g. a zeolite contact tank located downstream from the ballasted flocculation system and operative to receive the first clarified effluent;
- 10 h. an injector for injecting zeolite into the zeolite contact tank;
- i. a mixer associated with the second zeolite contact tank for mixing the first clarified effluent with the zeolite in the zeolite contact tank such that ammonium in the first clarified effluent is taken up through an ion exchange or adsorption process by the zeolite; and
- 15 j. a solids-liquid separator for separating the zeolite and taken up ammonium from the first clarified effluent and which produces a second clarified effluent.

13. The system of claim 12 wherein the solids-liquid separator comprises a rotary disc or rotary drum filter.

20

14. The system of claim 12 further including a zeolite regeneration system for regenerating zeolite separated by the solids-liquid separator.

15. The system of claim 14 including means for directing the regenerated zeolite to the zeolite contact tank or to a point upstream of the zeolite tank.

25

16. The method of claim 6 including injecting microsand into the mixed liquor stream, and wherein both microsand and zeolite function as a ballast to facilitate the settling of suspended solids.

30

17. The method of claim 16 wherein the ballasted flocculation system includes a settling tank and wherein the method includes:

settling sludge in the settling tank wherein the sludge includes microsand and zeolite;

separating the microsand from the sludge and zeolite;

35 directing the separated microsand into the ballasted flocculation system; and

recycling the sludge and zeolite or directing the sludge and zeolite to a sludge-zeolite separation unit and separating the zeolite from the sludge.

18. The method of claim 17 including directing at least a portion of the separated zeolite to a zeolite regeneration unit and regenerating the zeolite; and returning at least a portion of the regenerated zeolite to the ballasted flocculation system.

- 5 19. A method of removing soluble BOD and ammonium from wastewater comprising:
- a. directing mixed liquor or activated sludge from an activated sludge system to a tank;
 - b. directing the wastewater to be treated to the tank and mixing the wastewater with the mixed liquor or activated sludge to form a mixed liquor stream;
 - 10 c. directing the mixed liquor stream to a ballasted flocculation system;
 - d. injecting microsand ballast into the mixed liquor stream and the ballasted flocculation system and mixing the microsand ballast with the mixed liquor stream;
 - e. biologically removing soluble BOD in the mixed liquor stream;
 - 15 f. monitoring the ammonia or ammonium concentration in the wastewater being treated;
 - g. when the ammonia or ammonium concentration in the wastewater exceeds a threshold value, injecting zeolite particles into the mixed liquor stream in the ballasted flocculation system and mixing the zeolite particles with the mixed
 - 20 liquor stream;
 - h. wherein the zeolite mixed with the mixed liquor stream is effective to remove ammonium from the mixed liquor stream through an ion exchange process; and
 - i. removing suspended solids from the mixed liquor stream in the ballasted flocculation system by causing suspended solids in the mixed liquor stream to
 - 25 agglomerate around the microsand ballast and the zeolite particles.

20. The method of claim 19 wherein the ballasted flocculation system includes a settling tank and the method includes settling sludge in the settling tank wherein the sludge includes microsand and zeolite particles; and the method includes directing the sludge to a separator,

30 separating the microsand from the sludge and zeolite particles; returning the separated microsand to the ballasted flocculation system; recycling at least a portion of the separated sludge and zeolite to the ballasted flocculation system or directing the separated sludge and zeolite to sludge-zeolite separation unit and separating the zeolite particles from the sludge.

35 21. The method of claim 20 including directing the separated zeolite to a zeolite regeneration unit and regenerating the zeolite particles, and thereafter returning the regenerated zeolite particles to the ballasted flocculation system or returning the separated zeolite particles to the ballasted flocculation system without regenerating the zeolite particles.

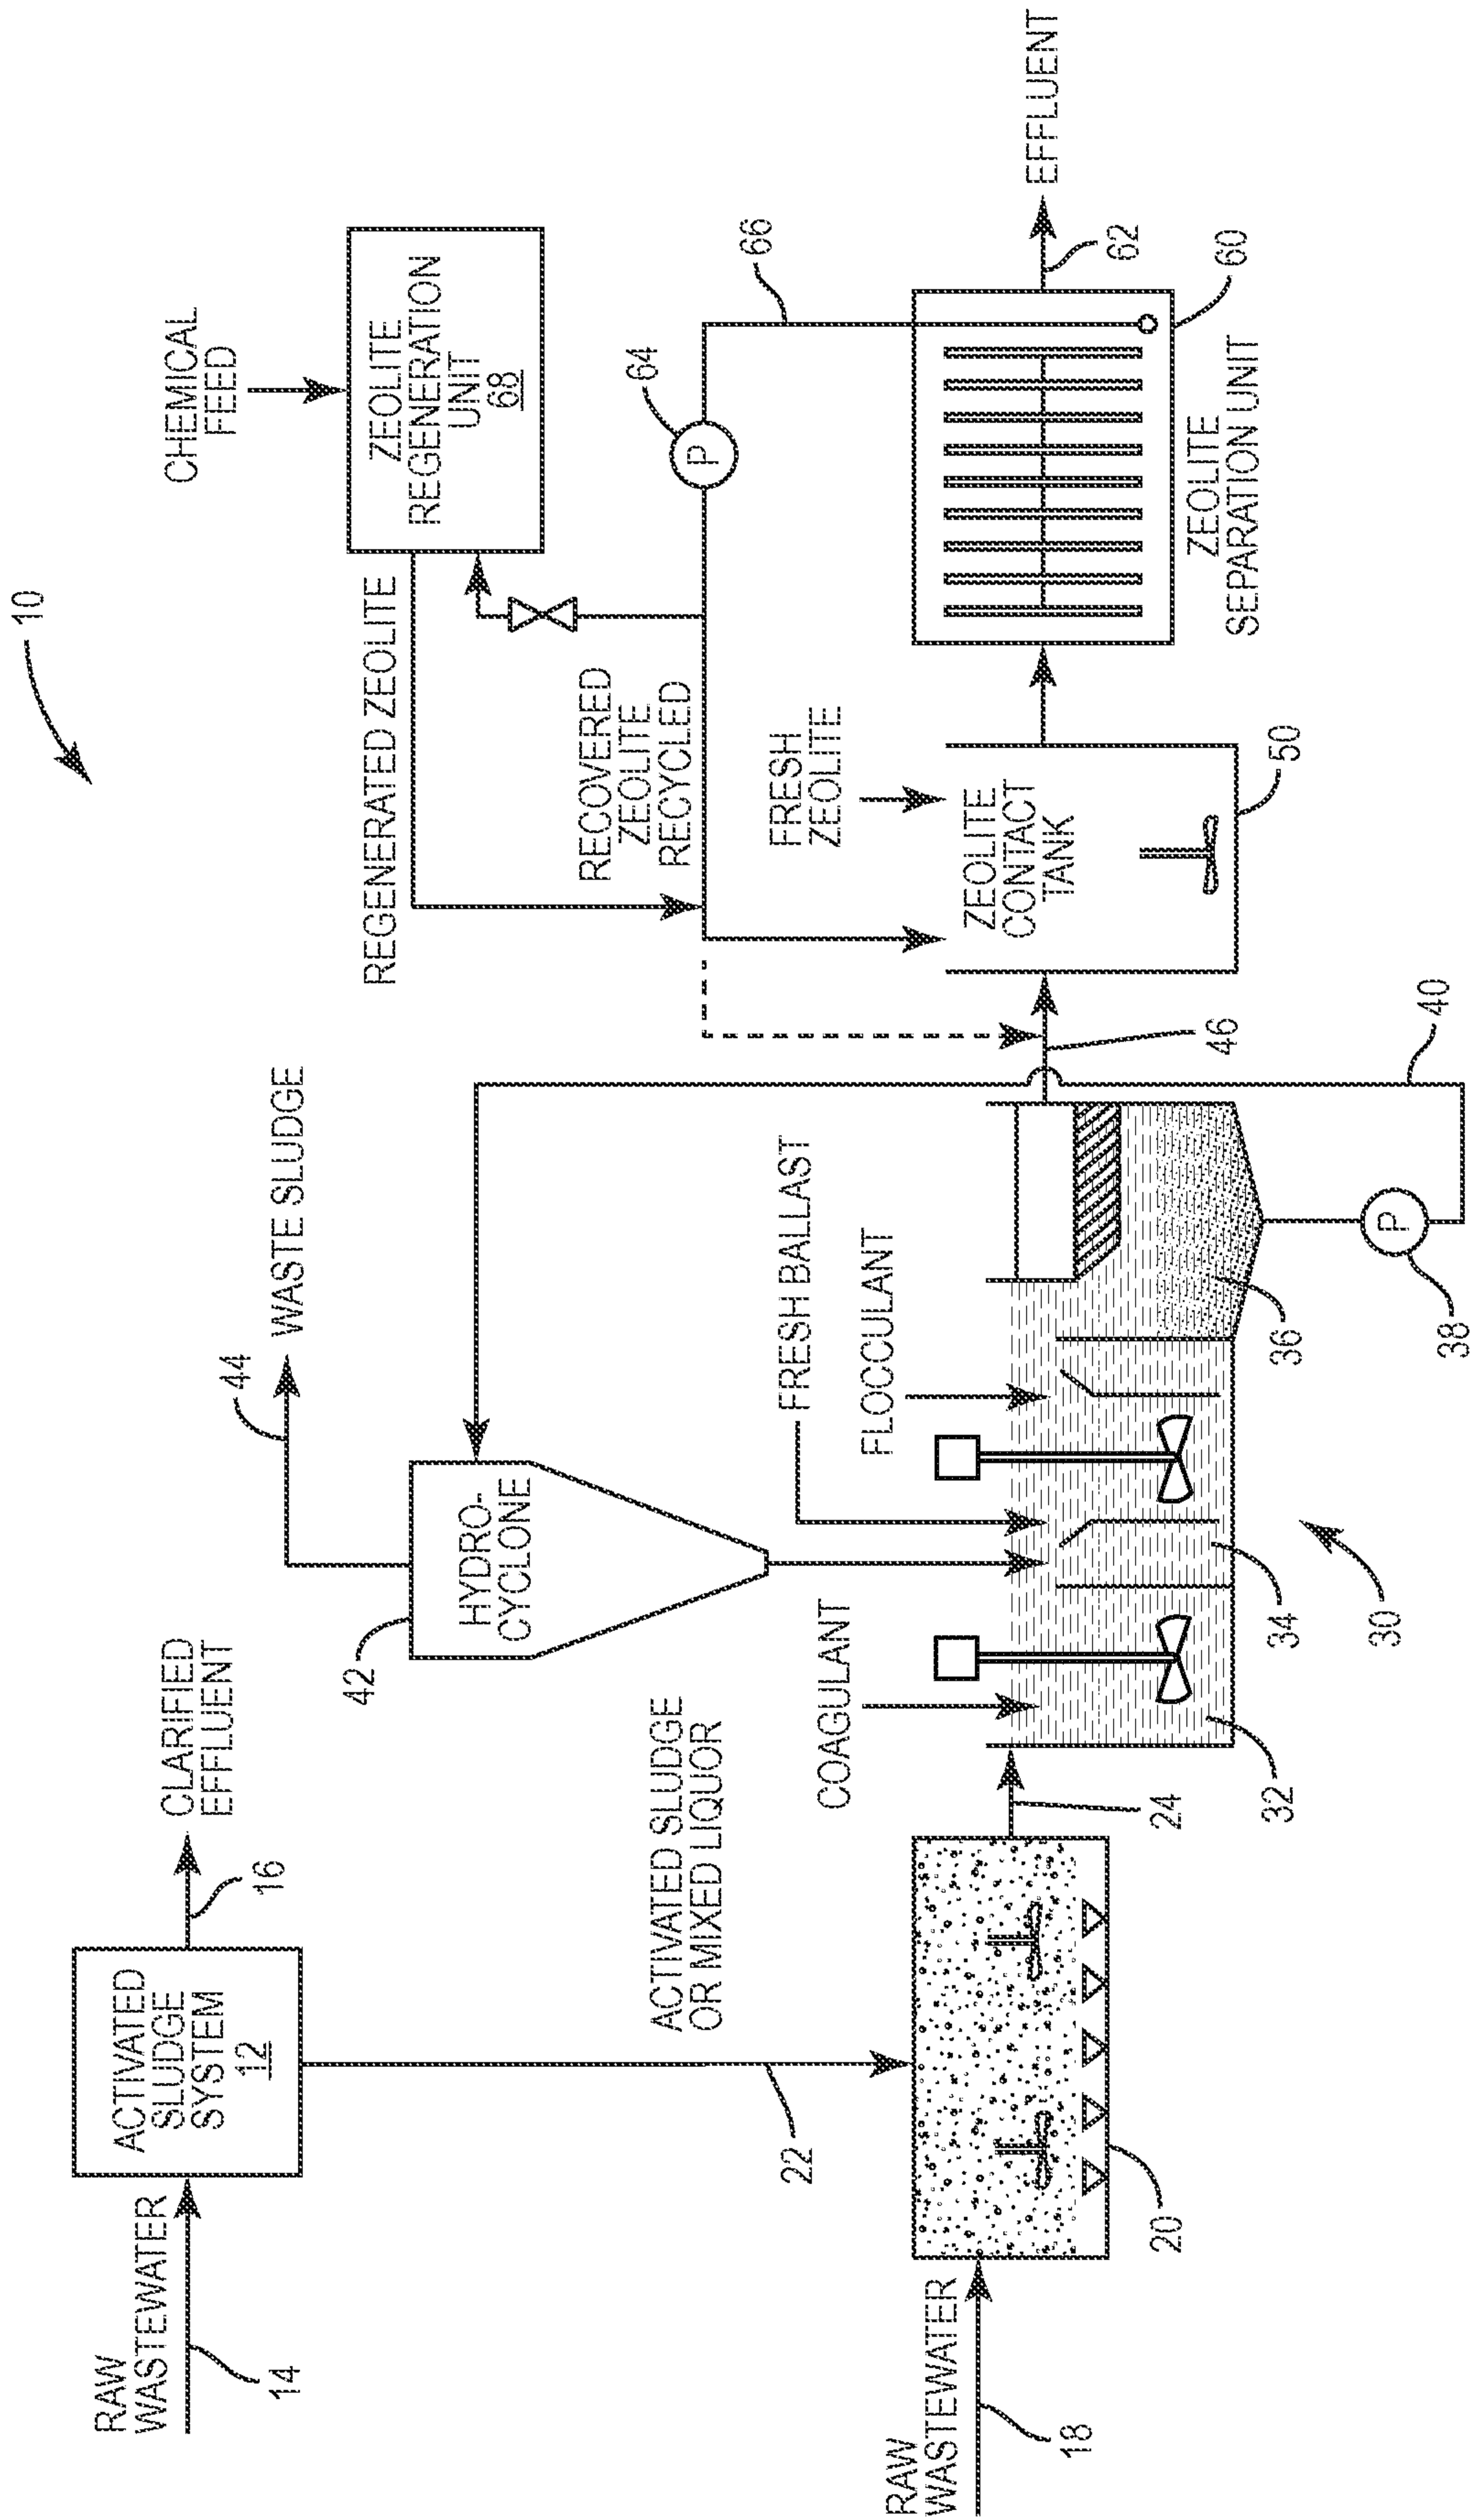


FIG. 1

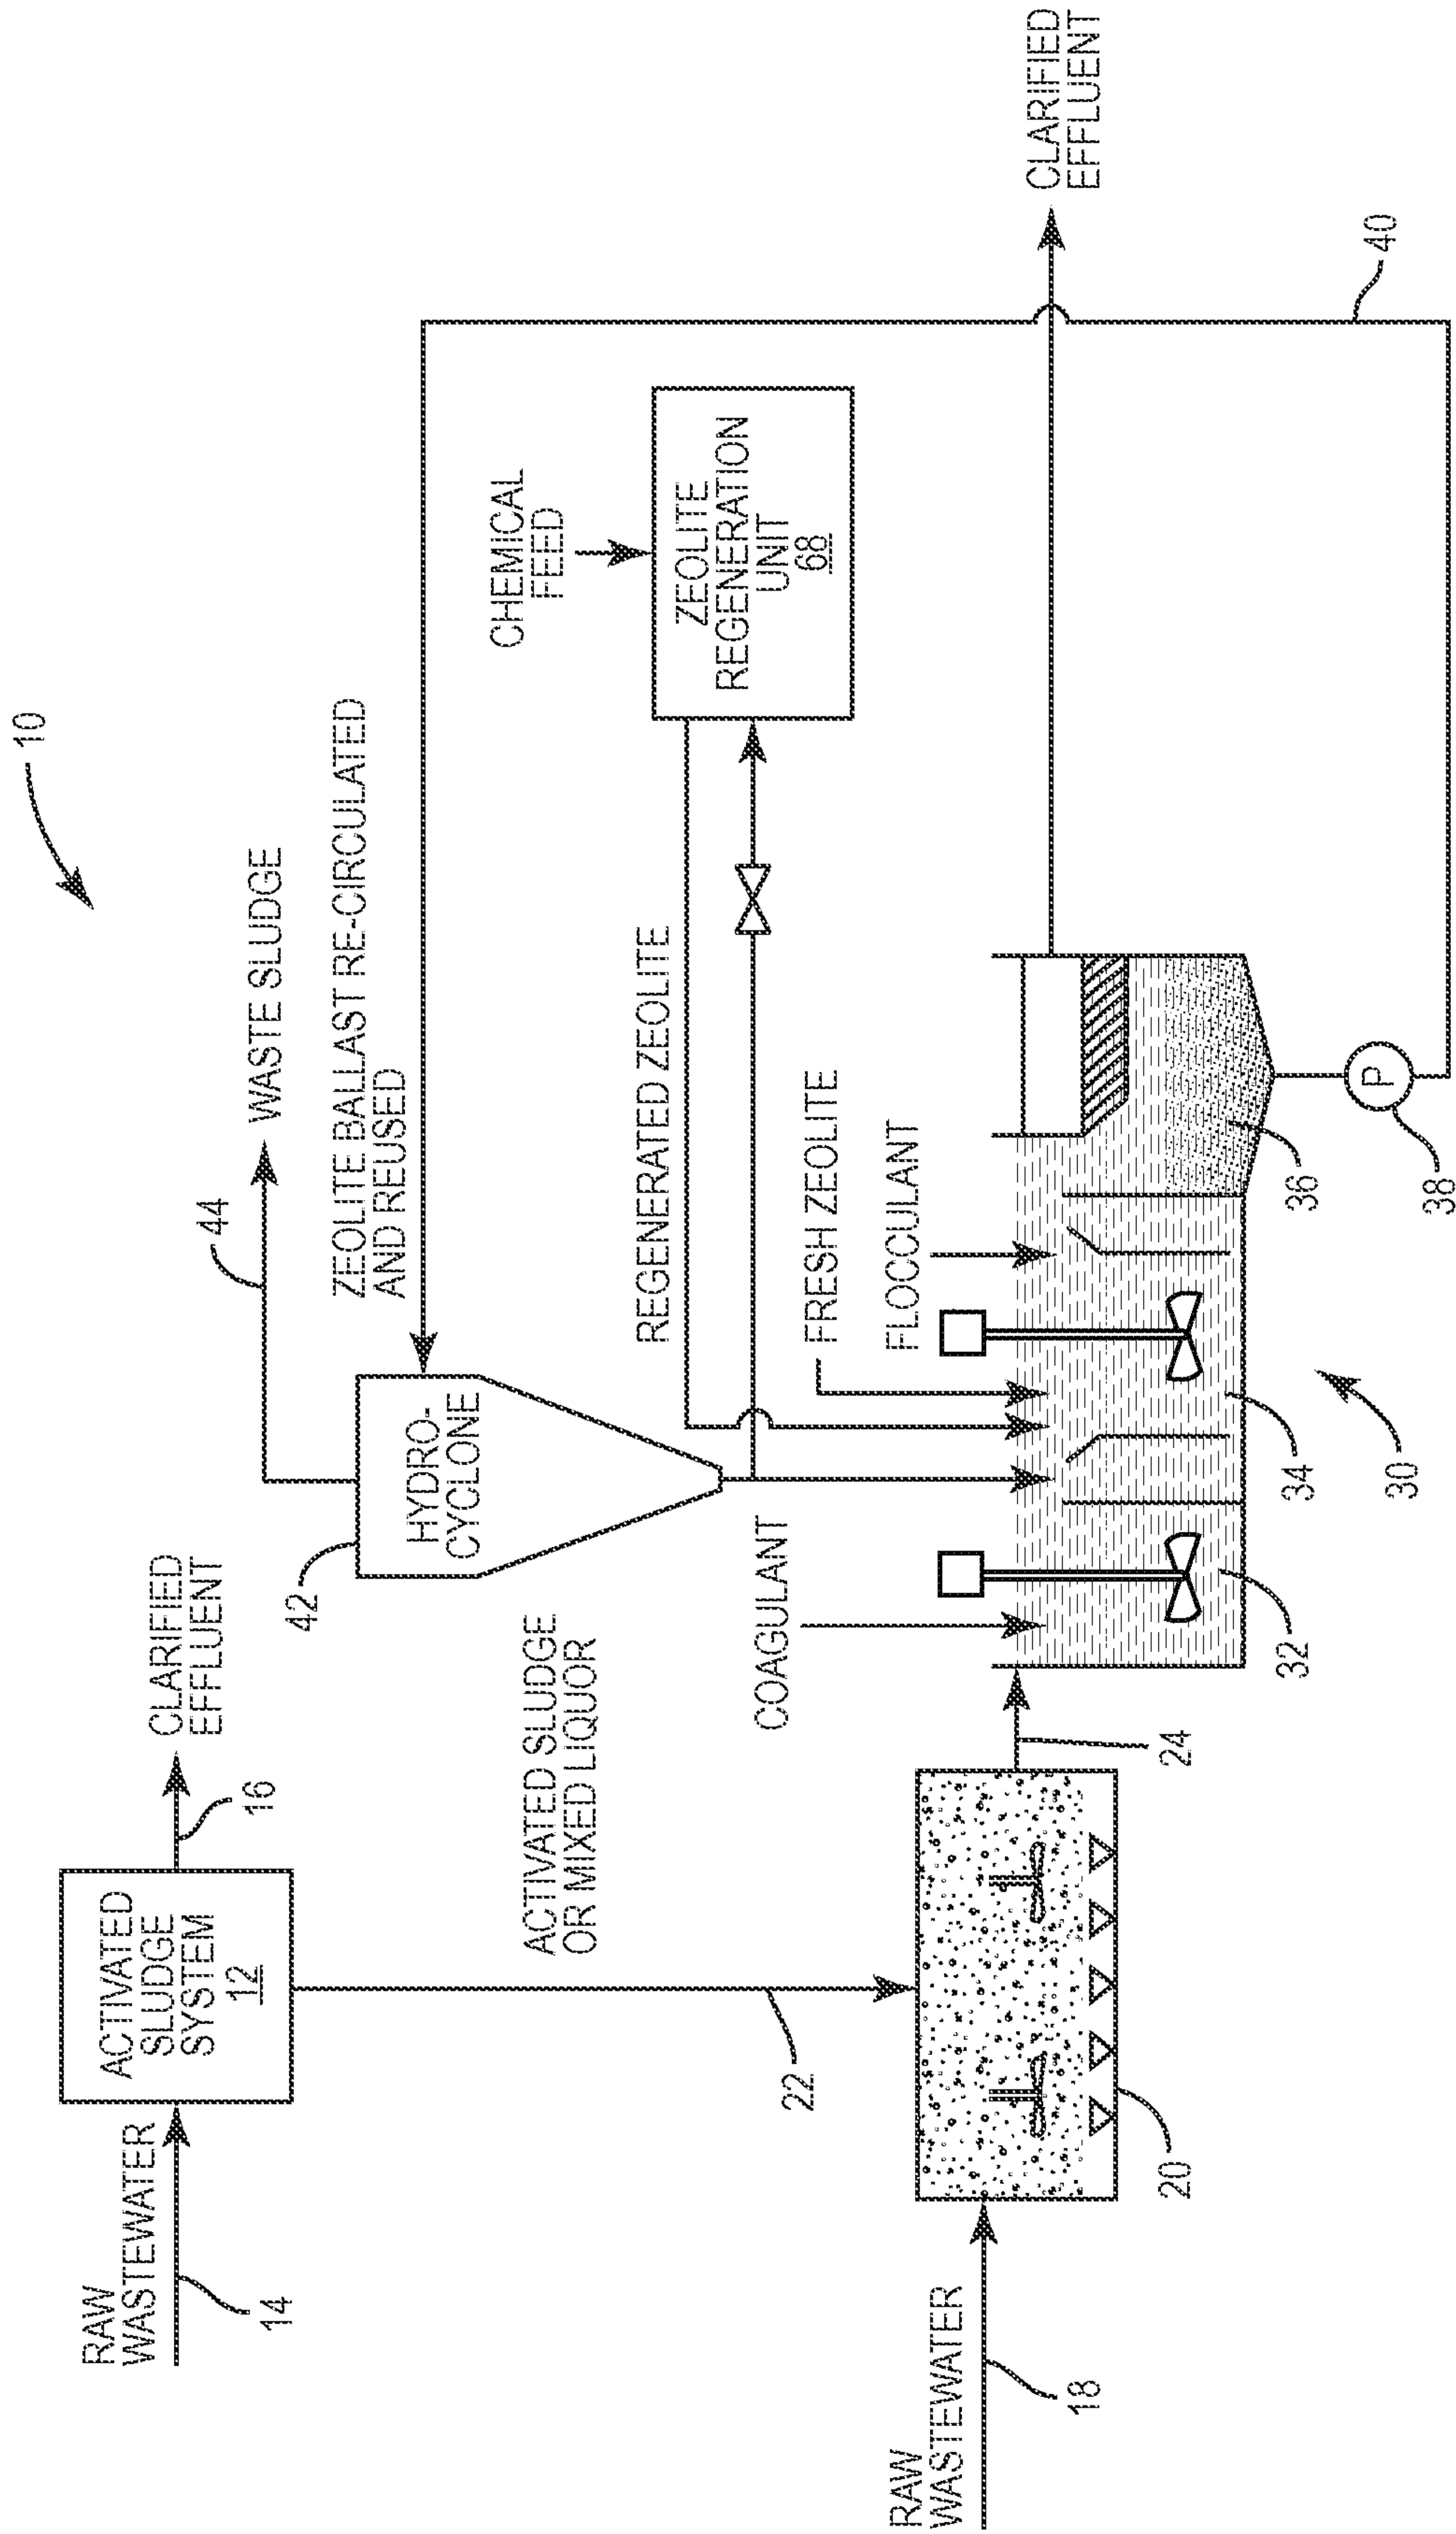


FIG. 2

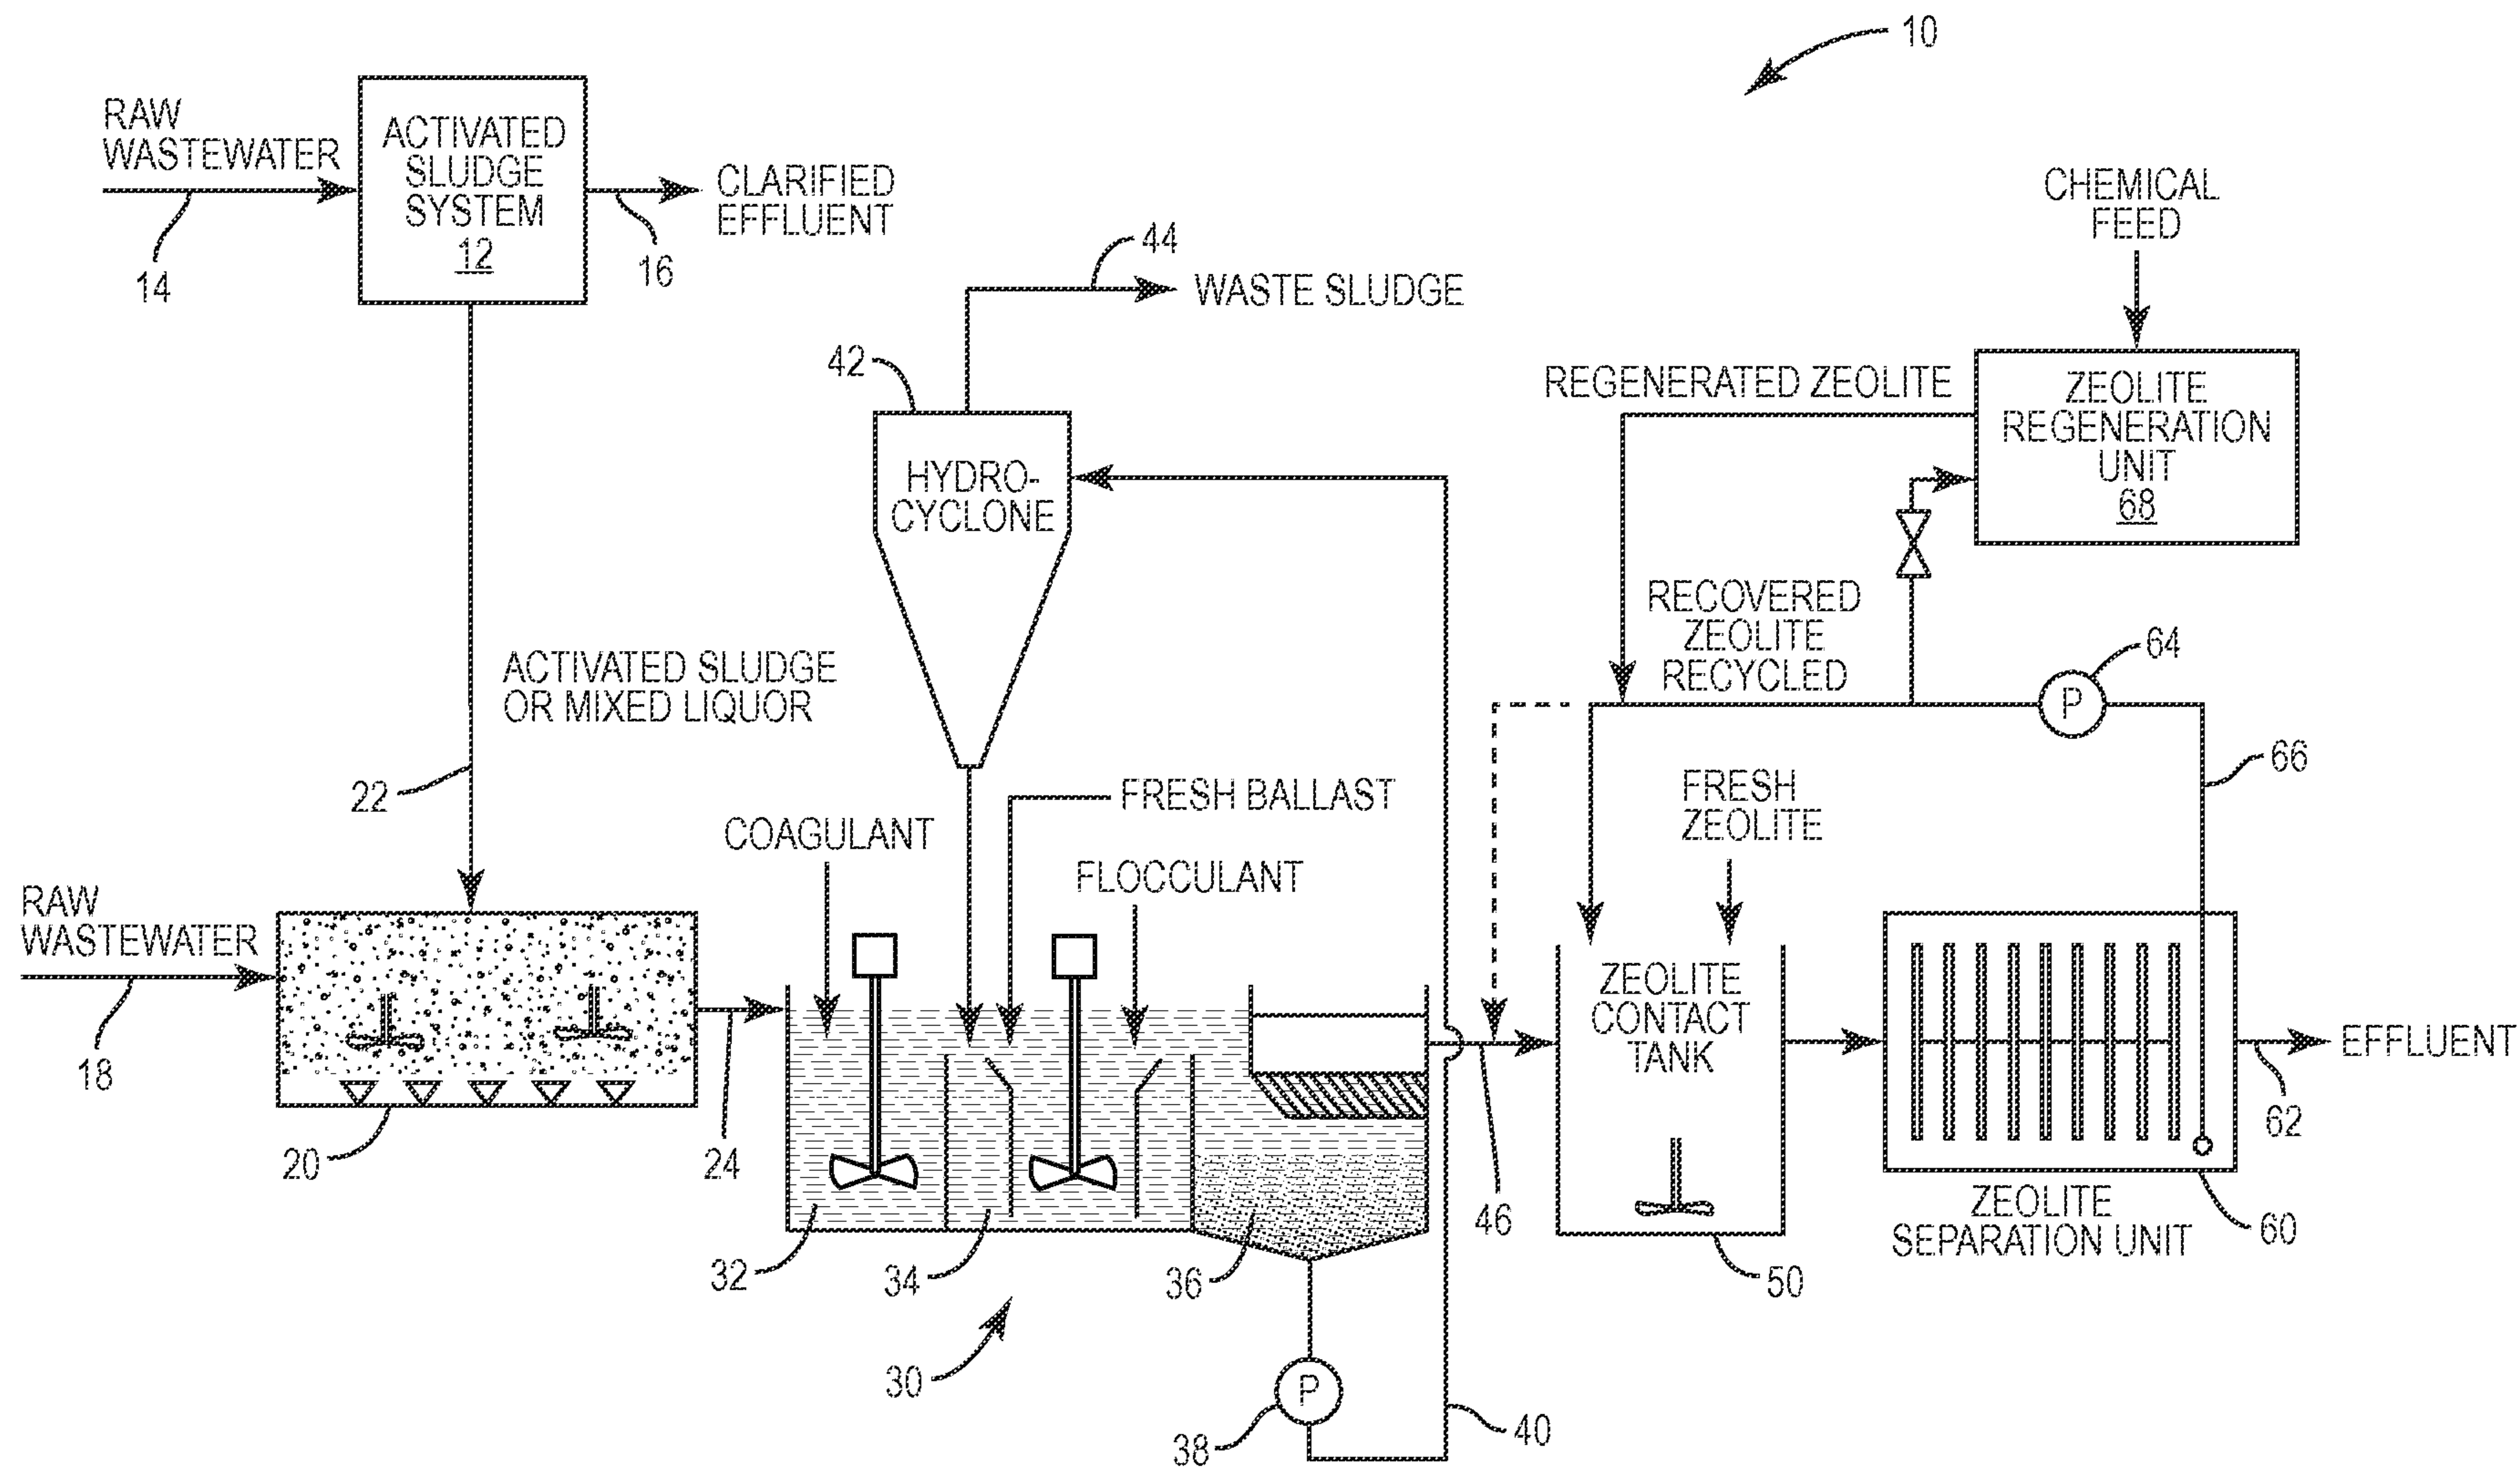


FIG. 1