

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number  
WO 2004/111416 A1

- (51) International Patent Classification<sup>7</sup>: F02D 19/08, 41/00, F02P 5/152
- (21) International Application Number: PCT/IB2004/001829
- (22) International Filing Date: 4 June 2004 (04.06.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 2003-167952 12 June 2003 (12.06.2003) JP
- (71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 (JP).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ODA, Tomihisa [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP). NIIMI, Kuniaki [JP/JP]; Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SPARK IGNITION INTERNAL COMBUSTION ENGINE

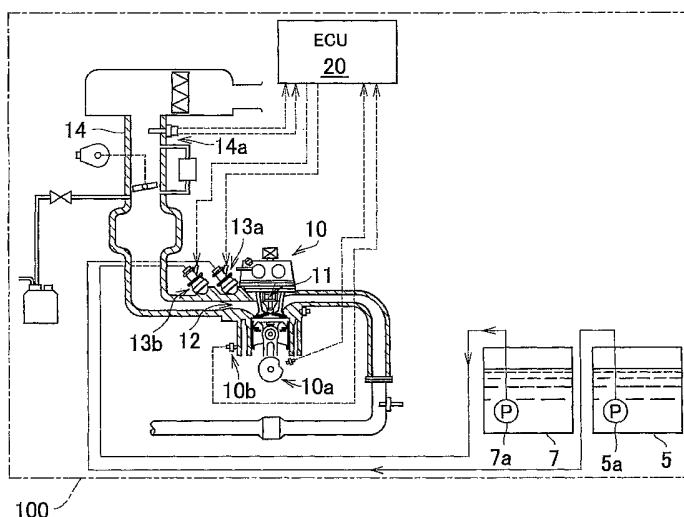

(57) Abstract: A low-octane fuel and a high-octane fuel stored in a low-octane fuel tank (5) and a high-octane fuel tank (7), both having known octane numbers, are injected from fuel injection valves (13a, 13b) into an intake port (12) at a mixing proportion that achieves a standard octane number set in accordance with the engine operation state. If knocking occurs during a predetermined steady engine operation state, the knocking is detected by a knock sensor (10b) and, corresponding to the knocking, the ignition timing is retarded from a basic ignition timing. A deviation in octane number is determined from the amount of ignition timing retardation with reference to a map, and is then corrected by the intake air pressure. On the basis of the corrected deviation in octane number, a deviation in the mixing proportion of the high-octane fuel is determined with reference to a map. The thus-determined deviation is added to a target mixing proportion computed corresponding to the standard octane number, thereby computing the present mixing proportion.

WO 2004/111416 A1

## SPARK IGNITION INTERNAL COMBUSTION ENGINE

BACKGROUND OF THE INVENTION1. Field of the Invention

[0001] The invention relates to a spark ignition internal combustion engine in which a high-octane fuel and a low-octane fuel are mixed by a fuel mixture means adapted for mixing high and low-octane fuels at variable mixing ratios and a mixed fuel is supplied into a combustion chamber.

2. Description of the Related Art

[0002] Low-octane fuels are good in ignitability but poor in antiknock property, whereas high-octane fuels are poor in ignitability but good in antiknock property. Internal combustion engines in which a low-octane fuel and a high-octane fuel are mixed and supplied to an engine by fuel injection valves so as to meet an operating condition of the engine are known, as described in Japanese Patent Application Laid-Open Publication No. 2001-050070.

[0003] In such an internal combustion engine, however, the octane number of a mixed fuel supplied into the combustion chamber sometimes deviates from a target octane number due to the tolerance of a mixing device of the fuel injection valve or the like, although the high-octane fuel and the low-octane fuel respectively have predetermined octane numbers. According to the existing technologies, there is no method for detecting this deviation in octane number. Therefore, if the octane number deviates, the engine is operated with the deviated octane number remaining, and therefore cannot exactly deliver intended operation performance, that is, intended accelerating performance, intended fuel consumption, and intended exhaust emissions.

[0004] Therefore, in an apparatus described in Japanese Patent Application Laid-Open Publication No. 4-234571, the octane number of fuel is estimated, and an ignition timing corresponding to the estimated octane number is set so that the engine can always operate at a knocking limit. However, the apparatus described in Japanese Patent Application Laid-Open Publication No. 4-234571 merely performs a generally-termed symptomatic treatment in which a deviation in the octane number of fuel is met by adjustment in the ignition timing, and does not provide a radical cure in which the octane number of fuel is set to a predetermined value. That is, since the mixing proportion is not determined, the apparatus is not able to eliminate deviation in the mixing proportion. In

the case of a large deviation in the mixing proportion, the apparatus may be incapable of achieving a practical effect.

### SUMMARY OF THE INVENTION

[0005] It is an object of the invention to provide a spark ignition internal combustion engine in which a high-octane fuel and a low-octane fuel are mixed and supplied to the engine, and the mixing proportion between the high-octane fuel and the low-octane fuel in the mixed fuel can be determined.

[0006] In accordance with a first aspect of the invention, a spark ignition internal combustion engine in which a high-octane fuel and a low-octane fuel are mixed so that a mixing proportion is variable by fuel mixture means and a mixed fuel is supplied into a combustion chamber, is characterized in that a standard octane number is set in accordance with an operation state of the spark ignition internal combustion engine, and a first mixing proportion between the high-octane fuel and the low-octane fuel is adjusted so as to achieve the standard octane number, and a reference ignition timing corresponding to the standard octane number is set, and knocking measurement means and mixing proportion estimation means are provided in the spark ignition internal combustion engine, and the knocking measurement means measures a state of occurrence of knocking during a predetermined operation state of the spark ignition internal combustion engine, and the mixing proportion estimation means determines a deviation value between a second mixing proportion between the high-octane fuel and the low-octane fuel really supplied into the combustion chamber and the first mixing proportion, the deviation value being set based on the measured state of occurrence of knocking, and estimates the second mixing proportion between the high-octane fuel and the low-octane fuel based on the deviation value.

[0007] In the first aspect of the invention, the high-octane fuel and the low-octane fuel are mixed at a variable mixing proportion and supplied into a combustion chamber by the fuel mixture means. A standard octane number is set in accordance with the operation state, and the mixing proportion between the high-octane fuel and the low-octane fuel is adjusted so as to achieve the standard octane number, and a reference ignition timing corresponding to the standard octane number is set. The state of occurrence of knocking during a predetermined operation state is measured. On the basis of the measured state of occurrence of knocking, a deviation from the set mixing

proportion is determined, and a mixing proportion between the low-octane fuel and the high-octane fuel is estimated. Therefore, it becomes possible to easily estimate the mixing proportion between the low-octane fuel and the high-octane fuel.

[0008] In the first aspect of the invention, if the second mixing proportion is different from the first mixing proportion, an amount of the high-octane fuel and/or an amount of the low-octane fuel supplied into the combustion chamber are/is changed so that the second mixing proportion becomes substantially equal to the first mixing proportion.

[0009] In the first aspect or a form related thereto, if knocking does not occur during the predetermined operation state, the ignition timing may be advanced. Therefore, the engine can be operated in a region of a higher efficiency, so that the fuel economy and the engine output will improve.

[0010] In the first aspect or a form related thereto, if knocking occurs during the predetermined operation state, a proportion of the high-octane fuel may be increased. Therefore, recurrence of knocking can be curbed.

[0011] In the first aspect or a form related thereto, the knocking measurement means executes a knock control of retarding the ignition timing in accordance with a strength of knocking when knocking occurs, and the mixing proportion estimation means estimates the second mixing proportion based on an amount of retardation of the ignition timing caused by the knock control.

[0012] In the first aspect or a form related thereto, the amount of retardation of the ignition timing caused by the knock control may be corrected by an intake air temperature. Therefore, the influence of the intake air temperature is eliminated, so that the precision in estimation of the mixing proportion becomes good.

[0013] In the first aspect or a form related thereto, the fuel mixture means may mix the high-octane fuel and the low-octane fuel so as to achieve the standard octane number based on a known nominal octane number of the high-octane fuel and a known nominal octane number of the low-octane fuel.

[0014] In the first aspect or a form related thereto, the spark ignition internal combustion engine may further comprise actual octane number detection means adapted for detecting an actual octane number of the low-octane fuel and an actual octane number of the high-octane fuel, wherein the fuel mixture means sets a third mixing proportion between the high-octane fuel and the low-octane fuel in accordance with the operation state so as to achieve the standard octane number based on the actual octane number of the high-octane fuel detected by the actual octane number detection means and the actual

octane number of the low-octane fuel detected by the actual octane number detection means. Therefore, due to the provision of the actual octane number detection means, the actual octane numbers of the low-octane fuel and the high-octane fuel are detected even if the octane numbers of the two fuels are not known beforehand. On the basis of the detected actual octane numbers, the mixing proportion between the high-octane fuel and the low-octane fuel is set so as to achieve the standard octane number. Then, the state of occurrence of knocking during the predetermined operation state is measured by the knocking measurement means. On the basis of the measured state of occurrence of knocking, the mixing proportion estimation means determines a deviation from the set mixing proportion as described above, and thereby estimates the mixing proportion between the low-octane fuel and the high-octane fuel.

[0015] In the first aspect or a form related thereto, the actual octane number detection means may set a proportion of the low-octane fuel at 100% to measure the state of occurrence of knocking during the predetermined operation state, and may determine the actual octane number of the low-octane fuel based on the measured state of occurrence of knocking, and may mix the low-octane fuel whose actual octane number has been determined with the high-octane fuel at a predetermined proportion, and may measure the state of occurrence of knocking during the predetermined operation state, and may determine the actual octane number of the high-octane fuel based on the measured state of occurrence of knocking.

[0016] In the first aspect or a form related thereto, the spark ignition internal combustion engine may further comprise a fuel separator device that separates a fuel into the high-octane fuel and the low-octane fuel, wherein the mixing proportion estimation means determines whether the fuel separator device is normally operating so as to separate the fuel into the high-octane fuel having a predetermined octane number and the low-octane fuel having a predetermined octane number. Therefore, the high-octane fuel and the low-octane fuel are produced from a fuel through separation by the fuel separator device. Furthermore, it can be determined by the mixing proportion estimation means whether the fuel separator device is normally operating so as to separate the fuel into the high-octane fuel having a predetermined octane number and the low-octane fuel having a predetermined octane number.

[0017] In the first aspect or a form related thereto, in the fuel separator device, a fourth mixing proportion in accordance with the operation state is set so as to attain the standard octane number on an assumption that the separated high-octane fuel and the

separated low-octane fuel have the predetermined octane numbers, and the mixing proportion estimation means determines that an operation of the fuel separator device is abnormal if the deviation value between the second mixing proportion determined based on the state of occurrence of knocking and the fourth mixing proportion is greater than a predetermined criterion value.

**[0018]** In accordance with a second aspect of the invention, a method for estimating a mixing proportion between a high-octane fuel and a low-octane fuel which is supplied into a combustion chamber of a spark ignition internal combustion engine, characterized by comprising the steps of: a first step of setting a standard octane number in accordance with an operation state of the spark ignition internal combustion engine; a second step of adjusting a first mixing proportion between the high-octane fuel and the low-octane fuel so as to achieve the standard octane number; a third step of setting a reference ignition timing corresponding to the standard octane number; a fourth step of measuring a state of occurrence of knocking during a predetermined operation state; a fifth step of determining a deviation value between a second mixing proportion between the high octane fuel and the low octane fuel really supplied into the combustion chamber and the first mixing proportion, the deviation value being set based on the measured state of occurrence of knocking; and a sixth step of estimating the second mixing proportion between the high-octane fuel and the low-octane fuel based on the deviation value.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0019]** FIG. 1 is a diagram illustrating a construction of a first embodiment and its modifications.

**[0020]** FIG. 2 is a diagram illustrating a construction of a sixth embodiment.

**[0021]** FIG. 3 is a flowchart illustrating a control in the first embodiment.

**[0022]** FIG. 4 is a flowchart illustrating a control in a second embodiment.

**[0023]** FIG. 5 is a flowchart illustrating a control in a third embodiment.

**[0024]** FIG. 6 is a flowchart illustrating a control in a fourth embodiment.

**[0025]** FIG. 7 is a flowchart illustrating a control in a fifth embodiment.

**[0026]** FIG. 8 is a flowchart illustrating a sub-routine of computing the octane number of a low-octane fuel in step 100A in FIG. 7.

**[0027]** FIG. 9 is a flowchart illustrating a sub-routine of computing the octane number of a high-octane fuel in step 100B in FIG. 7.

[0028] FIG. 10 is a flowchart illustrating a control in the sixth embodiment.

[0029] FIG. 11 is a map that indicates a target octane number corresponding to the condition of operation.

[0030] FIG. 12 is a diagram illustrating changes in the octane number depending on the mixing proportion between the low-octane fuel and the high-octane fuel.

[0031] FIG. 13 is a map that indicates a total fuel injection amount corresponding to the operation condition.

[0032] FIG. 14 is a map that indicates a basic ignition timing corresponding to the operation condition.

[0033] FIG. 15 is a map indicating a relationship between the retardation of the ignition timing by the knock control and the deviation in octane number.

[0034] FIG. 16 is a map that indicates an intake air temperature-based correction value for the octane number deviation.

[0035] FIG. 17 is a map that indicates the (post-correction) octane number deviation and the mixing proportion correction amount.

[0036] FIG. 18 is a diagram illustrating operation and effect of the second embodiment.

[0037] FIG. 19 is a diagram illustrating operation and effect of the third embodiment.

[0038] FIG. 20 is a diagram illustrating operation and effect of the fourth embodiment.

[0039] FIG. 21 is a map indicating a relationship between the octane number and the retardation of the ignition timing by the knock control in accordance with the fifth embodiment.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0040] Preferred embodiments of the invention will be described hereinafter with reference to the accompanying drawings. FIG. 1 is a schematic diagram illustrating a construction of a first embodiment. Referring to FIG. 1, a low-octane fuel tank 5 of a vehicle 100 stores a low-octane fuel that has a relatively low octane number, and a high-octane fuel tank 7 stores a high-octane fuel that has a relatively high octane number.

[0041] The low-octane fuel and the high-octane fuel are supplied to fuel injection valves 13a, 13b via a low-octane fuel pump 5a and a high-octane fuel pump 7a,

respectively. The two fuel injection valves 13a, 13b are attached to an intake port 12 of a spark ignition internal combustion engine (hereinafter, simply referred to as "engine") that has an ignition plug 11. The fuel injection valves 13a, 13b inject into the intake port 12 the low-octane fuel and the high-octane fuel at predetermined proportions suitable for the operating condition in accordance with a command from an electronic control unit (ECU) 20. The injected fuels are mixed in the intake port 12 and a combustion chamber.

[0042] Although in this embodiment, the two fuel injection valves 13a, 13b are provided on the intake port 12, it is also possible to provide one of the two injection valves as a fuel injection valve that injects fuel directly into the cylinder, or to provide one fuel injection valve capable of injecting two kinds of fuels into the intake port 12.

[0043] The engine 10 is provided with a crank angle sensor 10a for detecting the engine revolution speed, and a knock sensor 10b for measuring the state of occurrence of knocking. Furthermore, an intake pipe 14 is provided with an air flow meter 14a for detecting the amount of intake air as a load. The air flow meter 14a has a built-in intake air temperature sensor for detecting the temperature of intake air. Values detected by these sensors and meter are sent to the ECU 20. Various other sensors and the like send signals to the ECU 20, and the ECU 20 sends signals to many control devices and the like. However, sensors, devices and the like that are not directly relevant to the invention are omitted from the illustration of the drawings.

[0044] If the knock sensor 10b detects knocking, the ECU 20 retards the ignition timing of the ignition plug 11 so that knocking does not occur. This control will be hereinafter referred to as "knock control".

[0045] In this embodiment, an octane number of a mixed fuel formed by the fuel injection valves 13a, 13b which is to be employed for the operating condition determined by the amount of intake air and the revolution speed, that is, a target mixed fuel octane number TMRON, is set. FIG. 11 shows a map of the target mixed fuel octane number TMRON. In the map, the mixed fuel octane number TMRON is set low for low loads, and is set high for high loads.

[0046] FIG. 12 is a diagram illustrating mixture of the low-octane fuel and the high-octane fuel performed by the fuel injection valves 13a, 13b in order to achieve the mixed fuel octane number MRON set as mentioned above. For example, the mixed fuel octane number MRON of a mixture formed by mixing a low-octane fuel having an octane number LRON at a proportion RLRON and a high-octane fuel having an octane number HRON at a proportion RHRON ( $RLRON+RHRON=1$ ) is given as in MRON



$RLRON \times LRON \times HRON$ .

[0047] By rewriting this, the following equations are given.

Proportion of high-octane fuel  $RHRON = (MRON - (RLRON \times LRON)) / HRON$

Proportion of low-octane fuel  $RLRON = (MRON - (RHRON \times HRON)) / LRON$

[0048] The first embodiment adopts known nominal octane numbers set as the low-octane fuel's octane number  $LRON$  and the high-octane fuel's octane number  $HRON$ .

[0049] FIG. 3 is a map indicating the total quantity of injection  $QT$  of a mixed fuel having a mixed fuel octane number  $MRON$  as mentioned above, corresponding to the engine operating condition. FIG. 14 is a diagram illustrating the basic ignition timing employed in the operation based on a fuel having a mixed fuel octane number  $MRON$  set as indicated in FIG. 11. The basic ignition timing is set so as to produce as great torque as possible while avoiding occurrence of knocking provided that mixed fuel octane numbers  $MRON$  are given as predetermined for various operating conditions. That is, the basic ignition timing is set at MBT (minimum advance for best torque) if this setting is allowed. In regions where the setting at the MBT raises the possibility of occurrence of knocking, the basic ignition timing is set on the retarded side of the MBT.

[0050] However, due to the manufacturing errors of the fuel injection valves 13a, 13b or the like, there are cases where the mixed fuel octane number  $MRON$  predetermined for the operating condition is not injected. Therefore, in this embodiment, if knocking occurs during a certain operating state, for example, a steady operating state of about 50 km/h, the deviation of the actual mixed fuel octane number from a target octane number is determined from the situation of occurrence of the knocking, and the deviation is corrected by the intake air temperature, and then is used to compute a correction amount for the mixing proportion. Then, the correction amount is added to the present mixing proportion to determine a mixing proportion.

[0051] FIG. 3 is a flowchart illustrating a process of executing a control in accordance with the first embodiment. First, it is determined in step 101 whether the present operation state is a predetermined steady operation state. If the result of determination is negative, the process immediately ends. If the result of determination is affirmative, the process proceeds to step 102, in which it is determined whether knocking has occurred, from the operation of the knock sensor 10b, more specifically, on the basis of whether the knock sensor has detected knocking and, on the basis of the detection, the ignition timing has been retarded. If the result of determination is negative, that is, if knocking has not occurred, the process immediately ends.

[0052] If the result of determination in step 102 is affirmative, that is, if knocking has occurred, the process proceeds to step 103, in which an amount of retardation  $KNKSA$  in the ignition timing based on a knock control is input. Subsequently in step 104, a deviation  $DRON$  in the octane number of fuel corresponding to the amount of retardation  $KNKSA$  of the ignition timing based on the knock control is determined from a pre-stored map as shown in FIG. 15.

[0053] Since knocking is affected by the intake air temperature, a temperature correction factor  $KT$  for the deviation  $DRON$  in octane number is determined in step 105 from a pre-stored map as shown in FIG. 16. Subsequently in step 106, the deviation  $DRON$  in octane number is multiplied by the temperature correction factor  $KT$  to compute a post-temperature correction deviation  $DRONF$  in octane number corresponding to a standard temperature state. Subsequently in step 107, a mixing proportion correction amount  $RDRONF$  corresponding to the post-temperature correction octane number deviation  $DRONF$  is determined from a map as shown in FIG. 17.

[0054] The mixing proportion correction amount  $RDRONF$  is a correction amount that is to be used for a present target high-octane fuel proportion  $RHRONi$  computed corresponding to the present target octane number  $TMRON$  set as in FIG. 11. Subsequently in step 108, the mixing proportion correction amount  $RDRONF$  determined in step 107 is added to the present target high-octane fuel proportion  $RHRONi$  to determine a new high-octane fuel proportion  $RHRONi$ . Subsequently in step 109, the new mixing proportion  $RHRONi$  of the high-octane fuel determined in step 108 is subtracted from 1 to determine a new mixing proportion  $RLRONi$  of the low-octane fuel.

[0055] Subsequently in step 110, a total fuel injection quantity  $QT$  for the present operation state is input from the map indicated in FIG. 13. In steps 111 and 112, the total fuel injection quantity  $QT$  input in step 110 is multiplied by the mixing proportion  $RHRONi$  of the high-octane fuel and the mixing proportion  $RLRONi$  of the low-octane fuel determined in steps 108 and 109, respectively, to determine new injection quantities  $QHi$ ,  $QLi$  of the high-octane fuel and the low-octane fuel.

[0056] The first embodiment is constructed, and operates as described above. That is, if knocking occurs in a predetermined steady operation state and the ignition timing is retarded by the knock control, the deviation in octane number is computed from the amount of retardation, and then is corrected so as to offset the influence of the intake air temperature. The thus-corrected octane number deviation is used to compute a deviation in the mixing proportion. On the basis of the computed deviation, the mixing

proportions of the high-octane fuel and the low-octane fuel are computed and then corrected to attain target mixing proportions.

[0057] A second embodiment will next be described.

FIG. 4 is a flowchart illustrating a control of a second embodiment as a first modification of the first embodiment. Steps 101 to 112 are the same as those in the first embodiment. The second embodiment is different from the first embodiment in that step 113 is added, in which the retardation in timing caused by the knock control is removed.

[0058] FIG. 18 illustrates concept and effect of a control of the second embodiment. As indicated in FIG. 18, if knocking occurs, the ignition timing is retarded by the knock control. However, the high-octane fuel proportion RHRON is increased, so that occurrence of knocking becomes unlikely and therefore the ignition timing is returned to the original timing. Hence, the fuel consumption reduces (the fuel efficiency improves), and deterioration in fuel economy can be prevented.

[0059] A third embodiment will next be described. FIG. 5 is a flowchart illustrating a control in accordance with the third embodiment.

Steps 101 to 113 are the same as those in the second embodiment. However, the third embodiment is different from the second embodiment in that step 114 is added, in which the ignition timing is advanced to MBT if a negative determination is made in step 102, that is, if knocking does not occur.

[0060] FIG. 19 illustrates concept and effect of the control of the third embodiment. As indicated in FIG. 19, if knocking does not occur, the ignition timing is advanced to MBT, so that the fuel consumption reduces (the fuel efficiency improves) and the fuel economy improves. If the basic ignition timing SA is set at the MBT, there is no effect achieved. However, if the basic ignition timing SA is set at a retarded side of the MBT in order to prevent occurrence of knocking, the ignition timing can be advanced to the MBT. Therefore, the aforementioned effect can be achieved.

[0061] Next, a fourth embodiment will be described. FIG. 6 is a flowchart illustrating a control in accordance with the fourth embodiment. Steps 101 to 113 are the same as those in the second embodiment. However, the fourth embodiment is different from the second embodiment in that step 114a is added. In step 114a, the low-octane fuel proportion is increased if a negative determination is made in step 102, that is, if knocking does not occur.

[0062] FIG. 20 is a diagram illustrating concept of a control in accordance with the fourth embodiment. If knocking does not occur during a predetermined steady

operation state, increasing the low-octane fuel proportion will eventually cause knocking. Since increasing the proportion of the low-octane fuel eventually causes knocking, an affirmative determination will be made in step 102, so that execution of steps 103 and 113 will follow, whereby the mixing proportion will be adjusted again to an optimum proportion. Due to the above-described arrangement, the fourth embodiment, that is, the third modification of the first embodiment, prevents a continued use of a fuel having an unnecessarily high octane number.

**[0063]** In the first to fourth embodiments, the mixing proportion between a high-octane fuel and a low-octane fuel is set in accordance with the operation state so as to achieve a standard octane number on the assumption that the high-octane fuel and the low-octane fuel have known nominal octane numbers. However, there are cases where the octane numbers of a high-octane fuel and a low-octane fuel are unknown, or the nominal octane number of a fuel deviates from its actual octane number.

**[0064]** A fifth embodiment copes with these cases. The fifth embodiment will next be described. In the fifth embodiment, the octane numbers of a low-octane fuel and a high-octane fuel that are stored in the low-octane fuel tank 5a and the high-octane fuel tank 7a, respectively, are determined, and a mixing proportion between the two fuels is set on the basis of the determined octane numbers of the fuels. If a deviation from the mixing proportion occurs, the deviated mixing proportion is determined.

**[0065]** FIG. 7 shows a flowchart illustrating a control in accordance with the fifth embodiment. Steps 101 to 112 are the same as those in the first embodiment. In the fifth embodiment, however, steps 100A to 100D are executed prior to step 101. In step 100A, a low-octane fuel octane number LRON is computed. In step 100B, a high-octane fuel octane number HRON is computed. Subsequently in step 100C, the octane numbers LRON and HRON computed in steps 100A and 100B are input. In step 100D, on the basis of the input LRON and HRON, a mixing proportion corresponding to the operation state is set.

**[0066]** FIG. 8 is a flowchart illustrating a routine executed in step 100A to compute the octane number LRON of the low-octane fuel. If it is determined in step A1 that the present operation state is a predetermined operation state, the process proceeds to step A2, in which the proportion of the low-octane fuel is set to 100%. Then, if it is recognized in step A3 that knocking has occurred, the amount of retardation in ignition timing caused by the knock control in response to the occurrence of knocking is input in step A4. Subsequently in step A5, a low-octane fuel octane number LRON is computed

from a map shown in FIG. 21. If the determination in step A2 is negative, the process immediately ends. If occurrence of knocking is not recognized in step A3, the ignition timing is advanced in step A6 so as to cause occurrence of knocking.

[0067] FIG. 9 is a flowchart illustrating a routine executed in step 100B to compute the octane number HRON of the high-octane fuel. If it is determined in step B1 that the present operation state is a predetermined operation state, the process proceeds to step B2, in which the low-octane fuel octane number LRON determined as described above is input.

[0068] Subsequently in step B3, the low-octane fuel, whose octane number has been found, and the high-octane fuel, whose octane number is unknown, are mixed at a predetermined proportion. It is preferable that the proportion be set so as to provide a mixed fuel that has a relatively low octane number, for example, the low-octane fuel:the high-octane fuel=9:1, and is therefore likely to cause knocking.

[0069] Then, if occurrence of knocking is recognized in step B4, the amount of retardation in the ignition timing caused by the knock control in response to the occurrence of knocking is input in step B5. Subsequently in step B6, an octane number MRON of the mixed fuel obtained by mixing the two fuels at the predetermined proportion as described above is computed from the map shown in FIG. 21.

[0070] From  $MRON = HRON \times TRHRON + LRON \times (1 - TRHRON)$  where TRHRON is the proportion of the high-octane fuel,  $HRON = LRON + (MRON - LRON) / TRHRON$  holds. On the basis of the equation  $HRON = LRON + (MRON - LRON) / TRHRON$ , the octane number HRON of the high-octane fuel is determined in step B7. If the determination in step B1 is negative, the process immediately ends. If occurrence of knocking is not recognized in step B4, the ignition timing is advanced in step B4 so as to cause occurrence of knocking.

[0071] The fifth embodiment operates as described above. That is, the actual octane numbers of the low-octane fuel and the high-octane fuel are determined, and then the two fuels are mixed so as to attain a target octane number. Therefore, a fuel having a standard octane number in accordance with the operation state can be obtained even in the case where the octane numbers of the high-octane fuel and the low-octane fuel are unknown, or the octane numbers of the high-octane fuel and the low-octane fuel deviate from their nominal octane numbers.

[0072] Next, a sixth embodiment will be described.

[0073] FIG. 2 is a diagram illustrating a structure of the sixth embodiment. In

addition to the arrangement of the first to fifth embodiments shown in FIG. 1, the sixth embodiment further include a fuel tank 3 storing a fuel, and a fuel separator device 4 for separating the fuel supplied from the fuel tank 3 via a fuel pump 3a into a high-octane fuel and a low-octane fuel. Although not illustrated in detail, the fuel separator device 4 is equipped with, for example, a separating membrane having a good permeability for aromatic components, and causes the fuel to flow toward the separating membrane, and therefore separates the fuel into a high-octane fuel containing a large amount of aromatic components which passes through the separating membrane, and a low-octane fuel containing a reduced amount of aromatic components which is recovered without passing through the separating membrane.

[0074] However, the fuel separator device 4 is not limited to this type of device, but may be of any type of device if the device is able to separate a fuel into a high-octane fuel and a low-octane fuel. For example, the fuel separator device 4 may be of a type in which the separation is accomplished by fractional distillation. In any type, the low-octane fuel and the high-octane fuel separated by the fuel separator device 4 are stored into a low-octane fuel tank 5 and a high-octane fuel tank 7 similar to those of the first and second embodiments.

[0075] According to the separating membrane type fuel separator device 4 in the sixth embodiment, a commercially available regular gasoline, having an octane number of about 90, can be separated into a gasoline having an octane number of about 86 and a gasoline having an octane number of about 100 if the separator device normally operates. A commercially available high-octane gasoline, having an octane number of about 100, can be separated by the separator device 4 into a gasoline having an octane number of about 96 and a gasoline having an octane number of about 110.

[0076] In the sixth embodiment, therefore, a target octane number of a mixed fuel, the ignition timing and the like are set on the assumption that if a regular gasoline is stored in the fuel tank 3, a low-octane fuel having an octane number of 86 and a high-octane fuel having an octane number of 100 are stored into their respective tanks, and if a high-octane gasoline is stored in the fuel tank 3, a low-octane fuel having an octane number of 96 and a high-octane fuel having an octane number of 110 are stored into their respective tanks. In the sixth embodiment, knocking is avoided during a predetermined steady operation state.

[0077] On the aforementioned preconditions, a control illustrated by a flowchart shown in FIG. 10 is executed. Steps 101 to 107 are the same as those in the first

embodiment. However, the sixth embodiment is different from the first embodiment in that step 107 is followed by execution of steps 107E to 107G, and steps 108 to 112 are omitted. In step 107E, it is determined whether the RDRONF computed in step 107 is greater than a predetermined criterion value JSEP. If the determination in step 107E is affirmative, it is determined in step 107F that the fuel separator device has abnormality. If the determination in step 107E is negative, it is determined in step 107G that the fuel separator device does not have abnormality. After that, the process ends. If it is determined that the fuel separator device has no abnormality, it is also possible to execute steps 108 to 112 in the first embodiment in order to determine a mixing proportion deviating from the standard mixing proportion due to abnormality in a portion or the like other than the fuel separator device. Since the sixth embodiment operates as described above, it can be determined whether the fuel separator device 4 is normally operating so as to separate a fuel into a high-octane fuel having a predetermined octane number and a low-octane fuel having a predetermined octane number.

CLAIMS:

1. A spark ignition internal combustion engine in which a high-octane fuel and a low-octane fuel are mixed so that a mixing proportion is variable by fuel mixture means (13a, 13b) and a mixed fuel is supplied into a combustion chamber,

characterized in that a standard octane number is set in accordance with an operation state of the spark ignition internal combustion engine, and a first mixing proportion between the high-octane fuel and the low-octane fuel is adjusted so as to achieve the standard octane number, and a reference ignition timing corresponding to the standard octane number is set, and knocking measurement means (10b) and mixing proportion estimation means are provided in the spark ignition internal combustion engine, and the knocking measurement means (10b) measures a state of occurrence of knocking during a predetermined operation state of the spark ignition internal combustion engine, and the mixing proportion estimation means determines a deviation value between a second mixing proportion between the high-octane fuel and the low-octane fuel really supplied into the combustion chamber and the first mixing proportion, the deviation value being set based on the measured state of occurrence of knocking, and estimates the second mixing proportion between the high-octane fuel and the low-octane fuel based on the deviation value.

2. The spark ignition internal combustion engine according to claim 1, characterized in that if the second mixing proportion is different from the first mixing proportion, an amount of the high-octane fuel and/or an amount of the low-octane fuel supplied into the combustion chamber are/is changed so that the second mixing proportion becomes substantially equal to the first mixing proportion.

3. The spark ignition internal combustion engine according to claim 1 or 2, characterized in that if knocking does not occur during the predetermined operation state, the ignition timing is advanced.

4. The spark ignition internal combustion engine according to any one of claims 1 to 3, characterized in that if knocking occurs during the predetermined operation state, a proportion of the high-octane fuel is increased.



5. The spark ignition internal combustion engine according to any one of claims 1 to 4, characterized in that the knocking measurement means (10b) executes a knock control of retarding the ignition timing in accordance with a strength of knocking when knocking occurs, and the mixing proportion estimation means estimates the second mixing proportion based on an amount of retardation of the ignition timing caused by the knock control.

6. The spark ignition internal combustion engine according to claim 5, characterized in that the amount of retardation of the ignition timing caused by the knock control is corrected by an intake air temperature.

7. The spark ignition internal combustion engine according to any one of claims 1 to 6, characterized in that the fuel mixture means (13a, 13b) mixes the high-octane fuel and the low-octane fuel so as to achieve the standard octane number based on a known nominal octane number of the high-octane fuel and a known nominal octane number of the low-octane fuel.

8. The spark ignition internal combustion engine according to any one of claims 1 to 7, characterized by further comprising actual octane number detection means adapted for detecting an actual octane number of the low-octane fuel and an actual octane number of the high-octane fuel, wherein the fuel mixture means (13a, 13b) sets a third mixing proportion between the high-octane fuel and the low-octane fuel in accordance with the operation state so as to achieve the standard octane number based on the actual octane number of the high-octane fuel detected by the actual octane number detection means and the actual octane number of the low-octane fuel detected by the actual octane number detection means.

9. The spark ignition internal combustion engine according to claim 8, characterized in that the actual octane number detection means sets a proportion of the low-octane fuel at 100% to measure the state of occurrence of knocking during the predetermined operation state, and determines the actual octane number of the low-octane fuel based on the measured state of occurrence of knocking, and mixes the low-octane fuel whose actual octane number has been determined with the high-octane fuel at a predetermined proportion, and measures the state of occurrence of knocking during the

predetermined operation state, and determines the actual octane number of the high-octane fuel based on the measured state of occurrence of knocking.

10. The spark ignition internal combustion engine according to any one of claims 1 to 9, characterized by further comprising a fuel separator device (4) that separates a fuel into the high-octane fuel and the low-octane fuel, wherein the mixing proportion estimation means determines whether the fuel separator device (4) is normally operating so as to separate the fuel into the high-octane fuel having a predetermined octane number and the low-octane fuel having a predetermined octane number.

11. The spark ignition internal combustion engine according to claim 10, characterized in that, in the fuel separator device (4), a fourth mixing proportion in accordance with the operation state is set so as to attain the standard octane number on an assumption that the separated high-octane fuel and the separated low-octane fuel have the predetermined octane numbers, and the mixing proportion estimation means determines that an operation of the fuel separator device (4) is abnormal if the deviation value between the second mixing proportion determined based on the state of occurrence of knocking and the fourth mixing proportion is greater than a predetermined criterion value.

12. A method for estimating a mixing proportion between a high-octane fuel and a low-octane fuel which is supplied into a combustion chamber of a spark ignition internal combustion engine, characterized by comprising the steps of:

a first step of setting a standard octane number in accordance with an operation state of the spark ignition internal combustion engine;

a second step of adjusting a first mixing proportion between the high-octane fuel and the low-octane fuel so as to achieve the standard octane number;

a third step of setting a reference ignition timing corresponding to the standard octane number;

a fourth step of measuring a state of occurrence of knocking during a predetermined operation state;

a fifth step of determining a deviation value between a second mixing proportion between the high octane fuel and the low octane fuel really supplied into the combustion chamber and the first mixing proportion, the deviation value being set based on the measured state of occurrence of knocking; and

a sixth step of estimating the second mixing proportion between the high-octane fuel and the low-octane fuel based on the deviation value.

FIG. 1



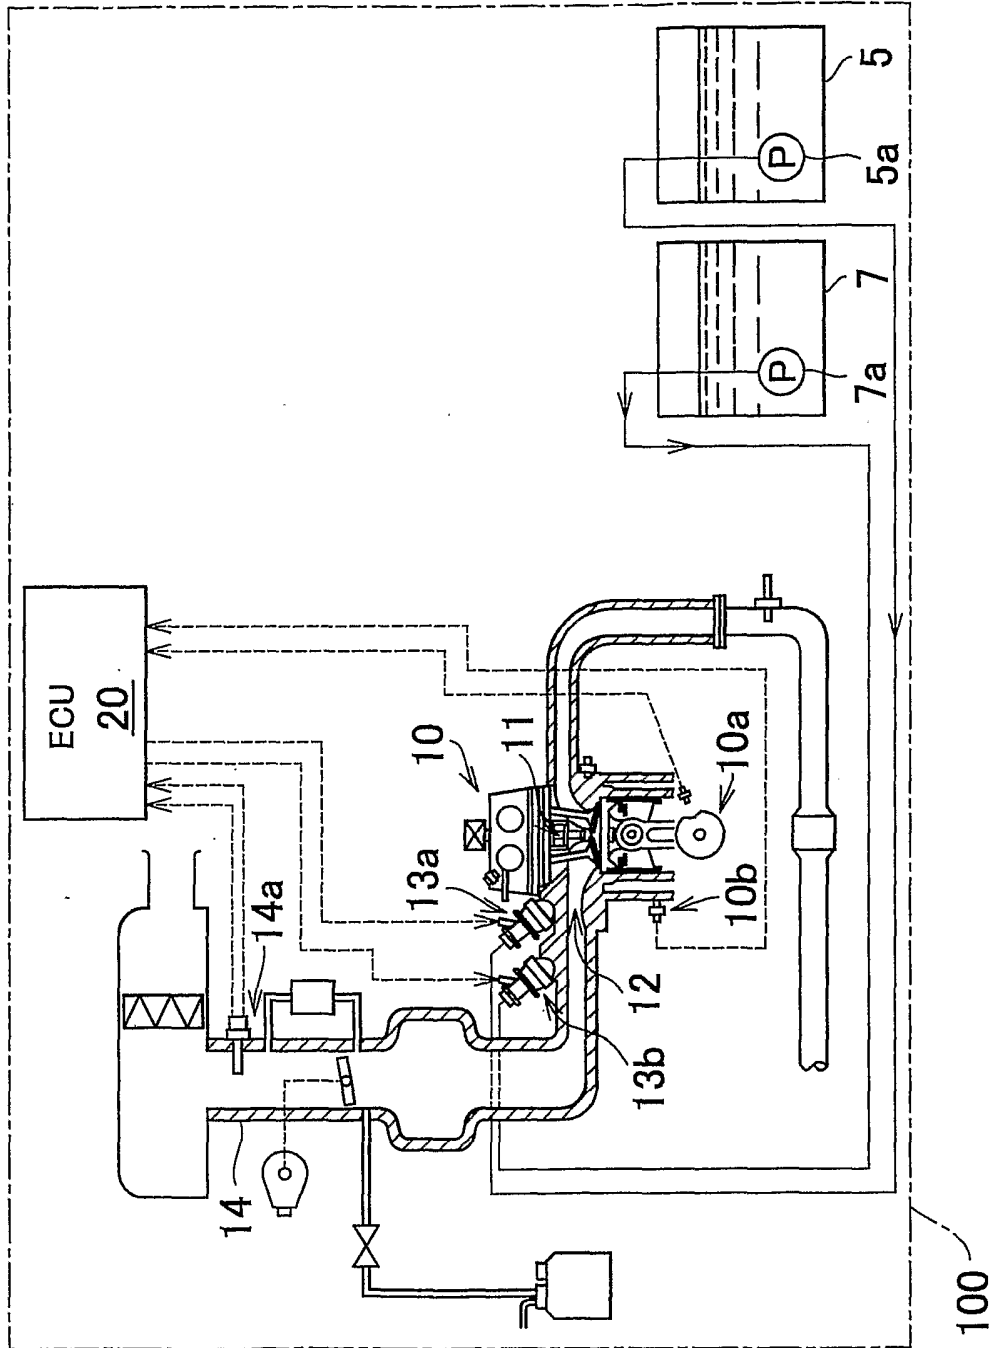



FIG. 2

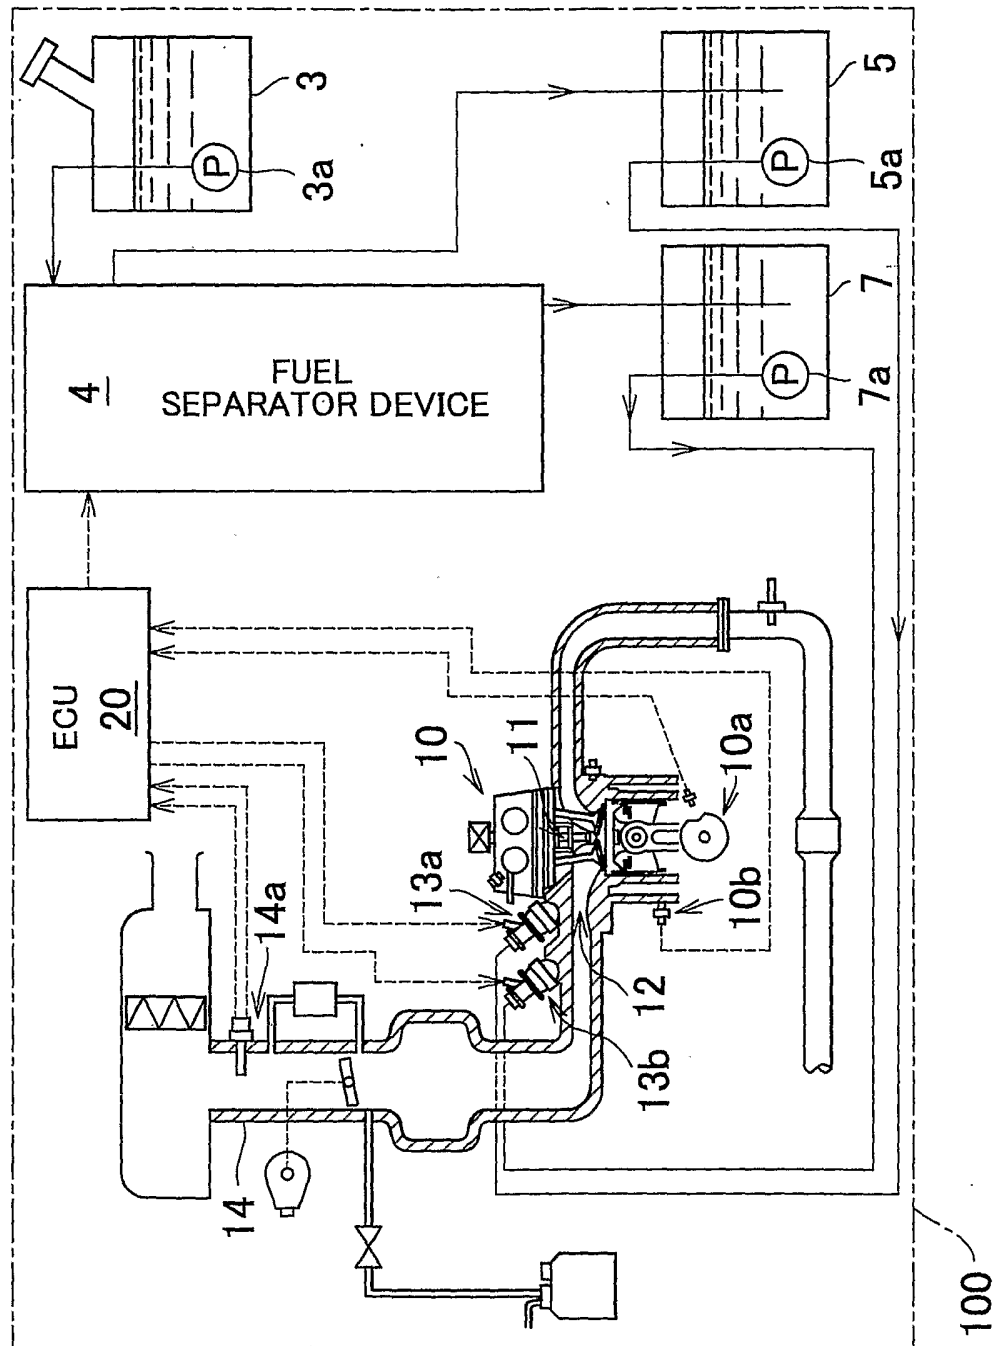


# FIG. 3

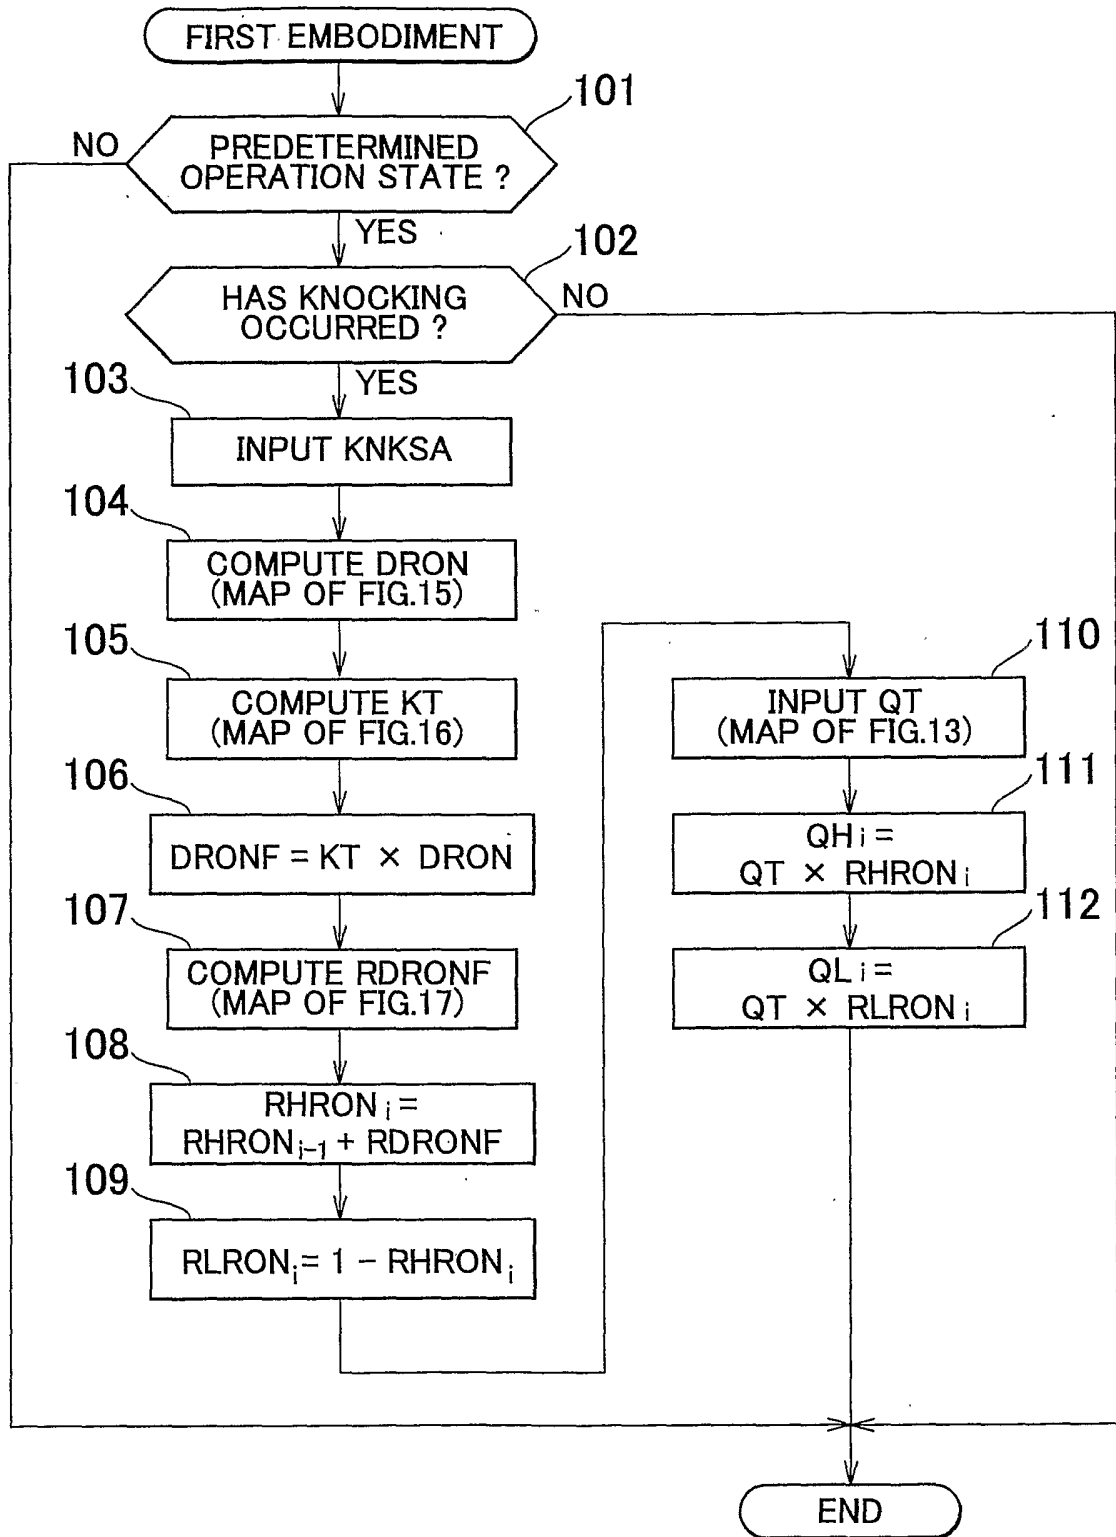

# FIG. 4

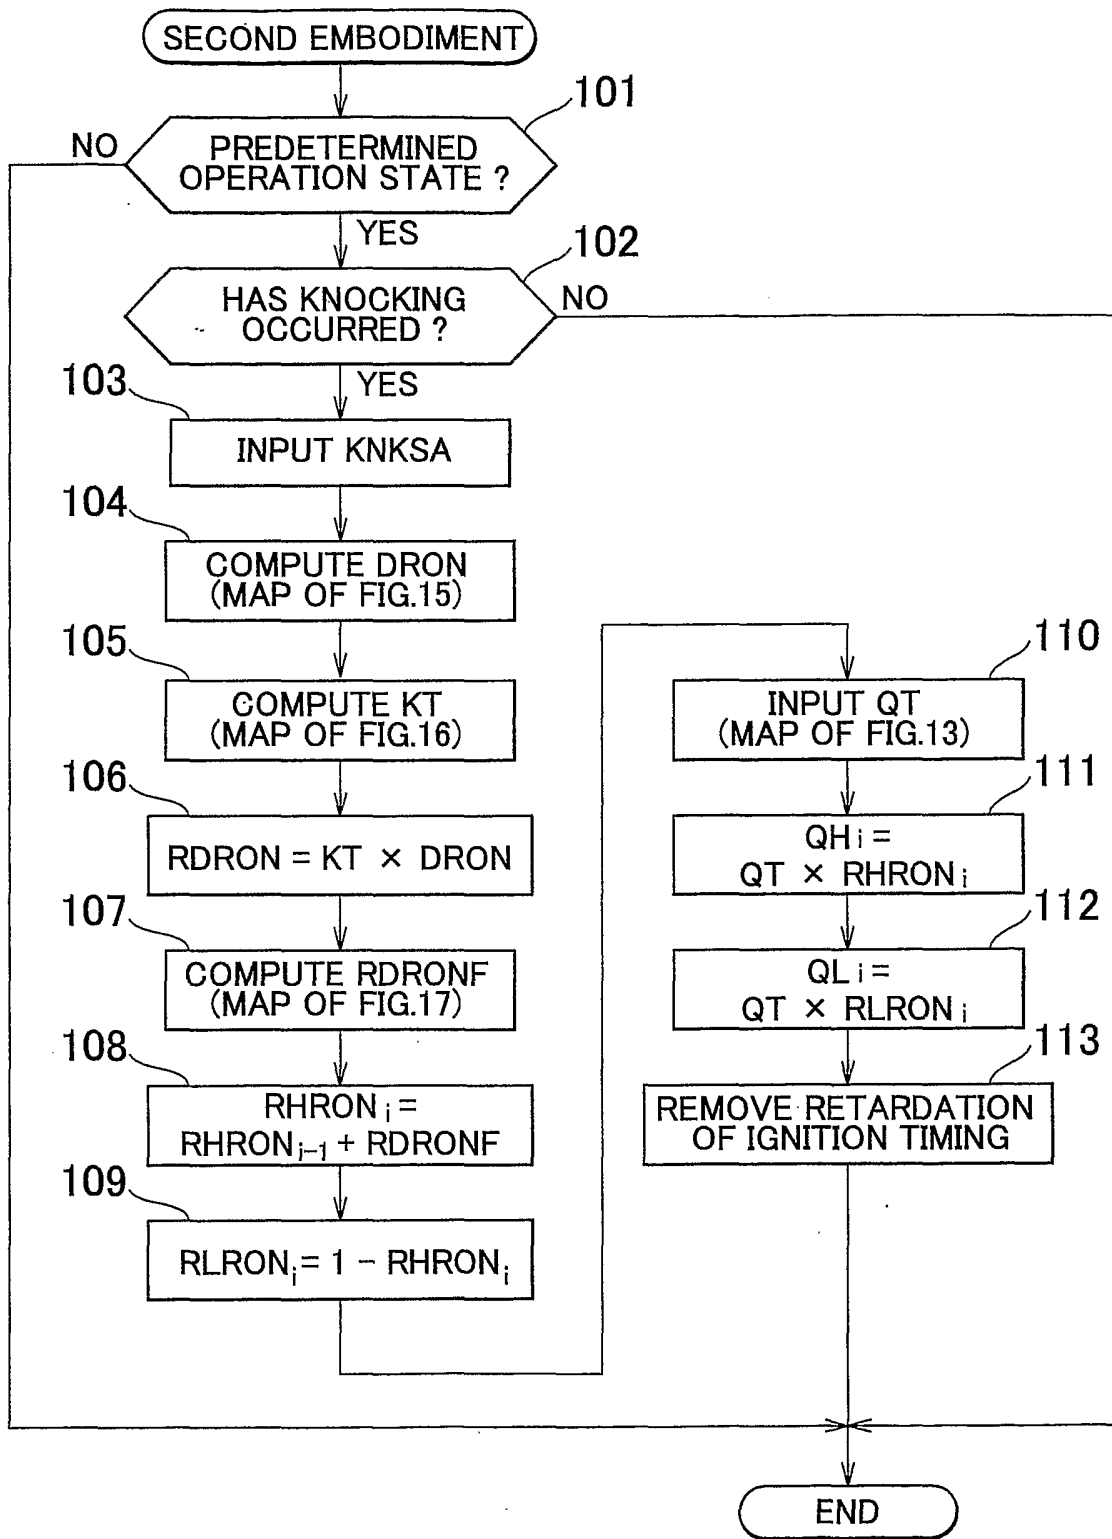


# FIG. 5

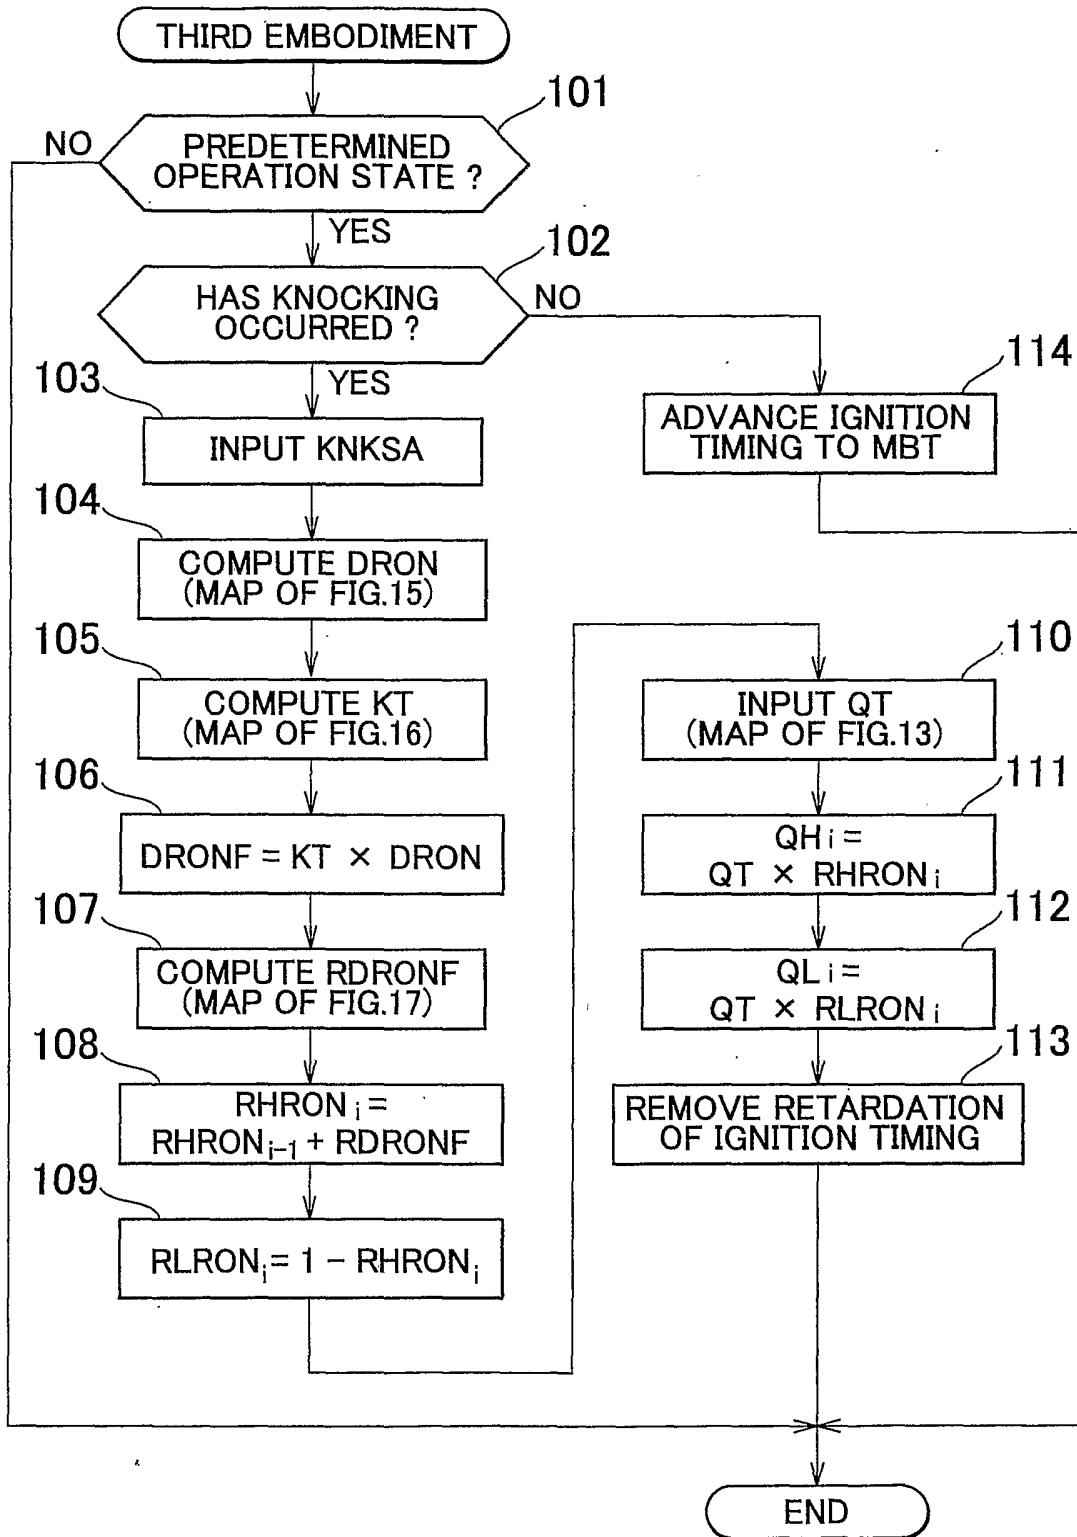





# FIG. 6

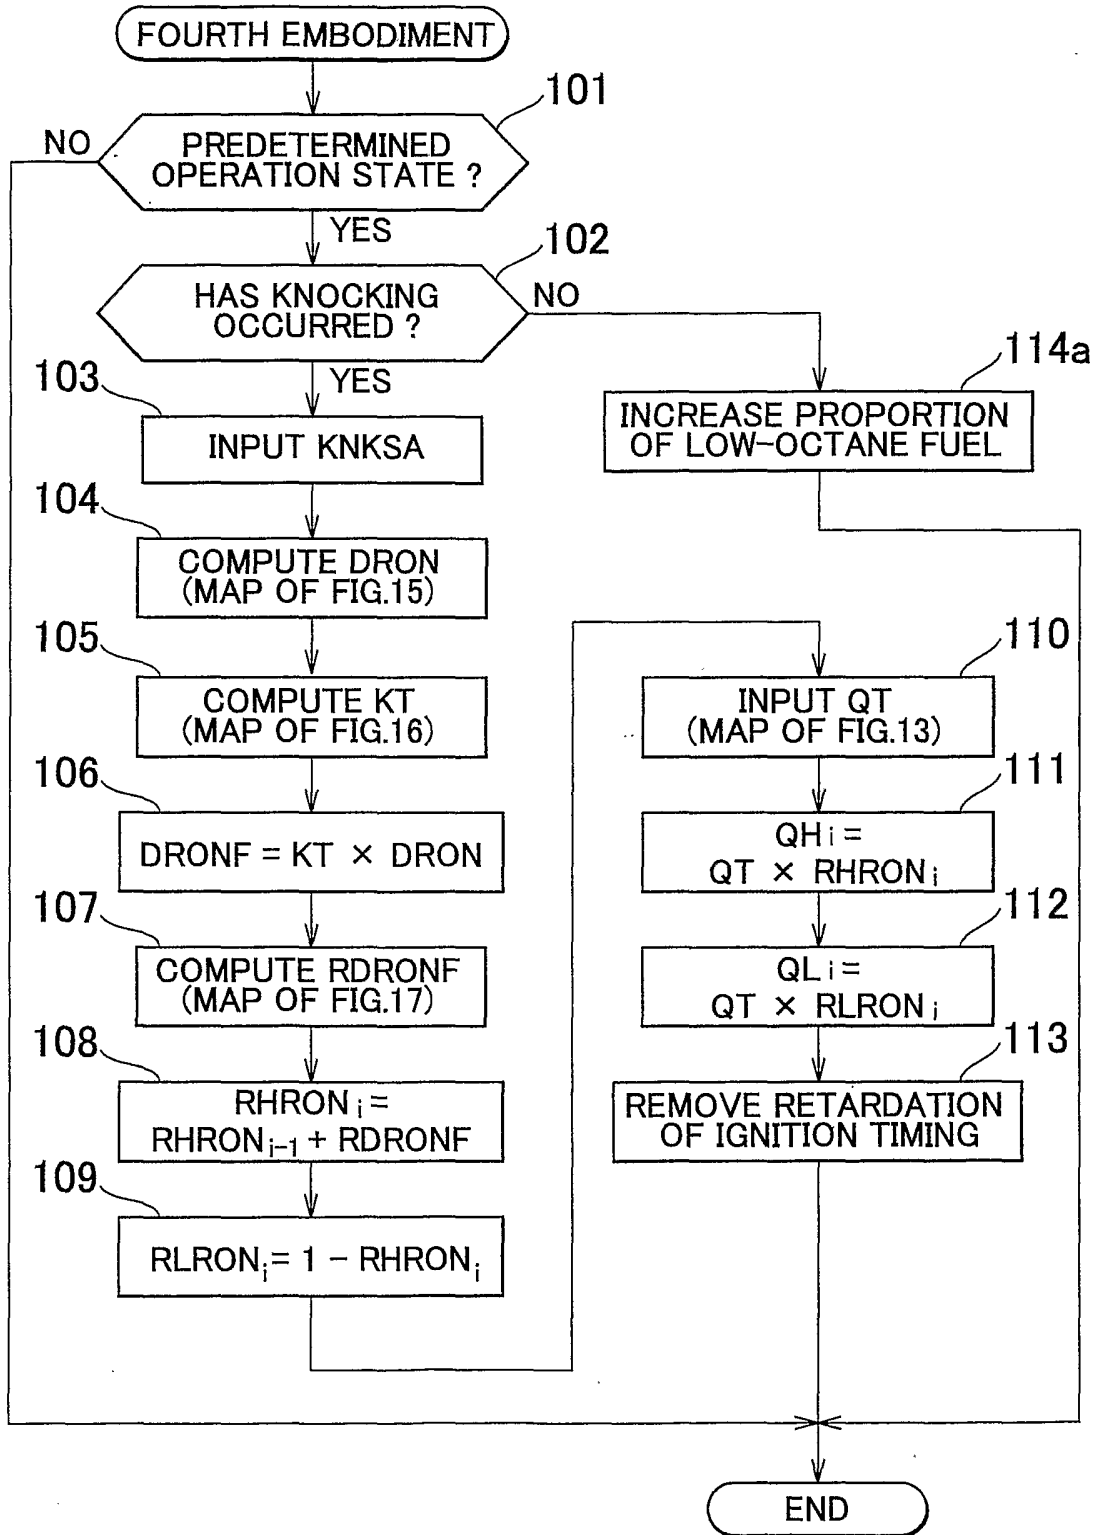


# FIG. 7

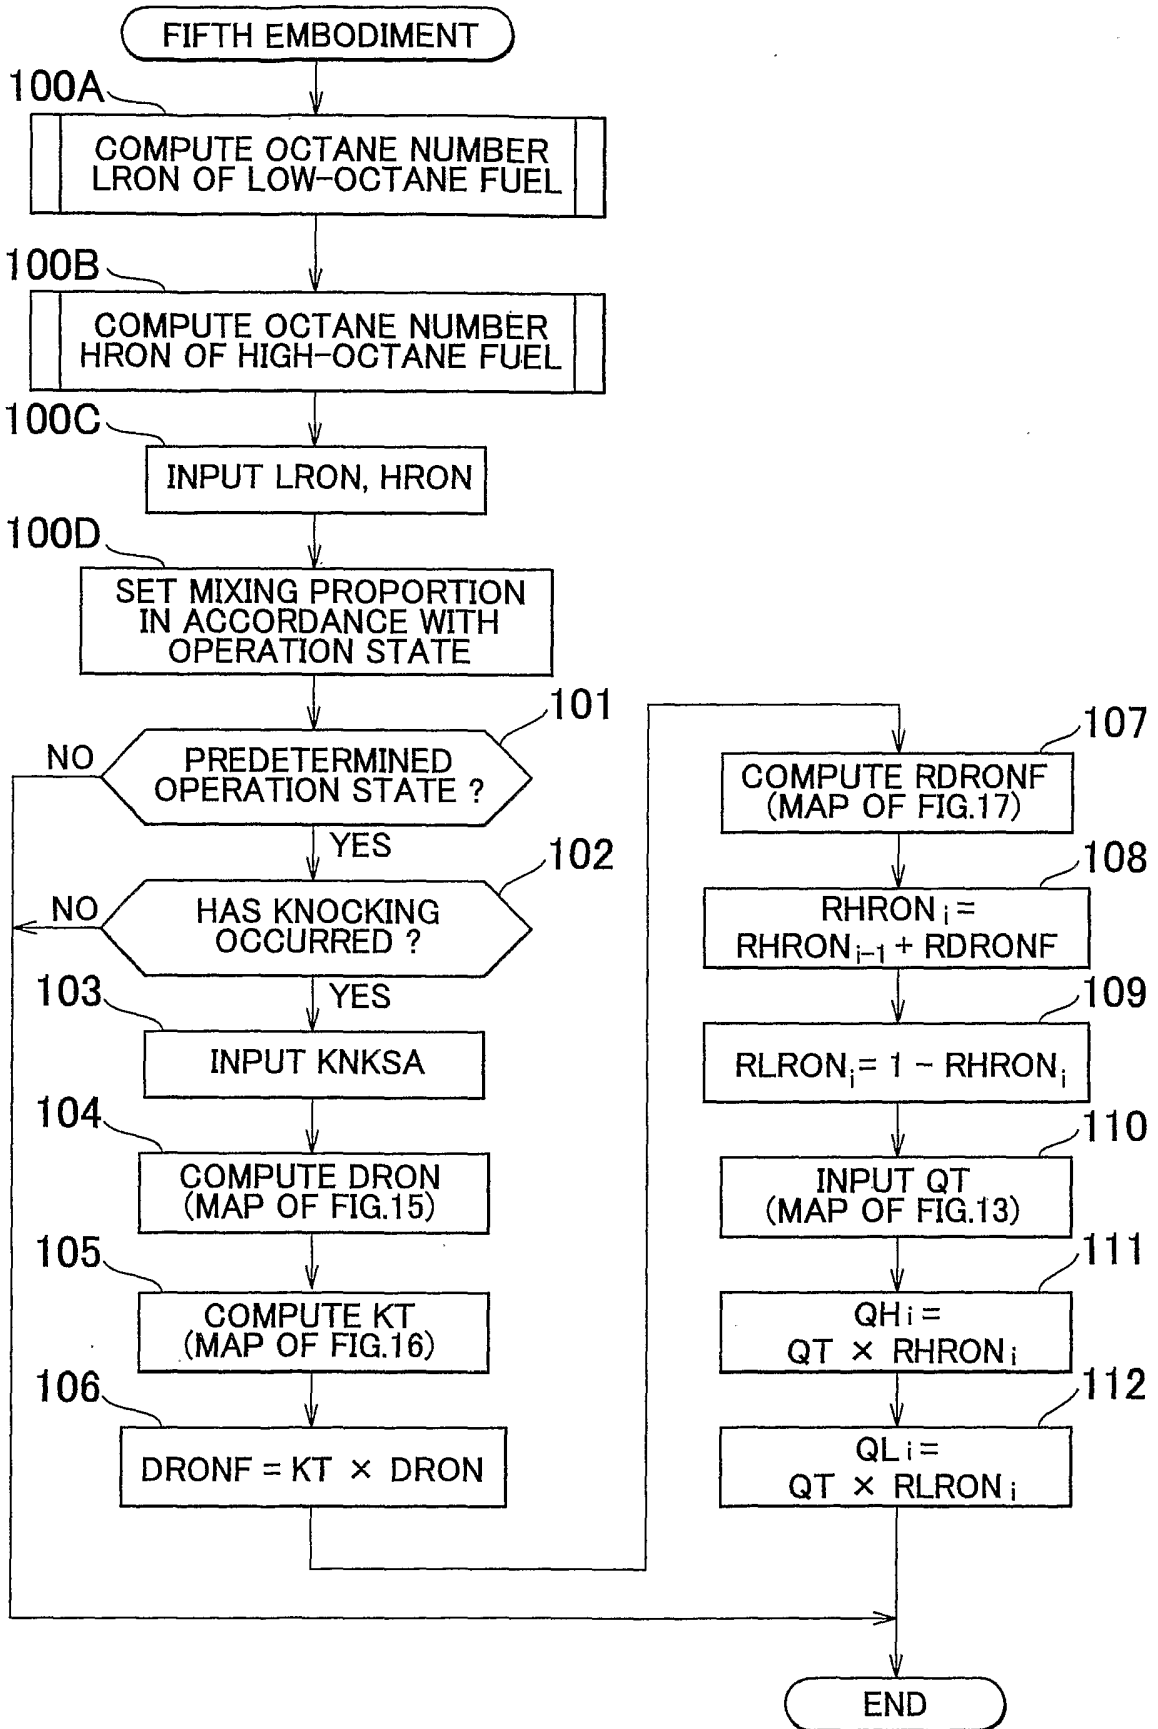


# FIG. 8

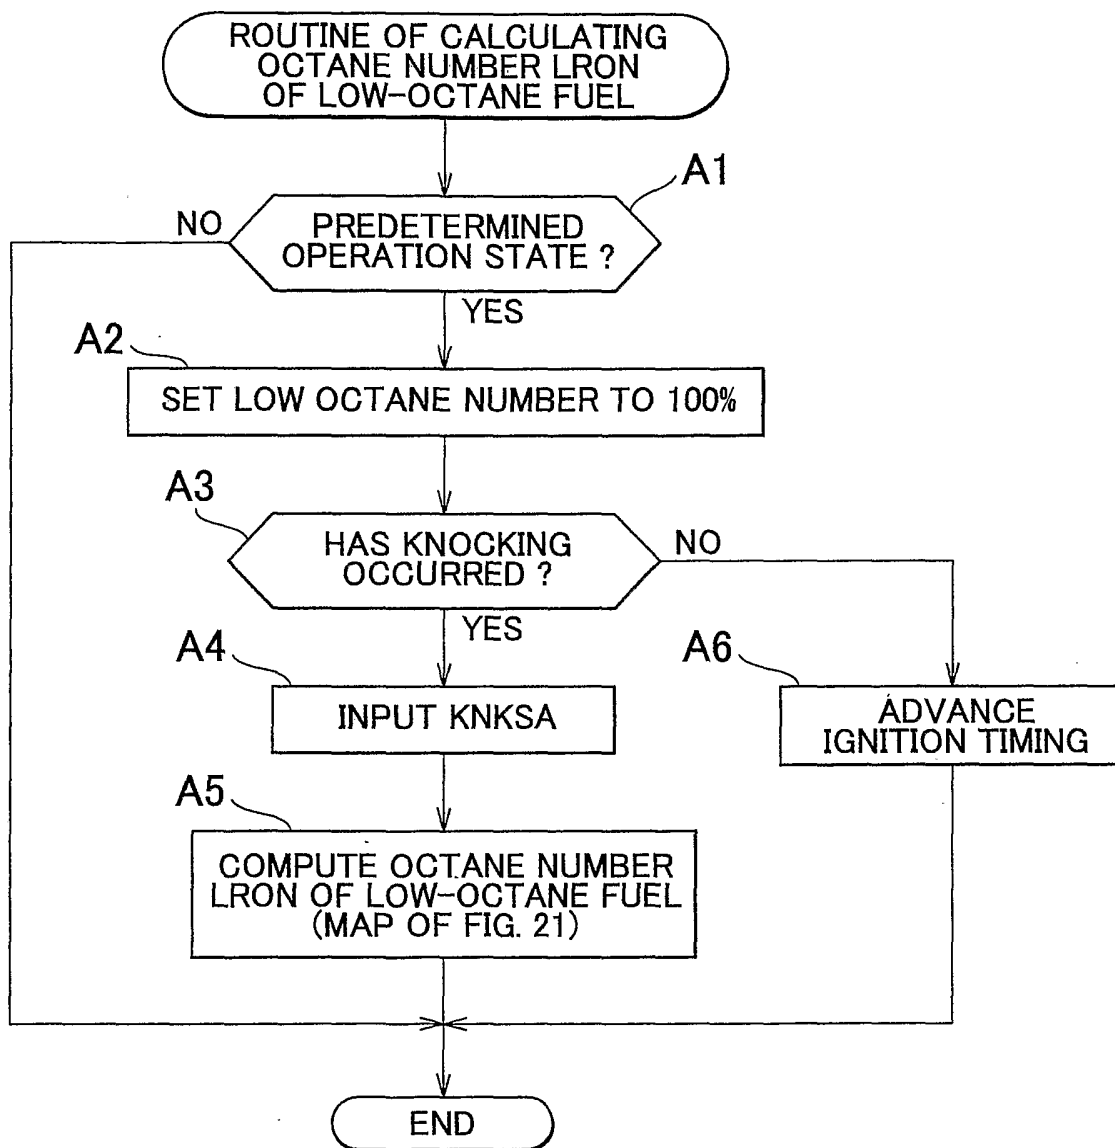


# FIG. 9

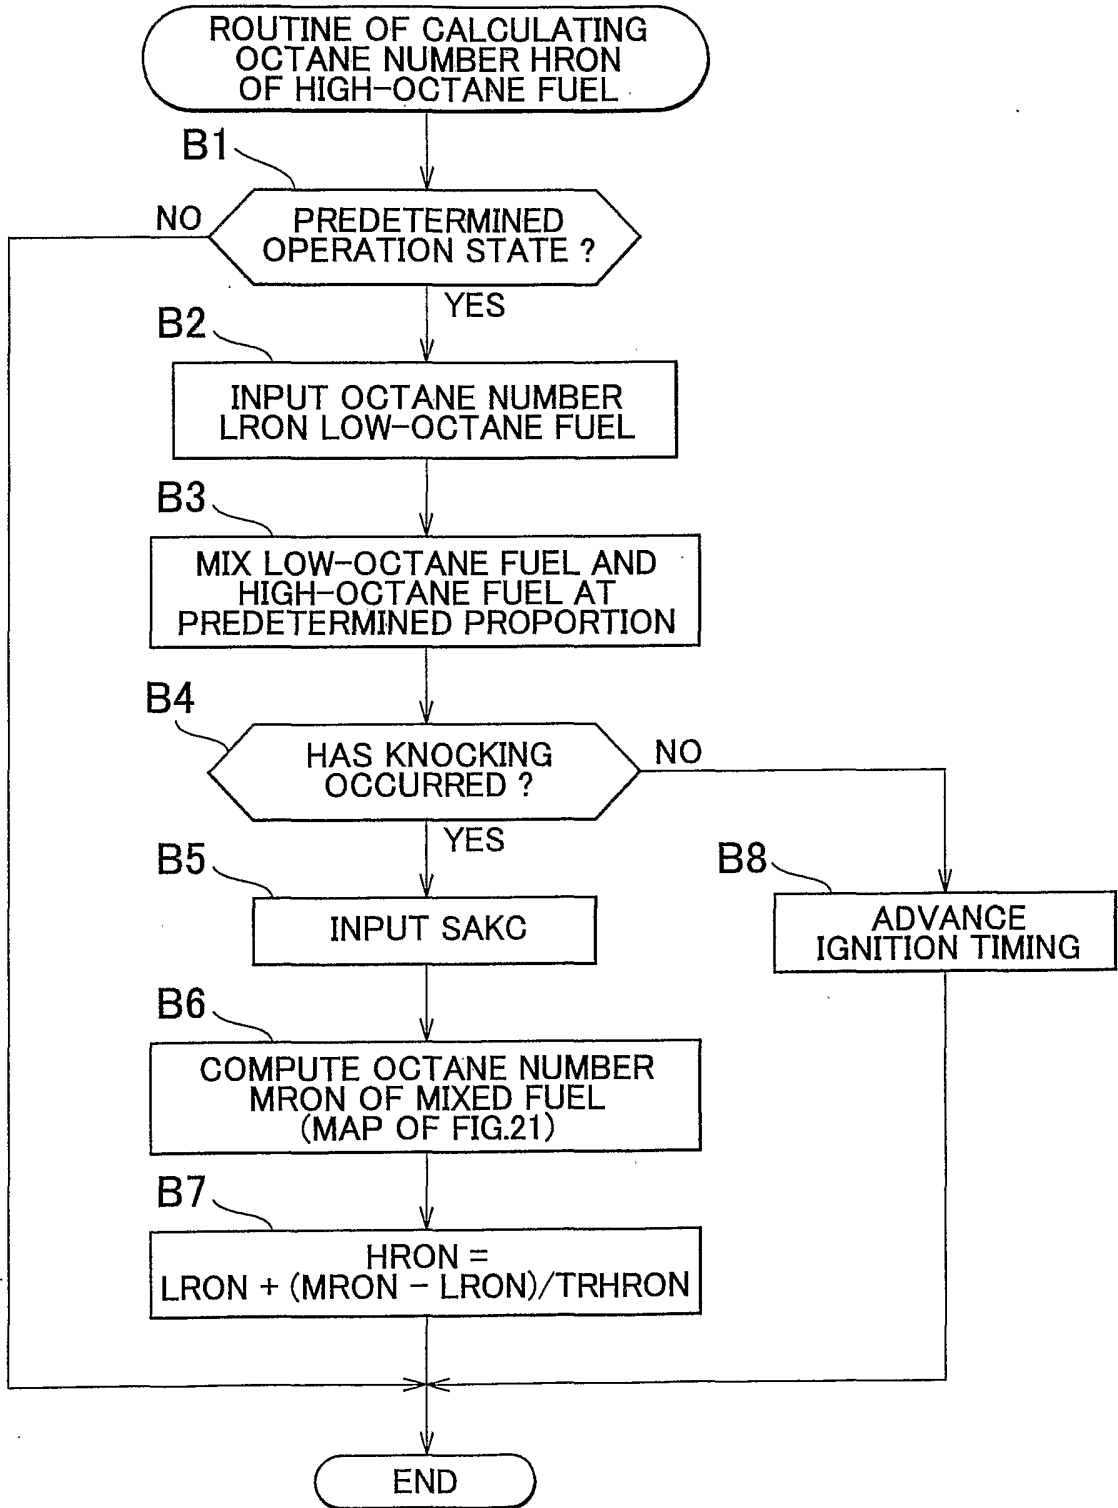


# FIG. 10

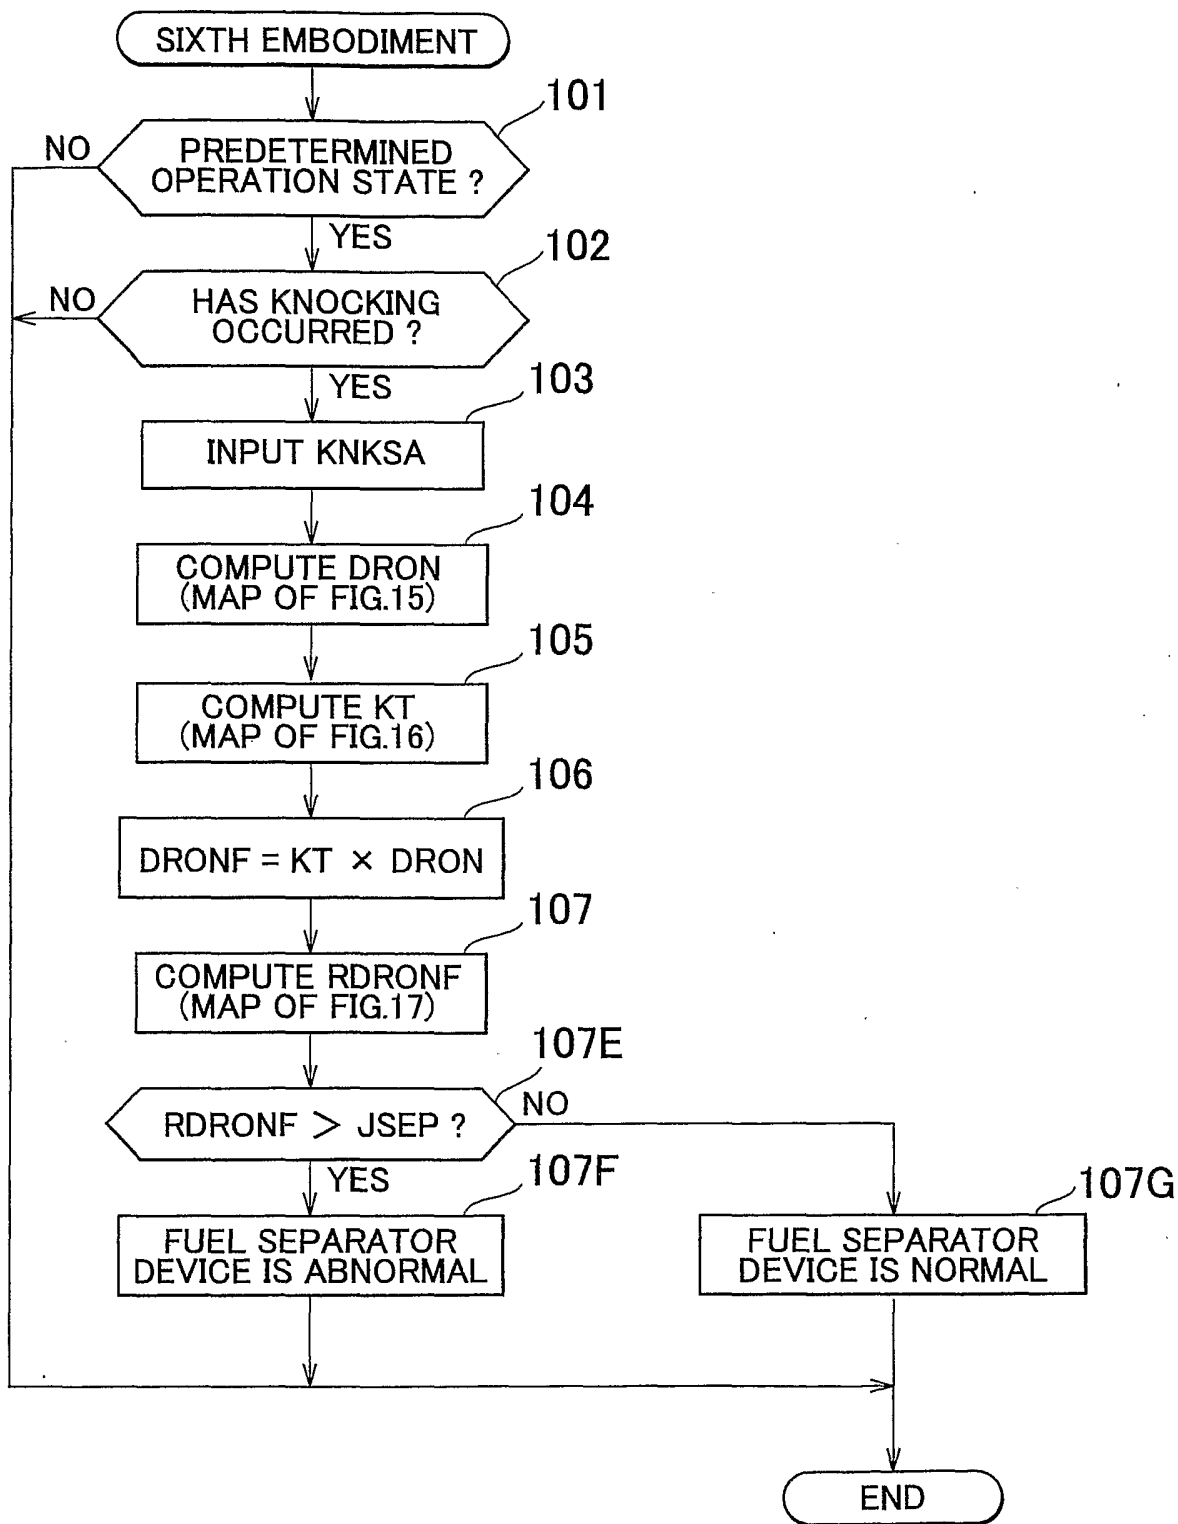


# FIG. 11

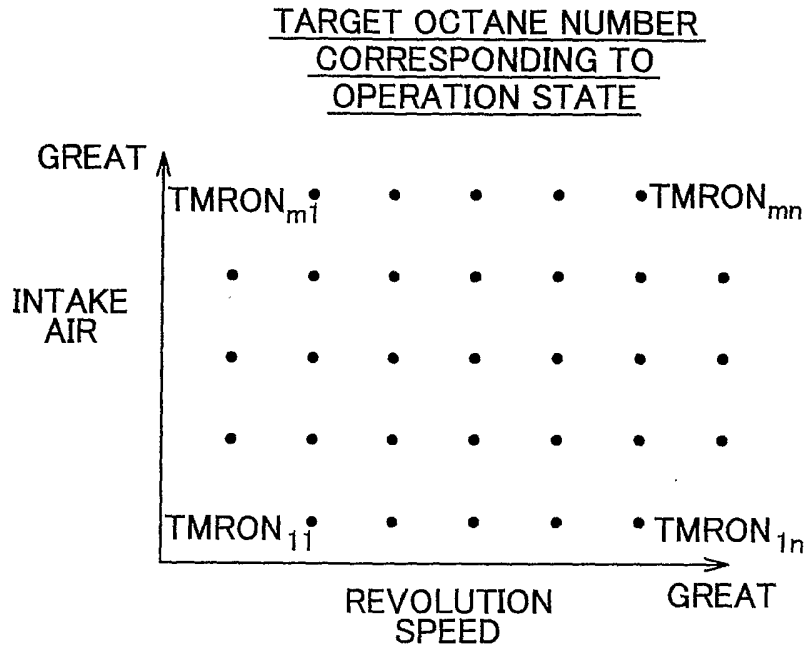


# FIG. 12

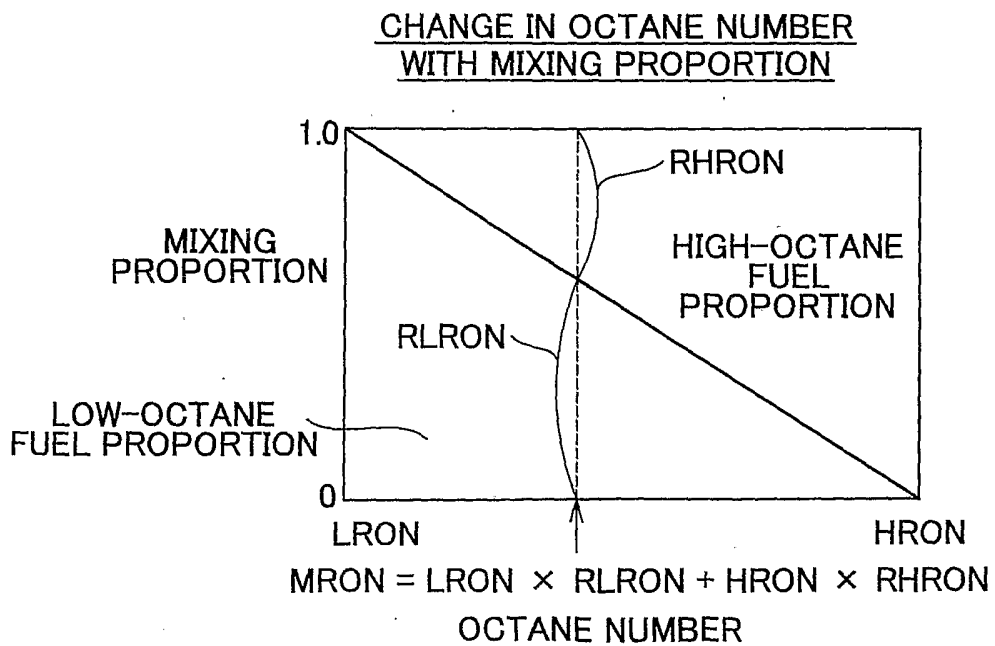

# FIG. 13

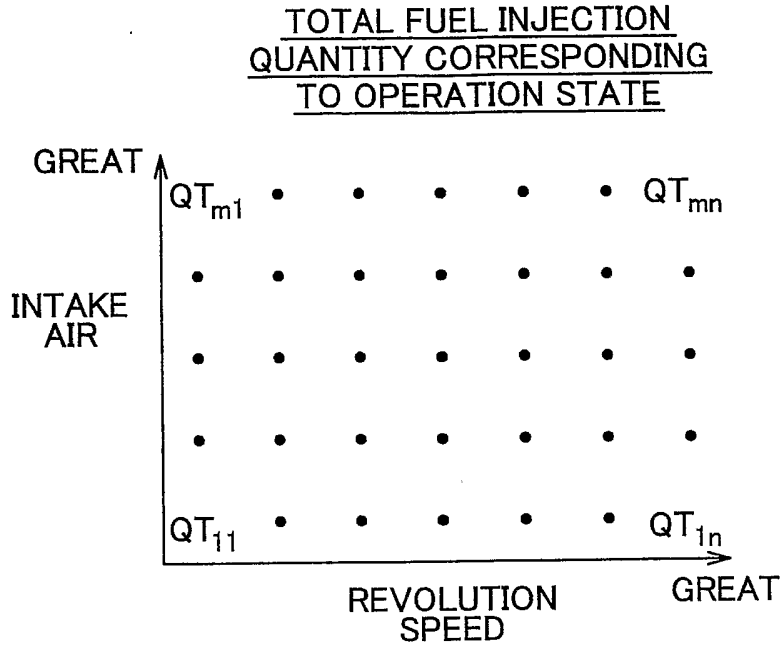


# FIG. 14

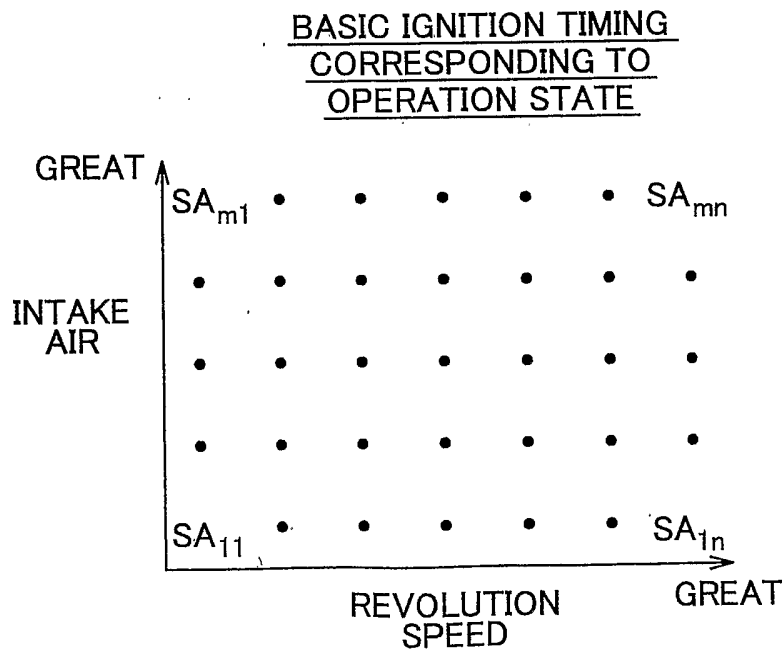


# FIG. 15

IGNITION TIMING RETARDATION  
BY KNOCK CONTROL AND DEVIATION  
IN OCTANE NUMBER

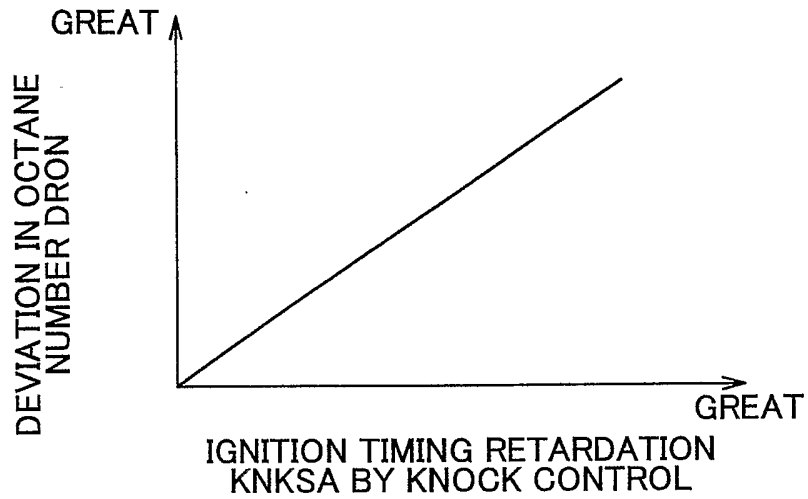

# FIG. 16


INTAKE TEMPERATURE-BASED  
CORRECTION VALUE FOR OCTANE  
NUMBER DEVIATION

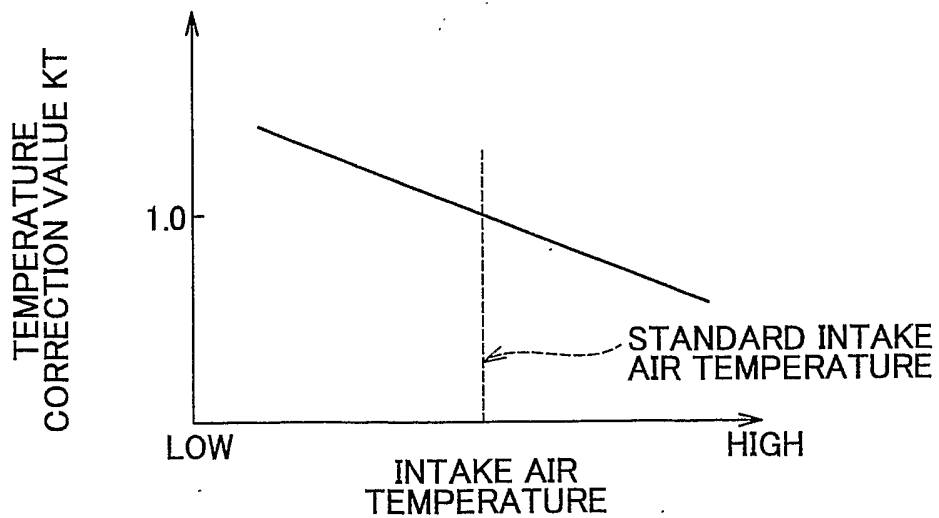




# FIG. 17


## OCTANE NUMBER DEVIATION AND MIXING PROPORTION CORRECTION VALUE

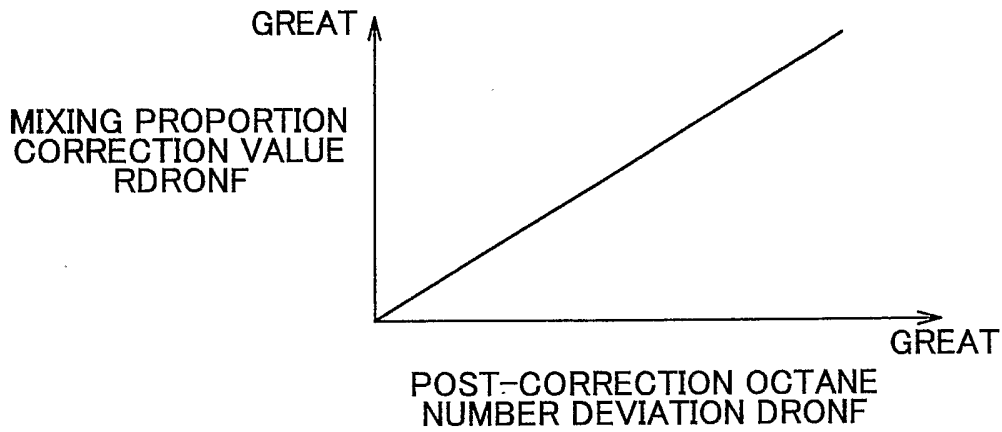


# FIG. 18

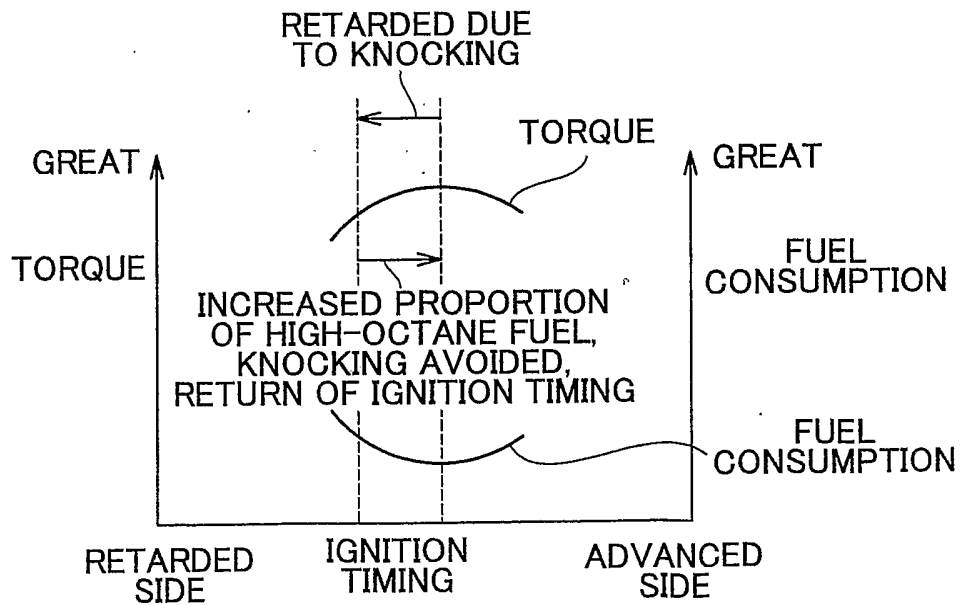


# FIG. 19

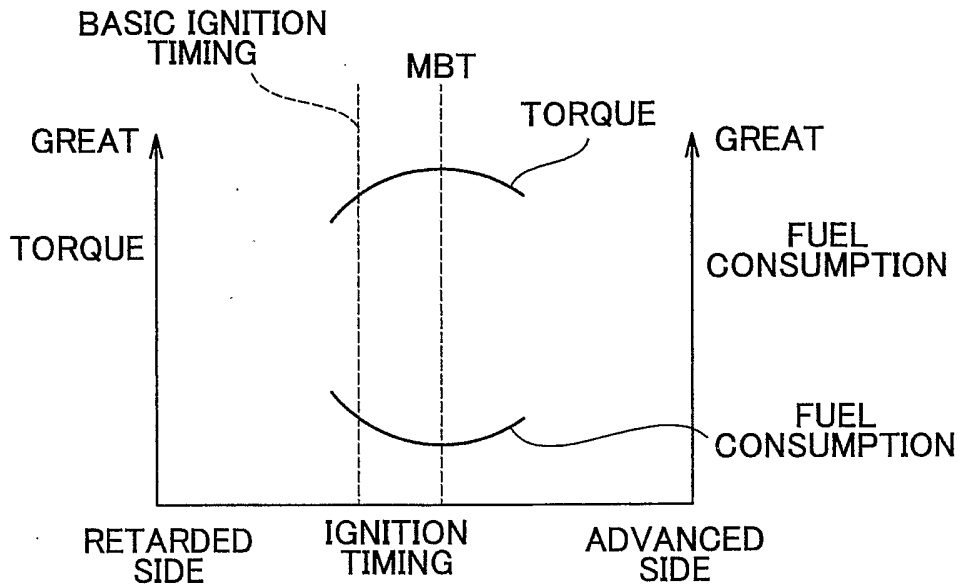

# FIG. 20

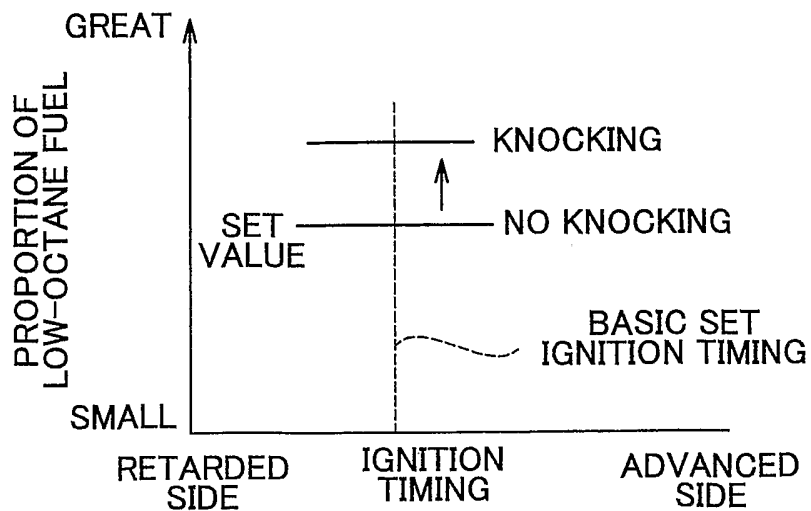

# FIG. 21

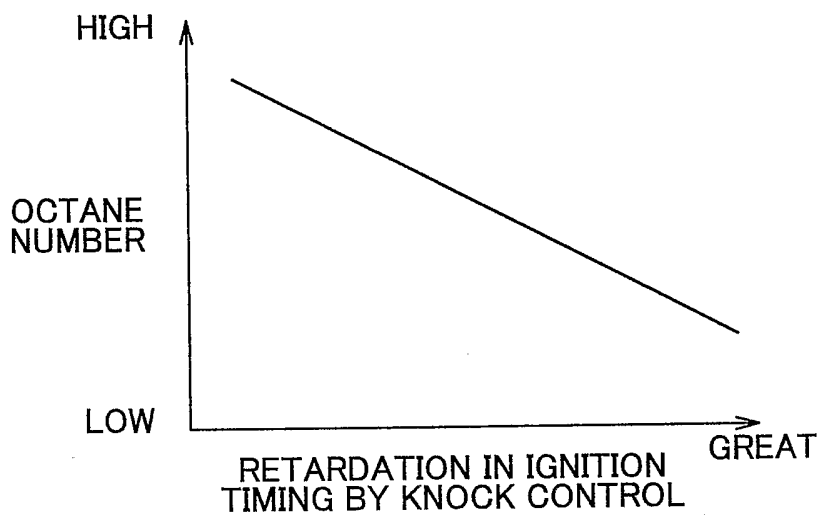

# INTERNATIONAL SEARCH REPORT

International Application No  
**PCT/IB2004/001829**

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 F02D19/08 F02D41/00 F02P5/152

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 F02D F02M G01N F02P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)  
**EPO-Internal, PAJ, WPI Data**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2002/139111 A1 (TAKI MASAHIRO ET AL) 3 October 2002 (2002-10-03) paragraphs '0097! - '0101! paragraphs '0120! - '0124!	1,3-12
Y	US 5 109 821 A (IIDA KAZUMASA ET AL) 5 May 1992 (1992-05-05) abstract; figures 6,9 column 7, line 19 - line 23	1,3-12
A	US 3 503 722 A (WEBER HARRY R ET AL) 31 March 1970 (1970-03-31) column 1, lines 13-23 column 2, lines 1-26	1,12
----- -/--		

Further documents are listed in the continuation of box C.       Patent family members are listed in annex.

° Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p>
--	--

Date of the actual completion of the international search <b>1 October 2004</b>	Date of mailing of the international search report <b>08/10/2004</b>
--	---

Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  <b>Röttger, K</b>
--	---

## INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/IB2004/001829

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) & JP 2001 050070 A (NISSAN MOTOR CO LTD), 23 February 2001 (2001-02-23) cited in the application abstract	1,12
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 585 (M-1347), 25 December 1992 (1992-12-25) & JP 04 234571 A (HONDA MOTOR CO LTD), 24 August 1992 (1992-08-24) cited in the application abstract	1,12
A	GB 528 350 A (BATAAFSCHE PETROLEUM) 28 October 1940 (1940-10-28) page 1, lines 77-85	1,12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int'l Application No PCT/IB2004/001829
---

Patent document cited in search report	Publication date	Publication date	Patent family member(s)	Publication date
US 2002139111	A1	03-10-2002	EP 1373698 A1 WO 02077429 A1 JP 2004522039 T	02-01-2004 03-10-2002 22-07-2004
US 5109821	A	05-05-1992	JP 2737336 B2 JP 3217638 A JP 4012171 A KR 9401334 B1	08-04-1998 25-09-1991 16-01-1992 19-02-1994
US 3503722	A	31-03-1970	NONE	
JP 2001050070	A	23-02-2001	EP 1057988 A2 US 6332448 B1	06-12-2000 25-12-2001
JP 04234571	A	24-08-1992	JP 2826911 B2	18-11-1998
GB 528350	A	28-10-1940	NONE	