



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁵ : E06B 9/266</p>	<p>A1</p>	<p>(11) International Publication Number: WO 92/17676</p> <p>(43) International Publication Date: 15 October 1992 (15.10.92)</p>
<p>(21) International Application Number: PCT/CA92/00141</p> <p>(22) International Filing Date: 6 April 1992 (06.04.92)</p> <p>(30) Priority data: 681,957 8 April 1991 (08.04.91) US</p> <p>(71)(72) Applicants and Inventors: MAROCCO, Norbert [CA/CA]; 46 Pennygrass Court, Woodbridge, Ontario L4L 3M6 (CA). INGRAM, Ronald, W., E. [CA/CA]; 194 Clendenan Avenue, Toronto, Ontario M6P 2X2 (CA).</p> <p>(74) Agent: ROLSTON, George, A.; Suite 706, 43 Eglinton Avenue E., Toronto, Ontario M4P 1A2 (CA).</p>		<p>(81) Designated States: AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH (European patent), CI (OAPI patent), CM (OAPI patent), DE (European patent), DK (European patent), ES (European patent), FI, FR (European patent), GA (OAPI patent), GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU (European patent), MC (European patent), MG, ML (OAPI patent), MR (OAPI patent), MW, NL (European patent), NO, PL, RO, RU, SD, SE (European patent), SN (OAPI patent), TD (OAPI patent), TG (OAPI patent).</p> <p>Published <i>With international search report.</i></p>
<p>(54) Title: METHOD AND APPARATUS FOR THE MANUFACTURE OF BLINDS</p>		
<p>(57) Abstract</p> <p>Apparatus for the manufacture of blinds of the type having a head rail, a plurality of ladder tapes, a plurality of blind slats, and raise cords passing through the blind slats, by which the blind slats may be drawn upwardly toward the head rail, and wherein the apparatus has a die support for passage of strip material (S1, S2, S3) along an axis therealong for the formation of blind slats, a plurality of die units (48-58) mounted on the die support, at least some of said die units being movable therealong, the die units being aligned with one another along the strip path, the die units being operable to procure their selective operation to form openings in the strip material at preselected spaced points, a cut-off die (74) for cutting off a preselected length of the strip material to form a blind slat, slat threaders located downstream of the dies within for threading (130-140) a slat through the ladder tapes, and the threaders being moveable laterally relative to the axis of the strip material, and apparatus for the manufacture of blind components such as headrails (R) for such blinds wherein end stops are linked together for axial movement along the length of such a head rail, and a method of manufacturing blinds and blind components using such apparatus.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
DE	Germany	MC	Monaco	TG	Togo
DK	Denmark			US	United States of America

- 1 -

METHOD AND APPARATUS FOR THE MANUFACTURE OF BLINDS

TECHNICAL FIELD

The invention relates to an apparatus for the manufacture of blinds, and in particular for the manufacture of blinds consisting of a plurality of horizontal slats known in the trade as "venetian blinds" and to a method of manufacturing such blinds using such apparatus.

BACKGROUND ART

Blinds having horizontal slats, are well known in the window covering art. Such blinds are generally known as "venetian blinds". They usually consist of a head rail, a plurality of thin elongated blind slats, and two or more ladder tapes. The ladder tapes consist of pairs of cords or tapes, with generally transverse rung portions extending between them at spaced intervals. The slats are supported on the rungs of the tapes.

Usually means are provided in the head rail for adjusting the relative positions of the two cords or tapes, so that the slats may be tilted one way or the other, to produce different lighting effects within a building space. However, such blinds are not used exclusively for covering windows, but may also be used for covering other spaces and, in many cases, are used for covering, for example, doorway.

In addition to the ladder tapes, such blinds are usually provided with two or more so-called "raise cords".

The raise cords are simply a pair of cords which pass through openings in the blind slats, and are secured to a bottom rail below the lowermost slat. By suitable pulleys and controls within the head rail, the raise cords may be pulled so as to raise all of the slats up until they are lying closely adjacent in a stack underneath the head rail, thereby leaving the window or other space substantially unobstructed.

Many different makes of such blinds are available on the market, and have been available for many years. In the great majority of cases, such blinds incorporate blind

- 2 -

slats made of thin sheet metal, usually sheet aluminum. The aluminum may be coated with a wide variety of different paints or other surface finishes, so as to give customers the widest possible choice when selecting such blinds, to
5 suit the decor of the home or building which they are furnishing. Blind manufacturers are, therefore, obliged to stock large quantities of rolls of strip metal, coated with different finishes, and must then be able to select the appropriate strip for a customer's order to manufacture a
10 blind or blinds on a custom basis.

This is naturally somewhat time consuming, and increases the cost of the blind. Certain customers, in fact, require blinds in which slats are incorporated having several different colours, so that when they are lowered
15 down the different coloured slats are arranged in groups, and in effect form bars of colour across a window space. This poses much more serious difficulties to the manufacturer. The manufacturer must then manufacture the blind not simply of one colour of stock, but any one blind
20 may require to be manufactured of several different colours of stock. This additional complication naturally still further increases the cost of blinds of this type.

A further factor in the manufacture of such blinds is that each blind must be substantially custom-made so as to
25 fit the width and height of a particular window space. The manufacturer must therefore be able to select slats of a particular length, cut them off in a predetermined number suitable for the manufacture of that blind, and then assemble them with their ladder tapes and raise cords.

30 One of the factors adding to the difficulty of this type of manufacture is the fact that the openings for the raise cords are usually and desirably located a more or less standard distance from each end of the blind. Where blinds are made in which the slats in one blind are longer
35 than the slats in another blind, then the punching of these holes at a predetermined distance from each end of each slat presents a still further problem. Equipment for punching such holes must, therefore, either depend almost

- 3 -

entirely on relatively primitive hand labour, or alternatively, if automatic machinery is used, its adjustment may become of critical difficulty, requiring highly skilled operators. In the past, all of these factors have been fully appreciated by manufacturers, and machines of various different designs have been proposed for the purpose of making such blinds, but with varying degrees of success. Some machines are capable of only relatively restrictive application, and are not suitable for making blinds with multiple colours. Other machines are of such a design that the adjustment in the length of the blind slats from one customer to another, is excessively slow and laborious and requires much skilled labour to accomplish.

However, the equipment proposed and designed and used in the past has worked reasonably well, although somewhat slowly and laboriously, at least when producing blinds of a single colour, and preferably in standard lengths.

However, in recent years, consumers have demanded blinds with slats of various different widths. Thus it is now almost universal throughout the industry that venetian blinds shall be available with slats having either a one inch, or a three-quarter inch, or a half-inch width. Generally speaking, the prior art design of machines would accommodate only one strip of slat material at a time. Consequently, if it was desired to change from one colour to another, or if it was desired to change from one width of blind slat to another, it was necessary to stop the machine, change the coil of strip metal, and make various other adjustments and changes in the tooling on the machine, before production could be resumed.

For all of these various reasons, it is clearly desirable to provide a machine which is substantially self-adjusting to different lengths of blind slats, and which is capable of accepting two or more different coloured metal strips for producing different coloured slats in the same blind, and which is alternatively capable of accepting metal strips of different widths, for producing blinds

- 4 -

having slats of different widths, and which is capable of changing over from one length of blind slat to another with a minimum of manual intervention, and which is capable of changing over from one colour to the other with a minimum
5 of manual intervention, and which is alternatively capable of changing over from one width of slat to the other with a minimum of manual intervention.

Preferably, such a machine will be controlled by a central processing unit, capable of receiving commands for
10 the manufacture of a whole series of blinds, one after the other, with a minimum of intervention from an operator who essentially will simply input instructions and then supervise the operation of the machine as it carries out its functions on its own, substantially without further
15 manual intervention.

DISCLOSURE OF THE INVENTION

With a view to satisfying the various conflicting objectives described above, the invention comprises apparatus for the manufacture of blinds of the type having
20 a headrail, a plurality of ladder tapes suspended from said headrail, a plurality of blind slats supported by said ladder tapes, and raise cord means passing through openings in said blind slats, whereby said blind slats may be drawn upwardly toward said headrail, and wherein said apparatus
25 further comprises , a plurality of die means mounted on said die support means, at least some of said die means being moveable therealong, said die means being aligned with one another along said strip path whereby a said strip of said material may pass therealong, die operating means
30 operable to procure selective operation of respective ones of said die means, and control means for selecting the same, whereby to form openings in said strip material at pre-selected spaced points therealong, cut off die means for cutting off a pre-selected length of said strip
35 material to form a said slat for a said blind, slat threader means, located downstream of said die means, and defining a pre-determined slat threading path for threading a said slat through said ladder tapes, and, movement

- 5 -

means supporting said threader means, whereby said threader means may be moved laterally relative to said axis of said die means.

The invention further comprises such an apparatus and
5 wherein there are a plurality of said die means, and at least some of said die means being moveable relative to others of said die means, and including linkage means interconnecting the same, whereby movement of one of said die means is communicated to all of the remaining said
10 connected moveable die means.

The invention further comprises such an apparatus, wherein said movement connection means causes each of said die means to move a distance different from its adjacent said die means, whereby at least selected ones of said die
15 means may be precisely positioned along said path, and thereby form openings in said strip material in desired locations.

The invention further comprises such an apparatus and wherein all of said die means are operable by a single
20 operating means, and including control means for selectively operating individual ones of said die means, through said single operating means.

The invention further comprises such an apparatus for the manufacture of blinds of the type having a headrail, a
25 plurality of ladder tapes suspended from said headrail, a plurality of blind slats supported by said ladder tapes, and raise cord means passing through openings in said blind slats, whereby said blind slats may be drawn upwardly toward said headrail, and said apparatus comprising, die
30 support means defining an elongated pathway along a predetermined axis for passage of at least two strips of strip material therealong for the formation of said blind slats, a plurality of die means mounted on said die support means, at least some of said die means being
35 moveable therealong, said die means being aligned with one another along said pathway whereby said strips of said material may pass therealong side by side, at least two punch dies associated with each of said die means in spaced

- 6 -

apart relation for receiving respective said strips
therethrough, die operating means operable to procure
selective operation of said die means, and, control means
for selecting certain of said punch dies to be operated
5 thereby whereby to form openings in a selected one of
said strips of said strip material at pre-selected spaced
points therealong.

The invention further comprises a machine for making
window covering components and having punch die means and
10 cut-off die means and stop means movably supported on a
stop support means, and being adjustable therealong, and
adapted for locating openings to be formed at predetermined
spaced apart locations in a said component for such a
window covering.

15 The invention further comprises a method of making
blinds using the foregoing apparatus.

The various features of novelty which characterize the
invention are pointed out with more particularity in the
claims annexed to and forming a part of this disclosure.
20 For a better understanding of the invention, its operating
advantages and specific objects attained by its use,
reference should be had to the accompanying drawings and
descriptive matter in which there are illustrated and
described preferred embodiments of the invention.

25

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 in perspective illustration of a blind
30 forming apparatus in accordance with the invention;

Figure 2 is a perspective illustration of a typical
venetian blind of the type manufactured on apparatus in
accordance with the invention;

Figure 3 is top plan view of the apparatus shown in
35 Figure 1;

Figure 4 is an enlarged side elevation of the strip
feed and roll forming portion of the apparatus of Figure 1;

Figure 5 is an enlarged perspective illustration of a

- 7 -

portion of the die support portion of the apparatus of Figure 1;

Figure 6 is an enlarged front elevation of the die operating means, with portions thereof cut away;

5 Figure 7 is a side elevation of the die operating means of Figure 6;

Figure 8 is a side elevation of a die means and a strip control means;

10 Figure 9 is a side elevation of a trailing end portion of the die means and a leading end portion of the threader means;

Figure 10 is a top plan view showing the interconnection of the movable die means with the end die means;

15 Figure 11 is an enlarged perspective illustration of the threader means for threading the blind slats through the ladder tapes;

Figure 12 is a top plan view of the interconnection between respective threader means;

20 Figure 13 is a schematic block diagram of the basic controls of the apparatus;

Figure 14 is a side elevational view of an alternate embodiment of the invention, designed and used for the manufacture of the head rail portion of the blinds;

25 Figure 15 is a top plan view of the interconnection of the die stop means illustrated in Figure 13, and,

Figure 16 is a side elevational view, partially cut away, showing the interaction of the stop means, and the adjustable stop members.

30

MODES OF CARRYING OUT THE INVENTION

Referring first of all to Figure 1, it will be seen that this illustrates in general a machine for the manufacture and assembly of blind slats into venetian
35 blinds. The general features of such venetian blinds are well known, and have already been generally outlined herein, and are therefore omitted from this description for the sake of clarity.

- 8 -

The machine, indicated generally as 10, in accordance with the invention, as illustrated in Figure 1 in this embodiment, will be seen to comprise four general areas or sub-assemblies namely a strip feed and roll forming assembly 12, a hole-punching and cut-off section 14, a tape threading section 16, and a control console 18. These various sub-assemblies or portions of the overall apparatus will now be described separately.

Strip Feed and Roll-forming Assembly

The strip feeding and roll-forming assembly 12 comprises, in this embodiment, three separate roll-mounting bosses 20, 22, and 24, the axes of which are spaced apart longitudinally along the length of the assembly as shown. In addition, transverse vertical planes intersecting the axes of the bosses are spaced apart from one another horizontally. The coils of strip sheet metal are adapted to be mounted on the bosses as indicated at C.

Each of the coils will thus be seen to define a strip axis which is offset with respect to the other two strip axes, but with all three parallel to one another.

In this way, up to a maximum, in this embodiment, of three separate coils of strip may be mounted on the strip-feeding assembly, and since the axes of the bosses are offset longitudinally, the coils of strip sheet metal on the respective bosses may be interchanged and replaced selectively, without interfering with the positioning of the others, if this is desired.

Each of the bosses 20, 22, and 24 is, in turn, associated with a large plurality of rolls illustrated generally as 26, for first of all feeding the strip from the respective coil C, and secondly roll-forming the strip into the generally arcuate section desired for blind slats.

The details of such feed rolls and roll-forming rolls are omitted for the sake of clarity, but it will be observed that as will appear as this description proceeds, each of them may be separately controlled by means of braking and clutch mechanisms in a manner known per se, not described herein in detail so that each one of them may be

- 9 -

fed through the roll-forming rolls, and fed into the punching stations 14 and threading stations 16, selectively, for purposes to be described below.

Each of the bosses 20, 22, and 24 is also associated
5 with a respective strip length measuring control 28, 30, and 32 respectively. Each of the strip measuring controls is of a type generally well known in the art and provides a so-called free loop of strip material. Thus, each of the length controls comprises an elongated channel-shaped
10 enclosure 34, having suitable sensing means 36 (i.e., photo-sensing means) at its upper end. The sensing means 36 is adapted to sense the presence of the top portion of a loop of strip material within the channel 34, and thus send a length signal to the control console 18.

15 In this way, as will be described below, the operation of the feed rolls and roll-forming rolls associated with each of the bosses 20, 22, and 24, may be controlled, to feed strip material in the length required.

Punching and Cut-off Assembly

20 The punching and cut-off assembly indicated generally as 14 will be seen to comprise an elongated hollow bench portion 40, and two end support columns 42 and 44, upon which the bench 40 is supported.

Bench 40 has on its upper surface a pair of spaced-
25 apart rails 46-46. A plurality of moveable punching stations 48, 50, 52, 54, 56, and 58, are slidably mounted for longitudinal movement along bench 40, on the rails 46-46. While in this embodiment of the invention six such punching stations 48 to 58 are shown, it will be
30 appreciated that there may be a greater or lesser number depending upon the requirements of a particular manufacturer.

The details of the punching stations will be described later. However, each punching station is adapted to
35 receive each of the three strips S1, S2, and S3 coming from the three coils C, in side-by-side parallel spaced-apart relation. The punching stations are operated by means of a common longitudinal drive shaft 60 operated by means of a

- 10 -

suitable motor and clutch combination 62.

The far end or first punching station 48 (which is remote from the roll-forming assembly 12) is movably adjustable along bench 40, by means of a hand wheel 64 and is lockable by means of a locking wheel 66.

As best shown in Figure 9, the punching stations 48 through 58 are movably joined together by means of a scissors or "lazy tongs" type linkage indicated as 68.

The near end punching station 58, which is closest to the roll-forming assembly 12, and the linkage 68 are movably positionable by means of an electrical motor drive 69 and rack and pinion 69a. The motor drive 69 and the scissors linkage 68 are concealed within the interior of the hollow bench 40, and a cover plate 70 (Figure 3) is movably positioned thereover, to prevent contamination with debris or other material from the workplace. In order to provide a positive drive on the strips S1, S2, S3, drive shaft 71 and motor 71a are provided, driving feed rollers 72-72-72, through respective clutches 72a formed integrally with rollers 72 (Figures 8 and 13).

It will be understood that since the punching stations 48 through 58 are all linked together, by the scissors linkage, movement of the near end, or "upstream" punching station 58, will move all of the linked moveable punching stations 50, 52, 54 and 56, in unison but in varying amounts, while the reference station 48 remains in position.

It will be understood as is well known that in this kind of scissors or lazy-tongs linkage, each of the movable punching stations will move an increment equal to the next upstream punching station, less the proportional increment resulting from its connection thereto by the scissors linkage.

It will of course be appreciated that the downstream or far end punching station 48 is fixed by means of the handwheel 64 and locking wheel 66 and therefore constitutes a fixed or reference point, which is immovable.

Thus once the punching station 48 has been preset to

- 11 -

its desired fixed position, it thereafter remains stationary, while all of the other punching stations 50 through 58 are movable by means of the electrical motor drive 70.

5 The blind slats are themselves severed or cut from the strip S1, S2, and S3, as the case may be, at a cut-off station 74, which is fixed in position at the downstream end of the bench 40.

 Suitable punch drives and cut-off drives yet to be
10 described in the punching stations and cut-off station 74 are operated by the shaft 60.

 It will thus be appreciated that the rotation of the shaft 60 will procure both the punching of suitable holes in one of the strips S1, S2, or S3, and also cutting off at
15 the end of one of the strips S1, S2, and S3, of a blind slat which has already been formed, in a manner described below.

 Referring now to Figure 5, each of the punching stations 48 to 58 is adapted to punch an opening in any one
20 of the three strips S1 or S2 or S3 selectively, upon the operation of the common longitudinal drive shaft 60. Shaft 60 also operates cut off die station 74.

 This is achieved in the manner described below:

 Each of the stations 48 to 58 and 74 comprises a
25 generally unitary integral bridge member 80 defining on one side an interior recess 82.

 Within recess 82, a sliding plate 84 is received, being slidable upwardly and downwardly, while being restrained from sideways movement. Plate 84 is retained in
30 position by face plate 86.

 Shaft 30 is journalled in bridge 80 as at 88, and in plate 86 as at 90. A cam member 92 is fastened to shaft 60, and registers with movable or sliding plate 84.

 A generally rectangular cam receiving opening 94 is
35 formed in sliding plate 84. Rotation of the shaft 60 will thus cause rotation of cam 92, which will thus cause downward and upward movement of plate 84.

 Extending downwardly from plate 84, are three plate

- 12 -

extension members 96 - 96 - 96 which are spaced apart from one another, and depend downwardly on parallel axes. Each of the extension members 96 is formed with a pin 98 extending therefrom at right angles. Each of pins 98 are in turn received in respective slotted recesses 100, formed in respective die bar members 102. Die bar members 102 extend downwardly through die blocks 104, and are connected to suitable punching dies (not shown), in the case of the punching stations 48 through 58, or to suitable cutoff dies (not shown) in the case of the cutoff station 74, for purposes to be described below. The punching and cutoff dies are themselves omitted and are not specifically illustrated since they are well known in the art and require no special description. They simply reciprocate up and down and either punch holes for the raise cords, or cut off the blind slats from the ends of the strips, as the case may be. The die blocks 104 are formed with generally flattened slotted passageways 106 extending there through, for receiving the metal strips S1, S2 and S3 respectively.

The die blocks 104 are retained in position by the hand locking screw 107. In this way, the die blocks 104 may readily be removed and replaced or substituted to accommodate strip material S of different widths, as may be required for the manufacturing of blinds having slats of different widths from time to time.

Die clamping bars 107a are loosely secured between adjacent die blocks 104, and enable the clamping of all three die blocks 104 by a single clamping screw 107 in each of the punching stations (Figure 5).

As has already been explained above, the punch dies and cutoff dies are operable selectively. That is to say they may be selected either with a respect to either of strips S1, S2 or S3, or as to any one or more of the punching stations 48 through 58, as well as the cutoff station 74.

Since there are six punching stations and one cutoff station, and three dies in each station it will be seen that there are in fact twenty-one separate dies to be

- 13 -

controlled and operated selectively.

This is achieved in accordance with invention by means of movable die locking bosses 108, mounted in extension members 96. Bosses 108 register with the upper ends of the
5 tongues 102. The bosses 108 are connected to respective solenoids 110. The solenoids 110 are in turn connected to the control console 18. By suitable logic controls within the console 18, any combination of the solenoids 110 may be selected for operation.

10 It will be appreciated that as mentioned above each of the solenoids 110 are separately and individually controllable and operable by means of the console 18. The operation of any one of the solenoids 110 will cause its respective boss 108 (Figures 5 and 6) to be extended
15 outwardly from its respective extension member 96. It will thus register with and overlie the upper end of its respective tongue member 102.

When the boss is in this position, the operation of the plate member 84 within the die station, in which its
20 extension member 96 is located, will cause operation of the die connected to the tongue member 102, while leaving the other dies in that station unaffected and, therefore, inoperable.

In this way, individual ones of the dies in each
25 station can be individually selected and operated, by means of the control console 18, and the common drive shaft 60, which operates all of the punching stations, and also the cut-off station, simultaneously.

The Threader Assemblies

30 The threader assembly 16 functions to assemble the individual blind slats on their respective ladder tapes.

In order to do this, the threader assembly 16 has a plurality of threader stations 130, 132, 134, 136, 138 and 140. The threader stations 130 to 140 are supported on a
35 movable generally horizontal bench portion 142. Bench portion 142 is hollow in much the same way as bench portion 40 of the punching assembly 14.

The threader stations are slidably movable along the

- 14 -

bench 142, on rails 144 - 144.

The nearest upstream station 130, is provided with a manual adjustment knob 146 and a locking wheel 148.

5 The threading stations 130 to 140 respectively are connected together by a scissors or a lazy tongs type linkage 150 (Figure 12). The linkage 150 is similar to the linkage 68 connecting the punch die stations 48 through 58 (Figure 10).

10 In the case of the threading stations, the first or upstream threading station 130 is manually adjustable as by hand wheel 46 and may be fixed by locking wheel 148 to provide a reference point.

The endmost or downstream threading station 140 is movable by means of a motor 152 and rack and pinion 154.

15 In this way, the downstream endmost threading station 140 can be moved by the motor, and the other threading stations 138, 136, 134 and 132 will move in unison, but in varying increments. Threading station 130 will of course remain fixed and immovable, once it has been pre-set by
20 means of the hand wheel and establishes a reference point for the operation of the linkage 150.

In addition to this longitudinal movement, the threading stations 130 to 134 are, as mentioned, mounted on a longitudinal threader support or bench 142. As shown in
25 Figures 3 and 9, the longitudinal bench 142 is itself laterally movable. For this purpose, it is mounted on a first end rail 156, supported on the top of leg 44, and a second end rail 158 supported on the top of a leg 160. Sliding guide members 162 - 162 are located on the under
30 side of the bench 142 and engage rails 156 and 158. In this way the bench 142 may be slid laterally, relative to the longitudinal axis of the bench 142, and also relative to longitudinal axis of the bench 140 and strips S1, S2 and S3.

35 Lateral movement of the bench 142 is achieved as shown in Figure 9, by means of a rack and pinion drive 164 - 164, at each end of bench 142 operated by a common drive shaft 166. Drive shaft 166 is driven for example by belt 168 and

- 15 -

motor 170. In this way, the bench 142 can be traversed laterally from side to side so as to align with any one of the strips S1, S2 and S3 as desired.

5 The operation of the threading stations themselves in this embodiment of the invention is much the same as the operation of threading stations in earlier forms of blind forming machines. As best shown in Figure 11 a threader station, in this case indicated as 132 will be seen to comprise a guide shoe 172, adapted to receive one of the
10 strips indicated generally as S. The ladder tapes or cords indicated generally as T, extend upwardly past feed fingers 174.

Releasable blade supporting clips 176 and 178 are supported on spaced apart generally U-shaped channel guide
15 members 180 and 182.

Once a slat has been threaded to make way for the next slot, it is then moved upwardly.

The clips 176 and 178 are mounted resiliently, and are adapted to allow a strip S to be raised upwardly. Raise
20 fingers 184 are provided for engaging the slat and raising it upwardly once it has been threaded into its respective tapes T.

The raise fingers 184 are driven by a suitable common drive shaft 186 extending through all of the threader
25 stations 130 to 140. The drive housing 188 contains a suitable drive mechanism (not shown) whereby the raise fingers 184 may be operated.

In addition, as was common in earlier such blind making machines, an escapement mechanism (not shown) is
30 provided for gradually and progressively releasing the tapes T from storage locations (not shown) below each threader station upwardly as each slat is moved upwardly by the raise fingers.

The U-shape guides 182 will be seen to be longer than the
35 guides 180. This permits a large number of blind slats S to be supported one above the other, so as to permit the assembly of a blind of considerable size for the large number of slats.

- 16 -

It will of course be appreciated that once the necessary number of slats have been assembled, the tapes are cut by the operator, and the stack of blind slats in their tapes, is then removed. The stack is then taken to
5 another location (not shown) where the raise cords are threaded through the holes h, and where the head rails, and bottom rails (Figure 2) of the blinds are attached.

The common drive shaft 186 for all of the threader stations is driven by means of any suitable electrical
10 motor drive such as motor 190, and drive 192 (Figure 3).

The console 18 will be a typical computer, operating a variety of control relays (not shown) such as are well known in the art, for controlling the various motors, brakes, clutches and the like, and of course the solenoids 108. A
15 general schematic diagram is shown in Figure 13. A typical keyboard 200, will be connected to the console 18 for inputting appropriate commands.

In operation, strips S1, S2 and S3 may be supplied either in three different widths of strip material, or in
20 three different colours of material of the same width.

A blind may then be made up of a single colour in a predetermined width, or made with up to a combination of three colours in a predetermined width.

In the event that a blind is made up for example of
25 three colours, then, for example, the threader assembly 16, and its bench 142, will be aligned with for example the first strip S1, by operation of the motor 170.

The length of the blind slats required in the eventual blind will have been inputted through the keyboard 200.
30 The spacing between the end of the blind slat and the first raise cord hole h to be punched in the blind slat will have been preset manually by presetting the endmost punch station 48 by means of the hand wheel 64.

The computer console 18 will then operate motor 70, to
35 cause the station 58 to move to a predetermined position. It may be that the blind slat will be punched with only two raise cord holes, or three or four or more raise cord holes may be punched, depending upon the length of the blind.

- 17 -

The computer is such that in the event that only two holes are required, the first hole will be punched by the fixed endmost punch station 48. The second raise cord hole will then be punched by any one of the punch stations 50
5 through 58, as selected and determined by the computer.

Similar adjustments will have been made manually to the first threader station 130 by means of the hand wheel 146. The motor 152 will then move the downstream threader station 140 to its appropriate position, thereby moving all
10 other moveable stations 132-138, in varying amounts.

The strip feed and roll forming assembly 12 is then operated so as to uncoil strip S1 from boss 20 and feed it through its sequence of rolls 26 so as to feed it in the appropriate length and also to roll form it to a desired
15 shape in a manner known per se.

The roll formed strip S1 will then pass down through the die stations 58 through 74 in sequence. When it reaches the die station 74, the motor 62 is operated by the computer and at the same time, the appropriate solenoids
20 108 are also operated. This will then cause the end portion of the blind slat to be cut as at the cut off station 74 and also to be punched at the punch station 48 and a preselected one of the remaining punch stations 50 through 58. Obviously, if more than two holes are to be
25 punched, then the computer will operate solenoids at all of the appropriate punch stations to produce punching of all holes simultaneously.

After punching and cutting has been completed, by a single revolution of the shaft 60, the strip feed mechanism
30 will then move strip S1 a predetermined distance, causing it to advance into the threader stations 130 through 138. That portion of the strip forming the blind slat, will then, in this process be threaded into its respective two or more ladder tapes T, when the appropriate length has
35 passed the station 74.

In accordance with a further embodiment of the invention (Figures 14, 15, 16), a portion of the invention may also be used for the formation of the header rails

- 18 -

themselves. As will be seen from the illustrations, a typical venetian blind has a header rail R is usually of three-sided channel shaped cross-section, being usually made of roll formed sheet metal. It is necessary to cut this off at the same length as the blind slats themselves. It is also necessary that openings be punched in the bottom wall of the header rail, to accommodate the ladder tapes and raise cords. These holes must, of course, register with the holes h punched in the blind slats themselves. In this case, typically, sheet metal will be formed elsewhere in a roll forming mill into lengths of U-shaped channel of convenient size.

Figure 14 illustrates a punch and cut-off die assembly suitable for operation in association with the U-shaped header rail.

Typically it will have a support bench 200, supported on legs 202 and 204. Two die stations 206 and 208 are provided side by side with one another spaced apart, essentially on top of the surface of leg 202. The first die 206 is a cut off die, and the second die 208 is a punch die. They are operable independently of one another for reasons to be described alone.

In order to locate the position for the punching of the holes in the head rail r, a moveable end stop member 210 is provided. End stop member 210 contains a stop finger 212 which is adapted to engage the free or downstream end of the rail r. End stop member 210 is slidably adjustable along bench 200. Along the length of bench 200, there are a plurality of separate abutment stop stations 216, 218, 220, 222, 224, 226. Station 216 is movably adjustable, and may be fixed in position by means of a handwheel 214, lockable in the same way as the handwheels in respect of the adjustable punch and threading stations described above.

The remaining abutment stations 218 to 226 are movably interconnected by means of a scissors type linkage 228, such as that described in connection with the punch die stations and threading stations described above. A motor

- 19 -

230 and rack 232 are connected to the downstream abutment station 226, so that the downstream abutment station 226 may be controlled and moved as to its position. Movement of the downstream station 226 will also move all of the stations upstream of it that is to say stations 218 to 224. It will be appreciated however that one station 216 has been set by handwheel 214, then it will not thereafter move, but will provide a reference position.

The moveable stop member 210 incorporates a solenoid 234, which is adjustable in response to a manual or automatic control (not shown) to move upwardly and downwardly. In its downward position it will interfere with and abut against its respective stop 216, 218 and so on.

Solenoid 234 may also be controlled by a suitable computer console such as console 18, and motor 230 may also be controlled in the same way.

It will thus be appreciated that in this way, the punching of the holes in the head rail are maybe set to a predetermined spacing, and a predetermined distance from each end of the head rail are, by the console 18, in a manner already described above in connection with the punching and cutting off of the blind slats themselves.

The U-shaped channels are also required to have openings punched both in the bottom wall and the side wall, for reception of ladder tape controls and raise cord controls.

These holes are punched in a separate manually-operable punch die, of a type known in the art, and not illustrated herein.

It will thus be seen that the invention is applicable both to the formation of the blind slats themselves and also to the header rails.

A bottom rail is also usually incorporated in venetian blinds, and this can also be formed in the same way as the header rail, with modifications in the shape of the dies used.

The foregoing is a description of a preferred

- 20 -

embodiment of the invention which is given here by way of example only. The invention which is not to be taken as limited to any of the specific features as described, but comprehends all such variations thereof as come within the

5 scope of the appended claims.

CLAIMS:

1. Apparatus for the manufacture of blinds of the type having a headrail, a plurality of ladder tapes suspended from said headrail, a plurality of blind slats supported by
5 said ladder tapes, and raise cord means passing through openings in said blind slats, whereby said blind slats may be drawn upwardly toward said headrail, and said apparatus comprising;
- die support means defining an elongated pathway along
10 a predetermined axis for passage of strip material therealong for the formation of said blind slats;
- a plurality of die means mounted on said die support means, at least some of said die means being moveable therealong, said die means being aligned with one another
15 along said strip path whereby a said strip of said material may pass therealong;
- die operating means operable to operate said die means, whereby to form openings in said strip material;
- cut off die means for cutting off a pre-selected
20 length of said strip material to form a said slat for a said blind;
- slat threader means, located downstream of said die support means, for supporting said ladder tapes and defining a pre-determined slat threading path for threading
25 a said slat through said ladder tapes, and,
- movement means supporting said threader means, whereby said threader means may be moved laterally relative to said axis of said die support means; and
- control means are provided to procure selective
30 operation of respective ones of said die means, whereby to form openings in said strip material at pre-selected spaced points therealong.
2. Apparatus as claimed in claim 1 wherein there are a
35 plurality of said die means, and at least some of said die means being moveable relative to others of said die means and including linkage means interconnecting the same, whereby movement of one of said die means is communicated

- 22 -

to all of the remaining said connected moveable die means.

3. Apparatus as claimed in claim 2 wherein said movement connection means causes each of said die means to
5 move a distance different from its adjacent said die means, whereby at least selected ones of said die means may be precisely positioned along said support means, and thereby form openings in said strip material in desired locations.

10 4. Apparatus as claimed in claim 3 wherein all of said die means are operable by a single common power operated means, and including control means for selectively operating individual ones of said die means, through the medium of said common power operated means.

15

5. Apparatus for the manufacture of blinds of the type having a headrail, a plurality of ladder tapes suspended from said headrail, a plurality of blind slats supported by said ladder tapes, and raise cord means
20 passing through openings in said blind slats, whereby said blind slats may be drawn upwardly toward said headrail, and said apparatus comprising;

25 die support means defining an elongated pathway along a predetermined axis for passage of at least two strips of strip material therealong for the formation of said blind slats;

30 a plurality of die means mounted on said die support means, at least some of said die means being moveable therealong, said die means being aligned with one another along said pathway whereby said strips of said material may pass therealong side by side;

at least two punch dies associated with each of said die means in spaced apart relation for receiving respective said strips therethrough;

35 die operating means operable to procure operation of said die means, and,

control means for selecting certain of said punch dies to be operated thereby whereby to form openings in a

- 23 -

selected one of said strips of said strip material at pre-selected spaced points therealong.

5 6. Apparatus as claimed in claim 5 including cut off die means for cutting off a pre-selected length of a selected one of said strips of said strip material to form a said slat for a said blind.

10 7. Apparatus as claimed in claim 6 including slat threader support means, located downstream of said die support means, for supporting said ladder tapes and defining a pre-determined slat threading path for threading a said slat through said ladder tapes.

15 8. Apparatus as claimed in claim 7 wherein there are a plurality of said die means, and at least some of said die means being moveable relative to others of said die means and including linkage means interconnecting the same, whereby movement of one of said die means is communicated
20 to all of the remaining said connected die means.

 9. Apparatus as claimed in claim 8 wherein said movement connection means causes each of said die means to move a distance different from its adjacent said die means,
25 whereby at least selected ones of said die means may be precisely positioned along said support means, and thereby form openings in said strip material in desired locations.

30 10. Apparatus as claimed in claim 9 wherein all of said die means are operable by a single common power operated means, and including control means for selectively operating individual ones of said die means, through the medium of said single common operating means.

35 11. Apparatus for the manufacture of components of window coverings of the type having a headrail, a plurality of suspension means extending from said headrail, and window covering means supported by said suspension means,

- 24 -

whereby said window covering means may be moved, and said apparatus comprising:

5 die support means defining a pathway along a predetermined axis for passage of component material therealong for the formation of said components;

a plurality of die means mounted on said die support means, said die means being aligned with one another along said pathway whereby said component material may pass therealong;

10 die operating means operable to procure selective operation of respective ones of said die means, and, control means for the same, whereby selectively to form openings in said material at pre-selected spaced points therealong and to cut off a pre-selected length of said material to form a said component for a said blind;

15 end stop means movably mounted on stop support means for movement therealong relative to said die means, and,

abutment means at spaced intervals along said support means, linked together for movement in unison.

20

12. Apparatus as claimed in claim 11 wherein there are a plurality of said die means, and at least some of said die means being moveable relative to others of said die means and including linkage means interconnecting the same, whereby movement of one of said die means is
25 communicated to all of the remaining said connected moveable die means.

13. Apparatus as claimed in claim 12 wherein said
30 movement connection means causes each of said die means to move a distance different from its adjacent said die means, whereby at least selected ones of said die means may be precisely positioned along said support means, and thereby form openings in said strip material in desired locations.

35

14. Apparatus as claimed in claim 13 wherein all of said die means are operable by a single common power operated means, and including control means for selectively

- 25 -

operating individual ones of said die means, through the medium of said common operating means.

5 15. A method of manufacturing blinds of the type having a headrail, a plurality of ladder tapes suspended from said headrail, a plurality of blind slats supported by said ladder tapes, and raise cord means passing through
10 openings in said blind slats, whereby said blind slats may be drawn upwardly toward said headrail, and said method comprising the steps of:

 passing strip material along an elongated pathway defining a predetermined axis;

 progressively and sequentially passing said material
15 through a plurality of die means at least some of said die means being relative to one another, said die means being aligned with one another along said path whereby a said strip of said material may pass therealong;

 operating said die means whereby to form openings in
20 said strip material;

 cutting off a pre-selected length of said strip material to form a said slat for a said blind;

 passing said material through slat threader means, located downstream of said die means, said slat threader
25 means supporting ladder tapes and defining a predetermined path whereby to thread a said slat through said ladder tapes, and, moving said threader means laterally relative to said axis of said die means; and

 controlling the operation of the die means to operate
30 ones of the die means selectively to form openings in the strip material at preselected positions therealong.

 16. A method as claimed in claim 15 wherein there are
35 a plurality of said die means, and at least some of said die means being moveable relative to others of said die means and linkage means interconnecting the same, and including the step of moving one of said die means, said movement being communicated to all of the remaining said


- 26 -

connected moveable die means whereby they move in unison.

17. A method as claimed in claim 16 wherein each of
said die means moves a distance different from its adjacent
5 said die means, whereby at least selected ones of said die
means may be precisely positioned along said support means,
and thereby form openings in said material in desired
locations.

10 18. A method as claimed in claim 17 wherein all of
said die means are operable by a single power operated
means, and including the steps of selectively operating
individual ones of said die means, through said common
operating means.

15

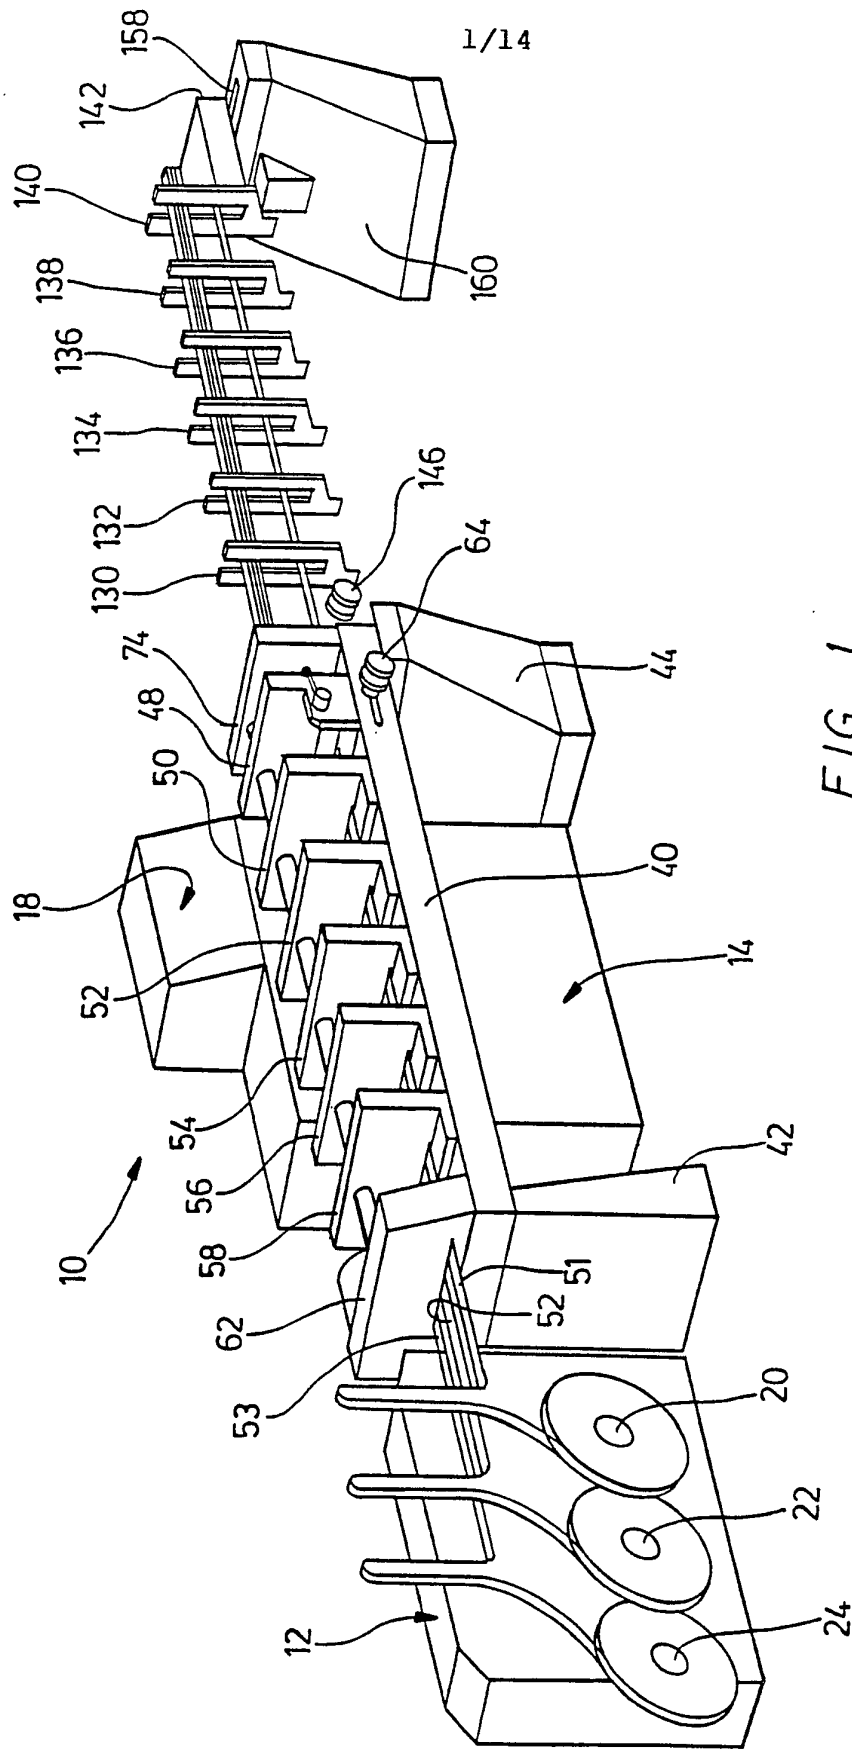

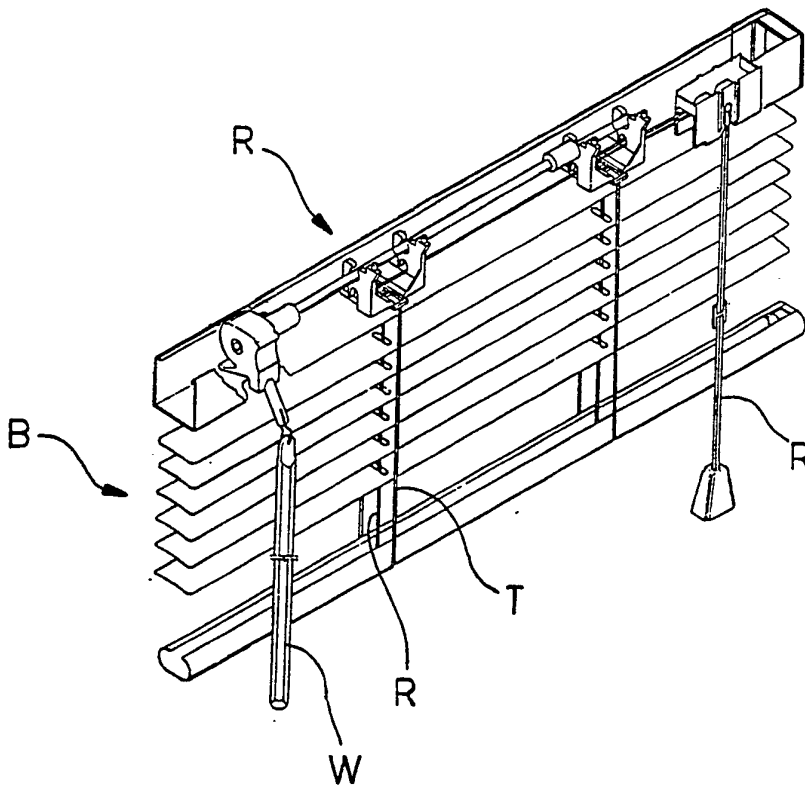


FIG. 2

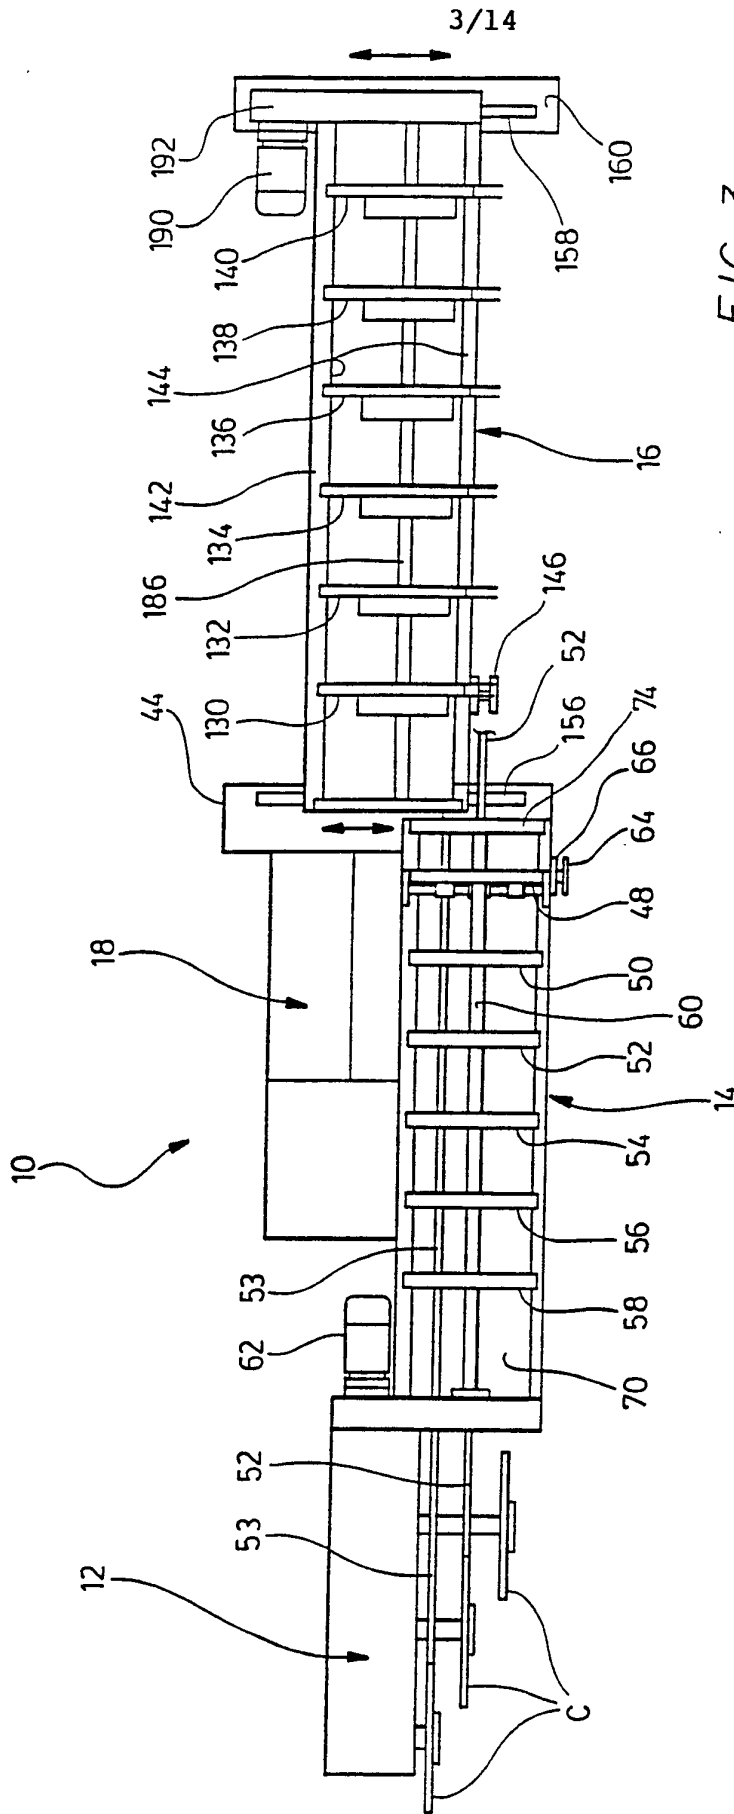


FIG. 3

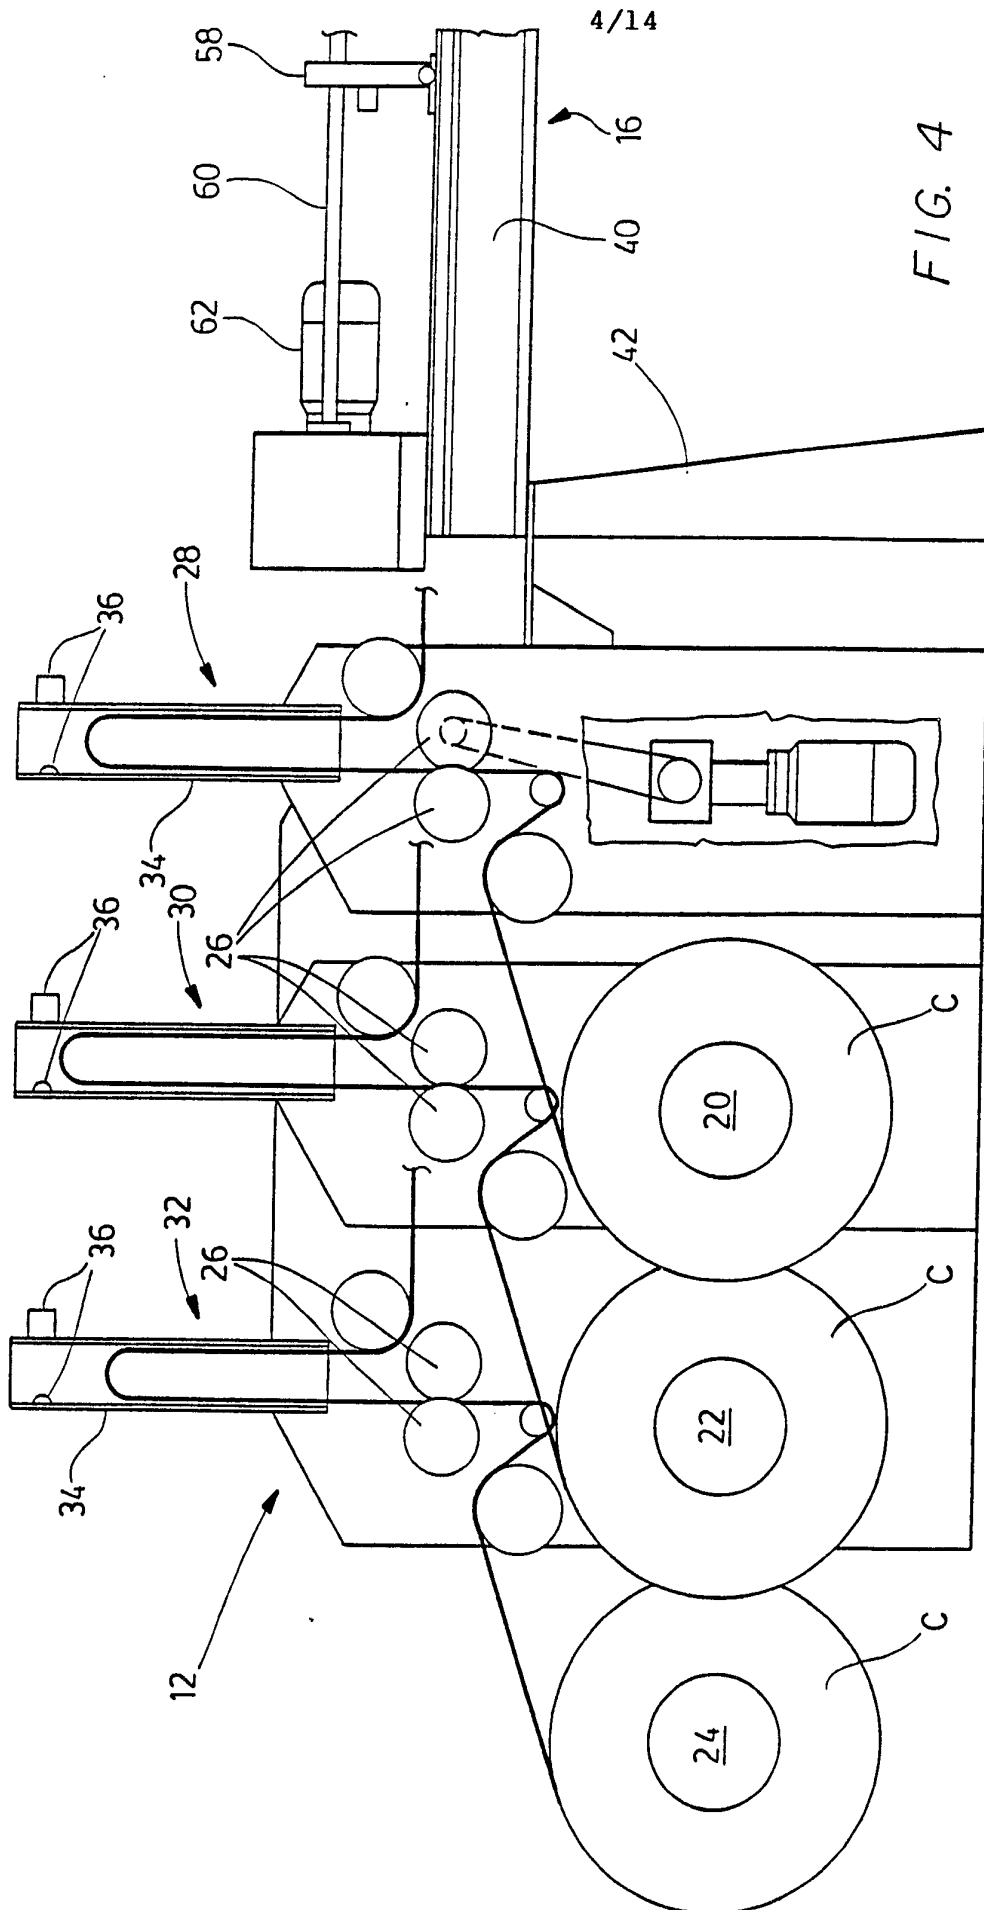


FIG. 4

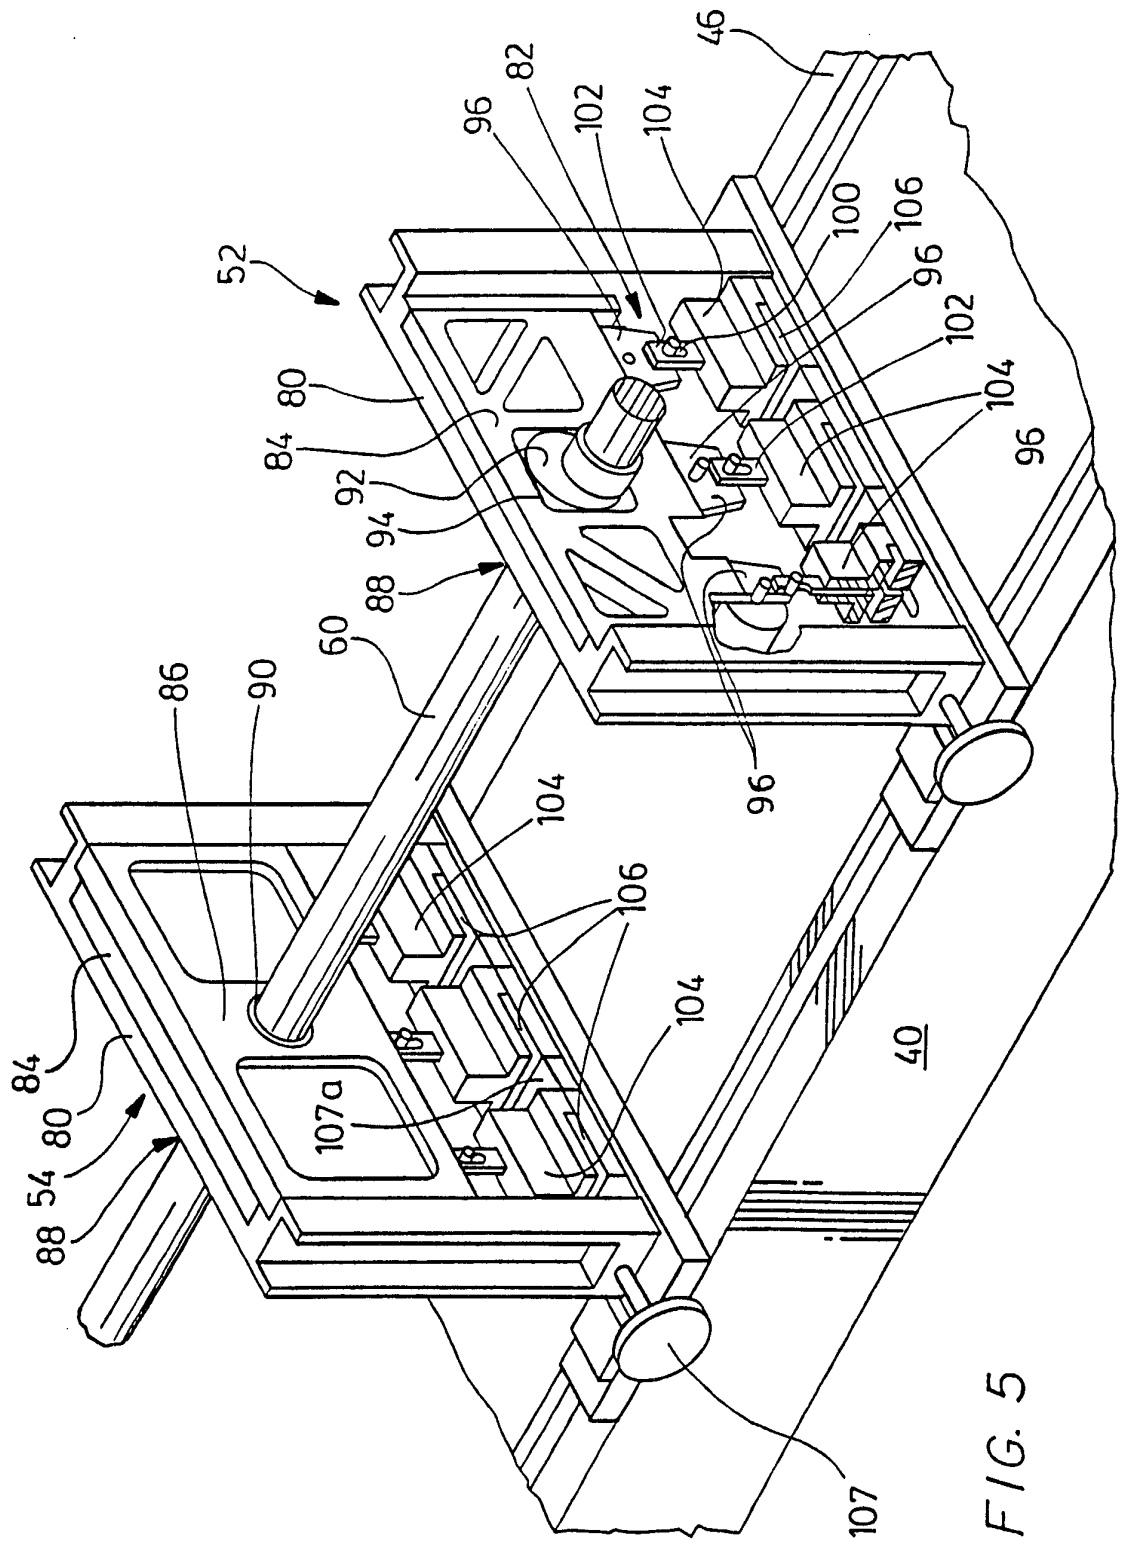


FIG. 5

6/14

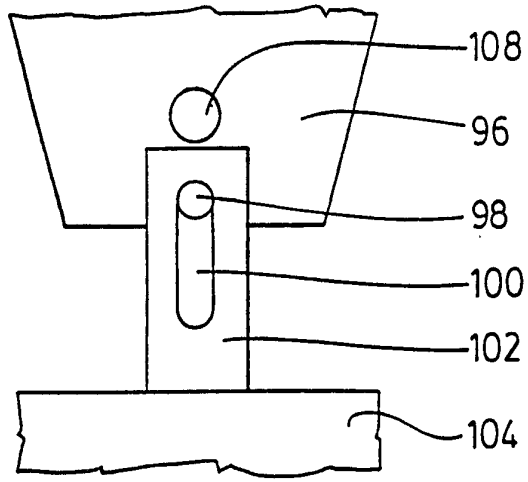


FIG. 6

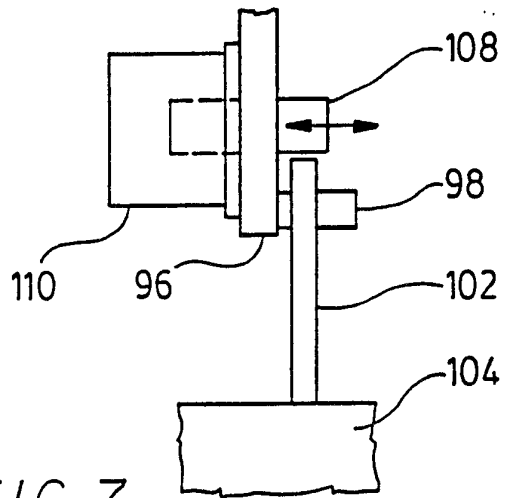


FIG. 7

7/14

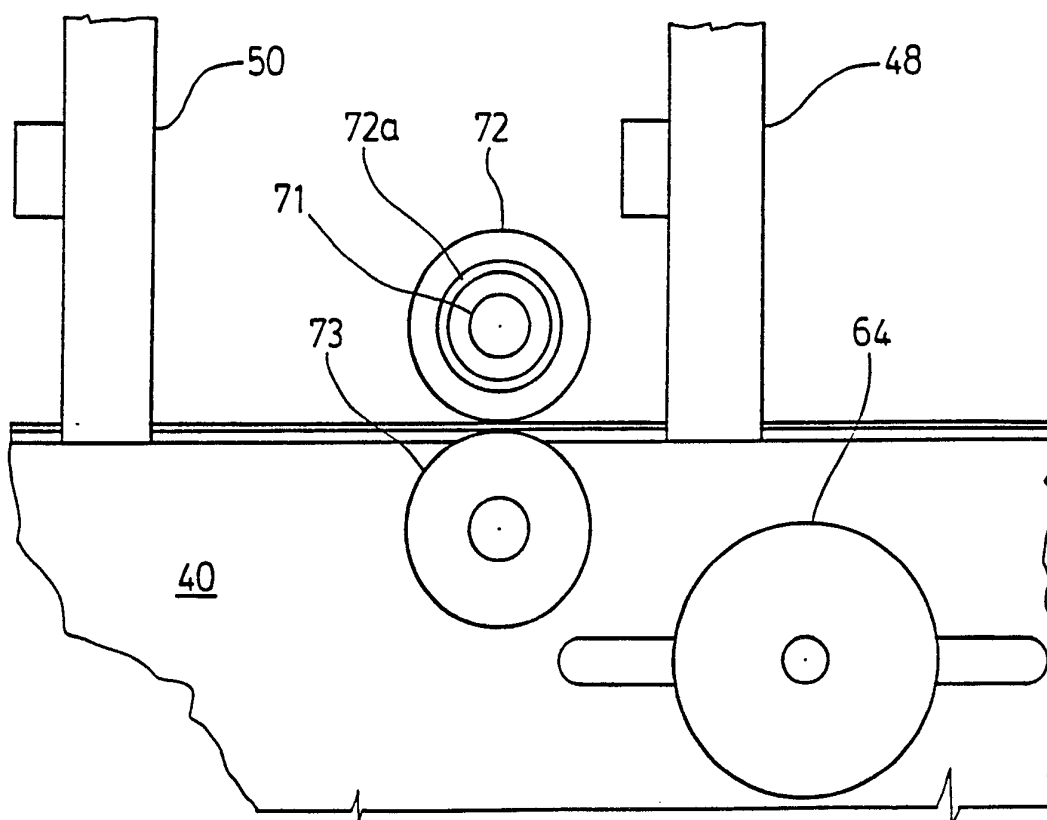
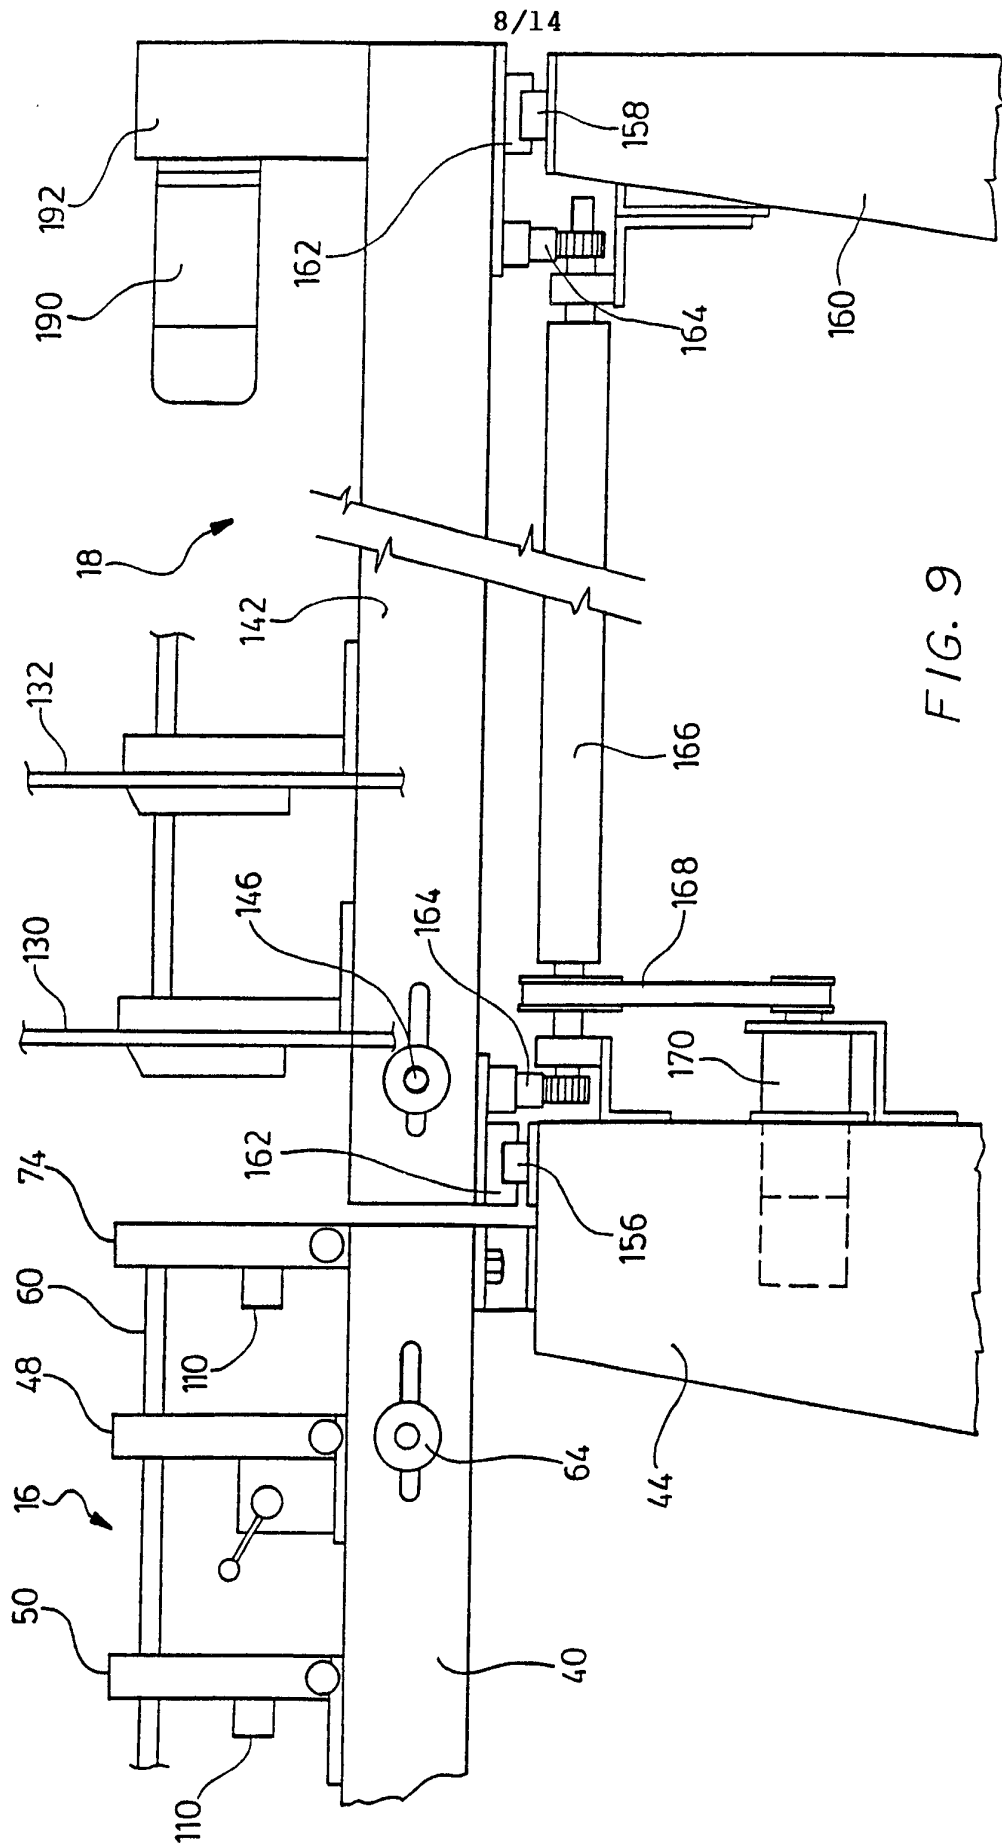


FIG. 8



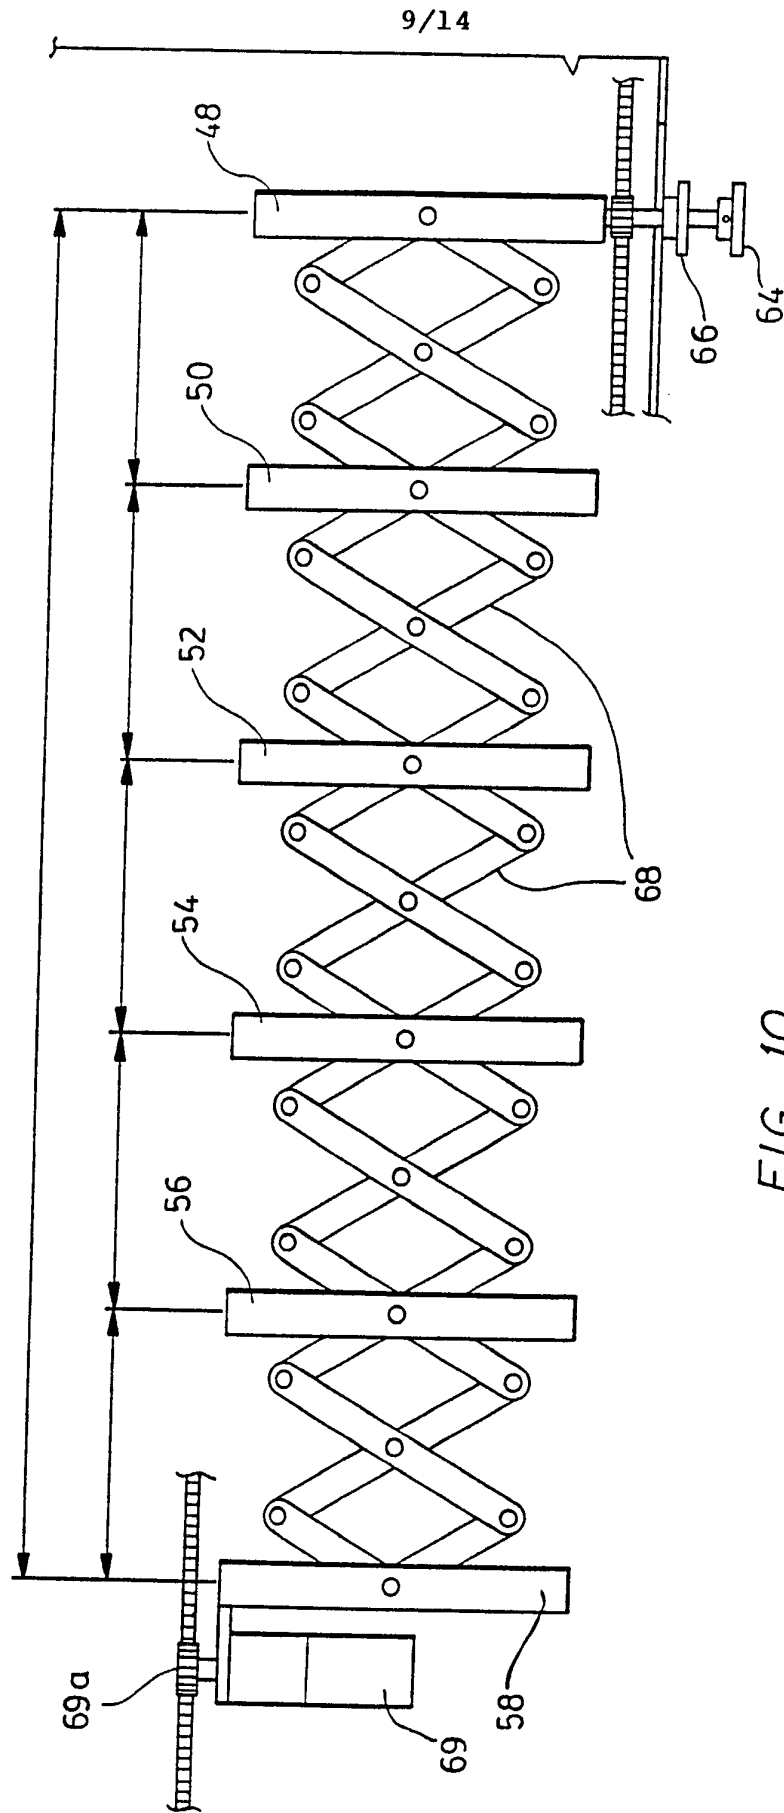


FIG. 10

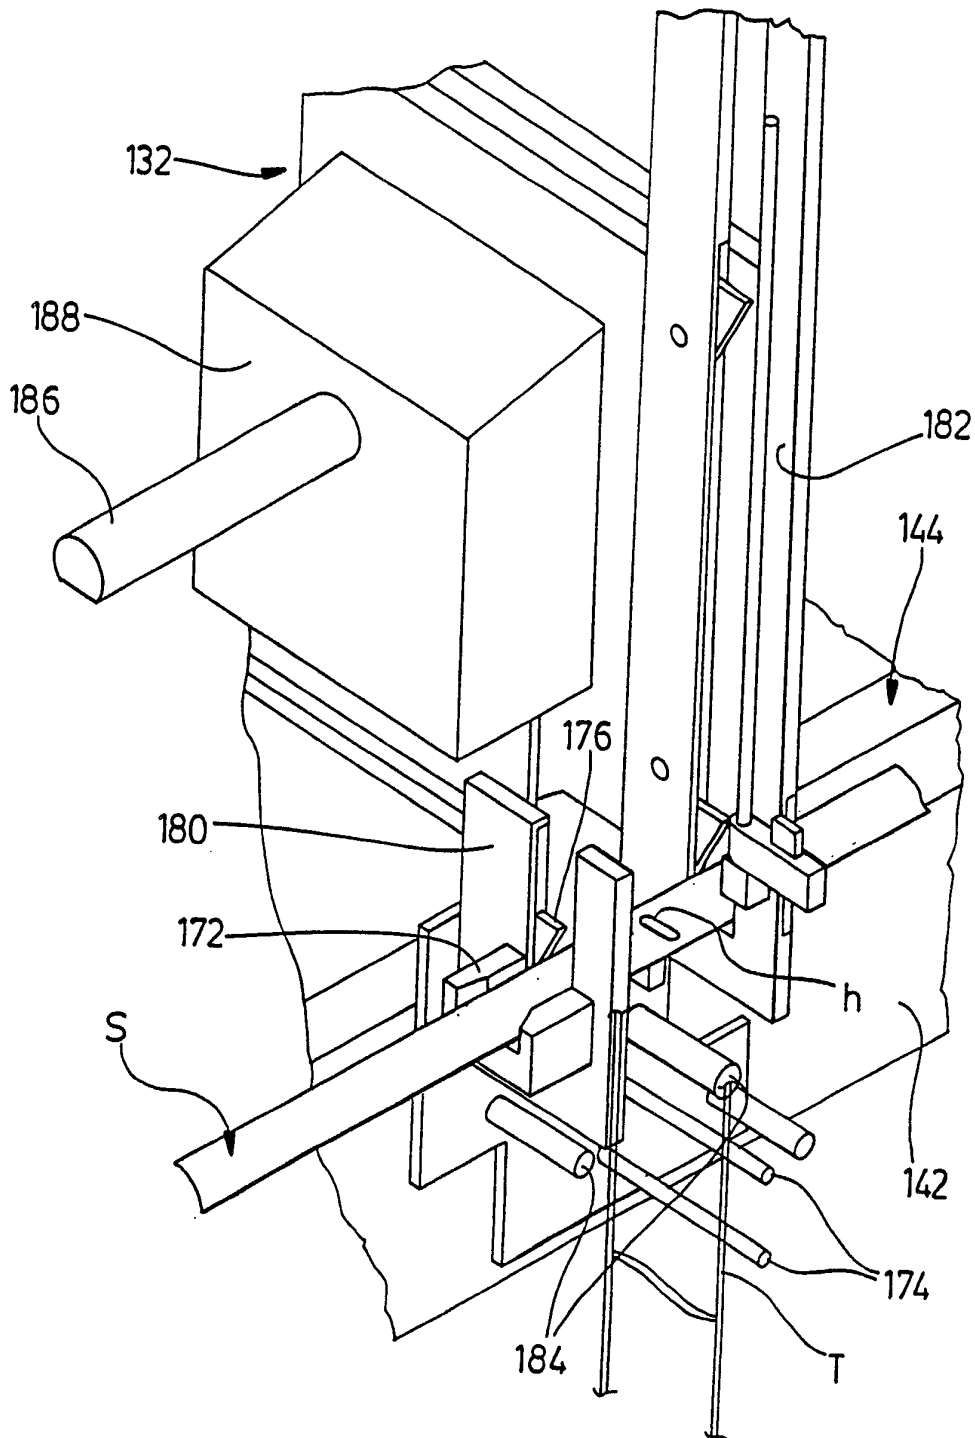


FIG. 11

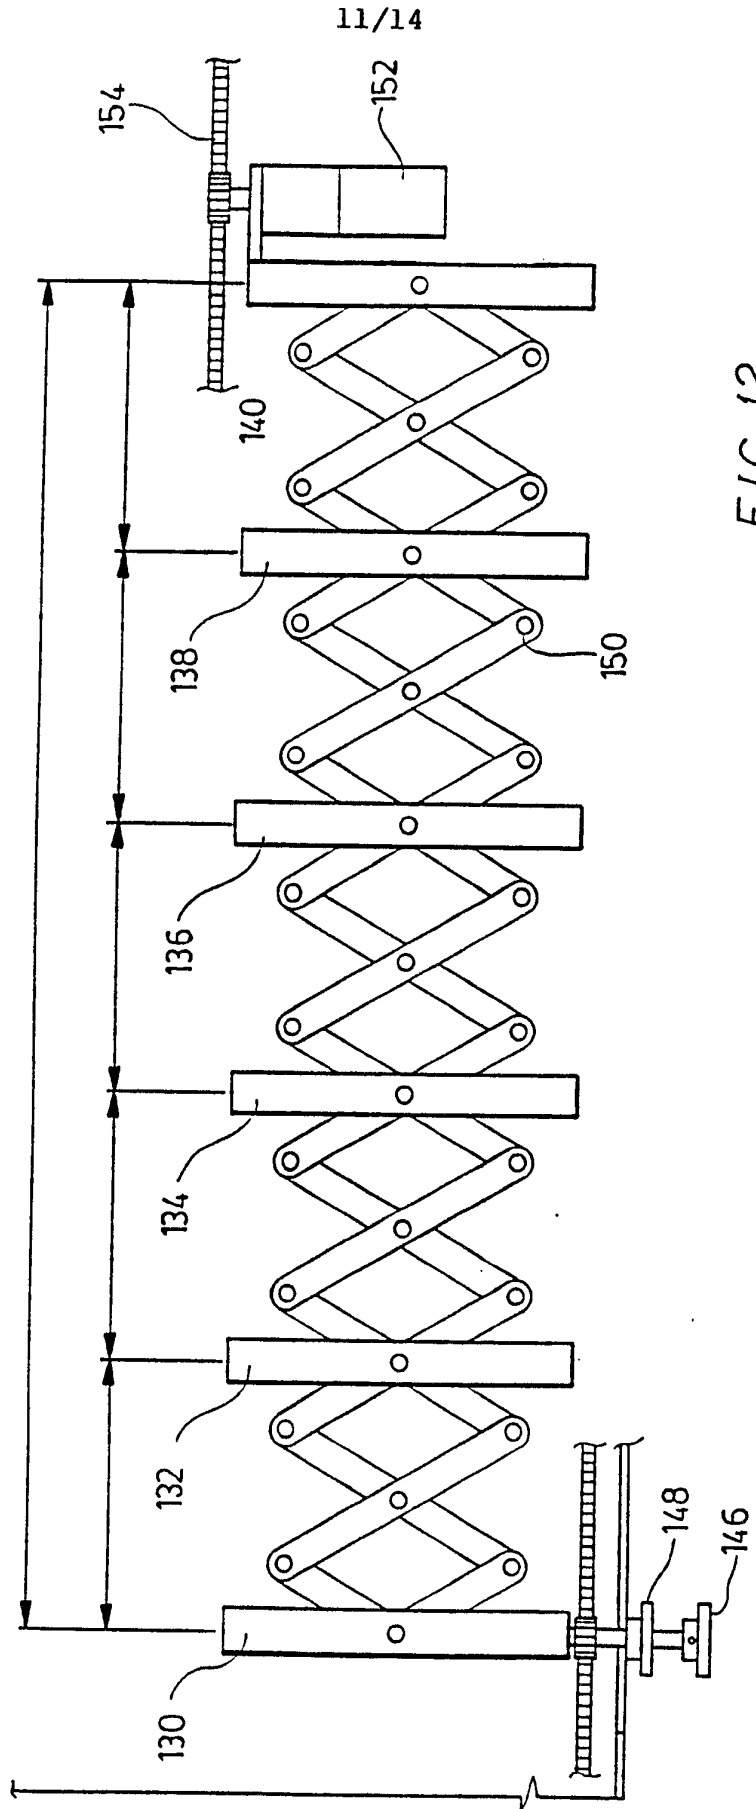


FIG. 12

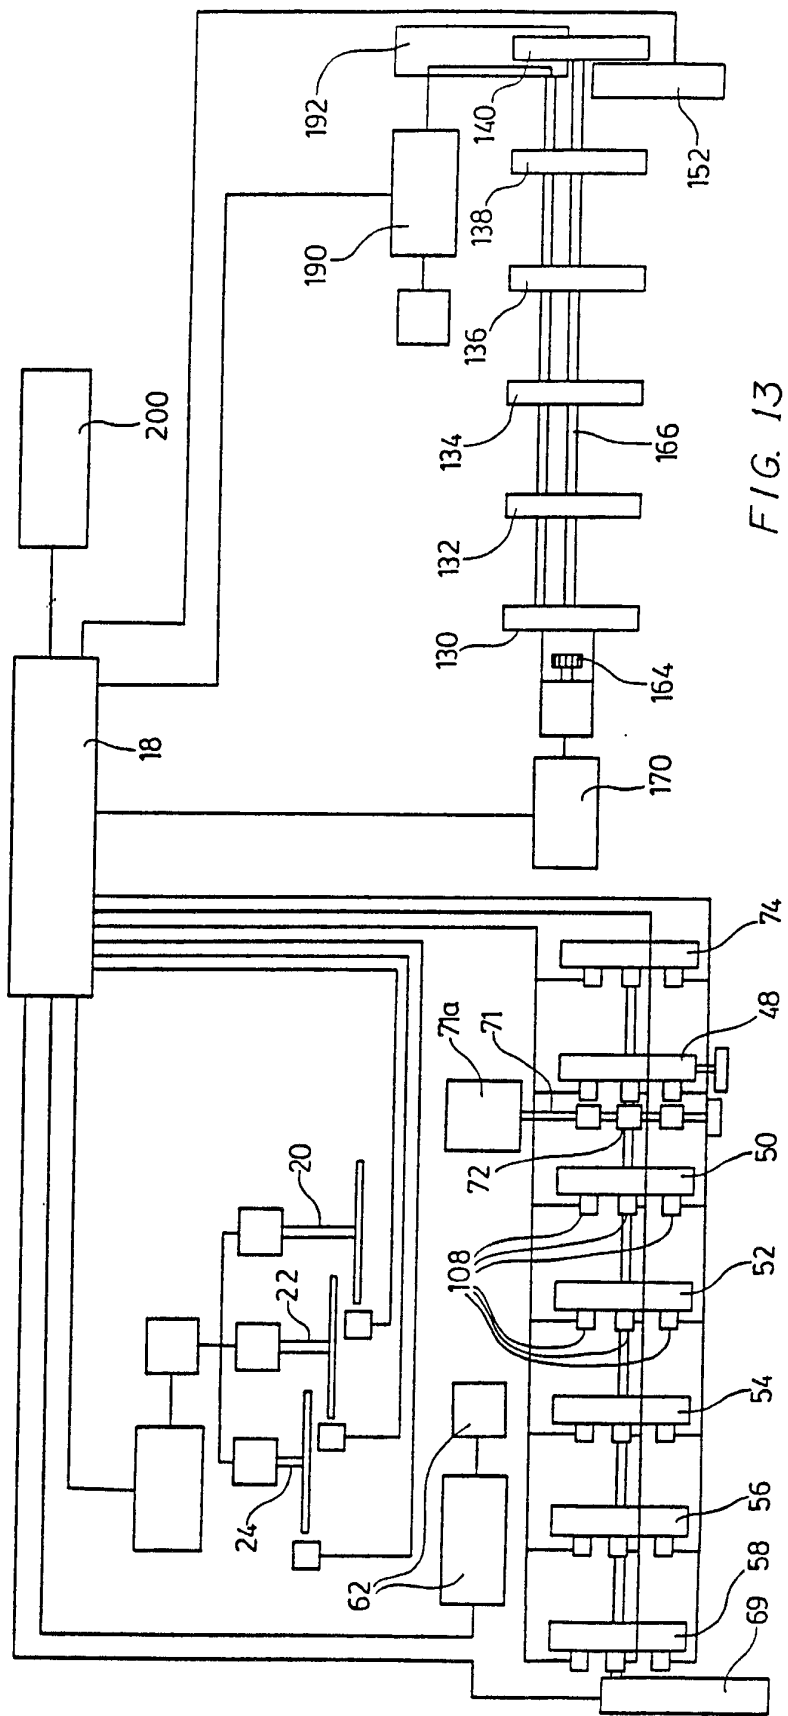


FIG. 13

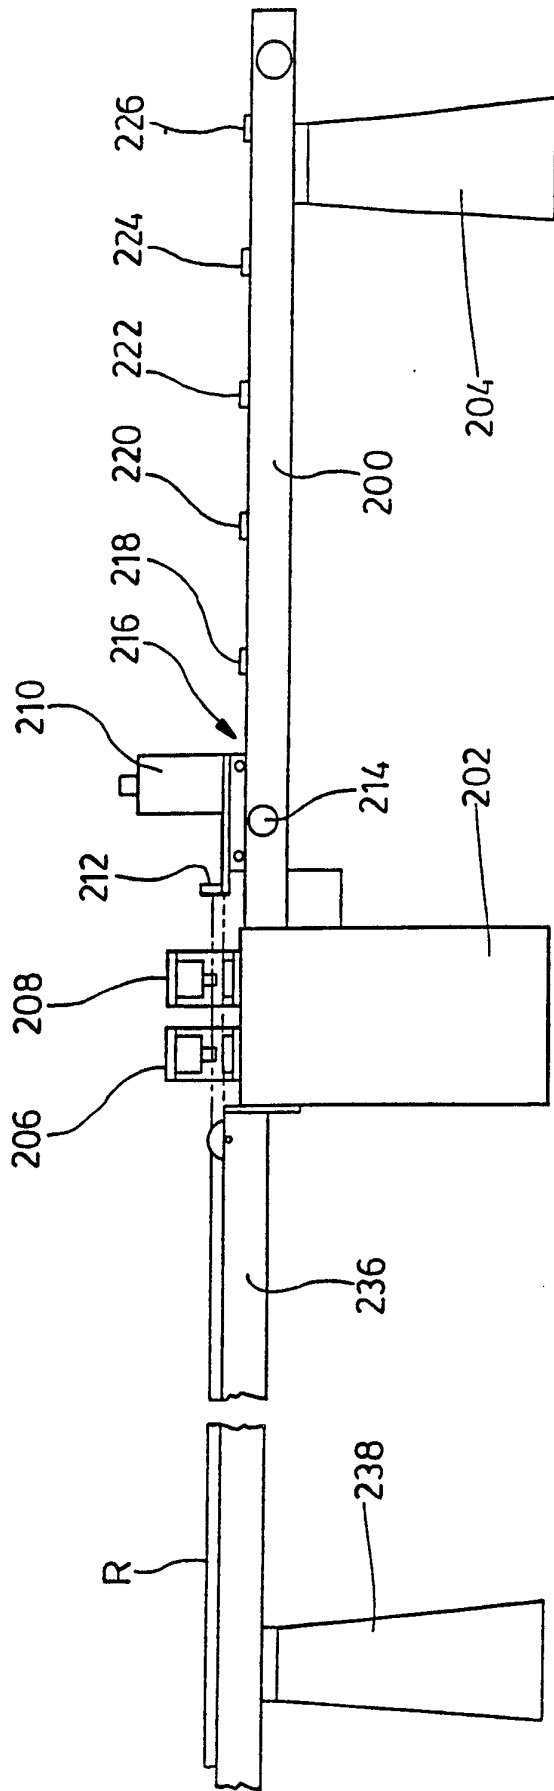


FIG. 14

14 / 14

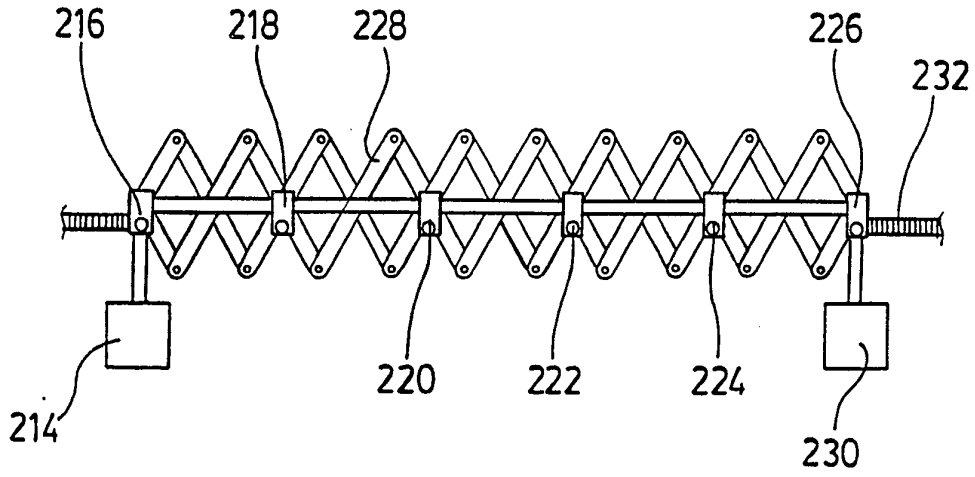


FIG. 15

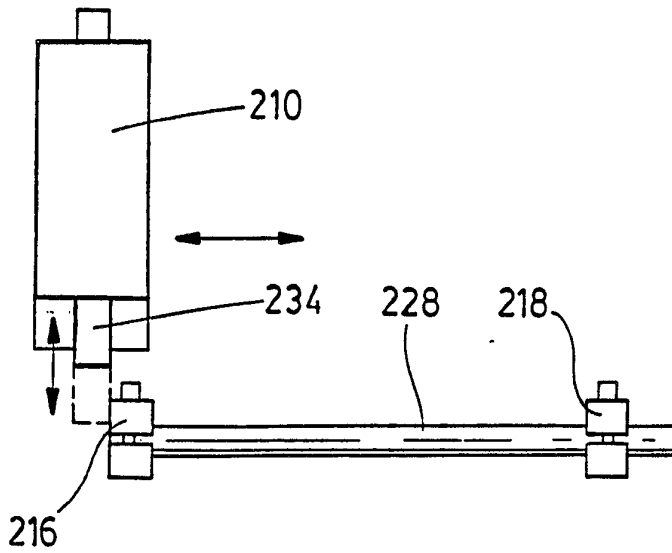
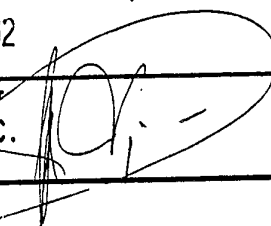


FIG. 16

INTERNATIONAL SEARCH REPORT

PCT/CA 92/00141

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶ According to International Patent Classification (IPC) or to both National Classification and IPC Int.Cl. 5 E06B9/266		
II. FIELDS SEARCHED Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	E06B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	US,A,2 893 106 (ROSENBAUM) 7 July 1959 see column 4, line 39 - column 10, line 31; claims; figures 1,5-11,15-18 ---	1-4, 12-18
A	EP,A,0 331 657 (NILSSON) 6 September 1989 see column 2, line 15 - column 4; figures ---	1-6,8-18
A	WO,A,8 504 687 (NILSSON) 24 October 1985 see page 4, line 15 - page 5, line 31 see page 8, line 11 - line 37; figures 1,8,9 ---	1,5-7,15
A	US,A,4 790 226 (TSUCHIDA) 13 December 1988 see column 3, line 53 - column 8, line 51; figures ---	1,15
A	US,A,4 615 087 (CHANG) 7 October 1986 ---	
A	US,A,4 823 449 (CHANG) 25 April 1989 --- -/--	
¹⁰ Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search 15 JUNE 1992		Date of Mailing of this International Search Report 16. 07. 92
International Searching Authority EUROPEAN PATENT OFFICE		Signature of Authorized Officer VIJVERMAN W.C. 

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category °	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No.
A	EP,A,0 234 548 (HUBER) 2 September 1987 ---	
A	US,A,4 607 419 (KÖHLER) 26 August 1986 ---	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO. CA 9200141
SA 58063**

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 15/06/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-2893106		None	
EP-A-0331657	06-09-89	SE-B- 458379 AU-A- 3080589 JP-A- 1274942 US-A- 5060353	20-03-89 31-08-89 02-11-89 29-10-91
WO-A-8504687	24-10-85	SE-C- 441941 AU-B- 580996 AU-A- 4232385 CA-A- 1243192 DE-A- 3563467 EP-A, B 0182805 JP-T- 61501862 SE-B- 8441941 US-A- 4665599	27-02-86 09-02-89 01-11-85 18-10-88 28-07-88 04-06-86 28-08-86 18-11-85 19-05-87
US-A-4790226	13-12-88	JP-A- 62148114 JP-A- 62148115 JP-C- 1594627 JP-B- 2017291 JP-A- 62148116 JP-A- 62153482 JP-A- 62153483 JP-A- 62157798	02-07-87 02-07-87 27-12-90 20-04-90 02-07-87 08-07-87 08-07-87 13-07-87
US-A-4615087	07-10-86	FR-A, B 2586967 US-A- 4711005	13-03-87 08-12-87
US-A-4823449	25-04-89	None	
EP-A-0234548	02-09-87	DE-A- 3606182	03-09-87
US-A-4607419	26-08-86	SE-B- 440933 SE-A- 8400094	26-08-85 11-07-85