



- (51) **International Patent Classification:**  
*C04B 41/89* (2006.01)     *H01M 8/12* (2006.01)  
*C04B 41/91* (2006.01)
- (21) **International Application Number:**  
PCT/DK2012/050275
- (22) **International Filing Date:**  
20 July 2012 (20.07.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
PA 2011 00562     22 July 2011 (22.07.2011)     DK
- (71) **Applicant (for all designated States except US):** DAN-  
MARKS TEKNISKE UNIVERSITET [DK/DK]; Anker  
Engelundsvej 1, Bygning 101A, DK-2800 Lyngby (DK).
- (72) **Inventor; and**
- (75) **Inventor/Applicant (for US only):** ESPOSITO, Vincenzo  
[IT/SE]; Tegelgårdsgatan 24, S-21133 Malmö (SE).
- (74) **Agent:** Plougmann & Vingtoft; Rued Langgaards Vej 8,  
DK-2300 Copenhagen S (DK).

- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report (Art. 21(3))



WO 2013/013677 A1

(54) **Title:** A METHOD FOR THE DENSIFICATION OF CERAMIC LAYERS, ESPECIALLY CERAMIC LAYERS WITHIN SOLID OXIDE CELL (SOC) TECHNOLOGY, AND PRODUCTS OBTAINED BY THE METHOD

(57) **Abstract:** A ceramic layer, especially for use in solid oxide cell (SOC) technology, is densified in a method comprising (a) providing a multilayer system by depositing the porous ceramic layer, which is to be densified, onto the selected system of ceramic layers on a support, (b) pre-sintering the resulting multilayer system at a temperature  $T_1$  to consolidate a sintered, but porous layer, (c) impregnating a solution or suspension of one or more sintering aids directly into the layer to be densified, (d) evaporating the solution or suspension of step (c) to obtain a homogeneous dispersion of the sintering aid(s) in the porous layer surface and (e) performing a thermal treatment at a temperature  $T_2$ , where  $T_2 > T_1$ , to obtain densification of and grain growth in the porous layer formed in step (b). The method makes it possible to obtain dense ceramic layers at temperatures, which are compatible with the other materials present in a ceramic multilayer system.

**Title: A method for the densification of ceramic layers, especially ceramic layers within solid oxide cell (SOC) technology, and products obtained by the method.**

5 FIELD OF INVENTION

The present invention relates to a method for the densification of ceramic layers, especially ceramic layers within solid oxide cell (SOC) technology, by an in-situ solid state reaction. The expression "in-situ solid state reaction" in this instance refers to a reactive sintering procedure where the material to be densified, i.e. a ceramic layer, is solid, whereas the sintering aid(s) involved in the process can be either liquid or solid depending on the temperatures and properties of the specific sintering aid. The invention further relates to products obtained by the method.

BACKGROUND OF THE INVENTION

Solid oxide cells (SOCs) generally include cells designed for different applications, such as solid oxide fuel cells (SOFCs) or solid oxide electrolysis cells (SOECs). Due to the common basic structure thereof, the same cell may be used in SOFC applications as well as in SOEC applications. Since in SOFCs fuel is fed into the cell and converted to power, while in SOECs power is applied to produce fuel, these cells are referred to as being "reversible".

Solid oxide fuel cells (SOFCs) are well known in the art and are available in various designs. Typical configurations include an electrolyte layer sandwiched in between two electrodes, i.e. an anode (fuel electrode) and a cathode (air electrode). The function of an anode in the SOFC

is to react electrochemically with the fuel, which may be hydrogen and hydrocarbons, while the cathode reacts with oxygen to produce electric current. The electrodes are usually porous oxide layers of electronic or mixed ion-  
5 ic/electronic materials and/or composites. The electrolyte is typically a dense oxide ionic conductive material. Between the electrolyte and an electrode, e.g. the cathode, a dense barrier layer may be inserted to prevent chemical interaction between the cathode and the electrolyte materi-  
10 als.

The most common manufacturing processes for SOFCs suggested in the prior art comprise the manufacture of single cells. Generally, a support is provided by conventional casting  
15 techniques, and on said support an anode layer is formed in the "green", i.e. non-sintered state, followed by the application of an electrolyte layer and/or a barrier layer in their respective green states, for example by multi casting techniques. The so-formed half cell is dried and afterwards  
20 sintered at temperatures of up to 1600°C, in some cases in a reducing atmosphere. The second electrode layer, i.e. the cathode, is usually deposited on the sintered half cell by different deposition techniques, such as screen printing, spray-coating etc., and sintered by a further sintering  
25 treatment. In some cases, before the deposition and sintering of the cathode take place, also the barrier layer is deposited and sintered onto the sintered half cell in a separate processing step. In the processing, the selection of the sintering temperatures is aimed at obtaining an op-  
30 timized configuration of the multilayer system, where the electrolyte and barrier layers are dense while the support and electrode layers are porous.

However, the sintering step disadvantageously leads to a number of problems. For the green body, the planar shape of the layers tends to undergo bending during sintering, because the different layers have a different shrinkage and thermal expansion coefficient which causes contact problems if said cell subsequently is to be used in a cell stack. Cells being deformed cannot be used and are therefore discarded, making mass production very cost extensive and also material extensive and so far unpractical for today's industrial requirements. Moreover, use of high temperatures can lead to excessive densification of the electrodes and detrimental solid state reactions between the components at the interface. On the other hand, low sintering temperatures do not allow the desired air tightness by full densification of electrolyte and also the resulting barrier layer can be porous. Thereby, the ohmic resistance of the cell may increase, and the barrier properties towards the chemical reactivity of the layers may get lost. In addition, delamination as well as nucleation of defects may occur in the interface between the layers, whereby the mechanical strength of the ceramic multilayer system is reduced.

Sintering aids are widely used to densify materials at lower temperatures than otherwise possible, usually to densify at the limiting sintering temperature used in the process. However, in addition to the temperature-lowering effect, it is also necessary to focus on the effect that a given sintering aid has on the electrochemical properties of the sintered body, when the intended use thereof is within solid oxide cell technology. Thus, the selection of sintering aids also has to be made with a view to the final function

of the layers without impairing the electrochemical properties of the material to be sintered. For example, SiO<sub>2</sub> is an excellent sintering aid for many ceramics but, even in small quantities, it is detrimental to the ultimate electrical properties of electroceramics. Therefore, there is an ongoing research to find improved sintering procedures and sintering aids leading to better material properties.

A number of prior art publications describe sintering of multilayer structures in one or more steps for various intended uses. Thus, **US 2003/0021900 A1** concerns a method for making dense crack-free thin ceramic films, the method comprising depositing a layer of a ceramic material on a porous or dense substrate. The deposited layer is compacted and then the resultant laminate is sintered to achieve a higher density than would have been possible without the pre-sintering compaction step. **US 6,251,473 B1** describes the preparation of ceramic thin films by spray coating and sintering, and **WO 2006/074932 A1** concerns a method for shrinkage and porosity control during sintering of multilayer structures. Methods of processing ceramic layers and related articles, especially for use in fuel cells, are described in **US 2009/0075146 A1**, and **US 2010/0092842 A1** describes densified ceramic materials and related methods, also especially for use in fuel cells. **WO 2010/0055111** describes a partially oxidized substrate obtained by subjecting a substrate made of a porous metal or metal alloy comprising particles of at least one metal or metal alloy bound together by sintering, said substrate comprising a first main surface and a second main surface, and said substrate having a porosity gradient from the first main surface to the second main surface, with partial oxidation by

an oxidizing gas such as oxygen and/or air. The publication also describes SOFCs having a support metal comprising this substrate. **CN 1438722 A** concerns a method for making a tube-like high temperature SOFC of ceramic/metal support type. The anode layer, the electrolyte layer and the cathode layer of the fuel cell are all prepared through spray coating formation. In order to increase air tightness of the electrolyte layer, a densification treatment is carried out for the electrolyte layer after spray coating formation. The method allegedly simplifies the technique for producing the fuel cell, thereby lowering the cost. In **JP 10017377 A** an electrolyte plate and a ceramic reinforcing material are described along with production methods therefor. **US 6,228,520 B1** concerns a co-sinterable ceramic interconnect for solid state electrochemical cells, including SOFCs, and **US 5,162,167 B1** describes an apparatus and a method, including a two-step densifying process, for fabricating a monolithic SOFC. In **US 6,436,565** a fuel electrode-supported tubular SOFC is described along with the manufacturing process thereof, according to which YSZ powder containing 30-50 vol% Ni is mixed with carbon powder to give a fuel electrolyte slurry which is pre-sintered, coated onto a fuel electrode tube, and then the coated tube is sintered. Then an air electrode slurry of (La,Sr)MnO<sub>3</sub> powder is coated onto the electrolyte-coated tube and sintered. Finally, **US 2010/0230871** discloses a method of sintering a ceramic material, said method comprising several sintering procedures at different temperatures without intermediate impregnation of sintering aids. The overall method increases the density of the ceramic material. It is used for electrolyte layers of solid oxide fuel cells.

Thus, sintering technology is widely used to densify ceramic materials, often assisted by sintering aids. When sintering aids are used, they are usually mixed with the starting ceramic powders or used as a coating on said powders. However, such techniques can be ineffective as regards the formation of a dense thin ceramic layer because the stress generated during the processing of the multilayer system can induce phenomena of creep or constrained sintering. Ceramic powders which are simply mixed with or covered by a sintering aid can thus, at high temperatures, be subject to severe viscous flow among the particles and at the grain boundaries, leading to poorly sintered layers with formation of porosity or other defects during processes at high temperatures.

#### 15 SUMMARY OF THE INVENTION

These problems can be overcome by the method for the densification of ceramic layers according to the invention, said method comprising an in-situ solid state reaction. According to the invention pre-sintered porous ceramic layers, which are supported on other ceramic layers or supports, are densified by a novel methodology which can be included or integrated as an additional processing step in the procedure for the preparation of a multilayer ceramic system. The methodology underlying the present invention is aimed at the densification of top-layers which present limitations in terms of densification because of constrained sintering conditions, high sintering temperatures compared to the other layers, etc. The purpose of the present invention is to obtain a dense ceramic layer at temperatures, which are compatible with the other materials present in a ceramic multilayer system.

Therefore, in a first aspect the present invention concerns a method for the densification of ceramic layers, especially ceramic layers within solid oxide cell (SOC) technology, by an in-situ solid state reaction (SSR reaction), said method comprising the following steps:

- (a) providing a multilayer system by depositing the porous ceramic layer, which is to be densified, onto the selected system of ceramic layers on a support,
- (b) pre-sintering the resulting multilayer system at a temperature  $T_1$  to promote the formation of a sintered porous microstructure in the layer to be densified, thereby consolidating a sintered, but porous layer,
- (c) impregnating a solution or suspension of one or more sintering aids directly into the layer to be densified,
- (d) evaporating the solution or suspension of step (c) to obtain a homogeneous dispersion of the sintering aid(s) in the porous layer surface and
- (e) performing a thermal treatment at a temperature  $T_2$ , where  $T_2 > T_1$ , to obtain densification of and grain growth in the porous layer.

The deposition of the porous ceramic layer in step (a) can be done by any deposition method known in the art, e.g. by casting, multi casting and lamination at the green stage, by screen printing, by spraying techniques, by PVD (physical vapour deposition) or by CVD (chemical vapour deposition).

The pre-sintering temperature  $T_1$  in step (b) is chosen so as to obtain the mechanical and chemical properties required and to achieve the early particles necking with a certain degree of open porosity. Use of a small amount of sintering aid in the starting powders could also be considered for step (b) if the particle necking is too limited at the processing temperatures. The sintering aids can be selected among melting salts, melting or highly diffusive oxides and other transition-metal based compounds.

The thermal treatment in step (e) is performed in order to:

- dry and decompose the component of the sintering aid(s) solution, which impregnate into the surface porosity of the ceramic layer,
- liquefy the melting salts and/or oxidize the sintering aid(s) into the active metal oxide form,
- melt or activate the diffusivity of the sintering aid(s) simultaneously with the porous layer material and
- evaporating the sintering aid(s) if necessary and when possible.

The temperature ranges and holding times at the different temperatures depend on the specific physical properties of the sintering aid(s) and on the presence of other additives such as dispersants, surfactants etc. The use of a thermal treatment at a temperature  $T_2 > T_1$  is crucial to reactivate the sintering and grain growth mechanisms in the porous layer after having been pre-sintered at a temperature  $T_1$ . The diffusion and penetration of the sintering aid(s) through the layer will depend on the initial porosity of

the layer and on the time and temperatures used in the process. An excess of one or more sintering aids is usually associated to the present method.

Traces of sintering aids segregated at a high temperature (i.e.  $T_2$ ) can usually be detected in the microstructure crystallized at the layer surface and/or trapped in the primary porosity and/or in the substrate/layer interface. However, such traces can be partially or completely removed from the layer surface by chemical etching and by additional treatments at the evaporation temperature(s) of the sintering aid(s). A selected chemical etching to remove the sintering aid(s) can also be used, if necessary and/or applicable, to clean the layer surface as a final step in the process.

In the preparation of a multilayer system to be used in the process of the invention the densification of a given top layer can be followed by the deposition and densification of further porous layers. Thus, the method can be applied to obtain a sequel of densified ceramic layers starting from a primary pre-sintered support.

By the in-situ solid state reaction method according to the invention the layer is first sintered and consolidated, and particles are connected in the absence of, or with limited use of, sintering aids in the pre-sintering step (b). This allows for an effective action of the selected sintering aid over the sintering mechanism and the possibility of an optimized tailoring of the final microstructure in the ceramic layer, and contamination of the grain boundary is reduced.

The present invention has mainly been developed for the densification of barrier layers of doped cerium oxide (e.g. gadolinium-doped cerium oxide (CGO)) within solid oxide fuel cell (SOFC) technology, but it may be used for the densification of ceramic multilayer systems in general. In fact the technology is compatible with the processing of many multilayer ceramic systems where the layer, which is to be densified, can be impregnated by using sintering aids in solution or suspension.

Typical sintering aids to be impregnated into the layer of doped cerium oxide or the like would be Co, Fe, Cr, Mn, Ni, Zn, Cu, Bi, Li, K, Ca or Ba salts and/or oxides and their mixtures. These sintering aids present a high diffusivity in the temperature range about 600-1400°C and electrical conductivity/catalytic properties under the operative conditions of SOFCs.

A much preferred sintering aid to be used in sintering of gadolinium-doped cerium oxide (CGO) is cobalt, either as oxides or as salts. Cobalt oxide is highly diffusive at high temperature, but scarcely soluble in CGO, and it is an electric conductor which, in low concentrations, does not impair the electrical properties of the CGO. Salts, e.g. cobalt nitrate, liquefy, decompose and oxidize into cobalt oxide during the firing process.

In some other embodiments other sintering aids having high diffusion coefficient and limited solubility in CGO may be used.

With the method according to the invention any porosity due to the constrained sintering of a thin layer on a sintered and/or dense support is eliminated. This is achieved by the

aimed action of the sintering aid with a designed thermal treatment.

Furthermore, with the method according to the invention it has become possible to refrain from the use of sintering aids added on a process level prior to the first (and only) sintering and/or the use of chemical or physical techniques for the formation of dense layers for materials presenting poor sintering behaviour when shaped as films. The method according to the invention can also be regarded as supplemental to various layer shaping techniques, such as tape casting, or other deposition techniques, such as screen printing or spraying techniques, together with conventional sintering at high temperatures.

The method of the invention presents a number of advantages over the prior art methods. First of all it is possible to obtain densification of ceramic layers under constrained sintering conditions. It is also possible to carry out densifications at reduced sintering temperatures ( $T_2$ ) depending on the sintering aid(s) used in the method, compared to a conventional sintering procedure with no sintering aid(s) present. Furthermore, an optimized dense ceramic layer may be obtained by careful tailoring of the microstructure of the ceramic layer. In addition, metal dopants may be added at grain boundaries if this turns out to be beneficial.

A further advantage of the method is that at the final step the porous layer reduces its thickness by a percentage corresponding to the volume of the original porosity in the pre-sintered layer, typically 20-40%.

In a second aspect of the invention, the object and further objects of the present invention may be achieved through a

multilayer system with a densified ceramic layer produced by a method according to the first aspect of the invention, for use within piezoelectric technology.

5 In a third aspect of the invention, the object and further objects of the present invention may be achieved through a multilayer system, comprising: a selected system of ceramic layers on a support and at least one densified porous ceramic layer, located on top of the selected system of ceramic layers.  
10

In some embodiments according to the third aspect of the invention the at least one densified porous ceramic layer has a structure where a grain size (g) and thickness (t) of the at least one densified porous ceramic layer stand in  
15 relation to one another as given by equation

$$g/t > 0.1 \quad .$$

In the prior art to provide layer thicknesses, e.g. of 5 micrometer, grain sizes of around 100 nm may be used, leading to limited growth of the grains, e.g. up to 200 nm.  
20 This is not the case of the method of the invention where larger grain growth is possible for layers of comparable thicknesses. For example, growths up to 500 nm in grain size are possible in layers having 1 micrometers of thickness.

25 Thus, with the method of the invention it is possible to obtain multilayer systems having densified porous ceramic layer with a ratio, grain size vs thickness, larger than 0.1.

In some other embodiments according to the third aspect of the invention the at least one densified porous ceramic layer shows evidences of discontinuous or abnormal grain growth.

5 The wording "discontinuous or abnormal grain growth" is herein used having the technical definition within the specific technical field. Growth phenomena can be separated into continuous growth when microstructure evolves in a uniform manner, and discontinuous growth. In the latter,  
10 the changes occur heterogeneously and specific regions with inhomogeneous grain sizes may be identified.

Discontinuous grain growth is characterized by a subset of grains growing at a high rate and at the expense of their neighbours and tends to result in a microstructure dominated by a few very large grains.  
15

Thus, a sign of abnormal grain growth is an inhomogeneity in the characteristic size of the grains present in the densified layer.

In some further embodiments according to the third aspect  
20 of the invention the at least one densified porous ceramic layer has a monodisperse porosity in the submicron range, typically preferentially oriented, interconnected or localized at the grain boundary and at the triple point, thereby generated in constrained sintering conditions.

25 Monodisperse porosity is herein defined as a porosity due to the presence of porous with a size distribution having standard deviations  $\sigma < 5\%$ , e.g. in diameter.

Submicron range is herein defined in the range between 100 nm and 1  $\mu\text{m}$ .

The porous may be oriented in the same direction of the stress forces induced by constrained sintering.

The wording "triple point" is herein used having the technical definition within the specific technical field. The triple point is the point where three grains meet within the layer, i.e. a three grains junction.

In some other embodiments according to the third aspect of the invention the at least one layer of said selected system of ceramic layers has a polydisperse porosity.

Polydisperse porosity size is herein defined as a porosity due to the presence of porous with a size distribution having standard deviations  $\sigma > 5\%$ , e.g. in diameter. For example, this may be due to agglomeration phenomena in the starting powders material or defects of deposition.

The multilayer system of the invention may be characterized by a grain size ratio between the at least one densified porous ceramic layer and the at least one layer of said selected system of ceramic layers is in the range between, 0.1 and 10.

In general, by using the method of the invention it appears clear when the top densified porous layer has been introduced on top of a previously deposited layer as the grain size of the top densified layer differs from the one of the layer below previously deposited.

In further embodiments according to the third aspect of the invention the at least one densified porous ceramic layer comprises one or more sintering aids.

In even further embodiments according to the third aspect of the invention the at least one densified porous ceramic layer comprises one or more sintering aids embedded into one or more grains of the at least one densified porous ceramic layer.

In other embodiments according to the third aspect of the invention the one or more sintering aids are present in a concentration between 1 and 30% vol within 1  $\mu\text{m}$  below the top surface of said at least one densified porous ceramic layer.

For example, the one or more sintering aids may be present in a concentration higher than 5 % vol within 1  $\mu\text{m}$  below the top surface of said at least one densified porous ceramic layer.

The densified porous ceramic layer may be defined as generally having a top and a bottom surface, wherein the bottom surface is the surface in contact with the selected system of ceramic layers. Thus, the top surface of the densified porous ceramic layer is the emerging surface following the pre-sintering step.

In some embodiments the relative density at the interface between the at least one densified porous ceramic layer and the selected system of ceramic layers is higher than 80% vol.

It has been observed that the bottom interface between the at least one densified porous ceramic layer and the below selected system of ceramic layers densifies better than the top surface of the at least one densified porous ceramic layer.

This is not the case in constrain sintering. Generally constrain sintering generates a residual porosity at the interface between the densified layer and the underneath layer. On the contrary, the method of the invention allows for reduction if not complete elimination of residual porosity at this interface as it is showed by the presence of a continuous between the two layers. The method of the invention therefore has the advantage of increasing the quality of the interface and of reducing the risk of delamination between the densified layer and the underneath layer.

Relative density is herein defined as the ration between the effective density and the theoretical density, i.e. a relative density of 80% vol implies 80% of material and 20% of porous.

In a forth aspect of the invention, the object and further objects of the present invention may be achieved through a method for extracting impurities from a densified porous ceramic layer, said method comprising: impregnating a solution or a suspension of one or more sintering aids directly onto a pre-sintered porous ceramic layer; evaporating said solution or suspension to obtain a homogeneous dispersion of the one or more sintering aids in the pre-sintered porous ceramic layer; performing a thermal treatment by applying a temperature  $T_2$  to the pre-sintered porous ceramic layer, where  $T_2$  is higher than the pre-sintering temperature, thereby extracting impurities from the densified porous ceramic layer; and chemical etching the extracted impurities from the densified porous ceramic layer surface.

In some embodiments according to the fourth aspect of the invention the impurities may comprise Si and/or Ca and/or Al.

5 The first, second and other aspects of the present invention may each be combined with any of the other aspects. These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

10 The invention is described in more detail in the following examples.

#### EXAMPLES

The examples describe the theoretical considerations and the practical experiments, which have led to the present  
15 invention. The starting point has been a desire to densify and tighten the porous barrier layers, which are inserted between the electrolyte and an electrode in solid oxide cells. This has been done partly by changing the conventional sintering process and partly by selecting specific  
20 sintering aids and sintering temperatures and times.

The sintering aids are selected among a number of metal salts and/or oxides and other materials which present a high diffusivity in the relevant temperature range. The sintering aid should also be fully compatible with the sys-  
25 tem. At present, the most preferred sintering aid is cobalt oxide originating from cobalt nitrate or being provided as a powder. The choice of cobalt oxide as the most preferred sintering aid is due to the fact that cobalt oxide has a high diffusion coefficient and moreover a limited solubili-  
30 ty in  $\text{CeO}_2$ . The diffusion coefficient  $D_{\text{Co}}$  in  $\text{CoO}$  is approxi-

mately  $10^{-8}$  cm<sup>2</sup>/sec at 1200°C, whereas e.g.  $D_{Zr}$  in Ca-doped Zr is approximately  $10^{-14}$  cm<sup>2</sup>/sec at 1200°C.

### Example 1

This example deals with the conventional way of sintering, where the sintering aid, if any, is added to the starting powders before sintering. Fig. 1 shows the porosity appearance of a tape cast barrier layer (multi tape casting) in two cases: (a) sintering for 12 hours at 1250°C, calcined CGO, no sintering aid present, and (b) sintering for 12 hours at 1250°C, calcined CGO, sintering aid 2 mole% Co<sub>3</sub>O<sub>4</sub> added in the starting powders. The appearance of the barrier layer viewed from the top is shown in Fig. 1(c); the surface of the barrier layer is clearly porous.

### Example 2

Densifying and tightening the barrier layer successfully is mainly a question of optimizing temperature and treatment times. However, a number of conditions, some of which may be mutually conflicting, have to be taken into consideration.

Sintering at the desired or necessary high temperatures is a possible source of tensile stress in the barrier layer and shrinkage of the support, resulting in tensions in the multilayer system. At the same time, sintering stresses affect the grain growth, which in turn is critical to obtain a densified surface.

A solid oxide half cell was assembled by lamination of support, anode and electrolyte green layers and then sintered. Then it was coated with a barrier layer of doped ceria starting powders enriched with 2 mole% Co<sub>3</sub>O<sub>4</sub> and deposited

by screen printing. The half cell with the barrier layer was then pre-sintered at 1250°C for 2 hours, displaying the surface structure shown in Fig. 2(a). Further sintering at 1275°C for 3 hours gave the structure shown in Fig. 2(b).

5 It is clearly seen that virtually no grain growth has taken place.

The Figures 2(a), 2(b) and 2(c) show a direct comparison between the microstructures obtained for screen printed barrier layers by identical thermal treatment but different  
10 chemical routes. More specifically, a barrier layer consisting of CGO with the sintering aid added with the starting powders and sintered at 1250°C for 2 hours (Fig. 2(a)) shows enhanced growth and densification, when it is further impregnated with cobalt nitrate solution and sintered again  
15 at 1275°C for 3 hours under solid state reaction conditions (Fig. 2(c)), over the one simply sintered at 1275°C for 3 hours with no impregnation (Fig. 2(b)).

### Example 3

This example shows that the method according to the invention  
20 tion makes it possible to reduce the maximum temperature used in the processing. A multi casted half-cell consisting of a support, an anode, an electrolyte and a dense barrier layer is sintered according to the method of the invention, first at 1200°C for 5 hours. Then cobalt nitrate is applied  
25 by impregnation, and the assembly is sintered again, this time at 1250°C for 3 hours. Fig. 3(a) shows the structure after the first sintering, where no sintering aid was used in the CGO starting powders, and Fig. 3(b) shows the resulting structure after impregnation and a second sintering.  
30 A nearly dense barrier layer with markedly enlarged grains is obtained.

The following numbered items provide in term of conceptual statements further disclosure of the present subject matter.

1. A method for the densification of ceramic layers by an in-situ solid state reaction, said method comprising the following steps:

- (a) providing a multilayer system by depositing the porous ceramic layer, which is to be densified, onto the selected system of ceramic layers on a support,
- 10 (b) pre-sintering the resulting multilayer system at a temperature  $T_1$  to consolidate a sintered, but porous layer,
- (c) impregnating a solution or suspension of one or more sintering aids directly into the layer to be densified,
- 15 (d) evaporating the solution or suspension of step (c) to obtain a homogeneous dispersion of the sintering aid(s) in the porous layer surface and
- (e) performing a thermal treatment at a temperature  $T_2$ , where  $T_2 > T_1$ , to obtain densification of and grain growth in the porous layer formed in step (b).
- 20

2. Method according to item 1, wherein the porous ceramic layer to be densified consists of gadolinium-doped cerium oxide (CGO).

25

3. Method according to item 2, wherein  $T_1$  is in the 850-1350°C range and  $T_2 > T_1$ .

5 4. Method according to any of the items 1-3, wherein the sintering aid is selected from the group consisting of Co, Fe, Cr, Mn, Ni, Zn, Cu, Bi, Li, K, Ca or Ba salts and/or oxides and their mixtures, which present a high diffusivity in the temperature range about 600-1400°C and electrical conductivity/catalytic properties under the operative conditions of SOFCs.

10

5. Method according to any of the preceding items, wherein the deposition in step (a) is done by casting, multi casting and lamination at the green stage, by screen printing, by spraying techniques, by physical vapour deposition (PVD) or by chemical vapour deposition (CVD).

15

6. Method according to item 4, wherein the sintering aid is selected from cobalt oxides and cobalt salts.

20

7. A multilayer system with a densified ceramic layer, especially for use within solid oxide cell (SOC) technology, which is produced by a method according to any of the preceding items.

25

8. A method for the densification of porous ceramic layers by an in-situ solid state reaction, said method comprising:

(a) providing a multilayer system by depositing the porous ceramic layer, which is to be densified, onto the selected system of ceramic layers on a support,

5 (b) pre-sintering the resulting multilayer system by applying a temperature  $T_1$  to said multilayer system thereby consolidating and pre-sintering, said porous ceramic layer,

10 (c) impregnating a solution or suspension of one or more sintering aids directly into said porous ceramic layer to be densified,

(d) evaporating the solution or suspension of step (c) to obtain a homogeneous dispersion of the sintering aid(s) in said porous ceramic layer and

15 (e) performing a thermal treatment by applying a temperature  $T_2$  to said multilayer system, where  $T_2 > T_1$ , thereby obtaining densification of and grain growth in said porous layer formed in step (b).

Claims:

1. A method for the densification of porous ceramic layers by an in-situ solid state reaction, said method comprising:

5 (a) providing a multilayer system by depositing the porous ceramic layer, which is to be densified, onto the selected system of ceramic layers on a support,

10 (b) pre-sintering the resulting multilayer system by applying a temperature  $T_1$  to said multilayer system thereby consolidating and pre-sintering, said porous ceramic layer,

(c) impregnating a solution or suspension of one or more sintering aids directly into said porous ceramic layer to be densified,

15 (d) evaporating the solution or suspension of step (c) to obtain a homogeneous dispersion of the sintering aid(s) in said porous ceramic layer and

20 (e) performing a thermal treatment by applying a temperature  $T_2$  to said multilayer system, where  $T_2 > T_1$ , thereby obtaining densification of and grain growth in said porous layer formed in step (b).

2. Method according to claim 1, wherein the porous ceramic layer to be densified consists of gadolinium-doped cerium oxide (CGO).

25

3. Method according to claim 2, wherein  $T_1$  is in the 850-1350°C range and  $T_2 > T_1$ .

4. Method according to any of the claims 1-3, wherein said one or more sintering aids are selected from the group consisting of Co, Fe, Cr, Mn, Ni, Zn, Cu, Bi, Li, K, Ca or Ba salts and/or oxides and their mixtures.

5. Method according to any of the preceding claims, wherein the deposition in step (a) is done by casting, multi casting and lamination at the green stage, by screen printing, by spraying techniques, by physical vapour deposition (PVD) or by chemical vapour deposition (CVD).

6. Method according to claim 4, wherein said one or more sintering aids are selected from cobalt oxides and cobalt salts.

7. A method according to any of the preceding claims said method further comprising:

(f) a selected chemical etching to remove traces of said one or more sintering aids thereby cleaning said densified porous ceramic layer.

8. A multilayer system with a densified ceramic layer produced by a method according to any of the preceding claims.

9. A multilayer system comprising a sequel of densified ceramic layer produced by a method according to any of the preceding claims 1-7.

5 10. A multilayer system with a densified ceramic layer produced by a method according to any of the preceding claims 1-7, for use within solid oxide cell (SOC) technology.

10 11. A multilayer system with a densified ceramic layer produced by a method according to any of the preceding claims 1-7, for use within piezoelectric technology.

12. A multilayer system, comprising:

- a selected system of ceramic layers on a support
- 15 - at least one densified porous ceramic layer, located on top of said selected system of ceramic layers.

13. A multilayer system, according to claim 12 wherein said at least one densified porous ceramic layer has a structure where a grain size (g) and thickness (t) of said at least one densified porous ceramic layer stand in relation to one another as given by

$$g/t > 0.1$$

25 14. A multilayer system, according to claim 12 or 13, wherein said at least one densified porous ceramic layer shows evidences of discontinuous or abnormal grain growth.

15. A multilayer system, according to claims 12-14 wherein said at least one densified porous ceramic layer has a monodisperse porosity in the submicron range, typically preferentially oriented, interconnected or localized at the grain boundary and at the triple point, thereby generated in constrained sintering conditions.

16. A multilayer system, according to claims 12-15 wherein said at least one layer of said selected system of ceramic layers has polydisperse porosity.

17. A multilayer system, according to claims 12-16, wherein said at least one densified porous ceramic layer comprises one or more sintering aids.

18. A multilayer system, according to claim 17, wherein said at least one densified porous ceramic layer comprises one or more sintering aids embedded into one or more grains of said at least one densified porous ceramic layer.

19. A multilayer system, according to claims 17-18, wherein said one or more sintering aids are present in a concentration between 1 and 30% vol within 1  $\mu\text{m}$  below the top surface of said at least one densified porous ceramic layer.

20. A multilayer system, according to claims 17-19, wherein said one or more sintering aids are present in a concentration higher than 5 % vol within 1  $\mu\text{m}$  below the top surface of said at least one densified porous ceramic layer.

21. A multilayer system, according to claims 12-20, wherein the relative density at the interface between said at least

one densified porous ceramic layer and said selected system of ceramic layers is higher than 80% vol.

22. A method for extracting impurities from a densified porous ceramic layer, said method comprising:

- impregnating a solution or a suspension of one or more sintering aids directly onto a pre-sintered porous ceramic layer;
- evaporating said solution or suspension to obtain a homogeneous dispersion of said one or more sintering aids in said pre-sintered porous ceramic layer and
- performing a thermal treatment by applying a temperature  $T_2$  to said pre-sintered porous ceramic layer, where  $T_2$  is higher than the pre-sintering temperature, thereby extracting impurities from said densified porous ceramic layer,
- chemical etching the extracted impurities from the densified porous ceramic layer surface.

23. A method for extracting impurities from a densified porous ceramic layer according to claim 22, wherein said impurities comprise Si and/or Ca and/or Al.

1/3

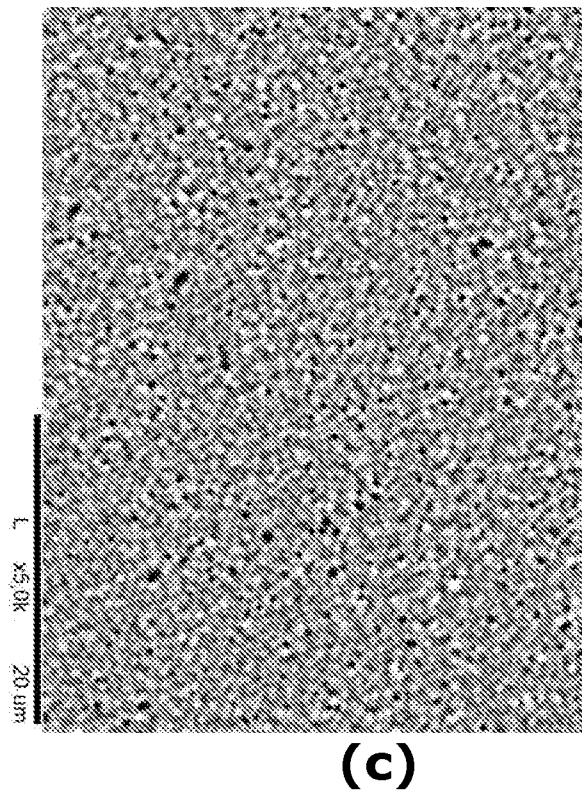
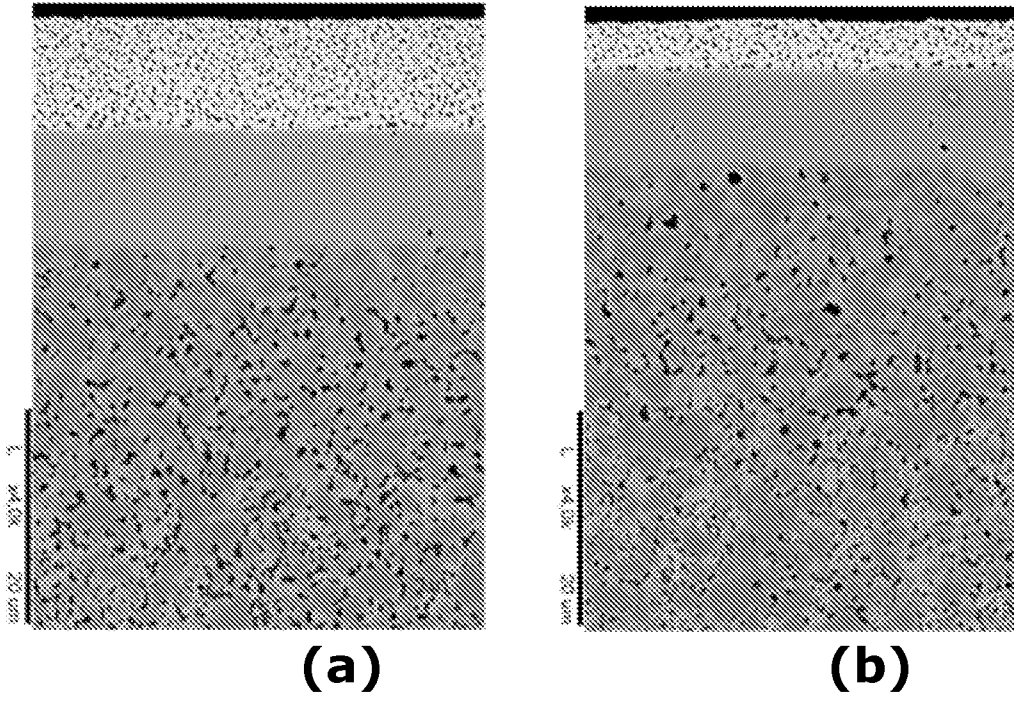


Fig. 1

2/3




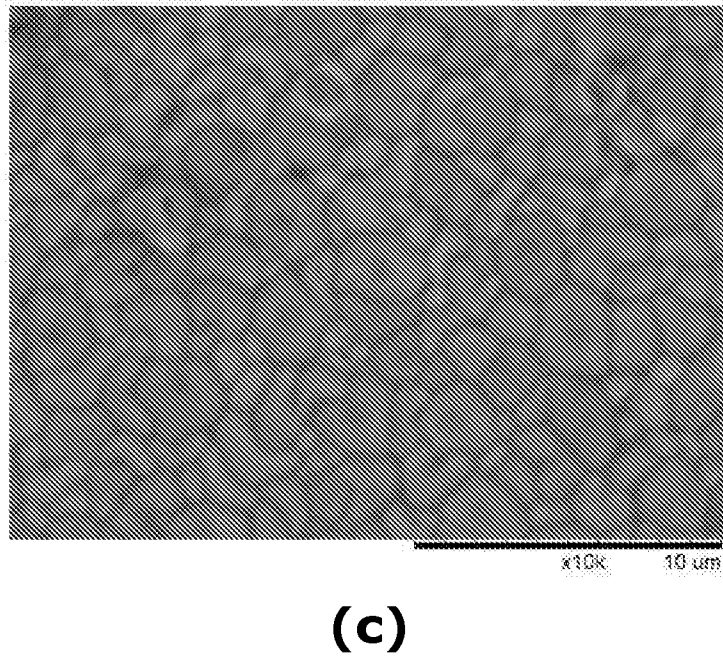


Fig. 2

3/3

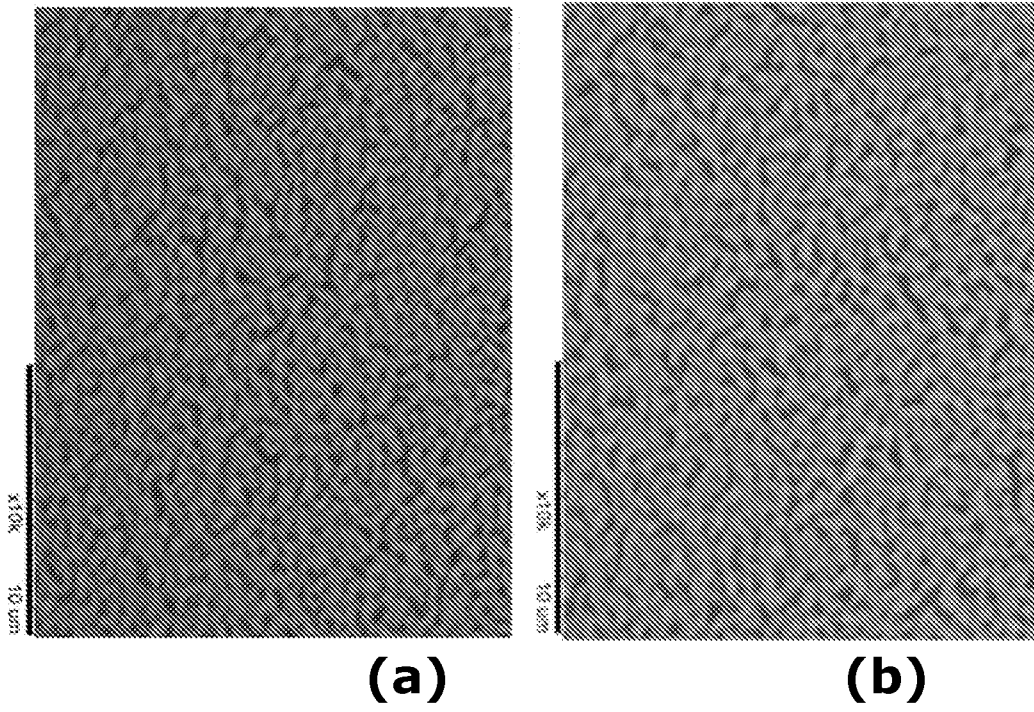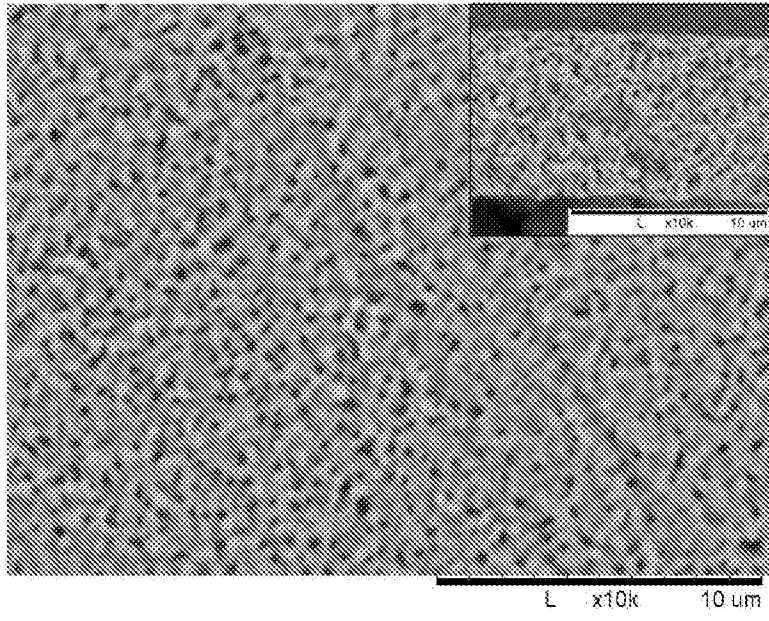

**(a)**

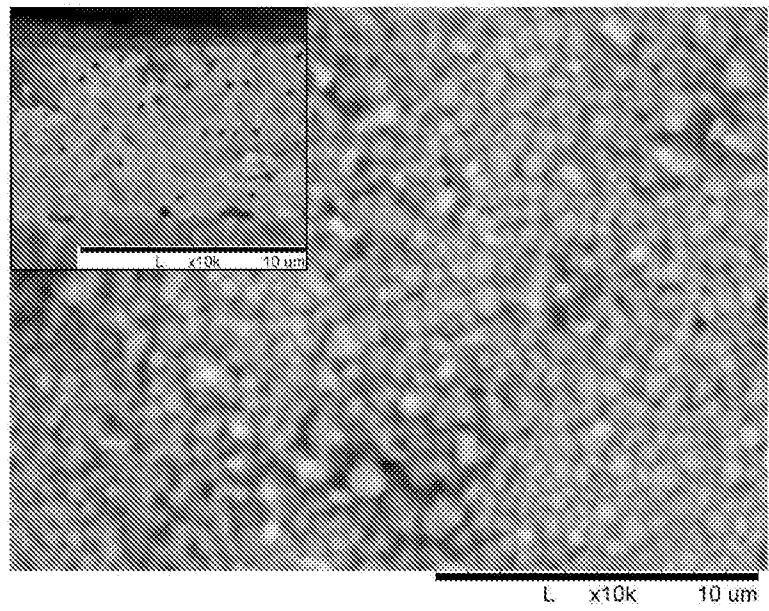

**(b)**

Fig. 3

# INTERNATIONAL SEARCH REPORT

International application No PCT/DK2012/050275
---

**A. CLASSIFICATION OF SUBJECT MATTER**  
 INV. C04B41/89 C04B41/91 H01M8/12  
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
 C04B H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, COMPENDEX, INSPEC, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 284 140 A2 (GEN ELECTRIC [US]) 16 February 2011 (2011-02-16) claims figure 1 column 8, line 8 - line 10 -----	1-23
X	DATABASE WPI Week 201148 Thomson Scientific, London, GB; AN 2011-J07610 XP002684919, & CN 102 093 037 A (UNIV QINGHUA) 15 June 2011 (2011-06-15) abstract -----	1-23
A	US 6 228 520 B1 (CHIAO YI-HUNG [US]) 8 May 2001 (2001-05-08) cited in the application the whole document -----	1-23

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 October 2012

Date of mailing of the international search report

24/10/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040,  
 Fax: (+31-70) 340-3016

Authorized officer

Rosenberger, Jürgen

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/DK2012/050275

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2284140	A2	16-02-2011	CA 2711347 A1 31-01-2011
			EP 2284140 A2 16-02-2011
			JP 2011032164 A 17-02-2011
			US 2011027476 A1 03-02-2011
-----			
CN 102093037	A	15-06-2011	NONE
-----			
US 6228520	B1	08-05-2001	NONE
-----			