

(51) International Patent Classification:
H04N 19/186 (2014.01)

(21) International Application Number:

PCT/CN2013/085144

(22) International Filing Date:

12 October 2013 (12.10.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/712,975	12 October 2012 (12.10.2012)	US
14/048,060	8 October 2013 (08.10.2013)	US

(71) Applicant: **MEDIATEK INC.** [CN/CN]; No.1, Dusing Road 1st, Science-Based Industrial Park, Hsin-Chu, Taiwan (CN).(72) Inventors: **WU, Tung-Hsing**; No.118, Ln. 269, Linsen E. Rd., East Dist., Chiayi City, Taiwan (CN). **LEE, Kun-Bin**; 1F, No. 24, Alley 32, Lane 225, Yung-Chi Rd., Hsin-Yi District, Taipei City, Taiwan (CN). **CHOU, Han-Liang**; No.31, Ln. 88, Zhuyuan Rd., Baoshan Township, Hsinchu County, Taiwan (CN). **LIN, Ting-An**; 4F., No.73, Ln. 19, Guanxin Rd., East Dist., Hsinchu City, Taiwan (CN). **JU, Chi-Cheng**; 9F.-2, No.42, Lushui Rd., Hsinchu City, Taiwan (CN).(74) Agent: **BEIJING SANYOU INTELLECTUAL PROPERTY AGENCY LTD.**; 16th Fl., Block A, Corporate Square, No.35 Jinrong Street, Beijing 100033 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: IMAGE COMPRESSION METHOD AND APPARATUS FOR ENCODING PIXEL DATA OF FRAME INTO INTER-LEAVED BIT-STREAM, AND RELATED IMAGE DECOMPRESSION METHOD AND APPARATUS

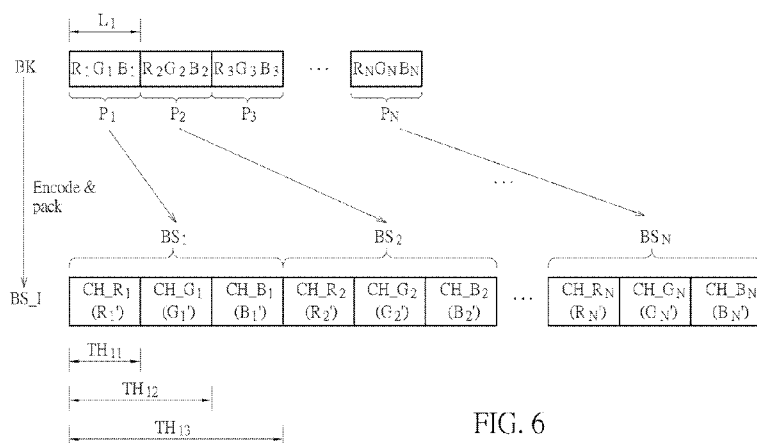


FIG. 6

(57) Abstract: An image compression method includes at least the following steps: receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively; encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein the bit-streams corresponding to the plurality of color channel data of the pixel are separated; packing bit-streams of a same color channel data of different pixels into color channel bit-stream segments, wherein each of the bit-stream segments has a same predetermined size; and concatenating color channel bit-stream segments of the different color channels into a final bit-stream. Alternatively, color channel bit-stream segments of the same pixel are concatenated into a concatenated bit-stream portion, and concatenated bit-stream portions of different pixels are concatenated into a final bit-stream.

IMAGE COMPRESSION METHOD AND APPARATUS FOR
ENCODING PIXEL DATA OF FRAME INTO INTERLEAVED BIT-
STREAM, AND RELATED IMAGE DECOMPRESSION METHOD AND
APPARATUS

5

CROSS REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. provisional application No. 61/712,975, filed on Oct. 12, 2012 and incorporated herein by reference. This application also claims the benefit of U.S. application No. 14/048,060, filed on 10/08/2013 and incorporated herein by reference.

10

FIELD OF INVENTION

The disclosed embodiments of the present invention relate to image compression and decompression, and more particularly, to an image compression method and apparatus for encoding pixel data of one or more than one block into an interleaved bit-stream and related image decompression method and apparatus.

15

BACKGROUND OF THE INVENTION

A conventional image compression scheme may partition a frame into a plurality of blocks, and uses each block as a compression unit to encode each block into a bit-stream. FIG. 1 is a diagram illustrating a bit-stream generated by encoding pixel data of one block according to the conventional image compression scheme. Suppose that each block BK includes N pixels, and the pixel data of each pixel include color channel data of different color channels (e.g., red channel R, green channel G, and blue channel B). As shown in FIG. 1, the 1st pixel has color channel data R₁, B₁, G₁; the 2nd pixel has color channel data R₂, B₂, G₂; the 3rd pixel has color channel data R₃, B₃, G₃; and the Nth pixel has color channel data R_N, B_N, G_N. The conventional image compression scheme encodes the pixel data of the block BK to generate a bit-stream BS composed of a plurality of bit-stream portions that are concatenated, where the bit-stream portions correspond to different color channels, and each of the bit-stream portions includes all encoded color channel data of the same color channel in the block BK. As shown in FIG. 1, one bit-stream portion is composed of encoded color channel data R₁'-R_N' only, another bit-stream portion is composed of encoded color channel data G₁'-G_N' only, and yet another bit-stream portion is composed of encoded color channel data B₁'-B_N' only. When an image compressor at a transmitting end outputs the bit-stream shown in FIG. 1 to a receiving end, an image

20

25

30

decompressor at the receiving end decodes the received bit-stream to reconstruct the pixel data of the block BK. As the bit-stream portions are concatenated, the bit-stream portions are decoded by the image decompressor one by one. As a result, the bit-stream portion composed of encoded color channel data $G_1'-G_N'$ has to be decoded after the bit-stream portion composed of encoded color channel data $R_1'-R_N'$ and the bit-stream portion composed of encoded color channel data $G_1'-G_N'$ have been decoded. Thus, the decoded pixel data of the 1st pixel is fully reconstructed when the encoded color channel data B_1' is decoded, the decoded pixel data of the 2nd pixel is fully reconstructed when the encoded color channel data B_2' is decoded, and so forth. The processing latency for obtaining decoded pixel data of one pixel is high, which results in degraded performance of the image decompressor. Besides, the receiving end requires a large data buffer to store all of the decoded color channel data obtained by decoding the encoded color channel data $R_1'-R_N'$ and $G_1'-G_N'$, which increases the hardware cost inevitably. To create the bit-stream BS shown in FIG. 1, the transmitting end also needs a large data buffer to store raw color channel data. Similarly, the buffer requirement and processing latency of the image compression are high.

SUMMARY OF THE INVENTION

In accordance with exemplary embodiments of the present invention, an image compression method and apparatus for encoding pixel data of one or more than one block into an interleaved bit-stream and related image decompression method and apparatus are proposed.

According to a first aspect of the present invention, an exemplary image compression method is disclosed. The exemplary image compression method includes at least the following steps: receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively; encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein the bit-streams corresponding to the plurality of color channel data of the pixel are separated; packing bit-streams of a same color channel data of different pixels into color channel bit-stream segments, wherein each of the bit-stream segments has a same predetermined size; and concatenating color channel bit-stream segments of the different color channels into a final bit-stream.

According to a second aspect of the present invention, an exemplary image decompression method is disclosed. The exemplary image decompression method includes at least the following steps: receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of

the color channel bit-stream segments has a same predetermined size; and decoding the bit-stream into pixel data of a plurality of pixels in the frame, wherein each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

5 According to a third aspect of the present invention, an exemplary image compression method is disclosed. The exemplary image compression method includes at least the following steps: receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively; encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality
10 of color channel data of the pixel, wherein each bit-streams corresponding to single color channel data of the pixel is a color channel bit-stream segment; concatenating color channel bit-stream segments of a same pixel into a concatenated bit-stream portions; and concatenating concatenated bit-stream portions of different pixels into a final bit-stream.

 According to a fourth aspect of the present invention, an exemplary image decompression
15 method is disclosed. The exemplary image decompression method includes at least the following steps: receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments contains information corresponding to one pixel only; and decoding the bit-stream into pixel data of a plurality of pixels in the frame, and each of the
20 pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

 According to a fifth aspect of the present invention, an exemplary image compressor is disclosed. The exemplary image compressor includes an input port and an encoder. The input port is arranged for receiving a plurality of pixels of a frame, wherein pixel data of each pixel
25 has a plurality of color channel data corresponding to a plurality of different color channels, respectively. The encoder is arranged for encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein the bit-streams corresponding to the plurality of color channel data of the pixel are separated; packing bit-streams of a same color channel data of different pixels into color channel bit-stream
30 segments, wherein each of the bit-stream segments has a same predetermined size; and concatenating color channel bit-stream segments of the different color channels into a final bit-stream.

 According to a sixth aspect of the present invention, an exemplary image decompressor is disclosed. The exemplary image decompressor includes an input port and a decoder. The input

port is arranged for receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments has a same predetermined size. The decoder is arranged for decoding the bit-stream into pixel data of a plurality of pixels in the frame, wherein each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

According to a seventh aspect of the present invention, an exemplary image compressor is disclosed. The exemplary image compressor includes an input port and an encoder. The input port is arranged for receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively. The encoder is arranged for encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein each bit-stream corresponding to single color channel data of the pixel is a bit-stream segment; and concatenating color channel bit-stream segments of a same pixel into a concatenated bit-stream portions, and concatenating bit-stream portions of different pixels into a final bit-stream.

According to an eighth aspect of the present invention, an exemplary image decompressor is disclosed. The exemplary image decompressor includes an input port and a decoder. The input port is arranged for receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments contains information corresponding to one pixel only. The decoder is arranged for decoding the bit-stream into pixel data of a plurality of pixels in the frame, and each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

These and other objectives of the present invention will no doubt become obvious to those of ordinary skill in the art after reading the following detailed description of the preferred embodiment that is illustrated in the various figures and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram illustrating a bit-stream generated by encoding pixel data of one block according to a conventional image compression scheme.

FIG. 2 is a diagram illustrating a data processing system according to an embodiment of the present invention.

FIG. 3 is a diagram illustrating a first application which using the proposed data processing system.

FIG. 4 is a diagram illustrating a second application which using the proposed data processing system.

FIG. 5 is a diagram illustrating a third application which using the proposed data processing system.

5 FIG. 6 is a diagram illustrating an image compression operation according to an embodiment of the present invention.

FIG. 7 is a diagram illustrating another image compression operation according to an embodiment of the present invention.

10 FIG. 8 is a diagram illustrating the interleaved bit-stream having fixed-length color channel bit-stream segments according to an embodiment of the present invention.

FIG. 9 is a diagram illustrating yet another image compression operation according to an embodiment of the present invention.

FIG. 10 is a diagram illustrating an image decompression operation according to an embodiment of the present invention.

15 FIG. 11 is a diagram illustrating another image decompression operation according to an embodiment of the present invention.

DETAILED DESCRIPTION

20 Certain terms are used throughout the description and following claims to refer to particular components. As one skilled in the art will appreciate, manufacturers may refer to a component by different names. This document does not intend to distinguish between components that differ in name but not function. In the following description and in the claims, the terms "include" and "comprise" are used in an open-ended fashion, and thus should be interpreted to mean "include, but not limited to ...". Also, the term "couple" is intended to mean
25 either an indirect or direct electrical connection. Accordingly, if one device is coupled to another device, that connection may be through a direct electrical connection, or through an indirect electrical connection via other devices and connections.

FIG. 2 is a diagram illustrating a data processing system according to an embodiment of the present invention. The data processing system 200 includes an image compressor 202 and
30 an image decompressor 204, where the image compressor 202 is located at a transmitting end TX, and the image decompressor 204 is located at a receiving end RX. Several exemplary applications using the proposed data processing system 200 are illustrated in FIGs. 3-5 for illustrative purposes.

FIG. 3 is a diagram illustrating a first application which using the proposed data

processing system. An application processor 302 includes the image compressor 202 and other circuitry 303. A driver integrated circuit (IC) 304 has the image decompressor 204 and other circuitry 305. The other circuitry 303 in the application processor 302 generates a raw image IMG_{RAW} to the image compressor 202. The application processor 302 may apply pixel processing to the raw image IMG_{RAW} before outputting the raw image IMG_{RAW} . The image compressor 202 is coupled to the other circuitry 303, and performs lossy/lossless image compression upon the raw image IMG_{RAW} to generate a compressed/encoded image IMG_P , wherein the compressed/encoded image IMG_P is transmitted to a display interface 306 through the other circuitry 303. In the present invention, the compressed/encoded image IMG_P is composed of interleaved bit-streams that are concatenated, where each interleaved bit-stream is generated by encoding one or more than one block of the raw image IMG_{RAW} . The application processor 302 transmits the compressed/encoded image IMG_P to the driver IC 304 via the display interface 306. For example, the display interface 306 may be a display serial interface (DSI) standardized by a Mobile Industry Processor Interface (MIPI) or an embedded display port (eDP) standardized by a Video Electronics Standards Association (VESA).

The image decompressor 204 receives the compressed/encoded image IMG_P from the display interface 306, and then transmits the compressed/encoded image IMG_P to the image decompressor 204 through other circuitry 305. The image decompressor 204 performs lossy/lossless decompression upon the compressed/encoded image IMG_P to recover a raw image IMG_{RAW}' , and transmits the raw image IMG_{RAW}' to the other circuitry 305 for further processing. If a lossless compression algorithm is employed by the image compressor 202, the raw image IMG_{RAW}' generated from a corresponding lossless decompression algorithm would be identical to the raw image IMG_{RAW} . However, if a lossy compression algorithm is employed by the image compressor 202, the raw image IMG_{RAW}' generated from a corresponding lossy decompression may not be identical to the raw image IMG_{RAW} . Compared to transmitting the raw image IMG_{RAW} over the display interface 306 directly, transmitting the compressed/encoded image IMG_P over the display interface 306 has smaller data size/lower data rate. Hence, the power consumption of the display interface 306 is reduced correspondingly. Besides, the image compressor 202 is configured to generate an interleaved bit-stream having a bit-stream structure different from that possessed by the conventional bit-stream shown in FIG. 1. In this way, the data buffer requirement of the driver IC 304 (i.e., the decoder-side buffer requirement) can be reduced, and the processing latency of obtaining decoded pixel data of one pixel is reduced due to reduced buffer overhead. Besides, the buffer requirement and processing latency of the application processor 302 are reduced.

FIG. 4 is a diagram illustrating a second application which using the proposed data processing system. A camera module 402 includes the image compressor 202 and other circuitry 403. An application processor 404 has the image decompressor 204 and other circuitry 405. The other circuitry 403 of the camera module 402 is coupled to the image compressor 202, and generates a raw image IMG_{RAW} to the image compressor 202. The other circuitry 403 may apply pixel processing to the raw image IMG_{RAW} before outputting the raw image IMG_{RAW} . The image compressor 202 performs lossy/lossless image compression upon the raw image IMG_{RAW} to generate a compressed/encoded image IMG_P , where the compressed/encoded image IMG_P is transmitted to a camera interface 406 through the other circuitry 403. In the present invention, the compressed/encoded image IMG_P is composed of interleaved bit-streams that are concatenated, where each interleaved bit-stream is generated by encoding one or more than one block of the raw image IMG_{RAW} . The camera module 402 transmits the compressed/encoded image IMG_P to the application processor 404 via the camera interface 406. For example, the camera interface 406 may be a camera serial interface (CSI) standardized by a Mobile Industry Processor Interface (MIPI).

The application processor 404 receives the compressed/encoded image IMG_P from the camera interface 406, and then transmits the compressed/encoded image IMG_P to the image decompressor 204 through other circuitry 405. The application processor 404 performs lossy/lossless decompression upon the compressed/encoded image IMG_P to recover a raw image IMG_{RAW}' , and transmits the raw image IMG_{RAW}' to the other circuitry 405 for further processing. If a lossless compression algorithm is employed by the image compressor 202, the raw image IMG_{RAW}' generated from a corresponding lossless decompression algorithm would be identical to the raw image IMG_{RAW} . However, if a lossy compression algorithm is employed by the image compressor 202, the raw image IMG_{RAW}' generated from a corresponding lossy decompression may not be identical to the raw image IMG_{RAW} . Similarly, compared to transmitting the raw image IMG_{RAW} over the camera interface 406 directly, transmitting the compressed/encoded image IMG_P over the camera interface 406 has smaller data size/lower data rate. Hence, the power consumption of the camera interface 406 is reduced correspondingly. Besides, the image compressor 202 is configured to generate an interleaved bit-stream having a bit-stream structure different from that possessed by the conventional bit-stream shown in FIG. 1. Hence, the buffer requirement of the application processor 404 (i.e., the decoder-side buffer requirement) can be reduced, and the processing latency of obtaining decoded pixel data of one pixel is reduced due to reduced buffer overhead. Besides, the buffer

requirement and processing latency of the camera module 402 are reduced.

FIG. 5 is a diagram illustrating a third application which using the proposed data processing system. In this embodiment, the proposed data processing system is employed by a graphics platform having, for example, a graphics processing unit (GPU) 502, a video encoder 504, a video decoder 506 and a memory 508. The GPU 502, video encoder 504, video decoder 506 and memory 508 communicate with one another through a bus 501. Each of the GPU 502, video encoder 504 and video decoder 506 is equipped with an image compressor 202_1/202_2/202_3 and an image decompressor 204_1/204_2/204_3. As compressed/encoded images are transmitted through the bus 501, the bandwidth of the bus 501 can be reduced. Besides, the image compressor 202_1/202_2/202_3 is configured to generate an interleaved bit-stream having a bit-stream structure different from that possessed by the conventional bit-stream shown in FIG. 1. In this way, the decoder-side buffer requirement can be reduced, and the decoder-side processing latency of obtaining decoded pixel data of one pixel is reduced due to reduced buffer overhead. Besides, the encoder-side buffer requirement and processing latency are reduced.

Further details directed to generating an interleaved bit-stream (i.e., a final bit-stream) with a novel bit-stream structure for buffer requirement reduction and processing latency reduction are described as follows. Please refer to FIG. 2 again. The image compressor 202 has an input port 212 and an encoder 214. The input port 212 is arranged for receiving pixel data of one or more than one block BK of a frame (e.g., a raw image) from a preceding circuit element. It should be noted that the preceding circuit element may apply pixel processing to pixels in the frame before outputting the frame to the image compressor 202. The block BK includes a plurality of pixels, and pixel data of each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively. By way of example, but not limitation, the color channels may correspond to an RGB format or a YUV (YCrCb) format. However, this is for illustrative purposes only, and is not meant to be a limitation of the present invention. That is, the proposed image compression method can be applied to pixels each having more than one color channel data.

The encoder 214 is a core part of the image compressor 202, and may employ a lossless compression algorithm or a lossy compression algorithm, depending upon actual application requirements. The encoder 214 is arranged for encoding/compressing the pixel data of the block BK into an interleaved bit-stream BS_I composed of a plurality of color channel bit-stream segments that are concatenated, wherein each of the color channel bit-stream segments comprises color channel information of one color channel. Please refer to FIG. 6, which is a

diagram illustrating an image compression operation performed by the encoder 214. The encoder 214 encodes the pixel data of the block BK into an interleaved bit-stream BS_I. In this embodiment, the block BK may be regarded as having a plurality of pixel data parts P_1 - P_N , each having the same data length L_1 ; and each of the pixel data parts P_1 - P_N includes different color channel data of a single pixel. That is, the pixel data part P_1 includes pixel data of the 1st pixel in the block BK, the pixel data part P_2 includes pixel data of the 2nd pixel in the block BK, and so on. As shown in FIG. 6, the encoder 214 encodes pixel data parts P_1 - P_N (i.e., pixel data of pixels in the same block BK) into bit-streams BS_1 - BS_N , where the bit-streams BS_1 - BS_N are concatenated, and each of the bit-streams BS_1 - BS_N is a set of color channel bit-stream segments of different color channels. The bit-stream BS_1 has color channel bit-stream segments CH_R_1 , CH_G_1 , CH_B_1 ; the bit-stream BS_2 has color channel bit-stream segments CH_R_2 , CH_G_2 , CH_B_2 ; and the bit-stream BS_N has color channel bit-stream segments CH_R_N , CH_G_N , CH_B_N . The color channel bit-stream segments CH_R_1 , CH_G_1 , CH_B_1 include encoded color channel data R_1' , G_1' , B_1' (i.e., bit-streams derived from encoding color channel data R_1 , G_1 , B_1), respectively; color channel bit-stream segments CH_R_2 , CH_G_2 , CH_B_2 include encoded color channel data R_2' , G_2' , B_2' (i.e., bit-streams derived from encoding color channel data R_2 , G_2 , B_2), respectively; and color channel bit-stream segments CH_R_N , CH_G_N , CH_B_N include encoded color channel data R_N' , G_N' , B_N' (i.e., bit-streams derived from encoding color channel data R_N , G_N , B_N), respectively. In other words, bit-streams of the same color channel data included in pixel data of different pixels are packed into color channel bit-stream segments, and color channel bit-stream segments of different color channel data are concatenated into a final bit-stream (i.e., the interleaved bit-stream BS_I).

It should be noted that the fixed data length L_1 is not limited to pixel data of one pixel. In an alternative design, the encoder 214 may take pixel data of more than one pixel as one pixel data part to be encoded into color channel bit-segment segments. Please refer to FIG. 7, which is a diagram illustrating another image compression operation performed by the encoder 214. In this embodiment, the block BK may be regarded as having a plurality of pixel data parts P_1 - P_M , each having the same data length L_2 ; and each of the pixel data parts P_1 - P_M includes different color channel data of multiple pixels (e.g., two pixels). That is, the pixel data part P_1 includes pixel data of the 1st pixel and the 2nd pixel in the block BK, the pixel data part P_2 includes pixel data of the 3rd pixel and the 4th pixel in the block BK, and so on. Hence, $L_2=L_1*2$.

As shown in FIG. 7, the encoder 214 encodes pixel data parts P_1 - P_M into bit-streams (i.e., sets of color channel bit-stream segments) BS_1 - BS_M , where the bit-streams BS_1 - BS_M are concatenated, and $N=2*M$. The bit-stream BS_1 has color channel bit-stream segments CH_R_1 ,

CH_G₁, CH_B₁; the bit-stream BS₂ has color channel bit-stream segments CH_R₂, CH_G₂, CH_B₂; and the bit-stream BS_N has color channel bit-stream segments CH_R_N, CH_G_N, CH_B_N. As the encoder 214 takes pixel data of two pixels to be encoded into color channel bit-stream segments, the color channel bit-stream segments CH_R₁, CH_G₁, CH_B₁ include
 5 encoded color channel data (R₁', R₂'), (G₁', G₂'), (B₁', B₂'), that is, bit-streams derived from encoding color channel data (R₁, R₂), (G₁, G₂), (B₁, B₂), respectively; color channel bit-stream segments CH_R₂, CH_G₂, CH_B₂ include encoded color channel data (R₃', R₄'), (G₃', G₄'), (B₃', B₄'), that is, bit-streams derived from encoding color channel data (R₃, R₄), (G₃, G₄), (B₃, B₄), respectively; and color channel bit-stream segments CH_R_M, CH_G_M, CH_B_M include
 10 encoded color channel data (R_{N-1}', R_N'), (G_{N-1}', G_N'), (B_{N-1}', B_N'), that is, bit-streams derived from encoding color channel data (R_{N-1}, R_N), (G_{N-1}, G_N), (B_{N-1}, B_N), respectively. Similarly, bit-streams of the same color channel data included in pixel data of different pixels are packed into color channel bit-stream segments, and color channel bit-stream segments of different color channel data are concatenated into a final bit-stream (i.e., the interleaved bit-stream BS_I).

15 Though the pixel data parts P₁-P_N (or P₁-P_M) encoded by the encoder 214 have the same data length L₁ (or L₂), the bit-streams BS₁-BS_N (or BS₁-BS_M) may not have the same data length due to the fact that the number of bits of each encoded color channel data is not fixed. The bit variation of color channel bit-stream segments makes the design of the decoder 224 become complicated. In order to constrain the decoding complexity, one or more predetermined
 20 thresholds may be used by the encoder 214 to limit the bit-stream size of color channel bit-stream segment(s). In a first exemplary design, a length of each color channel bit-stream segment is limited by a predetermined threshold. For one example, a length of each color channel bit-stream segment CH_R₁, CH_G₁, CH_B₁... CH_R_N, CH_G_N, CH_B_N shown in FIG. 6 is limited by the predetermined threshold TH₁₁. For another example, a length of each color
 25 channel bit-stream segment CH_R₁, CH_G₁, CH_B₁... CH_R_M, CH_G_M, CH_B_M shown in FIG. 7 is limited by the predetermined threshold TH₂₁. In a second exemplary design, a total length of multiple concatenated color channel bit-stream segments is limited by a predetermined threshold. For one example, a total length of any two color channel bit-stream segments (e.g., CH_R+CH_G, CH_R+CH_B, CG_G+CH_B) in bit-streams BS₁-BS_N shown in FIG. 6 is
 30 limited by the predetermined threshold TH₁₂, and/or a total length of any three concatenated color channel bit-stream segments (e.g., CH_R+CH_G+CH_B) in bit-streams BS₁-BS_N shown in FIG. 6 is limited by another predetermined threshold TH₁₃. For another example, a total length of any two concatenated color channel bit-stream segments (e.g., CH_R+CH_G, CH_R+CH_B, CG_G+CH_B) in bit-streams BS₁-BS_M shown in FIG. 7 is limited by one

predetermined threshold TH_{22} , and/or a total length of any three concatenated color channel bit-stream segments (e.g., $CH_R+CH_G+CH_B$) in bit-streams BS_1 - BS_M shown in FIG. 7 is limited by another predetermined threshold TH_{23} .

It should be noted that each predetermined threshold $TH_{11}/TH_{12}/TH_{13}/ TH_{21}/TH_{22}/TH_{23}$ is configured before the encoder 214 starts encoding pixel data of the block BK. Thus, the encoder 214 is capable of preventing the interleaved bit-stream BS_I from violating the constraint. By way of example, the image decompressor 204 may inform the image compressor 202 of its decoding capability. The image compressor 202 therefore refers to the decoding capability of the image decompressor 204 to properly configure one or more predetermined thresholds to be referenced by the encoder 214 during image compression. Hence, the encoder 214 may adaptively adjust the quantization level to make each color channel bit-stream segment not exceed the threshold TH_{11} (or TH_{21}), at least two color channel bit-stream segments in bit-stream not exceed the threshold TH_{12} (or TH_{22}), and/or three color channel bit-stream segments in bit-stream not exceed the threshold TH_{13} (or TH_{23}).

In above examples shown in FIG. 6 and FIG. 7, pixel data of each pixel has color channel data corresponding to three color channels, respectively. In practice, the proposed image compression method discussed above can be applied to pixels each having more than one color channel data. For example, in a first case where each pixel of a frame has two color channel data, the proposed image compression method is configured for concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel. In a second case where each pixel of a frame has three color channel data, the proposed image compression method is configured for concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel, and concatenating a color channel bit-stream segment of a third color channel to the color channel bit-stream segment of the second color channel. In a third case where each pixel of a frame has four color channel data, the proposed image compression method is configured for concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel; concatenating a color channel bit-stream segment of a third color channel to the color channel bit-stream segment of the second color channel; and concatenating a color channel bit-stream segment of a fourth color channel to the color channel bit-stream segment of the third color channel.

In above examples shown in FIG. 6 and FIG. 7, each of the color channel bit-stream segments is generated by encoding fixed-length pixel data parts of the block BK. Thus, each color channel bit-stream segment has a variant data length, and is constrained by a

predetermined threshold. For example, each of the color channel bit-stream segments included in the interleaved bit-stream BS_I is shorter or equal to the predetermined threshold TH₁₁ (or TH₂₁). In an alternative design, the color channel bit-stream segments in the final bit-stream have fixed lengths, where each fixed length meets the decoding capability of the decoder 224.

5 Please refer to FIG. 8, which is a diagram illustrating the interleaved bit-stream BS_I having fixed-length color channel bit-stream segments according to an embodiment of the present invention. In this embodiment, each color channel bit-stream segment for the red channel has a fixed length L_R, each color channel bit-stream segment for the green channel has a fixed length L_G, and each color channel bit-stream segment for the blue channel has a fixed length L_B. The
10 fixed lengths L_R, L_G, L_B may have the same value or different values, depending upon design consideration.

For example, each of the fixed lengths L_R, L_G, L_B is 10 bits. Suppose that the encoded color channel data R₁' has 6 bits, the encoded color channel data R₂' has 8 bits, the encoded color channel data R₃' has 12 bits, the encoded color channel data G₁' has 15 bits, the encoded
15 color channel data G₂' has 5 bits, the encoded color channel data B₁' has 10 bits, the encoded color channel data B₂' has 7 bits, and the encoded color channel data B₃' has 7 bits. Hence, the color channel bit-stream segment CH_R₁ would be composed of the encoded color channel data R₁' (R₁'=6 bits) and part of the encoded color channel data R₂' (R₂₁'=4 bits); the color channel bit-stream segment CH_R₂ would be composed of the remaining part of the encoded color
20 channel data R₂' (R₂₂'=4 bits) and part of the encoded color channel data R₃' (R₃₁'=6 bits); the color channel bit-stream segment CH_G₁ would be composed of part of the encoded color channel data G₁' (G₁₁'=10 bits); the color channel bit-stream segment CH_G₂ would be composed of the remaining part of the encoded color channel data G₁' (G₁₂'=5 bits) and the encoded color channel data G₂' (G₂'=5 bits); the color channel bit-stream segment CH_B₁
25 would be composed of the encoded color channel data B₁' (B₁'=10 bits); and the color channel bit-stream segment CH_B₂ would be composed of the encoded color channel data B₂' (B₂'=7 bits) and part of the encoded color channel data B₃' (B₃₁'=3 bits).

Since each color channel bit-stream segment for the same specific color channel is required to have a fixed segment length and the size of encoded color channel data of the same
30 specific color channel in a block may not be an integer multiple of the fixed segment length, at least one color channel bit-stream segment in the interleaved bit-stream BS_I may include color channel information of the same specific color channel of different blocks. Please refer to FIG. 8 again. Suppose that the color channel data R₁-R_N of all pixels in the block BK are converted into encoded color channel data R₁'-R_N', where the total amount of the encoded color channel

data $R_1'-R_N'$ is 105 bits. Since the fixed length L_R is 10 bits, ten color channel bit-stream segments $CH_R_1-CH_R_{10}$ are used to carry 100 bits of the encoded color channel data $R_1'-R_N'$, thus leaving 5 bits of the encoded color channel data $R_1'-R_N'$ in the next color channel bit-stream segment CH_R_{11} . To make the color channel bit-stream segment CH_R_{11} filled with 10 bits, 5 bits of the encoded color channel data belonging to a different block BK" would be included in the color channel bit-stream segment CH_R_{11} . In other words, the color channel bit-stream segment CH_R_{11} has color channel information of different blocks.

The aforementioned image compression operation shown in FIG. 6/FIG. 7 may be performed by an encoder implemented using pure hardware. With regard to the image compression operation shown in FIG. 6/FIG. 7, each set of color channel bit-stream segments (e.g., BS_1) is immediately generated and output by the encoder 214 at the time the required color channel bit-stream segments (e.g., CH_R_1 , CH_G_1 and CH_B_1) are obtained by encoding part of the pixel data of the block BK. However, a different image compression operation may be performed by an encoder which is implemented by a processor executing software instructions. The same objective of generating the interleaved bit-stream BS_I is achieved.

Please refer to FIG. 9, which is a diagram illustrating yet another image compression operation performed by the encoder 214. The encoder 214 first employs the conventional image compression scheme to encode pixel data of blocks (e.g., BK1 and BK2) into a bit-stream BS composed of a plurality of concatenated bit-stream portions $BK1_BS_P1$, $BK1_BS_P2$, $BK1_BS_P3$ for the block BK1 and a plurality of concatenated bit-stream portions $BK2_BS_P1$, $BK2_BS_P2$, $BK2_BS_P3$ for the next block BK2, where the bit-stream portions $BK1_BS_P1$, $BK1_BS_P2$, $BK1_BS_P3$ correspond to different color channels (e.g., red channel, green channel and green channel), and the bit-stream portions $BK2_BS_P1$, $BK2_BS_P2$, $BK2_BS_P3$ correspond to different color channels (e.g., red channel, green channel and green channel). Each of the bit-stream portions $BK1_BS_P1$, $BK1_BS_P2$, $BK1_BS_P3$ includes all encoded color channel data of the same color channel in the block BK1, and each of the bit-stream portions $BK2_BS_P1$, $BK2_BS_P2$, $BK2_BS_P3$ includes all encoded color channel data of the same color channel in the block BK2. As shown in FIG. 9, the bit-stream portion $BK1_BS_P1$ is composed of encoded color channel data $R_1'-R_N'$, the bit-stream portion $BK1_BS_P2$ is composed of encoded color channel data $G_1'-G_N'$, the bit-stream portion $BK1_BS_P3$ is composed of encoded color channel data $B_1'-B_N'$, the bit-stream portion $BK2_BS_P1$ is composed of encoded color channel data $R_{N+1}'-R_{2N}'$, the bit-stream portion $BK2_BS_P2$ is composed of encoded color channel data $G_{N+1}'-G_{2N}'$, and the bit-stream portion $BK2_BS_P3$ is composed of encoded color channel data $B_{N+1}'-B_{2N}'$. After encoding pixel data

of the block BK1, the encoder 214 stores the bit-stream portions BK1_BS_P1, BK1_BS_P2, BK1_BS_P3 in a buffer (not shown). Similarly, after encoding pixel data of the block BK2, the encoder 214 stores the bit-stream portions BK2_BS_P1, BK2_BS_P2, BK2_BS_P3 in the buffer (not shown).

5 Next, when the bit-stream portions BK1_BS_P1, BK1_BS_P2, BK1_BS_P3 are available in the buffer, the encoder 214 is operative to partition each of the bit-stream portions BK1_BS_P1, BK1_BS_P2, BK1_BS_P3 into a plurality of color channel bit-stream segments. For one example, the bit-stream portion BK1_BS_P1 is partitioned into variable-length color channel bit-stream segments CH_R1, CH_R2...CH_RN as shown in FIG. 6, the bit-stream
10 portion BK1_BS_P2 is partitioned into variable-length color channel bit-stream segments CH_G1, CH_G2...CH_GN as shown in FIG. 6, and the bit-stream portion BK1_BS_P3 is partitioned into variable-length color channel bit-stream segments CH_B1, CH_B2... CH_BN as shown in FIG. 6. For another example, the bit-stream portion BK1_BS_P1 is partitioned into variable-length color channel bit-stream segments CH_R1, CH_R2... CH_RM as shown in FIG.
15 7, the bit-stream portion BK1_BS_P2 is partitioned into variable-length color channel bit-stream segments CH_G1, CH_G2... CH_GM as shown in FIG. 7, and the bit-stream portion BK1_BS_P3 is partitioned into variable-length color channel bit-stream segments CH_B1, CH_B2... CH_BM as shown in FIG. 7. Similarly, when the bit-stream portions BK2_BS_P1, BK2_BS_P2, BK2_BS_P3 are available in the buffer, the encoder 214 is operative to partition
20 each of the bit-stream portions BK2_BS_P1, BK2_BS_P2, BK2_BS_P3 into a plurality of color channel bit-stream segments.

The encoder 214 interleaves color channel bit-stream segments derived from partitioning the bit-stream portions to generate an interleaved bit-stream BS_I as shown in FIG. 6/FIG. 7. By way of example, but not limitation, the encoder 214 may employ a regular interleaving
25 scheme to generate the interleaved bit-stream BS_I, such that the numbers of color channel bit-stream segments for different color channels in the same block are identical, and each set of color channel bit-stream segments is composed of color channel bit-stream segments for different color channels arranged in a regular color channel order (e.g., R->G->B). For one example, as shown in FIG. 6, the number of color channel bit-stream segments CH_R1-CH_RN
30 is equal to N, the number of color channel bit-stream segments CH_G1-CH_GN is equal to N, and the number of color channel bit-stream segments CH_B1-CH_BN is equal to N. Besides, in each set of color channel bit-stream segments, a red color channel bit-stream segment is followed by a green color channel bit-stream segment, and the green color channel bit-stream segment is followed by a blue color channel bit-stream segment. For another example, as shown

in FIG. 7, the number of color channel bit-stream segments CH_R_1 - CH_R_M is equal to M , the number of color channel bit-stream segments CH_G_1 - CH_G_M is equal to M , and the number of color channel bit-stream segments CH_B_1 - CH_B_M is equal to M . Besides, in each set of color channel bit-stream segments, a red color channel bit-stream segment is followed by a green color channel bit-stream segment, and the green color channel bit-stream segment is followed by a blue color channel bit-stream segment.

In an alternative design, when the bit-stream portions $BK1_BS_P1$, $BK1_BS_P2$, $BK1_BS_P3$ are available in the buffer, the encoder 214 is operative to partition each of the bit-stream portions $BK1_BS_P1$, $BK1_BS_P2$, $BK1_BS_P3$ based on the same predetermined size (i.e., a fixed segment size), such that the bit-stream portion $BK1_BS_P1$ is partitioned into fixed-length color channel bit-stream segments, including at least CH_R_1 , CH_R_2 as shown in FIG. 8, the bit-stream portion $BK1_BS_P2$ is partitioned into fixed-length color channel bit-stream segments, including at least CH_G_1 and CH_G_2 as shown in FIG. 8, and the bit-stream portion $BK1_BS_P3$ is partitioned into fixed-length color channel bit-stream segments, including at least CH_B_1 , CH_B_2 , as shown in FIG. 8. Similarly, when the bit-stream portions $BK2_BS_P1$, $BK2_BS_P2$, $BK2_BS_P3$ are available in the buffer, the encoder 214 is operative to partition each of the bit-stream portions $BK2_BS_P1$, $BK2_BS_P2$, $BK2_BS_P3$ based on the same predetermined size (i.e., a fixed segment size), such that the bit-stream portion $BK2_BS_P1$ is partitioned into fixed-length color channel bit-stream segments, the bit-stream portion $BK2_BS_P2$ is partitioned into fixed-length color channel bit-stream segments, and the bit-stream portion $BK2_BS_P3$ is partitioned into fixed-length color channel bit-stream segments. It should be noted that one fixed-length color channel bit-stream segment (e.g., CH_R_{11} shown in FIG. 8) may include partial encoded color channel data of one block $BK1$ and partial encoded color channel data of another block $BK2$.

After the fixed-length color channel bit-stream segments of different color channels are sequentially obtained from partitioning the bit-stream portions $BK1_BS_P1$ - $BK1_BS_P3$, $BK2_BS_P1$ - $BK2_BS_P3$, the encoder 214 may employ either a regular interleaving scheme or an irregular interleaving scheme to interleave the fixed-length color channel bit-stream segments to generate an interleaved bit-stream BS_I .

Considering a case where the encoder 214 employs a regular interleaving scheme to generate the interleaved bit-stream BS_I , the numbers of color channel bit-stream segments for different color channels are identical, and each set of color channel bit-stream segments is composed of color channel bit-stream segments for different color channels arranged in a regular color channel order (e.g., $R \rightarrow G \rightarrow B$). For example, as shown in FIG. 8, the number of

color channel bit-stream segments CH_R_1 - CH_R_{11} is equal to 11, the number of color channel bit-stream segments CH_G_1 - CH_G_{11} is equal to 11, and the number of color channel bit-stream segments CH_B_1 - CH_B_{11} is equal to 11. Besides, in each set of color channel bit-stream segments, a red color channel bit-stream segment is followed by a green color channel bit-stream segment, and the green color channel bit-stream segment is followed by a blue color channel bit-stream segment.

Considering another case where the encoder 214 employs an irregular interleaving scheme to generate the interleaved bit-stream BS_I , the numbers of color channel bit-stream segments for different color channels are not necessarily the same. For example, the number of Y color channel bit-stream segments is 2, the number of U color channel bit-stream segments is 1, and the number of V color channel bit-stream segments is 1. Hence, the next color channel bit-stream segment following the current color channel bit-stream segment of a specific color channel may be any color channel bit-stream segment of a color channel identical to or different from the specific color channel. For example, concatenated color channel bit-stream segments may be $CH_Y_1+CH_Y_2+CH_U_1+CH_V_1$.

Further, it is possible that the bit-stream of the one color channel is much longer than bit-streams of the remaining color channels. Specifically, due to characteristics of different color channels of blocks in a frame, the variation of an encoded bit-stream size of each color channel could be large. To maintain a fixed-sized bit-stream segment format, more bit-stream segments may be allocated to a specific color channel of blocks. On the other hand, an encoded bit-stream size of a specific color channel of a specific number of blocks may still be less than that of one bit-stream segment. In this case, the encoded bit-stream of this specific color channel for this specific number of blocks is not interleaved into the final bit-stream due to the fact that one complete bit-stream segment is not formed yet. As there is discrepancy between numbers of fixed-length color channel bit-stream segments for different color channels, the color channel bit-stream segments in the interleaved bit-stream BS_I may be arranged in an irregular color channel order (e.g., $R \rightarrow G \rightarrow B \rightarrow R \rightarrow R$). For illustrative purposes, considering a simple case where all color channel data of the R color channel in a block are converted into corresponding encoded color channel data with a size of $3 \cdot L_R$, all color channel data of the G color channel in the same block are converted into corresponding encoded color channel data with a size of L_G , and all color channel data of the B color channel in the same block are converted into corresponding encoded color channel data with a size of L_B , the color channel bit-stream segments arranged in the interleaved bit-stream BS_I may be $CH_R_1+CH_G_1+CH_B_1+CH_R_2+CH_R_3$.

With regard to the actual implementation of the irregular interleaving scheme, the encoder 214 decides a color channel of a next color channel bit-stream segment by referring to color channel data encoding state(s) of previous color channel bit-stream segment(s), and then concatenates the next color channel bit-stream segment of the selected color channel to a current color channel bit-stream segment or previously concatenated color channel bit-stream segments. For example, the amount of color channel data encoded into a color channel bit-stream segment may be referenced by the encoder 214. For better understanding of technical features of the encoder 214, several examples of the irregular interleaving operation are given as below.

In one exemplary design, when a first color channel bit-stream segment of a first color channel is selected as the beginning of a bit-stream and a second color channel bit-stream segment of a second color channel is concatenated to the color channel bit-stream segment of the first color channel, a third color channel bit-stream segment is selected from one of the first color channel and the second color channel and then concatenated to the second color channel bit-stream segment of the second color channel.

The selection of the third color channel bit-stream segment is based on the amount of color channel data encoded into the first color channel bit-stream segment and the amount of color channel data encoded into the second color channel bit-stream segment. If the amount of color channel data encoded into the first color channel bit-stream segment is less than a predetermined amount (i.e., a predetermined threshold), implying that more color channel bit-stream segments are required to carry encoded color channel data of the first color channel, the third color channel bit-stream segment is selected from the first color channel; and if the amount of color channel data encoded into the first color channel bit-stream segment is not less than the predetermined amount, and the amount of color channel data encoded into the second color channel bit-stream segment is less than the predetermined amount, implying that more color channel bit-stream segments are required to carry encoded color channel data of the second color channel, the third color channel bit-stream segment is selected from the second color channel.

Alternatively, the amount of color channel data encoded into the first color channel bit-stream segment may be directly compared with the amount of color channel data encoded into the second color channel bit-stream segment. If the amount of color channel data encoded into the first color channel bit-stream segment is less than the amount of color channel data encoded into the second color channel bit-stream segment, the third color channel bit-stream segment is selected from the first color channel. If the amount of color channel data encoded into the

second color channel bit-stream segment is less than the amount of color channel data encoded into the first color channel bit-stream segment, the third color channel bit-stream segment is selected from the second color channel. If the amount of color channel data encoded into the first color channel bit-stream segment is equal to the amount of color channel data encoded into the second color channel bit-stream segment, the third color channel bit-stream segment is selected based on a default color channel order. By way of example, but not limitation, the default color channel order may be configured by the encoder (and decoder) setting, the order information encoded in the bit-stream, the implicit color channel order, or the regular color channel order (e.g., a regular color channel order R->G->B).

The implicit color channel order determines the order of color channels based on the number of encoded bits of each color channel bit-stream segment. In a first exemplary implicit color channel order design, the number of encoded bits of the first color channel bit-stream segment may be directly compared with the number of encoded bits of the second color channel bit-stream segment. If the number of encoded bits of the first color channel bit-stream segment is less than the number of encoded bits of the second color channel bit-stream segment, the implicit color channel order is the first color channel and then the second color channel (i.e., the first color channel is followed by the second color channel). If the number of encoded bits of the second color channel bit-stream segment is less than the number of encoded bits of the first color channel bit-stream segment, the implicit color channel order is the second color channel and then the first color channel (i.e., the second color channel is followed by the first color channel). If the number of encoded bits of the first color channel bit-stream segment is equal to the number of encoded bits of second color channel bit-stream segment, the implicit color channel order may be configured by the encoder (and decoder) setting, the order information encoded in the bit-stream, or the regular color channel order (e.g., a regular color channel order R->G->B).

In a second exemplary implicit color channel order design, the number of encoded bits of the first color channel bit-stream segment may be directly compared with the number of encoded bits of the second color channel bit-stream segment. If the number of encoded bits of the first color channel bit-stream segment is less than the number of encoded bits of the second color channel bit-stream segment, the implicit color channel order is the second color channel and then the first color channel (i.e., the second color channel is followed by the first color channel). If the number of encoded bits of the second color channel bit-stream segment is less than the number of encoded bits of the first color channel bit-stream segment, the implicit color channel order is the first color channel and then the second color channel (i.e., the first color

channel is followed by the second color channel). If the number of encoded bits of the first color channel bit-stream segment is equal to the number of encoded bits of the second color channel bit-stream segment, the implicit color channel order may be configured by the encoder (and decoder) setting, the order information encoded in the bit-stream, or the regular color channel order (e.g., a regular color channel order R->G->B).

It should be noted that the above rules of configuring the implicit color channel order are for illustrative purposes only, and are not meant to be limitations of the present invention.

In another exemplary design, a first color channel bit-stream segment of a first color channel is concatenated to a second color channel bit-stream segment of the same first color channel if the amount of color channel data encoded into the second color channel bit-stream segment is less than a predetermined amount (i.e., a predetermined threshold).

In another exemplary design, color channel bit-stream segments of the same color channel are concatenated one by one until the total amount of color channel data encoded into the concatenated color channel bit-stream segments reaches a predetermined amount (i.e., a predetermined threshold), and then at least one color channel bit-stream segment of another color channel is concatenated to the concatenated color channel bit-stream segments of the same color channel.

In another exemplary design, a color channel bit-stream segment is selected from different color channels based on the amount of color channel data of each color channel in previously concatenated color channel bit-stream segments, and then the selected color channel bit-stream segment is concatenated to the previously concatenated color channel bit-stream segments.

As shown in FIG. 2, the image compressor 202 at the TX end (e.g., one chip) transmits the interleaved bit-stream BS_I to the image decompressor 204 at the RX end (e.g., another chip). The input port 222 of the image decompressor 204 is arranged for receiving the interleaved bit-stream BS_I generated from the image compressor 202, where the interleaved bit-stream BS_I includes encoded pixel data of a frame, and is therefore composed of a plurality of color channel bit-stream segments that are concatenated. The decoder 224 is coupled to the input port 222, and arranged for decoding the interleaved bit-stream BS_I into pixel data of one or more than one block BK'. If the encoder 214 employs a lossless compression algorithm and the decoder 224 employs a corresponding lossless decompression algorithm, the pixel data of the block BK' should be identical to pixel data of the block BK, ideally. However, if the encoder 214 employs a lossy compression algorithm and the decoder 224 employs a corresponding lossy decompression algorithm, the pixel data of the block BK' may not be identical to pixel data of the block BK. Generally speaking, the block BK' at the decoder side is obtained based

on how the original block BK is encoded at the encoder side.

Please refer to FIG. 10, which is a diagram illustrating an image decompression operation performed by the decoder 224 shown in FIG. 2. In this embodiment, the encoder 214 generates the interleaved bit-stream BS_I as shown in FIG. 6. As the bit-streams (i.e., sets of color channel bit-stream segments) BS₁-BS_N are concatenated, the decoder 224 applies image decompression to the bit-stream segments BS₁-BS_N one by one. Besides, as the color channel bit-stream segments are concatenated in each of the bit-streams BS₁-BS_N, the decoder 224 applies image decompression to the color channel bit-stream segments in the same bit-stream one by one. As shown in FIG. 6, each of the color channel bit-stream segments CH_R₁-CH_R_N, CH_G₁-CH_G_N, CH_B₁-CH_B_N includes one encoded color channel data of a single pixel. Hence, the decoder 224 generates decoded color channel data R₁'', G₁'', B₁'', R₂'', G₂'', B₂'', ... R_N'', G_N'', B_N'' one by one, where the successive decoded color channel data R₁'', G₁'', B₁'' in the pixel data part P₁'' of the block BK' are pixel data of the 1st pixel in the block BK', the successive decoded color channel data R₂'', G₂'', B₂'' in the pixel data part P₂'' of the block BK' are pixel data of the 2nd pixel in the block BK', and the successive decoded color channel data R_N'', G_N'', B_N'' in the pixel data part P_N'' of the block BK' are pixel data of the Nth pixel in the block BK'. No data buffer is needed for buffering decoded color channel data for two color channels (e.g., red channel and green channel) since decoded pixel data of pixels are generated from the decoder 224 sequentially. Compared to the conventional decompression design which requires a large-sized data buffer for buffering decoded color channel data derived from decoding the encoded color channel data R₁'-R_N' and G₁'-G_N' as shown in FIG. 1, the proposed decompression design has relaxed data buffer requirement and lower hardware cost. Besides, compared to the conventional decompression design, the proposed decompression design has lower processing latency for obtaining decoded pixel data of one pixel since the buffer overhead is reduced. It is self-explanatory that the proposed compression design used for generating the interleaved bit-stream BS_I would also have lower data buffer requirement and processing latency.

As mentioned above, each of the color channel bit-stream segment may be generated by encoding color channel data of more than one pixel. To obtain pixel data of one pixel in the block BK', a small-sized data buffer is needed by the decoder 224 for temporarily storing decoded color channel data of the first two color channel bit-stream segments in a bit-stream (i.e., a set of color channel bit-stream segments) before the decoder 224 starts decoding the last color channel bit-stream segment in the same bit-stream (i.e., the same set of color channel bit-stream segments). Please refer to FIG. 11, which is a diagram illustrating another image

decompression operation performed by the decoder 224 shown in FIG. 2. In this embodiment, the encoder 214 generates the interleaved bit-stream BS_I as shown in FIG. 7. As the bit-streams (i.e., sets of color channel bit-stream segments) BS₁-BS_M are concatenated, the decoder 224 applies image decompression to the bit-streams BS₁-BS_M one by one. Besides, as the color channel bit-stream segments are concatenated in each of the bit-streams BS₁-BS_M, the decoder 224 applies image decompression to the color channel bit-stream segments in the same bit-stream (i.e., the same set of color channel bit-stream segments) one by one. As shown in FIG. 7, each of the color channel bit-stream segments CH_R₁-CH_R_M, CH_G₁-CH_G_M, CH_B₁-CH_B_M includes encoded color channel data of two pixels. Hence, the decoder 224 generates decoded color channel data R₁'', R₂'', G₁'', G₂'', B₁'', B₂'', R₃'', R₄'', G₃'', G₄'', B₃'', B₄'', ... R_{N-1}'', R_N'', G_{N-1}'', G_N'', B_{N-1}'', B_N'', one by one.

With regard to the image decompression applied to the bit-stream BS₁, the decoded color channel data R₁'', R₂'', G₁'', G₂'', in the pixel data part P₁'', of the decoded bit-stream BS_D are buffered when generated by the decoder 224 because the decoded color channel data B₁'', B₂'', are not available yet. Hence, the pixel data of the 1st pixel in the block BK' (i.e., the decoded color channel data R₁'', G₁'', B₁'') is not output until the decoded color channel data B₁'', is generated by the decoder 224, and the pixel data of the 2nd pixel in the block BK' (i.e., the decoded color channel data R₂'', G₂'', B₂'') is not output until the decoded color channel data B₂'', is generated by the decoder 224. Similarly, with regard to the image decompression applied to the next bit-stream BS₂, the decoded color channel data R₃'', R₄'', G₃'', G₄'', in the pixel data part P₂'', of the decoded bit-stream BS_D are buffered when generated by the decoder 224 because the decoded color channel data B₃'', B₄'', are not available yet. Hence, the pixel data of the 3rd pixel in the block BK' (i.e., the decoded color channel data R₃'', G₃'', B₃'') is not output until the decoded color channel data B₃'', is generated by the decoder 224, and the pixel data of the 4th pixel in the block BK' (i.e., the decoded color channel data R₄'', G₄'', B₄'') is not output until the decoded color channel data B₄'', is generated by the decoder 224. The rest can be done in the same manner. Compared to the conventional decompression design which requires a large-sized data buffer for buffering decoded color channel data derived from decoding the encoded color channel data R₁'-R_N' and G₁'-G_N' as shown in FIG. 1, the proposed decompression design has relaxed data buffer requirement and lower hardware cost. Besides, compared to the conventional decompression design, the proposed decompression design has lower processing latency for obtaining decoded pixel data of one pixel since the buffer overhead is reduced. It is self-explanatory that the proposed compression design used for generating the interleaved bit-stream BS_I would also have lower data buffer requirement and

processing latency.

Consider a case where the encoder 214 generates the interleaved bit-stream BS_I as shown in FIG. 8/FIG. 9, where the interleaved bit-stream BS_I is generated based on a regular interleaving scheme. Similarly, the decoder 224 decodes the bit-streams (i.e., sets of color channel bit-stream segments) in the interleaved bit-stream BS_I one by one, and decodes color channel bit-stream segments in each bit-stream one by one. To obtain pixel data of one pixel in the block BK', a small-sized data buffer is needed by the decoder 224 for temporarily storing decoded color channel data because one fixed-length color channel bit-stream segment for one color channel may include encoded color channel data of more than one pixel. Taking the decoding of the interleaved bit-stream BS_I for example, the decoder 224 generates decoded color channel data for R_1' , R_{21}' , G_{11}' , B_1' , R_{22}' , R_{31}' , G_{12}' , G_2' , B_2' , B_{31}' , etc. one by one. Therefore, the decoded color channel data derived from sequentially decoding R_1' , R_{21}' , G_{11}' , B_1' , R_{22}' , R_{31}' are buffered. When the decoded color channel data of G_{12}' is obtained, the pixel data of the 1st pixel in the block BK' is output, where the decoded color channel data for R_1' , G_{11}' , B_1' are read from the data buffer. Similarly, the decoded color channel data derived from decoding G_2' is also buffered. When the decoded color channel data of G_2' is obtained, the pixel data of the 2nd pixel in the block BK' is output, where the decoded color channel data for R_{21}' , R_{22}' , G_2' are read from the buffer. The following decoding operation can be deduced by analogy. Thus, as a person skilled in the art can readily understand details of the image decompression operation applied to the interleaved bit-stream BS_I generated based on a regular interleaving scheme after reading above paragraphs directed to the image decompression operation shown in FIG. 10, further description is omitted here for brevity.

Consider another case where the encoder 214 generates the interleaved bit-stream BS_I as shown in FIG. 9, where the interleaved bit-stream BS_I is generated based on an irregular interleaving scheme. The decoder 224 decodes color channel bit-stream segments one by one (i.e., $CH_R_1 \rightarrow CH_G_1 \rightarrow CH_B_1 \rightarrow CH_R_2 \rightarrow CH_R_3 \rightarrow CH_G_2 \rightarrow CH_B_2 \rightarrow \dots$). To obtain pixel data of one pixel in the block BK', a small-sized data buffer is needed by the decoder 224 for temporarily storing decoded color channel data because one fixed-length color channel bit-stream segment for one color channel may include encoded color channel data of more than one pixel, and encoded color channel data of a color channel of a pixel may be distributed over more than one fixed-length color channel bit-stream segment. Hence, the decoder 224 does not output the pixel data of a pixel until all color channel data of the pixel are derived from the interleaved bit-stream BS_I.

The decoding operation of the interleaved bit-stream BS_I generated based on an irregular

interleaving scheme is similar to the decoding operation of the interleaved bit-stream BS_I generated based on a regular interleaving scheme. That is, the decoder 224 decodes color channel bit-stream segments one by one, stores decoded color channel data of a pixel into a data buffer if all decoded color channel data of the pixel are not available yet, and does not output the pixel data of the pixel unless all decoded color channel data of the pixel are available. The major difference is that the decoder 224 does not know the actual color channel order of these color channel bit-stream segments beforehand due to the fact that no regular color channel order (i.e., fixed color channel order) is used in this irregular interleaving case. It should be noted that the decoder 224 should follow a de-interleaving rule matching the irregular interleaving rule employed by the encoder 214 to correctly recover color channel data of different color channels from the interleaved bitstream BS_I. Hence, the decoder 224 can identify a color channel of a next color channel bit-stream segment to be decoded by referring to color channel data encoding state(s) of previous color channel bit-stream segment(s), and then decodes the next color channel bit-stream segment to generate decoded color channel data belong to the identified color channel. For example, the amount of color channel data decoded from a color channel bit-stream segment may be referenced by the decoder 224. For better understanding of technical features of the decoder 224, several examples of the de-interleaving operation are given as below.

In one exemplary design, when a first color channel bit-stream segment of a first color channel in the beginning of a bit-stream is decoded and a second color channel bit-stream segment of a second color channel that is concatenated to the color channel bit-stream segment of the first color channel is decoded, the decoder 224 decides whether a third color channel bit-stream segment concatenated to the second color channel bit-stream segment of the second color channel carries color channel information of the first color channel or color channel information of the second color channel, and then decodes the third color channel bit-stream segment to generate decoded color channel data belong to the decided color channel.

The determination of the color channel to which the third color channel bit-stream segment belongs is based on the amount of color channel data decoded from the first color channel bit-stream segment and the amount of color channel data decoded from the second color channel bit-stream segment. If the amount of color channel data decoded from the first color channel bit-stream segment is less than a predetermined amount (i.e., a predetermined threshold), the third color channel bit-stream segment is determined to contain color channel information of the first color channel; and if the amount of color channel data decoded from the first color channel bit-stream segment is not less than the predetermined amount, and the amount of color

channel data decoded from the second color channel bit-stream segment is less than the predetermined amount, the third color channel bit-stream segment is determined to contain color channel information of the second color channel.

Alternatively, the amount of color channel data decoded from the first color channel bit-stream segment may be directly compared with the amount of color channel data decoded from the second color channel bit-stream segment. If the amount of color channel data decoded from the first color channel bit-stream segment is less than the amount of color channel data decoded from the second color channel bit-stream segment, the third color channel bit-stream segment is determined to contain color channel information of the first color channel. If the amount of color channel data decoded from the second color channel bit-stream segment is less than the amount of color channel data decoded from the first color channel bit-stream segment, the third color channel bit-stream segment is determined to contain color channel information of the second color channel. If the amount of color channel data decoded from the second color channel bit-stream segment is equal to the amount of color channel data decoded from the first color channel bit-stream segment, a color channel to which the third color channel bit-stream segment corresponds is determined based on a default color channel order (e.g., a regular color channel order R->G->B).

In another exemplary design, the decoder 224 refers to the amount of color channel data of each color channel in previously concatenated color channel bit-stream segments to determine that a color channel bit-stream segment concatenated to the previously concatenated color channel bit-stream segments contain color channel information of one color channel from different color channels.

In above embodiments, each pixel has three color channel data complying with the RGB format. However, this is for illustrative purposes only, and is not meant to be a limitation of the present invention. Specifically, the proposed image compression/decompression scheme may be applied to pixels each having more than one color channel data with any multi-color-channel format (e.g., YUV format). These alternative designs all fall within the scope of the present invention.

Those skilled in the art will readily observe that numerous modifications and alterations of the device and method may be made while retaining the teachings of the invention. Accordingly, the above disclosure should be construed as limited only by the metes and bounds of the appended claims.

CLAIMS

1. An image compression method, comprising:

receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of
5 color channel data corresponding to a plurality of different color channels, respectively;

encoding the pixel data of each pixel and generating bit-streams corresponding to the
plurality of color channel data of the pixel, wherein the bit-streams corresponding to the
plurality of color channel data of the pixel are separated;

packing bit-streams of a same color channel data of different pixels into color channel bit-
10 stream segments, wherein each of the bit-stream segments has a same predetermined size; and
concatenating color channel bit-stream segments of the different color channels into a final
bit-stream.

2. The image compression method of claim 1, wherein the concatenating step comprises:

15 concatenating a color channel bit-stream segment of a first color channel to a color channel
bit-stream segment of a second color channel, wherein the color channel bit-stream segment of
the first color channel and the color channel bit-stream segment of the second color channel
have the same bit-stream segment size.

3. The image compression method of claim 1, wherein the concatenating step comprises:

20 concatenating a color channel bit-stream segment of a first color channel to a color channel
bit-stream segment of a second color channel;

concatenating a color channel bit-stream segment of a third color channel to the color
channel bit-stream segment of the first color channel,

25 wherein the color channel bit-stream segment of the first color channel, the color channel
bit-stream segment of the second color channel, and the color channel bit-stream segment of the
third color channel have the same bit-stream segment size.

4. The image compression method of claim 1, wherein the concatenating step comprises:

30 concatenating a color channel bit-stream segment of a first color channel to a color channel
bit-stream segment of a second color channel;

concatenating a color channel bit-stream segment of a third color channel to the color
channel bit-stream segment of the first color channel;

concatenating a color channel bit-stream segment of a fourth color channel to the color

channel bit-stream segment of the third color channel;

wherein the color channel bit-stream segment of the first color channel, the color channel bit-stream segment of the second color channel, the color channel bit-stream segment of the third color channel, and the color channel bit-stream segment of the fourth color channel have the same bit-stream segment size.

5 5. The image compression method of claim 1, wherein the concatenating step comprises:

selecting a first color channel bit-stream segment of a first color channel as beginning of a bit-stream;

10 concatenating a second color channel bit-stream segment of a second color channel to the first color channel bit-stream segment of the first color channel;

wherein the first color channel bit-stream segment of the first color channel and the second color channel bit-stream segment of the second color channel have the same predetermined size.

15 6. The image compression method of claim 5, wherein the concatenating step further comprises:

selecting a third color channel bit-stream segment from one of the first color channel and the second color channel; and

concatenating the selected third color channel bit-stream segment to the second color channel bit-stream segment.

20 7. The image compression method of claim 6, wherein selection of the third color channel bit-stream segment from one of the first color channel and the second color channel is based on an amount of color channel data encoded into the first color channel bit-stream segment and an amount of color channel data encoded into the second color channel bit-stream segment; and when the amount of color channel data encoded into the first color channel bit-stream segment is less than a predetermined amount, the third color channel bit-stream segment is selected from the first color channel.

30 8. The image compression method of claim 7, wherein when the amount of color channel data encoded into the first color channel bit-stream segment is more than or equal to the predetermined amount, and the amount of color channel data encoded into the second color channel bit-stream segment is less than the predetermined amount, the third color channel bit-stream segment is selected from the second color channel.

9. The image compression method of claim 6, wherein the step of selecting the third color channel bit-stream segment comprises:

comparing an amount of color channel data encoded into the first color channel bit-stream segment and an amount of color channel data encoded into the second color channel bit-stream segment;

when the amount of color channel data encoded into the first color channel bit-stream segment is less than the amount of color channel data encoded into the second color channel bit-stream segment, selecting the third color channel bit-stream segment from the first color channel;

when the amount of color channel data encoded into the second color channel bit-stream segment is less than the amount of color channel data encoded into the first color channel bit-stream segment, selecting the third color channel bit-stream segment from the second color channel; and

when the amount of color channel data encoded into the first color channel bit-stream segment is equal to the amount of color channel data encoded into the second color channel bit-stream segment, selecting the third color channel bit-stream segment based on a default color channel order.

10. The image compression method of claim 1, wherein the concatenating step comprises:

concatenating a first color channel bit-stream segment of a first color channel to a second color channel bit-stream segment of the first color channel when an amount of color channel data encoded into the second color channel bit-stream segment is less than a predetermined amount.

11. The image compression method of claim 1, wherein the concatenating step comprises:

concatenating color channel bit-stream segments of a same color channel until a total amount of color channel data encoded into the concatenated color channel bit-stream segments is larger than or equal to a predetermined amount, and then concatenating at least one color channel bit-stream segment of another color channel to the concatenated color channel bit-stream segments.

12. The image compression method of claim 1, wherein the concatenating step comprises:

selecting a color channel bit-stream segment from the different color channels based on an amount of color channel data of each color channel in previously concatenated color channel

bit-stream segments; and

concatenating the selected color channel bit-stream segment to the previously concatenated color channel bit-stream segments.

5 13. The image compression method of claim 1, wherein at least one of the color channel bit-stream segments includes color channel information of different blocks of the frame.

14. An image decompression method, comprising:

10 receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments has a same predetermined size; and

decoding the bit-stream into pixel data of a plurality of pixels in the frame, wherein each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

15 15. The image decompression method of claim 14, wherein the bit-stream comprises:
a color channel bit-stream segment of a first color channel that is concatenated to a color channel bit-stream segment of a second color channel, wherein the color channel bit-stream segment of the first color channel and the color channel bit-stream segment of the second color
20 channel have the same bit-stream segment size.

16. The image decompression method of claim 14, wherein the bit-stream comprises:

a color channel bit-stream segment of a first color channel that is concatenated to a color channel bit-stream segment of a second color channel;

25 a color channel bit-stream segment of a third color channel that is concatenated to the color channel bit-stream segment of the first color channel,

wherein the color channel bit-stream segment of the first color channel, the color channel bit-stream segment of the second color channel, and the color channel bit-stream segment of the third color channel have the same bit-stream segment size.

30 17. The image decompression method of claim 14, wherein the bit-stream comprises:
a color channel bit-stream segment of a first color channel that is concatenated to a color channel bit-stream segment of a second color channel;

a color channel bit-stream segment of a third color channel that is concatenated to the

color channel bit-stream segment of the first color channel;

a color channel bit-stream segment of a fourth color channel that is concatenated to the color channel bit-stream segment of the third color channel;

5 wherein the color channel bit-stream segment of the first color channel, the color channel bit-stream segment of the second color channel, the color channel bit-stream segment of the third color channel, and the color channel bit-stream segment of the fourth color channel have the same bit-stream segment size.

10 18. The image decompression method of claim 14, wherein the decoding step comprises:
decoding a first color channel bit-stream segment of a first color channel in beginning of a bit-stream;

decoding a second color channel bit-stream segment of a second color channel, wherein the second color channel bit-stream of the second color channel is concatenated to the first color channel bit-stream segment of the first color channel;

15 wherein the first color channel bit-stream segment of the first and the second color channel bit-stream segment of the second color channel have the same bit-stream segment size.

19. The image decompression method of claim 18, wherein the decoding step further comprises:

20 determining whether a third color channel bit-stream segment contains color channel information of the first color channel or color channel information of the second color channel, wherein the third color channel bit-stream segment is concatenated to the second color channel bit-stream segment; and

25 decoding the third color channel bit-stream segment.

20. The image decompression method of claim 19, wherein determination of the third color channel bit-stream segment being the color channel information of either the first color channel or the second color channel is based on an amount of color channel data decoded from the first color channel bit-stream segment and an amount of color channel data decoded from the second color channel bit-stream segment; when the amount of color channel data decoded from the first color channel bit-stream segment is less than a predetermined amount, the third color channel bit-stream segment is determined to contain the color channel information of the first color channel.

21. The image decompression method of claim 20, wherein when the amount of color channel data decoded from the first color channel bit-stream segment is more than or equal to the predetermined number, and the amount of color channel data decoded from the second color channel bit-stream segment is less than the predetermined number, the third color channel bit-stream segment is determined to contain the color channel information of the second color channel.

22. The image decompression method of claim 19, wherein the decoding step comprises:
comparing an amount of color channel data decoded from the first color channel bit-stream segment and an amount of color channel data decoded from the second color channel bit-stream segment;

when the amount of color channel data decoded from the first color channel bit-stream segment is less than the amount of color channel data decoded from the second color channel bit-stream segment, determining that the third color channel bit-stream segment contains color channel information of the first color channel;

when the amount of color channel data decoded from the second color channel bit-stream segment is less than the amount of color channel data decoded from the first color channel bit-stream segment, determining that the third color channel bit-stream segment contains color channel information of the second color channel; and

when the amount of color channel data decoded from the first color channel bit-stream segment is equal to the amount of color channel data decoded from the second color channel bit-stream segment, determining a color channel to which the third color channel bit-stream segment corresponds based on a default color channel order.

23. The image decompression method of claim 14, wherein the decoding step comprises:
determining a color channel bit-stream segment to contain which color channel information - based on an amount of color channel data of each color channel in previously concatenated color channel bit-stream segments, and

decoding the color channel bit-stream segment.

24. The image decompression method of claim 14, wherein at least one of the color channel bit-stream segments includes color channel information of different blocks of the frame.

25. An image compression method, comprising:

receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively;

encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein each bit-stream corresponding to single color channel data of the pixel is a color channel bit-stream segment; and

concatenating color channel bit-stream segments of a same pixel into a concatenated bit-stream portions, and concatenating concatenated bit-stream portions of different pixels into a final bit-stream.

26. The image compression method of claim 25, wherein the concatenating step comprises: concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel.

27. The image compression method of claim 25, wherein the concatenating step comprises: concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel;

concatenating a color channel bit-stream segment of a third color channel to the color channel bit-stream segment of the first color channel.

28. The image compression method of claim 25, wherein the concatenating step comprises: concatenating a color channel bit-stream segment of a first color channel to a color channel bit-stream segment of a second color channel;

concatenating a color channel bit-stream segment of a third color channel to the color channel bit-stream segment of the first color channel;

concatenating a color channel bit-stream segment of a fourth color channel to the color channel bit-stream segment of the third color channel.

29. The image compression method of claim 25, wherein a length of each color channel bit-stream segment is limited by a predetermined threshold.

30. The image compression method of claim 29, wherein the predetermined threshold is configured before the encoding step is performed.

31. The image compression method of claim 25, wherein a total length of one or more than

one concatenated color channel bit-stream segments corresponding to the same pixel is limited by a predetermined threshold.

32. The image compression method of claim 31, wherein the predetermined threshold is
5 configured before the encoding step is performed.

33. An image decompression method, comprising:

receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a
plurality of color channel bit-stream segments that are concatenated, and each of the color
10 channel bit-stream segments contains information corresponding to one pixel only; and

decoding the bit-stream into pixel data of a plurality of pixels in the frame, and each of the
pixels has a plurality of color channel data corresponding to a plurality of different color
channels, respectively.

15 34. The image decompression method of claim 33, wherein the bit-stream comprises:
a color channel bit-stream segment of a first color channel that is concatenated to a color
channel bit-stream segment of a second color channel.

20 35. The image decompression method of claim 33, wherein the bit-stream comprises:
a color channel bit-stream segment of a first color channel that is concatenated to a color
channel bit-stream segment of a second color channel; and
a color channel bit-stream segment of a third color channel that is concatenated to the
color channel bit-stream segment of the first color channel.

25 36. The image decompression method of claim 33, wherein the bit-stream comprises:
a color channel bit-stream segment of a first color channel that is concatenated to a color
channel bit-stream segment of a second color channel;
a color channel bit-stream segment of a third color channel that is concatenated to the
color channel bit-stream segment of the first color channel; and
30 a color channel bit-stream segment of a fourth color channel that is concatenated to the
color channel bit-stream segment of the third color channel.

37. The image decompression method of claim 33, wherein a length of each color channel
bit-stream segment is limited by a predetermined threshold, and the predetermined threshold is

configured before the encoding step is performed.

38. The image decompression method of claim 33, wherein a total length of one or more than one concatenated color channel bit-stream segments corresponding to the same pixel is limited by a predetermined threshold, and the predetermined threshold is configured before the encoding step is performed.

39. An image compressor, comprising:

an input port, arranged for receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively; and

an encoder, arranged for encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein the bit-streams corresponding to the plurality of color channel data of the pixel are separated; packing bit-streams of a same color channel data of different pixels into color channel bit-stream segments, wherein each of the bit-stream segments has a same predetermined size; and concatenating color channel bit-stream segments of the different color channels into a final bit-stream.

40. An image decompressor, comprising:

an input port, arranged for receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments has a same predetermined size; and

a decoder, arranged for decoding the bit-stream into pixel data of a plurality of pixels in the frame, wherein each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

41. An image compressor, comprising:

an input port, arranged for receiving a plurality of pixels of a frame, wherein pixel data of each pixel has a plurality of color channel data corresponding to a plurality of different color channels, respectively; and

an encoder, arranged for encoding the pixel data of each pixel and generating bit-streams corresponding to the plurality of color channel data of the pixel, wherein each bit-stream corresponding to single color channel data of the pixel is a color channel bit-stream segment; and concatenating color channel bit-stream segments of a same pixel into a concatenated bit-

stream portions, and concatenating concatenated bit-stream portions of different pixels into a final bit-stream.

42. An image decompressor, comprising:

5 an input port, arranged for receiving a bit-stream corresponding to a frame, wherein the bit-stream is composed of a plurality of color channel bit-stream segments that are concatenated, and each of the color channel bit-stream segments contains information corresponding to one pixel only; and

10 a decoder, arranged for decoding the bit-stream into pixel data of a plurality of pixels in the frame, and each of the pixels has a plurality of color channel data corresponding to a plurality of different color channels, respectively.

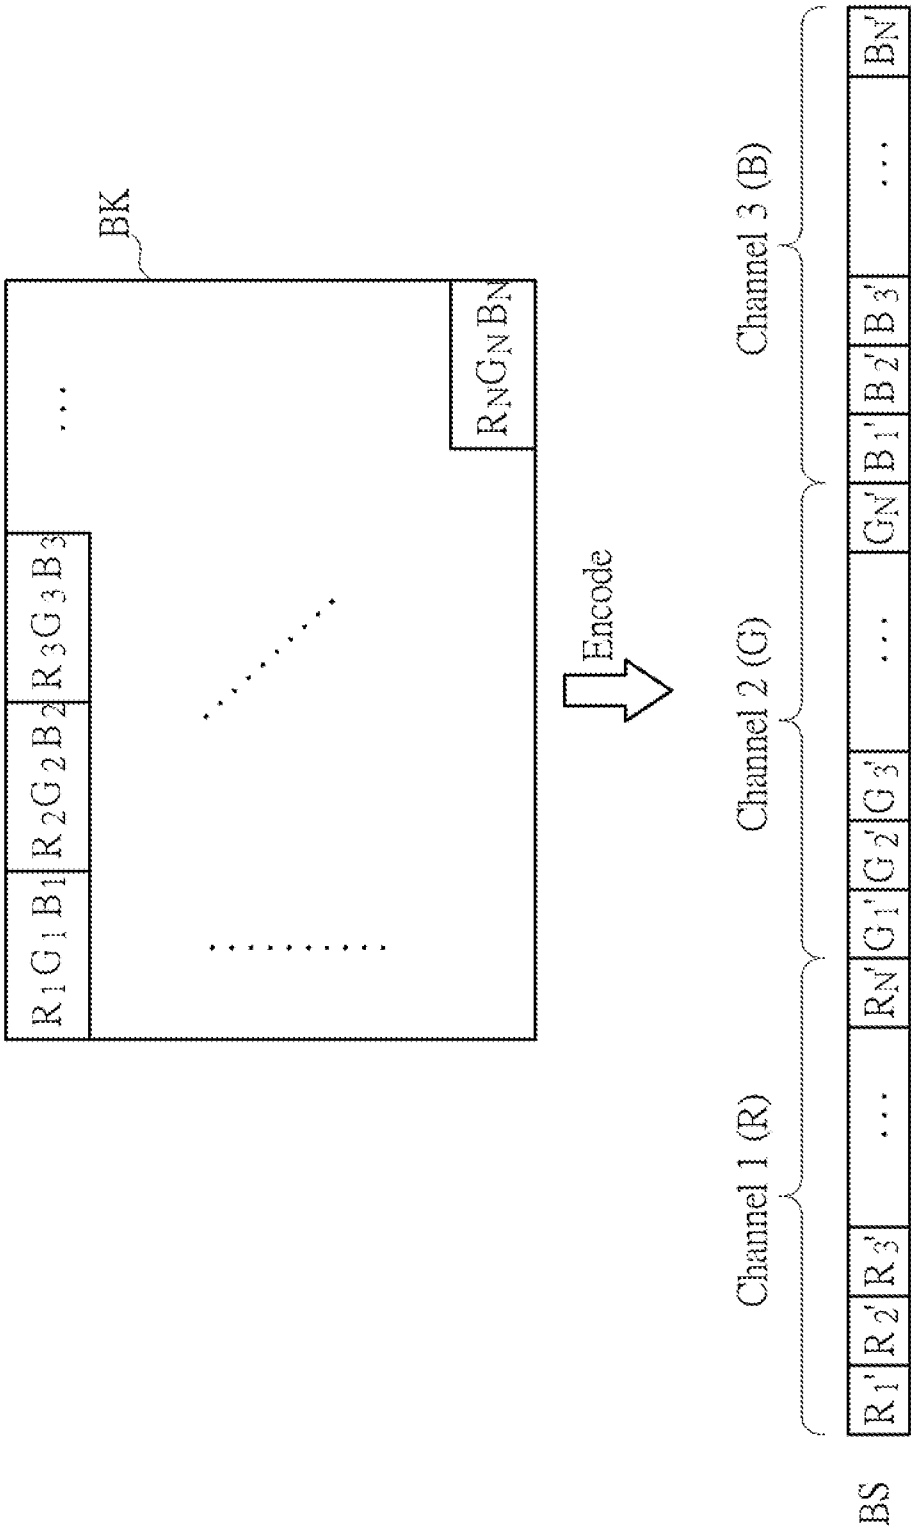


FIG. 1 RELATED ART

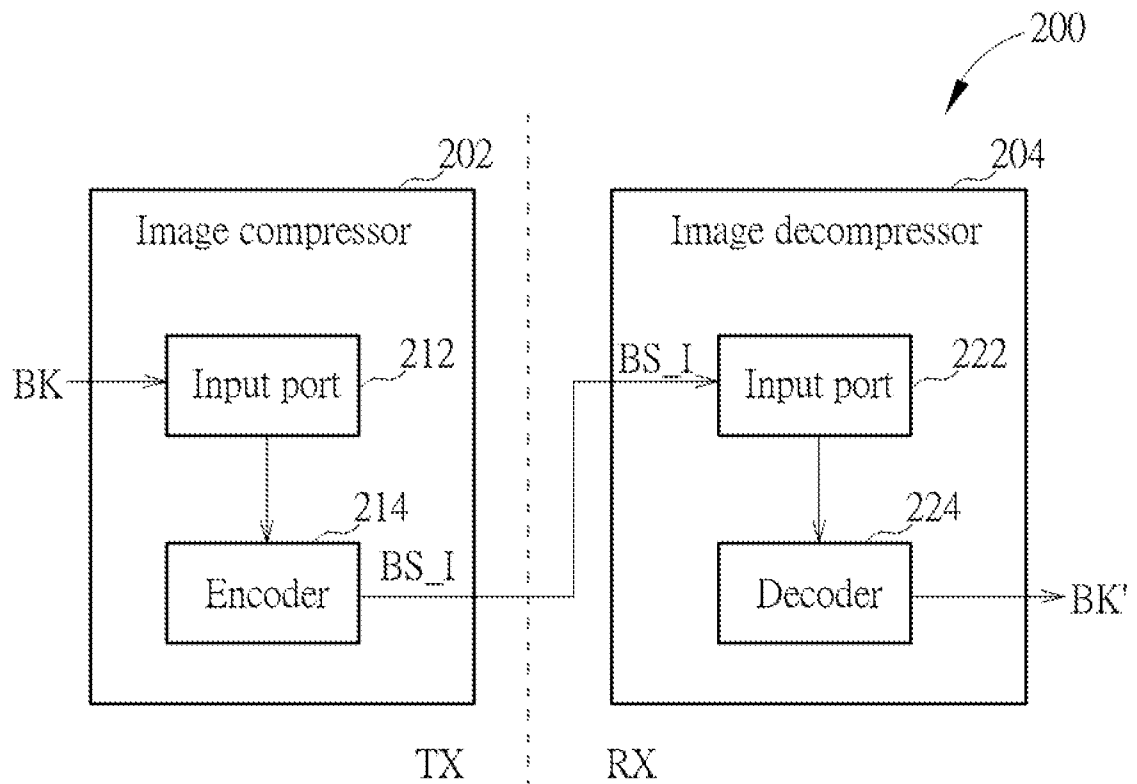


FIG. 2

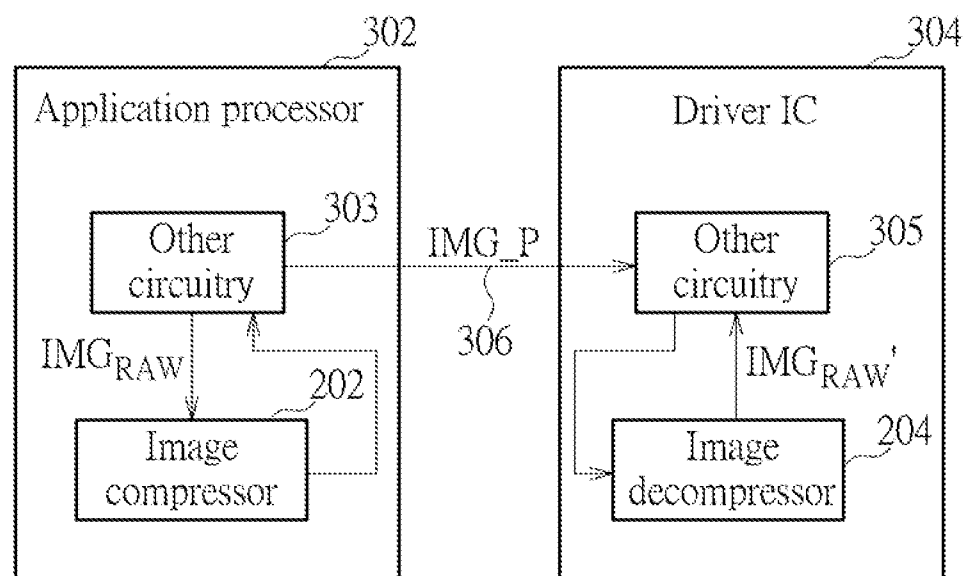


FIG. 3

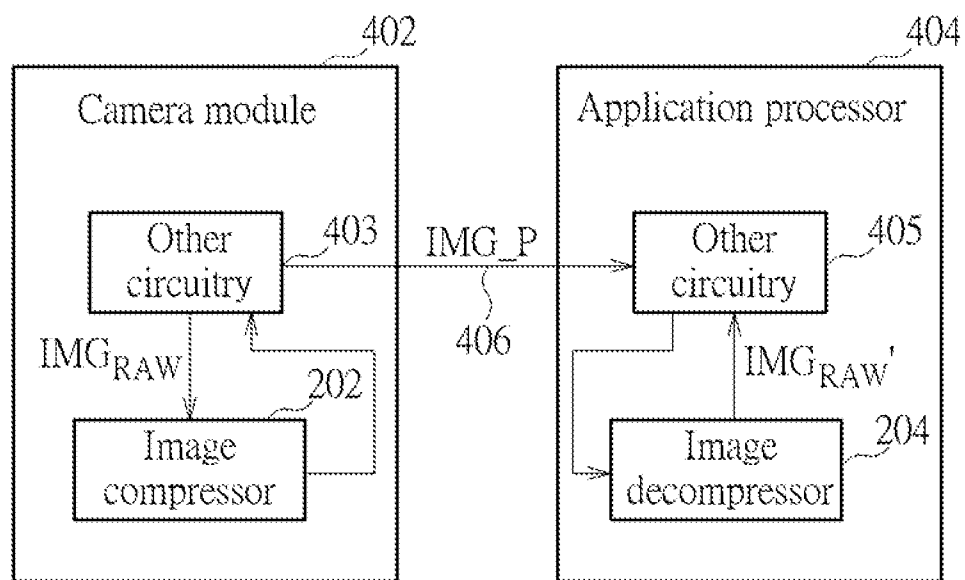


FIG. 4

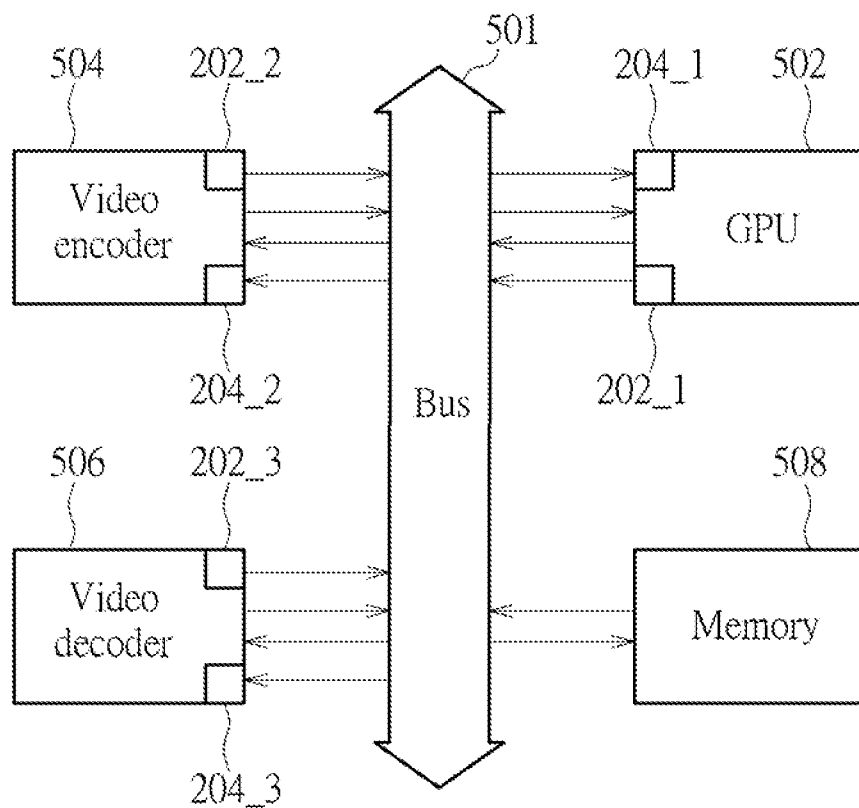


FIG. 5

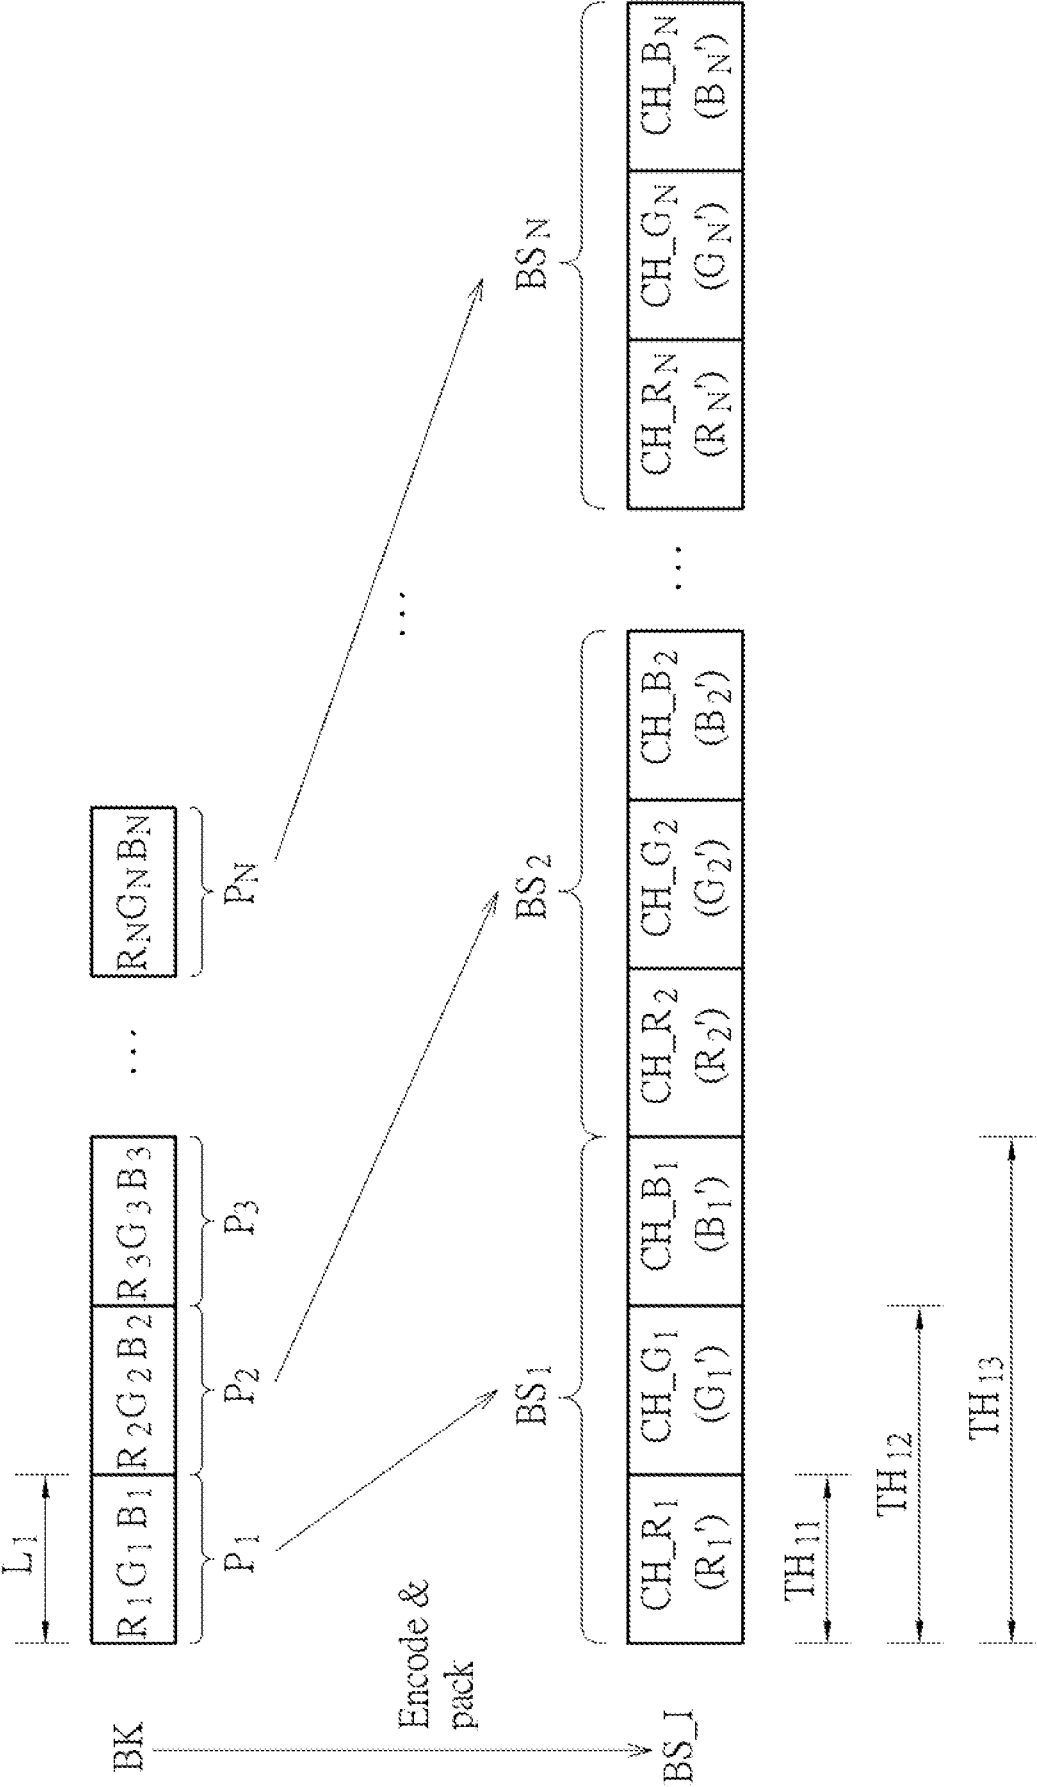


FIG. 6

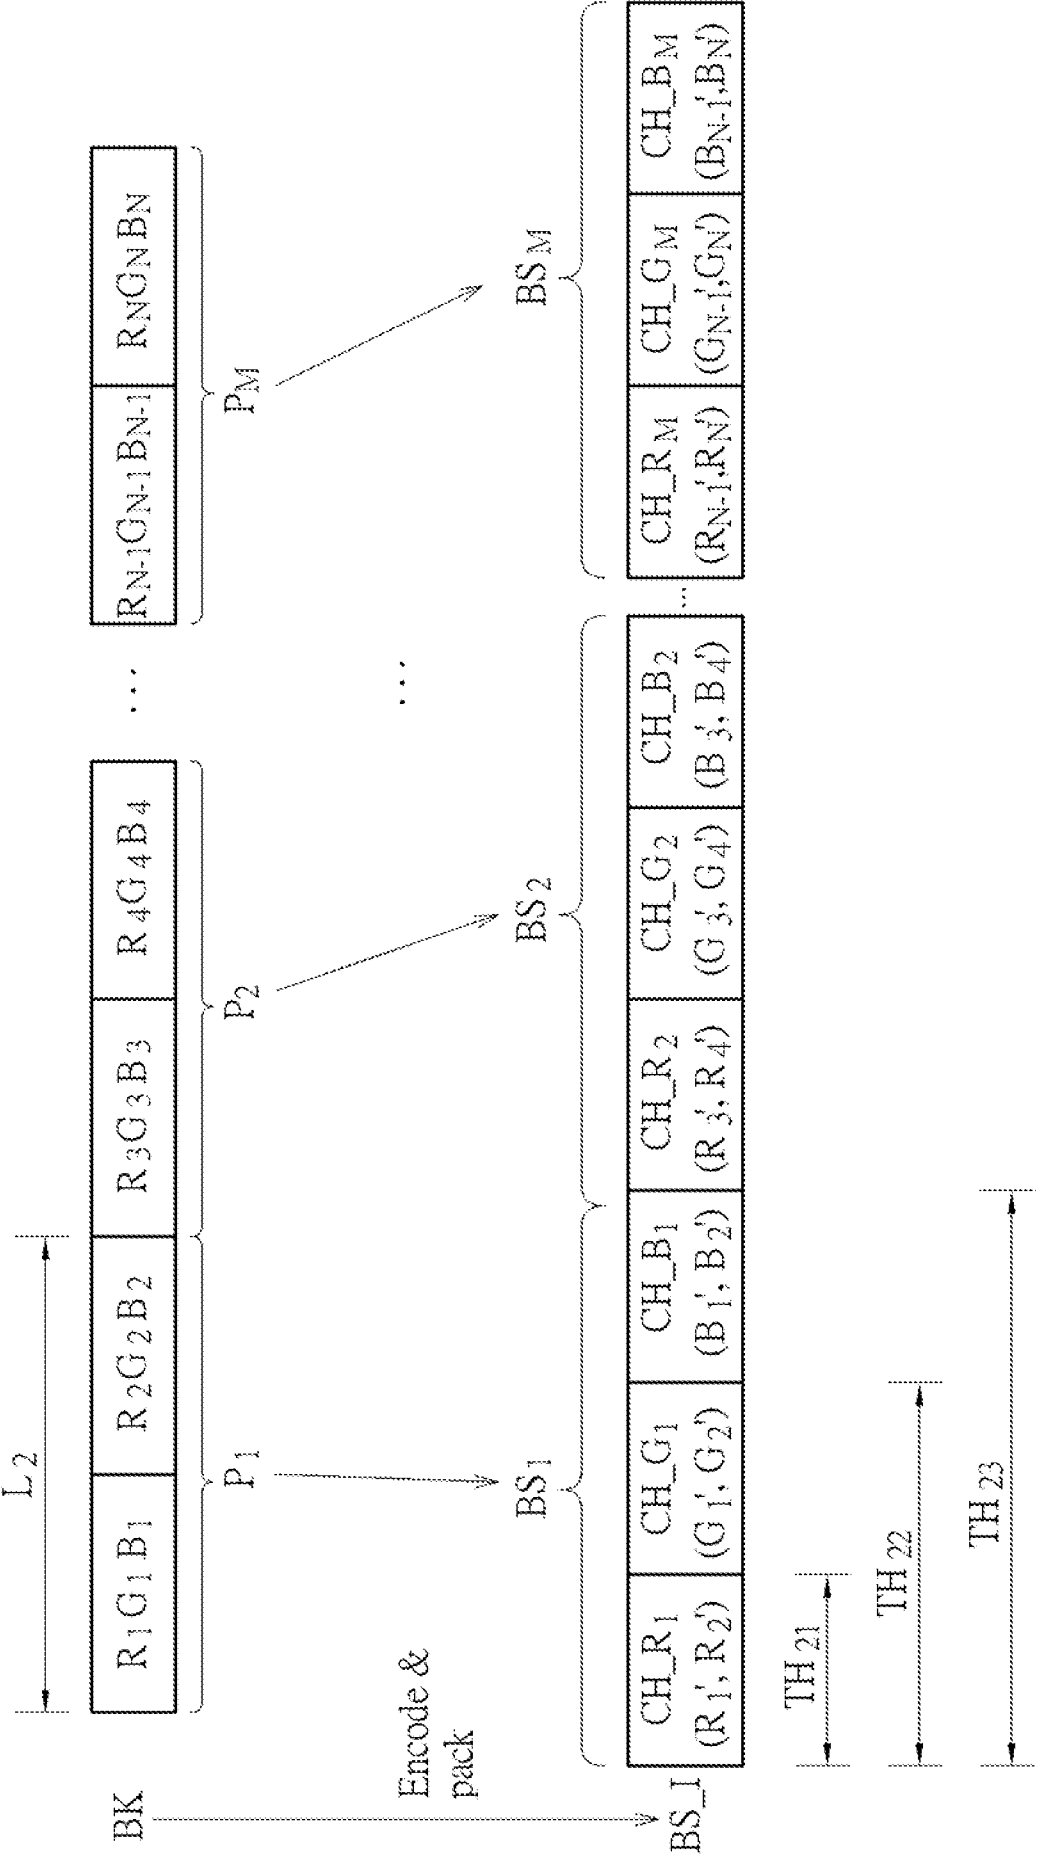


FIG. 7

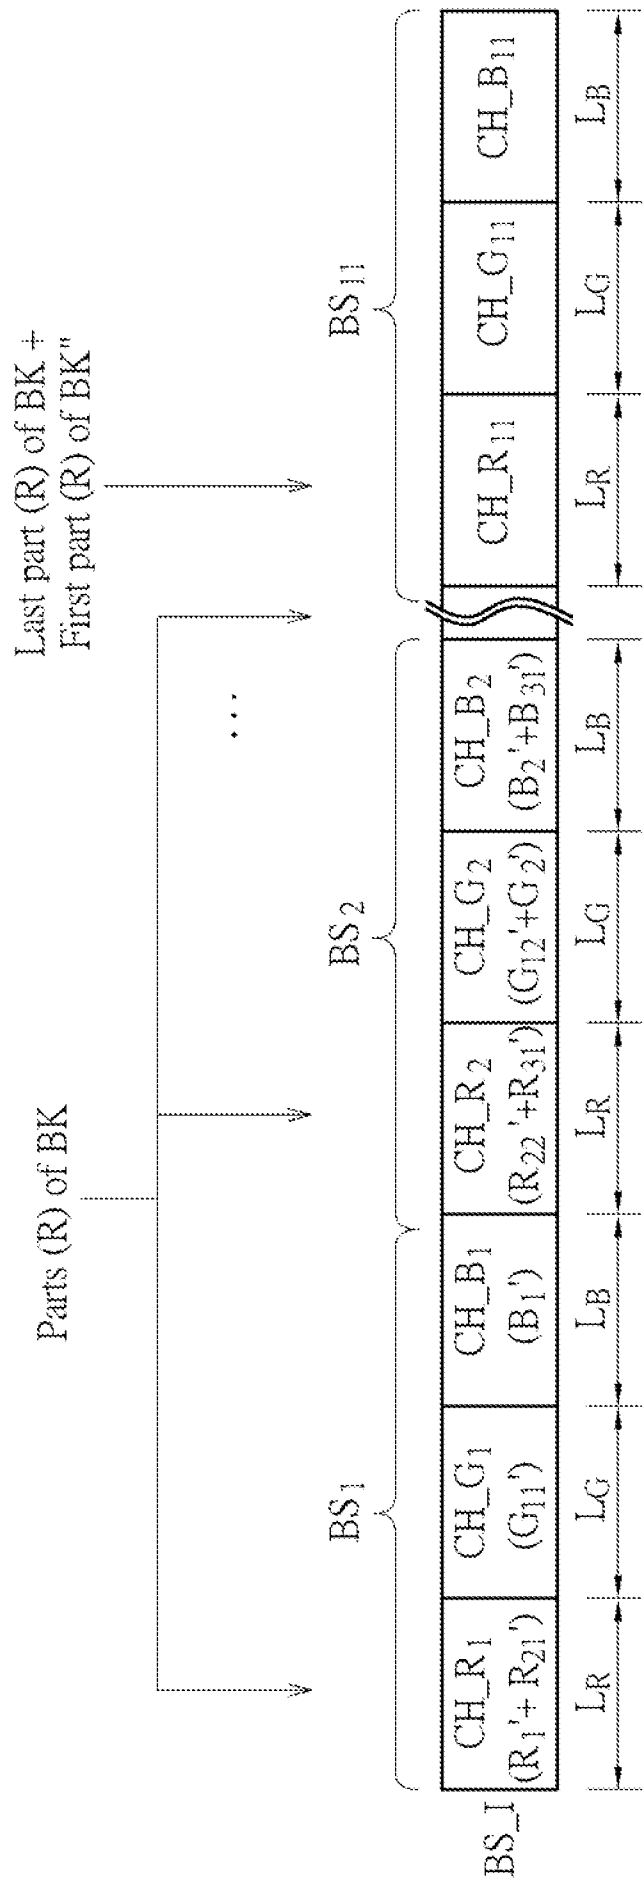


FIG. 8

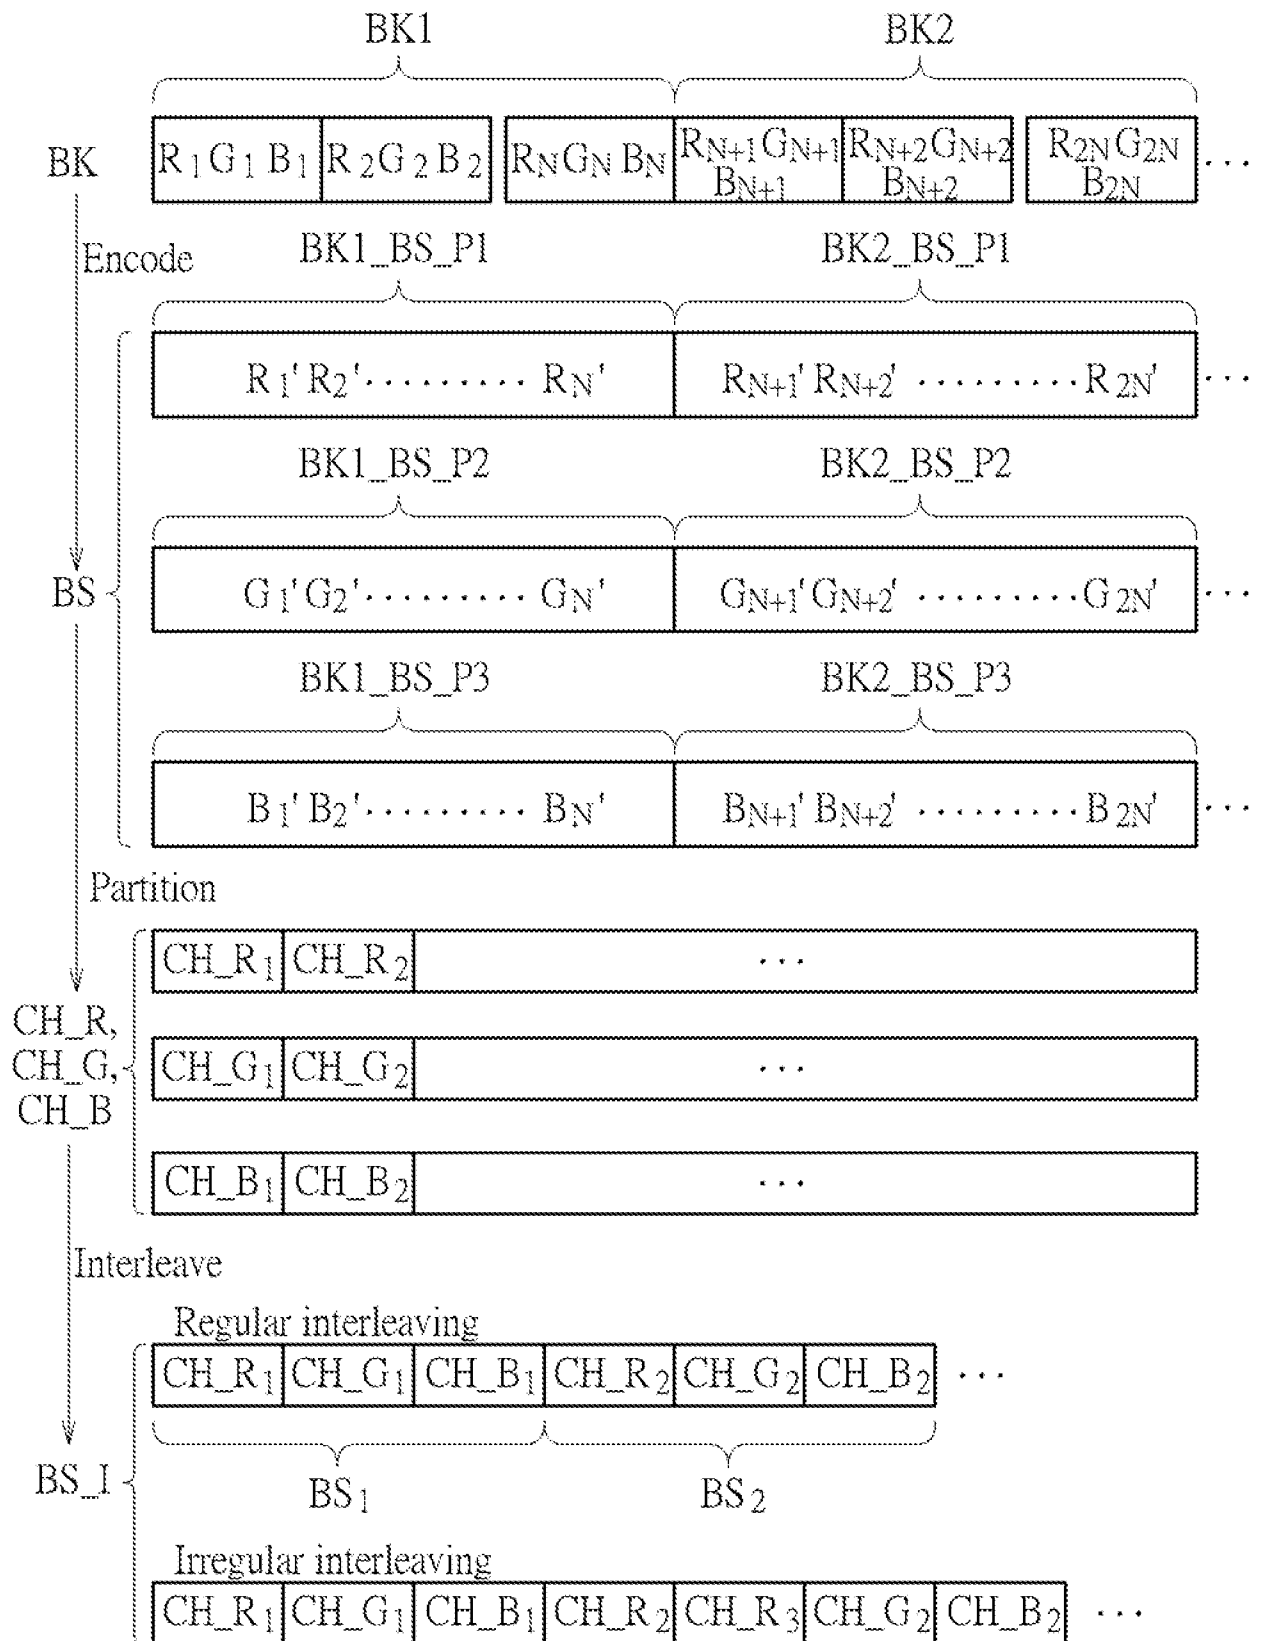


FIG. 9

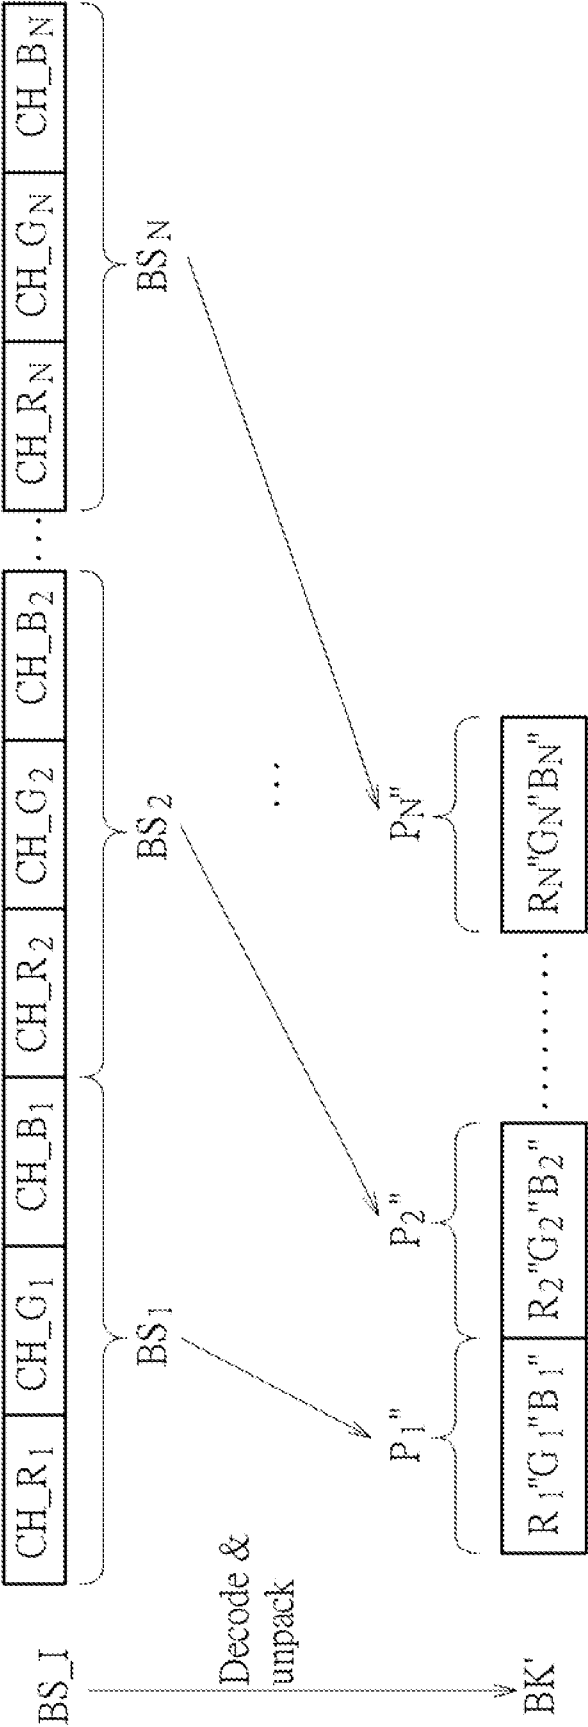


FIG. 10

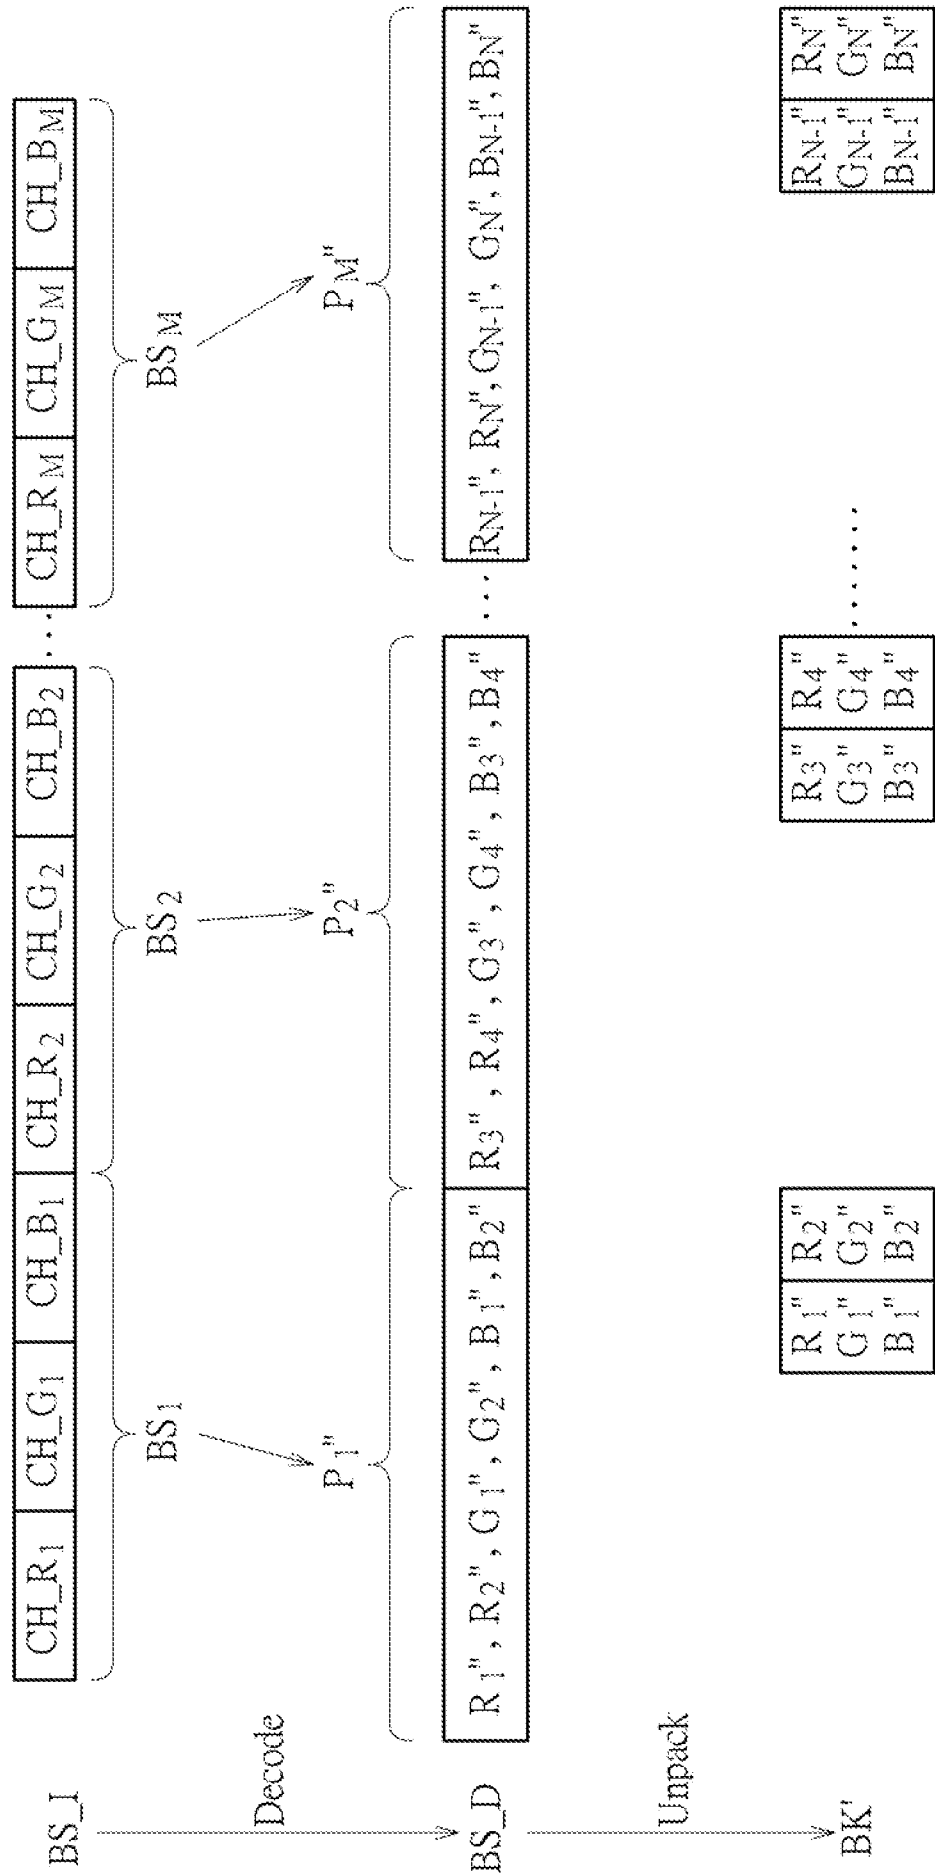


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/085144

A. CLASSIFICATION OF SUBJECT MATTER

H04N 19/186 (2014.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04N 7/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, WPI, EPODOC, CNKI: color, channel?, component?, encod+, compress+, image, video, pixel, bit w stream, size, length, same

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/0123737 A1 (MITSUBISHI ELECTRIC CORPORATION) 29 May 2008 (29.05.2008) description, paragraphs [0078] to [0119], [0167] to [0183], and figures 3, 11, 12(b) and 15	1-24,39-40
X	US 2009/0322713 A1 (NEC ELECTRONICS CORPORATION) 31 December 2009 (31.12.2009) description, paragraphs [0055], [0062] to [0071], [0127] to [0132], and figures 1 and 7	25-38,41-42
A	CN 101123727 A (CHINESE ACAD. SCI. INST. COMPUTING TECHNOLOGY) 13 February 2008 (13.02.2008) the whole document	1-42

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“A” document defining the general state of the art which is not considered to be of particular relevance	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“E” earlier application or patent but published on or after the international filing date	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“L” document which may throw doubts on priority claim (S) or which is cited to establish the publication date of another citation or other special reason (as specified)	“&” document member of the same patent family
“O” document referring to an oral disclosure, use, exhibition or other means	
“P” document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 30 December 2013 (30.12.2013)	Date of mailing of the international search report 23 Jan. 2014 (23.01.2014)
Name and mailing address of the ISA/CN The State Intellectual Property Office, the P.R.China 6 Xitucheng Rd., Jimen Bridge, Haidian District, Beijing, China 100088 Facsimile No. 86-10-62019451	Authorized officer LONG Xuanyao Telephone No. (86-10)62413437

INTERNATIONAL SEARCH REPORT**Information on patent family members**

International application No.

PCT/CN2013/085144

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
US 2008/0123737 A1	29.05.2008	WO2007/034601 A1	29.03.2007
		CA 2710354 A1	29.03.2007
		CA 2623297 A1	29.03.2007
		KR 20080040740 A	08.05.2008
		US 2008/0123972 A1	29.05.2008
		US 2008/0123736 A1	29.05.2008
		EP 1928184 A1	04.06.2008
		US 2008/0130740 A1	05.06.2008
		US 2008/0130756 A1	05.06.2008
		US 2008/0137731 A1	12.06.2008
		US 2008/0137732 A1	12.06.2008
		CN 101218831 A	09.07.2008
		US 2009/0080534 A1	26.03.2009
		RU 2008115481 A	27.10.2009
		KR 20100018083 A	16.02.2010
		CN 101697592 A	21.04.2010
		CN 101707715 A	12.05.2010
		CN 101707713 A	12.05.2010
		CN 101707712 A	12.05.2010
		JP 2010110007 A	13.05.2010
		CN 101783942 A	21.07.2010
		CN 101783943 A	21.07.2010
		KR 20100097232 A	02.09.2010
		EP 2228995 A2	15.09.2010
		EP 2228994 A2	15.09.2010
		EP 2228997 A2	15.09.2010
		EP 2228996 A2	15.09.2010
		CN 101867819 A	20.10.2010
		CN 101867820 A	20.10.2010

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CN2013/085144

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
		CN 101931801 A	29.12.2010
		RU 2009138762 A	27.04.2011
		KR 20110056432 A	27.05.2011
		JP 4964595 B2	04.07.2012
		BRPI 0611668 A2	31.07.2012
		RU 2011119121 A	20.11.2012
		INCHENP 200705694 E	28.03.2008
		HK 1143680 A0	07.01.2011
		HK 1143681 A0	07.01.2011
		HK 1143684 A0	07.01.2011
		HK 1143685 A0	07.01.2011
		IN 254067 B	21.09.2012
		CN 101620842 A	06.01.2010
		JP 2010011386 A	14.01.2010
US 2009/0322713 A1	31.12.2009	US 2011/0148844 A1	23.06.2011
		US 2012/0127188 A1	24.05.2012
		US 2013/0141449 A1	06.06.2013
CN 101123727 A	13.02.2008	None	