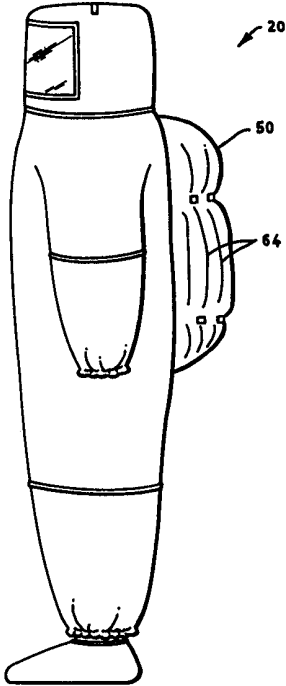


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : A62B 17/00</p>	A1	<p>(11) International Publication Number: WO 99/49938</p> <p>(43) International Publication Date: 7 October 1999 (07.10.99)</p>		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(21) International Application Number: PCT/US99/05882</p> <p>(22) International Filing Date: 17 March 1999 (17.03.99)</p> <p>(30) Priority Data: 09/052,779 31 March 1998 (31.03.98) US</p> <p>(71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).</p> <p>(72) Inventors: WELCHEL, Debra, Nell; 1350 Chatley Way, Woodstock, GA 30188 (US). GRAY, Vivian; 3600 Wynterling Trail, Marietta, GA 30068 (US). WRIGHT, Alan, Edward; 4142 Country Manor Court, Woodstock, GA 30188 (US).</p> <p>(74) Agents: KLEMBUS, Nancy, M. et al.; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).</p> </td> <td style="width: 50%; vertical-align: top; padding: 5px;"> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p> </td> </tr> </table>			<p>(21) International Application Number: PCT/US99/05882</p> <p>(22) International Filing Date: 17 March 1999 (17.03.99)</p> <p>(30) Priority Data: 09/052,779 31 March 1998 (31.03.98) US</p> <p>(71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).</p> <p>(72) Inventors: WELCHEL, Debra, Nell; 1350 Chatley Way, Woodstock, GA 30188 (US). GRAY, Vivian; 3600 Wynterling Trail, Marietta, GA 30068 (US). WRIGHT, Alan, Edward; 4142 Country Manor Court, Woodstock, GA 30188 (US).</p> <p>(74) Agents: KLEMBUS, Nancy, M. et al.; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(21) International Application Number: PCT/US99/05882</p> <p>(22) International Filing Date: 17 March 1999 (17.03.99)</p> <p>(30) Priority Data: 09/052,779 31 March 1998 (31.03.98) US</p> <p>(71) Applicant: KIMBERLY-CLARK WORLDWIDE, INC. [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).</p> <p>(72) Inventors: WELCHEL, Debra, Nell; 1350 Chatley Way, Woodstock, GA 30188 (US). GRAY, Vivian; 3600 Wynterling Trail, Marietta, GA 30068 (US). WRIGHT, Alan, Edward; 4142 Country Manor Court, Woodstock, GA 30188 (US).</p> <p>(74) Agents: KLEMBUS, Nancy, M. et al.; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>			
<p>(54) Title: CONFORMABLE BACKPACK FOR ENCAPSULATED CHEMICAL PROTECTION SUIT</p>				
<p>(57) Abstract</p> <p>The present invention is directed toward protective garments having a conformable backpack portion located on a back area of the garment, the conformable backpack portion being adapted to conform to equipment worn on a back of a wearer of the protective garment.</p>				
				

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

CONFORMABLE BACKPACK FOR ENCAPSULATED CHEMICAL PROTECTION SUIT

FIELD OF THE INVENTION

The field of the present invention is that of protective apparel.

BACKGROUND OF THE INVENTION

There are many types of limited use or disposable protective garments and apparel designed to provide barrier properties. One type of protective garment is protective coveralls. Coveralls can be used to effectively seal off a wearer from a harmful environment in ways that open or cloak style garments such as, for example, drapes, gowns, shirts, pants and the like are unable to do. Accordingly, coveralls have many applications where isolation of a wearer from a work environment is desirable. For example, it may be desirable to isolate a worker from a hazardous environment. As another example, it may be desirable to isolate an environment (e.g., a clean room) from a worker.

For a variety of reasons, it is desirable for protective garments to be manufactured from materials which prevent or significantly retard the passage of hazardous liquids and/or pathogens therethrough. It is also desirable for the protective apparel to isolate persons from dusts, powders, and other particulates which may be present in a work place or accident site. Generally speaking, protective apparel rely on the barrier properties of the fabrics used in their construction. Some of these fabrics may even have received treatments to enhance barrier properties.

Barrier performance of protective apparel also depends on the design and construction of the garment. Apparel containing many seams may be unsatisfactory, especially if the seams are located in positions where they may be subjected to stress and/or direct contact with hazardous substances. Seams located at the front of apparel are particularly susceptible to stress and/or direct contact with hazardous substances. For example, seams that join sleeves or legs to the body portion of protective coveralls are often subjected to stress. Moreover, sleeve seams in the front of coveralls and seams

about the chest are at locations of frequent accidental splashing, spraying and/or other exposures.

After use, it can be costly to decontaminate protective apparel that has been exposed to hazardous substances. Thus, there exists a need in the art for protective apparel which is more easily decontaminated. Protective apparel (garments) must be worn correctly to reduce the chance of exposure. Workers are more likely to wear protective garments (e.g., protective coveralls) properly if the garments are comfortable. One way to increase comfort is to have the garment fit well. A protective garment that fits well also is advantageous in that, when the wearer is working in a confined space, generally speaking, the better fitting the protective garment, the less likely it is that the protective garment will be inadvertently torn, punctured or get "hung up on" the worker's surroundings. This is so because a good fitting protective garment will tend to conform more closely to the wearer's body. Accordingly, if the wearer stays clear of surrounding projections etc., as is the natural tendency, the likelihood of the protective garment contacting projections etc. will be decreased.

One of the problems associated with achieving a satisfactory fit in those protective garments which totally enclose the wearer is the fact that the wearer of the garment, because s/he is totally enclosed by the garment, needs to wear equipment, such as life support air tanks, on his/her back. Accordingly, in such instances, the protective garment must also enclose this equipment. Past protective garment designs have attempted to address this problem by incorporating a backpack onto the back area of the garment. This backpack may be envisioned as joining a bag-shaped appendage about an opening located in the back area of the garment with the opening and the bag being shaped to receive equipment such as, for example, life support equipment.

While these prior backpack containing protective garments have been marketed and sold, they are not without problems. One problem is that their backpacks do not possess any viable mechanism by which they tend to conform to the equipment. That is, there is no mechanism urging a tight, yet comfortable, fit. Accordingly, the bag portion of these backpacks tends to hang down in a crumpled or multi-folded manner. The downward hanging of these packs creates its own problems in that the bag portion of the backpack has a greater tendency to hang-up on or get snagged by objects in the work area. Naturally, this situation is not desirable in that it may well lead to the garment being ripped or torn and thus compromised. Another problem associated with this type of backpack on protective garments is the fact that the many folds in the bag portion of the garment tend to retain contaminants from the work area. This makes decontamination of

the garment when the wearer wishes to exit it more difficult, time consuming and thus, more frustrating.

Thus, a need exists for an inexpensive protective garment with attached backpack which provides a better fit, is more comfortable to wear, reduces the tendency of the backpack to snag and/or which reduces the degree of retention of contaminants retained within the folds of the backpack.

OBJECTS OF THE INVENTION

Accordingly, it is a general object of the present invention to provide protective apparel which has the ability to enclose equipment such as life support equipment worn on the back of the wearer of the apparel.

Another object of the present invention is to provide protective apparel which has the ability to enclose life support equipment worn on the back of the wearer of the apparel which is comfortable.

Yet another object of the present invention is to provide protective apparel where the portion of the apparel which is designed to enclose life support equipment worn on the back of the wearer has the ability to conform to the life support equipment.

Still further objects and the broad scope of applicability of the present invention will become apparent to those of skill in the art from the details given hereinafter. However, it should be understood that the detailed description of the presently preferred embodiment of the invention disclosed herein is given only by way of illustration. Various changes and modifications which are well within the spirit and scope of the present invention will become apparent to those of skill in the art in view of the following description.

DEFINITIONS

As used herein, the term "nonwoven web" refers to a web that has a structure of individual fibers or filaments which are interlaid, but not in an identifiable repeating manner. Nonwoven webs have been, in the past, formed by a variety of processes known to those skilled in the art such as, for example, meltblowing, spunbonding and bonded carded web processes.

As used herein, the term "spunbonded web" refers to a web of small diameter fibers and/or filaments which are formed by extruding a molten thermoplastic material as filaments from a plurality of fine, usually circular, capillaries in a spinnerette with the diameter of the extruded filaments then being rapidly reduced, for example, by non-eductive or eductive

fluid-drawing or other well known spunbonding mechanisms. The production of spunbonded nonwoven webs is illustrated in patents such as Appel, et al., U.S. Patent No. 4,340,563; Dorschner et al., U.S. Patent No. 3,692,618; Kinney, U.S. Patent Nos. 3,338,992 and 3,341,394; Levy, U.S. Patent No. 3,276,944; Peterson, U.S. Patent No. 3,502,538; Hartman, U.S. Patent No. 3,502,763; Dobo et al., U.S. Patent No. 3,542,615; and Harmon, Canadian Patent No. 803,714.

As used herein, the term "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into a high-velocity gas (e.g. air) stream which attenuates the filaments of molten thermoplastic material to reduce their diameters, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high-velocity gas stream and are deposited on a collecting surface to form a web of randomly disbursed meltblown fibers. The meltblown process is well-known and is described in various patents and publications, including NRL Report 4364, "Manufacture of Super-Fine Organic Fibers" by V.A. Wendt, E.L. Boone, and C.D. Fluharty; NRL Report 5265, "An Improved Device for the Formation of Super-Fine Thermoplastic Fibers" by K.D. Lawrence, R.T. Lukas, and J.A. Young; and U.S. Patent No. 3,849,241, issued November 19, 1974, to Buntin, et al.

As used herein, the term "sheet" refers to a material that may be a film, nonwoven web, woven fabric or knit fabric.

As used herein, the term "microfibers" means small diameter fibers having an average diameter not greater than about 100 microns, for example, having a diameter of from about 0.5 microns to about 50 microns, or more particularly, microfibers may have an average diameter of from about 4 microns to about 40 microns. Average fiber diameter may be calculated by taking at least ten random measurements of fiber diameters and averaging those measurements.

As used herein, the term "disposable" is not limited to single use articles but also refers to articles that can be discarded if they become soiled or otherwise unusable after only a few uses.

As used herein, particle holdout efficiency refers to the efficiency of a material at preventing the passage of particles of a certain size range through the material. Particle holdout efficiency may be measured by determining the air filter retention of dry particles utilizing tests such as, for example, IBR Test Method No. E-217, Revision G (1/15/91) performed by InterBasic Resources, Inc. of Grass Lake, Michigan. This IBR Test Method determines the air filter retention of particles from approximately 0.1 μm to 100 μm . The test is a single pass challenge test wherein a concentrate suspension of contaminate is injected

into a feed stream toward the test filter. Particle size distribution and number is determined both upstream and downstream of the test filter by an automatic particle counter. The contaminate consists of dry particles, such as a fine or coarse grade of AC Test Dust supplied by A.C. Spark Plug Division of the General Motors Corporation, which are
5 suspended in pure air. Generally speaking, a high particle holdout efficiency is desirable for barrier materials. Desirably, a particle resistant material should have a particle holdout efficiency of at least about 40 percent for particles having a diameter greater than about 0.1 micron.

As used herein, the term "liquid chemical resistance" refers to a fabric having a
10 useful level of resistance to penetration by a liquid through either penetration or permeation. As used herein, penetration is the flow of bulk liquid through the fabric. As used herein, permeation is the process by which a chemical moves through the fabric on a molecular level. Penetration resistance of materials may be measured using ASTM F903, a standard test method that visually determines material barrier performance against liquid chemicals
15 under conditions of continuous contact. In such a test, a fabric swatch is placed into a test cell. The chemical barrier side of the fabric is placed in contact with a test chemical for one hour with part of the contact period performed under pressure. The condition of the fabric on the other (interior) side is periodically monitored to determine if the test chemical is seen penetrating the fabric. Results are expressed as "pass" or "fail". A material passes
20 the test when there is no visual evidence of liquid penetration after the one hour test period. Any visual detection of penetrating liquid during the test period constitutes failing performance. Permeation resistance of materials may be measured by ASTM F739 which provides a standard test method designed to measure the resistance of materials to permeation by liquids and gaseous chemicals under the condition of continuous contact.
25 In the test, a fabric swatch divides a test cell into two different chambers. A first chamber is filled with the chemical being tested. A collection gas or liquid is used in a second chamber in combination with an analytical instrument to detect chemical molecules permeating into the second chamber through the fabric. The results of the test are expressed by a permeation rate which is the maximum rate at which the permeating
30 chemical passed through the fabric as measured by the analyzer. The permeation rate is reported as micrograms per square centimeter of fabric per minute. Additionally, a Normalized Breakthrough Time ("NBT") may be reported, the NBT being the elapsed time (reported in minutes) measured from the start of the test to the time the permeating chemical reaches a permeation rate of 0.1 $\mu\text{g}/\text{cm}^2\text{min}$.

As used herein, the term "polymer" generally includes, but is not limited to, homopolymers, copolymers, such as, for example, block, graft, random and alternating copolymers, terpolymers, etc. and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term "polymer" shall include all possible geometrical configurations of the material. These configurations include, but are not limited to, isotactic, syndiotactic and random symmetries.

As used herein and in the claims, the term "elastic" means any material which, upon application of a biasing force, is stretchable, that is, elongatable, to a stretched biased length which is at least twenty-five percent (25%) greater than its relaxed, unbiased length, and which will recover at least a portion of its elongation upon release of the biasing force. A composite elastic material may include two or more layers. As used herein, the term "nonelastic" refers to any material which does not fall within the definition of elastic.

The term "recover" refers to a contraction of a stretched or elongated material upon termination of a biasing force following stretching of the material from some initial measurement by application of the biasing force. For example, if a material having a relaxed, unbiased length of one (1) centimeter is elongated fifty percent (50%) by stretching to a length of one-and-one-half centimeters, the material is elongated fifty percent (50%) and has a stretched length that is one hundred and fifty percent (150%) of its relaxed length. If this stretched material contracts, that is, recovers to a length of one-and-one-tenth (1.1) centimeters after release of the biasing and stretching force, the material has recovered eighty percent (80%), or 0.4 centimeters of its one-half (0.5) centimeter elongation. Percent recovery may be expressed as $[(\text{maximum stretch length} - \text{final sample length}) / (\text{maximum stretch length} - \text{initial sample length})] \times 100$.

The term "gather" as used herein means to draw into folds, tucks, puckers, loops or the like. The term "gatherable web" refers to a web which can be gathered into folds, tucks, puckers or the like by contraction of the web.

As used herein the term "generally vertical" refers to a configuration which an ordinary observer would consider to be vertical. With respect to the present invention, the wearer of the protective suit's backbone would be the reference point for any determination of verticality.

As used herein, any given range is intended to include any and all lesser included ranges. For example, a range of from 45-90 would also include 50-90; 45-80; 46-89 and the like.

As used herein, the term "consisting essentially of" does not exclude the presence of additional materials which do not significantly affect the desired characteristics of a given composition or product. Exemplary materials of this sort would include, without limitation, pigments, antioxidants, stabilizers, surfactants, waxes, flow promoters, particulates or materials added to enhance processability of a composition.

SUMMARY OF THE INVENTION

In response to the foregoing challenges which have been experienced by those of skill in the protective apparel art, the present invention is directed toward a protective garment having a conformable backpack portion located on a back area of the garment, the conformable backpack portion being adapted to conform to equipment worn on a back of a wearer of the protective garment. The conformable backpack portion may include an outer protective layer which is gathered. A plurality of elastic members may be connected to the outer protective layer so that the outer protective layer is drawn toward and conforms to the equipment worn by the wearer. The elastic members may be connected to an interior surface of the outer protective layer of the backpack portion by a variety of ways. For example, at least one loop may be mounted to the interior surface of the outer protective layer, the elastic member being slidably received within the loop. A plurality of loops may be utilized, the elastic member being slidably received within at least one of the loops. The elastic member may be attached to or about at least one of the loops.

In another embodiment, a drawstring which is slidably connected to the outer protective layer gathers the outer protective layer. In a particular embodiment, at least one loop is mounted to the interior surface of the outer protective layer, the drawstring being slidably received within the loop. In another embodiment, a plurality of loops are utilized. The drawstring may also be attached to or about at least one of the loops.

In one embodiment, a channel is connected to the interior surface of the outer protective layer of the backpack portion. The channel may be formed in or attached to the interior surface of the outer protective layer, the drawstring or elastic member being slidably received within at least a portion of the channel. The drawstring or elastic member may be secured at one or more locations to the channel or outer protective layer.

In yet another embodiment, the outer protective layer is elasticized so that it conforms to the equipment worn by the wearer. In one embodiment, an elastic web may be connected to the interior surface of the outer protective layer while the elastic web is in a stretched condition so that, when the elastic web is relaxed, the outer protective layer is

gathered. The elastic web may be connected to the interior surface by adhesive bonding or other similar attachment method.

In still another embodiment, the backpack portion further includes a bottom portion, the bottom portion having a contaminate runoff angle of from greater than 0 to 90 degrees. In selected embodiments, the contaminate runoff angle may be from greater than 0 degrees to less than 90 degrees. In other selected embodiments, the contaminate runoff angle may be from about 30 degrees to about 60 degrees. In yet other selected embodiments, the contaminate runoff angle may be about 45 degrees. The bottom portion may include an upwardly concave arc.

Other objects, advantages and applications of the present invention will be made clear by the following detailed description of a preferred embodiment of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a front view of a protective garment.

Figure 2 is a rear view of a protective garment according to the present invention.

Figure 3 is an interior view of one embodiment of the backpack portion of the protective garment according to the present invention.

Figure 4 is a partial interior view of an alternate embodiment of the backpack portion.

Figure 5 is a partial perspective view of the interior of the backpack portion depicting a loop and the outer protective layer.

Figure 6 is a partial perspective view of the interior of another embodiment of the backpack portion depicting a channel formed from the outer protective layer.

Figure 7 is a partial perspective view of the interior of another embodiment of the backpack portion depicting a channel formed on the outer protective layer.

Figure 8 is a side view of one embodiment of the protective garment of the present invention.

Figure 9 is a rear view of yet another embodiment of the protective garment of the present invention.

Figure 10 is a partial perspective view of the interior of the embodiment of the backpack portion depicted Figure 9.

Figure 11 is another partial perspective view of the interior of the embodiment of the backpack portion depicted in Figure 9.

DETAILED DESCRIPTION OF THE INVENTION

Turning now to the drawings where like reference numerals represent like or
5 equivalent structure or process steps, **Figure 1** illustrates a front view of a protective
garment **20**. The protective garment **20** includes a head receiving portion **22** with a view
plate **24**. The protective garment also includes left and right arm receiving portions **26, 28**,
a body receiving portion **30** and left and right leg receiving portions **32, 34**. The protective
garment **20** may include left and right ankle elastic portions or cuffs **36, 38** and left and
10 right wrist elastic portions or cuffs **40, 42** which form a tight fit around the wearer's wrists
and ankles in order to maintain the interior of the protective garment in a non-
contaminated state. In some embodiments, the protective garment **20** may also include
left and right foot or shoe covering portions **44, 46**.

Generally speaking, the seams and points of attachment in the garment **20** may be
15 formed by any suitable means such as, for example, by sewing or stitching, taping,
ultrasonic bonding, solvent welding, adhesives, thermal bonding and the like. The closure
means may be any suitable closure mechanism such as, for example, zippers, button
fasteners, clip fasteners, snap fasteners, hook and loop fasteners, resealable tapes, zip-lock
fasteners, magnetic fasteners and the like. Thus, various portions of the garment may be
20 joined or attached by sewing or stitching, ultrasonic bonding, solvent welding, adhesives,
thermal bonding and similar techniques.

The material used in the construction of the protective garment may be one or more
bonded carded webs, webs of spunbonded filaments, webs of meltblown fibers. The
material may also be one or more knit or woven materials. It is contemplated that the
25 material may be one or more films.

Such material (e.g., nonwoven webs, woven materials, knit materials or films) may
be formed from polymers such as, for example, polyamides, polyolefins, polyesters,
polyvinyl alcohols, polyurethanes, polyvinyl chlorides, polyfluorocarbons, polystyrenes,
caprolactams, poly(ethylene vinyl acetates), ethylene n-butyl acrylates, and cellulosic and
30 acrylic resins. If the nonwoven web is formed from a polyolefin, the polyolefin may be
polyethylene, polypropylene, polybutene, ethylene copolymers, propylene copolymers and
butene copolymers.

Although a wide variety of materials may be utilized in the present invention, a
material which is particularly well suited for the protective garment described herein is a
35 polypropylene spunbonded web having a basis weight of 1.75 ounces per square yard (osy)

and one percent (1%) by weight of titanium dioxide, the polypropylene web being laminated to a single layer of SARANEX® 23P film which is manufactured by the Dow Chemical Corporation. Such a material is a lightweight durable fabric which provides effective resistance to a broad range of liquid and dry particulate chemicals. Such a material is
5 utilized by the assignee of record, the Kimberly-Clark Corporation of Neenah, Wisconsin, in disposable clothing manufactured under the HAZARD-GARD® mark.

Figure 2 is a rear view of the protective garment **20** of **Figure 1**, which illustrates that the protective garment **20** may be entered from the rear through the use of a zipper **48**. **Figure 2** also illustrates that the protective garment **20** has been provided with a
10 backpack **50** which has the ability to variably adapt to conform to a variety of types of equipment (not shown) carried on the back of the wearer. The backpack **50** has outer edges **52**, **54** and an outer protective layer **56**.

In the embodiment depicted in **Figure 2**, the backpack **50** begins or has a top or upward termination edge or line **58** where the helmet or head receiving portion **22** ends.
15 Desirably, this upward edge or line **58** forms an upwardly facing concavity. This configuration allows ease of transition from the base of the generally circular helmet or head receiving portion **22** and makes it easier for the wearer to turn his/her head back and forth. Naturally, other embodiments where the upward termination edge **58** of the backpack **50** is straight or otherwise variously formed are contemplated.

The backpack **50** terminates at a bottom edge **60** with a seal or seam that is generally perpendicular (90 degrees) to the generally vertical outer edges **52**, **54** of the backpack **50**. The angle formed by one of the outer edges **52**, **54** and the bottom edge **60** is referred to herein as the contaminate runoff angle and is denoted in **Figures 2** and **9** at **62**. The contaminate runoff angle **62** depicted in **Figure 2** is approximately 90°. Typical
25 backpack **50** lengths, as measured at the midpoint of the backpack between the two outer edges **52**, **54** from the upward termination edge **58** to the bottom edge **60**, would range from about 62 to about 88 cm (about 25 to about 35 inches). One desirable length is about 79 cm (about 31.5 inches).

Figure 2 shows gathers **64** formed in the outer protective layer **56** of the backpack
30 **50**. The gathers **64** may be formed by a variety of means and in a variety of patterns. For example, the gathers **64** may be formed along the entire length and width of the backpack. Alternately, selected portions of the backpack may be gathered, such as, for example, an upper portion and/or a lower portion of the backpack.

One way of forming gathers **64** in the backpack **50** is depicted in **Figure 3**, which
35 shows an interior view of the ungathered backpack portion **50** of the garment. As shown

therein, a plurality of loops **66** are attached to the interior surface **68** of the outer protective layer **56**. The loops **66** are preferably formed of a strap of material and attached to the interior surface **68** by any of a variety of attachment means, such as sewing or stitching, taping, ultrasonic bonding, solvent welding, adhesives, thermal bonding and the like. The loops **66** may be formed in any of a number of ways, including folding the strap in half so that the edges are aligned with each other, or forming the strap into a circle so that the ends of the strap meet or overlap.

As shown in **Figure 3**, a drawstring **70** having ends **72** and **74** is slidably received within at least one of the loops **66**. In a particular embodiment, the end **74** of the drawstring **70** is secured to the protective garment **20**. As depicted in **Figure 3**, end **74** is secured to the loop **66** which is positioned proximate to the edge **52** by sewing, taping, bonding or other similar attachment method. Alternately, end **74** may be attached directly to the interior surface **68** of the outer protective layer **56**.

After the wearer has entered the protective garment **20**, the end **72** of the drawstring **70** may be pulled, thereby gathering the outer protective layer **56** and conforming the backpack **50** to the equipment worn by the wearer.

Once the drawstring **70** has been pulled to a length sufficiently short so as to conform the backpack **50** to the equipment, the drawstring **70** may be variously secured in this shortened position. For example, a barrel lock **76**, which is depicted in **Figure 3** may be used to secure the drawstring **70** in its shortened position. The barrel lock **76** may be formed from a cylindrical inner portion which is slidably received within at least a portion of a cylindrical outer portion. An aperture is formed in both cylindrical portions, the cylindrical portions being biased with respect to one another so that an aperture in the inner cylindrical portion is not fully aligned with the aperture in the outer cylindrical portion. Upon sufficient application of force to the barrel lock **76**, the apertures may be aligned so that the drawstring **70** may be passed through both apertures. Upon release of the force, the cylindrical portions return to their biased positions wherein the sides of the apertures of the cylindrical portions bear on the drawstring **70**, securing the barrel lock **76** onto the drawstring **70** in a particular location. The barrel lock **76** is sized so as to be sufficiently large with respect to the loop **66** so that the barrel lock **76** cannot slide through the loop **66**, thereby preventing the drawstring **70** from withdrawing through the loops. Alternately, the drawstring **70** may be retained within the loops **66** by simply forming a knot in the drawstring **70**, the knot being appropriately sized so as to prevent the drawstring **70** from sliding through the loop **66**, or tying the drawstring **70** to a loop **66**.

In alternate embodiments, both ends **72, 74** of the drawstring **70** may be pulled to shorten the drawstring and gather the outer protective layer **56**. In such an embodiment, it may be desirable to secure the drawstring **70** to a loop **66** which is positioned centrally with respect to the edges **52, 54** of the backpack **50**.

Figure 4 illustrates another embodiment of the backpack **50** wherein an elastic member **78** is slidably received through at least one of the loops **66**. As the elastic member **78** is threaded through the loops **66**, a biasing force is applied to at least one of the ends of the elastic member **78** so that the elastic member **78** elongates to a stretched, biased length. While the elastic member **78** is in the stretched condition, the ends of the elastic member are secured to or about the loops **66** proximate to the edges **52, 54** through which the elastic member is threaded. As shown in **Figure 4**, the end **82** of the elastic member **78** is secured about the loop **66** positioned proximate to edge **52** and to the elastic member **78** by stitching. The end **82** may be secured to the elastic member **78** by any of a variety of attachment methods, for example the attachment methods mentioned above. Upon release of the biasing force, the elastic member **78** recovers at least a portion of its elongation to gather the outer protective layer **56**. The end **82** of the elastic member **78** may also be attached to the loop **66** or the interior surface of the outer protective layer.

When the wearer enters the protective garment **20**, the elastic member or members **78** elongate, permitting expansion of the gathered outer protective layer **56** to accommodate the equipment worn by the wearer. After the wearer has donned the protective garment **20**, the elastic member or members **78** recover and draw the outer protective layer **56** toward the equipment, thus causing the backpack **50** to conform to the equipment worn by the wearer.

The elastic member **78** may comprise an elastic tape which is elongatable upon application of a biasing force to at least twenty-five percent (25%) of its relaxed unbiased length. For example, elastic tapes having elongations of at least fifty percent (50%), or seventy five percent (75%) or one hundred percent (100%) are also acceptable. Additionally, elastic tapes having a minimum elongation less than twenty-five percent (25%) may also be used. The elastic member **78** will recover at least a portion of its elongation upon release of the biasing force. Such an elastic member may have a recovery of between 10% and 100%, although elastic members having a recovery of less than 10% may be utilized. A latex tape, such as Fulflex 7211, available from Fulflex, Inc. of Middletown, Rhode Island may be utilized. A non-latex tape or other type of elastic

member may also be utilized. A particular embodiment may utilize elastic tapes having a width of between 25 and 38 centimeters, although other widths may be utilized.

In a particular embodiment, at least two elastic members **78** are used to conform the backpack **50** to the equipment, each elastic member **78** being threaded through a set of loops **66**, the elastic members being positioned on the backpack **50** in a spaced apart relation.

Figures 5 and 6 depict two of the many possible configurations for slidably securing the elastic member **78**, the drawstring **70** or another gathering member to the interior surface **68** of the outer protective layer **56**. **Figure 5** depicts a strap of material folded over upon itself to form the loop **66** shown therein, the loop **66** having an attachment area **84** which enables the loop **66** to be attached to the interior surface **68** of the outer protective layer **56**. In alternate embodiments, the loops **66** may be attached to an inner web or layer which may, in turn, be attached to the interior surface **68**. The loop **66** may be attached by ultrasonic, thermal or adhesive bonding, or any of the aforementioned attachment methods.

Alternately, as depicted in **Figure 6**, the drawstring **70**, elastic member **78** or the like may be slidably received within and/or attached to a channel **86**. The channel **86** may be mounted to or integral with the outer protective layer **56**. As shown in **Figure 6**, the channel **86** may be formed by folding the outer protective layer **56** upon itself and adhering surfaces **88** and **90** to each other. In such an embodiment, it may be necessary to form a slit **106** in the outer protective layer **56** so that the drawstring and/or elastic member may be selectively threaded through portions of the channel **86**.

Alternately, as depicted **Figure 7**, the channel **86** may be formed along the interior surface **68** by attaching an section of material **92** thereto. The edges **94**, **96** of the section of material **92** are secured to the interior surface **68**. Thus, a channel **86** is formed which is bounded by the interior surface **68** and the inner surface of the section of material **92**. Various other configurations of the channel **86** are likewise suitable for use in the present invention.

The elastic member **78** may be threaded through the channel **86** and may be secured to the outer protective layer **56** or section of material **92** at an end **82** and/or at several points along the length of the elastic member **78** by any one of the aforementioned attachment methods. Likewise, the drawstring **70** may be secured to the outer protective layer **56** or section of material **92** after being slidably received therein, at, for example, an end **72** or **74**. Additionally, the drawstring **70** may be secured to the outer protective layer or section of material **92** by any of a variety of attachment methods

disclosed herein at one or more points along the length of the drawstring **70**, leaving both ends **72**, **74** of the drawstring **70** free to be pulled and secured in their shortened position by barrel locks **76** or the like. The elastic member **78** or drawstring **70** may be directly attached to the interior surface **68** of the outer protective layer **56** by bonding, taping or other similar method.

Figure 8 illustrates a side view of an alternate embodiment of the present invention, showing the backpack **50** in its gathered position wherein it conforms to equipment worn by the wearer. In the embodiment depicted therein, two drawstrings or elastic members are utilized to urge the backpack to conform to the equipment worn by the wearer, although more than two such drawstrings or elastic members may be utilized.

Although the embodiments depicted herein show the loops, drawstrings, elastic members and channels positioned on an interior surface of the backpack, these elements, as well as other similar mechanisms which may be used to gather the backpack, may be positioned on the exterior surface of the backpack.

In the embodiment depicted in **Figure 9**, the backpack **50** is formed from an elasticized sheet **98** which provides the appropriate level of liquid chemical resistance and also demonstrates sufficient particle holdout efficiency while being expandable to conform to the equipment worn by the wearer.

As shown in **Figures 10** and **11**, the elasticized sheet **98** may be a composite elastic material comprising at least one gatherable, nonelastic web **100** having particle resistance properties, the gatherable web **100** being bonded to at least one elastic web **102**, which may or may not possess particle resistant properties. Composites of elastic and nonelastic material have been made by bonding the nonelastic material to the elastic material while the elastic material is in a stretched condition so that, when the elastic material is relaxed, the nonelastic material gathers or puckers between the locations where it is bonded to the elastic material. The resulting composite elastic material is stretchable to the extent that the nonelastic material gathered between the bond locations allows the elastic material to elongate. Examples of this type of composite materials are disclosed, for example, by U.S. Patent No. 4,720,415 to Vander Wielen et al., issued January 19, 1988 and by U.S. Patent No. 4,918,747 to Morman, issued January 1, 1991.

As shown in **Figures 10** and **11**, the elastic web **102** may be bonded to the gatherable web **100** at a plurality of spaced-apart locations **104** when the elastic web **102** is in an elongated position. As shown in **Figure 11 42**, the gatherable web **100** is gathered between the bonded locations **104** upon relaxation of the elastic web **102**.

The elastic web **102** and the gatherable web **100** may be joined by overlaying the materials and applying heat and/or pressure to the overlaid materials. Alternatively, the layers may be joined by using other bonding methods and materials such as, for example, adhesives, pressure sensitive adhesives, ultrasonic welding, high energy electron beams, and/or lasers. In one aspect of the present invention, the elastic web **102** may be formed directly onto the gatherable web **100** utilizing processes, such as, for example, meltblowing processes and film extrusion processes.

The resultant composite material is itself elastic, its non-elastic layer or layers being able to move with the stretching of the elastic web **102** by reason of the play or give provided by the gathers formed, upon relaxation of the stretched elastic web **102**, in the non-elastic layers to which the nonelastic web or webs are bonded. Additionally, the elastic webs may also exhibit barrier properties such as liquid, particle or vapor resistance.

The original length of the nonelastic, gatherable web limits the attainable elongation of the composite material because the nonelastic web would act as a "stop" to prevent further or excessive stretching of the elastic web under the effect of stretching forces which are less than the failure strength of the nonelastic gathered web. Because the elastic web may be bonded to a non-elastic material, by which is meant generally any suitable material which lacks the characteristics of an elastic as defined above, the nonelastic material tends to have a limiting effect on the degree of stretch and recovery of the elastic web.

The elastic web must be sufficiently strong to enable it to gather the gatherable web or webs to which it is bonded and, generally, the stiffer the gatherable web or webs are, the stronger must be the recovering force of the elastic web or webs bonded thereto.

A wide variety of materials may be employed as the elastic web, such as, for example, the elastic webs disclosed in U.S. Patent No. 5,434,753, which is hereby incorporated by reference. The elastic webs used in this embodiment of the present invention may be stretchable to an elongation of at least about 25 percent of its relaxed length, i.e., can be stretched to at least about one and one quarter times its relaxed length, and, upon release of the stretching force will recover at least a portion of the elongation. Many elastic materials used in the practice of the invention can be stretched to elongations considerably in excess of 25%, although materials with elongations of less than 25% may be utilized.

Alternately, the material used in the present invention can be configured so that up to a significant portion of the elasticity of the material is lost upon application of the

protective suit to a user wearing a backpack. Only a minimal amount of stretchability needs to be retained during use of the garment to keep the fabric of the garment conformed to the backpack. Said another way, only a minimum amount of recovery of the material of the backpack portion is required to keep the backpack portion conformed to the wearer.

Figure 2 illustrates that, in some embodiments, the backpack **50** terminates at the bottom edge **60** with a seal or seam that is generally perpendicular (90 degrees) to the generally vertical outer edges **52**, **54** of the backpack **50**. This configuration is not totally satisfactory in that, during use, contaminants tend to collect at the backpack seam at **60**. This configuration has a 90 degree contaminate runoff angle. The contaminate runoff angle is determined by measuring the angle formed by the outer edges **52**, **54** of the backpack **50**, when the wearer is standing, with the line formed by the lower termination of the backpack **50**. This angle is denoted in **Figures 2** and **9** at **62**. In order to overcome this problem, it has been found to be desirable to angle the lower backpack seam **60** downward as illustrated in **Figure 9**. This permits contaminants which fall in the gathers to run (if liquid) or fall (if solid) out of the bottom area and not collect therein. In other words, to affect runoff, this contaminate runoff angle should be less than 90 degrees. For example, the contaminate runoff angle may vary from between about 30 and 60 degrees. More particularly, the contaminate runoff angle may be about 45 degrees.

While selected embodiments of the present invention have been described herein, other backpack **50** configurations wherein the backpack conforms to the equipment and to the wearer will be readily apparent to those of skill in the art.

While the invention has been described in detail with respect to specific preferred embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily conceive of alterations to and variations of the preferred embodiments. Such alterations and variations are believed to fall within the scope and spirit of the invention and the appended claims.

WHAT IS CLAIMED IS:

1. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion being adapted to conform to equipment worn on a back of a wearer of the protective garment.

2. The protective garment of claim 1, the conformable backpack portion comprising an outer protective layer and means for gathering the outer protective layer.

3. The protective garment of claim 2, the means for gathering the outer protective layer comprising a plurality of elastic members connected to the outer protective layer.

4. The protective garment of claim 2, the means for gathering the outer protective layer comprising a drawstring slidably connected to the outer protective layer.

5. The protective garment of claim 1, the conformable backpack portion being formed of an elasticized outer protective layer.

6. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion comprising an outer protective layer and means for gathering the outer protective layer of the backpack portion.

whereby the backpack portion is adapted to conform to equipment worn on a back of a wearer of the protective garment.

7. The protective garment according to claim 6, wherein the means for gathering comprises at least one elastic member and means for connecting the elastic member to an interior surface of the outer protective layer of the backpack portion.

8. The protective garment according to claim 7, the means for connecting the elastic member to the backpack portion comprising at least one loop mounted to an interior surface of the outer protective layer, the elastic member being slidably received within the loop.

9. The protective garment according to claim 8, the elastic member being attached to at least one loop.

5 10. The protective garment according to claim 6, wherein the means for gathering comprises at least one drawstring and means for connecting the drawstring to an interior surface of the outer protective layer of the backpack portion.

10 11. The protective garment according to claim 10, the means for connecting the drawstring to the interior surface of the outer protective layer comprising at least one loop mounted to the interior surface of the outer protective layer, the drawstring being slidably received within the loop.

15 12. The protective garment according to claim 11, the drawstring being attached to at least one loop.

20 13. The protective garment according to claim 6, the means for gathering comprising a channel connected to an interior surface of the outer protective layer of the backpack portion.

14. The protective garment according to claim 13, the means for gathering further comprising an elastic member passing through at least a portion of the channel.

25 15. The protective garment according to claim 13, the means for gathering further comprising a drawstring passing through at least a portion of the channel.

30 16. The protective garment according to claim 6, the means for gathering the outer protective layer comprising an elastic web connected to an interior surface of the outer protective layer.

17. The protective garment according to claim 16, the elastic web being connected to the interior surface by adhesive bonding.

18. The protective garment according to claim 6, wherein the backpack portion further comprises a bottom portion, the bottom portion comprising a contaminate runoff angle of from greater than 0 to 90 degrees.

5 19. The protective garment according to claim 18, wherein the contaminate runoff angle is from greater than 0 degrees to less than 90 degrees.

20. The protective garment according to claim 18, wherein the contaminate runoff angle is from about 30 degrees to about 60 degrees.

10

21. The protective garment according to claim 18, wherein the contaminate runoff angle is about 45 degrees.

15

22. The protective garment according to claim 6, wherein the backpack portion further comprises a bottom portion, the bottom portion comprising an upward concave arc.

23. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion comprising

20

at least one elastic member, and

a plurality of loops attached to an interior surface of the backpack portion, the elastic member being slidably received through at least one of the loops; and

whereby the backpack portion is adapted to conform to equipment worn on a back of a wearer of the protective garment.

25

24. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion comprising

at least one drawstring, and

30

a plurality of loops attached to an interior surface of the backpack portion, the drawstring being slidably received through at least one of the loops; and

whereby the backpack portion is adapted to conform to equipment worn on a back of a wearer of the protective garment.

25. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion comprising

at least one drawstring having two ends, and

5 a channel connected to an interior surface of the backpack portion, the drawstring being slidably received through at least a portion of the channel so that the ends of the drawstring extend outwardly therefrom; and

whereby the backpack portion is adapted to conform to equipment worn on a back of a wearer of the protective garment.

10

26. A protective garment comprising:

a conformable backpack portion located on a back area of the garment, the conformable backpack portion comprising an elasticized outer protective layer;

whereby the backpack portion is adapted to conform to equipment worn on a back of a wearer of the protective garment.

15

1 / 8

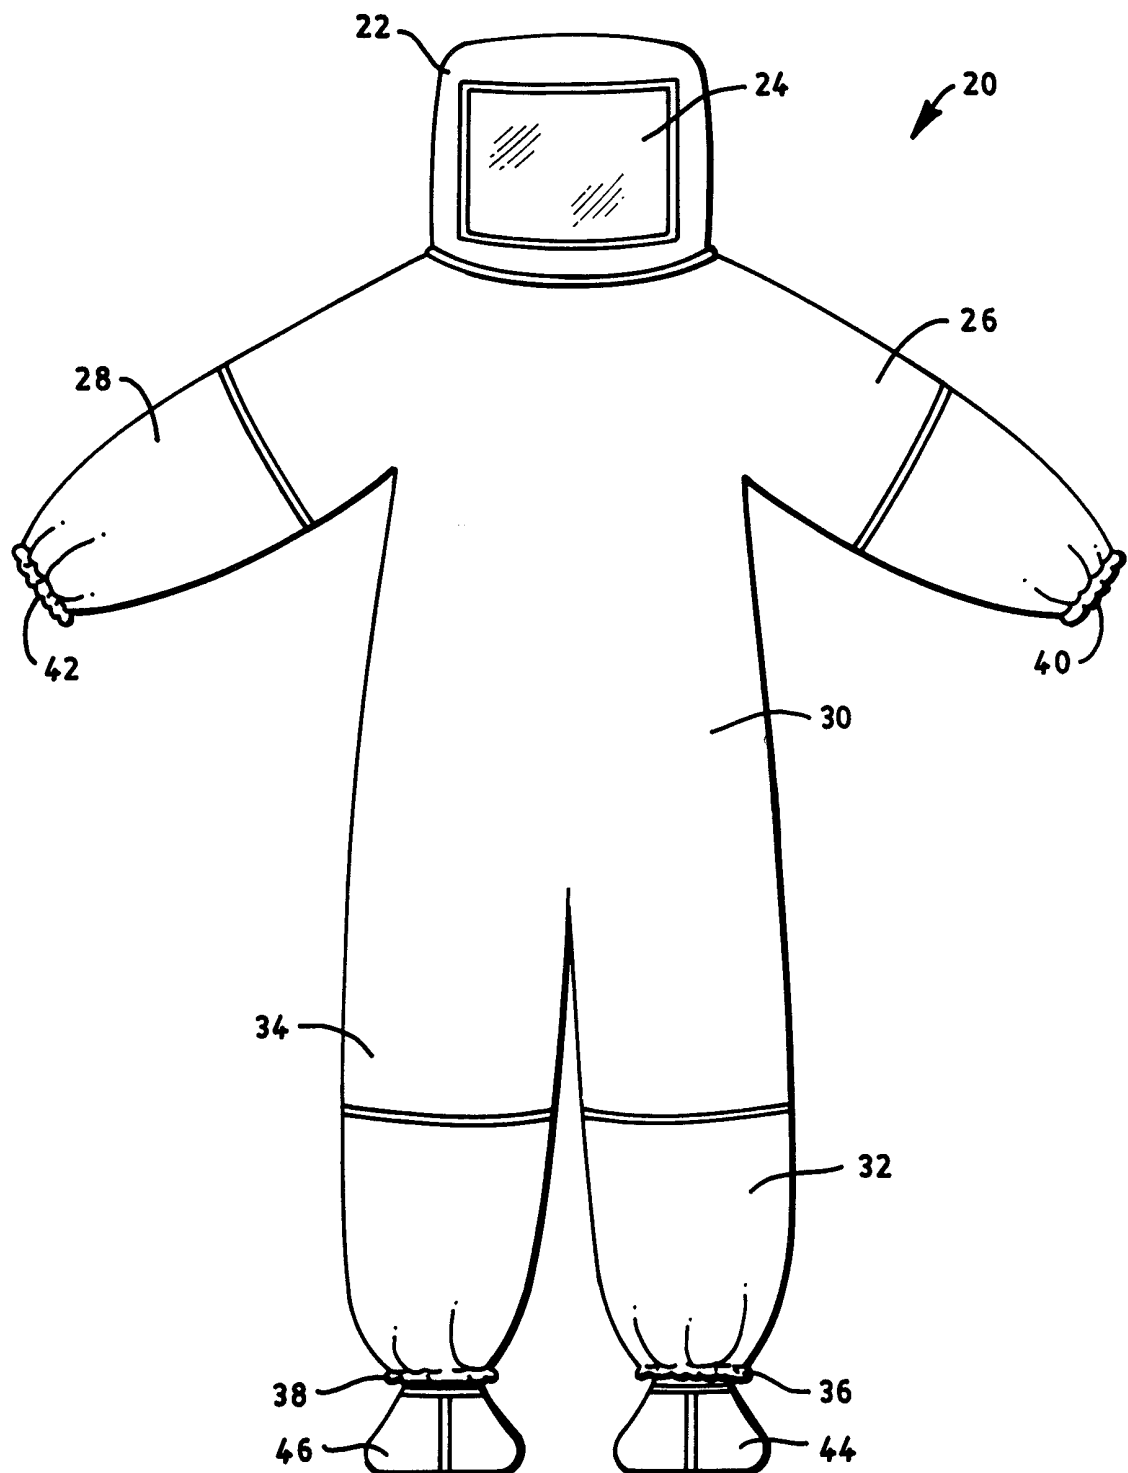


FIG. 1

2/8

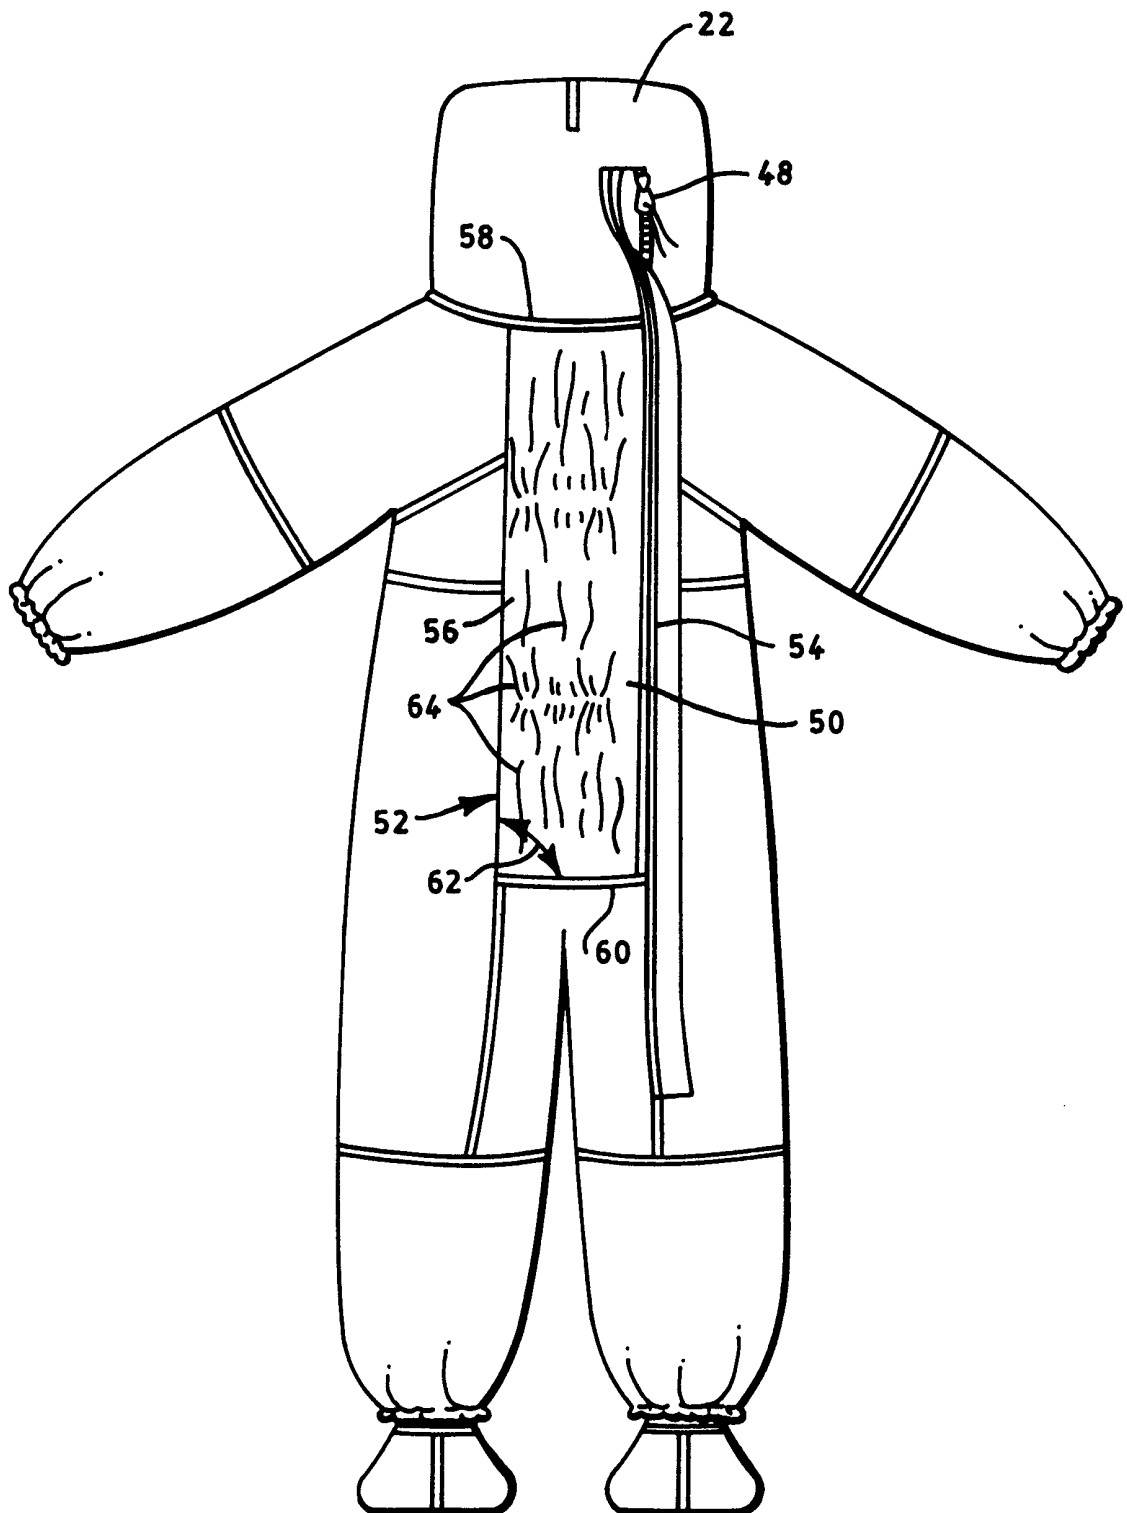


FIG. 2

3 / 8

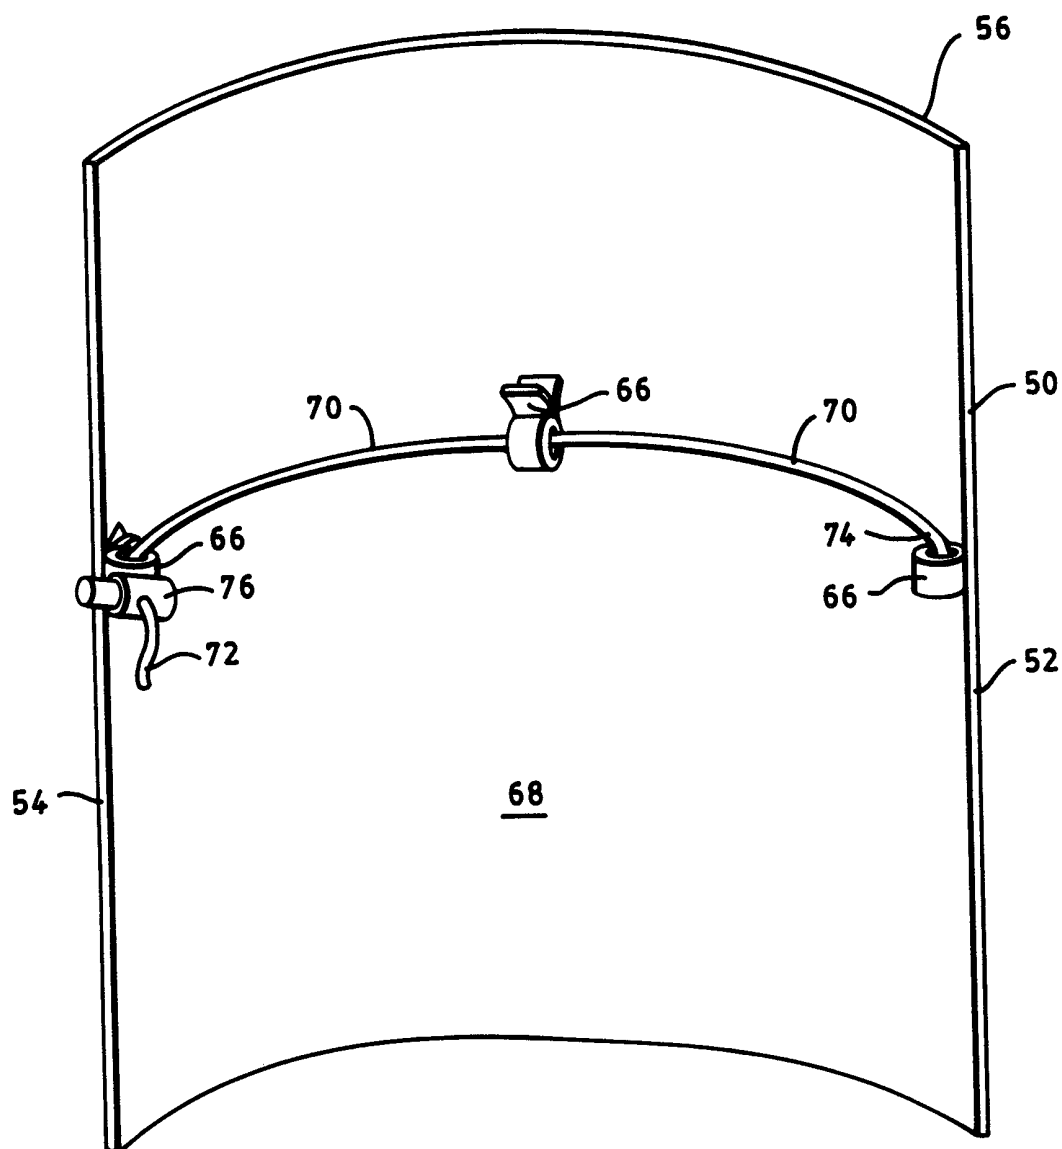


FIG. 3

4/8

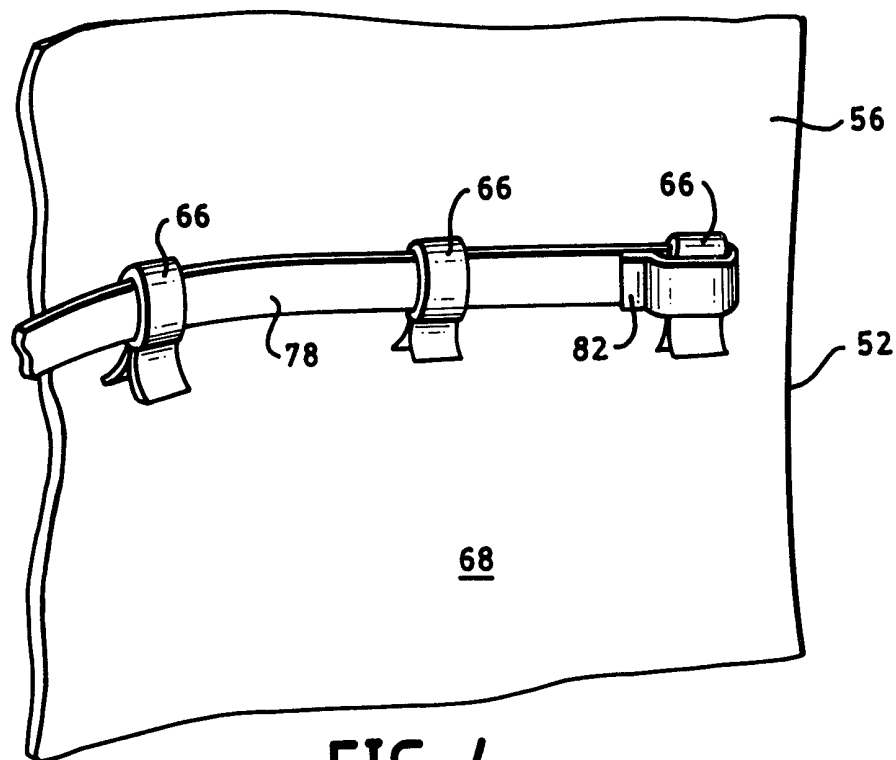


FIG. 4



FIG. 5

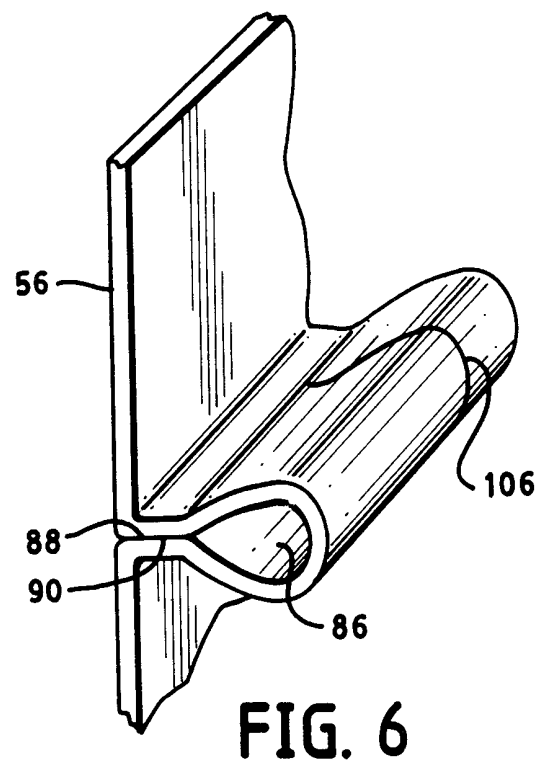
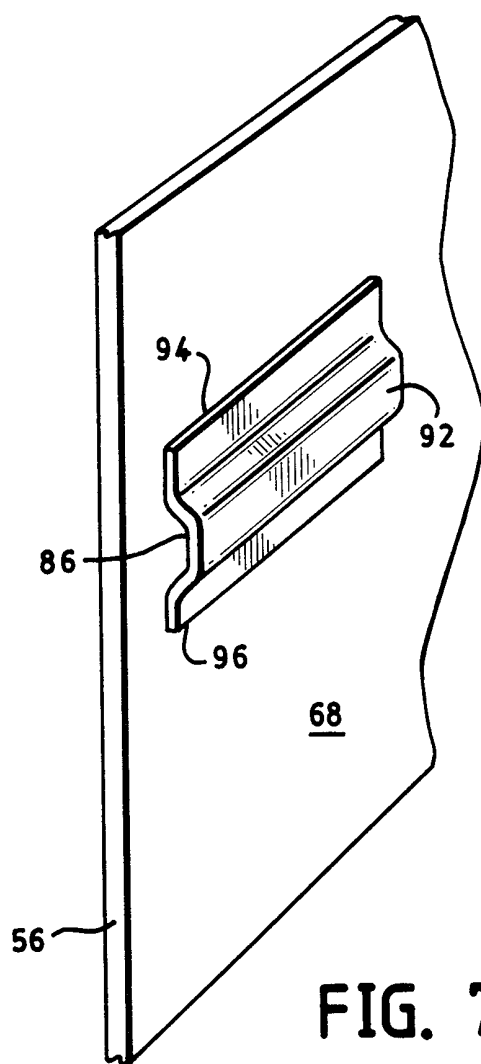


FIG. 6



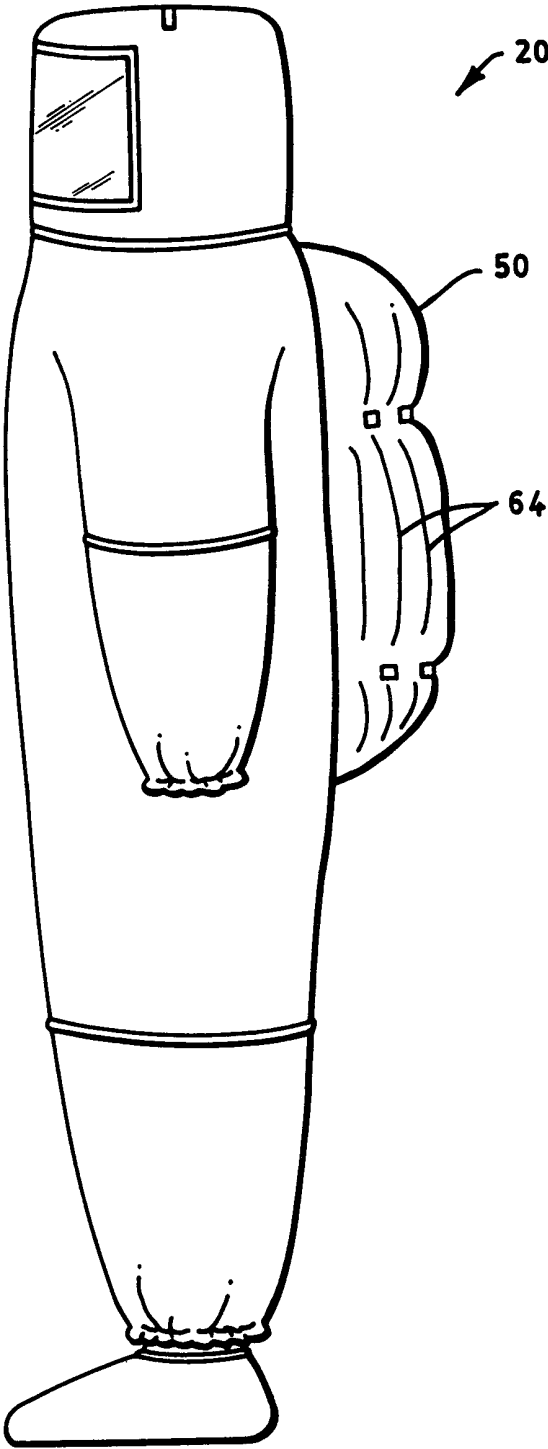


FIG. 8

7/8



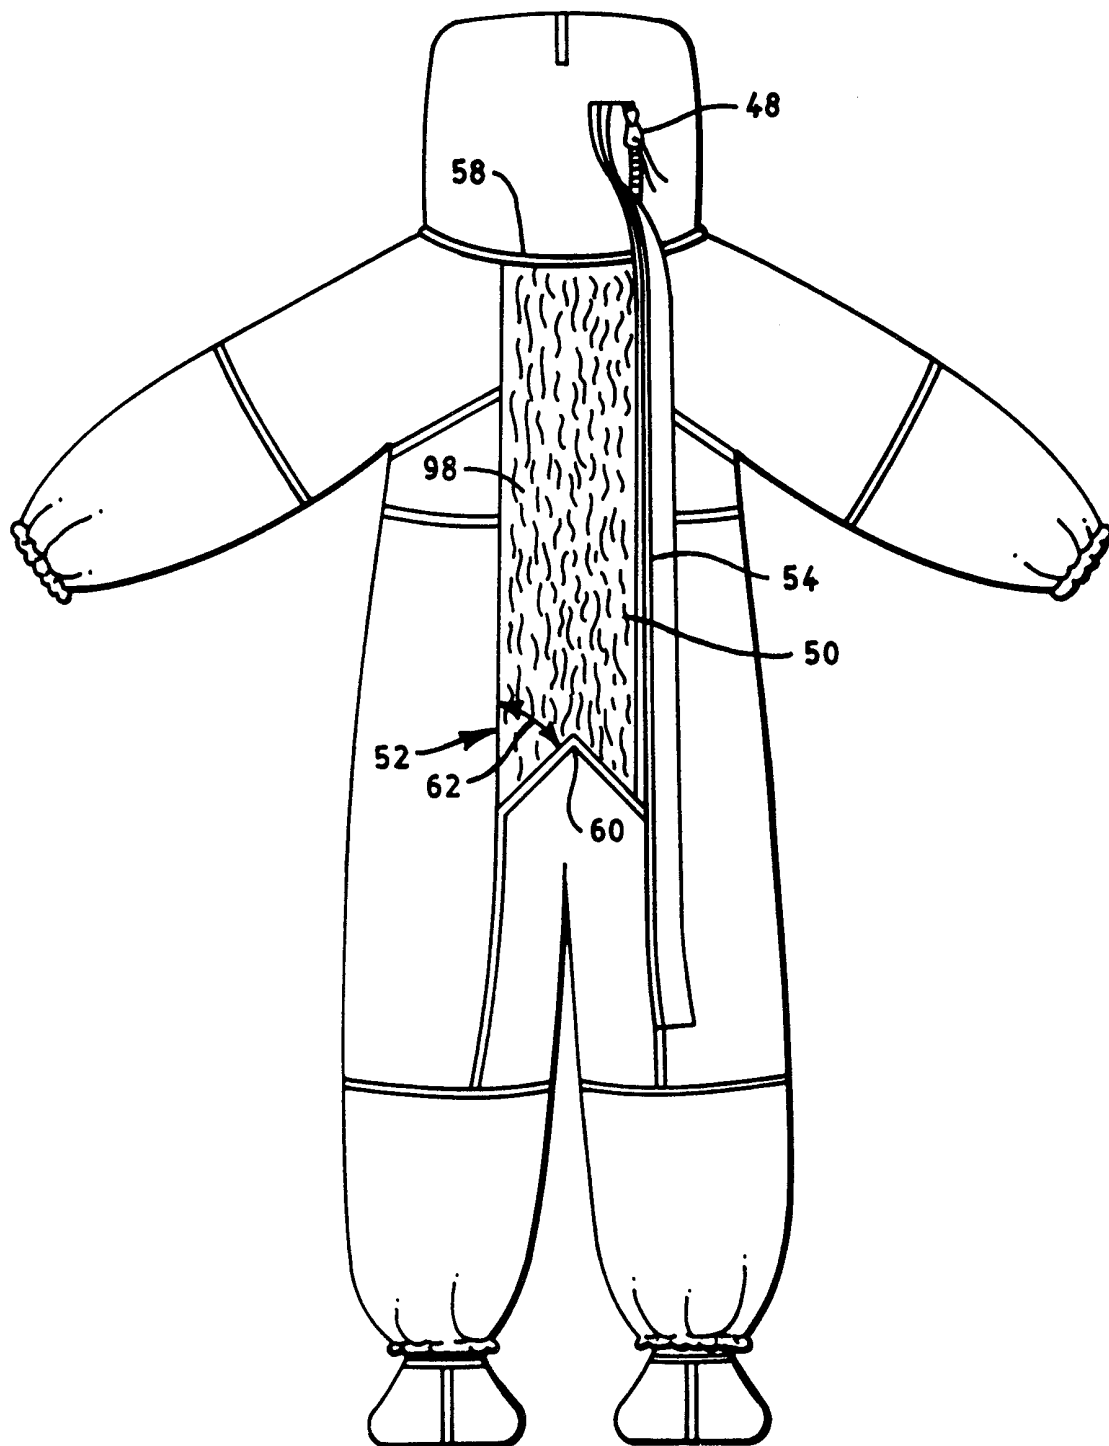


FIG. 9

8/8

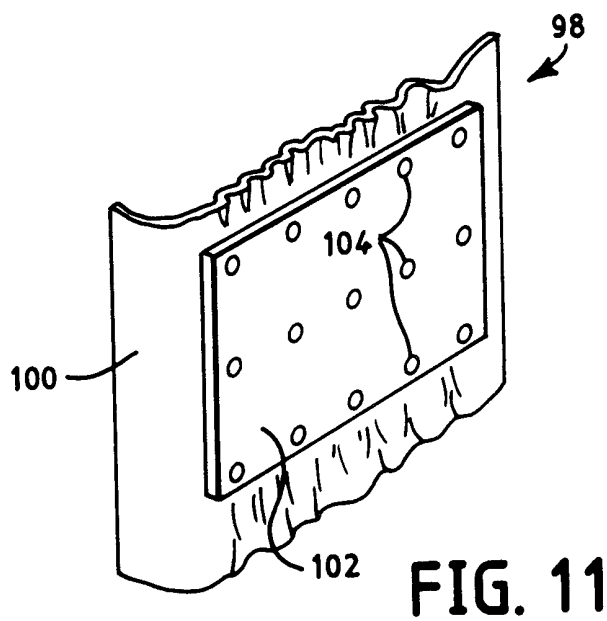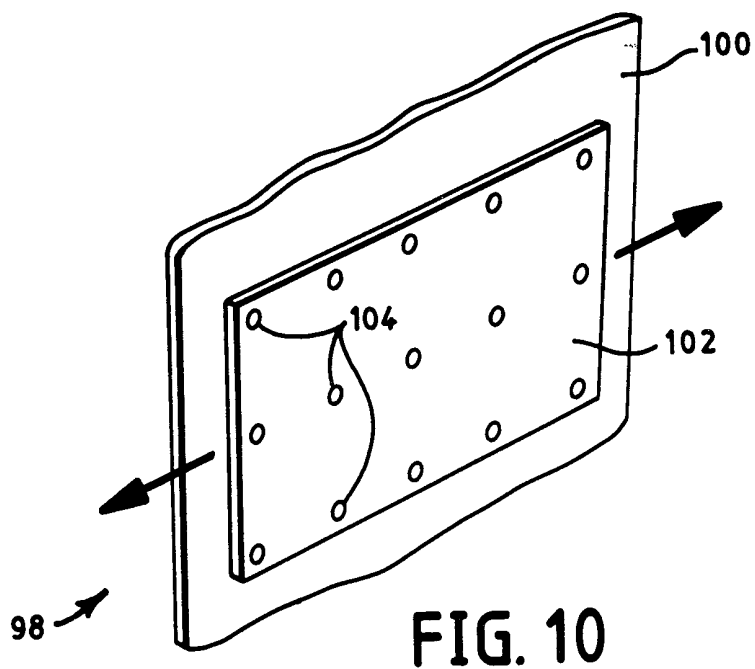

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/05882

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A62B17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A62B A63B A41D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 864 654 A (SCHRIVER) 12 September 1989 (1989-09-12) column 4, line 34 - column 8, line 27; figures 1-19	1-26
X	US 5 279 287 A (WISEMAN) 18 January 1994 (1994-01-18) column 2, line 62 - column 6, line 49; figures	1,2,6, 23-26
A	US 5 421 326 A (RANKIN) 6 June 1995 (1995-06-06)	
A	US 4 403 608 A (WARNCKE) 13 September 1983 (1983-09-13)	
A	DE 36 03 639 A (VORNDAMME) 13 August 1987 (1987-08-13)	
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

16 July 1999

Date of mailing of the international search report

26/07/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Triantaphillou, P

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/05882

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 689 968 A (FRUSTACI) 25 November 1997 (1997-11-25) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/05882

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4864654 A	12-09-1989	NONE	
US 5279287 A	18-01-1994	NONE	
US 5421326 A	06-06-1995	NONE	
US 4403608 A	13-09-1983	DE 3015584 A FR 2481121 A GB 2074456 A,B SE 439588 B SE 8100507 A	29-10-1981 30-10-1981 04-11-1981 24-06-1985 24-10-1981
DE 3603639 A	13-08-1987	DE 3644995 C DE 3644996 C	14-01-1993 07-12-1989
US 5689968 A	25-11-1997	US 5572880 A AU 5431796 A WO 9632988 A	12-11-1996 07-11-1996 24-10-1996