




- (51) **International Patent Classification:**
H04Q 9/00 (2006.01) *G21C 17/00* (2006.01)
- (21) **International Application Number:**
PCT/US2019/012876
- (22) **International Filing Date:**
09 January 2019 (09.01.2019)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/616,185 11 January 2018 (11.01.2018) US
- (71) **Applicant (for US only): SHELL OIL COMPANY**
[US/US]; P.O. Box 576, Houston, Texas 77001-0576 (US).
- (71) **Applicant (for all designated States except US): SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.** [NL/NL]; Carel van Bylandtlaan 30, NL-2596 The Hague (NL).
- (72) **Inventors: VOGT, Kaspar Joseph;** 3114 Lake Street, Houston, Texas 77098 (US). **FUCHS, David Winn;** 27211 Carlisle Bend Ct., Katy, Texas 77494 (US).

(74) **Agent: STEWART, Charles W.;** Shell Oil Company, P.O. Box 576, Houston, Texas 77001-0576 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) **Title:** WIRELESS MONITORING AND PROFILING OF REACTOR CONDITIONS USING ARRAYS OF SENSOR-ENABLED RFID TAGS PLACED AT KNOWN REACTOR HEIGHTS

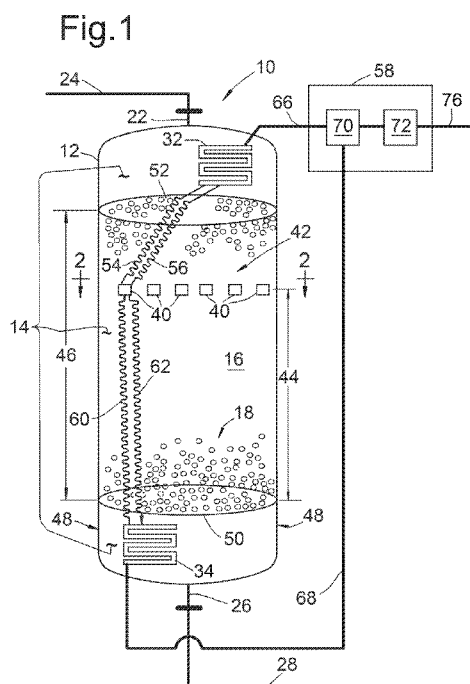

(57) **Abstract:** Disclosed is a system and method for wirelessly monitoring process conditions within a reactor vessel. An array of sensor-enabled radio frequency identification (RFID) tags is placed at known heights within a catalyst bed of a vessel and are used to measure 10 various conditions within the vessel. The sensor-enabled RFID tags are encoded with individual identification codes and are wirelessly linked to multiple transceivers. The use of multiple transceivers allows for the application of triangulation methods to identify the location of each of the sensor-enabled RFID tags in three-dimensional space and for the interrogation of each sensor-enabled RFID tag to receive responsive transponder signals 15 that carry information representative of the sensed condition within the reactor.

Published:

— *with international search report (Art. 21(3))*

**WIRELESS MONITORING AND PROFILING OF REACTOR CONDITIONS
USING ARRAYS OF SENSOR-ENABLED RFID TAGS PLACED AT KNOWN
REACTOR HEIGHTS**

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of pending U.S. Provisional Patent
5 Application Serial No. 62/616,185, filed on 11 January 2018, the entire disclosure of which is
hereby incorporated by reference.

FIELD OF THE INVENTION

[0002] This invention relates to a system and method for wirelessly monitoring and
10 three-dimensional profiling of conditions within a process vessel such as a reactor.

BACKGROUND

[0003] Reactor vessels containing catalyst are common to refineries and chemical plants.
In operating these reactors, it is desirable to measure or monitor the process conditions inside
the vessel because this information can help in controlling the reaction conditions within the
15 reactor vessel. Current methods for measuring the conditions inside a reactor vessel require
having a physical connection, such as an electrical or pneumatic connection, to the sensor
that transmits sensor-measured information for external display. One example of such
measurement means is the use of thermocouples to measure temperature. In order to use a
thermocouple to measure the temperature at a location within a reactor vessel, a thermowell
20 is necessary. The thermowell is installed through the vessel wall, and it extends to a location
at which temperature is measured within the vessel.

[0004] It is desirable to have the ability to measure and observe process conditions at
locations within a reactor vessel and to wirelessly transmit the information for collection and
processing at a remote location. It further is desirable to be able to provide a three-
25 dimensional profile of conditions throughout the volume of a reaction zone defined by a
vessel. We have proposed using sensor-enabled radio frequency identification (RFID) tags
for measuring several of the conditions within a reactor volume, such as pressure,
temperature, fluid composition, vapor and liquid composition, pH, and flow rate, and
wirelessly transmitting the measured information for remote collection and processing.

30 [0005] An example of a sensor-enabled RFID tag used to measure environmental
conditions is described in US 7,397,370. This patent presents a system that provides for

monitoring an environment using a plurality of radio frequency identification (“RFID”) assemblies. The system may include an RFID tag, having an associated unique identification (“ID”) code, configured with a sensor for sensing information regarding the environment, and an antenna for wirelessly transmitting the sensed information to a processing system.

5 The transmitted information received by the processing system includes the sensed environmental information along with the associated identification code and is processed to provide for monitoring an environment and changes in the monitored environment.

[0006] Another reference that describes the use of sensor-enabled RFID tags for measuring and tracking variable environmental conditions is US 8,106,778. This patent
10 discloses a method and system capable of tracking variable conditions using radio frequency identification (RFID). An RFID sensor tag is used to measure a variable condition, such as location, temperature, pressure, and humidity. In response to an interrogation signal transmitted by an RFID reader device, the RFID sensor tag transmits a signal that includes associated tag identification data with the variable data representing the measured condition.
15 The response signal includes both variable data and non-variable data so that the measured conditions can be associated with the tag identification data. The RFID reader device may also receive a plurality of response signals each from one of a plurality of RFID tags. In this case, at least one of the plurality of response signals can include variable data representing a measured condition at the respective one of the plurality of RFID tags and tag identification
20 data of the respective one of the plurality of RFID tags.

[0007] Patent Publication US 2007/0215709 discloses an RFID-based sensor that includes RFID circuitry combined with a sensor. The sensor element is configured to change conductivity state based on its exposure to a physical condition of the ambient surroundings to which the sensor is exposed. These physical conditions may include the presence or
25 absence of gas, light, sound, temperature, pressure, moisture, and/or other conditions of the environment. In response to an RF signal transmitted by an RFID interrogator, the RFID-based sensor transmits for receipt by the RFID interrogator an identification (ID) code and other information associated with present or prior exposure of the RFID-based sensor to one or more physical conditions. The RFID-based sensor may also be powered by the RF energy
30 delivered by the RFID interrogator.

[0008] US Patent 9,317,795 discloses an RFID sensing system that includes an array of sensing elements disposed on a surface. Each sensing element includes an RFID microchip, an antenna operatively coupled to the microchip, and a pressure-sensitive material disposed

on the antenna. An RFID reader system provides an interrogation signal to each sensing element that transmits a signal back to the RFID reader via the coupled antenna when the pressure-sensitive material of a sensing element of the mat is compressed.

[0009] These publications do not disclose or suggest anything about using sensor-enabled RFID tags to measure process or environmental conditions within a reactor vessel or to wirelessly transfer information related to measured conditions within a reactor vessel for further receipt, processing and use. The publications further fail to disclose or teach anything about providing for wireless monitoring of conditions within a reactor vessel or profiling of the physical conditions within a reaction zone defined by a reactor vessel.

[0010] We, however, have invented a system and method that provide for local sensing or measurement of environmental or process conditions at specific heights or levels within a reactor using sensor-enabled RFID tags. Specific tag identification information and information representative of the measured condition within the reactor are carried on RF waves that are wirelessly transmitted by sensor-enabled RFID tags to one or more transceivers. This allows for profiling of conditions within the reaction zone.

SUMMARY

[0011] Accordingly, provided is a system for wirelessly monitoring and profiling process conditions within a reactor vessel. The reactor vessel of the system defines a reaction zone, which includes a catalyst bed having a height of catalyst particles, within which is an array of sensor-enabled RFID tags placed at a known height within the catalyst bed. Included are transceivers that include a first RFID transceiver antenna and a second RFID transceiver antenna. The first RFID transceiver antenna is wirelessly linked to each sensor-enabled RFID tag of the array and is capable of transmitting a first interrogation signal and receiving a first RFID transponder signal that is transmitted responsive to the first interrogation signal.

The second RFID transceiver antenna is wirelessly linked to each sensor-enabled RFID tag of the array and is capable of transmitting a second interrogation signal and receiving a second RFID transponder signal that is transmitted responsive to the second interrogation signal. Each sensor-enabled RFID tag of the array is encoded with a unique non-variable identification code and is capable of sensing a reactor condition within the reaction zone, receiving interrogation signals from the transceivers, and, responsive to the interrogation signals, transmitting the RFID transponder signals. The RFID transponder signals include information representative of the unique non-variable identification codes and of one or more

reactor conditions associated with each of the sensor-enabled RFID tags. The system provides for determining reactor conditions at the known heights within the catalyst bed and profiling of process conditions within the reaction zone.

[0012] Also provided is a method for wirelessly monitoring and profiling process
5 conditions within a reactor vessel. This reactor vessel defines a reaction zone, which includes a catalyst bed having a height of catalyst particles, within which is an array of sensor-enabled RFID tags placed at known heights within the catalyst bed. The method includes transmitting interrogation signals by at least two RFID transceiver antennas. The interrogation signals are received by each sensor-enabled RFID tag of the array. In response to the interrogation
10 signals, each sensor-enabled RFID tag transmits its associated RFID transponder signal that includes information representing a unique non-variable identification code and a surrounding condition that is associated with the sensor-enabled RFID tag. The RFID transceiver antennas receive the associated RFID transponder signals that are processed to provide a profile of the process conditions within the reaction zone.

15 **BRIEF DESCRIPTION OF THE DRAWINGS**

[0013] FIG. 1 is a schematic that represents an embodiment of the inventive system for wirelessly monitoring and three-dimensional profiling of conditions within the reaction zone of a reactor vessel.

[0014] FIG. 2 is a plan view of cross-section A-A of the reactor vessel depicted in FIG.
20 1.

[0015] FIG. 3 is a diagram illustrating certain elements of the system for wireless reactor monitoring and profiling conditions within the reaction zone of a reactor. FIG. 3 illustrates a single array of sensor-enabled RFID tags placed at a known height within a catalyst bed and at least two RFID reader/interrogators that are wirelessly linked to the sensor-enabled
25 RFID tags of the array. The RFID reader/interrogators are connected to a computer system for processing the information contained in the received RF signals transmitted by the sensor-enabled RFID tags.

DETAILED DESCRIPTION

30 [0016] Embodiments of the invention include both a system and method for wirelessly monitoring conditions within a reactor vessel and for providing profiles of conditions at locations within the reactor zone defined by the reactor vessel.

[0017] Filed concurrently with this patent application are the three related provisional patent applications entitled, “*SP2118-Wireless Monitoring and Profiling of Reactor Conditions Using Plurality of Sensor-Enabled RFID Tags Having Known Locations,*” “*SP2066-Wireless Reactor Monitoring System Using Passive Sensor Enabled RFID Tag,*”
5 and *SP2102-Wireless Monitoring and Profiling of Reactor Conditions Using Plurality of Sensor-Enabled RFID Tags and Multiple Transceivers,*” respectively having serial numbers 62/616,148; 62/616,166; and 62/616,155.

[0018] Measured conditions within the reactor vessel can include process or environmental conditions, such as, the pressures or temperatures at various locations within
10 a reactor vessel. The measured conditions may further include other parameters such as vapor and liquid percentages, flow rates, pH, and chemical compositions of fluids contained within or passing through the reactor vessel.

[0019] The invention provides for remotely measuring conditions within a reactor using arrays of sensor-enabled RFID tags placed at known heights within the catalyst bed of a
15 reactor. The sensor-enabled RFID tags wirelessly transmit measured information regarding sensed conditions within the reactor by radio wave transmission in response to interrogation signals transmitted by the several transceivers of the system.

[0020] A processing system is used to process the signals transmitted by the sensor-enabled RFID tags. The processing system includes means, such as a computer with
20 associated program code, for processing the information contained in the signals transmitted by the sensor-enabled RFID tags of the arrays to provide profiles of the conditions within the reactor vessel. The system does this with transceivers and the plurality of sensor-enabled RFID tags with each sensor-enabled RFID tag of the array providing means for measuring or sensing one or more environmental conditions existing at locations and heights within the
25 reaction zone and catalyst bed of a reactor vessel.

[0021] In this specification, each sensor-enabled RFID tag of an array is a device that includes a sensor configured with or operatively connected to a passive RFID tag. The sensor provides means for sensing an environmental or process condition or parameter within the reactor vessel and means for providing a signal input, which contains information
30 representative of the particularly measured condition or parameter, to the connected RFID tag. Passive RFID tags taught in the art include an integrated circuit coupled with a transponder antenna for receiving an interrogation signal from an RFID reader antenna

(transceiver) and for transmitting a transponder signal in response to receiving the interrogation signal.

[0022] Since the sensor-enabled RFID tags are passive, each transmits an RFID transponder signal in response to receiving the interrogation signals transmitted by the RFID reader antennas of the system. As noted above, each sensor is integrated with an RFID tag
5 and is capable of sensing one or more conditions within the reaction zone.

[0023] The sensor component of the sensor-enabled RFID tags is selected from a group of any suitable sensor known to those skilled in the art. Examples of the environmental conditions or parameters sensed or measured by the sensors include pressure, temperature,
10 chemical composition, vapor and liquid composition, density, flow rate, pH, vibration, radiation, magnetic flux, light intensity, and sound intensity. Preferred sensor elements include those selected from the group consisting of temperature sensors, pressure sensors, chemical sensors, humidity sensors, pH sensors, flow sensors, liquid/vapor sensors and any combination thereof.

[0024] Each integrated sensor and RFID tag, i.e., the sensor-enabled RFID tag, provides means for sensing a reactor condition, receiving an interrogation signal, and, responsive to the interrogation signal, transmitting an RFID transponder signal containing information that is representative of the measured reactor condition. The patent publications US 2013/0057390; US 9,563,833; US 9,412,061; US 9,035,766; and WO 03/098175 present
20 examples of sensor-enabled RFID tags. We incorporate these patent publications herein by reference.

[0025] A necessary feature of the invention is for each of the sensor-enabled RFID tags of the array to be encoded with a unique, non-variable identification code. This is important, because in response to receiving the transceiver signals from each of the RFID transceivers,
25 each sensor-enabled RFID tag transmits transponder signals containing unique tag identification data along with the variable data measured or sensed by the associated sensor. The transmission of the information representative of the unique non-variable tag identification code with the variable information representative of a reactor environmental condition measured or sensed by the RFID sensor provides for associating the transmitted
30 variable information with a particular sensor.

[0026] One or more arrays of sensor-enabled RFID tags are placed at known heights within the catalyst bed of the reaction zone. An array of sensor-enabled RFID tags comprises multiple sensor-enabled RFID tags placed in a planar arrangement. The multiple of sensor-

enabled RFID tags may be placed individually at the known catalyst bed height or they may be incorporated as a part of an array system that is placed at known heights within the catalyst bed. An example of such an array system includes multiple sensor-enabled RFID tags, such as two or more, that are affixed to or embodied within a material or fabric that is capable of being laid out in a plane at a known height within the catalyst bed.

[0027] In a preferred embodiment of the invention, numerous sensor-enabled RFID tags are placed in planes at known locations within the catalyst bed. The sensor-enabled RFID tags are placed individually or as a part of an array system of sensor-enabled RFID tags. Two or more transceivers are placed within or external to the reaction zone at locations so that they are wirelessly connected with the sensor-enabled RFID tags of the arrays. The transceivers are placed at known locations and distances from each other so that their interrogation signals can be used in combination with the transponder signals from the sensor-enabled RFID tags to obtain information concerning the distances and angular directions of the sensor-enabled RFID tags from the transceivers. The information relating to distances and angular directions should be such that a suitable triangulation method may be applied to determine the point locations of each sensor-enabled RFID tag in the three-dimensional space of the reaction zone.

[0028] The unique, non-variable identification code associated with each of the sensor-enabled RFID tags allows for identification of each sensor-enabled RFID tag with its point location in three-dimensional space that is determined by the application of the above-referenced triangulation method. Also, the use of the unique, non-variable identification code provides for connecting or associating each sensor-enabled RFID tag of an array with the reactor conditions sensed by it. Thus, each sensor-enabled RFID tag is capable of receiving an interrogation signal from each of the two or more transceivers, and, responsive to the interrogation signals, transmitting RFID transponder signals that include information representative of both the unique non-variable identification code and the measured reactor condition associated with the sensor-enabled RFID tag. This allows for associating a measured environmental condition with a point location at each of the known heights within the catalyst bed of the reactor.

[0029] The reactor vessel of the invention may be any suitable vessel made with any suitable material known to those skilled in the art. In many applications, the reactor vessel generally defines a volume that contains catalyst and into which is introduced reactants or feedstocks. In one embodiment of the invention, the reactor vessel defines a reaction zone

within which is a catalyst bed comprising catalyst particles. The reaction zone may also include multiple beds of catalyst, including what are known as stacked beds. The reaction zone may be filled by any suitable arrangement of catalyst or catalyst beds, including being completely filled with catalyst particles or support particles, or both.

5 **[0030]** The reactor vessel may further be equipped with an inlet that provides fluid communication into the reaction zone and means for introducing a feed stream, such as hydrocarbons, into the reaction zone. The reactor vessel may also be equipped with an outlet that provides fluid communication from the reaction zone and means for removing an effluent stream, such as reaction products, from the reaction zone.

10 **[0031]** Any type of feed stream or fluid may be introduced into or contained within the reaction zone of the reactor vessel, including water, hydrocarbons, and other chemicals. Examples of hydrocarbons include naphtha, kerosene, diesel, gas oil, and heavy oil such as resid. Typically, the reaction zone contains one or more beds of catalyst particles along with any of the aforementioned fluids that preferably include any of the listed hydrocarbons.

15 **[0032]** The catalyst particles in the reaction zone may be of any size and shape typically used in industry, including extrudates of any shape (e.g., cylinders, dilobes, trilobes, and quadralobes), spheres, balls, irregular aggregates, pills and powders. The catalyst particle sizes can be in the range of from 0.1 mm to 200 mm, but, more typically, the size of the catalyst particles is in the range of from 0.5 mm to 100 mm, or from 1 mm to 20 mm, and
20 they may have any composition.

[0033] Common catalyst compositions include an inorganic oxide component, such as, silica, alumina, silica-alumina, and titania. The catalyst composition further can comprise a catalytic metal component, such as any of the transition metals, including chromium, molybdenum, tungsten, rhenium, iron, cobalt, nickel, palladium, platinum, gold, silver, and
25 copper. The concentration of the metal components of the catalyst particles may be upwardly to 60 wt.%, based on metal, regardless of its actual state, and, typically, the metal concentration is in the range of from 0.1 to 30 wt.%, based on metal, regardless of its actual state.

[0034] Each array of sensor-enabled RFID tags is placed at known height locations
30 within the catalyst bed of the reaction zone so that each of the array of sensor-enabled RFID tags is surrounded by catalyst particles. For a typical reactor, the geometric dimensions of depth and width define the catalyst bed. For reactors that are definable by depth and width, a typical depth of the catalyst bed is in the range of from 0.5 to 20 meters, and a typical

effective width of the catalyst bed is in the range of from 0.5 to 20 meters. Thus, each of the sensor-enabled RFID tags can be surrounded by a layer or envelop of catalyst particles having a thickness upwardly to 20 meters requiring the interrogation and transponder signals to pass through a bed thickness of catalyst particles of from about 0.5 to about 20 meters.

5 **[0035]** A preferred embodiment of the invention comprises at least two RFID transceiver antennas each of which is wirelessly linked to each sensor-enabled RFID tag of an array. The transceivers are placed at known locations and distances relative to each other. The information regarding placement of the transceivers and the height locations of the arrays of sensor-enabled RFID tag are used in application of the triangulation methods mentioned
10 above. The distance and angular direction information relating to the placement of each sensor-enabled RFID tag of an array obtained by their interrogation using the transceivers is used as well in the application of the triangulation methodology to determine the specific locations of each sensor-enabled RFID tag of an array.

[0036] In the preferred embodiment, a first RFID transceiver antenna is placed at a
15 known location that is remote to the sensor-enabled RFID tags within the catalyst bed of the reaction zone; provided, that, the first RFID transceiver antenna is wirelessly linked to or coupled with each of the sensor-enabled RFID tags of the array. The first RFID transceiver antenna is configured to allow for transmission of a first interrogator signal to each of the sensor-enabled RFID tags of the arrays and for receiving responsive first RFID transponder
20 signals from each of the sensor-enabled RFID tags of the arrays.

[0037] The preferred embodiment of the inventive system further includes a second RFID transceiver antenna that is placed at a known location remote to the sensor-enabled RFID tags within the catalyst bed of the reaction zone; provided, that, the second RFID transceiver antenna is wirelessly linked to or coupled with each of the sensor-enabled RFID
25 tags of the arrays. The second RFID transceiver antenna is configured to allow for transmission of a second interrogator signal to each of the sensor-enabled RFID tags of the arrays and for receiving responsive second RFID transponder signals from each of the sensor-enabled RFID tags of the arrays.

[0038] The first RFID transceiver antenna, second RFID transceiver antenna and third
30 RFID transceiver antenna are placed at know locations and distances relative to each other and to the sensor-enabled tags of the plurality so that triangulation can be applied to identify the point locations of each of the sensor-enabled tags in three-dimensional space of the reaction zone of the reactor.

[0039] It is preferred to position the RFID transceiver antennas within the reaction zone, since this eliminates the need for the interrogator signals and the transponder signals to pass through the wall of the reactor vessel. However, another embodiment of the inventive system is to position or place the RFID transceiver antennas external to the reactor vessel.

5 [0040] The RFID transceiver antennas are operatively connected to one or more readers that provide an interrogation signals to the RFID transceiver reader antennas and provide for receiving the RFID transponder signals transmitted by each of the sensor-enabled RFID tags of the plurality. Computer means provides for processing the information carried by each of the RFID transponder signals and for displaying or otherwise providing an output relating
10 three-dimensional profile information about conditions throughout the reaction zone.

[0041] We now refer to FIG. 1, which is a schematic representation of an embodiment of inventive system 10 for wirelessly monitoring and profiling process conditions within reactor vessel 12. Reactor vessel 12 defines a reaction zone 14. Reaction zone 14 contains catalyst bed 16 filled with and comprising catalyst particles 18. Reactor vessel 12 is equipped
15 with inlet nozzle 22 that is operatively connected to conduit 24. Inlet nozzle 22 provides means for fluid communication through conduit 24 and means for introducing a feed into reaction zone 14. Reactor vessel 12 is also equipped with outlet nozzle 26 operatively connected to conduit 28 and providing means for fluid communication through conduit 28 and means for removing an effluent from reaction zone 14.

20 [0042] FIG. 1 shows one embodiment of the inventive system 10 that includes first RFID transceiver antenna 32 and second RFID transceiver antenna 34 positioned within reaction zone 14. The RFID transceiver antennas are placed in three-dimensional space of reaction zone 14 at known locations and distances relative to each other.

[0043] While FIG. 1 shows that each of the RFID transceiver antennas is positioned
25 within reaction zone 14, one or more RFID transceiver antennas may, alternatively, be placed at locations external to reactor vessel 12. It is important, however, to position the RFID transceiver antennas so that they are wirelessly linked to or coupled with each sensor-enabled RFID tag 40 of array 42 of sensor-enabled RFID tags 40. Array 42 is placed at a known height or level 44 within catalyst bed 16. Catalyst bed 16 can be characterized by its height
30 46 and width or diameter 48. Height 46 of catalyst bed 16 can be measured as the length between bottom 50 and surface 52 of catalyst bed 16.

[0044] We note that for illustration purposes a single array 42 of sensor-enabled RFID tags 40 is depicted in FIG.1. However, the invention contemplates embodiments that include

more than one array 42 of sensor-enabled RFID tags 40 that is placed at various known heights 44 within catalyst bed 16.

[0045] While first RFID reader antenna 32 is shown as located above surface 52 of catalyst bed 16, it is understood that first RFID reader antenna 32 may be placed anywhere within reaction zone 14, including within the boundary of and surrounded by catalyst particles of catalyst bed 16. This also applies for second RFID reader antenna 34, which is shown as located below catalyst bed 16. These RFID transceiver antennas may, as well, be placed anywhere within reaction zone 14, including within the boundary of and surrounded by catalyst particles of catalyst bed 16. As noted above, for each placement of a transceiver it should be wirelessly linked to each sensor-enabled RFID tag 40 of array 42.

[0046] A plan view of cross section 2-2 is depicted in FIG. 2. The positions of each sensor-enabled RFID tag 40 are shown in FIG. 1 and FIG. 2, which illustrate how array 42 may be placed or disposed at known heights 44 throughout the height 46 of catalyst bed 16.

[0047] In the operation of inventive system 10, first RFID reader antenna 32 transmits first interrogation signal 54 to each sensor-enabled RFID tag 40 of array 42. This is depicted in FIG. 1 by an RF wave arrow symbol 54 extending from first RFID reader antenna 32 to one of the sensor-enabled RFID tags 40 of array 42. However, it is recognized that first interrogation signal 42 is a radio wave that is simultaneously transmitted to all the sensor-enabled RFID tags 40 of array 42 within catalyst bed 16.

[0048] Each sensor-enabled RFID tag 40 of array 42 receives first interrogation signal 54. In response to receiving first interrogation signal 54, each sensor-enabled RFID tag 40 respectively transmits its first associated RFID transponder signal 56 that includes information representative of the unique non-variable identification code encoded in the specific sensor-enabled RFID tag 40 and information representative of a variable reactor condition sensed or measured by and associated with the sensor-enabled RFID tag 40. The first associated RFID transponder signal 54 is received by first RFID transceiver antenna 32 and is processed by signal processing system 58.

[0049] FIG. 1 depicts the first associated RFID transponder signal 56 by an RF wave arrow symbol extending from a single sensor-enabled RFID tag 40 of array 42. It is understood that each of the sensor-enabled RFID tags 40 will transmit its own individual first associated RFID transponder signal 56 that carries a unique, non-variable identification code and variable sensor information representative of a variable reactor condition sensed or measured by and associated with the specific sensor-enabled RFID tag 40.

[0050] Second RFID transceiver antenna 34 is configured relative to the array 42 of sensor-enabled RFID tags 40 in a similar way as is first RFID transceiver antenna 32. Thus, second RFID reader antenna 34 transmits second interrogation signal 60 to each sensor-enabled RFID tag 40 of array 42. This is depicted by an RF wave arrow symbol extending from second RFID reader antenna 34 to one of the sensor-enabled RFID tags 40 of the array 42 of sensor-enabled RFID tags 40. It is noted, however, that second interrogation signal 60 is a radio wave that is simultaneously transmitted to all the sensor-enabled RFID tags 40 of the plurality distributed throughout catalyst bed 16.

[0051] Each sensor-enabled RFID tag 40 of the plurality receives second interrogation signal 60. In response to receiving second interrogation signal 60, each sensor-enabled RFID tag 40 respectively transmits its second associated RFID transponder signal 62 that includes information representative of the unique non-variable identification code encoded in the specific sensor-enabled RFID tag 40 and information representative of a variable reactor condition sensed or measured by and associated with the sensor-enabled RFID tag 40. The second associated RFID transponder signal 62 is received by second RFID transceiver antenna 34 and is processed by signal processing system 58.

[0052] First RFID transceiver antenna 32 and second RFID transceiver antenna 34 are operatively connected to signal processing system 58 respectively by cables 66 and 68. Signal processing system 58 provides means for providing interrogation signals to the RFID transceiver antennas and means for processing RFID transponder signals received by the RFID transceiver antennas.

[0053] Signal processing system 58 includes one or more readers 70 configured together with one or more computers 72 by cable 74, which provides means for communicating between readers 70 and computers 72. Computers 72 provide means for processing first RFID transponder signals 56 and second RFID transponder signals 62, and third RFID transponder signals 54 received respectively by first RFID transceiver antenna 32 and second RFID transceiver antenna 34. Computers 72 provide output information 76 relating to the measured environmental conditions throughout reaction zone 14 and three-dimensional profiles of the measured environmental conditions throughout reaction zone 14 for display or storage in memory or any other suitable format.

[0054] FIG. 2 presents a plan view of the cross-section A-A of reactor vessel 12 shown in FIG. 1. FIG. 2 illustrates how each array 42 of sensor-enabled RFID tags 40 might be placed at a known height 44 within reactor zone 14 of reactor vessel 12.

[0055] FIG. 3 presents an enlarged detail that includes a single, representative array 42 of sensor-enabled RFID tags 40 surrounded by environment 80 of catalyst particles 18. FIG. 3 further shows a relationship with certain other elements of inventive system 10 that includes first RFID transceiver antenna 32, second RFID transceiver antenna 34 and signal processing system 58.

[0056] Each sensor-enabled RFID tag 40 comprises a passive RFID tag 82 that includes an integrated circuit 84. Integrated circuit 84 provides for the storage of a non-variable identification code associated with and representing the specific sensor-enabled RFID tag 40. Sensor-enabled RFID tag 40 further provides for the receipt of variable input information from sensor 86 that is representative of at least one condition of environment 80.

[0057] Sensor 86 is configured with passive RFID tag 82 and is operatively connected to passive RFID tag 82 by connection 88. Sensor 86 is capable of sensing or detecting a condition of environment 80 by use of element 90 or any other suitable sensing means capable of providing an analog or digital input to integrated circuit 84 that is representative of the environmental condition measured. Integrated circuit 84 provides for the modulation of RFID transponder signals 56 and 62 responsive to a sensor input signal provided via connection 88 so that RFID transponder signals 56 and 62 include or carry information that is representative of the measured condition within environment 80. Contained within environment 80 are catalyst particles 18.

[0058] Integrated circuit 84 is operatively connected to RFID tag antenna 92 providing means for transmitting RFID transponder signals 56 and 62 that carry, in addition to individual tag identification code information, variable input information from sensor 86 that is representative of at least one condition within environment 70 that surrounds or envelops the sensor-enabled RFID tags 40. RFID transponder signals 56 and 62 are transmitted in response to RFID tag antenna 92 receiving interrogation signals 54 and 60 respectively from first RFID transceiver antenna 32 and second RFID transceiver antenna 34.

CLAIMS

What is claimed is:

1. A system for measuring and profiling process conditions within a reactor vessel, wherein said system comprises:

said reactor vessel that defines a reaction zone, wherein within said reaction zone is a catalyst bed, comprises catalyst particles, and said catalyst bed is characterized as having a height;

an array of sensor-enabled RFID tags, wherein each sensor-enabled RFID tag of said array is placed at a known height within said catalyst bed;

a first RFID reader (transceiver) antenna wirelessly linked to each said sensor-enabled RFID tag of said array and that is capable of transmitting a first interrogation signal and receiving a first RFID transponder signal that is transmitted responsive to said first interrogation signal; and

a second RFID reader (transceiver) antenna wirelessly linked to each said sensor-enabled RFID tag of said array and that is capable of transmitting a second interrogation signal and receiving a second RFID transponder signal that is transmitted responsive to said second interrogation signal;

wherein each sensor-enabled RFID tag of said array is encoded with a unique non-variable identification code, and

wherein each sensor-enabled RFID tag is capable of sensing a reaction condition within said reaction zone, receiving said first interrogation signal, said second interrogation signal, and, responsive to said first interrogation signal, transmitting said first RFID transponder signal, and, responsive to said second interrogation signal, transmitting said second RFID transponder signal;

whereby conditions at specific locations and said known heights within said reaction zone may be determined and profiled.

2. The system as recited in claim 1, wherein said catalyst particles comprise an inorganic oxide component and a metal component.

3. The system as recited in claim 2, wherein each said sensor-enabled RFID tag of said array comprises an RFID tag operatively connected to sensor means for sensing an

environmental or process condition and for providing a signal input to said RFID tag that is representative of said environmental or process condition.

4. The system as recited in claim 3, wherein one or more of said RFID transceiver antennas are positioned within said reaction zone of said reactor vessel.

5. The system as recited in claim 4, where said reactor vessel includes inlet means providing fluid communication for introducing a feed stream into said reaction zone and outlet means providing fluid communication for removing an effluent stream from said reaction zone.

6. The system as recited in claim 5, wherein said reactor condition is selected from the group of environmental conditions consisting of pressure, temperature, chemical composition, vapor and liquid composition, density, flow rate, pH, vibration, radiation, magnetic flux, light intensity and sound intensity.

7. The system as recited in claim 6, wherein each of said RFID transceiver antennas is operatively connected to a signal processing system providing means for providing said interrogation signals to said RFID transceiver antennas and for receiving said RFID transponder signals transmitted by each of said sensor-enabled RFID tags of said array. A system as recited in claim 3, wherein one or more of said RFID transceiver antennas are positioned external to said reaction zone of said reactor vessel.

8. The system as recited in claim 8, where said reactor vessel includes inlet means providing fluid communication for introducing a feed stream into said reaction zone and outlet means providing fluid communication for removing an effluent stream from said reaction zone.

9. The system as recited in claim 9, wherein said reactor condition is selected from the group of environmental conditions consisting of pressure, temperature, chemical composition, vapor and liquid composition, density, flow rate, pH, vibration, radiation, magnetic flux, light intensity and sound intensity.

10. The system as recited in claim 10, wherein each of said RFID transceiver antennas are operatively connected to a signal processing system providing means for providing said

interrogation signals to said RFID transceiver antennas and for receiving said RFID transponder signals transmitted by each of said sensor-enabled RFID tags of said array.

11. A method of wirelessly monitoring and profiling process conditions within a reactor vessel, wherein said method comprises:

providing said reactor vessel that defines a reaction zone, wherein within said reaction zone is a catalyst bed, comprising catalyst particles and characterized as having a height, and an array of sensor-enabled RFID tags placed at known heights within said catalyst bed;

wherein each of said sensor-enabled RFID tags of said array is encoded with a unique non-variable identification code and is further configured to measure a surrounding condition within said catalyst bed that is associated with said sensor-enabled RFID tag and to transmit responsive to an interrogation signal a responsive signal that includes information representative of said unique non-variable identification code and said surrounding condition associated therewith;

transmitting by a first RFID reader (transceiver) antenna a first interrogation signal that is received by each of said sensor-enabled RFID tags;

in response to receiving said first interrogation signal, each of said sensor-enabled RFID tags transmits its first associated RFID transponder signal received by said first RFID reader antenna that includes information representing its unique non-variable identification code and surrounding condition that is associated with said sensor-enabled RFID tag;

receiving by said first RFID reader (transceiver) antenna said first associated RFID transponder signals;

transmitting by a second RFID reader (transceiver) antenna a second interrogation signal that received by each of said sensor-enabled RFID tags;

in response to receiving said second interrogation signal, each of said sensor-enabled RFID tags transmits its second associated RFID transponder signal received by said second RFID reader antenna that includes information representing its unique non-variable identification code and surrounding condition that is associated with said sensor-enabled RFID tag;

receiving by said second RFID reader (transceiver) antenna said second associated RFID transponder signals; and

processing said first associated RFID transponder signals and said second associated RFID transponder signals;

whereby conditions throughout said reaction zone can be determined and profiled.

13. The method as recited in claim 12, wherein said catalyst particles comprise an inorganic oxide component and a metal component.

14. The method as recited in claim 13, wherein each of said sensor-enabled tags of said array comprises an RFID tag operatively connected to sensor means for sensing an environmental or process condition and for providing a signal input to said RFID tag representative of said environmental or process condition.

15. The method as recited in claim 14, wherein one or more of said RFID transceiver antennas is positioned within said reaction zone of said reactor vessel.

16. The method as recited in claim 15, where said reactor vessel includes inlet means providing fluid communication for introducing a feed stream into said reaction zone and outlet means providing fluid communication for removing an effluent stream from said reaction zone.

17. The method as recited in claim 16, wherein said reactor condition is selected from the group of environmental conditions consisting of pressure, temperature, chemical composition, vapor and liquid composition, density, flow rate, pH, vibration, radiation, magnetic flux, light intensity and sound intensity.

18. The method as recited in claim 17, wherein each of said RFID transceiver antennas are operatively connected to a signal processing system providing means for providing said interrogation signals to said RFID transceiver antennas and for receiving said RFID transponder signals transmitted by each of said sensor-enabled RFID tags of said array.

19. The method as recited in claim 14, wherein one or more of said RFID transceiver antennas are positioned external to said reaction zone of said reactor vessel.

20. The method as recited in claim 19, where said reactor vessel includes inlet means providing fluid communication for introducing a feed stream into said reaction zone and

outlet means providing fluid communication for removing an effluent stream from said reaction zone.

21. The method as recited in claim 20, wherein said reactor condition is selected from the group of environmental conditions consisting of pressure, temperature, chemical composition, vapor and liquid composition, density, flow rate, pH, vibration, radiation, magnetic flux, light intensity and sound intensity.

22. The method as recited in claim 21, wherein each of said RFID transceiver antennas is operatively connected to a signal processing system providing means for providing said interrogation signal to said RFID transceiver antennas and for receiving said RFID transponder signals transmitted by each of said sensor-enabled RFID tags of said array.

Fig. 1



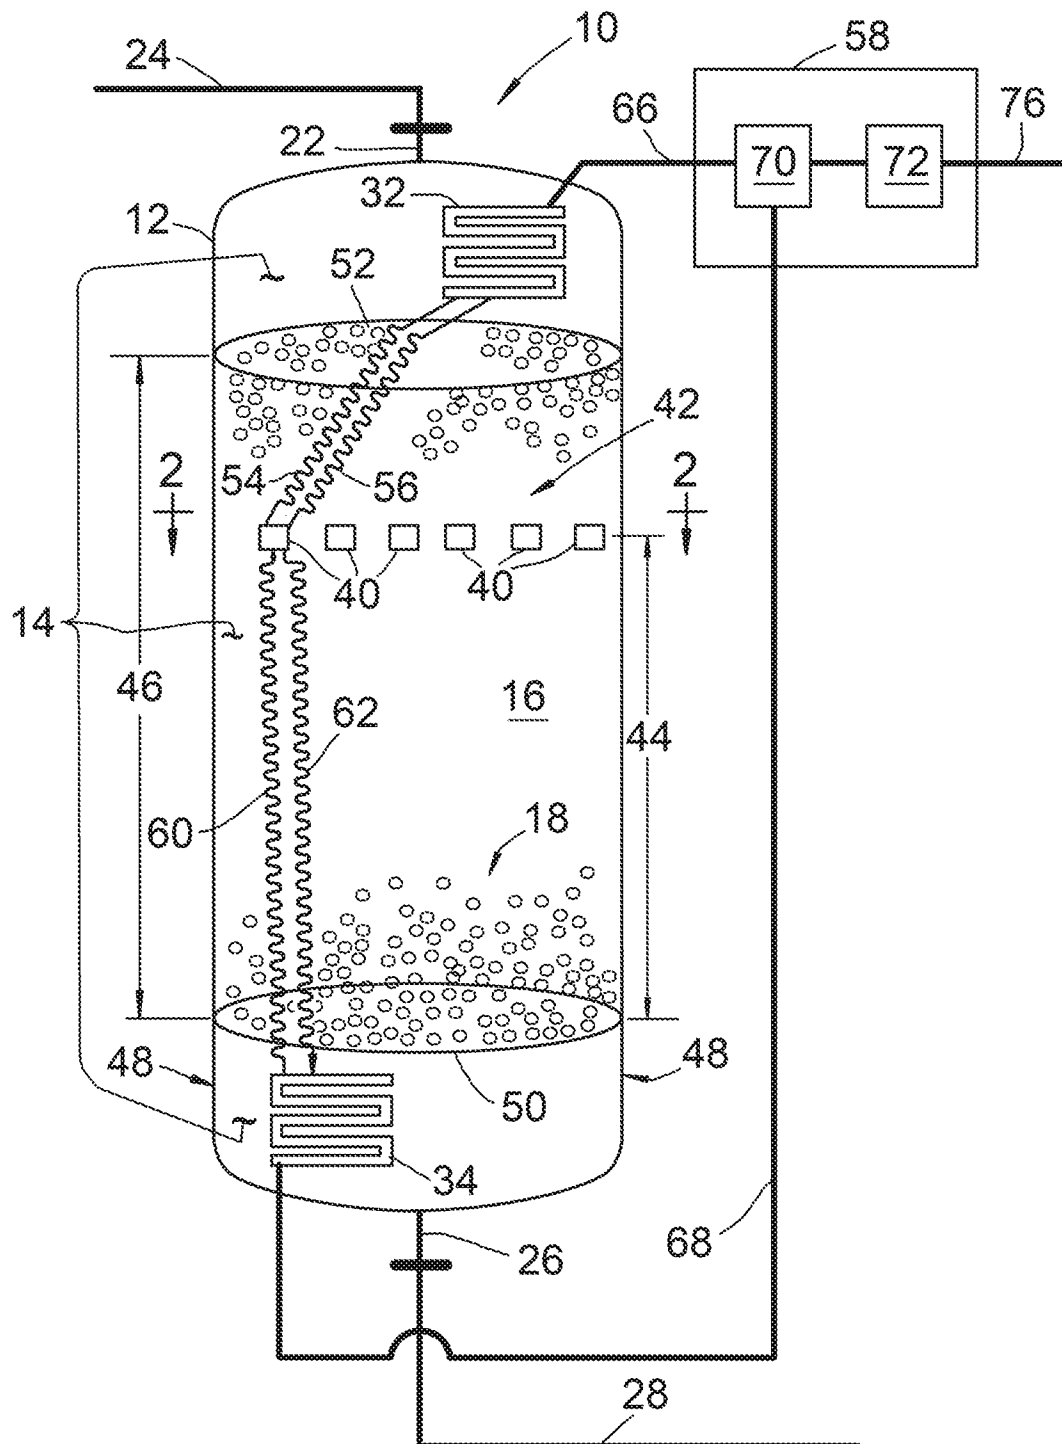


Fig.2

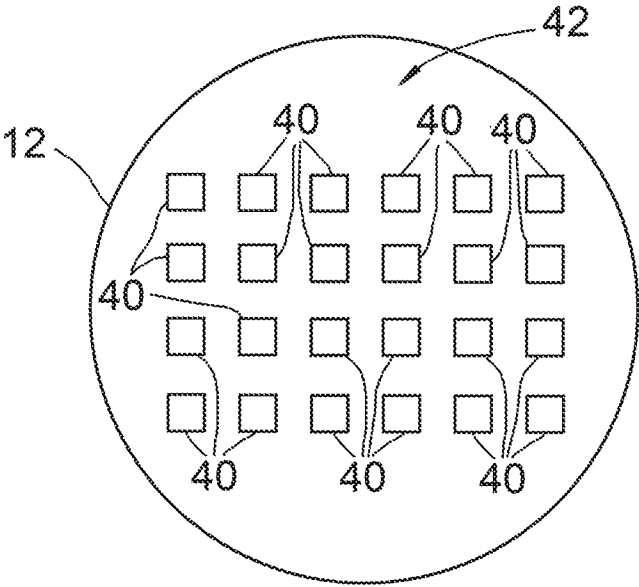

3/3

Fig.3

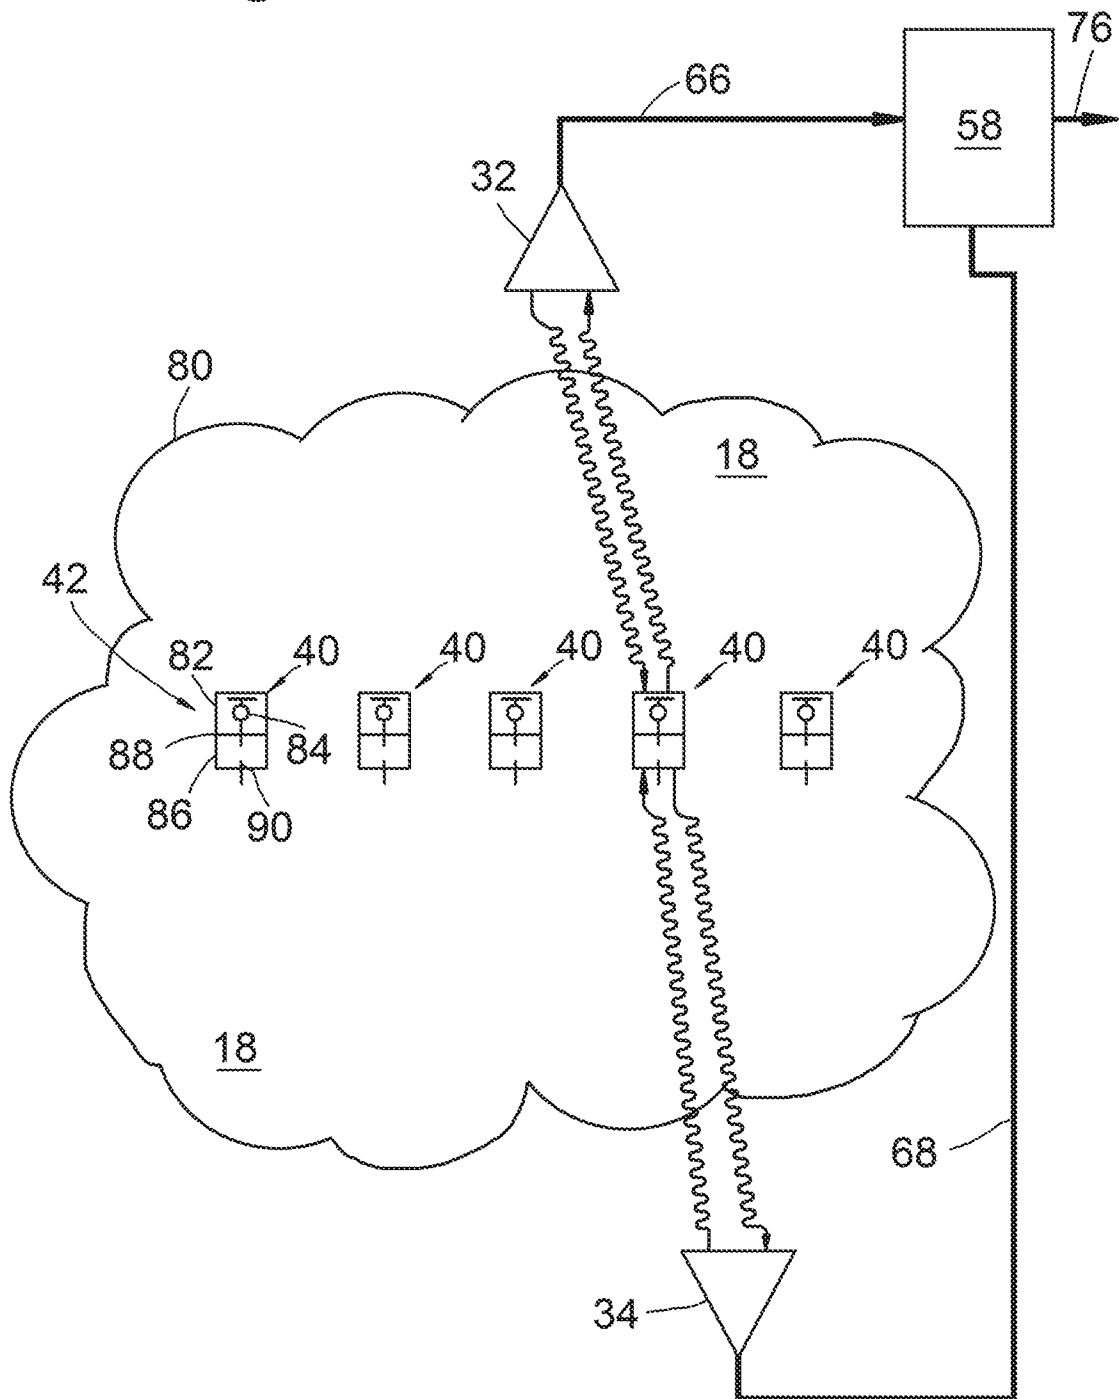

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/012876

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04Q9/00 G21C17/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01D G06K H04Q G21C B01J G21J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2014/062066 A1 (SINVENT AS [NO]) 24 April 2014 (2014-04-24) page 12, line 14 - page 13, line 12 page 16, line 21 - page 19, line 20 page 20, lines 16-23 page 21, lines 18-26 claims 1-7,14,23,28; figures 2B,2C,3C, 3F -----	1-22
X	WO 2012/104230 A1 (SIEMENS AG [DE]; EVERS DANIEL [DE]; WEILER CHRISTOPH [DE]) 9 August 2012 (2012-08-09) page 3, line 17 - page 5, line 4 page 12, line 7 - page 16, line 6 claims 1,9; figure 1 ----- -/-	1,11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 March 2019

Date of mailing of the international search report

11/04/2019

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gijssels, Willem

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2019/012876

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 7 397 370 B2 (HEWLETT PACKARD DEVELOPMENT CO [US]) 8 July 2008 (2008-07-08) cited in the application page 1, lines 35-62 page 3, lines 7-45 page 5, line 60 - page 7, line 35 claims 1,6,21; figures 1-5 -----	1,11
A	US 2014/294041 A1 (ZHANG YIBING [US] ET AL) 2 October 2014 (2014-10-02) paragraphs [0004], [0009] - [0014], [0031], [0032], [0038], [0072] - [0080] claims 1-6,23-28; figures 1,2,6,8 -----	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2019/012876

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014062066 A1	24-04-2014	EP 2909441 A1	26-08-2015
		US 2015268079 A1	24-09-2015
		WO 2014062066 A1	24-04-2014
WO 2012104230 A1	09-08-2012	DE 102011003438 A1	02-08-2012
		WO 2012104230 A1	09-08-2012
US 7397370 B2	08-07-2008	US 2006208879 A1	21-09-2006
		WO 2006094085 A2	08-09-2006
US 2014294041 A1	02-10-2014	US 2014294041 A1	02-10-2014
		WO 2014160914 A1	02-10-2014