

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014779 A1

(51) International Patent Classification⁷: **B67C 3/20**, 3/24

(21) International Application Number:
PCT/EP2003/050355

(22) International Filing Date: 1 August 2003 (01.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BO2002A000523 5 August 2002 (05.08.2002) IT

(71) Applicant (for all designated States except US):
AZIONARIA COSTRUZIONI MACCHINE AUTOMATICHE A.C.M.A. S.P.A. [IT/IT]; Via Cristoforo Colombo, 1, I-40131 BOLOGNA (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **GIACOMAZZI,**

Luca [IT/IT]; Via Maglio 44, I-46044 Goito (IT). **CAV-ALLARI, Stefano** [IT/IT]; Via del Meloncello, 5, I-40135 Bologna (IT).


(74) Agents: **JORIO, Paolo** et al.; Studio Torta S.r.l., Via Viotti, 9, I-10121 Torino (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: MACHINE FOR FILLING CONTAINERS

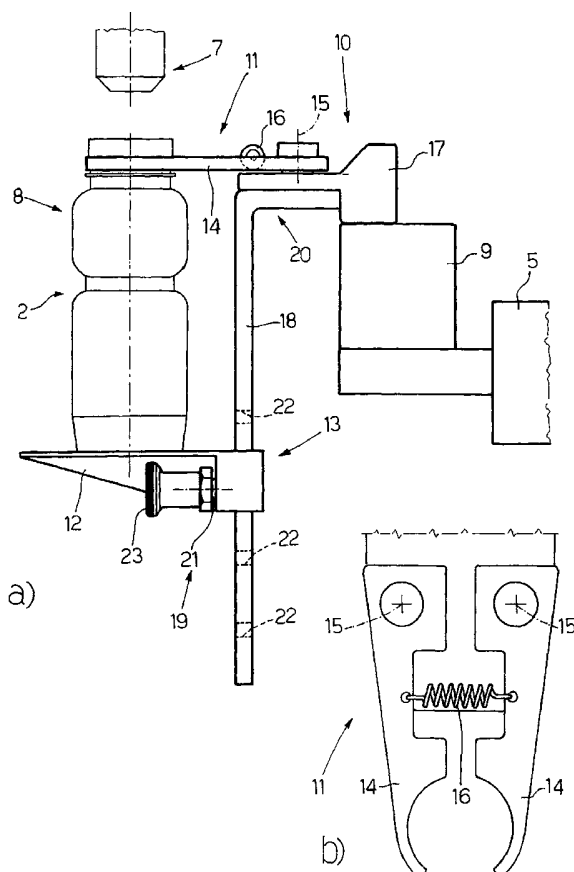

(57) Abstract: A machine (1) for filling containers (2) has a carousel conveyor (5) having a vertical axis (6) and in turn having a number of filling heads (7), and an equal number of seats (8), each of which houses a respective container (2), is associated with a respective filling head (7), and is connected to the carousel conveyor (5) via the interposition of a weighing device (9) supported in a fixed position by the carousel conveyor (5). Each seat (8) has a frame (10), which supports a gripper (11) for engaging a top portion (4) of a respective container (2), and a plate (12) defining a horizontal supporting surface for the bottom of the respective container (2), and an adjusting device (13) for adjusting the vertical position of the plate (12), while maintaining the gripper (11) in a given vertical position close to the respective filling head (7).



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

5

MACHINE FOR FILLING CONTAINERS

TECHNICAL FIELD

10 The present invention relates to a machine for filling containers.

 The present invention may be used to particular advantage for filling bottles, to which the following description refers purely by way of example.

15 BACKGROUND ART

 Known bottle-filling machines, such as the type described in Patent IT-1136276, comprise a vertical-axis carousel conveyor having a number of seats, which are arranged symmetrically about the vertical axis of the conveyor, house respective bottles by means of a horizontal supporting surface, and are connected to the conveyor in fixed positions. Each seat is associated with a filling head, which is fitted to a supporting disk connected to the conveyor so as to slide with respect to
20 and along the vertical axis of the conveyor, and fills a bottle housed in the respective seat as the conveyor rotates. A load cell is interposed between each seat and the conveyor to real-time weigh the bottle as it is being

25

filled. The real-time bottle weight measurement is used to feedback control the respective filling head and so ensure the bottle is filled with exactly the required amount of product. In actual use, an empty bottle is fed
5 into a respective seat on the conveyor at an input station along the periphery of the conveyor, is subsequently filled by the filling head associated with the seat as the conveyor rotates, and is removed from the seat at an output station located along the periphery of
10 the conveyor and downstream from the input station in the rotation direction of the conveyor.

In a known filling machine of the above type, to make a size change, i.e. to adapt the machine to operate with bottles of a different height, the vertical position
15 of the filling heads must be adjusted by moving the supporting disk vertically along the conveyor so that each filling head is positioned, in use, close to the neck of the relative bottle. Sliding the supporting disk vertically with respect to the conveyor, however, is a
20 slow, complicated job, in that the supporting disk is relatively heavy, and therefore cannot be moved manually by an operator, and, what is more, is connected to the tank and all the conduits supplying the product with which the bottles are filled.

25 To eliminate the above drawback, Patent Application W09922209 proposes a filling machine, in which, as opposed to a bottom supporting surface for the relative bottle, each seat simply comprises a gripper for engaging

and supporting the bottle by the neck. The bottle thus hangs from the gripper, so that each seat can house bottles of different heights with no alteration required, in that the position of the neck of the bottle is
5 constant. In actual use, however, the centrifugal force generated by rotation of the conveyor on the bottle hanging by its neck tends to tilt and oscillate the hanging bottle with respect to the vertical, thus resulting in a random error in the bottle weight measured
10 by a load cell interposed between the gripper and conveyor.

DISCLOSURE OF INVENTION

It is an object of the present invention to provide a machine for filling containers, designed to eliminate
15 the aforementioned drawbacks, and which, in particular, is cheap and easy to produce.

According to the present invention, there is provided a machine for filling containers; the machine comprising a carousel conveyor having a vertical axis,
20 and in turn comprising a number of filling heads, and an equal number of seats, each of which houses a respective container, is associated with a respective filling head, and is connected to the carousel conveyor via the interposition of a weighing device supported in a fixed
25 position by the carousel conveyor; each seat comprising a frame, a gripper fitted to the frame and for engaging a top portion of a respective container, and a plate fitted to the frame and defining a horizontal supporting surface

for the bottom of the respective container; the machine being characterized in that each seat comprises an adjusting device associated with the respective frame and for adjusting the vertical position of the plate, while
5 maintaining the gripper in a given vertical position close to the corresponding filling head.

BRIEF DESCRIPTION OF THE DRAWINGS

A number of non-limiting embodiments of the present invention will be described by way of example with
10 reference to the accompanying drawings, in which:

Figure 1 shows a schematic side view, with parts removed for clarity, of a preferred embodiment of the filling machine according to the present invention;

Figure 2 shows a larger-scale side view of a detail
15 of the Figure 1 filling machine;

Figure 3 shows a larger-scale side view of an alternative embodiment of the Figure 2 detail.

BEST MODE FOR CARRYING OUT THE INVENTION

Number 1 in Figure 1 indicates as a whole a filling
20 machine for filling bottles 2, each of which comprises a substantially cylindrical body 3, which tapers at the top to form a neck 4 having a threaded end portion for closure by a threaded cap (not shown). Filling machine 1 comprises a carousel conveyor 5 having a vertical axis 6,
25 and in turn comprising a number of filling heads 7, and an equal number of seats 8, each of which houses a respective bottle 2, is associated with a respective filling head 7, and is connected to conveyor 5 via the

interposition of a weighing device 9 fitted to conveyor 5 in a fixed position. Weighing device 9 provides for real-time weighing bottle 2 as it is being filled; and the real-time weight measurement of bottle 2 is used to
5 feedback control relative filling head 7 and so ensure bottle 2 is filled with exactly the desired amount of product.

In actual use, an empty bottle 2 is fed into a respective seat 8 at a known input station (not shown)
10 along the periphery of conveyor 5, is subsequently filled by the filling head 7 associated with seat 8 as conveyor 5 rotates, and is removed from seat 8 at a known output station (not shown) located along the periphery of conveyor 5 and downstream from the input station in the
15 rotation direction of conveyor 5.

As shown in Figures 2 and 3, each seat 8 comprises a frame 10, which supports a gripper 11 for engaging neck 4 of a respective bottle 2, and a plate 12 defining a horizontal supporting surface for the bottom of
20 respective bottle 2. Each seat 8 also comprises an adjusting device 13 associated with relative frame 10 and for adjusting the vertical position of plate 12, while maintaining gripper 11 in a given vertical position close to the corresponding filling head 7. More specifically,
25 when housed inside a respective seat 8, bottle 2 rests on plate 12, which supports the whole weight of bottle 2, and gripper 11 simply serves to hold neck 4 of bottle 2 in a given position of alignment with corresponding

filling head 7, and so prevent any accidental horizontal movements (normally caused by stress induced by rotation of conveyor 5). Inside respective seat 8, each bottle 2 rests on plate 12, which supports the whole weight of bottle 2, and is also retained by gripper 11, so that the centrifugal force generated on bottle 2 by rotation of conveyor 5 produces no tilting or oscillation of bottle 2 with respect to the vertical, and the weight of bottle 2 measured by weighing device 9 is therefore more accurate.

Each gripper 11 comprises two jaws 14 hinged to respective frame 10 to oscillate about respective vertical axes 15; and an elastic member, e.g. a spring 16, which tends to keep jaws 14 in an engaged position engaging neck 4 of a respective bottle with a given force.

As shown in Figure 2, each frame 10 comprises a fixed supporting member 17 connected rigidly to the corresponding weighing device 9, and supporting relative gripper 11 in a fixed position, and relative plate 12 in an adjustable position. Supporting member 17 comprises a vertical rod 18, along which plate 12 slides, and a releasable connecting member 19 for connecting plate 12 to rod 18; and vertical rod 18 comprises an L-shaped top end 20 connected by screws (not shown) to the rest of supporting member 17.

Releasable connecting member 19 comprises a horizontally movable key 21 fitted to plate 12; and a number of holes 22, each formed along rod 18 and

engageable by key 21. Key 21 preferably comprises a known spring (not shown) for keeping key 21 in an engaged position inside a respective hole 22; and an operator grip 23 on one end of key 21.

5 To make a size change, the operator simply adjusts the position of plates 12 along respective rods 18, which can be done quickly and easily by one operator simply moving each plate 12 (which is extremely light) along respective rod 18 using respective key 21.

10 As shown in Figure 3, each frame 10 comprises a vertical telescopic connecting member 24, which has a fixed portion 25 connected rigidly to the corresponding weighing device 9, and a vertically movable portion 26 supporting relative plate 12 in a fixed position, and
15 relative gripper 11 in an adjustable position. Fixed portion 25 of telescopic connecting member 24 is connected to movable portion 26 by a releasable connecting member 27, which comprises a key 28 for simultaneously engaging a hole 29 in fixed portion 25,
20 and a hole 30 in movable portion 26, which has a number of holes 30 by which to set movable portion 26 to a number of alternative positions.

 Plate 12 supports in sliding manner a vertical rod 31 supporting gripper 11 in a fixed position. Rod 31 is
25 connected to plate 12 by a releasable connecting member 32, which comprises a horizontally movable key 33 fitted to plate 12, and a number of holes 34, each formed along rod 31 and engageable by key 33. Key 33 preferably

comprises a known spring (not shown) for keeping key 33 in an engaged position inside a respective hole 34; and an operator grip 35 on one end of key 33.

To make a size change, the operator simply adjusts
5 the position of plates 12 by means of respective telescopic connecting members 24, and simultaneously adjusts the vertical distance between each plate 12 and respective gripper 11 using corresponding connecting member 32 to fix gripper 11 in a given vertical position
10 close to the corresponding filling head 7, which operation can obviously be done quickly and easily by one operator.

Each weighing device 9 preferably comprises an articulated parallelogram 36 defined by two rocker arms
15 37 hinged at one end to conveyor 5 and at the other end to a connecting rod 38 supporting relative frame 10. A load cell 39 is connected on one side to conveyor 5, and is connected on the other side to connecting rod 38 by a spherical bowl-shaped projection 40 defining a
20 substantially point contact between load cell 39 and a projection 41 of connecting rod 38. Load cell 39 is therefore subjected to substantially only vertical forces, which are the only ones permitted by the point contact between spherical bowl-shaped projection 40 and
25 connecting rod 38, so that any residual non-vertical forces transmitted by frame 10 to weighing device 9 as a result of conveyor 5 rotating about axis 6 have no effect on the reading of weighing device 9.

CLAIMS

1) A machine for filling containers (2); the machine comprising a carousel conveyor (5) having a vertical axis (6), and in turn comprising a number of filling heads (7), and an equal number of seats (8), each of which houses a respective container (2), is associated with a respective filling head (7), and is connected to the carousel conveyor (5) via the interposition of a weighing device (9) supported in a fixed position by the carousel conveyor (5); each seat (8) comprising a frame (10), a gripper (11) fitted to the frame (10) and for engaging a top portion (4) of a respective container (2), and a plate (12) fitted to the frame (10) and defining a horizontal supporting surface for the bottom of the respective container (2); the machine (1) being characterized in that each seat (8) comprises an adjusting device (13) associated with the respective frame (10) and for adjusting the vertical position of the plate (12), while maintaining the gripper (11) in a given vertical position close to the corresponding filling head (7).

2) A machine as claimed in Claim 1, characterized in that each frame (10) comprises a fixed supporting member (17) connected rigidly to the corresponding weighing device (9), and supporting the relative gripper (11) in a fixed position, and the relative plate (12) in an adjustable position.

3) A machine as claimed in Claim 2, characterized in that the supporting member (17) comprises a vertical rod (18), along which the plate (12) slides; releasable connecting means (19) being provided to connect the plate
5 (12) to the vertical rod (18).

4) A machine as claimed in Claim 3, characterized in that the vertical rod (18) comprises an L-shaped top end (20) connected by screws to the rest of supporting member (17).

10 5) A machine as claimed in Claim 3 or 4, characterized in that the releasable connecting means (19) comprise a horizontally movable key (21) fitted to the plate (12), and a number of holes (22), each formed along the vertical rod (18) and engageable by the key
15 (21).

6) A machine as claimed in Claim 5, characterized in that the key (21) comprises a spring for keeping the key (21) in an engaged position inside a respective hole (22), and an operator grip (23) on one end of the key
20 (21).

7) A machine as claimed in Claim 2, characterized in that each frame (10) comprises a vertical telescopic supporting member (24), which has a fixed portion (25) connected rigidly to the corresponding weighing device
25 (9), and a vertically movable portion (26) supporting the relative plate (12) in a fixed position, and the relative gripper (11) in an adjustable position; first releasable connecting means (27) being provided to connect the fixed

portion (25) of the telescopic supporting member (24) to the movable portion (26).

8) A machine as claimed in Claim 7, characterized in that the plate (12) supports in sliding manner a vertical
5 rod (31) supporting the gripper (11) in a fixed position; second releasable connecting means (32) being provided to connect the vertical rod (31) to the plate (12).

9) A machine as claimed in Claim 8, characterized in that the second releasable connecting means (32) comprise
10 a horizontally movable key (33) fitted to the plate (12), and a number of holes (34), each formed along the vertical rod (31) and engageable by the key (33).

10) A machine as claimed in Claim 9, characterized in that the key (33) comprises a spring for keeping the
15 key (33) in an engaged position inside a respective hole (34), and an operator grip (35) on one end of the key (33).

11) A machine as claimed in one of Claims 1 to 10, characterized in that each gripper (11) comprises two
20 jaws (14) hinged to the respective frame (10) to oscillate about respective vertical axes (15); and an elastic member (16), which tends to keep the jaws (14) in an engaged position engaging the top portion (4) of a respective container (2).

25 12) A machine as claimed in one of Claims 1 to 11, characterized in that each weighing device (9) comprises an articulated parallelogram (36) defined by two rocker arms (37) hinged at one end to the carousel conveyor (5),

and at the other end to a connecting rod (38) supporting the relative frame (10); a load cell (39) being connected on one side to the carousel conveyor (5), and on the other side to the connecting rod (38).

- 5 13) A machine as claimed in Claim 12, characterized in that the load cell (39) is connected to the connecting rod (38) by a spherical bowl-shaped projection (40), which engages a horizontal projection (41) on the connecting rod (38) and forms a substantially point
10 contact between the load cell (39) and the connecting rod (38).

1 / 3

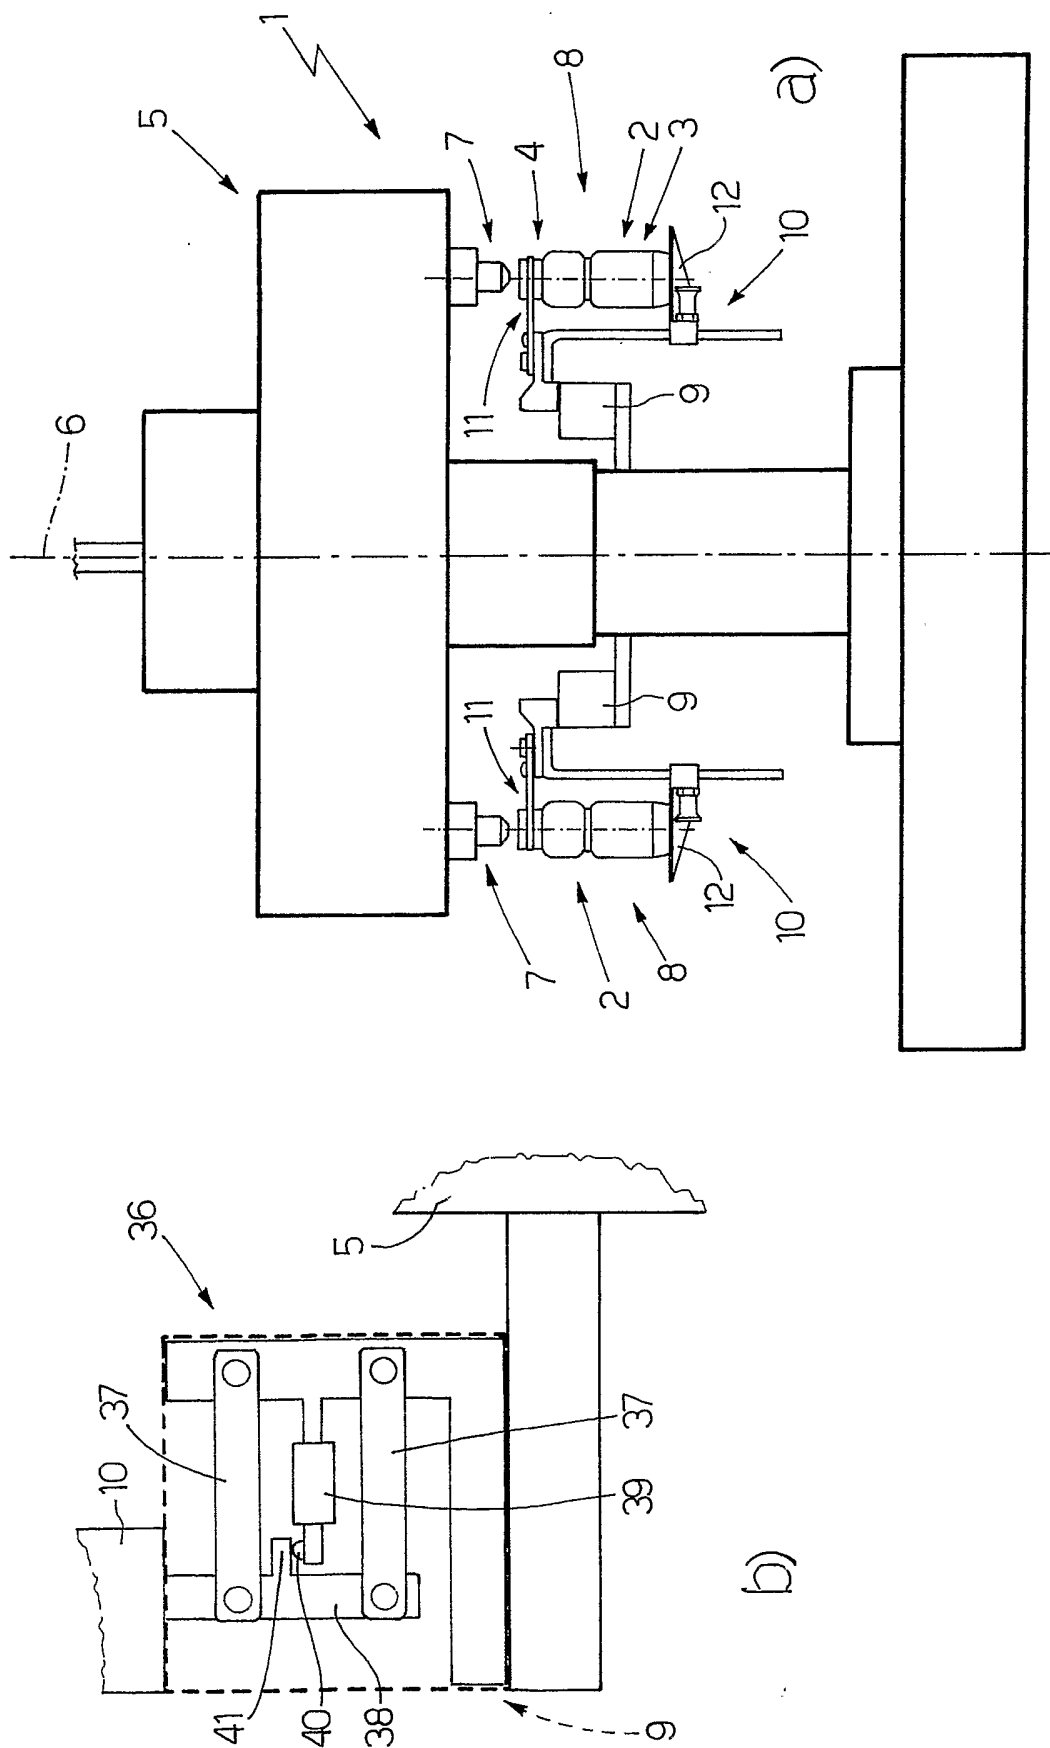


Fig.1

2 / 3

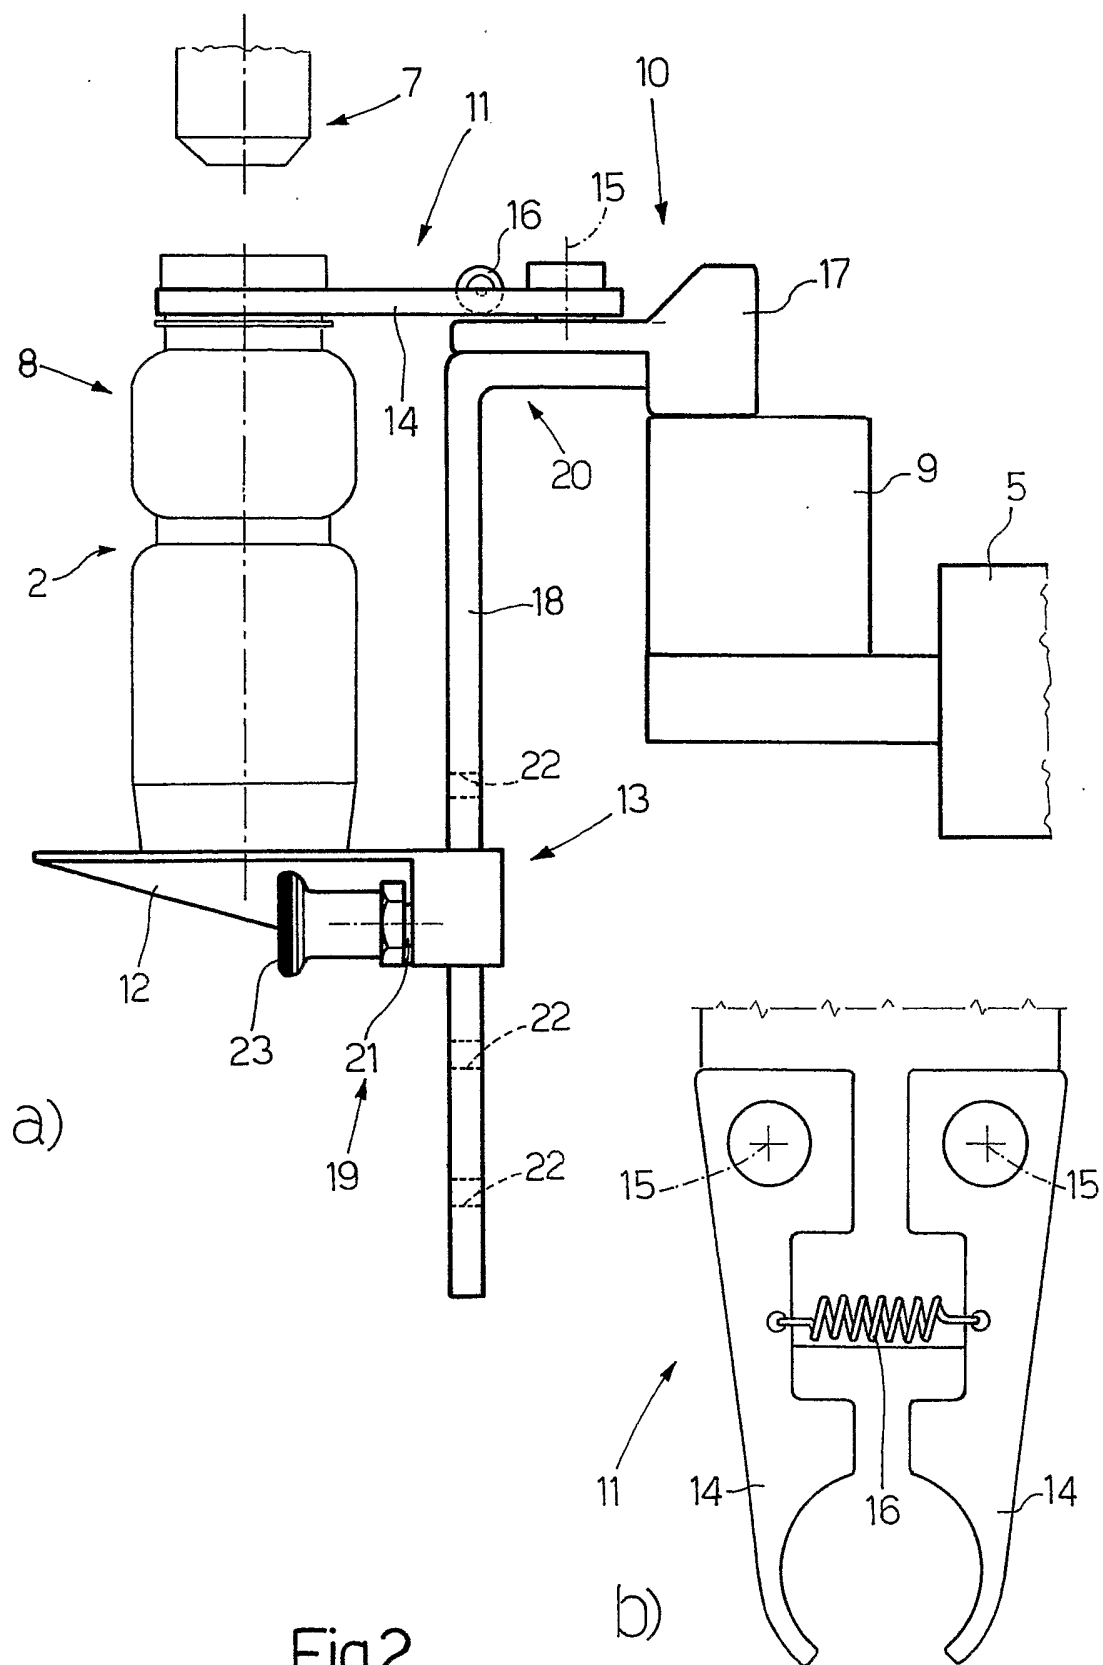


Fig.2

3 / 3

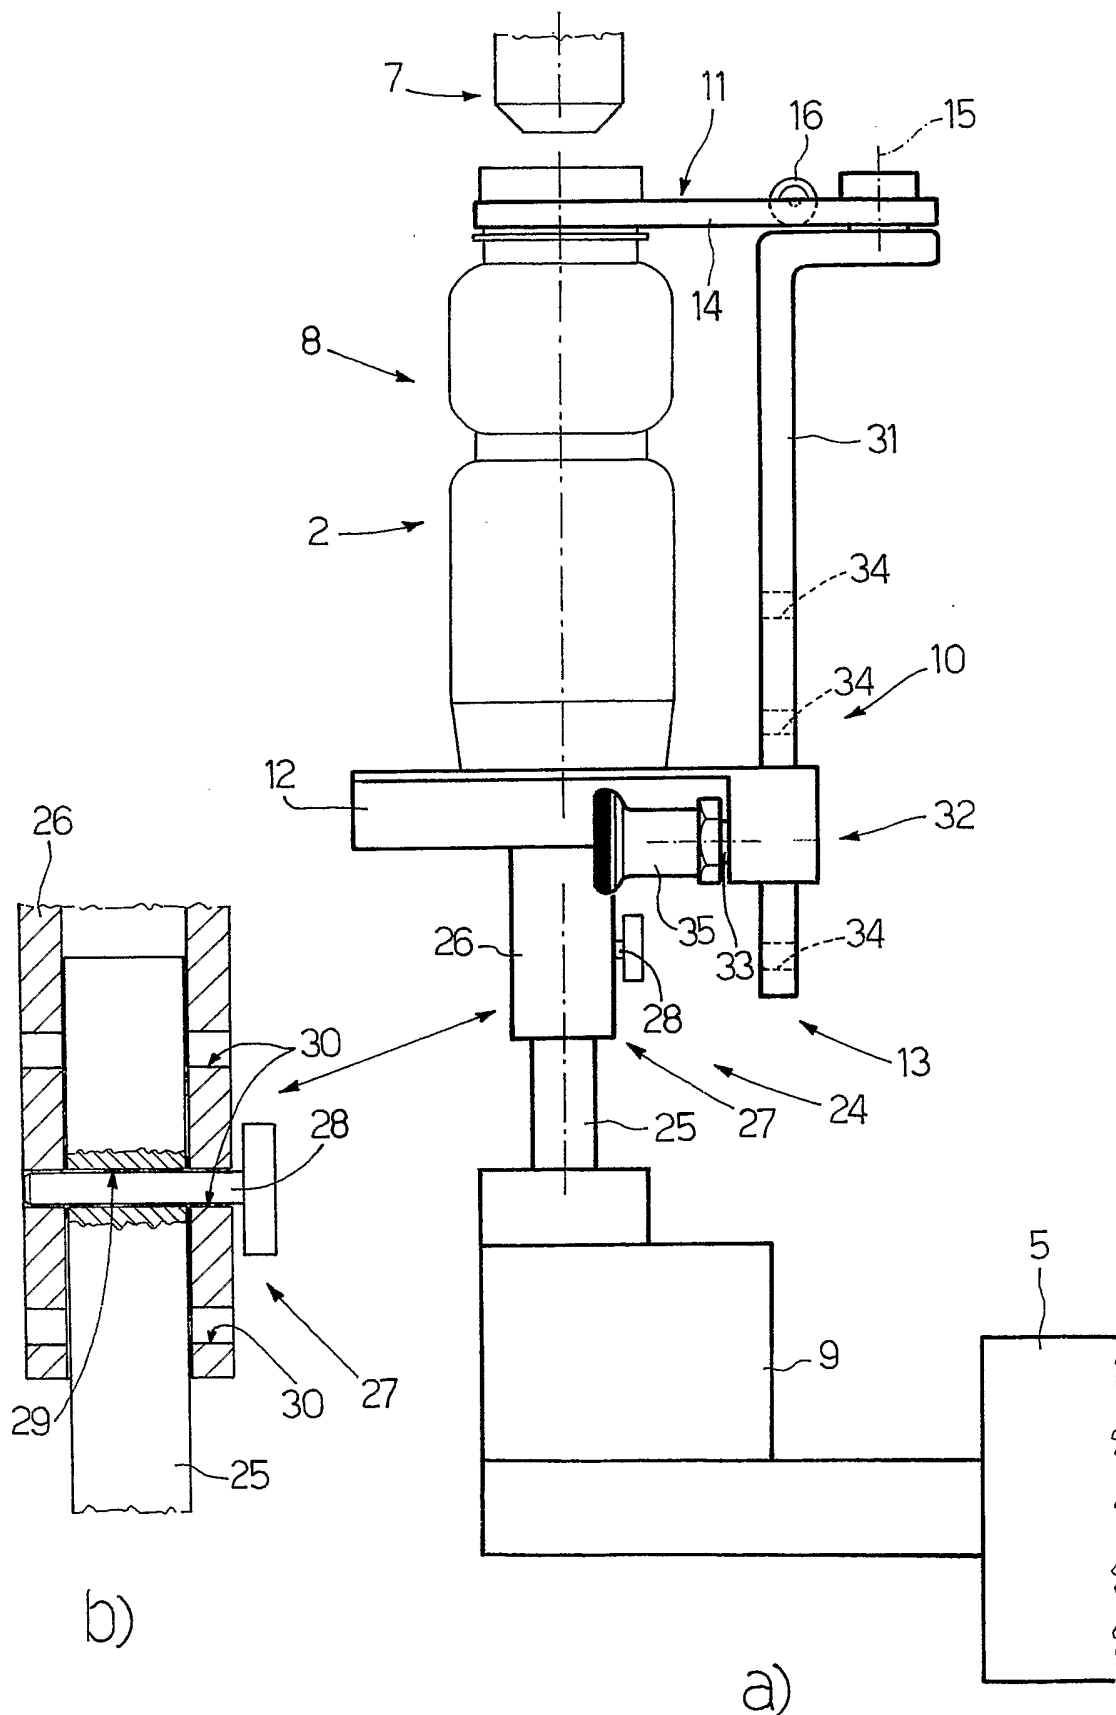


Fig.3

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50355

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B67C3/20 B67C3/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B67C B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 1 072 511 A (SHIBUYA KOGYO CO LTD) 31 January 2001 (2001-01-31) abstract; figures 1,2	1,2
Y	GB 2 264 486 A (SPRUCE ARNOLD) 1 September 1993 (1993-09-01) page 2, paragraph 2 page 4, paragraph 5 - paragraph 6 page 5, line 12 - line 14 page 5, last paragraph page 6, paragraph 2 figures	1,2
A	WO 99 22209 A (SERAC GROUP) 6 May 1999 (1999-05-06) cited in the application	
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

27/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Martínez Navarro, A.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/50355

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 778 633 A (SWEENEY KEVIN M) 14 July 1998 (1998-07-14) ----	
A	US 5 301 725 A (MEINZINGER RUPERT) 12 April 1994 (1994-04-12) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/50355

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1072511	A	31-01-2001	JP 2001039493 A EP 1072511 A1 US 6399901 B1	13-02-2001 31-01-2001 04-06-2002
GB 2264486	A	01-09-1993	NONE	
WO 9922209	A	06-05-1999	FR 2770292 A1 BR 9815000 A CN 1118690 B DE 69808118 D1 DE 69808118 T2 DK 1025424 T3 EP 1025424 A1 ES 2182362 T3 WO 9922209 A1 JP 3420212 B2 JP 2001521166 T PT 1025424 T US 6073667 A	30-04-1999 03-10-2000 20-08-2003 24-10-2002 08-05-2003 13-01-2003 09-08-2000 01-03-2003 06-05-1999 23-06-2003 06-11-2001 28-02-2003 13-06-2000
US 5778633	A	14-07-1998	US 5689932 A US 5732528 A	25-11-1997 31-03-1998
US 5301725	A	12-04-1994	DE 9017262 U1 DE 59107037 D1 WO 9211197 A1 EP 0515629 A1 ES 2082446 T3 JP 5503908 T	28-03-1991 18-01-1996 09-07-1992 02-12-1992 16-03-1996 24-06-1993