


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B65D 81/32		A2	(11) International Publication Number: WO 99/35055
			(43) International Publication Date: 15 July 1999 (15.07.99)
(21) International Application Number: PCT/US99/00220 (22) International Filing Date: 6 January 1999 (06.01.99) (30) Priority Data: 60/070,540 6 January 1998 (06.01.98) US 09/215,117 18 December 1998 (18.12.98) US (71) Applicant: COLGATE-PALMOLIVE COMPANY [US/US]; 300 Park Avenue, New York, NY 10022 (US). (72) Inventor: CUMMINGS, Bruce; Apartment 10C, 605 East 14th Street, New York, NY 10009 (US). (74) Agent: MCGREAL, Michael, J.; Colgate-Palmolive Com- pany, 909 River Road, P.O. Box 1343, Piscataway, NJ 08855-1343 (US).			(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>

(54) Title: POSITIVE DISPLACEMENT MULTICHAMBER PUMP DISPENSER

(57) Abstract

The positive displacement pump delivers the products uniformly and with a low force to actuate the pump. The uniform delivery results from a close slideable fitting of the upper part (16) into the lower part (12). A low force to actuate is accomplished in part by reduced surface area contact of the upper portion and lower portion during slideably interfitting operation. This is accomplished preferably by having transverse ribs (18) on the exterior surface of the upper part and longitudinal ribs (34a, 34b) on the interior surface of the lower part. Further, there is a locking mechanism between an upper part shroud and rams located in the lower part. The locking mechanism controls the movement of the reusable shroud. Additionally there are reinforcing ledges (51, 53) on the lower region of the upper shroud and on the upper region of the lower shroud. The reinforcing ledge on the upper shroud can extend to comprise a floor on the upper shroud.

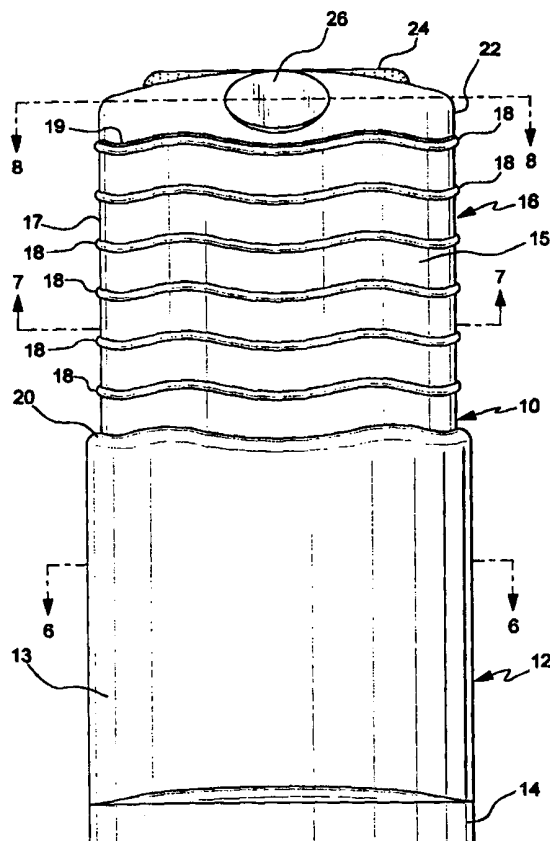

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

POSITIVE DISPLACEMENT MULTICHAMBER PUMP DISPENSER**Field of the Invention**

5

This invention relates to a multichamber positive displacement pump dispenser that has more vertical stability by means of a more stable shroud relationship of an upper shroud portion and a base shroud portion. This invention further relates to a multichamber pump dispenser that requires a reduced force to actuate due to a lower degree of friction between the upper shroud portion and the base shroud portion and spout structure. The invention additionally relates to a multichamber pump dispenser that has an increased structural integrity of both the upper shroud portion and the lower shroud portion.

15

Background of the Invention

A positive displacement pump dispenser is one which is actuated by a hand applied downward force to an upper portion of the dispenser to cause rams located in a bottom portion to contact and move pistons in product containing cylindrical chambers located in the upper portion upwardly to thereby dispense the products in the chambers from the dispenser. This is in contrast to vacuum actuated pump dispensers where pistons in the product containing cylinders move upwardly by means of a vacuum being formed in each chamber during the dispensing operation, the vacuum causing each piston to move upwardly to dispense the products from the dispenser. Positive displacement pump dispensers have been found to be very effective for the delivery of multiple products from multiple chambers. They usually have a lower cost. Fewer parts are required, including valves. Vacuum

20
25
30

actuated pump dispensers usually require two valves for each product chamber to create the vacuum in each chamber necessary for dispensing. This increases the number of parts and consequently the cost of the dispenser.

5

The prior art with regard to positive displacement multichamber pump dispensers is exemplified by U.S. Patent 3,166,221, European Patent 292,672, U.S. Patent 5,020,694 and U.S. Patent 5,038,963. In U.S. Patent 3,166,221 there is an upper product chamber and a lower
10 base having a ram to fit into each upper product chamber. The pistons that slideably fit into the product chambers are an integral part of the rams. The upper product chamber and the lower base do not have any structure to increase the stability of the upper part in the base part nor any structure to decrease the force to actuate the dispenser. Likewise
15 in U.S. Patent 5,020,694 the pistons are a part of the rams. Conceptually, this dispenser is similar to that of U.S. Patent 3,166,221. In European Patent 294,672 the pistons are not attached to the rams but rather form the bottom closure of the product chambers. In U.S. Patent 5,038,963 there is disclosed a multichamber pump dispenser
20 with improved features over the dispenser of U.S. Patent 5,020,694, but there is no structure to increase stability during use nor any means to reduce the force to actuate. Also there is no structure to enhance the structural integrity of the dispenser. Regardless of these deficiencies, these references evidence the present state of the art of multichamber
25 pump dispensers.

One problem faced by those developing multichamber pump dispensers is the uniform dispensing from each chamber. Another problem is to maintain a low force to actuate the pump. The first
30 problem can be solved by maintaining close tolerances between the interfitting sliding pieces. The second problem can be solved by

minimizing the contact areas of the interfitting pieces. However, these are contrary solutions. Generally, close tolerances will require more contact of interfitting parts. This will reduce the variance between the parts and thus, the tendency of one part to move irregularly into the other, but it will increase friction and the force to actuate. The solution to one problem will have a negative effect of the other problem. Uniquely, the present invention solves both problems. There is a more uniform dispensing and a decrease in the force to actuate.

Another problem that is solved is a positive locking system of the upper portion of the dispenser and the base portion. This is accomplished by a mechanism that extends from a lower part of an upper shroud to at least one of the rams of the base portion. This provides for a concealed, positive locking mechanism to lock the upper shroud in an extended position. It also will prevent the upper shroud from being fully disengaged from the base portion during use or during the replacement of the product chambers with refill unit product chambers.

Another problem that is solved is to increase the rigidity of the dispenser parts. This is accomplished for an upper shroud by having an inwardly projecting ledge at the base of the upper shroud. In a preferred embodiment this ledge forms a floor at the base of the upper shroud. For the base lower shroud this is an inwardly projecting ledge at the upper edge of the base lower shroud which substantially rigidifies the base shroud.

A further problem that is solved is the reduction in the drag of the products from each chamber in passage through spout conduits to the spout exit. This is accomplished by the diameter of each conduit being greater in cross-sectional area adjacent the product chambers

and at the spout exit. Intermediate the product chambers and the spout exit, the channels decrease in cross-sectional area and then increase in cross-sectional area to the spout exit. The cross-sectional area increases by means of the walls opposite the spout divider wall diverging outwardly. This shape of these conduits produces a decreased drag of the products by the conduit walls.

The present dispenser design solves these and other problems. The unique design provides a multichamber pump dispenser that uniformly dispenses the products from each chamber at a low force to actuate. There also is a unique locking mechanism of the upper portion and the lower portion and an increase in the rigidity of the primary dispenser parts. Additionally there is less drag in the dispenser spout which further reduces the force to actuate. These are useful commercial advantages of this dispenser.

Brief Summary of the Invention

The present invention is directed to multichamber pump dispensers that uniformly dispense products from each chamber, have a low force to actuate, have a concealed, positive locking mechanism of the upper portion and the lower portion and which provide for a rigid pump structure at no increase in the amount of plastic used. The structure to uniformly dispense product and simultaneously minimize the force to actuate is particularly unique since it addresses competing factors and gets a positive result for each.

The multichamber pump structure comprises an upper portion and a base portion. The upper portion has an upper shroud and a plurality of product chambers contained within the upper shroud.

Each product chamber has an upper end connected by a delivery channel to an exit. The lower end of each chamber is closed by a piston. This upper shroud which contains the product chambers has a plurality of transverse projections on the outer surface of the shroud.

5 Preferably the projections at least substantially surround the upper shroud and most preferably are in a wave-like pattern. The lower base portion has a lower support foot with a plurality of upwardly extending rams. Each ram is aligned to enter a product chamber of the upper portion and to contact the piston of that chamber. Surrounding the

10 rams is a base lower shroud. On the inner surface of the base lower shroud there are a plurality of longitudinal ribs. These ribs can be vertical or at an angle. The surface of each of these ribs is equidistant from the vertical axis of the base portion throughout its length. There is no draft tolerance on these longitudinal ribs. That is they each can

15 have the same lateral dimension throughout their length.

In addition, in one embodiment the upper shroud and at least one of the rams in the lower portion cooperate to form a locking mechanism of the upper portion and the lower base portion. The upper

20 shroud has at least one inwardly projecting arm on a lower region of the shroud, this arm contacting a projection in the region of the upper of at least one ram to thereby maintain the upper portion in an extended position above the lower base portion. This will prevent the upper shroud from being disengaged from the base lower shroud

25 during the replacement of product cartridges in the upper shroud.

In a second embodiment the upper shroud is prevented from being unintentionally removed from the lower shroud by one or more latch projections on a lower part of the exterior surface of the upper

30 shroud, which projections contact an inwardly extending ledge on the lower shroud. The resulting latching prevents the disengagement of the

two shrouds. In addition there are one or more smaller interference projections located above the latch projections to hold the upper shroud at a given position. There then is needed an additional force to have the upper shroud pass down into the base lower shroud. The
5 force is greater than that needed to insert the product cartridge into the upper shroud. In this way the product cartridge can be inserted into the upper shroud without the upper shroud also moving down into the base lower shroud.

10 Further the rigidity of the upper shroud and a base lower shroud are increased by the inwardly extending ledge in the region of the upper part of the base lower shroud and the region of the bottom of the upper shroud. In a preferred embodiment this ledge on the upper shroud is a continuous floor, with product chamber openings extending through
15 this floor. The inwardly projecting ledges of each shroud serve to increase the rigidity of the upper shroud and the base lower shroud. This increases the rigidity of the entire pump dispenser.

In addition, the structure of the spout conduits decreases the
20 force to actuate by decreasing the drag of the product flowing through the conduits. This is accomplished by a large cross-sectional area adjacent the product chambers, then a decreased cross-sectional area, followed by an increased cross-sectional area. Further the outer wall of the spout extends outwardly near the spout exit while the inner conduit
25 divider wall remains constant in shape.

The present invention solves the problem of uniform dispensing at a low force to actuate by maintaining uniform dimensions for the transverse projections on the upper shroud and for the substantially
30 longitudinal ribs on the base portion. These transverse projections and longitudinal ribs are formed without any draft angle that usually is

necessary in molding plastic pieces. Draft angle is the slight angle to a surface needed in order to remove an article from a mold. Since there is no draft to the projections and ribs, all projections and ribs throughout their linear dimension have the same height (outwardly
5 extending dimension). The result is a close tolerance throughout the interfitting of the upper shroud into the base lower shroud. In addition, by having only a transverse projection and longitudinal rib contact, the contact surface of the upper shroud and the base lower shroud is significantly reduced with a reduction in shroud to shroud
10 friction and thus, a significantly decreased force to actuate. The use of a combination of transverse projection/longitudinal rib contact and the present spout design solves to a large degree both the uniform dispensing and force to actuate problems.

15 The present invention also solves the problem of providing a reasonably rigid dispenser while conserving materials. This is accomplished by ledges at the bottom region of the upper shroud and the upper region of the base lower shroud. There likewise is solved the problem of locking the upper portion and the lower portion. These and
20 other problems are solved in the present dispenser.

Brief Description of the Drawings

25 **Figure 1** is a front elevation view of the multichamber pump dispenser.

Figure 2 is a side elevation view of the multichamber pump dispenser.

30

Figure 3 is rear elevation view of the multichamber pump dispenser.

Figure 4 is a front elevation view in cross-section of the
5 multichamber pump dispenser.

Figure 5 is a side elevation view in cross-section of the multichamber pump dispenser.

10 **Figure 6** is a cross-sectional view of the base portion of the multichamber pump dispenser.

Figure 7 is a bottom plan view of the base of the upper shroud showing a floor ledge.

15

Figure 8 is a cross-sectional of the spout of the dispenser through line 8 - 8 of **Figure 1**.

Figure 9 is an exploded view of the upper portion of the
20 dispenser of **Figure 1** showing external locking projections and other features on the rear of the dispenser.

Detailed Description of the Drawings

25

The pump dispenser will be described in more detail with reference to the drawings. **Figure 1** is a front elevation view of the dispenser. The dispenser **10** is comprised of the base portion **12** and the upper portion **16**. The base portion has a foot area **14** and a shroud
30 **13** and is usually of a circular or generally elliptical (oval) shape. A generally elliptical shape is a preferred shape. The upper portion **16**

slideably fits into the base portion **12** at the edge **20** of the base portion. The edge **20** preferably will have a pattern to be symmetrical to the transverse projections **18** of the upper portion **16**. Preferably these are continuous projections. However they can be intermittent
5 and can be of essentially of any shape that would provide sufficient contact with longitudinal ribs in the base portion. Preferably these are continuous rib projections and are spaced so that at least two rib projections are in contact with the longitudinal ribs in the base portion during use.

10

The upper portion **16** is comprised of shroud **17** which carries a plurality of transverse projections **18**. The projections **18** can circumscribe hoops partially or fully around the upper shroud **17** or can be in a wave pattern partially or fully around the shroud **17**.
15 Hoops would be in essentially the same horizontal plane. A wave type pattern is not in the same horizontal plane and is preferred. It also is preferred that the rear surface of the shroud **17** have an area free of projections for an informational label. The upper portion **16** terminates in a head piece cartridge **22** which has an upper surface **24** which is
20 comprised primarily of a raised push pad. The head piece cartridge **22** also carries the spout **26**. The head piece cartridge fits into the upper shroud **17**. The parting line of the head piece cartridge **22** from the upper shroud **17** is designated as **19**. The head piece cartridge **22** is removable from upper shroud **17**.

25

Figure 2 shows the right and left side of the dispenser. This view shows the embodiment of the projections **18** extending around to the side surfaces from the front surface. The preferred wave shape of the projections is preferably continued onto the side surfaces. However, as
30 noted, these projections can be of essentially any shape such as of a hoop shape with the projection being in the same horizontal plane.

They also can be discontinuous. Also shown in this view is closure **28** on spout **26**.

Figure 3 is a rear elevation view of the pump dispenser. This view shows the projections **18** extending onto the rear surface. The projections continue the wave shape. However, they can be of a straight or other shape on this surface. There is shown an area **21** without projections for the placement of an informational label. Also shown is slot **23** in the head piece cartridge **22** for locking the head piece cartridge to the upper shroud **17**. A compatible projection **25** (see **Figure 9**) on the shroud will enter slot **23** and lock the head piece cartridge **22** to the upper shroud **17**.

Figure 4 is a front longitudinal cross-sectional view of the pump dispenser. The base is shown with rams **30** and **32** extending upward from the foot section **14**. Extending outward from the inner surface are longitudinal ribs **34(a)** and **34(b)**. These longitudinal ribs can number from 2 to 10 or more and are usually parallel to the vertical axis of the base. The use of 4 to 6 longitudinal ribs is preferred. There is no molding draft angle on these ribs, although there can be a molding draft angle on the wall of lower shroud **13**. By being able to delete a draft angle on these ribs, there will be a closer tolerance in the interfitting of the upper shroud **17** into the base lower shroud **13**. These ribs can be parallel to the vertical axis of the lower portion throughout their entire length or can be at an angle. The surface of each rib preferably will be equidistant from the vertical axis of the lower portion throughout the length of each rib. This is the case whether the rib is vertical or at angle to vertical. In a most preferred embodiment the surfaces of the ribs will be parallel to each other and to the vertical axis of the lower portion of the dispenser.

The upper part of each ram (**30** and **32**) in a preferred embodiment is shaped to accommodate a locking lever depending from a lower region of the upper shroud **17**. However, there can be a locking projection or other shape on only one of the rams. In one preferred embodiment each ram has a locking projection **36(a)** or **36(b)** for this purpose. Upon the interfitting of the upper shroud **17** into the base lower shroud **13**, lever arms **54(a)** and **54(b)** depending from a lower region of shroud **17** will contact projections **36(a)** and **36(b)** as is shown in **Figure 2**. The upper portion **16** will be held at this extended position with respect to the lower portion **12** until an additional force is applied. When this occurs, lever arms **54(a)** and **54(b)** pass by the projections **36(a)** and **36(b)**. The dispenser will be shipped and sold as shown in **Figure 2**. The consumer will, by the use of an additional force, cause the lever arms to pass projections **36(a)** and **36(b)**. The pump dispenser then is in a pumping mode and ready for use. Also in this position the lever arms cannot pass upwardly by the projections **36(a)** and **36(b)** so the upper shroud **17** cannot be removed from the lower shroud **13**.

The upper portion **16** of the pump dispenser holds the head piece cartridge **22** which has the product chambers **40** and **42** which usually are cylindrical in shape. Each of these cylinders is connected at the upper end to a channel which flows each product separately to and through spout **26**. The lower end of chamber **40** is closed by piston **44** and the lower end of chamber **42** is closed by piston **46**. The pistons have an upper domed shape to conform to the shape of the upper surface of each chamber. This insures the complete emptying of each chamber. Contact portions **48(a)** and **48(b)** of each piston **44** and **46**, respectively, slideably contact the wall of each chamber providing a seal of the piston against the chamber wall. Piston supports **50** and **52** contact rams **30** and **32** respectively.

Also shown in this view is inwardly projecting ledge **51** on the upper shroud **17**. This inwardly projecting ledge serves to reinforce the lower edge of the shroud **17**. As is seen in this **Figure 4** and in **Figure 5** this ledge in a preferred embodiment forms a floor at the bottom of the shroud **17** with apertures for the rams **30** and **32** to pass upwardly into each product chamber and to contact the pistons in each product chamber. This ledge can be of any shape and configuration from a small ring peripheral ledge to essentially a full floor. The lower shroud **13** at the upper region has an inwardly projecting ledge **53**. Likewise as with ledge **51**, this ledge **53** is a reinforcing ledge and is used here to increase the rigidity of the base lower shroud **13**. By increasing the rigidity of the upper shroud **17** and the base lower shroud **13** there will be a more vertical travel of the upper part into the lower part and thus more uniform dispensing of the products in each chamber. The ledge **53** can extend fully around lower shroud **13** or primarily be in the curved areas.

Shown in this **Figure 4** and in **Figure 5** is the interconnection of the upper shroud **17** to the head piece cartridge **22**. This is accomplished by the interfitting of projection **25** (see **Figure 9**) of the upper shroud **17** into slot **23** of the head piece cartridge. This arrangement can be reversed with a projection on the head piece cartridge **22** fitting into a slot on the upper shroud **17**.

25

In this arrangement of the upper shroud and the head piece cartridge only the head piece cartridge with the attached product chambers is disposed of and replaced when the products have been fully dispensed from the chamber. The upper shroud remains with the base with a replacement headpiece cartridge with product chambers inserted into the upper shroud.

30

Figure 6 is a horizontal cross-sectional view of the base portion of the pump dispenser. The rams **30** and **32** are shown along with the six longitudinal ribs **34(a)**, **34(b)**, **34(c)**, **34(d)**, **34(e)** and **34(f)**. As previously noted, these longitudinal ribs do not have any draft. They are parallel to each other and to the vertical axis of the base portion. These longitudinal projections contact the transverse projections **18** on the upper shroud. The transverse projections **18** likewise have no draft from rib to rib or on any rib. The net result is a close sliding fit of the upper shroud **17** into the base lower shroud **13**.

Figure 7 is a bottom plan view of the head piece cartridge **22** with the product chambers **40** and **42**. This shows the floor **51** of the shroud **17** and the spout **26** with closure **28**.

15

Figure 8 shows the structure of spout **26**. In this longitudinal cross-section 8-8 of **Figure 1** it is seen that the cross-sectional area of the product receiving end **60** is less than that of the cross-sectional area of the exit end **62**. Intermediate these two points at the necked area **64** the cross-sectional area decreases to less than at end **60** or **62** at the taper section **66**. This taper section is preferably a conical section. Between the necked area **64** and exit end **62** the outer wall **68** extends outwardly. The divider wall **67** remains straight throughout its length. The only change in dimension would be a draft angle so that the part can be removed from the mold. The result of this configuration is less drag on the product traveling through the spout. This further decreases the force to actuate the dispenser.

25

Figure 9 shows an exploded view of the upper portion **16** of the dispenser. This view shows the head piece cartridge separated from the upper shroud **17**. There is shown here information panel **21** and press

30

panel **27**. By pressing inwardly on press panel **27** the projection **25** can be released from slot **23**. The locking projections **29** are provided to lock the upper shroud **17** to the lower shroud **13**. These locking projections will catch the ledge **53** of the lower shroud and keep the upper shroud locked to the lower shroud. The inference projections **31** are of a dimension that they will pass by ledge **53** of the lower shroud with an additional force. The force that is needed is a force greater than that required for the insertion of the cartridge **22** into the upper shroud **17**, and for latching these parts together by means of the projection **23** and slot **25**.

The pump dispenser would be purchased as is shown in **Figures 1** through **5**. The upper part would be in the locked position with lever arms **54(a)** and **54(b)** contacting projections **36(a)** and **36(b)** of the rams. Upon a downward pressure the lever arms pass by projections **36(a)** and **36(b)** and product can be dispensed. Product will be dispensed until the chambers are emptied. At this time the head piece cartridge **22** is removed from the upper shroud **16** by disengaging slot **23** and projection **25** and pulling upwards on the head piece. The empty head piece cartridge **22** with the product chambers is discarded and a new head piece cartridge **22** with full product chambers is inserted into the shroud **17**. By pushing downward the groove and rib arrangement on the head piece and the upper shroud are locked into place. During this time lever arms **54(a)** and **54(b)** are maintaining shroud **17** extended above the base portion **12** which carries base lower shroud **13**. In a further push downward, the lever arms **54(a)** and **54(b)** pass by projections **36(a)** and **36(b)** and the pump dispenser is again in a condition for use.

There is a uniform dispensing from this dispenser due to the close fit of the longitudinal ribs of the base portion and the transverse

ribs of the upper shroud. In this way all of the transverse ribs will contact the longitudinal ribs with the same close fitting tolerance. The piston displacement in each product chamber will be equal for a dispensing operation. This also minimizes the force to actuate by
5 minimizing the contact of the interfitting surface of the shroud and the interfitting surface of the base portion during an actuation of the pump dispenser. The contact of the surfaces when the upper shroud is fitted fully into the lower shroud is less than about 20% of the surface area of each shroud, preferably less than about 10%, and most preferably less
10 than about 5%. This is the contact with the product chambers empty and the rams extending fully up into the product chambers. This low surface to surface contact reduces friction and thus, the force to actuate. The pump dispenser more uniformly dispenses product at a low force to actuate.

15

The pump dispenser can be made from any moldable plastics. These include the polymers such as polyethylene, polypropylene and polybutadiene and their mixtures and copolymers. The product chambers can be produced from the same plastic as the other pump
20 pieces or some the material. Where it is desired that the product chambers have good barrier properties with regard to organics, such as flavor oils, polyethylene terephthalate is a useful material.

There are other advantages other than those enumerated in this
25 specification. However, all modifications to this pump dispenser and all resulting advantages are within the scope of the present invention.

Claims

5 *What is claimed is:*

1. A multichamber pump dispenser comprising a upper portion and
a base portion, said upper portion comprising an upper shroud
and a cartridge having a plurality of chambers, each chamber
10 having an upper end and a lower end, the upper end of each
chamber connected by a delivery channel to an exit nozzle and
another end of each said chambers closed by a piston adapted for
slideable movement within each of said chambers, said upper
shroud at least partially surrounding said plurality of chambers
15 and having a plurality of transverse projections thereon, a lower
portion comprising a base and a plurality of upwardly projecting
rams, each of said rams arranged for contact with one of said
pistons, and a lower shroud surrounding said rams, said lower
shroud having a plurality of longitudinal ribs on an inner surface
20 thereof adapted to contact said plurality of transverse projections
when said upper shroud is interfitted into said lower shroud.
2. A multichamber pump dispenser as in claim 1 wherein each of
said longitudinal ribs is equidistant from a vertical axis of said
25 base portion throughout the length of each of said longitudinal
ribs.
3. A multichamber pump dispenser as in claim 2 wherein there are
at least about three said longitudinal ribs.

30

4. A multichamber pump dispenser as in claim 1 wherein said cartridge is removably attached to said upper portion.
5. A multichamber pump dispenser as in claim 1 wherein said upper shroud has at least one arm projecting from a lower region thereof, said at least one arm contacting at least one ram adjacent an upper part thereof to thereby lock said upper portion into an extended relationship with said base portion.
- 10 6. A multichamber pump dispenser as in claim 1 wherein said upper shroud has an inwardly extending ledge in a lower region thereof.
- 15 7. A multichamber pump dispenser as in claim 6 wherein said inwardly extending ledge forms a continuous floor with an aperture for each of said chambers to thereby allow said rams of said base portion to enter said chambers and to contact the piston in each said chamber.
- 20 8. A multichamber pump dispenser as in claim 1 wherein said lower shroud has an inwardly extending ledge on at least a part of an upper region thereof, said inwardly extending ledge of said lower shroud extending to a depth no greater than said longitudinal projections.
- 25 9. A multichamber pump dispenser as in claim 8 wherein said upper shroud has at least one locking projections on a lower surface thereof, said at least one locking projection contacting said inwardly extending ledge of said lower shroud to lock said upper shroud to said lower shroud.
- 30

10. A multichamber pump dispenser as in claim 9 wherein said upper shroud has at least one interference projection located upwardly from said at least one locking projection, said at least one interference projection contacting said lower shroud to maintain said upper shroud in a first position above said lower shroud, an increased force causing said interference projections to pass into said lower shroud to a second position.
11. A multichamber pump dispenser comprising a upper portion and a base portion, said upper portion comprising a plurality of chambers, each chamber having an upper end and a lower end, the upper end of each chamber connected by a delivery channel to an exit and another end of each said chamber closed by a piston adapted for slideable movement within each said chamber from said exit end to said upper end, an upper shroud at least partially surrounding said plurality of chambers, a lower region of said upper shroud having an inwardly extending ledge, said base portion comprising a foot and a plurality of upwardly projecting rams, each of said rams arranged for contact with one of said pistons, and a lower shroud surrounding said rams, an upper region of said lower shroud having an inwardly extending reinforcing ledge.
12. A multichamber pump dispenser as in claim 11 wherein said upper shroud has at least one locking projections on a lower surface thereof, said at least one locking projection contacting said inwardly extending ledge of said lower shroud to lock said upper shroud to said lower shroud.
13. A multichamber pump dispenser as in claim 12 wherein said upper shroud has at least one interference projection upwardly

from said at least one locking projection, said at least one interference projection contacting said lower shroud to maintain said upper shroud in a first position above said lower shroud, an increased force causing said interference projections to pass into said lower shroud to a second position.

14. A multichamber pump dispenser as in claim 11 wherein said upper shroud has a plurality of transverse projections on an exterior surface thereof.
15. A multichamber pump dispenser as in claim 14 wherein said lower shroud has a plurality of longitudinal ribs on an inner surface thereof for contacting said plurality of transverse projections on said upper shroud when said upper shroud is slideably moved within said lower shroud.
16. A multichamber pump dispenser as in claim 14 wherein each of said longitudinal ribs is equidistant from a vertical axis of said base portion throughout about the length of each of said longitudinal ribs.
17. A multichamber pump dispenser as in claim 16 wherein there are at least about three longitudinal ribs on said lower shroud.
18. A multichamber pump dispenser as in claim 11 wherein said base lower shroud has a plurality of longitudinal ribs on an inner surface thereof.

19. A multichamber pump dispenser as in claim 18 wherein each of said longitudinal ribs is equidistant from a vertical axis of said base portion throughout the length of each of said longitudinal ribs.
- 5
20. A multichamber pump dispenser as in claim 19 wherein there are at least about three longitudinal ribs.
21. A multichamber pump dispenser as in claim 14 wherein said transverse projections on said upper shroud and said longitudinal ribs on said lower shroud contact in a sliding relationship upon the interfitting of said upper shroud into said lower shroud.
- 10
22. A multichamber pump dispenser as in claim 21 wherein said transverse projections encircle at least three sides of said upper shroud.
- 15
23. A multichamber pump dispenser as in claim 22 wherein each of said transverse projections is disposed in a wave pattern.
- 20
24. A multichamber pump dispenser as in claim 1 wherein said transverse projections encircle at least three sides of said upper shroud.
- 25
25. A multichamber pump dispenser as in claim 24 wherein a plurality of said transverse projections are continuous and are in a wave pattern.

26. A multichamber pump dispenser as in claim 1 wherein there is a spout on said upper portion, said spout at one end connected to an upper end of each chamber and open at an exit end, said deliver channel being within said spout and having a decreased cross-sectional area intermediate said one end and said exit end.
- 5
27. A multichamber pump dispenser as in claim 11 wherein there is a spout on said upper portion, said spout at one end connected to an upper end of each chamber and open at an exit end, said deliver channel being within said spout and having a decreased cross-sectional area intermediate said one end and said exit end.
- 10

1/8

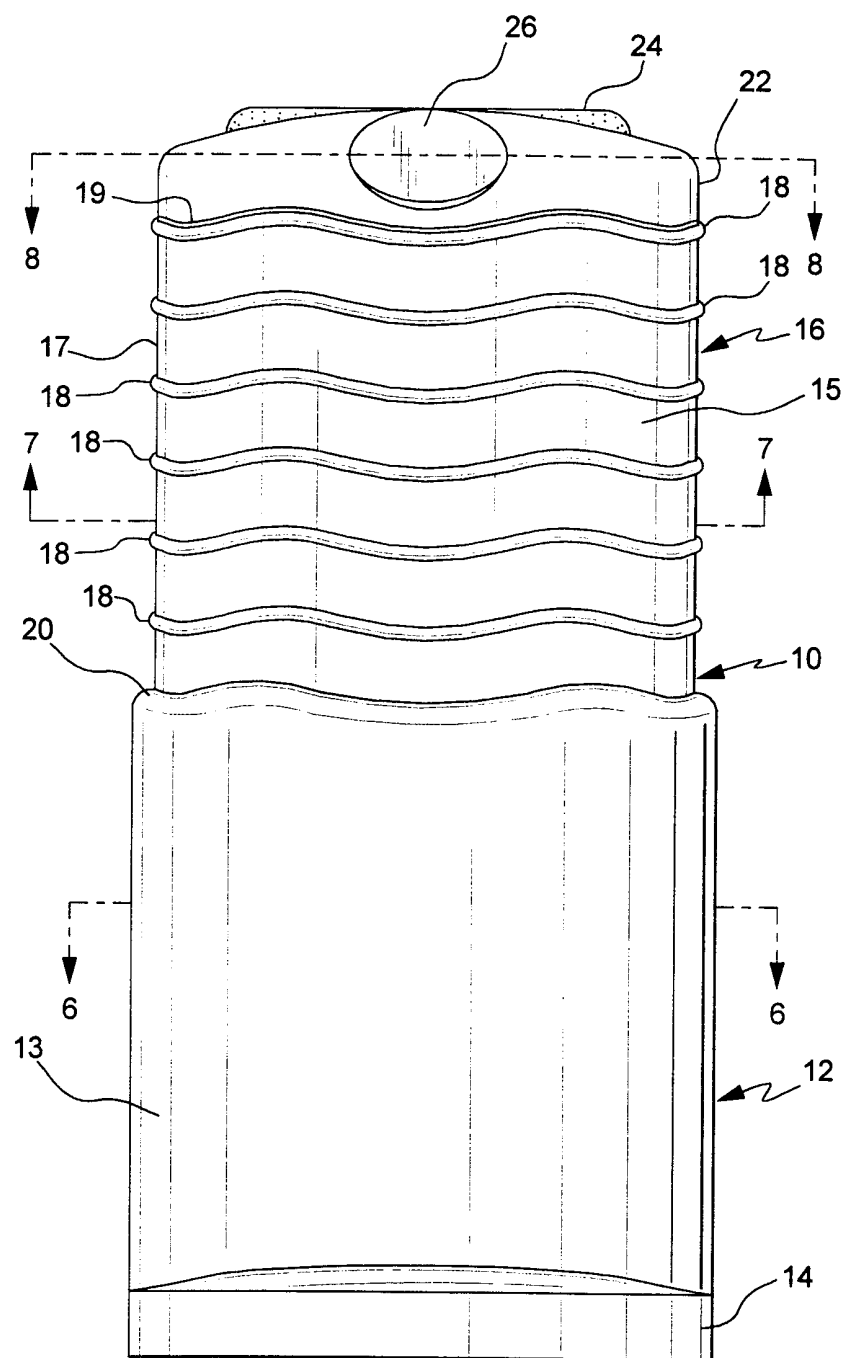


FIG. 1

2/8

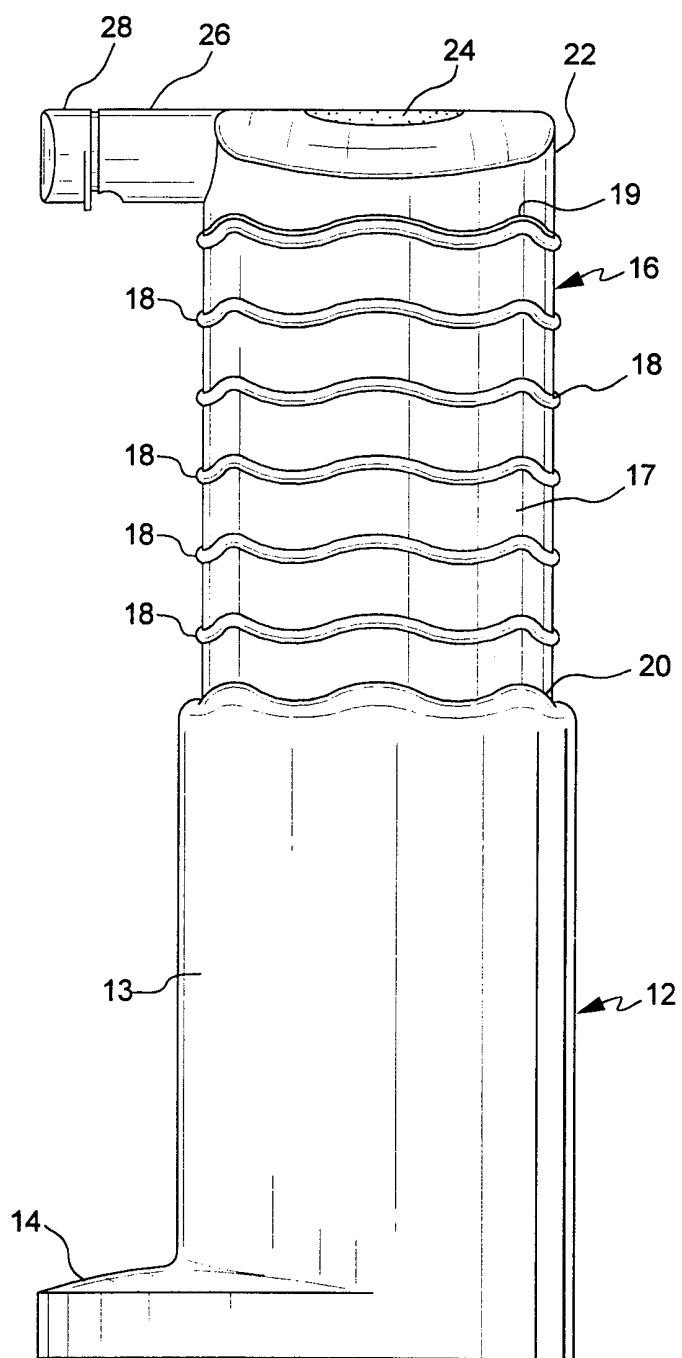
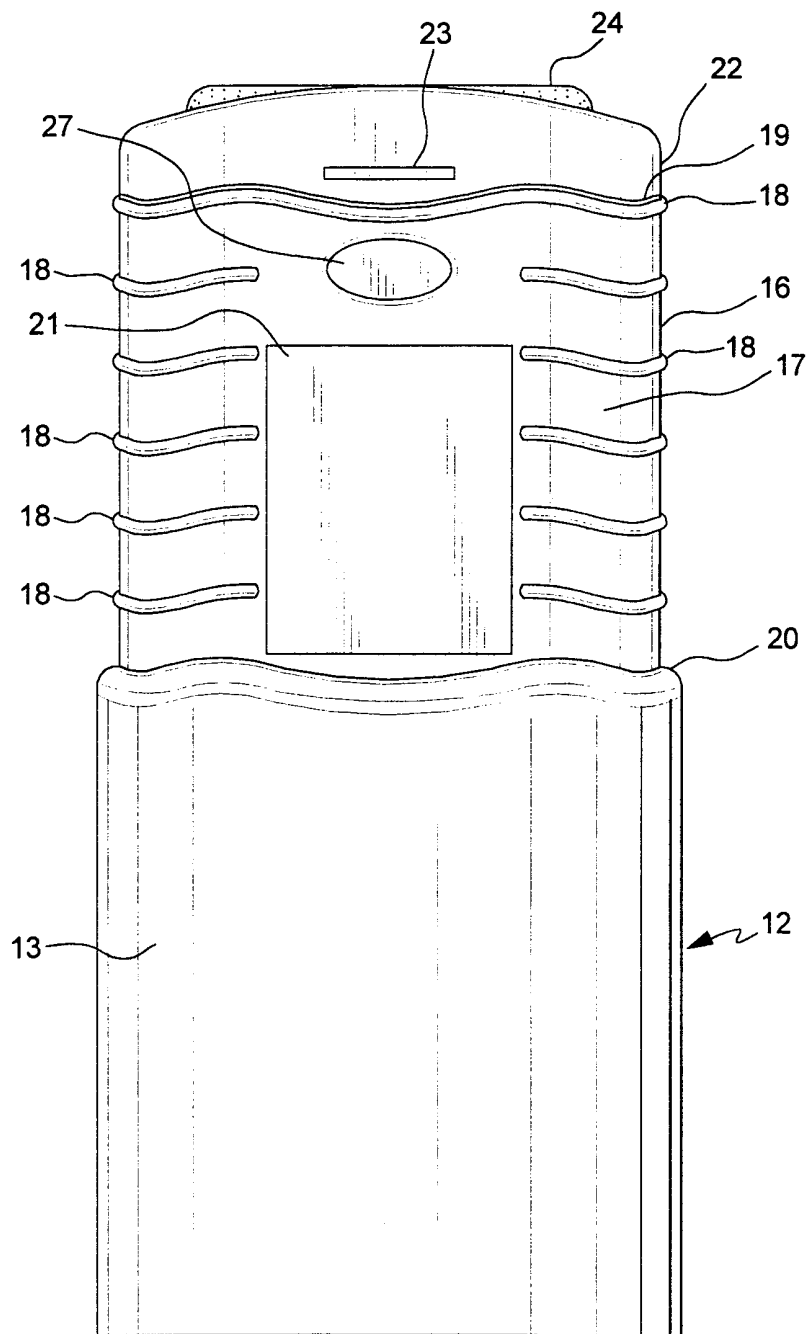


FIG. 2

*FIG. 3*

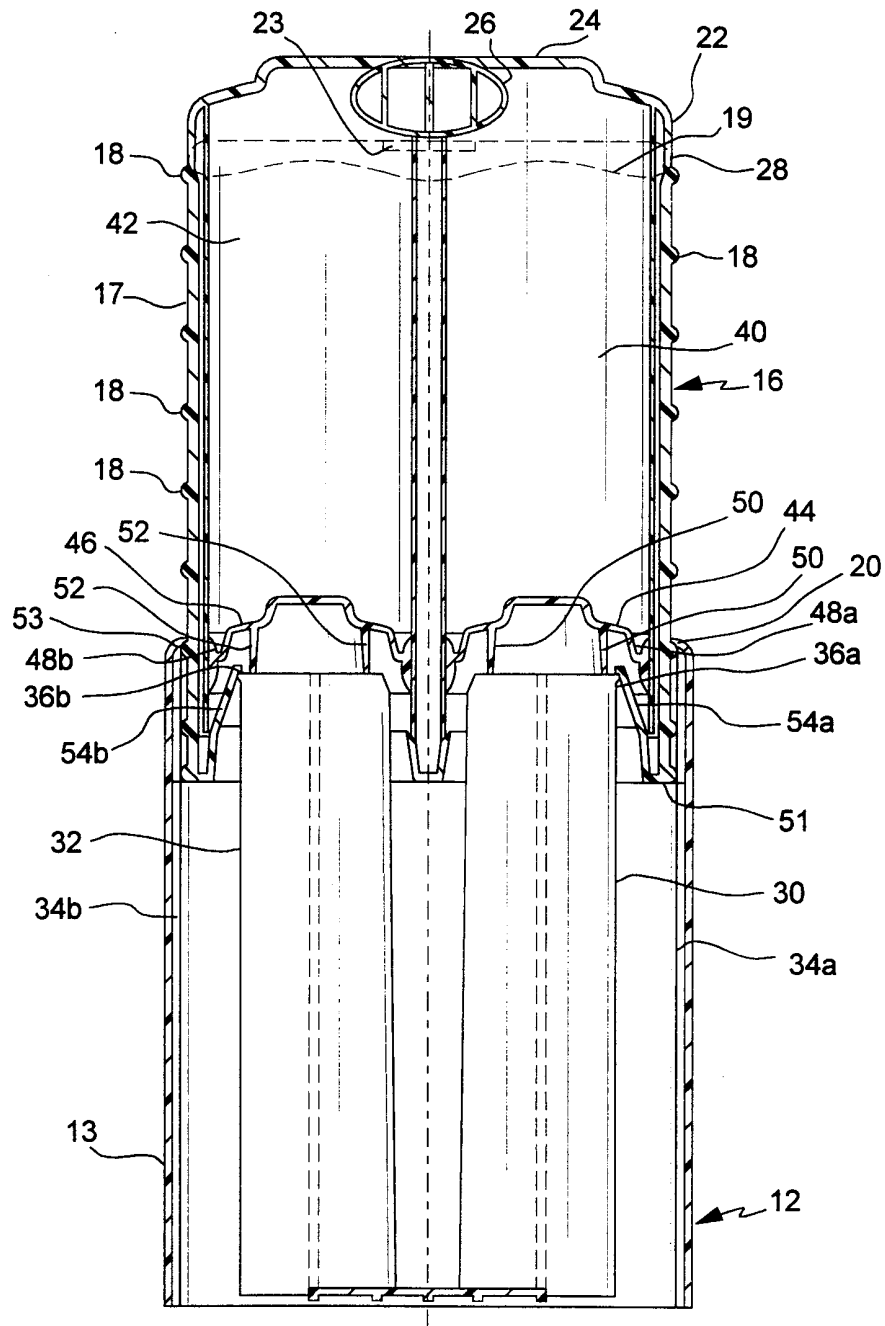


FIG. 4

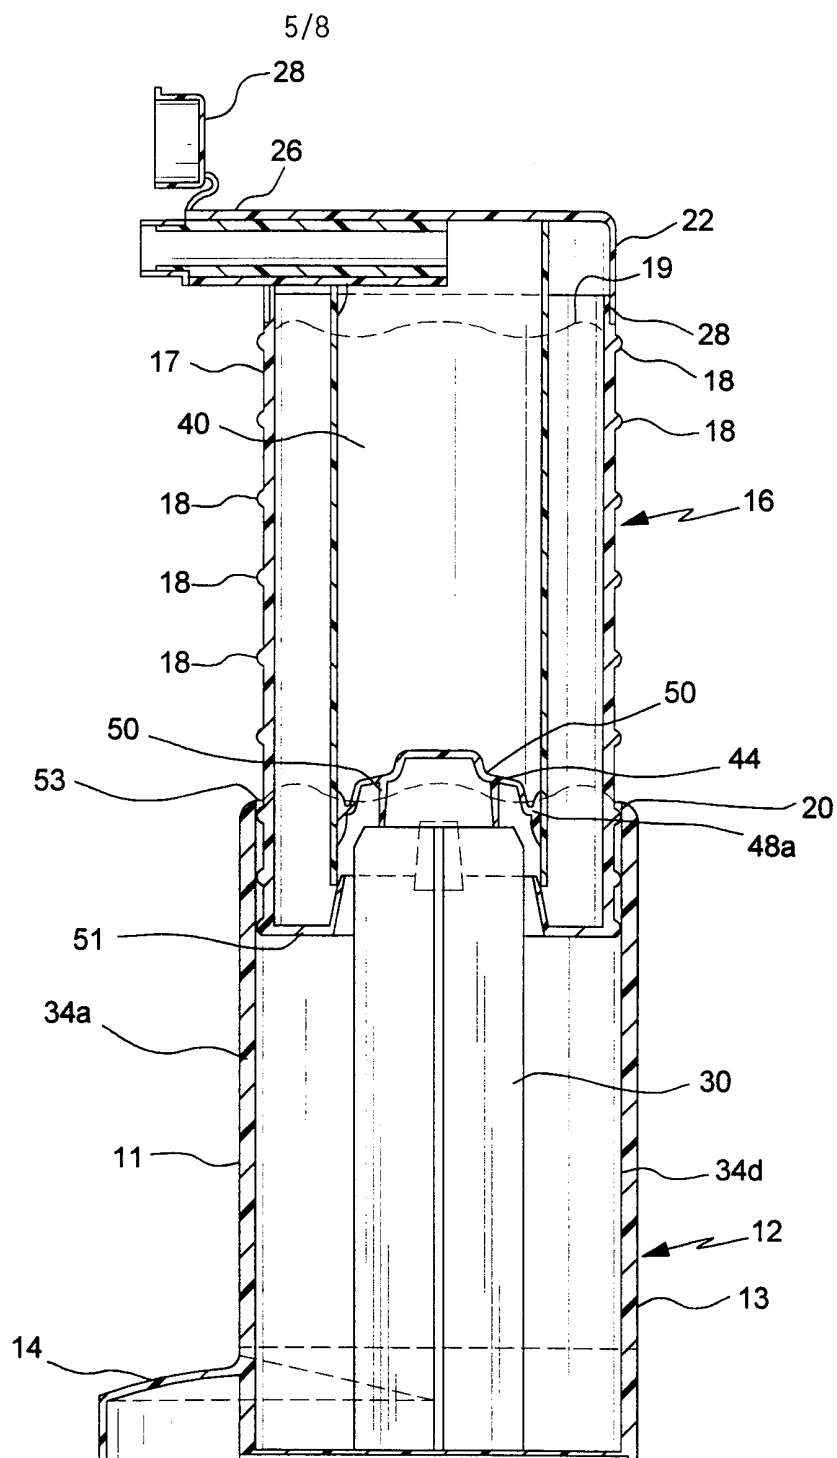


FIG. 5

6/8

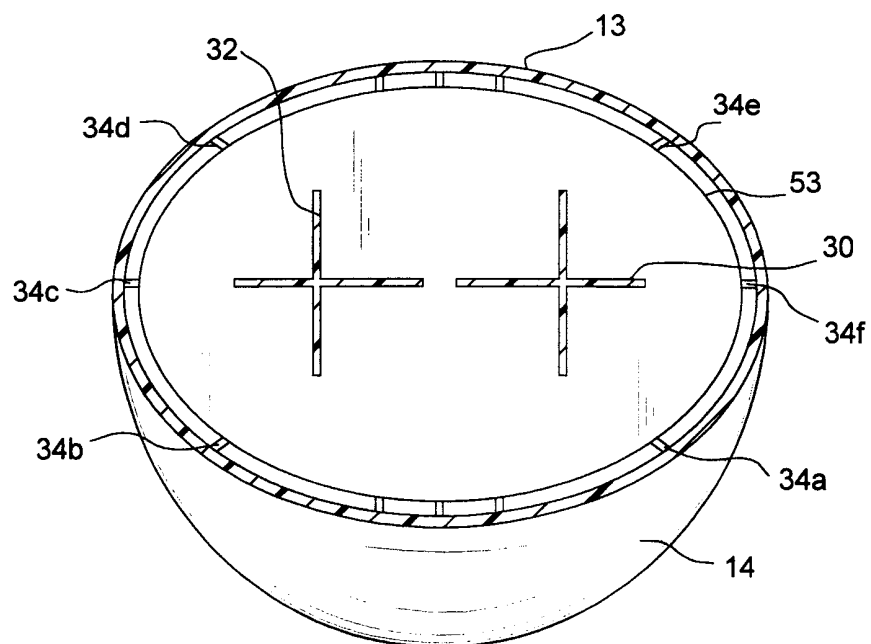


FIG. 6

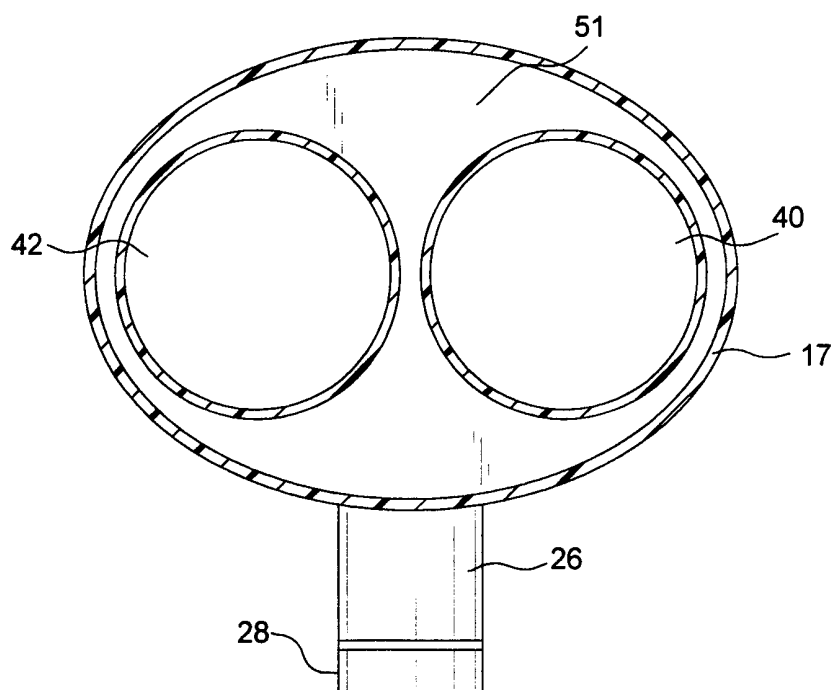
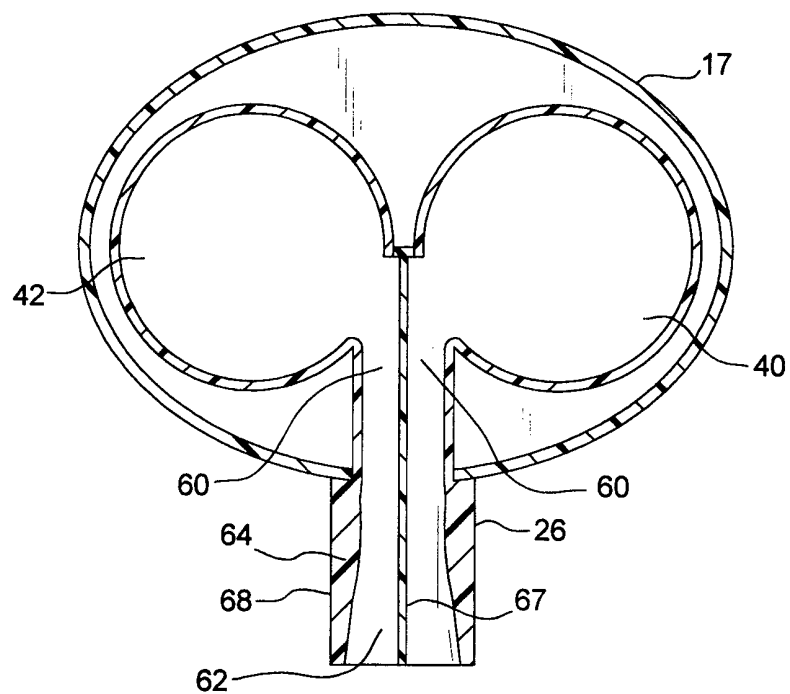


FIG. 7

*FIG. 8*

8/8

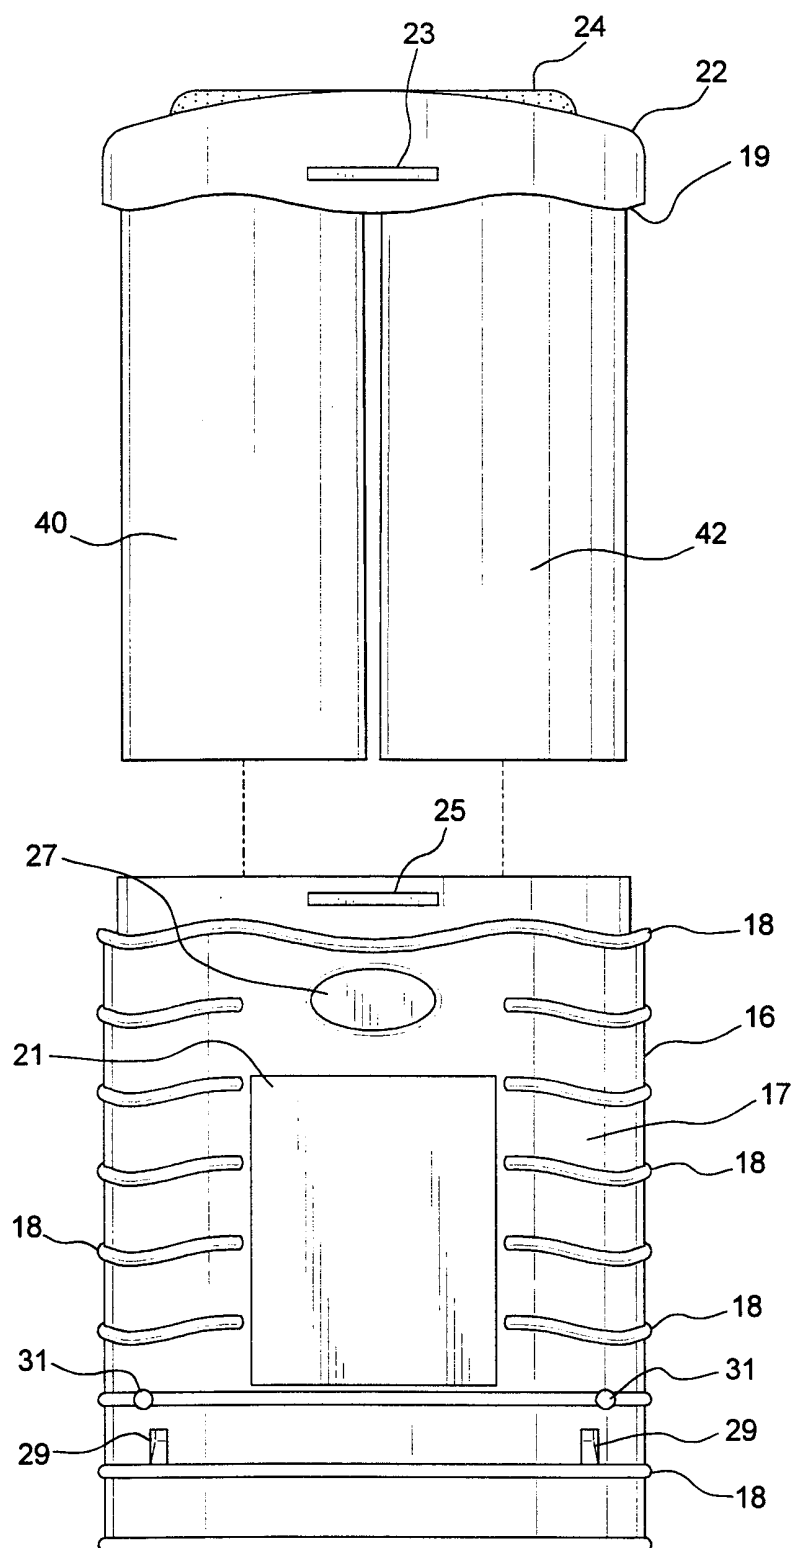


FIG. 9