

(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 2007233365 B2**

(54) Title
Devices and methods for the isolation and cultivation of microorganisms

(51) International Patent Classification(s)
C12N 1/00 (2006.01)

(21) Application No: **2007233365** (22) Date of Filing: **2007.04.03**

(87) WIPO No: **WO07/114897**

(30) Priority Data

(31) Number (32) Date (33) Country
60/789,101 2006.04.04 US

(43) Publication Date: **2007.10.11**
(44) Accepted Journal Date: **2012.04.12**

(71) Applicant(s)
Northeastern University

(72) Inventor(s)
Gavrish, Ekaterina;Epstein, Slava S.;Lewis, Kim

(74) Agent / Attorney
FB Rice, Level 23 200 Queen Street, Melbourne, VIC, 3000

(56) Related Art
US 2005/0130256 A1
US 5 081 035 A
US 2003/0059866 A1

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 October 2007 (11.10.2007)

PCT

(10) International Publication Number
WO 2007/114897 A2

(51) International Patent Classification:

G06Q 10/00 (2006.01) *G06Q 30/00* (2006.01)
G05B 19/418 (2006.01)

(21) International Application Number:

PCT/US2007/008127

(22) International Filing Date: 3 April 2007 (03.04.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/789,101 4 April 2006 (04.04.2006) US

(71) Applicant (for all designated States except US): **NORTH-EASTERN UNIVERSITY** [US/US]; 360 Huntington Avenue, Boston, MA 02115-5000 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LEWIS, Kim** [US/US]; 49 Glendale Road, Newton, MA 02459 (US). **GAVRISH, Ekaterina** [RU/US]; 137 Park Drive #36, #53, Boston, MA 02215 (US). **EPSTEIN, Slava, S.** [US/US]; 135 Bonham Road, Dedham, MA 02026 (US).

(74) Agents: **KERNER, Ann-Louise** et al.; WILMER CUTLER PICKERING HALE and DORR LLP, 60 State Street, Boston, MA 02109 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: DEVICES AND METHODS FOR THE ISOLATION AND CULTIVATION OF MICROORGANISMS



(57) Abstract: Devices and methods for isolating and/or culturing microorganisms are provided. The devices comprise one or more semi-permeable membranes and may additionally include a growth medium for the microorganism. The devices and methods described herein can be used to isolate and culture both known and novel microorganisms from any environment.



WO 2007/114897 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

5

DEVICES AND METHODS FOR THE ISOLATION AND CULTIVATION OF MICROORGANISMS

CROSS-REFERENCE TO RELATED APPLICATIONS

10

This application claims the benefit of U.S. Provisional Appl. No. 60/789,101 filed April 4, 2006, entitled, "Devices And Methods for the Isolation And Cultivation of Microorganisms," the contents of which are incorporated by reference in their entirety.

15

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Part of the work leading to this invention was carried out with United States Government support provided under a grant from The National Institutes of Health, Grant No. R21 AI059489-01. Therefore, the U.S. Government has certain rights in this invention.

20

TECHNICAL FIELD

The field relates to microbiology. More specifically, the field relates to devices and methods for the isolation and/or cultivation of known and novel microorganisms.

25

BACKGROUND

The GenBank® sequence database, which is an annotated collection of all publicly-available nucleotide and amino acid sequences, contains sequences from approximately 30,000 species of bacteria. While this number may appear impressive, it is instructive to note that a recent estimate suggests that the sea may support as many as 2 million different species of bacteria, and a ton of soil more than double that number (Curtis *et al.*, *Proc. Natl. Acad. Sci. USA* 99:10494-10499, 2002). Furthermore, only about 13,000 of the bacteria represented in GenBank® have been formally described, and almost all of these lie within 4 of the 40 bacterial divisions (DeLong, *Curr. Opin. Microbiol.* 4:290-295, 2001). The paucity of knowledge regarding other microbial species is similar or greater. This is at least in part due to the fact that the vast majority of microorganisms

from the environment resist cultivation in the laboratory. These so called "uncultivables" represent 99-99.99% of all microbial species in nature (see, e.g., Young, *ASM News* 63:417-421, 1997).

Microbial diversity is typically examined by amplifying 16S rRNA genes from DNA samples isolated from a specific habitat. The sequences are then compared to each other and to the 16S rRNA sequences from known species. If no close match to an existing 16S rRNA gene sequence is found, then the test sequence is thought to represent a new microorganism and is termed an "uncultured microorganism". 16S rRNA genes, which are critical for translation, are the genes of choice for these experiments because they are thought to be conserved across vast taxonomic distance, yet show some sequence variation between closely related species. Phylogenetic analyses of 16S rRNA sequences obtained from direct sampling of environments suggest that uncultured microorganisms can be found in nearly every taxon within Bacteria and Archaea, and several groups at the division level have been identified with no known cultivable representatives (see, e.g., Giovannoni *et al.*, *Nature* 345: 60-63, 1990; and Dojka *et al.*, *Appl. Environ. Microbiol.* 66:1617-1621, 2000).

The principal reason for this disparity is that few microorganisms from environmental samples grow on nutrient media in Petri dishes. The discrepancy between the microbial total count and plate count is several orders of magnitude. Attempts to improve the recovery of microorganisms from environmental samples by manipulating growth media have been of limited success. Accordingly, new methods for isolating and growing previously uncultivable microorganisms are desirable. These methods may be useful in identifying microorganisms that are a valuable resource of novel metabolic products useful for pharmaceutical and industrial processes. In addition, these methods may be useful in identifying microorganisms critical for decomposing and recycling nutrients at a global scale.

Any discussion of documents, acts, materials, devices, articles or the like which has been included in the present specification is not to be taken as an admission that any or all of these matters form part of the prior art base or were common general knowledge in the field relevant to the present disclosure as it existed before the priority date of each claim of this application.

Throughout this specification the word "comprise", or variations such as "comprises" or "comprising", will be understood to imply the inclusion of a stated element, integer or step, or group of elements, integers or steps, but not the exclusion of any other element, integer or step, or group of elements, integers or steps.

SUMMARY

This application relates to novel devices and methods for isolating and/or culturing microorganisms.

5 In one aspect, a device for isolating and/or cultivating a microorganism is provided that comprises a first semi-permeable membrane defining a hollow space within. The microorganism can be a previously cultured, a previously unculturable, or a novel microorganism. In some embodiments, the microorganism is selected from the group consisting of a bacterium, a fungus, a protist, and a microalga. In specific
10 embodiments, the microorganism is an actinomycetes or a microfungus. In some embodiments, the microorganism is a filamentous microorganism. In specific embodiments, the microorganism is a filamentous actinobacterium, or a filamentous fungus. In certain other embodiments, the microorganism is an extremophile.

 In some embodiments, the first semi-permeable membrane is folded onto itself
15 and attached at its peripheries so as to form a hollow space within the folded membrane. In other embodiments, the first semi-permeable membrane is attached at its peripheries as well as internally creating separate chambers within the device. The first semi-permeable membrane can be made of a natural or synthetic polymer. In some
20 embodiments, the first semi-permeable membrane is selected from the group consisting of a polycarbonate, a cellulose, an aluminum oxide, a polysulfone, an alginate, an epoxy resin, a polyacrylamide, a silica gel, and combinations thereof. The first semi-permeable membrane is attached to itself, via any method known to one of skill in the art. In
25 specific embodiments, attachment is achieved by gluing. In some embodiments, the semi-permeable membrane has a pore size of about 0.2 μm to about 10.0 μm .

 In another embodiment, the device for isolating and/or cultivating a
25 microorganism further comprises a surface. In some embodiments, the surface is one half of a petri dish, a tissue culture dish, or any other container that has a substantially hollow interior. In other embodiments, the surface is any structure that provides a site for attachment of the semi-permeable membrane such that when the membrane is
30 attached to the structure there is a substantially hollow space between the membrane and the structure.

 In some embodiments, the device further comprises a medium for growing the microorganism. In some embodiments, the medium is provided on the inner surface of the first membrane that is in contact with the environment from which the

5 microorganism is to be isolated and/or cultivated. The growth medium can be any medium that supports the growth of the microorganisms. In some embodiments, the medium is selected from the group consisting of agar, agarose, alginate, gelatin, silica gels, carrageenans, gum Arabic, guar gum, tragacanth gum, xanthan gum, propyleneglycol alginate, microcrystalline cellulose, and combinations thereof. In certain
10 embodiments, the medium can contain additives. In specific embodiments, the medium comprises about 0.5% to about 2.5% agar, about 1% vitamin solution and about 1% trace mineral solutions (ATCC®). In other specific embodiments, the medium comprises about 0.5% to about 2.5% gellan gum, about 1% vitamin solution and about 1% trace mineral solutions (ATCC®).

15 In another embodiment, the device for isolating and/or cultivating a microorganism comprises a gelating agent coated with the first semi-permeable membrane, the first semi-permeable membrane being permeable to entry of the microorganism. In some embodiments, the gelating agent is selected from the group consisting of agar, alginate, carrageenans, gum Arabic, guar gum, tragacanth gum, xanthan
20 gum, propyleneglycol alginate, microcrystalline cellulose, and combinations thereof. In some embodiments, the semi-permeable membrane has a pore size of about 0.2 μm to about 10.0 μm . The semi-permeable membrane is made of any natural, synthetic, or semi-synthetic polymers. In some embodiments, the natural, synthetic or semi-synthetic polymers are selected from the group consisting of a polysulfone, an alginate, an epoxy resin, a polyacrylamide, a silica gel, and combinations thereof.

25 In still another embodiment, the device for isolating and/or cultivating a microorganism comprises a second semi-permeable membrane having a pore size of about 0.00001 μm to about 10.0 μm . In another embodiment, the first and second membranes have a pore size of about 0.2 μm to about 10.0 μm . In further embodiments, the first membrane has a pore size of about 0.00001 μm to about 0.2 μm , and the second
30 membrane has a pore size of about 0.2 μm to about 10.0 μm . In certain embodiments, the first and second membranes are made of the same material. In certain other embodiments, the first and second membranes are made of different materials. In some embodiments, the first and second membranes are attached to each other at their

5 peripheries and define a hollow space between the two membranes. In other
embodiments, the semi-permeable membranes are attached at their peripheries as well
as internally creating separate chambers within the device. The first and second semi-
permeable membranes can be attached by any method known to one of skill in the art.
In specific embodiments, attachment is achieved by gluing. In some embodiments, the
10 device further comprises a medium for growing the microorganism. In certain
embodiments the medium is provided on the inner surface of the membrane having the
larger pore size, and which is in contact with the environment from which the
microorganism is to be isolated and/or cultivated. The growth medium can be any
medium that supports the growth of the microorganisms. In some embodiments, the
15 medium is selected from the group consisting of agar, agarose, alginate, gelatin, silica
gels, carrageenans, gum Arabic, guar gum, tragacanth gum, xanthan gum,
propyleneglycol alginate, microcrystalline cellulose, and combinations thereof. In certain
embodiments, the medium can contain additives. In specific embodiments, the medium
comprises about 0.5% to about 2.5% agar, about 1% vitamin solution and about 1% trace
20 mineral solutions (ATCC®). In other specific embodiments, the medium comprises about
0.5% to about 2.5% gellan gum, about 1% vitamin solution and about 1% trace mineral
solutions (ATCC®).

In yet another embodiment, the device comprises two semi-permeable
membranes and a structure to which the two membranes can be attached. In certain
25 embodiments, the structure is a hollow disk or ring. In some embodiments, the
membranes are attached to the upper and lower surfaces of the structure. In certain
embodiments, the membranes are glued to the upper and lower edges of the structure to
create a substantially hollow closed space between the two membranes. In one
embodiment, the first and second membranes have a pore size of about 0.00001 μm to
30 about 10.0 μm . In another embodiment, the first and second membranes have a pore
size of about 0.2 μm to about 10.0 μm . In further embodiments, the first membrane has a
pore size of about 0.00001 μm to about 0.2 μm , and the second membrane has a pore size
of about 0.2 μm to about 10.0 μm . In some embodiments, the first and second
membranes are made of the same material. In other embodiments, the first and second

5 membranes are made of different materials. In some embodiments, the device further comprises a medium for growing the microorganism. In other embodiments, the medium is provided on the inner surface of the membrane having the larger pore size, and which is in contact with the environment from which the microorganism is to be isolated and/or cultivated.

10 In some embodiments, the device further comprises modifications that allow it to be employed in the environment of interest.

In another aspect, a device for cultivating or isolating a microorganism is provided, which comprises a chamber having a solid, impermeable, outer boundary defining a substantially hollow space within. The chamber has an upper surface and a
15 lower surface. The device further comprises a first semi-permeable membrane attached to the upper surface of the chamber and a second semi-permeable membrane attached to the lower surface of the chamber. The first and second semi-permeable membranes are attached to the chamber, via any method known to one of skill in the art. In specific embodiments, attachment is achieved by gluing.

20 The semi-permeable membrane can be made of a natural, synthetic, or semi-synthetic polymer. In some embodiments, the semi-permeable membrane is selected from the group consisting of a polycarbonate, a cellulose, an aluminum oxide, a polysulfone, an alginate, an epoxy resin, a polyacrylamide, a silica gel, and combinations thereof. In some embodiments, the second membrane has a pore size larger than the
25 pore size of the first semi-permeable membrane. In other embodiments, the second membrane has the same pore size as the first semi-permeable membrane. In some embodiments, the first and second membranes have a pore size of about 0.00001 μm to about 10.0 μm . In another embodiment, the first and second membranes have a pore size of about 0.2 μm to about 10.0 μm . In further embodiments, the first membrane has a
30 pore size of about 0.00001 μm to about 0.2 μm , and the second membrane has a pore size of about 0.2 μm to about 10.0 μm .

The microorganism can be a previously cultured, a previously unculturable, or a novel microorganism. In some embodiments, the microorganism is selected from the group consisting of a bacterium, a fungus, a protist, and a microalga. In specific

5 embodiments, the microorganism is an actinomycetes or a microfungus. In some
embodiments, the microorganism is a filamentous microorganism. In specific
embodiments, the microorganism is a filamentous actinobacterium, or a filamentous
fungus. In certain other embodiments, the microorganism is an extremophile.

10 In some embodiments, the chamber is a washer. In specific embodiments, the
washer comprises a material selected from the group consisting of metal, plastic, brass,
fiber, glass, ceramic, nylon, Teflon®, and combinations thereof. In some embodiments,
the washer is selected from the group consisting of an inner race spacer, an outer race
spacer, a fender washer, a metric washer, and a flat washer. In some embodiments, the
device further comprises a medium for growing the microorganism. In other
15 embodiments, the medium is provided on the inner surface of the membrane having the
larger pore size, and which is in contact with the environment from which the
microorganism is to be isolated and/or cultivated. In some embodiments, the device
further comprises one or more modifications that allow it to be employed in the
environment of interest.

20 In another aspect, a device for cultivating or isolating a microorganism is
provided that comprises a washer having an upper surface and a lower surface, the
washer defining a substantially hollow space within. The microorganism can be a
previously cultured, a previously unculturable, or a novel microorganism. In some
embodiments, the microorganism is selected from the group consisting of a bacterium, a
25 fungus, a protist, and a microalga. In specific embodiments, the microorganism is an
actinomycetes or a microfungus. In some embodiments, the microorganism is a
filamentous microorganism. In specific embodiments, the microorganism is a
filamentous actinobacterium, or a filamentous fungus. In certain other embodiments,
the microorganism is an extremophile.

30 In some embodiments, the washer comprises a material selected from the group
consisting of metal, plastic, brass, fiber, glass, ceramic, nylon, Teflon®, and combinations
thereof. In some embodiments, the washer is selected from the group consisting of an
inner race spacer, an outer race spacer, a fender washer, a metric washer, and a flat
washer. In some embodiments, a first semi-permeable membrane having a pore size of

5 about 0.00001 μm to about 0.2 μm is attached to the upper flat surface of the washer. In some embodiments, a first semi-permeable membrane having a pore size of about 0.02 μm to about 0.03 μm is attached to the upper surface of the washer. In other embodiments, a second semi-permeable membrane having a pore size of about 0.2 μm to about 10.0 μm is attached to the lower surface of the washer. In certain embodiments, a
10 second semi-permeable membrane having a pore size of about 0.2 μm to about 0.45 μm is attached to the lower flat surface of the washer. The semi-permeable membranes can be attached to the washer, via any method known to one of skill in the art. In specific embodiments, attachment is achieved by gluing.

In some embodiments, the device further comprises a medium for growing the
15 microorganism. In certain embodiments, the medium is provided on the inner surface of the membrane having the larger pore size, and which is in contact with the environment from which the microorganism is to be isolated and/or cultivated. In certain embodiments, the device further comprises one or more modifications that allow it to be employed in the environment of interest.

20 In a different aspect, a method for isolating and/or cultivating a microorganism from an environment is provided. The method comprises placing any of the devices described above in an environment of interest. The environment contains, or may contain, the microorganism. The microorganism can be a previously cultured, a previously unculturable, or a novel microorganism. In some embodiments, the
25 microorganism is selected from the group consisting of a bacterium, a fungus, a protist, and a microalga. In specific embodiments, the microorganism is an actinomycetes or a microfungus. In some embodiments, the microorganism is a filamentous microorganism. In specific embodiments, the microorganism is a filamentous actinobacterium, or a filamentous fungus. In certain other embodiments, the
30 microorganism is an extremophile. In certain other embodiments, the microorganism is a plankton.

The method involves allowing the microorganism to enter the device through one or more pores in the semi-permeable membrane, and form colonies within the

device. The device is generally placed on the surface of, or immersed within, the environment of interest.

5 In certain embodiments, the environment is a natural environment, or an artificial environment. In other embodiments, the environment is a replicated version of the natural environment. In certain embodiments, the environment is selected from the group consisting of terrestrial, aquatic, space, and extreme environments. In specific embodiments, the environment is a marine environment, a fresh water environment, a wetland environment, a forest, a landfill, a mine, or a farmland. In certain other embodiments, the device is placed on the surface of, or within, sediments
10 or soils. In other embodiments, the device is suspended in a water column. In specific embodiments, the sediment or soil is from a forest, a farmland, a tundra region, an alpine region, a landfill, a mine, a coral sediment, a siliceous sediment, a carbonate sediment, or a plant material-rich sediment.

15 In some cases, the microorganism may form colonies on the inner surface of the membrane in contact with the environment. In other cases, the microorganism may form colonies on or within a medium in the device. In certain other cases, the microorganism may form colonies on the outside surface of the membranes.

20 In certain embodiments, the method further includes opening the device, picking colonies of the microorganism and/or reinoculating the microorganism in a fresh device. In certain embodiments, the method further includes opening the device, and replica plating the inner surface of the membrane of the device that was in contact with the environment onto a nutrient-containing medium.

25 In certain embodiments, the method further includes identifying the microorganisms in the device. In some embodiments, identification is achieved by a method selected from the group consisting of 16S rRNA sequencing, whole genome shot gun sequencing, microarrays, and combinations thereof.

30 In one embodiment, the present invention provides a device for cultivating or isolating a microorganism, comprising a first semi-permeable membrane defining a closed, sealed, hollow space within, wherein the semi-permeable membrane has a pore size of about 0.2 μm to about 10.0 μm .

In one embodiment, the present invention provides a device for cultivating or isolating a microorganism, comprising:

- 35 (a) a structure having a solid, impermeable, outer boundary defining a hollow space within, the structure having an upper surface and a lower surface;
- (b) a first semi-permeable membrane attached to the upper surface of the structure, the first membrane having a pore size of about 0.000001 μm to about 0.2 μm ; and

(c) a second semi-permeable membrane attached to the lower surface of the structure, the second membrane having a pore size of about 0.2 μm to about 10 μm .

In one embodiment, the present invention provides a device for cultivating or isolating a microorganism, comprising:

5 (a) a washer having an upper and lower surface, the washer defining a hollow space within;

(b) a first semi-permeable membrane having a pore size of about 0.000001 μm to about 0.2 μm , wherein the first semi-permeable membrane is attached to the upper flat surface of the washer; and

10 (c) a second semi-permeable membrane having a pore size of about 0.2 μm to about 10.0 μm , wherein the second semi-permeable membrane is attached to the lower flat surface of the washer.

In one embodiment, the present invention provides a method for cultivating or isolating a microorganism, comprising:

15 (a) placing the device of the invention, in an environment containing the microorganism; and

(b) allowing the microorganism to enter the hollow space through a pore in the membrane and form colonies therein.

20 In one embodiment, the present invention provides a method for cultivating or isolating a microorganism, comprising:

(a) placing the device of the invention, in an environment containing the microorganism;

(b) allowing the microorganism to enter the medium in the hollow space through a pore in the membrane and form colonies therein.

25

5

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects of the present invention, the various features thereof, as well as the invention itself may be more fully understood from the following description, when read together with the accompanying drawings in which:

Fig. 1A is a photographic representation of a non-limiting embodiment of a
10 device described in this application that is used to isolate and/or cultivate microorganisms. The device is comprised of a metal or plastic washer (1); a 0.03 μm pore-size polycarbonate membrane filter attached to the upper surface of the washer (2); a 0.2 μm to 0.8 μm pore-size polycarbonate membrane filter attached to the bottom surface of the washer (3); and a growth medium (*e.g.*, agar or gellan gum base) in the
15 space defined between the two membranes (4).

Fig. 1B is a schematic representation of a cross-sectional view of the device shown in Fig. 1A.

Fig. 2A is a photographic representation of actinobacterial microcolonies growing within the gellan gum base of the device described in Fig. 1A with a 0.2 μm pore size
20 bottom membrane, after 7 days of incubation of the device at room temperature.

Fig. 2B is a photographic representation of an enlarged view of the actinobacterial microcolonies of Fig. 2A.

Fig. 3A is a photographic representation of actinobacterial aerial and substrate mycelia on the surface of the gellan gum base of the device of Fig. 1A with a 0.2 μm pore
25 size bottom membrane, after 14 days of incubation of the device.

Fig. 3B is a photographic representation of actinobacterial aerial and substrate mycelia on the surface of the gellan gum base of the device of Fig. 1A with a 0.2 μm pore size bottom membrane, after 14 days of incubation of the device.

Fig. 3C is a photographic representation of actinobacterial substrate mycelia on
30 the surface of the gellan gum base of the device of Fig. 1A with a 0.2 μm pore size bottom membrane, after 14 days of incubation of the device.

Fig. 3D is a photographic representation of actinobacterial aerial and substrate mycelia on the surface of the gellan gum base of the device of Fig. 1A with a 0.2 μm pore size bottom membrane, after 14 days of incubation of the device.

5 Fig. 3E is a photographic representation of actinobacterial aerial and substrate mycelia on the surface of the gellan gum base of the device of Fig. 1A with a 0.2 μm pore size bottom membrane, after 14 days of incubation of the device.

 Fig. 4 is a schematic representation of a cross-sectional view of another non-limiting embodiment of a device of the invention used for isolating and cultivating
10 microorganisms. The device shown in the figure is formed by a metal or plastic washer (a); a 0.03 μm pore-size polycarbonate membrane filter attached to the upper surface of the washer (b); and a 0.2 μm or 0.4 μm pore size polycarbonate membrane filter attached to the bottom surface of the washer (c).

 Fig. 5A is a photographic representation of colonies of bacteria growing on the
15 0.4 μm pore size membrane attached to the bottom surface of the washer of Fig. 4.

 Fig. 5B is a photographic representation of colonies of bacteria growing on the 0.4 μm pore size membrane attached to the bottom surface of the washer of Fig. 4.

 Fig. 6 is a photographic representation of colonies that form on nutrient agar 7 days after replica-plating a 0.4 μm pore size membrane attached to the bottom surface of
20 the washer of Fig. 4.

DETAILED DESCRIPTION

 All references cited herein are incorporated herein by reference in their entirety and for all purposes to the same extent as if each individual publication or patent or
25 patent application was specifically and individually indicated to be incorporated by reference in its entirety for all purposes. To the extent publications and patents or patent applications incorporated by reference contradict the disclosure contained in the specification, the specification is intended to supercede and/or take precedence over any such contradictory material.

30 This application features devices and methods for isolating and cultivating microorganisms. These devices and methods are based on the discovery that microorganisms can be isolated and cultivated from an environment of interest using a device having a semi-permeable membrane into which microorganisms can enter from the environment. When the device is placed in a specific environment, microorganisms

- 5 can enter the device from the environment through the pores of the membrane and form colonies within the device on the inner surface of the membrane through which it entered the device, or on the surface of, or within, a growth medium within the device.

Devices for Isolating and Cultivating Microorganisms

- 10 The growth and cultivation devices of the present invention comprise, in its simplest form, a closed or sealed semi-permeable membrane. The terms "closed" or "sealed" are used herein to mean that the semi-permeable membrane separates the space enclosed by the membrane from the environment. This separation still permits entry of microorganisms or small diffusible molecules through the pores of the semi-permeable
15 membrane.

- The semi-permeable membrane may be closed by being folded onto itself and the peripheries of the folded membrane can be attached together to create a closed inner space. The semi-permeable membrane can also be constructed as a closed bag, a balloon, or any other structure into which the microorganism can enter and grow. The semi-
20 permeable membranes can be attached to itself, to other semi-permeable membranes, or structures such as the edges of Petri dishes, or surfaces of washers using any method known to one of ordinary skill in the art (e.g., by gluing or heat-fusing). The mode of attachment is chosen based on the ability to adhere membranes or other surfaces, and to be able to withstand environmental conditions. Most importantly, the mode of
25 attachment is generally non-toxic for microorganisms. In some instances, a sealant is used. SuperSilicon Type 7 (Versachem Corp.), is a very sturdy compound, which holds extremely well under most adverse conditions. Tests on this sealant's toxicity proved negative as the sealant exhibited no effect on *E.coli* growth. The semi-permeable membrane can also be attached to a surface (e.g., one half of a petri dish, or other
30 container), to create a closed space between the surface and the membrane. The semi-permeable membrane has a pore size of about 0.2 μm to about 10.0 μm . By "about" as used throughout this disclosure, is meant a numeric value having a range of $\pm 20\%$ around the cited value. The semi-permeable membranes for the devices described herein can be made of any natural or synthetic polymer. The membranes are generally

5 chosen so that they are sufficiently robust to withstand the environment in which they are placed. Non-limiting examples of membranes for use herein include polycarbonate membranes, cellulose membranes, and aluminum membranes.

In a different form, the device of the invention comprises two semi-permeable membranes. The two membranes are attached to each other at their peripheries and
10 define a hollow space between the two membranes. The two semi-permeable membranes can also be attached to a surface such as a ring, a disk, or a solid surface. The two membranes can be made of the same or of different materials (*e.g.*, natural or synthetic polymers). In addition, the membranes may have the same pore sizes or different pore sizes. For example, the two membranes have a pore size of about 0.2 μm
15 to about 10.0 μm . Alternatively, one of the two membranes has a pore size of about 0.00001 μm to about 0.2 μm , and the second membrane has a pore size of about 0.2 μm to about 10.0 μm .

The devices described above can also include further modifications, such as attachments to weigh the membrane down to allow it to remain on the surface of the
20 environment in which it is placed, or hooks or clasps to hold or position the device in a specific environment. The shape, size, and modifications of the device can easily be determined by one of ordinary skill in the art depending upon several factors including, but not limited to, the nature of the environment from which the microorganism is to be isolated, the temperature of the environment, the number of colonies to be isolated, etc.

25 One device of the invention comprises a structure having an upper surface and a lower surface, and having a solid, impermeable, outer boundary defining a hollow space within. Semi-permeable membranes are attached to the upper and lower surfaces of the structure, thereby enclosing the hollow space within the structure. The membranes attached to the upper and lower surfaces of the structure can be made of the same or of
30 different materials. Useful materials for use in the invention include any natural or synthetic polymer. In addition, the membranes may have the same pore sizes or different pore sizes. In certain non-limiting examples, the two membranes have a pore size of about 0.2 μm to about 10.0 μm . In other non-limiting examples, one of the two

5 membranes has a pore size of about 0.00001 μm to about 0.2 μm , and the second membrane has a pore size of about 0.2 μm to about 10.0 μm .

In a specific embodiment, the structure comprises a washer. A washer is a thin disk with a hole, usually in the middle, and it is normally used to support the load of a threaded fastener. Any kind of washer can be used in the devices of the invention. Non-
10 limiting examples of washers include, a metal washer, a plastic washer, a brass washer, a fiber washer, a metric washer, a nylon washer, a Teflon® washer, an inner race spacer, an outer race spacer, a fender washer, and a flat washer. The semi-permeable membranes, as described above, are attached to the upper and lower surfaces of the washer, thereby enclosing the hollow space of the washer.

15 All of the devices of the invention described above can further include a growth medium. The growth medium can be any medium that supports microbial growth. Non-limiting examples of suitable media include agar base, agarose, gelatin gum, alginate, propylenglycoalginate, hydrogels, silica gels, carrageenans, gum Arabic, guar gum, tragacanth gum, xanthan gum, microcrystalline cellulose, and combinations thereof.
20 The media can also contain additives such as vitamins and minerals. Specific non-limiting examples of growth media include Base 1 (about 0.5% to about 2.5% agar, 1% vitamin solutions, and 1% trace mineral solutions), or Base 2 (about 0.5% to about 2.5% gellan gum, 1% vitamin solutions, and 1% trace mineral solutions).

Some microbes may require specific surfaces such as a solid surface for
25 attachment and growth. In the absence of such surfaces, these organisms may be unable to divide and/or form colonies. In such instances (*e.g.*, those involving growing microorganisms from marine sandy tidal flats), sterilized sand may be added to the agar in the medium.

Certain devices for isolating and/or cultivating microorganisms can be
30 constructed by enclosing or encapsulating a suitable growth medium with a natural or synthetic polymer which can form a semi-permeable film or coating. The polymers may have a pore size of about 0.2 μm to about 10.0 μm , but may also have a pore size of about 0.00001 μm to about 10.0 μm . Non-limiting examples of natural or synthetic polymers

5 that can be used for the devices described herein include polysulfones, alginates, epoxy resins, polyacrylamides, silica gels, and combinations thereof.

Methods for Isolating and Cultivating Microorganisms

The devices described herein are useful in methods for isolating and/or cultivating microorganisms. Such methods generally involve providing a device of the invention in an environment from which a microorganism is to be isolated and allowing one or more microorganisms to enter the device and form colonies within the device. The device is generally placed on the surface of, or immersed in, the desired environment. Microorganisms enter the device through the pores of the semi-permeable membrane and form colonies on the inner surface of the membrane through which it enters the device. In those devices where a growth medium is present, the microorganism forms colonies on the surface of the growth medium, or within the growth medium. In some instances, the microorganisms may form colonies on the outside surface of the device. The microorganisms can then be isolated, cultivated, and identified.

20

Types of Microorganisms

The microorganism to be isolated and cultivated can be a known microorganism, a previously unculturable microorganism, or a novel microorganism. In some cases, the microorganism to be isolated and/or cultivated is from one of the three known domains of cellular organisms namely, Bacteria, Archaea, or Eukarya. Non-limiting examples of microorganisms that can be isolated and cultivated using the devices described herein are bacteria, fungi, protists, and microalgae. Although any microorganism can be isolated and cultivated with the devices described, the devices are most useful for filamentous microorganisms. This is because filamentous microorganisms can easily enter the device through the pores of the semi-permeable membrane. Non-limiting examples of filamentous microorganisms include filamentous actinobacteria and filamentous fungi.

30

5 *Environments from which the Microorganisms are Isolated and/or Cultivated*

Microorganisms can be isolated and cultivated from any environment. The environment can be a natural environment, an artificial environment, or a replicated version of the natural environment. "A replicated version of the natural environment" means any environment created in a laboratory setting to recapitulate the natural
10 environment to the extent that this is possible. For example, a replicated version of a marine environment may be an aquarium containing water and sediment from the marine environment. A replicated version of a forest soil environment may include a container containing soil obtained from the forest. Non-limiting representative environments from which microorganisms can be obtained include terrestrial
15 environments, aquatic environments, extreme environments, and planetary or other space environments.

Some environments include fresh water, seawater, sediments and soils, such as from a forest, a farmland, a tundra region, an alpine region, a landfill, or a mine. Marine sediments include, but are not limited to, a coral sediment, a siliceous environment, a
20 carbonate environment, and a plant material-rich environment (*e.g.*, mangrove). Other useful environments include specific areas in a building, *e.g.*, a hospital, with microorganisms being isolated from a site such as the ventilation system, a bathroom wall surface, or a hospital room surface.

Other environments from which microorganisms can be isolated include extreme
25 environments. By "extreme environment" is meant any environment wherein conditions such as pH level, air pressure, temperature, salinity, radiation, dryness (desiccation), and oxygen level are significantly different from the rest of the Earth where most organisms normally live. Such environments are expected to lead to the discovery of microorganisms including, but not limited to, anaerobes, thermophiles,
30 psychrophiles, acidophiles, alkalophiles, halophiles, barophiles, and xerophiles.

As space exploration moves forward, the new environments that are identified will be ideal locations in which the devices described herein may be useful for identifying new microorganisms. The devices can be taken into space (*e.g.*, Mars) and

5 placed in these new environments, or soil or other materials brought from space can be used to identify microorganisms in a laboratory on Earth.

The devices described herein may also be used to isolate and cultivate microorganisms from a subject such as a human or a domesticated animal. The device may be placed in a location where microorganisms are expected to be present, such as
10 the mouth. In order to be used in this manner, the device may need to be modified (*e.g.*, addition of a structure that allows the semi-permeable membrane to be placed in/at a particular location). For example, to identify microorganisms from the mouth of a human subject, any of the devices described herein may be attached to a wooden or plastic strip to hold the device in the mouth of the subject. Accordingly, these methods
15 can be useful in diagnosing microbial infections in a subject.

Incubation

In order to isolate and/or cultivate the microorganisms, the devices described herein are incubated in the environment of choice for a sufficient period of time to allow
20 microorganisms to enter the device and form colonies. Typically, the devices are incubated on the surface of or immersed in the environment. For example, the device may be placed on the surface of forest soil, or a replicated version of this forest environment. Alternatively, or additionally, the device may be inserted within the soil. When the device is placed on the surface of the environment, and the device is one with
25 at least semi-permeable membranes, the semi-permeable membrane having the larger pore size is placed in contact with the environment containing the microorganism to be isolated and cultivated.

The device may be incubated in the environment of choice for as long as the investigator has determined it to be necessary, *e.g.*, for at least a day, at least 2 days, at
30 least 3 days, at least 4 days, at least 5 days, at least 6 days, at least 7 days, at least 8 days, at least 9 days, at least 10 days, at least 11 days, at least 12 days, at least 13 days, at least 14 days, or at least 15 days. In some cases the device is incubated in the environment of choice for about 1 day to about 14 days, from about 5 days to about 7 days, or from about 5 days to about 14 days.

5 If the device is incubated in a replicated version of the natural environment, incubation is typically performed at room temperature, or at the temperature the natural environment has been measured to be. However, the temperature for incubation can be determined by one of ordinary skill in the art depending on the specific situation at hand.

10

Methods of Detecting Microorganisms

 After incubation of the devices described herein in the environment of choice for a specified period, the device can be opened to determine if colonies have formed. Detection may be by any known method known in the art including, but not limited to, simple visual inspection or by microscopic methods.

15

 Prior work with marine microbes indicates that in sediments, solitary microorganisms are rare and that most microbes form microcolonies on the surface of sand grains and detrital particles. These microcolonies, which are quite small and consist only of a few dozen to several hundred cells, are many times smaller than can be detected under a dissecting microscope. Naturally, such colonies will be missed unless they are specifically searched for. One method of visualizing these microcolonies is under a compound microscope using vital dyes (*e.g.*, acridine orange, fluorescein isothiocyanate, rhodamine, calcofluor, europium chelate). Nomarski Differential Interference Contrast microscopy is also very useful. However, even if the cells are contrasted against the background by vital staining/Nomarski microscopy, handling these colonies for subculturing can be challenging. Therefore, other ways to sample and manipulate milligrams of agar and handle very small numbers of cells have been developed. With semi-liquid agar as the growth medium, a tungsten wire has proven very useful, with or without a micromanipulator to operate it. Also of particular help is an additional prism in the microscope to compensate for the image inversion that is an almost universal feature of compound microscopes. With this modification, the microscope shows objects with no left-to-right inversion, which greatly facilitates manipulation of the tungsten wire. A microscope facility particularly suitable for handling such samples may include, *e.g.*, a Zeiss Axioplan 2 MOT equipped for

20
25
30

5 fluorescence imaging, a Nomarski/DIC microscope, a phase contrast microscope, and a state of the art imaging system (e.g., a Hamamatsu ultrafast high resolution cooled CCD camera operated by an Improvion software package OpenLab, which is capable of confocal imaging and 3-D rendering).

10 *Identification of Microorganisms*

To identify the microorganism(s) that grow in the devices of the invention, cells from the colonies obtained from the device can be analyzed by any method known in the art. For example, one useful identification method is 16S RNA gene sequencing. This method involves isolating DNA from the microorganism(s), for example, by using a
15 Qiagen DNA Mini Kit (Qiagen, Valencia, CA). The 16S rRNA gene from the microorganism(s) can be amplified using primers for the 16S rRNA gene by PCR, and the amplified products can be sequenced, for example, by using a Big Dye terminator cycle sequencing kit (Applied BioSystems, Foster City, CA). A comparison of the sequenced gene using, e.g., the online GenBank® database with known 16S RNA genes
20 can identify the organism and can show whether or not it represents a new species/genus.

Other methods of identifying the microorganisms include using microarrays (see, e.g., Wang *et al.*, *PLoS Biol* 1:2003), or whole genome shotgun sequencing (see, e.g., Tyson *et al.*, *Nature*, 428(6978):37-43, 2004; and Venter *et al.*, *Science*, 304(5667):66-74, 2004).

25 Filamentous microorganisms, in particular, can be identified by using methods for filament identification known in the art including, but not limited to, wet mounting, Gram staining, Neisser staining, PHB staining, sheath staining, polysaccharide (India Ink) staining, and sulfur oxidation testing.

30 *Reinoculation*

The colonies obtained from the devices of the invention can be used to reinoculate the devices described herein to increase microorganism numbers. For example, colonies of microorganisms can be picked up about 5 days to about 7 days after incubation in a given environment using sterile tooth picks or sterile Pasteur pipettes,

5 homogenized, and used to inoculate new devices. In other cases, the microorganisms are picked up after about 10 days to about 14 days after incubation in a given environment. This amount of time will allow certain microorganisms to form aerial mycelia, making it easier to pick the microorganism for reinoculation.

The inoculated devices can be replaced in the environment from which the
10 microorganism was obtained, or placed in a replicated version of this environment. The semi-permeable membrane(s) will allow components of the natural environment to diffuse into the chamber that are needed by the microorganism to grow.

Alternatively, the devices can be placed into a different, or artificial environment. In such cases it may be possible to select microorganisms that have different or newly
15 obtained characteristics such as the ability to grow in salt as well as fresh water, or ability to grow at a range of temperatures rather than room temperature.

The invention is illustrated further by the following examples, which are not to be construed as limiting the invention in scope or spirit to the specific procedures described therein. On the contrary, it is to be clearly understood that resort may be had
20 to various other embodiments, modifications, and equivalents thereof which, after reading the description herein, may suggest themselves to those skilled in the art without departing from the spirit of the present invention and/or the scope of the appended claims.

25 EXAMPLES

Example 1

Construction of a Device for *In Situ* Cultivation of Microorganisms

An exemplary device for *in situ* cultivation of microorganisms according to the
30 invention is illustrated in Figs. 1A and 1B of this application.

The device is comprised of a metal or plastic washer (*e.g.*, 70 mm outer diameter, 33 mm inner diameter, 3 mm in thickness; Bruce Watkins Supply, Inc., Wilmington, NC), and two semi-permeable polycarbonate membranes having different pore sizes. One of the polycarbonate membranes had a pore size of about 0.03 μm (Osmonics, Inc.,
35 Westborough, MA), whereas the second membrane had a pore size of about 0.2 μm to

5 about 0.5 μm (ISOPORE™, Millipore Corporation). Between the two polycarbonate membranes is a hollow space within which microorganisms can grow.

To construct the device, the polycarbonate membrane having the larger pore size was glued with Silicon Glue II (General Electric, Waterford, NY) to the bottom surface of the washer. After this membrane had been affixed to the bottom of the washer, 3 ml of
10 Base 1 media (1.2% agar, 1% vitamin solution, and 1% trace mineral solutions (ATCC®) or 3 ml Base 2 media (1.5% gellan gum, 1% vitamin solution, and 1% trace mineral solutions (ATCC®) was poured onto this membrane partially filling the inner space. Next, the upper surface of the washer was sealed with the polycarbonate membrane having the smaller pore size using Silicon Glue II, leaving an air space between the top of
15 the media surface and the underside of the upper membrane. All manipulations were made under aseptic conditions.

Example 2

Collection and Cultivation of Unique Bacterial Species From a Soil Sample

20 To identify microorganisms present in a soil sample, a soil sample was collected from a garden in Verrill Farm (Concord, MA, USA), and the sample was air dried and stored in a plastic container before use.

Several devices, similar to the one described in Example 1 and hereinafter
25 referred to as "traps", were placed on the surface of the soil sample with the membrane having the larger pore size in contact with the surface of the soil. The devices were incubated on the surface of the soil at room temperature for 5 to 7 days. After incubation, the devices were examined for evidence of the presence of microorganisms.

Filamentous microorganisms were able to enter through the pores of the lower
30 membrane, and formed colonies on the growth media inside the devices after 5 to 7 days of incubation (*see*, Fig. 2). The upper membrane of the traps were then peeled off, the traps were overturned, the lower membrane was then peeled off, and the slab of the internal material was dropped onto a sterile Petri dish. After an additional 5 to 7 days of incubation at room temperature, many strains formed aerial mycelium (*see*, Fig. 3) and
35 could be easily re-inoculated.

5 Fifty seven actinobacterial microcolonies were randomly picked up from the surface of the gellan gum base of the device described in Fig. 1A with a 0.2 μ m pore size bottom membrane (*i.e.*, the membrane attached to the bottom surface of the washer) and reinoculated onto a nutrient medium with gellan gum as a solidifying agent.

 About half of the isolates belonged to different species of *Streptomyces* (*see*, Table 10 1). The remaining isolates represent rare actinobacterial genera, most of which are well known as producers of antibiotics.

Table 1

List of the Actinomycetes Isolated From the Growth Media on the Bottom Membrane

Isolates	No. of Isolates
<i>Actinoplanes</i> sp.	6
<i>Amycolatopsis</i> sp.	1
<i>Arthrobacter</i> sp.	1
<i>Catellatospora</i> sp.	1
<i>Cellulomonas</i> sp.	2
<i>Cellulosimicrobium</i> sp.	2
<i>Kribbella</i> sp.	2
<i>Lentzea</i> sp.	4
<i>Microbacterium</i> sp.	2
<i>Mycobacterium</i> sp.	1
<i>Nocardioides</i> sp.	4
<i>Rhodococcus</i> sp.	1
<i>Streptomyces</i> sp.	30

15 There was little overlap between species isolated from the device described herein, and species from the same soil sample that grew on a Petri dish under conventional conditions (*see*, Table 2). This indicates the ability of the device described herein to access unique bacterial species.

20

5

Table 2
List of the Actinomycetes Isolated From Agar Plates
(Nutrient agar, Humic acid agar, Malt extract agar)

Isolates	No. of Isolates
<i>Arthrobacter</i> sp.	12
<i>Cellulomonas</i> sp.	2
<i>Micromonospora</i> sp.	1
<i>Mycobacterium</i> sp.	5
<i>Nocardia</i> sp.	5
<i>Nocardioides</i> sp.	1
<i>Nonomuraea</i> sp.	5
" <i>Parastreptomyces</i> sp"	2
<i>Rhodococcus</i> sp.	1
<i>Streptomyces</i> sp.	60
<i>Streptosporangium</i> sp.	1
<i>Terrabacter</i> sp.	2

10

Example 3
Cultivation of Fungal Species From a Soil Sample

To isolate fungi from a soil sample, the device described in Example 1 was modified such that the membrane attached to the bottom surface of the washer
15 ("bottom" membrane) was an ISOPORE™ Membrane Filter (Millipore Corporation) having a pore size greater than 0.2 µm.

Such a modified device was placed on the surface of a soil sample from Massachusetts with the ISOPORE™ membrane in contact with the surface of the soil, and incubated at room temperature for 5 days. After the incubation period, the device was
20 opened, and sterile Pasteur pipettes were used to cut pieces of the agar or gellan gum base to isolate fungal mycelium that was then inoculated on malt extract nutrient medium.

All fungal isolates from this soil sample belonged to the phylum Ascomycota. Notably, no overlap was found between the genera from the devices described herein
25 (see, Table 3) and species from the same soil sample that grew on agar plates under conventional conditions (see, Table 4).

5

Table 3
Fungal Isolates From Devices

Isolate	Closest match	Accession No.	Nucleotide Identity (%)	Pore Size of Bottom Membrane (μm)
MF1	<i>Neocosmospora vasinfecta</i>	NVU32414	99	0.6
MF2	<i>Fusarium oxysporum</i>	AB110910	99	0.6
MF3	<i>Chaetomium globosum</i>	AB048285	99	0.8
MF4	<i>Fusarium oxysporum</i>	AB110910	99	0.6
MF6	<i>Fusarium oxysporum</i>	AB110910	99	0.8
MF8	<i>Neocosmospora vasinfecta</i>	NVU32414	99	0.8
MF9	<i>Neocosmospora vasinfecta</i>	NVU32414	99	0.8
Mf10	<i>Fusarium oxysporum</i>	AB110910	99	0.6
E8	<i>Neocosmospora vasinfecta</i>	NVU32414	99	0.4

10

Table 4
Fungal Strains Isolated By Direct Cultivation From A Soil Sample From Massachusetts

Isolate	Closest Match	Accession No.	Nucleotide Identity (%)
Pd1	<i>Eupenicillium javanicum</i>	EJU21298	99
Pd2	<i>Eupenicillium javanicum</i>	EJU21298	98
Pd3	<i>Eupenicillium javanicum</i>	EJU21298	99
Pd4	<i>Eupenicillium javanicum</i>	EJU21299	99
Pd5	<i>Eupenicillium javanicum</i>	EJU21300	99
Pd7	<i>Penicillium purpurogenum</i>	AF245268	99
Pd8	<i>Penicillium purpurogenum</i>	AF245268	99
Pd9	<i>Metarhizium anisopliae</i>	AB250412	99

These findings suggest that the devices described herein can be used to isolate novel fungi, or other novel microorganisms.

Example 4 Empty Traps

“Empty Traps” are devices similar to those described in Example 1, except lacking a specific growth medium.

An exemplary empty trap device is schematically represented in Fig. 4. Such a device comprises a metal or plastic washer (a) and two semi-permeable membranes (b

5 and c), wherein the membranes are attached to the upper and lower surfaces of the washer. In some cases, both semi-permeable membranes of the empty trap have the same pore size (e.g., about 0.2 μm to about 10.0 μm). In other cases, the membrane attached to the upper surface of the washer has a pore size that is smaller (e.g., about 0.00001 μm to about 0.2 μm) than the pore size of the membrane attached to the lower
10 surface of the washer (e.g., about 0.2 μm to about 10.0 μm).

Example 5

Growth of Microorganisms Using an Empty Trap Device

15 Four empty trap devices were inserted into a soil sample obtained from Massachusetts and incubated for 5 days at room temperature. Then, the traps were opened, and examined with a DIC stereomicroscope. As shown in Fig. 5, empty traps were found to be capable of serving as growth chambers for microorganisms. The microorganisms formed colonies on the inner surface of the membrane, belonging
20 primarily to actinomycetes. Fungal mycelia were also present.

The colonies on the inner surface of the membrane attached to the lower surface of the washer were transferred to agar plates using a replica plater and incubated at room temperature, for another 7 days (see, Fig. 6).

These experiments indicate that empty traps are useful devices for isolating and
25 cultivating microorganisms.

Example 6

Construction and Use of a Gelating Agent Device for Isolation of Microorganisms

30 A natural, semi-synthetic, or synthetic gelating agent including, but not limited to, agar, alginate, carrageenans, gum Arabic, guar gum, traganth gum, xanthan gum, propyleneglycoalginate, and microcrystalline cellulose, is used as the matrix for this device.

To construct the gelating agent spheres, the gelating agent, for example, agar (about 0.7% to about 2%), is autoclaved and then cooled to 40°C to 50°C. The agar is then
35 made into a sphere by dripping agar droplets through a nozzle into cold mineral oil.

5 The agar's sphere size is adjusted by the nozzle diameter and dripping rate. Typically, the diameter of the agar sphere is about 0.01 mm to about 5 mm (usually 2-3 mm).

The gelating agent spheres are then coated with a natural or synthetic polymer. For coating the sphere, the dried gelating agent spheres are introduced into the polymer solution of choice, and are then transferred into a medium that enables coating of the
10 spheres with several layers of the polymer, thereby forming the desired gelating agent devices for isolation of microorganisms. For example, the dried agar spheres are immersed in a solution of 10% polysulfone (Sigma-Aldrich, Product No. 42,830-2) in dimethylformamide and transferred to water in order to obtain the desired polymeric coating.

15 To obtain microorganisms from a desired environment, the gelating agent device is placed in the environment of choice (*e.g.*, on the surface of, or within, soil from a forest; or on the surface of, or within, marine sediment), for a period determined by the investigator as effective for microorganisms to enter the device and form colonies.

After the period of incubation, the device is cut and the agar is examined visually
20 or microscopically for colonies of microorganisms. The microorganisms are isolated and, if desired, reinoculated into new devices.

Example 7

Use of Device for Isolation of Microorganisms

25 To identify microorganisms present in a soil sample the trap described in Example 1 was employed as described in Example 2 using various different soil samples collected in the United States.

Table 5 below summarizes the organisms that were isolated from the trap.

30

5

Table 5

Microorganisms Isolated from the Trap

Isolate	% Homology	Closest Related Genus	Bioactivity
B0579	86.3	Niastella	active
B1275	93.1	Lechevalieria	active
B1146	94.2	Actinoplanes	active
B0856	96.1	Streptacidiphilus	active
B0919	97.2	Couchioplanes	active
B1113	97.3	Actinocorallia	active
B0654	97.3	Amycolatopsis	active
B1023	97.3	Streptomyces	active
B0733	98.0	Pseudonocardia	active
B0577	98.2	Kribbella	active
B1155	98.2	Nocardia	active
B0905	98.3	Kitasatospora	active
B1150	98.3	Kribbella	active
B0492	98.3	Nocardia	active
B0822	98.6	Catenulispora	active
K0033	98.6	Saccharothrix	active
B0494	98.7	Kribbella	active
B0498	98.7	Rhodococcus	active
B1044	99.0	Catenulispora	active
B1114	99.1	Catenulispora	active
B0536	99.9	Kocuria	active
KG-E4	100.0	Catellatospora	active
KG-MS5	100.0	Lentzea	active
KG-MS17	100.0	Nocardioides	active
B0775	100.0	Oerskovia	active
B0950	93.3	methylobacillus	not active
P1252	95.0	Rhodococcus	not active
B1262	95.6	Micromonospora	not active
B1226	96.0	Microbacterium	not active
B0735	96.2	Kitasatospora	not active
B0587	96.6	Cellulosimicrobium	not active
B0891	96.6	Micromonospora	not active
B0776	96.6	Streptomyces	not active
B0893	96.9	Actinoplanes	not active
B0820	97.0	Nocardia	not active
B1105	98.0	Kribbella	not active
B0548	99.0	Promicromonospora	not active
B0599	99.3	Lechevalieria	not active

5

Isolate	% Homology	Closest Related Genus	Bioactivity
KG-F4	100.0	Nocardioides	not active
B1253	93.0	Lechevalieria	not tested
B1142	94.8	Catenulispora	not tested
B1003	95.4	Catenulispora	not tested
B1030	96.4	Actinostreptospora	not tested
B1338	96.7	Actinoplanes	not tested
B1267	97.2	Actinoplanes	not tested
B0851	97.6	Agromyces	not tested
B0861	98.9	Oerskovia	not tested
B0663	99.7	Arthrobacter	not tested
B0768	99.9	Nocardioides	not tested
B1144	99.9	Streptosporangium	not tested

% homology refers to how similar the 16s rDNA from the isolated organism is to any known strain the Genbank® database.

Bioactivity was measured using a spot on lawn assay with activity against either *Bacillus*, *E.coli*, or *H. influenza*.

10

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A device for cultivating or isolating a microorganism, comprising a first semi-permeable membrane defining a closed, sealed, hollow space within, wherein the semi-permeable membrane has a pore size of about 0.2 μm to about 10.0 μm .
2. The device of claim 1, further comprising a medium within the hollow space defined by the membrane, the medium permitting the growth of the microorganism, the medium optionally comprising a gelating agent, and the gelating agent is coated with the first semi-permeable membrane, the semi-permeable membrane being permeable to the entry of the microorganism.
3. The device of claim 1, further comprising a second semi-permeable membrane having a pore size of about 0.000001 μm to about 10 μm , wherein the first semi-permeable membrane and the second semi-permeable membrane are attached to each other at their peripheries and define a hollow space between the two membranes, and optionally further comprising a medium that permits growth of the microorganism, the medium being provided in the space between the two membranes.
4. The device of claim 3, wherein the first and second semi-permeable membranes have a pore size of about 0.2 μm to about 10.0 μm .
5. A device for cultivating or isolating a microorganism, comprising:
- (a) a structure having a solid, impermeable, outer boundary defining a hollow space within, the structure having an upper surface and a lower surface;
 - (b) a first semi-permeable membrane attached to the upper surface of the structure, the first membrane having a pore size of about 0.000001 μm to about 0.2 μm ; and
 - (c) a second semi-permeable membrane attached to the lower surface of the structure, the second membrane having a pore size of about 0.2 μm to about 10 μm .
6. The device of claim 5, further comprising a medium that permits growth of the microorganism, the medium being provided in the space within the structure, the structure optionally being a washer.

7. The device of claim 6, wherein the washer comprises a material selected from the group consisting of metal, plastic, brass, fiber, glass, ceramic, nylon, Teflon®, and combinations thereof.
- 5 8. The device of any one of claims 1 to 7, wherein the semi-permeable membrane is a material selected from the group consisting of a polycarbonate, a cellulose, an aluminum oxide, a polysulfone, an alginate, an epoxy resin, a polyacrylamide, a silica gel, and combinations thereof.
- 10 9. The device of any one of claims 5 to 8, wherein the first and second membranes are comprised of the same material or of different materials.
10. The device of any one of claims 5 to 8, wherein the first membrane has a pore size of about 0.000001 μm to about 0.2 μm , or of about 0.02 μm to about 0.03 μm ,
15 and/or wherein the second membrane has a pore size of about 0.2 μm to about 0.45 μm .
11. The device of any one of claims 6 to 10, wherein the medium comprises agar, alginate, carrageenans, gum Arabic, guar gum, traganth gum, xanthan gum, propyleneglycoalginate, microcrystalline cellulose, and combinations thereof.
- 20 12. The device of any one of claims 1 to 11, wherein the microorganism is selected from the group consisting of a bacterium, a fungus, a protist, a microalga, a filamentous actinobacterium, a filamentous fungus, and combinations thereof.
- 25 13. The device of any one of claims 1 to 11, wherein the microorganism is a previously unculturable or novel microorganism.
14. A device for cultivating or isolating a microorganism, comprising:
(a) a washer having an upper and lower surface, the washer defining a hollow
30 space within;
(b) a first semi-permeable membrane having a pore size of about 0.000001 μm to about 0.2 μm , wherein the first semi-permeable membrane is attached to the upper flat surface of the washer; and
(c) a second semi-permeable membrane having a pore size of about 0.2 μm to
35 about 10.0 μm , wherein the second semi-permeable membrane is attached to the lower flat surface of the washer.

15. The device of claim 14, further comprising a medium that permits growth of the microorganism, the medium located in the space within the washer.
16. A method for cultivating or isolating a microorganism, comprising:
 - 5 (a) placing the device of any one of claims 1 to 15, in an environment containing the microorganism; and
 - (b) allowing the microorganism to enter the hollow space through a pore in the membrane and form colonies therein.
- 10 17. A method for cultivating or isolating a microorganism, comprising:
 - (a) placing the device of claim 6 or claim 15, in an environment containing the microorganism;
 - (b) allowing the microorganism to enter the medium in the hollow space through a pore in the membrane and form colonies therein.
- 15 18. The method of claims 16 or 17, wherein the environment is a natural environment.
19. The method of claim 17, wherein the semi-permeable membrane of the device is
20 placed in contact with the environment, or is immersed within the environment.
20. The device of any one of claims 1, 5 or 14, or the method of claim 16 or claim 17, substantially as hereinbefore described with reference to the Examples, excluding, if any, comparative Examples.
25

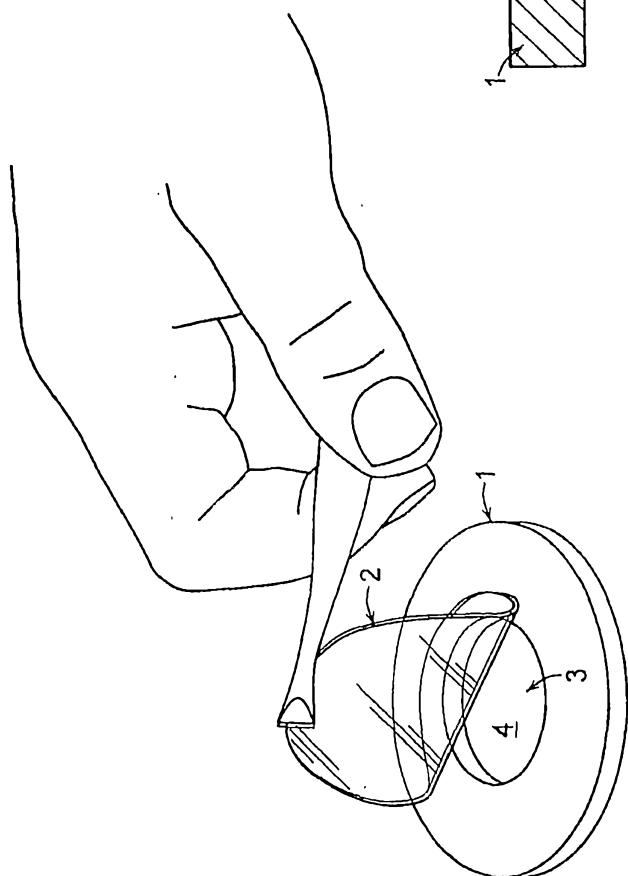


FIG. 1A

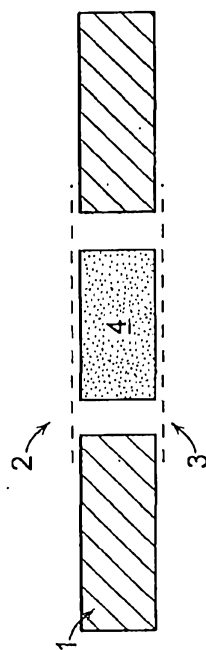


FIG. 1B

2/6

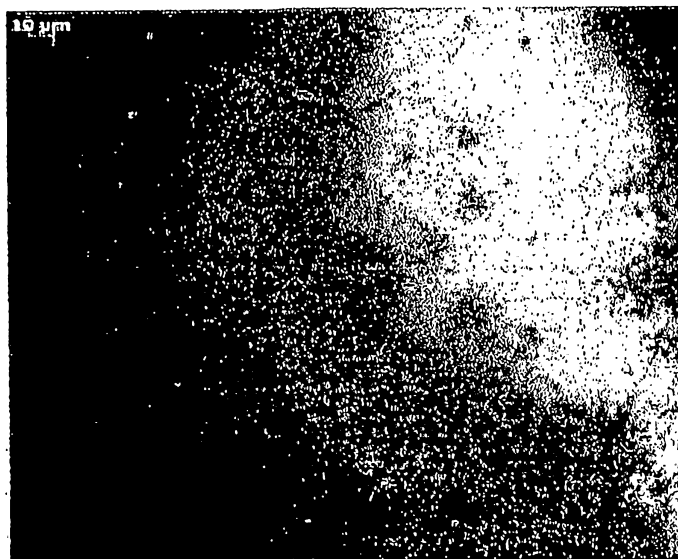


FIG. 2A

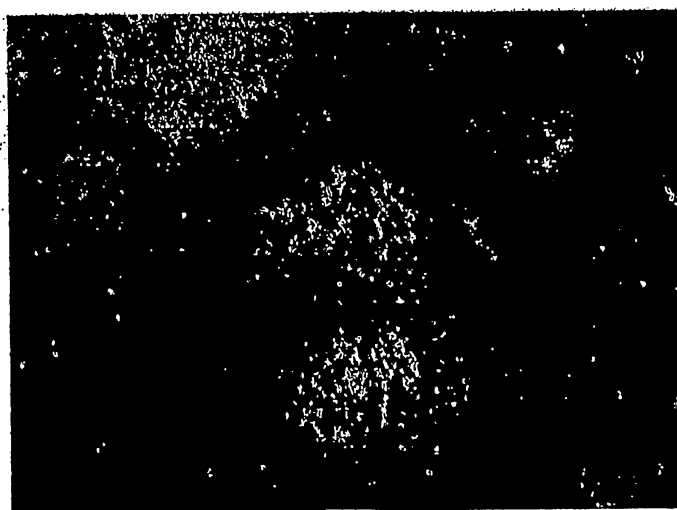


FIG. 2B

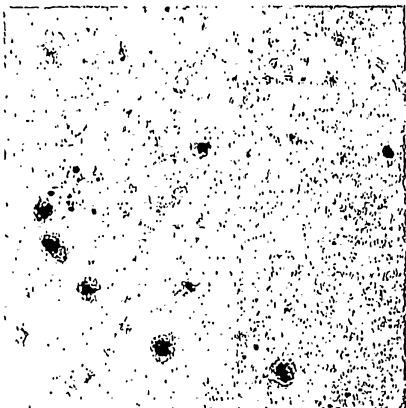


FIG. 3C

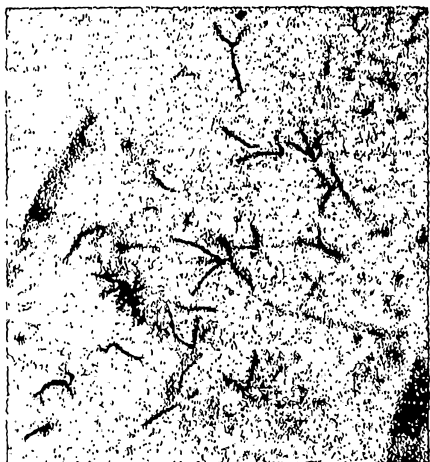


FIG. 3B

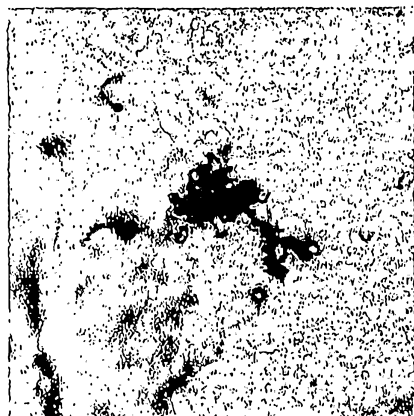


FIG. 3A

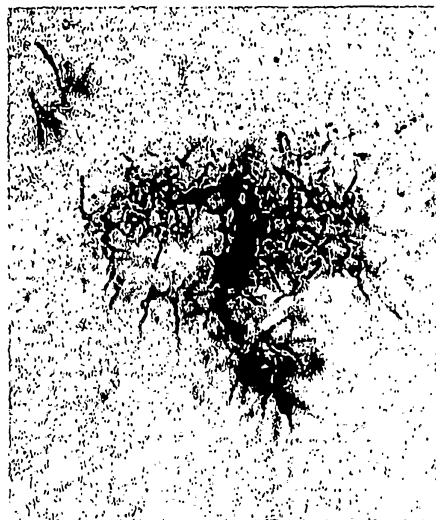


FIG. 3E

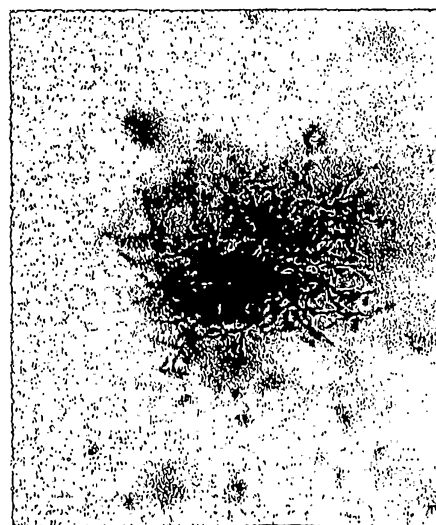


FIG. 3D

4/6

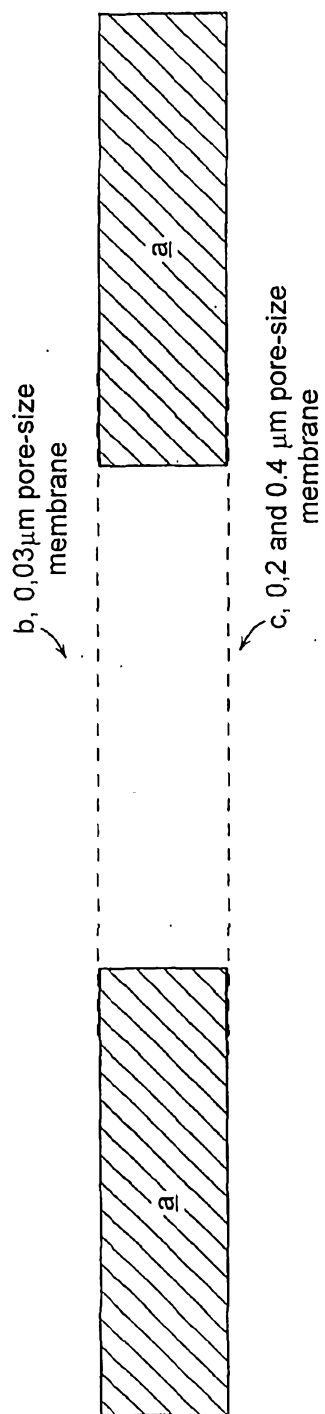


FIG. 4

5/6

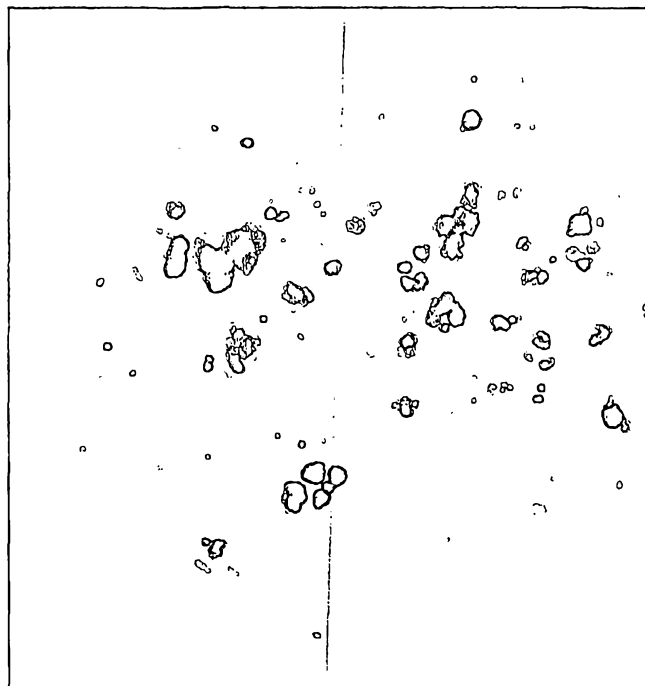


FIG. 5B

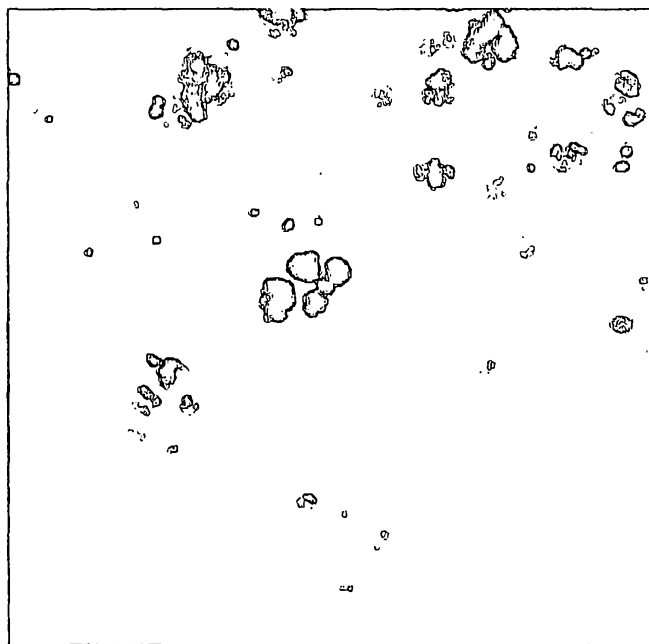


FIG. 5A



FIG. 6