



(19) **United States**

(12) **Patent Application Publication**

**Gutierrez-Rivas et al.**

(10) **Pub. No.: US 2003/0055830 A1**

(43) **Pub. Date: Mar. 20, 2003**

(54) **METHOD AND SYSTEM FOR SPECIFYING AND DISPLAYING TABLE JOINS IN RELATIONAL DATABASE QUERIES**

**Publication Classification**

(51) **Int. Cl.<sup>7</sup> ..... G06F 7/00**  
(52) **U.S. Cl. .... 707/100**

(75) **Inventors: Humberto Gutierrez-Rivas, Rochester, NY (US); Fernando Cardoso Ismerio, Aptos, CA (US); Brian Gerrit Payton, San Jose, CA (US)**

(57) **ABSTRACT**


A system, a program storage device and a software method, useable in a computer database system with a display device, is provided for displaying and selecting table joins. The method is capable of assisting in a user's selection of a table join by displaying all user-selected database tables in a join overview diagram and automatically inferring and displaying in a join grid each join grid row having a potential valid table join for a pair of user-selected database tables. The method accepts the user's selection of a join grid row from the join grid, and, in response, places a join indicator in the join overview diagram between icons representing the pair of user-selected database tables from the user-selected join grid row. The user's join grid row selection is performed with a single operation.

Correspondence Address:  
**SANDRA M. PARKER, ESQ.**  
**LAW OFFICE OF SANDRA M. PARKER**  
**329 La Jolla Avenue**  
**Long Beach, CA 90803 (US)**

(73) **Assignee: International Business Machines Corporation**

(21) **Appl. No.: 09/960,574**

(22) **Filed: Sep. 20, 2001**

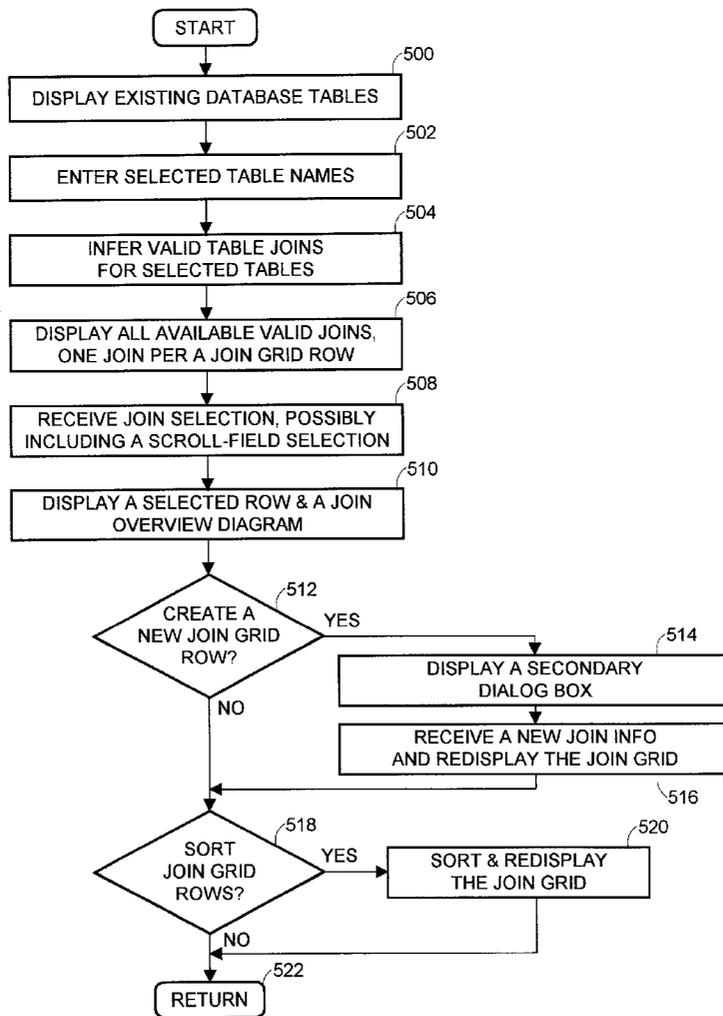

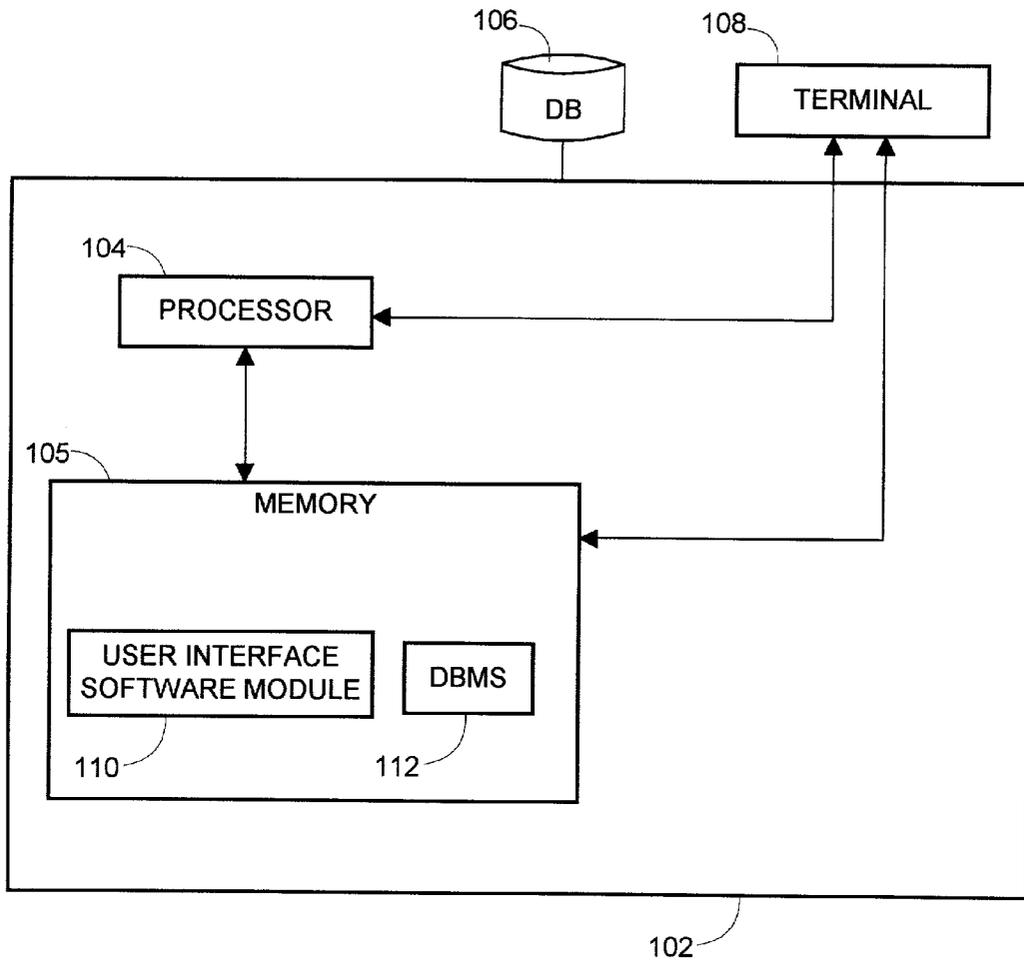


FIG. 1

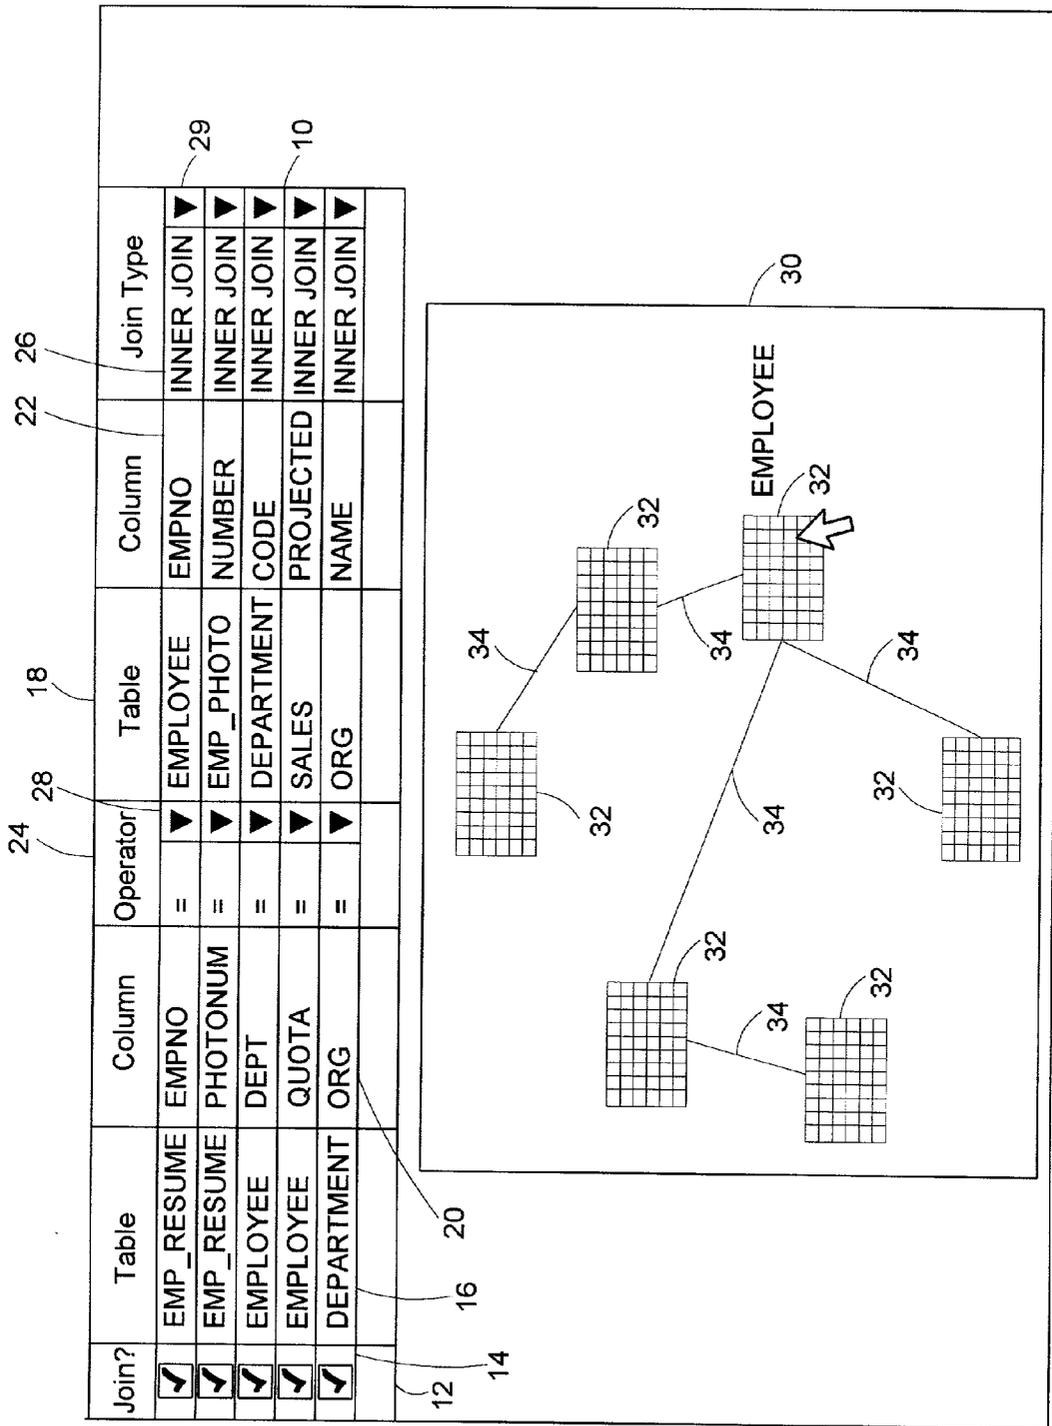


FIG. 2

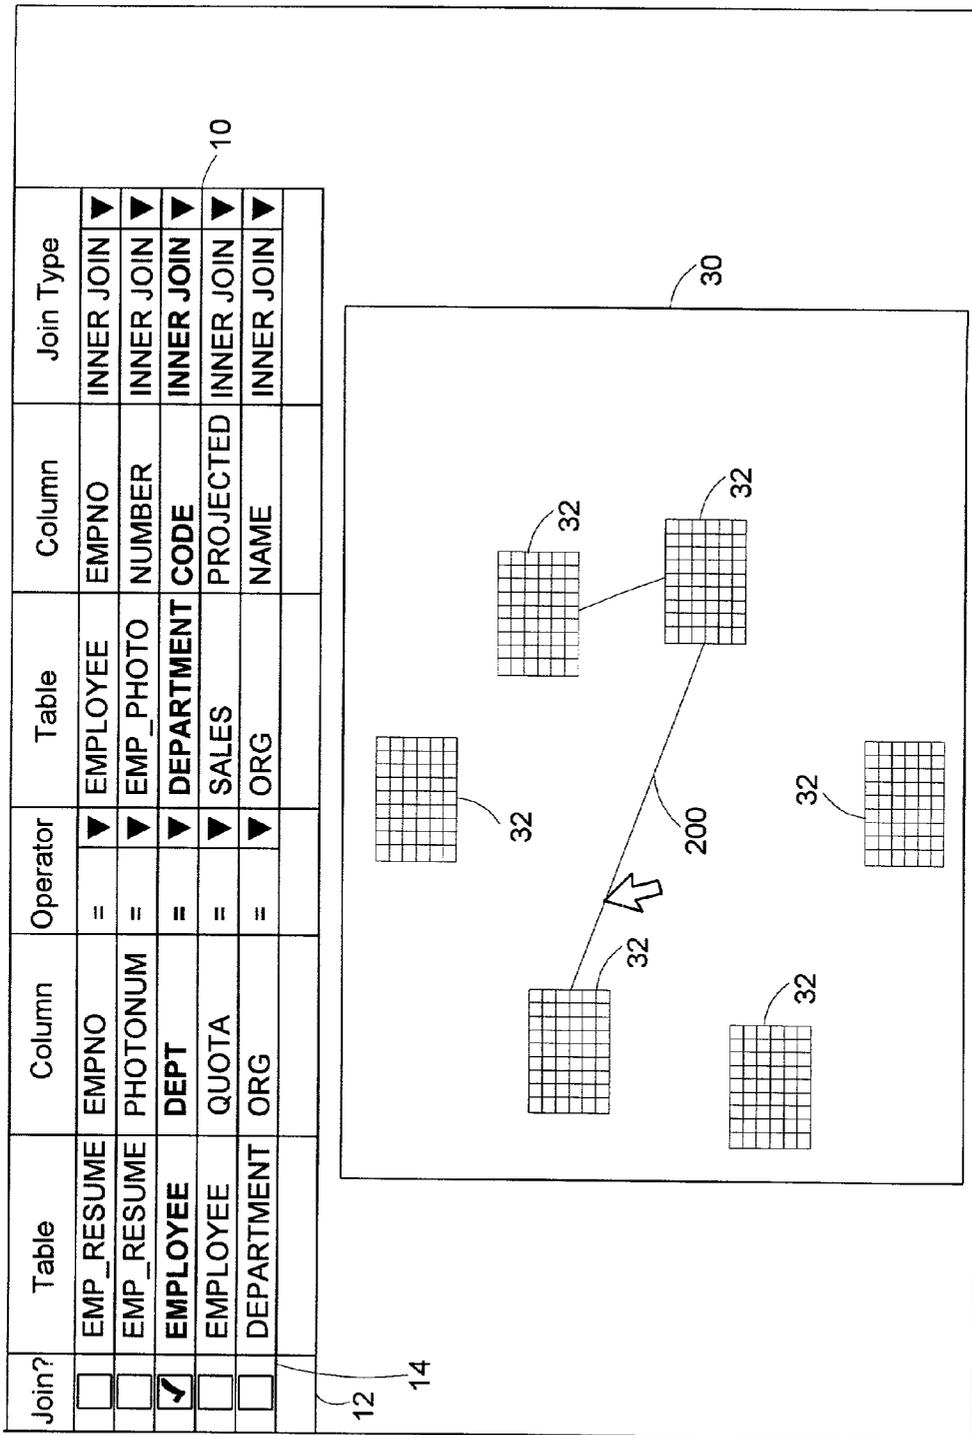


FIG. 3

Add
Remove

404

| Join?                               | Table      | Column   | Operator | Table      | Column    | Join Type    |
|-------------------------------------|------------|----------|----------|------------|-----------|--------------|
| <input checked="" type="checkbox"/> | EMP_RESUME | EMPNO    | =        | EMPLOYEE   | EMPNO     | INNER JOIN ▼ |
| <input checked="" type="checkbox"/> | EMP_RESUME | PHOTONUM | =        | EMP_PHOTO  | NUMBER    | INNER JOIN ▼ |
| <input checked="" type="checkbox"/> | EMPLOYEE   | DEPT     | =        | DEPARTMENT | CODE      | INNER JOIN ▼ |
| <input checked="" type="checkbox"/> | EMPLOYEE   | QUOTA    | =        | SALES      | PROJECTED | INNER JOIN ▼ |
| <input checked="" type="checkbox"/> | DEPARTMENT | ORG      | =        | ORG        | NAME      | INNER JOIN ▼ |
|                                     |            |          | =        |            |           | INNER JOIN ▼ |

EMP\_RESUME  
EMPLOYEE  
DEPARTMENT

400

EMPLOYEE

402

406

408

FIG. 4

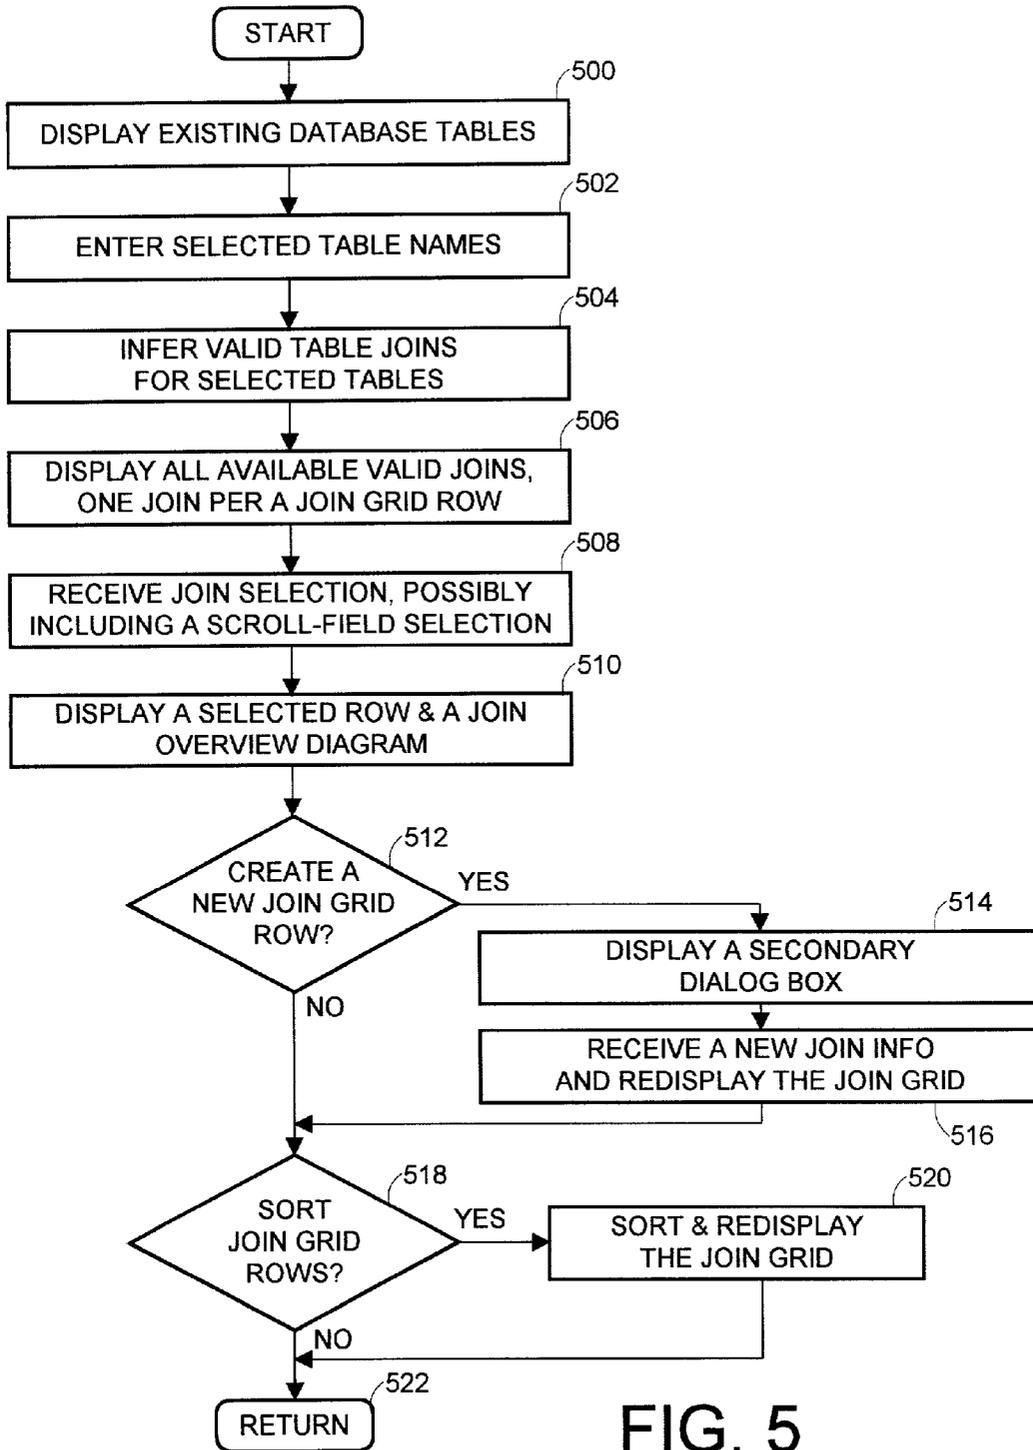


FIG. 5

## METHOD AND SYSTEM FOR SPECIFYING AND DISPLAYING TABLE JOINS IN RELATIONAL DATABASE QUERIES

### BACKGROUND OF THE INVENTION

#### [0001] 1. Field of the Invention

[0002] This invention relates in general to database management systems performed by computers, and in particular to the selection and display of table joins in relational database management system queries.

#### [0003] 2. Description of Related Art

[0004] Databases are computerized information storage and retrieval systems. A Relational Database Management System (RDBMS) is a database management system (DBMS) which uses relational techniques for storing and retrieving data. RDBMS software using a Structured Query Language (SQL) interface is well known in the art. The SQL interface has evolved into a standard language for RDBMS software and has been adopted as such by both the American National Standards Organization (ANSI) and the International Standards Organization (ISO).

[0005] In RDBMS software all data is externally structured into tables. The SQL interface allows users to formulate relational operations on the tables either interactively, in batch files, or embedded in host language, such as C, COBOL, etc. Operators are provided in SQL that allow the user to manipulate the data, wherein each operator operates on either one or two tables and produces a new table as a result. The power of SQL lies on its ability to link information from multiple tables or views together to perform complex sets of procedures with a single statement.

[0006] One of the most common SQL queries executed by RDBMS software is the SELECT statement. In the SQL standard, the SELECT statement generally has the format: "SELECT <clause> FROM <clause> WHERE <clause> GROUP BY <clause> HAVING <clause> ORDER BY <clause>." The clauses generally must follow this sequence. Only the SELECT and FROM clauses are required and all other clauses are optional.

[0007] Generally, the result of a SELECT statement is a subset of data retrieved by the RDBMS software from one or more existing tables stored in the relational database, wherein the FROM clause identifies the name of the table or tables from which data is being selected. The subset of data is treated as a new table, termed the result table. The WHERE clause determines which rows should be returned in the result table. Generally, the WHERE clause contains a search condition that must be satisfied by each row returned in the result table. The rows that meet the search condition form an intermediate set, which is then processed further according to specifications in the SELECT clause. The search condition typically comprises one or more predicates, each of which specifies a comparison between two values from certain columns, constants or correlated values. Multiple predicates in the WHERE clause are typically connected by Boolean operators.

[0008] Another operation permitted by SQL is the JOIN operation, which concatenates horizontally all or parts of two or more tables to create a new resulting table. The JOIN operation is implied by naming more than one table in the

FROM clause of a SELECT statement, although it may also be performed on the same table, as defined in the SQL standard operation named a self-join.

[0009] In order to specify a query with joins for a relational database involving more than one source table, column pairs from different tables need to be identified to describe how these tables are to be joined. It can be difficult to define the joins when the query involves a large number of columns. Therefore, it is desirable to use a graphical display tool as an interface between the user and the database, for visually indicating a join query.

[0010] There are many conventional products that assist the user in specifying valid relational joins, such as MS Access, Brio, IBM SQL Assist, etc. The effectiveness of these products decreases as number of joins, tables and columns increases. In most conventional products the users have to specify a join themselves, usually by dragging a column of one table to a column of another table. Moreover, once the represented tables are larger than the viewing area, this method becomes cumbersome.

[0011] Therefore, there is a need to provide a method and a graphical display tool as an interface between the user and the database, which can automatically specify and visually indicate all possible and valid joins, and make them available for user's selection. This would simplify the design, development, and maintenance of applications and provide more reliable applications.

### SUMMARY OF THE INVENTION

[0012] The foregoing and other objects, features, and advantages of the present invention will be apparent from the following detailed description of the preferred embodiments which makes reference to several drawing figures.

[0013] One preferred embodiment of the present invention includes a software method, useable in a computer database system with a display device, for displaying and selecting table joins. The method is capable of assisting in a user's selection of a table join by displaying all user-selected database tables in a join overview diagram and automatically inferring and displaying in a join grid each join grid row having a potential valid table join for a pair of user-selected database tables. The method accepts the user's selection of a join grid row from the join grid, and, in response, places a join indicator in the join overview diagram between icons representing the pair of user-selected database tables from the user-selected join grid row. The user's join grid row selection is performed with a single operation. Each row of the join grid represents a join column of a first table, a join column of a second table, and a join criteria, such as a join operator and a join type, indicating a way that the first table and the second table are to be joined by the selected join columns. The join overview diagram shows an overview of all tables selected in the query, and the joins currently available or selected for the selected database tables. The method assists the user in creating a user-defined table join by selecting elements from drop-down list boxes of an empty join grid row, and displaying the user-defined table join in the join grid and the join overview diagram.

[0014] Another preferred embodiment of the present invention is a system implementing the above-mentioned method embodiment of the present invention.

[0015] Yet another preferred embodiment of the present invention is a program storage device readable by a computer tangibly embodying a program of instructions executable by the computer to perform method steps of the above-mentioned method embodiment of the present invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Referring now to the drawings in which like reference numbers represent corresponding parts throughout:

[0017] **FIG. 1** illustrates a computer hardware and software environment usable in the present invention;

[0018] **FIG. 2** illustrates a table join grid and a join overview diagram, according to the preferred embodiments of the present invention;

[0019] **FIG. 3** illustrates a table join selected in the table join grid and the join overview diagram, according to the preferred embodiments of the present invention;

[0020] **FIG. 4** illustrates an exemplary user interface display with buttons and drop-down buttons and list boxes, according to the preferred embodiments of the present invention; and

[0021] **FIG. 5** is a flowchart illustrating the steps used for display and selection of a table join from the table join grid and the join overview diagram, according to the preferred embodiments of the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] In the following description of the preferred embodiments reference is made to the accompanying drawings which form the part thereof, and in which are shown by way of illustration specific embodiments in which the invention may be practiced. It is to be understood that other embodiments may be utilized, and structural and functional changes may be made without departing from the scope of the present invention.

[0023] The present invention is directed to a system, method and computer program storage device embodying a program of instructions executable by a computer to perform the method of the present invention creating a user interface for constructing database queries with joins, to be executed by a database engine to make changes to data in a database. In order to specify a query with a join for a database involving more than one source table, firstly the tables have to be chosen by a user. Then, the user interface of the present invention analyzes the selected tables and identifies column pairs that would produce valid join queries. The preferred embodiments of the present invention provide a graphical display tool as an interface between the user and a DBMS, for providing a human user with assistance in constructing and visually indicating a join query by displaying all system-proposed valid table joins. The present invention overcomes the scalability problem of solutions currently used in the industry and is much more user friendly.

[0024] **FIG. 1** illustrates an exemplary computer hardware environment that could be used with the present invention. Those skilled in the art will recognize that any combination of components, including computer hardware, peripherals and other devices, computer system software programs and

application programs may be used to implement the present invention, so long as similar functions are performed thereby. Many modifications of the proposed preferred embodiments may be made without departing from the scope of the present invention.

[0025] In the exemplary environment, a computer system **102** is comprised of one or more processors **104** with a computer memory **105**, connected to one or more electronic storage devices **106**, such as disk drives, that store one or more relational databases. These drives may comprise, for example, optical disk drives, magnetic tapes and/or semiconductor memory. Each storage device permits receipt of a computer program storage device, such as a magnetic media diskette, magnetic tape, optical disk, semiconductor memory and other machine-readable storage device, and allows for method program steps recorded on the program storage device to be read and transferred into the computer memory **105**. The recorded program instructions may include the code for the method embodiments of the present invention. Alternatively, the program steps can be received into the operating memory **105** from a computer over a network.

[0026] Operators of the computer system **102** use a standard operator terminal interface **108** with a graphical user interface, such as provided by Microsoft Windows, one of the UNIX GUIs or other similar interface, to transmit electrical signals to and from the computer system **102**, that represent commands for performing various search and retrieval functions, termed queries, against the databases. In the present invention, these queries conform to the Structured Query Language (SQL) standard, and invoke functions performed by a DBMS **112**, which is preferably a Relational DataBase Management System (RDBMS) software. In the preferred embodiment of the present invention, the RDBMS software is the DB2 product offered by IBM for the UNIX AIX operating system, as well as for HP-UX, Sun Solaris and Windows operating system. Those skilled in the art will recognize, however, that the present invention has application to any RDBMS software that uses SQL, and may similarly be applied to non-SQL queries.

[0027] A user interface software module **110** of the present invention is used to assist the user in selecting a table join query, via a keypad, mouse, etc, of the terminal interface **108**. For this purpose it displays two elements on the terminal interface **108**: a join grid **10** and a join overview diagram **30**, as shown in **FIG. 2**. The join grid **10** is a join selection grid, having rows and columns, and presents a selection of all rows **12** with a potential, valid join column combination. A join check-box cell **14** can be set or reset in each row **12** to select a table join represented by that row **12**. The rows **12** of the join grid **10** are inferred by the computer and created in the user interface software module **110** embodiment according to some criteria, and each row **12** with a potential and valid table join connects two joinable columns selected from the tables from the database. Thus, each row **12** has the detailed information about the two table columns that may be joined, and displays data in each table name cell **16**, **18**, each column name cell **20**, **22**, a join operator cell **24** and a join type cell **26**, which describe the relationship between the columns of the row **12**.

[0028] The join overview diagram **30** represents a graph of all database tables **32**, represented as icons, which are selectable by the query. Join indicators for all possible, valid

table joins between two **20** tables **32** may be represented by lines **34**, as shown in **FIG. 2**. **FIG. 3** illustrates a join indicator line **34** for a selected table join, selected by setting the join check-box cell **14** of the join grid **10** of **FIG. 3**.

[**0029**] According to the preferred method embodiments of the present invention, the column name cell **20**, **22** data, column data types, and some other database information, such as primary key and foreign key constraints, are used by the computer and the user interface software module **110** to determine and display all possible valid joins available to the user in his/her selection. In addition, the user can manually specify new joins through a secondary dialog box, as shown below. A click on the table **32** icon displays the table name, as shown in **FIG. 2**.

[**0030**] One of the advantages of the present invention is that the join grid **10** information and the join overview diagram **30** are always displayed together and are synchronized. Hence, if a user chooses a join in the join grid **10** by clicking on the join check-box cell **14**, as shown in **FIG. 3**, the join overview diagram **30** automatically reflects the selection by drawing the line **34**, which highlights the associated row **12** in the join grid **10**. Moreover, each row of the join grid **10** automatically provides a summary of all two-column combinations of the selected two tables of the database, which are available as potential, valid table joins. Thus, the user does not have to select each of the two columns separately, and to manually join them in some fashion; this is provided by the user interface software module **110** of the present invention.

[**0031**] Further, the join overview diagram **30** gives users a concise overview of all tables **32** in the FROM clause of the query, as well as the joins currently available or selected for those tables. Also, the join check-box cell **14** of the join grid **10** allows users to choose joins from a list of potential joins with a single operation, such as a mouse click. Moreover, the join grid **10** allows users to logically order (sort) join information by the selected table name cell **16**, **18**, column name cell **20**, **22**, operator cell **24** and join type cell **26** data, for easier selection. Further, the join grid **10** allows users to quickly modify the operator cell **24** and join type cell **26** data of a selected table join.

[**0032**] **FIG. 5** is a flowchart illustrating the steps necessary for the proper utilization of the user interface software module **110**, according to the preferred embodiments of the present invention. The method embodiment of the present invention includes the following steps. Firstly, in step **500** the user interface displays a list of all available tables for user's selection, in any conventional manner. In step **502** the system receives user-identified names of the tables to be joined.

[**0033**] In the method embodiment of the present invention, the user first selects two or more tables, i.e., as many as is participating in the query. Then, in step **504**, the user interface software module **110** embodiment is invoked to determine by inference all potential join relationships. In step **506** all these potential join rows are displayed in the join grid **10**, and the user interface module **110** creates and displays the join overview diagram **30**, representing all tables **32**, with lines connecting the tables with possible joins, as shown in **FIG. 2**. To select a join, in step **508** the user clicks on the join check-box cell **14** for a specific table join. **FIG. 3** illustrates one such choice, where the third row

**12** of the join grid **10** has been selected. The join check-box cell **14** displays a check mark. In next step **510**, a join line **200** appears in the join overview diagram **30** between the graphical icons representing the two tables **32** participating in the selected join.

[**0034**] **FIG. 4** illustrates an exemplary user interface display with buttons, drop-down buttons and list boxes, according to the preferred embodiments of the present invention. A user-defined join grid row may be deleted by selecting a join grid row and pressing a Remove button **408** of **FIG. 4**. To create a new table join row, which will be represented in the join grid **10**, a user would click on an Add button **404** in step **512**. Next, in step **514**, the user interface module **110** embodiment of the present invention creates drop-down list buttons **402** and drop-down list boxes **406** in the fields of an empty join grid row **400**, which appears at the bottom of the join grid **10**. In step **516** the system allows the user to select all the elements and criteria for the new table join, after which all the rows **12** of the join grid **10** are redisplayed.

[**0035**] To modify a join operator a user would click on a drop-down button **28** of the join operator cell **24** of **FIG. 2** to create drop-down list fields for easy selection. To modify a join type, a user would click on a drop-down button **29** of the join type cell **26**. The user can select a value from the join operator drop-down list (not shown) or a join type drop-down list (not shown), displayed by and stored by the user interface software module **110**. The selected value appears in the join operator cell **24** or the join type cell **26**. The user interface module **110** embodiment infers and displays, by default, equi-joins of the inner-join type. However, the user can modify the operator and type of a join, and can also select outer-join type queries by changing the selection using the drop-down buttons **28** and **29**. This selection may be performed in step **508**.

[**0036**] To sort the join information, in step **518** the user would click on a header of the appropriate column **20**, **22** of the join grid **10**. Then, the rows **12** in the join grid **10** are re-ordered by the user interface **110** embodiment of the present invention to place the values of the sorted column in an order, which may be the ascending order, and all the rows **12** are redisplayed in step **520**. The user interface module **110** returns in step **522**.

[**0037**] To view the details of the join line **200** of the join overview diagram **30**, a user would click on the join line **200** in the diagram, between the graphical representation of the two tables **32**, as shown in **FIG. 3**. The detailed information of the associated join will then become highlighted in the appropriate row **12** of the join grid **10**. If the associated join row **12** is not visible in the display window, the rows of the join grid **10** will get scrolled to display the row **12** with the information.

[**0038**] The preferred embodiments of the present invention are very useful for developers of application software, such as relational database software. They are very efficient even for a large number of tables and columns, unlike the presently available products. In most of these conventional products users have to specify each join element separately, usually by "dragging" from one column of a table to a column of another table. Once the number of represented tables is larger than the display viewing area, this method becomes cumbersome.

[**0039**] The foregoing description of the preferred embodiments of the invention has been presented for the purposes

of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form disclosed. Many modifications and variations are possible in light of the above teaching. It is intended that the scope of the invention be limited not by this detailed description, but rather by the claims appended hereto.

What is claimed is:

1. A software method useable in a computer database system with a display device for inferring and displaying a selection of valid table joins for a relational database query specifying a plurality of user-selected database tables, the method comprising the following steps:

- (a) assisting in a user's selection of a table join by displaying all user-selected database tables in a join overview diagram and automatically inferring and displaying in a join grid each join grid row having a potential valid table join for a pair of user-selected database tables;
- (b) accepting the user's selection of a join grid row from the join grid; and
- (c) responsive to the user's selection of a join grid row from the join grid, placing a join indicator in the join overview diagram between icons representing the pair of user-selected database tables from the user-selected join grid row.

2. The method according to claim 1, wherein the user's selection of the join grid row being performed with a single operation.

3. The method according to claim 1, wherein each said join grid row representing a first join column of a first table from the plurality of user-selected database tables, a second join column of a second table from the plurality of user-selected database tables, and a join criteria indicating the first table and the second table being joined by the first and second join columns.

4. The method according to claim 3, wherein the join criteria including a join operator and a join type, and being selectable from a drop-down list box.

5. The method according to claim 3, wherein the display device allowing logical ordering of all said join grid rows by the first and second table and column name, and the join criteria.

6. The method according to claim 1, wherein the join overview diagram showing icons of all user-selected database tables in the query, and all potential or selected valid table joins.

7. The method according to claim 1, further comprising a step for assisting the user in creating a user-defined table join by selecting elements from drop-down list boxes of an empty join grid row, and displaying said user-defined table join in the join grid and in the join overview diagram.

8. A system for inferring and displaying a selection of valid table joins for a relational database query specifying a plurality of user-selected database tables, comprising:

- a computer having a display device and an electronic storage device coupled thereto for storing a relational database, the query being performed by the computer to retrieve data from the relational database;

means, performed by the computer, for assisting in a user's selection of a table join by displaying all user-selected database tables in a join overview diagram and

automatically inferring and displaying in a join grid each join grid row having a potential valid table join for a pair of user-selected database tables;

means, performed by the computer, accepting the user's selection of a join grid row from the join grid; and

means, performed by the computer, responsive to the user's selection of a join grid row from the join grid for placing a join indicator in the join overview diagram between icons representing the pair of user-selected database tables from the user-selected join grid row.

9. The system according to claim 8, wherein the user's selection of the join grid row being performed with a single operation.

10. The system according to claim 8, wherein each said join grid row representing a first join column of a first table from the plurality of user-selected database tables, a second join column of a second table from the plurality of user-selected database tables, and a join criteria indicating the first table and the second table being joined by the first and second join columns.

11. The system according to claim 10, wherein the join criteria including a join operator and a join type, and being selectable from a drop-down list box.

12. The system according to claim 10, wherein the display device allowing logical ordering of all said join grid rows by the first and second table and column name, and the join criteria.

13. The system according to claim 8, wherein the join overview diagram showing icons of all user-selected database tables in the query, and all potential or selected valid table joins.

14. The system according to claim 8, further comprising a means for assisting the user in creating a user-defined table join by selecting elements from drop-down list boxes of an empty join grid row, and displaying said user-defined table join in the join grid and in the join overview diagram.

15. A program storage device readable by a computer tangibly embodying a program of instructions executable by the computer to perform method steps for inferring and displaying on a display device a selection of valid table joins for a relational database query specifying a plurality of user-selected database tables stored in an electronic storage device coupled to the computer, the method comprising the following steps:

- (a) assisting in a user's selection of a table join by displaying all user-selected database tables in a join overview diagram and automatically inferring and displaying in a join grid each join grid row having a potential valid table join for a pair of user-selected database tables;

- (b) accepting the user's selection of a join grid row from the join grid; and

- (c) responsive to the user's selection of a join grid row from the join grid, placing a join indicator in the join overview diagram between icons representing the pair of user-selected database tables from the user-selected join grid row.

16. The method according to claim 15, wherein the user's selection of the join grid row being performed with a single operation.

17. The method according to claim 15, wherein each said join grid row representing a first join column of a first table

from the plurality of user-selected database tables, a second join column of a second table from the plurality of user-selected database tables, and a join criteria indicating the first table and the second table being joined by the first and second join columns.

**18.** The method according to claim 17, wherein the join criteria including a join operator and a join type, and being selectable from a drop-down list box.

**19.** The method according to claim 17, wherein the display device allowing logical ordering of all said join grid rows by the first and second table and column name, and the join criteria.

**20.** The method according to claim 15, wherein the join overview diagram showing icons of all user-selected database tables in the query, and all potential or selected valid table joins.

**21.** The method according to claim 15, further comprising a step for assisting the user in creating a user-defined table join by selecting elements from drop-down list boxes of an empty join grid row, and displaying said user-defined table join in the join grid and in the join overview diagram.

\* \* \* \* \*