Innovation, Sciences et Développement économique Canada
Office de la Propriété Intellectuelle du Canada

Innovation, Science and Economic Development Canada
Canadian Intellectual Property Office

CA 3152889 C 2023/01/24

(11)(21) 3 152 889

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) **Date de dépôt PCT/PCT Filing Date:** 2020/08/19
(87) **Date publication PCT/PCT Publication Date:** 2020/12/17
(45) **Date de délivrance/Issue Date:** 2023/01/24
(85) **Entrée phase nationale/National Entry:** 2022/02/28
(86) **N° demande PCT/PCT Application No.:** US 2020/047014
(87) **N° publication PCT/PCT Publication No.:** 2020/252494
(30) **Priorité/Priority:** 2019/08/30 (US62/893,976)

(51) **Cl.Int./Int.Cl.** ***E21B 43/12*** (2006.01),
E21B 21/08 (2006.01), ***E21B 34/02*** (2006.01),
E21B 41/00 (2006.01), ***E21B 47/008*** (2012.01),
E21B 47/06 (2012.01)

(72) **Inventeurs/Inventors:**
TALTON, BROOKS MIMS, III, US;
BAKER, AARON, US;
PERRY, ERIC, US;
MUNDING, PAUL, US;
HUDSON, JOHN D., US

(73) **Propriétaire/Owner:**
FLOGISTIX, LP, US

(74) **Agent:** RIDOUT & MAYBEE LLP

(54) **Titre : PROCEDE AUTOMATISE POUR DES OPERATIONS D'EXTRACTION AU GAZ**
(54) **Title: AUTOMATED METHOD FOR GAS LIFT OPERATIONS**

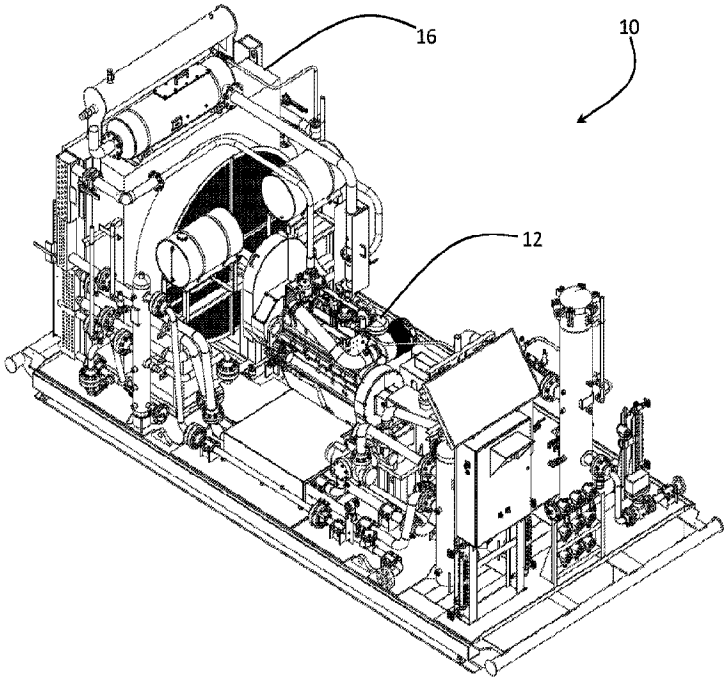

(57) **Abrégé/Abstract:**
Disclosed is a compressor system suitable for carrying out artificial gas lift operations at an oil or gas well. Also disclosed is a method for controlling the compressor system. The methods disclosed provide the well operator with the ability to identify and maintain gas injection rates which result in the minimum production pressure. The minimum production pressure will be determined either by a bottom hole sensor or a casing pressure sensor located at the surface or any convenient location capable of monitoring pressure at the wellhead.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
17 December 2020 (17.12.2020)

WIPO | PCT

(10) International Publication Number
WO 2020/252494 A1

(51) International Patent Classification:
E21B 43/12 (2006.01) *E21B 41/00* (2006.01)
E21B 21/08 (2006.01) *E21B 47/008* (2012.01)
E21B 34/02 (2006.01) *E21B 47/06* (2012.01)

(21) International Application Number:
PCT/US2020/047014

(22) International Filing Date:
19 August 2020 (19.08.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/893,976 30 August 2019 (30.08.2019) US

(71) Applicant: **FLOGISTIX, LP** [US/US]; 6529 N. Classen Blvd., Oklahoma City, Oklahoma 73116 (US).

(72) Inventors: **TALTON, Brooks, Mims, III**; 6529 N. Classen Blvd., Oklahoma City, Oklahoma 73116 (US). **BAKER, Aaron**; 2538 W. Kentucky, Pampa, Texas 79065 (US). **PERRY, Eric**; 2538 W. Kentucky, Pampa, Texas 79065 (US). **MUNDING, Paul**; 6529 N. Classen Blvd., Oklahoma City, Oklahoma 73116 (US). **HUDSON, John D.**; 6529 N. Classen Blvd., Oklahoma City, Oklahoma 73116 (US).

(74) Agent: **HALL, William D.** et al.; McAfee & Taft, A Professional Corporation, 211 North Robinson, Tenth Floor, Two Leadership Square, Oklahoma City, Oklahoma 73102 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: AUTOMATED METHOD FOR GAS LIFT OPERATIONS

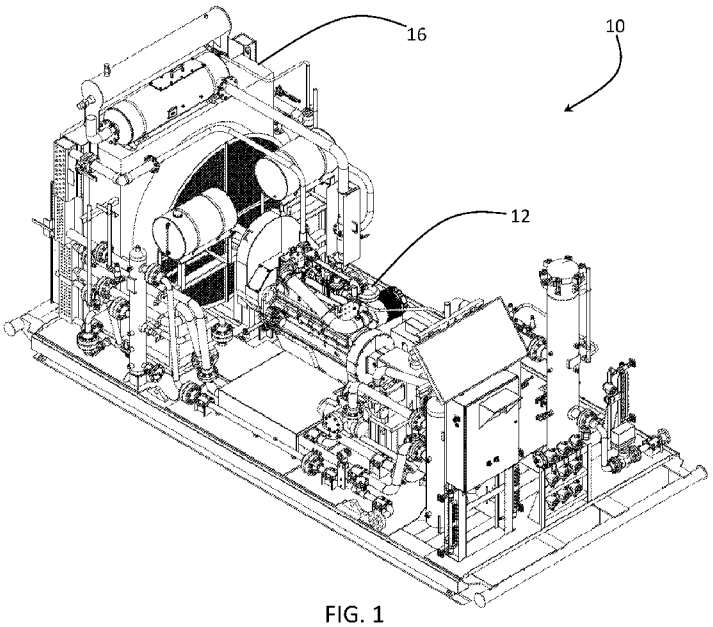

FIG. 1

(57) Abstract: Disclosed is a compressor system suitable for carrying out artificial gas lift operations at an oil or gas well. Also disclosed is a method for controlling the compressor system. The methods disclosed provide the well operator with the ability to identify and maintain gas injection rates which result in the minimum production pressure. The minimum production pressure will be determined either by a bottom hole sensor or a casing pressure sensor located at the surface or any convenient location capable of monitoring pressure at the wellhead.

WO 2020/252494 A1

[Continued on next page]

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*
— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*
— *upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)*

AUTOMATED METHOD FOR GAS LIFT OPERATIONS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority to U.S. Provisional Application No. 62/893,976 filed on August 30, 2019.

BACKGROUND

[0002] The use of injected gas, commonly known as gas lift, to aid in the production of liquids from a well is a balancing act. Over-injecting the gas will ensure lifting of liquids to the surface but will increase friction during the production process and may reduce fluid flow from the formation into the well. Under injection of the gas will fail to lift the liquids to the surface and will result in a buildup of fluids in the well further restricting flow of fluids and loss of production. Thus, the industry would benefit from methods and apparatus capable of continuously managing the gas injection rate to compensate for changes in production pressure.

SUMMARY OF THE INVENTION

[0003] In one aspect the present disclosure provides a method for controlling a compressor system for gas lift operations. The method includes the steps of:

operating the compressor system at an initial gas injection rate sufficient to lift all liquids from the well;

operating the compressor system for a first incremental period of time at a first incremental gas injection rate greater than the initial gas injection rate;

continuing to produce liquids from the well during the first incremental period while monitoring production pressure within the well;

determining the average production pressure over the incremental period;

operating the compressor system for second incremental period of time at a second incremental gas injection rate where the second incremental gas injection rate is greater than the first incremental gas injection rate;

continuing to produce liquids from the well during the second incremental period while monitoring production pressure within the well;

determining the average production pressure over the second incremental period;

operating the compressor system for a third incremental period of time at a third incremental gas injection rate where the third incremental gas injection rate greater than the second incremental gas injection rate;

continuing to produce liquids from the well during the third incremental period while monitoring production pressure within the well;

determining the average production pressure over the third incremental period;

identifying the incremental gas injection rate which produced the lowest production pressure while unloading all fluids from the well; and

setting the identified incremental gas injection rate as the Operational Gas Injection Rate for the compressor system and operating the compressor system to produce all fluids from the well.

[0004] The described method may include additional incremental periods at greater gas injection rates.

[0005] Alternatively, the step of operating the compressor system for a first incremental period at a first incremental gas rate greater than the initial gas injection rate is replaced by a step that takes place for a first incremental period at a first incremental gas rate that is less than the initial gas injection rate. Subsequent incremental periods operate at incremental gas injection rates less than the prior incremental gas injection rates. Additional incremental periods may be added with each additional incremental period at a lower gas injection rate than the prior incremental period.

[0006] Alternatively, the step of operating the compressor system for a first incremental period at a first incremental gas rate greater than the initial gas injection rate is replaced by a step that takes place at a first incremental gas rate that is greater than the initial gas injection rate and subsequent incremental periods take place at incremental gas injection rates that are less than the first incremental gas injection rate. Additional incremental periods may be added with each additional incremental period at a lower gas injection rate than the prior incremental period.

[0007] Alternatively, the step of operating the compressor system for a first incremental period at a first incremental gas rate greater than the initial gas injection rate is replaced by a step that takes place at a first incremental gas rate that is less than the initial gas injection rate. Subsequent incremental periods take place at incremental gas injection rates that are greater than

the prior incremental gas injection rates. Additional incremental periods may be added with each additional incremental period at a greater gas injection rate than the prior incremental period.

[0008] The described method may additionally include steps for determining the critical rate of injection. The Critical Rate mode comprises the steps of:

estimating the maximum flow rate of fluids out of the well (q_{max}) and the average reservoir pressure ($\bar{P}$) at the maximum flow rate of fluids out of the well;

measuring the production pressure using a bottom hole sensor or measuring the surface casing pressure using a surface sensor and calculating the production pressure;

calculate the total gas injection rate needed to unload all fluids from the wellbore using the measured or calculated production pressure and the estimated values of q_{max} and $\bar{P}$;

comparing the calculated total gas injection rate to the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, if the calculated total gas injection rate is within the tolerance range of the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, then set the values of q_{max} and $\bar{P}$ as static values for the calculation of the minimum gas injection rate necessary to unload the well of all liquids;

calculate the minimum gas injection rate necessary to unload the well of all liquids; and

directing the compressor system to operate at the calculated minimum gas injection rate.

[0009] Additionally, in the Critical Rate Mode, the method may include the steps of:

monitoring fluid flow rates of water, gas, and oil out of the well;

monitoring bottom hole pressure or calculating bottom hole pressure by using a monitored surface casing pressure;

calculating the total gas flow rate needed to carry all fluids out of the well;

subtracting the flow rate of gas out of the well from the calculated total gas flow rate needed to carry all fluids out of the well to provide the minimum gas injection rate necessary to unload the well of all liquids; and

operating the compressor system at the minimum gas injection rate necessary to unload the well of all liquids.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIGS. 1-2 depict two perspective views of a skid supporting a compressor system suitable for use in the disclosed artificial gas lift method.

[0011] FIG. 3 depicts a top view of the skid supporting the compressor system suitable for use in the disclosed artificial gas lift methods.

[0012] FIG. 4 is a graph comparing fluid specific gravity to friction over a range of injection rates and corresponding production pressures.

[0013] FIGS. 5A and 5B are flow charts depicting the steps for determining the critical rate of injection necessary to precluding loading of a well operating under gas lift conditions.

[0014] FIGS. 6A-B provide the equations necessary to determine Guo critical rate mode when operating under the Critical Rate Mode.

[0015] FIG. 7 is the equation for determining the Vogel IPR parameters - q_{max} and ($\bar{P}$).

[0016] FIG. 8 is the intersection of the Hagedorn-Brown outflow curve with the Vogel IPR curve.

[0017] FIGS. 9A-C provide Equations 1-20 known as the Hagedorn and Brown outflow model equations.

DETAILED DESCRIPTION

[0018] The drawings included with this application illustrate certain aspects of the embodiments described herein. However, the drawings should not be viewed as exclusive embodiments.

[0019] This disclosure provides improved methods for managing the operations of oil and gas wells operating under gas lift conditions. The improvements include enhancements to the compressor system **10** used to inject gas for gas lift operations and new methods for controlling compressor system **10** operation.

IMPROVED COMPRESSOR SYSTEM

[0020] The improved compressor system **10** includes modifications designed to manage the additional stresses imparted by the new methods. In particular, improved compressor system **10** has been engineered to withstand the stresses induced by operating under random and/or variable conditions.

[0021] Compressor system **10** will be described with reference to FIGS. 1-3. Compressor system **10** includes common components such as engine **12**, reciprocating compressor **14** and

radiator/fan assembly **16**. Additionally, compressor system **10** includes a programmable logic controller (PLC), not shown, and a computer server, not shown, suitable for controlling operations of compressor system **10** and managing calculations necessary to carry out the methods disclosed herein. The computer server may be located at the wellsite or may be remotely located and accessed as a cloud server or other remote server. Typically, the computer server will perform the necessary calculations and control the operations of the PLC. However, any computer arrangement may be used to perform the operations necessary for carrying out the disclosed methods. For the purposes of conciseness, this disclosure will refer to the various computer control systems and arrangements as a computer server.

[0022] To accommodate the stresses imparted by the methods disclosed below, compressor system **10** incorporates pipe supports **18** designed to impart structural rigidity to the supported pipe in every direction. Use of pipe support **18** transfers vibrations and pulses from pipes or conduits to the skid portion of compressor system **10**. Thus, as depicted in the FIGS., compressor system **10** is particularly suited for carrying out the following methods for automatically and continuously managing gas injection rates thereby improving well production.

IMPROVED METHODS FOR GAS LIFT OPERATIONS

[0023] In addition to providing the improved compressor system **10**, the present invention includes improved methods for controlling compressor system **10**. The methods disclosed below provide the well operator with the ability to identify and maintain gas injection rates which result in the minimum production pressure. The minimum production pressure will be determined either by a bottom hole sensor or a casing pressure sensor located at the surface or any convenient location capable of monitoring pressure at the wellhead. As used herein, the term minimum production pressure refers to that pressure as determined by either a bottom hole pressure sensor, a surface casing pressure sensor or other sensor suitable for determining or calculating the pressure at the bottom of the production casing necessary to lift fluids from the well thereby precluding liquid loading of the well bore. By maintaining the minimum production pressure, the operator is able to operate at the minimum gas injection rate required to produce oil and gas from the well. The minimum gas injection rate reduces friction within the wellbore and improves operational efficiencies.

[0024] When initiating gas lift operation, the operator will typically operate at an injection rate based on the characterization of the well after well completion. In general, the initial gas

injection rate is calculated based on the gas lift valving configuration, i.e. the type and location of the gas valves, used downhole and the amount of gas needed to unload a full column of liquid to above the first valve depth. The first valve is the valve closest to the surface. Typically, the initial gas injection rate is an estimate. If the initial gas injection rate permits production of the well, then the operator generally continues to use that injection rate. However, over time reservoir and surface conditions will change. In particular, changes in formation pressure, hydrocarbon flow rate into the wellbore and sales line pressure will impact production characteristics. As a result, the initial gas injection rate will not efficiently produce oil from the well for the life of the well.

[0025] The following method provides the ability to continuously adjust operation of compressor system **10** to ensure a gas injection rate which provides the minimum production pressure necessary to lift fluids from the well. The disclosed method has two primary components or modes. As used herein, the first primary component is referred to herein as the "Hunt Mode" and the second primary component is referred to herein as the "Critical Rate Mode." The Critical Rate Mode relies upon data developed during performance of the Hunt Mode. Optionally, the Hunt Mode may be used with or without practice of the Critical Rate Mode.

HUNT MODE

[0026] The Hunt Mode begins with the initial gas injection rate as determined based on factors described above. The methods for determining the initial gas injection rate are well known to those skilled in the art. Thus, the Hunt Mode focuses on determining the minimum gas injection rate corresponding to the minimum production pressure through manipulation and control of compressor system **10**.

[0027] In general, operating compressor system 10 at a gas injection rate which provides the minimum production pressure will produce a graph which corresponds to FIG. 4. FIG. 4 represents the specific gravity (S_g) of the well fluid mixture produced under varying gas injection rates and the friction resulting from production of wellbore fluids at the varying gas injection rates. The low point of the graph, where the gravity and friction lines intersect, will generally represent the minimum gas injection rate suitable for production of oil and other liquids at the minimum production pressure as determined by the available sensors. If the well includes a bottom hole pressure gauge or sensor then the value provided by the sensor is evaluated as the

production pressure; however, if a bottom hole pressure gauge is not available, then a pressure gauge or sensor on the surface casing will be used for estimating or determining the production pressure. Gas injection rates less than the intersection point will preclude the well from producing hydrocarbons at its maximum flow rate (q_{max}) under that gas lift design. As a result, the wellbore will load up with unproduced liquids. However, over-injecting gas will create additional friction during gas lift and preclude unloading at best efficiency.

[0028] The Hunt Mode provides for incremental alteration of injection rates above and below the initial gas injection rate. The method may be repeated after a period to time to readjust the gas injection rate to account for changes in reservoir and/or surface conditions. During the Hunt Mode, the gas injection rate is manipulated in a stepwise manner in order to identify the gas injection rate necessary for the minimum production pressure to lift wellbore fluids to the surface.

[0029] When operating in the Hunt Mode, the system identifies the desired gas injection rate using a range of injection rates. The hunt range of injection rates may vary from the prior injection rate by about 200 thousand standard cubic feet per day (mscfd) to about 1000 mscfd or up to the capacity of the compressor unit. More typically, the hunt range will vary injection rates from about 500 mscfd to about 700 mscfd.

[0030] The Hunt Mode will generally increase or decrease the injection rate in a stepwise incremental manner with the number of steps necessary to cover the entire selected range determined by the incremental change in injection rate. Each step of incremental change will be held for a defined time period, the incremental period. Typically, the incremental period will be between about 24 hours and 72 hours. More typically, the incremental period will be about 48 hours. During each incremental period, production pressure will be monitored. While monitoring of production pressure may take place for the duration of the incremental period, averaging of production pressure does not. To provide an accurate assessment of production pressure at the selected incremental injection rate, the well must be allowed to stabilize at that injection rate. Therefore, pressure averaging will take place only after well stabilization. Thus, pressure data obtained during the first 5% to 15% of the incremental period will be discarded. In other words, the average production pressure is determined over the last 85% to 95% of the incremental period. More typically, pressure data obtained during the first 10% of the incremental period will be discarded.

[0031] In one embodiment, the Hunt Mode will follow a predetermined pattern of step-up and step-down injection rates. In this embodiment, the first increment is a step-up or step-down where the gas injection rate is increased by a defined amount above the initial gas injection rate. If the first incremental period is a step-up, the increase may be between about 25 mscfd to about 100 mscfd. A typical increment for the step-up gas injection rate is about 20 mscfd or about 25 mscfd. The step-up gas injection rate will continue for the incremental period, typically 48 hours. Thus, if the initial gas injection rate is 600 mscfd, the step-up gas injection rate will take place for the incremental period of time at a rate of 625 mscfd. During the step-up gas injection, production pressure is monitored for an increase in pressure.

[0032] Each step-down or step-up increment will continue for the defined incremental period, typically 48 hours. Step-down increments may range from about 10 mscfd to about 100 mscfd. A typical increment for the step-down gas injection rate is about 20 mscfd or about 25 mscfd. After input of the incremental change and the total hunt range, one can determine the total number of step-down increments necessary to cover the hunt range of injection rates. As noted above, this determination will generally be carried out automatically by the programming associated with compressor system **10**. Thus, the Hunt Mode will require five step-down steps for a hunt range of 625 mscfd to 500 mscfd and a step-down increment of 25 mscfd. During each incremental step-down of gas injection rate, the production pressure, as determined by either bottom hole pressure or surface casing pressure, will be monitored and averaged as determined by the available sensors. As noted above, data obtained during the initial portion of the incremental period will be discarded. For clarity, a bottom hole pressure sensor is located at the bottom of the vertical portion of the wellbore and a surface casing pressure sensor is located at the surface in a portion of the production tubing.

[0033] Upon completion of all step-up and step-down incremental periods, the gas injection rate which produced the lowest production pressure is identified as the new Operational Gas Injection Rate, i.e. the solution. Compressor system **10** is set at the Operational Gas Injection Rate and allowed to maintain that rate for a defined production period of time. The defined production period for continuous operation at the Operational Gas Injection Rate will vary from well to well depending on factors such as effective reservoir size, reservoir pressure, the proximity of adjacent wells and surface conditions such as pressure and flow in the sales line. Ultimately, the user will define how long, in their estimation, the solution should be used before

repeating the Hunt Mode or utilizing the Critical Rate Mode described below. The well operator will also have the option of cutting short the selected period of operation at the solution in response to monitored conditions. Upon completion of the defined production period or a shorter period of time, the above described Hunt Mode can be repeated to determine a new Operational Gas Injection Rate.

[0034] The Hunt Mode for determining the minimum production pressure is not limited to initially operating with a first step-up increment followed by a series of step-down increments. Rather, the method may cover the entire hunt range of gas injection rates by incrementally increasing the gas injection rate from the initial gas injection rate to a desired higher gas injection rate. Likewise, the method may cover the entire hunt range of gas injection rates by incrementally decreasing the gas injection to a final lower gas injection rate. As described above, each incremental step will be for a defined incremental period at a defined incremental change in gas injection rate. Additionally, during each incremental period, the production pressure will be monitored and averaged after allowing the well to stabilize at the incremental gas injection rate.

[0035] In a preferred embodiment, the computer server associated with compressor system 10 is programmed on-site or remotely by the well operator with each variable discussed above. The computer server may be programmed to manage the methods described herein using conventional programming language. One skilled in the art will be familiar with programming code necessary to direct operation of compressor system **10** in accordance with the steps outlined herein. Each incremental step is monitored by compressor system **10** and reported by any convenient method, *e.g.* electronically, to the operator. Finally, the computer server associated with compressor system **10** calculates the average production pressure using the data obtained during each incremental step and selects the injection rate corresponding to the lowest average production pressure for subsequent continuous operations at the well. Upon completion of the user defined interval for continuous operation, either the well operator or compressor system **10** repeats the Hunt Mode to readjust the Operational Gas Injection Rate to account for changes in the downhole environment.

[0036] In summary, when practicing the Hunt Mode, the user or well operator will provide the initial gas injection rate as determined based on the gas lift valve design or when implemented on a currently producing gas lift system the current injection rate used to achieve

production. The user will then define the hunt range, the incremental change in gas injection rate and the number of increments to be used during the determination of the minimum production pressure. The conditions of the incremental period that produced the minimum production pressure are noted for use in the following Critical Rate Mode. Finally, the operator will define and input the length of the production period under which the well will operate at the Operational Gas Injection Rate determined by the Hunt Mode to provide the desired minimum production pressure.

[0037] Thus, the Hunt Mode can be described as follows:

- Enable automatic gas injection management mode
- start timer expires and compressor system **10** begins the managed gas injection rate hunt process
- incremental injection rates and incremental periods of time are enabled and performed
- during each incremental period, compressor system **10** ignores data during the first portion (5% to 15%) of the incremental period, upon stabilization of the well at the injection rate, monitored production pressure is then averaged for the remainder of each incremental period and recorded by compressor system **10**
- after all incremental injection rates for the incremental periods are completed, compressor system **10** determines which injection rate produced the lowest average production pressure
- compressor system **10** adjusts gas injection rate to correspond to the identified injection rate which produced the lowest average production pressure and maintains this identified gas injection rate for the defined production period
- upon expiration of the defined production period, compressor system **10** repeats these operations to establish a new gas injection rate appropriate for maintaining the lowest production pressure.

[0038] As an example of gas injection rate management using the Hunt Mode, consider operation of a gas lift well currently producing with a predetermined gas injection rate of 600 mscfd. Prior to initiating the gas injection management method, the operator determines the hunt range. In this instance, a hunt range of 500 mscfd to 640 mscfd is selected. An initial step-up increment of 40 mscfd is selected and subsequent step-down increment of 20 mscfd is selected.

Thus, the first increment will provide the initial step-up to 640 mscfd while seven step-down increments will be required to reach the low end of 500 mscfd. In this example, the operator determined that the step-up increment will take place over a single 48-hour incremental period. Likewise, the operator determined that each step-down increment occurs over incremental periods of 48 hours. Thus, upon completion of the step-up increment, the well will then operate at a gas injection rate of 620 mscfd for an incremental period of 48 hours. Each subsequent step-down increment will also take place for a defined incremental period of 48 hours. The operator has also established the defined production period as the three weeks following determination of the gas injection rate which provides the lowest production pressure.

[0039] Upon enablement of the Hunt Mode, the computer server associated with compressor system **10** begins by directing the step-up increment. Thus, in this example, compressor system 10 operates at 640 mscfd for an incremental period of 48 hours and determines an average production pressure over the last 43.2 hours of the step-up incremental period.

[0040] Upon completion of the defined incremental period for the step-up increment, the computer server associated with compressor system **10** directs operations at each step-down incremental period for the defined length of time. Thus, upon initiation of the first step-down incremental period of 48 hours, the gas injection rate is reduced to 620 mscfd. Each successive step-down incremental period operates at the defined incremental reduction in gas injection rate of 20 mscfd until the final step-down increment of 500 mscfd. As discussed above, the average production pressure will be determined over the last 43.2 hours of each step-down incremental period.

[0041] Upon completion of the last incremental period, the computer server associated with compressor system **10** identifies the gas injection rate associated with the lowest average production pressure for a defined incremental period. The identified gas injection rate is designated as the Operational Gas Injection Rate. Then, the computer server associated with compressor system **10** adjusts automatically to continue production of the well at the new Operational Gas Injection Rate. The computer server associated with compressor system **10** will maintain the selected Operational Gas Injection Rate for a period of three weeks as defined by the operator. Upon completion of the three-week or other selected time period, the solution rate can be used to enable the Critical Rate Mode of operation. If insufficient data is available after the selected time period to enable Critical Rate Mode operation, the process will be repeated

using the same values for step-up, step-down and the defined incremental periods of time unless altered by the operator. Thus, the Hunt Mode provides for repeated adjustment of the Operational Gas Injection Rate to maintain well operation at the injection rate which provides the minimum production pressure.

[0042] The Hunt Mode provides a marked improvement over traditional gas lift operations; however, the Hunt Mode does not provide for continuous real time or even daily adjustment of the gas injection rate. Fortunately, data necessary to continuously update the gas injection rate can be obtained by continuously monitoring the production rate; average production tubing pressure, average production pressure, average sales line pressure. These values and others as discussed below are used in the Critical Rate Mode. While the Hunt Mode can be considered an empirical determination of the desired gas injection rate, the Critical Rate Mode builds on the Hunt Mode empirical solution and provides a continuously updated calculated value of the gas injection rate necessary to produce wellbore fluids to the surface at the minimum production pressure. Thus, the Critical Rate Mode provides continuous fine tuning of the gas injection rate thereby improving production efficiency of the well. Further, the Critical Rate Mode utilizes the current gas production rate of the well and adjusts the gas injection rate accordingly to avoid over-injecting and under-injecting the well. Thus, the Critical Rate Mode operates at the minimum gas injection rate, i.e. the critical rate, necessary to unload the well of all liquids.

CRITICAL RATE MODE

[0043] The Critical Rate Mode will be discussed with reference to FIGS. 4-9. FIGS. 5A and 5B provide process flow diagrams of the operations carried out by the computer server associated with compressor system **10** to determine the gas injection rate needed to unload fluids from the wellbore at a given production pressure, i.e. the critical rate of gas injection. In performing the operations, the computer server can use production pressure data as measured directly by a gauge or sensor or the computer server may calculate the production pressure, as described below, using the Hagedorn and Brown equations of FIGS. 9A-B and a surface casing sensor.

[0044] FIG. 5A provides the process flow diagram for determining the static Vogel IPR parameters of: $\bar{P}$ = Average reservoir pressure, psi; and, q_{max} = Maximum flow rate of fluids out of the well, ft^3/day or barrels per day. In general, the units used in either Mode can be adjusted by programming to accommodate the units commonly used by those in the field. FIG. 5B

incorporates the Vogel IPR parameters produced by FIG. 5A as static values and utilizes real time production pressure data or calculated production pressure data and fluid flow rates out of the formation to adjust the critical rate of gas injection. The operations described by the process flow diagrams of FIGS. 5A and 5B are programmed into the computer server associated with compressor system **10**. Thus, the processes of FIGS. 5A and 5B provide the ability to control the operation of compressor system **10** when operating under the Critical Rate Mode.

[0045] As will be described in more detail below, the process flow diagram of FIG. 5B utilizes the Hagedorn and Brown Equations of FIGS. 9A and 9B to calculate a production pressure based on the measured surface casing pressure and the calculated gravitational pressure loss ΔP_g (psi, Equation 1) and calculated frictional pressure loss ΔP_g (psi, Equation 2) over the vertical distance of the wellbore. The calculated production pressure value is then used in the GUO equation provided at the top of FIG. 6A to calculate the rate of gas injection for use in Step 2 of FIG. 5B. However, if the well has a bottom hole pressure gauge, then the step of using Hagedorn and Brown of FIGS. 9A and 9B can be skipped and the measured production pressure inserted into the GUO equation for use in Step 2 of FIG. 5B.

[0046] The iterative process of FIG. 5A utilizes data obtained from the incremental period of the Hunt Mode which produced the Operational Gas Injection Rate. Additionally, the process of FIG. 5A utilizes operator input relating to the configuration of the well and the configuration of the gas valves installed in the completed well.

[0047] In Step 1 of FIG. 5A, the operator provides an initial estimate of $q_{\max}$ and $\bar{P}$. With reference to FIG. 8, a starting point for the initial estimate of $\bar{P}$ (average reservoir pressure) is the normal pressure gradient commonly used to estimate the reservoir pressure and the starting point for the initial estimate of $q_{\max}$ (maximum flow rate of fluids through the borehole of the well) is a value equal to double the well's current production rate. When the well in question is part of a larger reservoir, then engineering knowledge of offset wells and data collected from reservoir can be used to establish the initial estimates of $\bar{P}$ and $q_{\max}$. As discussed below, the estimated values are merely the initiation of the process as the method provides an iterative process for establishing the static values of $\bar{P}$ and $q_{\max}$. Therefore, the initial best guess will be sufficient to begin the described method and one skilled in the art of hydrocarbon production will be readily capable of providing a reasonable initial estimate of these values. In Step 1, user inputs and other

data points will include the following properties relating to the completed wellbore and wellbore operations during the Hunt Mode:

- estimated $q_{\max}$ – maximum flow rate of fluids through the borehole of the well
- $\bar{P}$ – Average reservoir pressure
- true vertical depth (TVD) of the well, feet
- measured depth (MD) of the well, feet
- total production tubing length, feet
- inner diameter of casing, inches
- inner diameter of production tubing, inches
- valve design and depth relative to MD and TVD, and closing pressure of each valve, in psi
- Q_S = Solid flow rate, ft^3/d
- Q_W = Water flow rate, bbl/d
- Q_O = Oil flow rate, bbl/d
- Q_G = Gas flow rate, Mscf/d
- S_S = Specific gravity of solids, as determined by the operator
- S_W = Specific gravity of water, as determined by the operator
- S_O = Specific gravity of oil, as determined by the operator
- S_G = Specific gravity of gas (air = 1, natural gas approximately 0.7 to 0.85 as determined by the operator)
- T_{av} = Average temperature, calculated based on monitored surface temperature and estimated bottom hole temperatures
- A_i = Pipe cross-sectional area, in^2 as calculated based on the tubing inside diameter
- g = Gravitational acceleration, 32.17 ft/s^2
- D_h = Hydraulic diameter, in (is calculated based on user definition of flow)
- θ = Inclination angle, degrees as calculated
- ε' = Pipe wall roughness, in (an assumed value for wellbore pipe)
- T_{bh} = bottom hole temperature (may be an estimate)
- Q_{gm} = total air/gas injection rate required to carry liquid droplets (scf/min) as calculated by the iterative process of FIG. 5B

- E_{km} = minimum kinetic energy required to carry liquid droplets (lb_f - ft/ft^3) as calculated by iterative process of FIG. 5B
- P_{hf} = production pressure (psi) as measured by a bottom hole sensor or calculated per the equations of FIGS. 9A-C
- The variables identified in association with the Hagedorn & Brown equations of FIGS. 9A-C include inputs and calculated values known to those skilled in the art.

[0048] Following Step 1, completion of the operations of FIG. 5A requires an iterative determination (Steps 2 and 3) to produce the static Vogel IPR parameters of q_{max} and $\bar{P}$ corresponding to the gas injection rate that will produce a minimum production pressure within the tolerance range of the Operational Gas Injection Rate identified during the Hunt Mode and the wellbore schematic. The acceptable tolerance range for purposes of setting q_{max} and $\bar{P}$ is that injection rate within about 5% of the Operational Gas Injection Rate that produced the Minimum Production Pressure associated with the Incremental Period.

[0049] As discussed above, Step 1 includes an initial estimate of the values of q_{max} and $\bar{P}$. In Step 2, the operator or the computer server associated with compressor **10** uses the Hagedorn & Brown equations of FIGS. 9A and 9B to solve for a production pressure. However, if a downhole pressure gauge is used then the production pressure is provided by the direct measurement. Following determination of the production pressure by calculation or direct measurement, Step 2 uses the GUO equations of FIGS. 6A and 6B to solve for the total gas injection rate needed to unload fluids from the well and compares the total gas injection rate to the Operational Gas Injection Rate from the Incremental Period that produced the Minimum Production Pressure. In Step 3, the operator or computer determines if the total gas injection rate is within an acceptable tolerance range when compared to the Operational Gas Injection Rate. If not then they edit q_{max} and $\bar{P}$ and continue the iterative process until values within the tolerance range are obtained.

[0050] Thus, the Hunt Method Operational Gas Injection Rate provides the target value for the GUO solution. If the initial estimates of q_{max} and $\bar{P}$ produce a gas injection rate value within about 5% of the Operational Gas Injection Rate for the Incremental Period that produce the Operational Gas Injection Rate, i.e. the tolerance range, then the system or user establishes the q_{max} and $\bar{P}$ as the Vogel static values. If the value of the initially determined gas injection rate produces a GUO solution value outside of the tolerance range, the system or user will perform

iterative calculations by changing the initial estimate of q_{max} and $\bar{P}$ and repeating steps 2-3 until the determined total gas injection rate, when compared to the Operational Gas Injection Rate from the Hunt Mode that produced the Minimum Production Pressure, is within the indicated 5% tolerance range.

[0051] The Vogel static values of q_{max} and $\bar{P}$ provide the Vogel Curve identified in FIG. 8. Upon establishment of the Vogel Curve, the user will then set compressor system 10 to operate in Critical Rate Mode as determined by FIG. 5B. In addition to depicting the Vogel Curve, the graph of FIG. 8 depicts the Hagedorn & Brown model for injection rates at various production pressures and fluid flow rates from the reservoir into the well. The intersection of the Hagedorn and Brown outflow model **42** at the gas injection rate with the Vogel IPR Curve **44** identifies the production pressure (bottom hole pressure) needed to calculate the Q_{gm} point **46**, i.e. the minimum gas flow rate required to unload liquid from the well, at the static values of q_{max} and $\bar{P}$, as determined by the GUO equation at the top of FIG. 6A. Thus, FIG. 8 provides a visualization of changes in the Q_{gm} values in response to changes in production pressure (P_{wf} in FIG. 7 and P_{hf} in FIG. 6A) and fluid flow rates (Q_o oil flow in bbl/d, Q_g gas flow in mscfd, Q_w water flow in bbl/d) during the course of production from the well.

[0052] When operating in the Critical Rate Mode the computer server follows the process flow diagram of FIG. 5B. In Step 1, the computer server receives the static values for q_{max} and $\bar{P}$ from the operator, or from the memory portion of the computer server corresponding to the data use in Step 1 of FIG. 5A. Additionally, Step 1 of FIG. 5B, uses live sensor data directed to fluid flow rates (Q_o oil flow in bbl/d, Q_g gas flow in mscfd, Q_w water flow in bbl/d) and data corresponding to monitored production pressure or surface casing pressure suitable for calculating production pressure. Data values may be transmitted directly from the respective sensors to the computer server or may be input manually by the operator. Preferably, the data is entered in real time as an upload from the sensors. The frequency of monitoring fluid flow rates and monitoring/calculating production pressure is operator dependent as determined by the nature of the well. Compressor system **10** is capable of calculating a new critical rate of gas injection as frequently as the sensors can provide the relevant data. Thus, the limiting factor in updating the critical rate of gas injection will be the ability of the sensors to transmit data and/or the ability of compressor **10** to respond to the new input provided by the computer associated with compressor system **10**.

[0053] When operating under the process flow diagram of FIG. 5B, the receipt of new data by the computer associated with compressor system **10** will trigger the operation of Step 2. In Step 2, if the well has a bottom hole pressure sensor the new bottom hole, the new production pressure value is used directly in Equation 1 of the GUO equations provided in FIG. 6A. Additionally, the monitored values for (Q_o oil flow in bbl/d, Q_g gas flow in mscfd, Q_w water flow in bbl/d) are used in Equation 1 of FIG. 6A. One skilled in the art will recognize that Equation 1 is a condensed equation and that equations 2-14 provide for expansion and determination of Q_{gm}. These calculations are performed by the computer associated with compressor system **10**. Briefly, the operation initially sets Equation 1 to equal zero. Subsequently, in step 3, the value of Q_{gm} is solved iteratively using the Newton-Raphson Method for approximating the root of a function. The computer associated with compressor system **10** will continue the iterative calculation by adjusting the value of Q_{gm} until the final resulting value is within about 1 mscfd to about 5 mscfd of the previous iterated value. Typically, the target variation between the final resulting value of Q_{gm} and the previously iterated value is 5 mscfd.

[0054] If a bottom hole pressure sensor is not used in the well, the process flow diagram of FIG. 5B allows for utilization of a surface casing pressure gauge or sensor in the calculation of the total gas flow rate, Q_{gm}. Under these conditions, the surface pressure casing sensor provides data to the computer associated with compressor system **10**. Then in Step 2, the computer server calculates the production pressure value using the Hagedorn & Brown equations of FIGS. 9A and 9B. In this case, the production pressure corresponds the surface casing pressure plus the pressure values corresponding to the calculated gravitational pressure loss ΔP_g (psi)(Equation 1) and calculated frictional pressure loss ΔP_g (psi)(Equation 2) over the vertical distance of the wellbore. The remaining equations of FIGS. 9A and 9B provide values necessary for resolving Equation 1 and Equation 2. Then, in Step 3, the resulting calculated production pressure is then used in the GUO Equation 1 of FIG. 6A, as discussed above with regard to the measured production pressure, to calculate the total gas flow rate Q_{gm} in mscfd necessary to unload liquids from the well.

[0055] In Step 3 of FIG. 5B, compressor system **10** determines whether or not the iterative process of Step 2 has produced a solution value within 5 mscfd of the prior iterative answer. If this value is also within the tolerance range of about 5.0% then the computer associated with compressor system **10** proceeds to Step 4 and uses the calculated Q_{gm} as the total gas flow

required to unload fluids from the well. In Step 5, the current gas product rate from the well is subtracted from Q_{gm} to provide a final Critical Gas Injection rate. As reflected by Step 6, if the final Critical Gas Injection rate is greater than zero, then the final Critical Gas Injection rate is used to unload the well. If the value is less than zero, the gas lift is not needed to produce fluids.

[0056] In Step 3, if the initial calculated Q_{gm} point falls outside of the accepted tolerance range, then the iterative calculation process continues using the Newton-Raphson Method until the Q_{gm} value falls within the predetermined tolerance range for the Q_{gm} value.

[0057] FIG. 8 provides a visual interpretation of the intersection of the solution rate of FIG. 5B with the Vogel IPR parameters. The dashed curves show how changing the values of the Vogel IPR parameters of variables q_{max} *and* $\bar{P}$ (maximum flow rate and average reservoir pressure) can affect the intersection value of the Hagedorn & Brown production pressure, which is used to find the GUO critical gas injection rate. Additionally, the solid hooked curve labeled Hagedorn-Brown Model depicts how changes in production pressure and fluid production rate influence the gas flow rate needed to produce fluids. Finally, the point labeled Q_{gm} identifies the critical rate of gas needed to unload liquids from the well at the minimum production pressure. This critical gas rate is provided by GUO solution and then the computer will subtract the measured gas production rate of the well from the GUO critical rate solution to provide the computer instructed gas injection rate used by the compressor.

[0058] To summarize FIG. 5B, upon identification of the static values for variables q_{max} *and* $\bar{P}$, compressor system **10** initiates calculation of the gas injection rate using the entire flow chart of FIG. 5B. Compressor system **10** uses the static IPR values from FIG. 5A in Steps 1-2 to generate a gas injection rate for use in Step 3. The calculations performed in Steps 1-2 also use the most recently measured production pressure (P_{hf}) and the most recently determined fluid production rate for all fluids produced by the well (q). Thus, Step 4 provides an output equal to the total gas flow from the bottom of the well necessary to unload the well. In Step 5, the computer subtracts the value corresponding to the current net gas produced by the well from the total gas flow of Step 4. If the resulting value is greater than zero, the resulting value is used as the current gas injection rate. If the resulting value is less than zero, then gas injection is not required to unload the fluids from the well.

[0059] To exemplify the control over the gas injection rate provided by the Critical Rate Mode, we can assume that upon completion of the Hunt Mode, compressor system **10** identified

620 mscfd as the minimum gas injection rate associated with the defined time period of the Hunt Mode which produced the lowest average production pressure for production of the well. Upon identification of the minimum gas injection rate by the Hunt Mode, compressor system **10** automatically stores this value in its memory or the operator records the value for future reference. In this instance, the operator stored or retrieved the following values as corresponding to the gas injection rate of 620 mscfd determined by the Hunt Mode: 750 lbs/in^2 as the average production pressure (P_{csg} surface casing pressure in lbs/in^2 or P_{wf} = production pressure, lbs/in^2), the average tubing pressure 125 lbs/in^2 (P_{tbg} in lbs/in^2) and 250 Q_o oil flow in bbl/d, 350 Q_w water flow in bbl/d, and 898 Q_g gas flow in mscfd as the fluid production rate). Additionally, as noted above, the variables necessary for the determination of Equations 1-20 in FIGS. 9A-C and Equations 1-14 in FIGS. 6A-B are known from the preparation of the wellbore and the Hunt Mode.

[0060] Upon completion of the Hunt Mode and storage of the values, the operator will determine variables of q_{max} and $\bar{P}$ by solving the critical rate equation (Equation 1 of FIG. 6A) and editing q_{max} and $\bar{P}$ until solution is within tolerance of the Operational Gas Injection rate provided by the Hunt Mode as described above. If using the generated production pressure value from FIGS. 9A & 9B in Equations 1-14 of FIGS. 6A and 6B generates a gas injection rate within acceptable tolerance 0.0 to 5.0% of the gas injection rate provided by the Hunt Mode, then the selected values of variables q_{max} and $\bar{P}$ become static values for use in Equations 1-14 of FIGS. 6A and 6B and Equations 1-20 of FIGS. 9A-C in the performance of the flow chart of FIG. 5B. Then user will switch to the Critical Rate Mode and input these determined values for variables q_{max} and $\bar{P}$ of the Vogel IPR Equation. Using the Hagedorn and Brown formulas of FIGS. 9A & 9B, compressor system **10** generates a production pressure value (P_{wf} in FIG. 7, p_{hf} in FIG. 6A, equation 3) for use in Equations 1-14 of FIGS. 6A and 6B.

[0061] For the purpose of this example, assume that the resulting gas injection rate is 615 mscfd which is within 1% of 620 mscfd. Therefore, the adjusted variables q_{max} and $\bar{P}$ become static within the calculations performed by compressor system **10**. As a result, the Critical Rate Mode continues on a going forward basis using the static values and adjusting the gas injection rate only in response to changes in tubing and casing pressure to inform the process of equations in FIG. 5B and fluid production rate (Q_o oil flow in bbl/d, Q_g gas flow in mscfd, Q_w water flow in bbl/d) as determined by sensors and gauges associated with the wellbore.

[0062] Thus, with reference to FIG. 5B, the computer server of compressor system **10** utilizes the static values and measured values directly with a production pressure (bottom hole pressure gauge or indirectly using the surface casing pressure gauge) and fluid production rate (Q_o oil flow in bbl/d, Q_g gas flow in mscfd, Q_w water flow in bbl/d) in Steps 1-3 to generate, through an iterative process, a total gas injection rate. Provided that the resulting gas injection rate is within the predetermined tolerance level, the computer or PLC subtracts the current gas production rate from the calculated gas injection rate (Step 5) to provide the Critical Gas Rate. If the resulting value is greater than zero, then according to Step 6, the computer or PLC of compressor system **10** directs the compressor to provide the Critical Gas Rate injection value to the downhole portion of the wellbore.

[0063] Thus, the Critical Rate Mode provides the most efficient production of fluids from the wellbore as the Critical Rate Mode utilizes the gas injection rate determined by the Hunt Mode while compensating for changes in fluid inflow to the wellbore and changes in downstream gas pressures. The compensation allows the Critical Rate Mode to continuously adjust the gas injection rate to ensure that the compressor system **10** efficiently produces all fluids from the well.

[0064] Other embodiments of the present invention will be apparent to one skilled in the art. As such, the foregoing description merely enables and describes the general uses and methods of the present invention. Accordingly, the following claims define the true scope of the present invention.

What is claimed is:

1. A method for controlling a compressor system for gas lift operations comprising:

operating the compressor system at an initial gas injection rate sufficient to lift all liquids from the well;

operating the compressor system for a first incremental period of time at a first incremental gas injection rate greater than the initial gas injection rate;

continuing to produce liquids from the well during the first incremental period while monitoring production pressure within the well;

determining the average production pressure over the incremental period;

operating the compressor system for a second incremental period of time at a second incremental gas injection rate where the second incremental gas injection rate is greater than the first incremental gas injection rate;

continuing to produce liquids from the well during the second incremental period while monitoring production pressure within the well;

determining the average production pressure over the second incremental period;

operating the compressor system for a third incremental period of time at a third incremental gas injection rate where the third incremental gas injection rate is greater than the second incremental gas injection rate;

continuing to produce liquids from the well during the third incremental period while monitoring production pressure within the well;

determining the average production pressure over the third incremental period;

identifying the incremental gas injection rate which produced the lowest production pressure while unloading all fluids from the well;

setting the identified incremental gas injection rate as the operational gas injection rate for the compressor system and operating the compressor system to produce all fluids from the well.

2. The method of claim 1, further comprising the steps of:

after the third incremental period, operating the compressor system for fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fourth incremental period.

3. The method of claim 1, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is greater than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fifth incremental period.

4. The method of claim 1, further comprising:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is greater than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fifth incremental period;

after the fifth incremental period, operating the compressor system for a sixth incremental period of time at a sixth incremental gas injection rate where the sixth incremental gas injection rate is greater than the fifth incremental gas injection rate;

continuing to produce liquids from the well during the sixth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the sixth incremental period.

5. The method of claim 1, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 80 mscfd.

6. The method of claim 1, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 25 mscfd.

7. The method of claim 1, wherein the production pressure is measured directly by a bottom hole sensor or calculated based on a pressure reading provided by a surface casing pressure sensor.

8. The method of claim 1, further comprising the step of recording the well conditions of fluid flow rates, gas production rate and gas injection rate which produced the lowest average production pressure during the incremental periods.

9. The method of claim 1, wherein the incremental period lasts between about 24 hours and about 72 hours.

10. The method of claim 1, wherein the incremental period lasts between about 36 hours and about 60 hours.

11. The method of claim 1, further comprising the steps of:

estimating the maximum flow rate of fluids out of the well (q_{max}) and the average reservoir pressure ($\bar{P}$) at the maximum flow rate of fluids out of the well;

measuring the production pressure using a bottom hole sensor or measuring the surface casing pressure using a surface sensor and calculating the production pressure;

calculate the total gas injection rate needed to unload all fluids from the wellbore using the measured or calculated production pressure and the estimated values of q_{max} and $\bar{P}$;

comparing the calculated total gas injection rate to the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, if the calculated total gas injection rate is within the tolerance range of the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, then set the values of q_{max} and $\bar{P}$ as

static values for the calculation of the minimum gas injection rate necessary to unload the well of all liquids;

calculate the minimum gas injection rate necessary to unload the well of all liquids; and

directing the compressor system to operate at the calculated minimum gas injection rate.

12. The method of claim 11, wherein the tolerance range of the gas injection rate is 5%.

13. The method of claim 11, wherein the step of calculating the minimum gas injection rate necessary to unload the well of all liquids, further comprises the steps of:

monitoring fluid flow rates of water, gas, and oil out of the well;

monitoring bottom hole pressure or calculating bottom hole pressure by using a monitored surface casing pressure;

calculating the total gas flow rate needed to carry all fluids out of the well;

subtracting the flow rate of gas out of the well from the calculated total gas flow rate needed to carry all fluids out of the well to provide the minimum gas injection rate necessary to unload the well of all liquids; and

operating the compressor system at the minimum gas injection rate necessary to unload the well of all liquids.

14. The method of claim 13, wherein the step of calculating the total gas flow rate needed to carry all fluids out of the well is an iterative calculation which repeats until the calculated total gas flow rate needed to carry all fluids out of the well is within 5 mscfd of the prior iterative calculation

15. The method of claim 13, further comprising the step of comparing the critical gas injection rate to the flow rate of gas out of the well and ceasing compressor system operation when the critical gas injection rate is less than the flow rate of gas out of the well.

16. A method for controlling a compressor system for gas lift operations comprising:

operating the compressor system at an initial gas injection rate sufficient to lift all liquids from the well;

operating the compressor system for a first incremental period of time at a first incremental gas injection rate less than the initial gas injection rate;

continuing to produce liquids from the well during the first incremental period while monitoring production pressure within the well;

determining the average production pressure over the incremental period;

operating the compressor system for a second incremental period of time at a second incremental gas injection rate where the second incremental gas injection rate is less than the first incremental gas injection rate;

continuing to produce liquids from the well during the second incremental period while monitoring production pressure within the well;

determining the average production pressure over the second incremental period;

operating the compressor system for a third incremental period of time at a third incremental gas injection rate where the third incremental gas injection rate is less than the second incremental gas injection rate;

continuing to produce liquids from the well during the third incremental period while monitoring production pressure within the well;

determining the average production pressure over the third incremental period;

identifying the incremental gas injection rate which produced the lowest production pressure while unloading all fluids from the well; and

setting the identified incremental gas injection rate as the operational gas injection rate for the compressor system and operating the compressor system to produce all fluids from the well.

17. The method of claim 16, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fourth incremental period.

18. The method of claim 16, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is less than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fifth incremental period.

19. The method of claim 16, further comprising:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is less than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fifth incremental period;

after the fifth incremental period, operating the compressor system for a sixth incremental period of time at a sixth incremental gas injection rate where the sixth incremental gas injection rate is less than the fifth incremental gas injection rate;

continuing to produce liquids from the well during the sixth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the sixth incremental period.

20. The method of claim 16, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 80 mscfd.

21. The method of claim 16, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 25 mscfd.

22. The method of claim 16, wherein the production pressure is measured directly by a bottom hole sensor or calculated based on a pressure reading provided by a surface casing pressure sensor.

23. The method of claim 16, further comprising the step of recording the well conditions of fluid flow rates, gas production rate and gas injection rate which produced the lowest average production pressure during the incremental periods.

24. The method of claim 16, wherein the incremental period lasts between about 24 hours and about 72 hours.

25. The method of claim 16, wherein the incremental period lasts between about 36 hours and about 60 hours.

26. The method of claim 16, further comprising the steps of:

estimating the maximum flow rate of fluids out of the well (q_{max}) and the average reservoir pressure ($\bar{P}$) at the maximum flow rate of fluids out of the well;

measuring the production pressure using a bottom hole sensor or measuring the surface casing pressure using a surface sensor and calculating the production pressure;

calculate the total gas injection rate needed to unload all fluids from the wellbore using the measured or calculated production pressure and the estimated values of q_{max} and $\bar{P}$;

comparing the calculated total gas injection rate to the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, if the calculated total gas injection rate is within the tolerance range of the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, then set the values of q_{max} and $\bar{P}$ as static values for the calculation of the minimum gas injection rate necessary to unload the well of all liquids;

calculate the minimum gas injection rate necessary to unload the well of all liquids; and

directing the compressor system to operate at the calculated minimum gas injection rate.

27. The method of claim 26, wherein the tolerance range of the gas injection rate is 5%.

28. The method of claim 26, wherein the step of calculating the minimum gas injection rate necessary to unload the well of all liquids, further comprises the steps of:

monitoring fluid flow rates of water, gas, and oil out of the well;

monitoring bottom hole pressure or calculating bottom hole pressure by using a monitored surface casing pressure;

calculating the total gas flow rate needed to carry all fluids out of the well;

subtracting the flow rate of gas out of the well from the calculated total gas flow rate needed to carry all fluids out of the well to provide the minimum gas injection rate necessary to unload the well of all liquids; and

operating the compressor system at the minimum gas injection rate necessary to unload the well of all liquids.

29. The method of claim 28, wherein the step of calculating the total gas flow rate needed to carry all fluids out of the well is an iterative calculation which repeats until the calculated total gas flow rate needed to carry all fluids out of the well is within 5 mscfd of the prior iterative calculation.

30. The method of claim 28, further comprising the step of comparing the critical gas injection rate to the flow rate of gas out of the well and ceasing compressor system operation when the critical gas injection rate is less than the flow rate of gas out of the well.

31. A method for controlling a compressor system for gas lift operations comprising:

operating the compressor system at an initial gas injection rate sufficient to lift all liquids from the well;

operating the compressor system for a first incremental period of time at a first incremental gas injection rate greater than the initial gas injection rate;

continuing to produce liquids from the well during the first incremental period while monitoring production pressure within the well;

determining the average production pressure over the incremental period;

operating the compressor system for a second incremental period of time at a second incremental gas injection rate where the second incremental gas injection rate is less than the first incremental gas injection rate;

continuing to produce liquids from the well during the second incremental period while monitoring production pressure within the well;

determining the average production pressure over the second incremental period;

operating the compressor system for a third incremental period of time at a third incremental gas injection rate where the third incremental gas injection rate is less than the second incremental gas injection rate;

continuing to produce liquids from the well during the third incremental period while monitoring production pressure within the well;

determining the average production pressure over the third incremental period;

identifying the incremental gas injection rate which produced the lowest production pressure while unloading all fluids from the well; and

setting the identified incremental gas injection rate as the operational gas injection rate for the compressor system and operating the compressor system to produce all fluids from the well.

32. The method of claim 31, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fourth incremental period.

33. The method of claim 31, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is less than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fifth incremental period.

34. The method of claim 31, further comprising:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is less than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is less than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fifth incremental period;

after the fifth incremental period, operating the compressor system for a sixth incremental period of time at a sixth incremental gas injection rate where the sixth incremental gas injection rate is less than the fifth incremental gas injection rate;

continuing to produce liquids from the well during the sixth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the sixth incremental period.

35. The method of claim 31, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 80 mscfd.

36. The method of claim 31, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 25 mscfd.

37. The method of claim 31, wherein the production pressure is measured directly by a bottom hole sensor or calculated based on a pressure reading provided by a surface casing pressure sensor.

38. The method of claim 31, further comprising the step of recording the well conditions of fluid flow rates, gas production rate and gas injection rate which produced the lowest average production pressure during the incremental periods.

39. The method of claim 31, wherein the incremental period lasts between about 24 hours and about 72 hours.

40. The method of claim 31, wherein the incremental period lasts between about 36 hours and about 60 hours.

41. The method of claim 31, further comprising the steps of:

estimating the maximum flow rate of fluids out of the well (q_{max}) and the average reservoir pressure ($\bar{P}$) at the maximum flow rate of fluids out of the well;

measuring the production pressure using a bottom hole sensor or measuring the surface casing pressure using a surface sensor and calculating the production pressure;

calculate the total gas injection rate needed to unload all fluids from the wellbore using the measured or calculated production pressure and the estimated values of q_{max} and $\bar{P}$;

comparing the calculated total gas injection rate to the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, if the calculated total gas injection rate is within the tolerance range of the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, then set the values of q_{max} and $\bar{P}$ as static values for the calculation of the minimum gas injection rate necessary to unload the well of all liquids;

calculate the minimum gas injection rate necessary to unload the well of all liquids; and

directing the compressor system to operate at the calculated minimum gas injection rate.

42. The method of claim 41, wherein the tolerance range of the gas injection rate is 5%.

43. The method of claim 41, wherein the step of calculating the minimum gas injection rate necessary to unload the well of all liquids, further comprises the steps of:

monitoring fluid flow rates of water, gas, and oil out of the well;

monitoring bottom hole pressure or calculating bottom hole pressure by using a monitored surface casing pressure;

calculating the total gas flow rate needed to carry all fluids out of the well;

subtracting the flow rate of gas out of the well from the calculated total gas flow rate needed to carry all fluids out of the well to provide the minimum gas injection rate necessary to unload the well of all liquids; and

operating the compressor system at the minimum gas injection rate necessary to unload the well of all liquids.

44. The method of claim 43, wherein the step of calculating the total gas flow rate needed to carry all fluids out of the well is an iterative calculation which repeats until the calculated total

gas flow rate needed to carry all fluids out of the well is within 5 mscfd of the prior iterative calculation.

45. The method of claim 43, further comprising the step of comparing the critical gas injection rate to the flow rate of gas out of the well and ceasing compressor system operation when the critical gas injection rate is less than the flow rate of gas out of the well.

46. A method for controlling a compressor system for gas lift operations comprising:

operating the compressor system at an initial gas injection rate sufficient to lift all liquids from the well;

operating the compressor system for a first incremental period of time at a first incremental gas injection rate less than the initial gas injection rate;

continuing to produce liquids from the well during the first incremental period while monitoring production pressure within the well;

determining the average production pressure over the incremental period;

operating the compressor system for a second incremental period of time at a second incremental gas injection rate where the second incremental gas injection rate is greater than the first incremental gas injection rate;

continuing to produce liquids from the well during the second incremental period while monitoring production pressure within the well;

determining the average production pressure over the second incremental period;

operating the compressor system for a third incremental period of time at a third incremental gas injection rate where the third incremental gas injection rate is greater than the second incremental gas injection rate;

continuing to produce liquids from the well during the third incremental period while monitoring production pressure within the well;

determining the average production pressure over the third incremental period;

identifying the incremental gas injection rate which produced the lowest production pressure while unloading all fluids from the well; and

setting the identified incremental gas injection rate as the operational gas injection rate for the compressor system and operating the compressor system to produce all fluids from the well.

47. The method of claim 46, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fourth incremental period.

48. The method of claim 46, further comprising the steps of:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is greater than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the fifth incremental period.

49. The method of claim 46, further comprising:

after the third incremental period, operating the compressor system for a fourth incremental period of time at a fourth incremental gas injection rate where the fourth incremental gas injection rate is greater than the third incremental gas injection rate;

continuing to produce liquids from the well during the fourth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fourth incremental period;

after the fourth incremental period, operating the compressor system for a fifth incremental period of time at a fifth incremental gas injection rate where the fifth incremental gas injection rate is greater than the fourth incremental gas injection rate;

continuing to produce liquids from the well during the fifth incremental period while monitoring production pressure within the well;

determining the average production pressure over the fifth incremental period;

after the fifth incremental period, operating the compressor system for a sixth incremental period of time at a sixth incremental gas injection rate where the sixth incremental gas injection rate is greater than the fifth incremental gas injection rate;

continuing to produce liquids from the well during the sixth incremental period while monitoring production pressure within the well; and

determining the average production pressure over the sixth incremental period.

50. The method of claim 46, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 80 mscfd.

51. The method of claim 46, wherein the increase in gas injection rate during the first, second, and third incremental periods is about 20 mscfd to about 25 mscfd.

52. The method of claim 46, wherein the production pressure is measured directly by a bottom hole sensor or calculated based on a pressure reading provided by a surface casing pressure sensor.

53. The method of claim 46, further comprising the step of recording the well conditions of fluid flow rates, gas production rate and gas injection rate which produced the lowest average production pressure during the incremental periods.

54. The method of claim 46, wherein the incremental period lasts between about 24 hours and about 72 hours.

55. The method of claim 46, wherein the incremental period lasts between about 36 hours and about 60 hours.

56. The method of claim 46, further comprising the steps of:

estimating the maximum flow rate of fluids out of the well (q_{max}) and the average reservoir pressure ($\bar{P}$) at the maximum flow rate of fluids out of the well;

measuring the production pressure using a bottom hole sensor or measuring the surface casing pressure using a surface sensor and calculating the production pressure;

calculate the total gas injection rate needed to unload all fluids from the wellbore using the measured or calculated production pressure and the estimated values of q_{max} and $\bar{P}$;

comparing the calculated total gas injection rate to the gas injection rate which produced the lowest production pressure while unloading all fluids from the well, if the calculated total gas injection rate is within the tolerance range of the gas injection rate which produced the lowest

production pressure while unloading all fluids from the well, then set the values of q_{max} and $\bar{P}$ as static values for the calculation of the minimum gas injection rate necessary to unload the well of all liquids;

calculate the minimum gas injection rate necessary to unload the well of all liquids; and

directing the compressor system to operate at the calculated minimum gas injection rate.

57. The method of claim 56, wherein the tolerance range of the gas injection rate is 5%.

58. The method of claim 56, wherein the step of calculating the minimum gas injection rate necessary to unload the well of all liquids, further comprises the steps of:

monitoring fluid flow rates of water, gas, and oil out of the well;

monitoring bottom hole pressure or calculating bottom hole pressure by using a monitored surface casing pressure;

calculating the total gas flow rate needed to carry all fluids out of the well;

subtracting the flow rate of gas out of the well from the calculated total gas flow rate needed to carry all fluids out of the well to provide the minimum gas injection rate necessary to unload the well of all liquids; and

operating the compressor system at the minimum gas injection rate necessary to unload the well of all liquids.

59. The method of claim 58, wherein the step of calculating the total gas flow rate needed to carry all fluids out of the well is an iterative calculation which repeats until the calculated total gas flow rate needed to carry all fluids out of the well is within 5 mscfd of the prior iterative calculation.

60. The method of claim 58, further comprising the step of comparing the critical gas injection rate to the flow rate of gas out of the well and ceasing compressor system operation when the critical gas injection rate is less than the flow rate of gas out of the well.

61. The method of any one of claims 1, 16, 31 or 46, wherein the step of determining the average production pressure during the first incremental period takes place over the last 85% to 95% of the first incremental period, wherein the step of determining the average production pressure during the second incremental period takes place over the last 85% to 95% of the second incremental period, and wherein the step of determining the average production pressure during the third incremental period takes place over the last 85% to 95% of the third incremental period.

62. The method of any one of claims 2, 17, 32 or 47, wherein the step of determining the average production pressure during the fourth incremental period takes place over the last 85% to 95% of the fourth incremental period.

63. The method of any one of claims 3, 18, 33 or 48, wherein the step of determining the average production pressure during the fourth incremental period takes place over the last 85% to 95% of the fourth incremental period and wherein the step of determining the average production pressure during the fifth incremental period takes place over the last 85% to 95% of the fifth incremental period.

64. The method of any one of claims 4, 19, 34 or 49, wherein the step of determining the average production pressure during the fourth incremental period takes place over the last 85% to 95% of the fourth incremental period, wherein the step of determining the average production pressure during the fifth incremental period takes place over the last 85% to 95% of the fifth incremental period, and wherein the step of determining the average production pressure during the sixth incremental period takes place over the last 85% to 95% of the sixth incremental period.

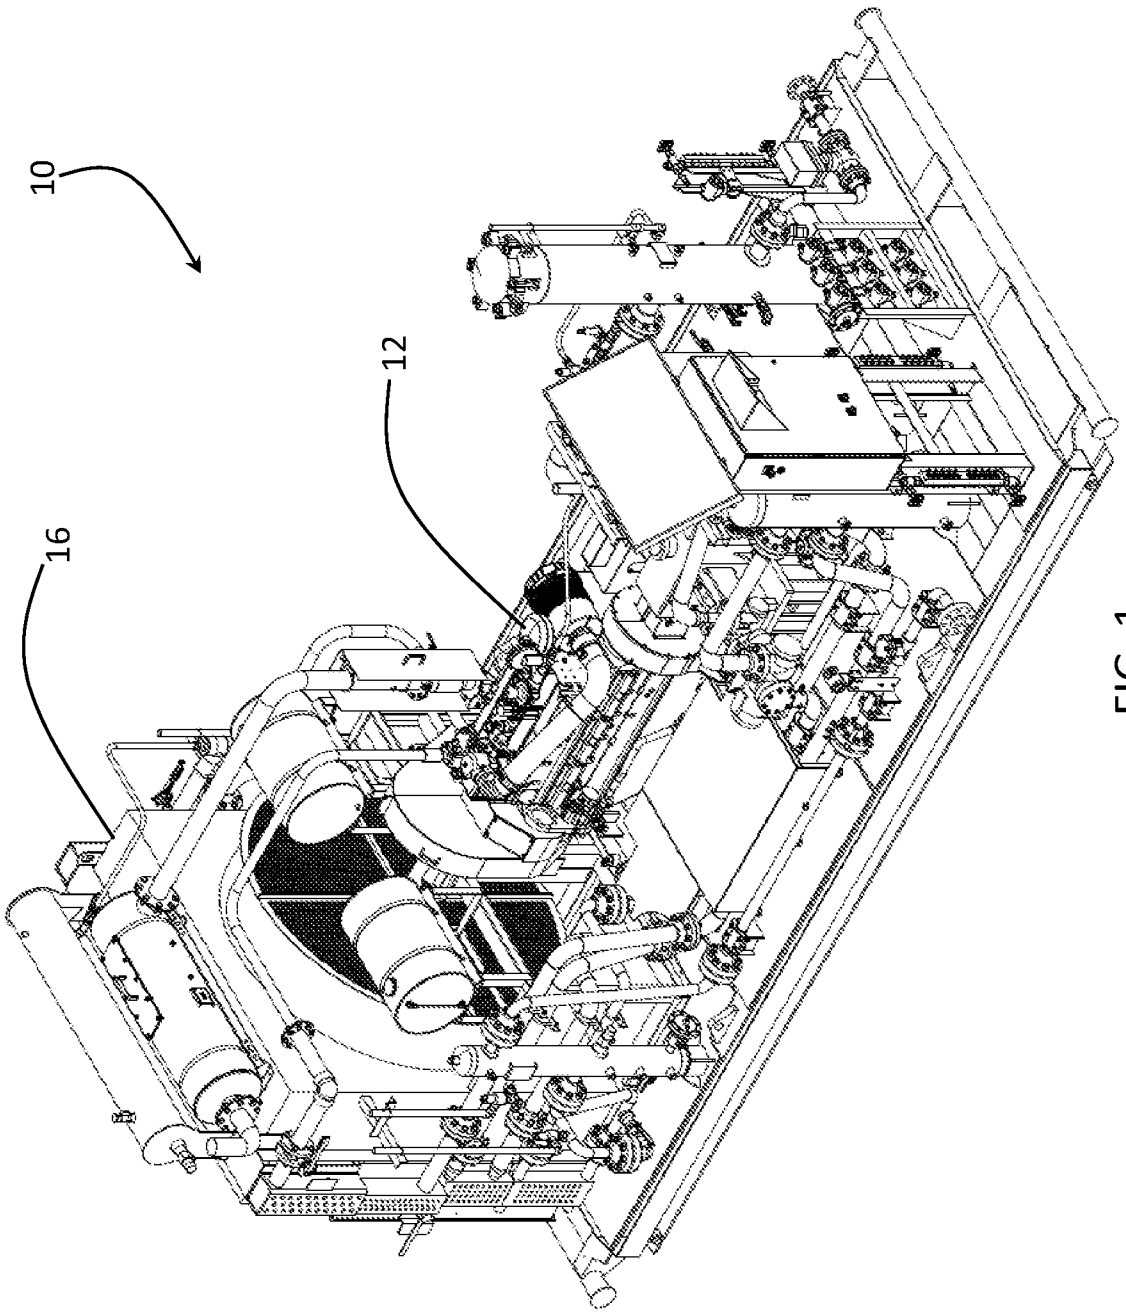

FIG. 1

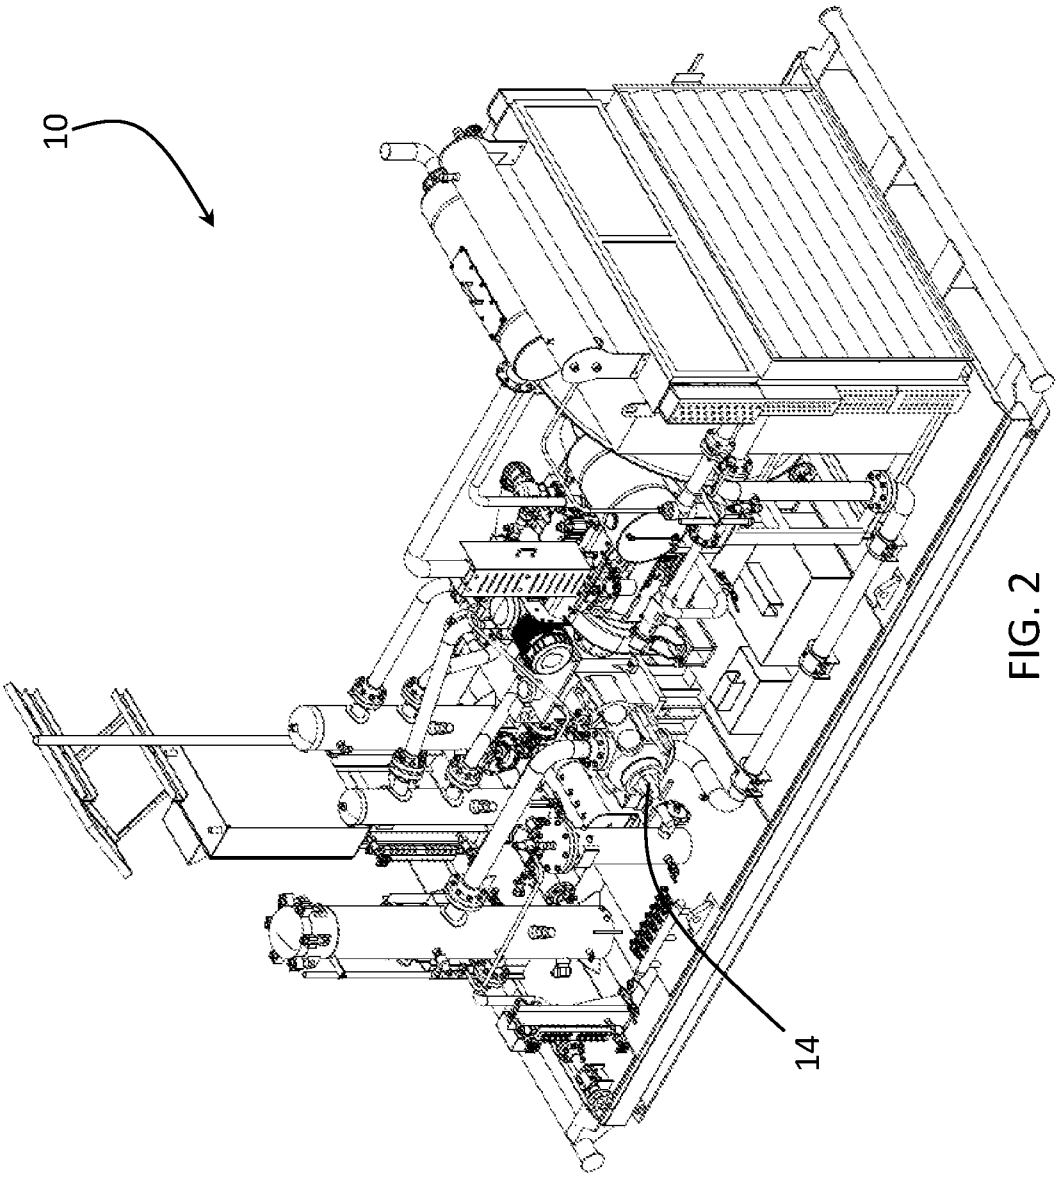

FIG. 2

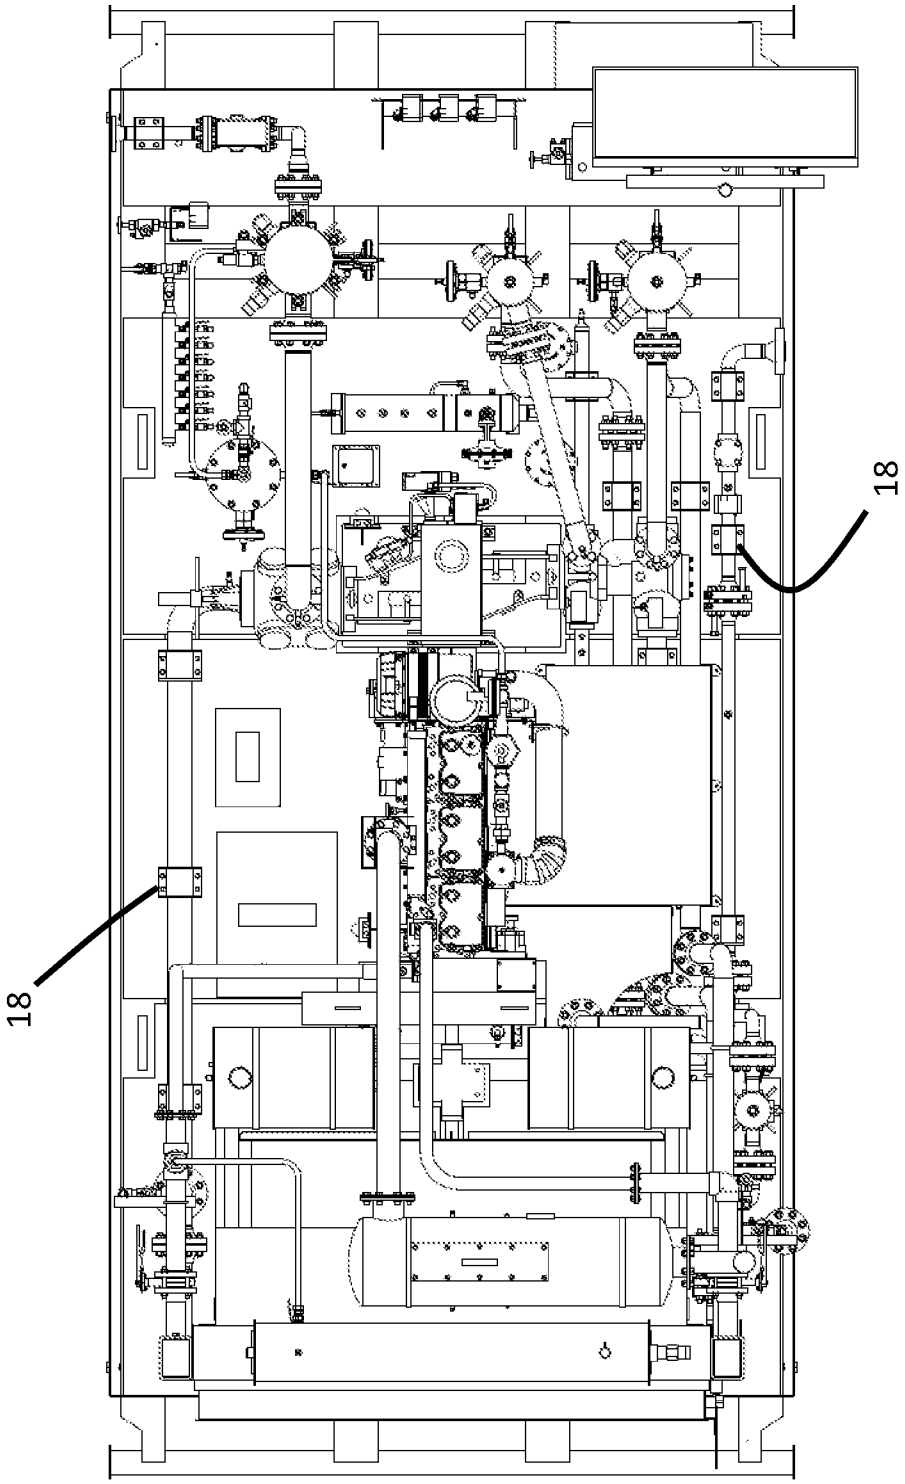

FIG. 3

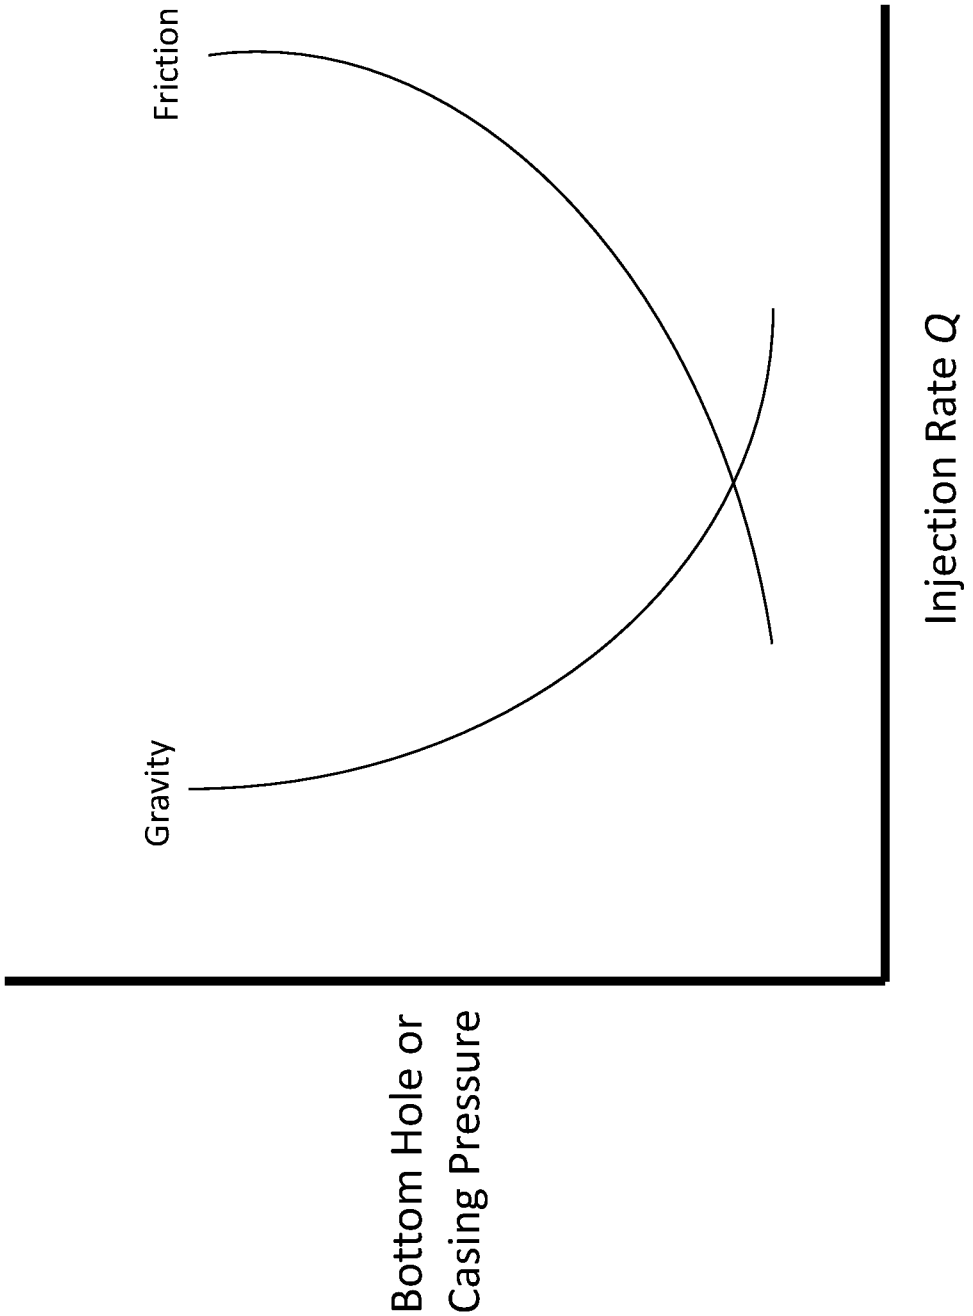
Friction
Gravity
Bottom Hole or
Casing Pressure
Injection Rate Q

FIG. 4

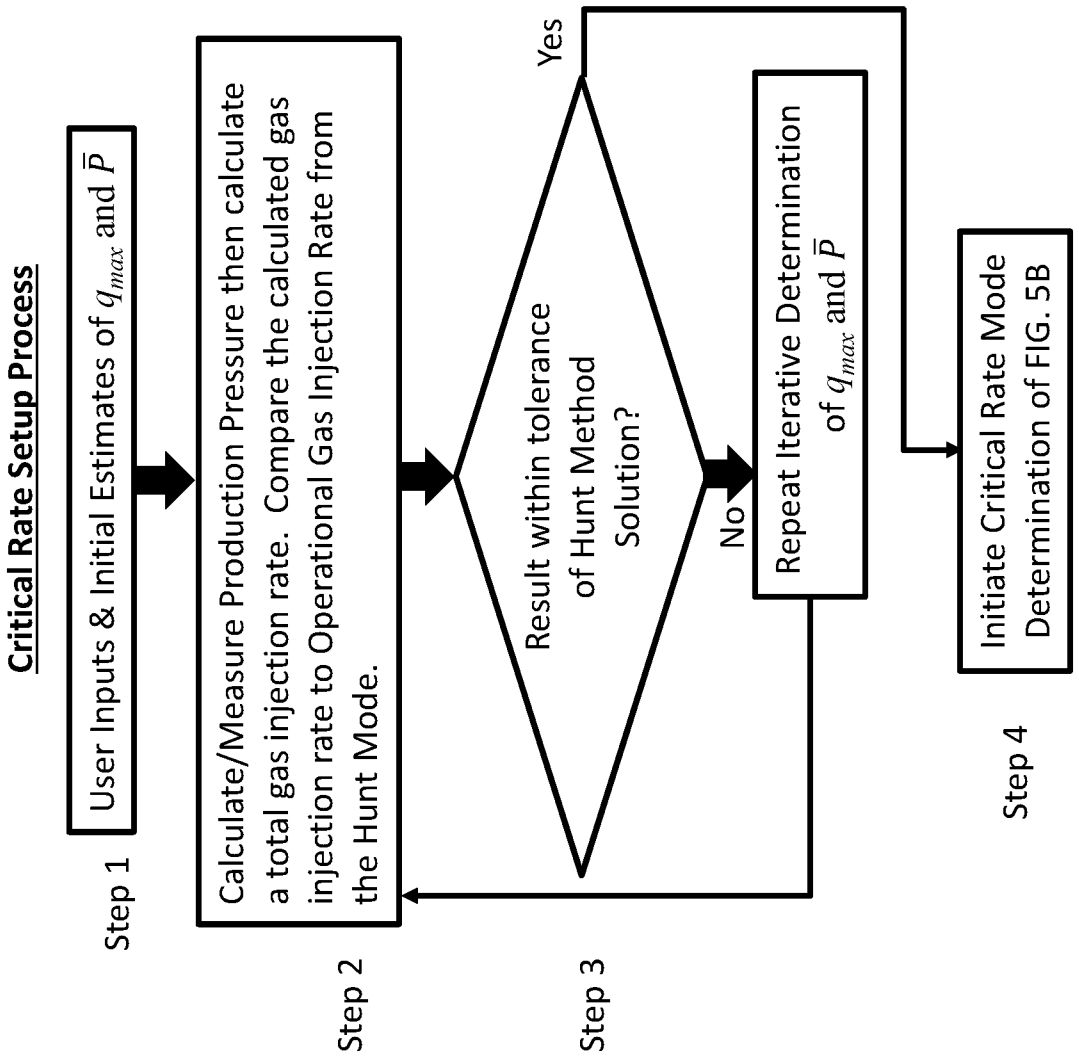
Critical Rate Setup Process
User Inputs & Initial Estimates of q_{max} and $\bar{P}$
Step 1
Calculate/Measure Production Pressure then calculate a total gas injection rate. Compare the calculated gas injection rate to Operational Gas Injection Rate from the Hunt Mode.
Step 2
Result within tolerance of Hunt Method Solution?
Step 3
Yes
No
Repeat Iterative Determination of q_{max} and $\bar{P}$
Initiate Critical Rate Mode Determination of FIG. 5B
Step 4

FIG. 5A

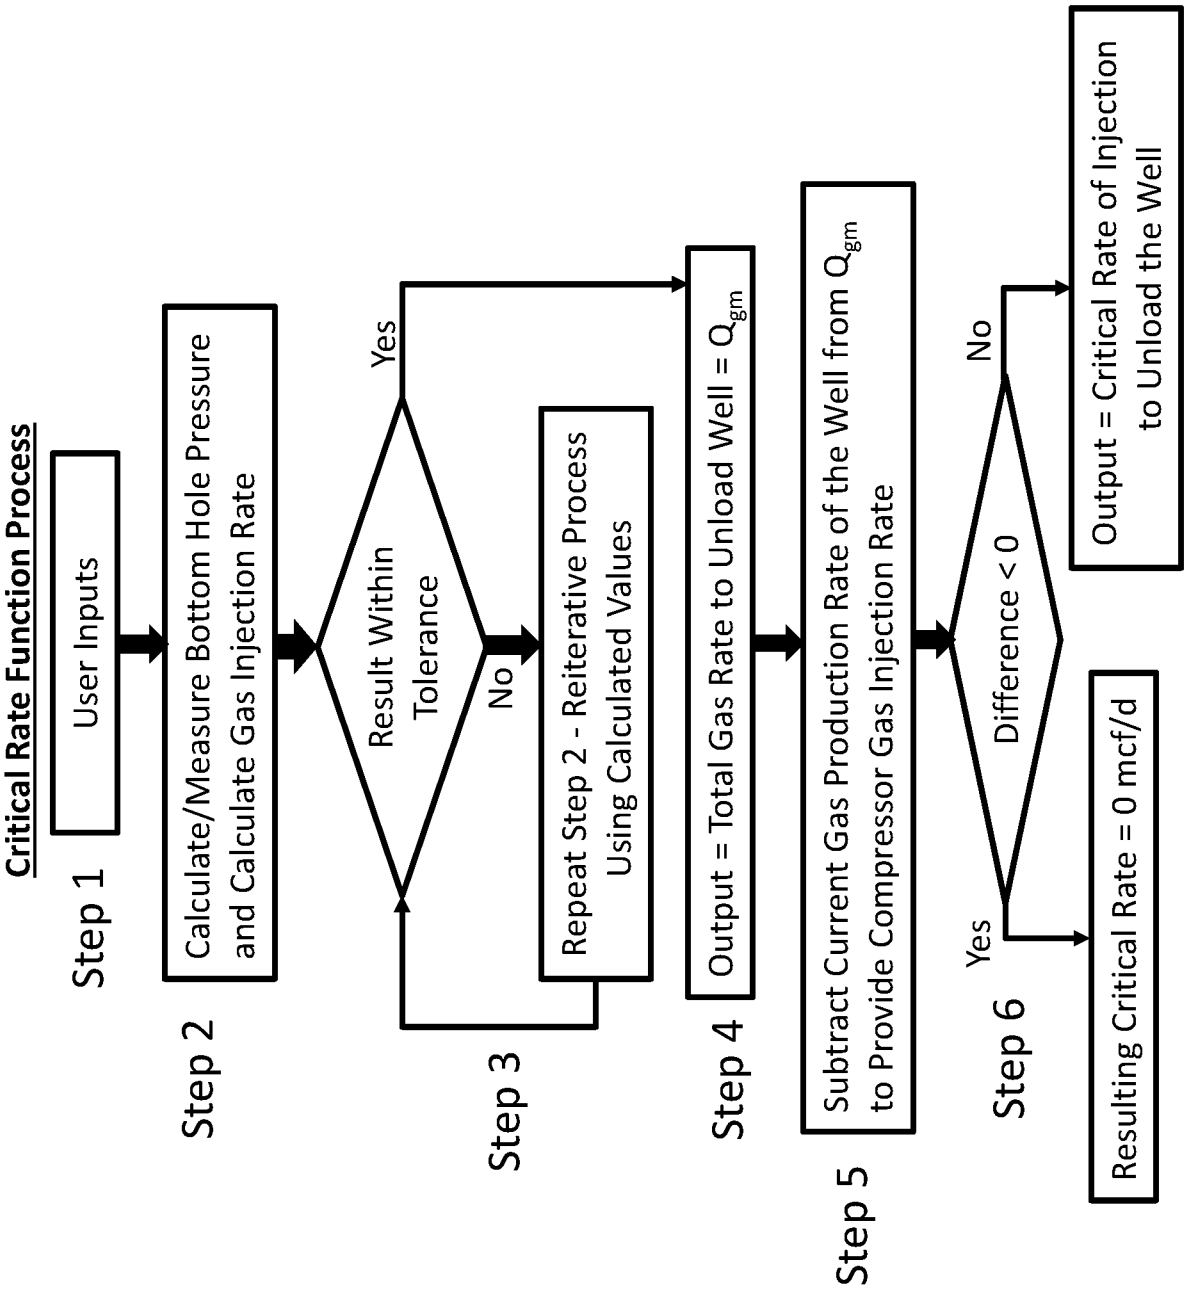
Critical Rate Function Process
Step 1
User Inputs
Step 2
Calculate/Measure Bottom Hole Pressure and Calculate Gas Injection Rate
Step 3
Result Within Tolerance
Yes
No
Repeat Step 2 - Reiterative Process Using Calculated Values
Step 4
Output = Total Gas Rate to Unload Well = Q_{gm}
Step 5
Subtract Current Gas Production Rate of the Well from Q_{gm} to Provide Compressor Gas Injection Rate
Step 6
Difference < 0
Yes
No
Resulting Critical Rate = 0 mcf/d
Output = Critical Rate of Injection to Unload the Well

FIG. 5B

Guo Equations

$$144ba_1 + \frac{1-2bm}{2}\ln a_2 - \frac{m + \frac{b}{c}n - bm^2}{\sqrt{n}}\left[\tan^{-1}\beta_1 - \tan^{-1}\beta_2\right] = \gamma \quad (1)$$

Where:

$$a_1 = 9.3\ x\ 10^{-5}\ \frac{S_g\ Tbh\ Q_{gm}}{A_1^2 E_{km}} - p_{hf} \quad (2)$$

$$a_2 = \frac{\left(1.34\ x\ 10^{-2}\ \frac{S_g T_{bh} Q_{gm}}{A_1^2 E_{km}} + m\right) 2 + n}{(144p_{hf} + m)2 + n} \quad (3)$$

$$\beta_1 = \frac{\left(1.34\ x\ 10^{-2}\ \frac{S_g T_{bh} Q_{gm}}{A_1^2 E_{km}} + m\right)}{\sqrt{n}} \quad (4)$$

$$\beta_2 = \frac{144\rho_{hf} + m}{\sqrt{n}} \quad (5)$$

$$\gamma = \alpha(1 + d^2 e)L \quad (6)$$

Where:

S_g = Specific gravity of gas, air =1

T_{bh} = Temperature at bottom hole

Q_{gm} = Minimum air/gas injection rate required to carry liquid droplets, scf/min

A_i = Cross sectional area of annulus, in^2

E_{km} = Minimum kinetic energy required to carry liquid droplets, $lb_f - ft/ft^3$

P_{hf} = Bottomhole pressure, psi

a, b, c, d, e, m, n, α_1, α_2, β_1, β_2, γ = Guo Critical Rate Model quantities

L = Pipe length, ft

FIG. 6A

Guo Equations cont.

$$a = \frac{15.33S_g Q_g + 86.07S_W Q_W + 86.07S_O Q_O + 18.79S_g Q_G}{10^3 T_{av} Q_G}\cos(\theta) \quad (7)$$

$$b = \frac{0.2456Q_S + 1.379Q_W + 1.379Q_o}{10^3 T_{av} Q_G} \quad (8)$$

$$c = \frac{6.785\ x\ 10^{-6} T_{av} Q_G}{A_i} \quad (9)$$

$$d = \frac{Q_s + 5.615(Q_w + Q_o)}{600A_i} \quad (10)$$

$$e = \frac{6f}{gD_h \cos(\theta)} \quad (11)$$

$$f = \left[\frac{1}{1.74 - 2\log\left(\frac{2\varepsilon'}{D_h}\right)}\right]^2 \quad (12)$$

$$m = \frac{cde}{1 + d^2 e} \quad (13)$$

$$n = \frac{c^2 e}{(1 + d^2 e)^2} \quad (14)$$

Q_S = Solid flow rate, ft^3/d
Q_W = Water flow rate, bbl/d
Q_O = Oil flow rate, bbl/d
Q_G = Gas flow rate, Mscf/d
S_S = Specific gravity of solids
S_W = Specific gravity of water
S_O = Specific gravity of oil
S_G = Specific gravity of gas
T_{av} = Average temperature, °R
A_i = Pipe cross-sectional area, in^2
g = Gravitational acceleration, 32.17 ft/s^2
D_h = Hydraulic diameter, in
θ = Inclination angle, degrees
ε' = Pipe wall roughness, in

FIG. 6B

Vogel IPR

$$\frac{q}{q_{max}} = 1 - 0.2\left(\frac{P_{wf}}{\bar{P}}\right) - 0.8\left(\frac{P_{wf}}{\bar{P}}\right)^2$$

Where:

q = Producing flow rate of fluids out of the well, ft^3/day

q_{max} = Maximum flow rate of fluids out of the well, ft^3/day

P_{wf} = Bottom hole pressure, psi

$\bar{P}$ = Average reservoir pressure, psi

FIG. 7

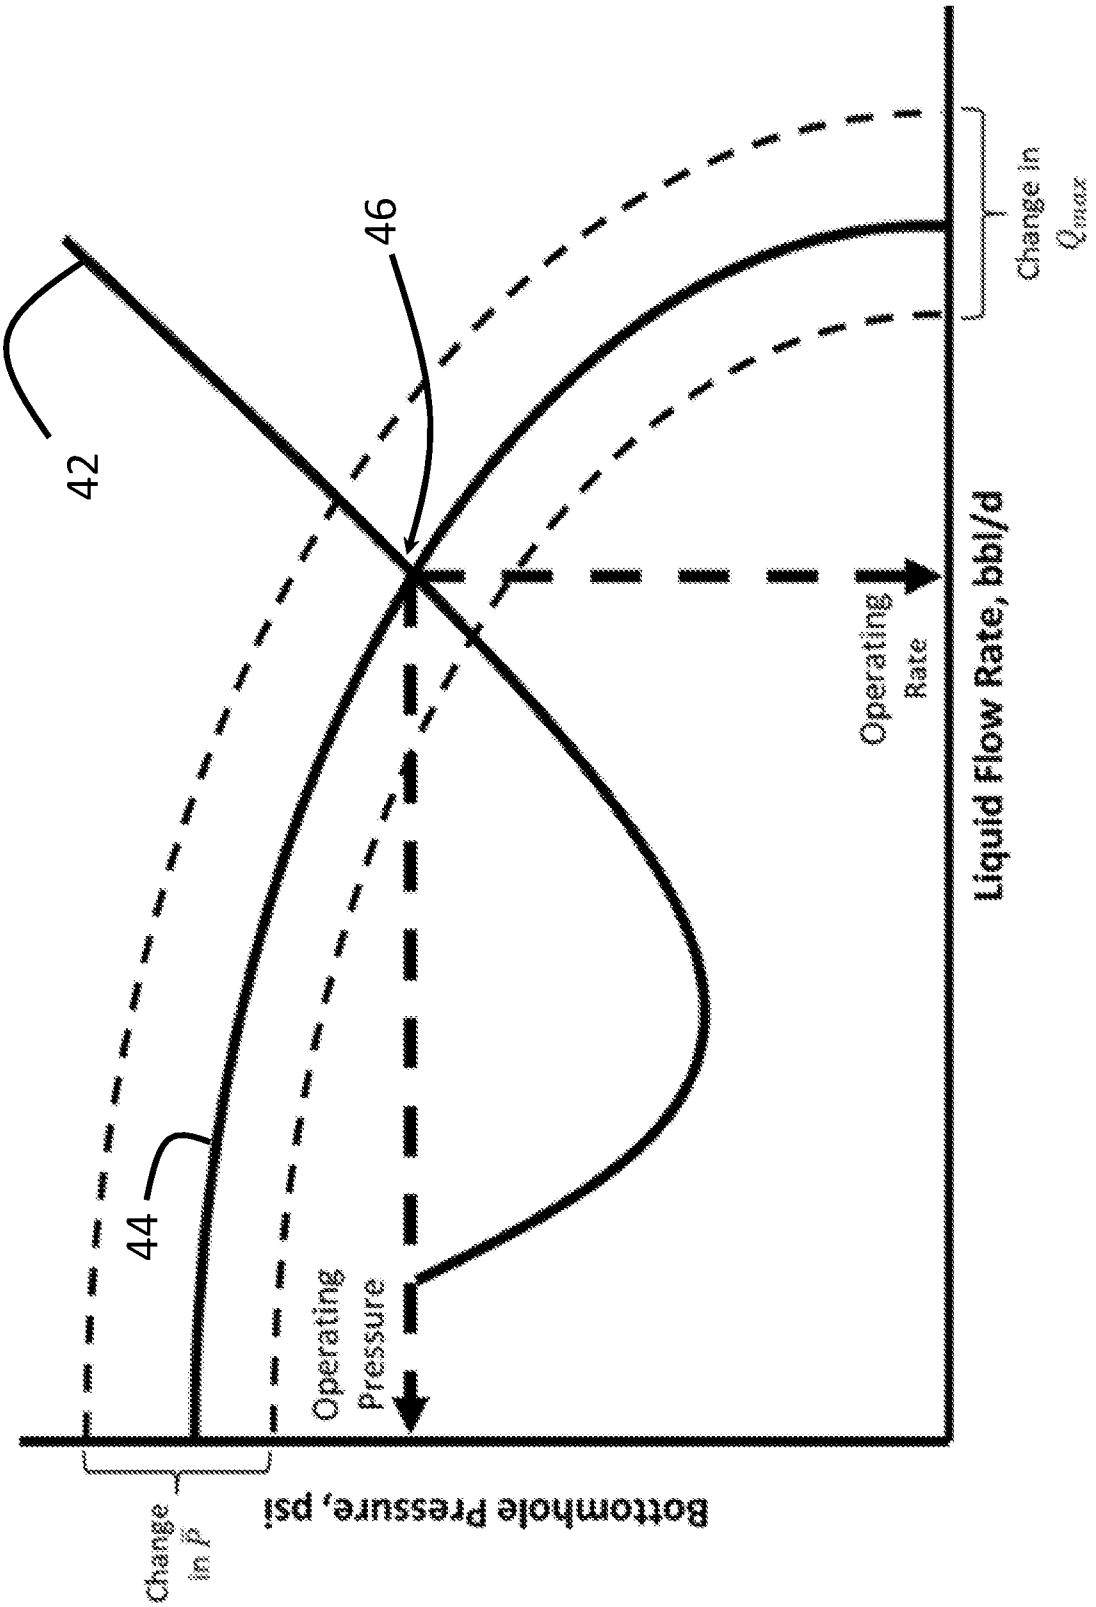
42
46
44
Change in Q_{max}
Operating Rate
Liquid Flow Rate, bbl/d
Operating Pressure
Change in $\bar{p}$
Bottomhole Pressure, psi

FIG. 8

Hagedorn & Brown Eqns.

$$\Delta P_f = \frac{2 f \rho_f V_m^2 L}{144 g_c D} \quad (1) \qquad \Delta P_g = \bar{\rho}_m g \Delta z \quad (2)$$

$$\bar{\rho}_m = \rho_L H_L + \rho_g (1 - H_L) \quad (3) \qquad H_L = \frac{H_L}{\psi} \times \psi \quad (4)$$

Where:

$$\psi = \begin{cases} 27170B^3 - 317.52B^2 + 0.5472B + 0.9999, & \text{if } B \leq 0.025 \\ -533.33B^2 + 58.524B + 0.1171, & \text{if } B > 0.025 \\ 2.5714B + 1.5962, & \text{if } B > 0.055 \end{cases} \quad (5) \text{ dimensionless}$$

$$B = \frac{N_{GV} N_{LV}^{0.38}}{N_D^{2.14}} \quad (6) \qquad \frac{H_L}{\psi} = \sqrt{\frac{0.0047 + 1123.32H + 729489.64H^2}{1 + 1097.1566H + 722153.97H^2}} \quad (7)$$

$$H = \frac{N_{LV}}{N_{GV}^{0.575}} \left(\frac{p}{14.7} \right)^{0.1} \frac{CN_L}{N_D} \quad (8) \qquad N_{LV} = 1.938 \, v_{SL} \sqrt[4]{\frac{\rho_L}{\sigma_L}} \quad (9)$$

$$N_{GV} = 1.938 \, v_{SG} \sqrt[4]{\frac{\rho_L}{\sigma_L}} \quad (10)$$

FIG. 9A

Hagedorn & Brown Eqns. Cont.

$$N_D = 120.872\, D\sqrt{\frac{\rho_L}{\sigma_L}} \quad (11)$$

$$v_{SG} = \frac{q_L\left(GLR - R_s\left(\frac{1}{1+WOR}\right)\right)}{86400 A_p}\ \frac{14.7}{p}\ \frac{T_R}{520}\ \frac{z}{1} \quad (12)$$

$$v_{SL} = \frac{5.615 q_L}{86400 A_p}\left(B_o\frac{1}{1+WOR} + B_w\frac{WOR}{1+WOR}\right) \quad (13)$$

$$CN_L = 0.061\ N_L^3 - 0.0929\ N_L^2 + 0.0505\ N_L + 0.0019 \quad (14)$$

$$N_L = 0.15726\,\mu_L\sqrt[4]{\frac{1}{\rho_L\sigma_L^3}} \quad (15)$$

$$\sigma_L = \sigma_o\frac{1}{1+WOR} + \sigma_w\frac{WOR}{1+WOR} \quad (16) \qquad \mu_L = \mu_o\frac{1}{1+WOR} + \mu_w\frac{WOR}{1+WOR} \quad (17)$$

$$\rho_g = \frac{28.967\ SG_g\ p}{z\ 10.732\ T_R} \quad (18)$$

$$\rho_L = \frac{62.4\ SG_o + \frac{Rs\ 0.0764\ SG_g}{5.614}}{B_o}\frac{1}{1+WOR} + 62.4\ SG_w\ \frac{WOR}{1+WOR} \quad (19)$$

$$M = SG_o\ 350.52\ \frac{1}{1+WOR} + SG_w\ 350.52\ \frac{WOR}{1+WOR} + SG_g\ 0.0764\ GLR \quad (20)$$

FIG. 9B

Hagedorn & Brown Variables

A_p = flow area, ft^2
B = correlation group, dimensionless
C = coefficient for liquid viscosity number, dimensionless
D = pipe diameter, ft
h = depth, ft
H = correlation group, dimensionless
H_L = liquid holdup factor, fraction
f = friction factor, dimensionless
GLR = gas-liquid ratio, scf/bbl
M = total mass of oil, water and gas associated with 1 bbl of liquid flowing into and out of the flow string, lb_m/bbl
N_D = pipe diameter number, dimensionless
N_{GV} = gas velocity number, dimensionless
N_L = liquid viscosity number, dimensionless
N_{LV} = liquid velocity number, dimensionless
p = pressure, psia
q_c = conversion constant equal to 32.174049, $lb_m ft$ / $lb_f sec^2$
q = total liquid production rate, bbl/d
Re = Reynolds number, dimensionless
R_s = solution gas-oil ratio, scf/stb
μ = absolute roughness, ft
ρ = viscosity, cp
$\bar{\rho}$ = density, lb_m/ft^3
σ = integrated average density at flowing conditions, lb_m/ft^3
ψ = surface tension of liquid-air interface, dynes/cm (ref. values: 72 – water, 35 – oil)
ε = secondary correlation factor, dimensionless

ΔP_g = Gravitational pressure loss, psi
ΔP_f = Frictional pressure loss, psi
SG_o = Specific Gravity Oil
SG_w = Specific Gravity water
SG_g = Specific Gravity gas
B_o = Oil formation volume factor, bbl/stb
B_w = Water formation volume factor, bbl/stb
T = temperature, °R or °K, follow the subscript
u = velocity, ft/sec
WOR = water-oil ration, bbl/bbl
z = gas compressibility factor, dimensionless

FIG. 9C

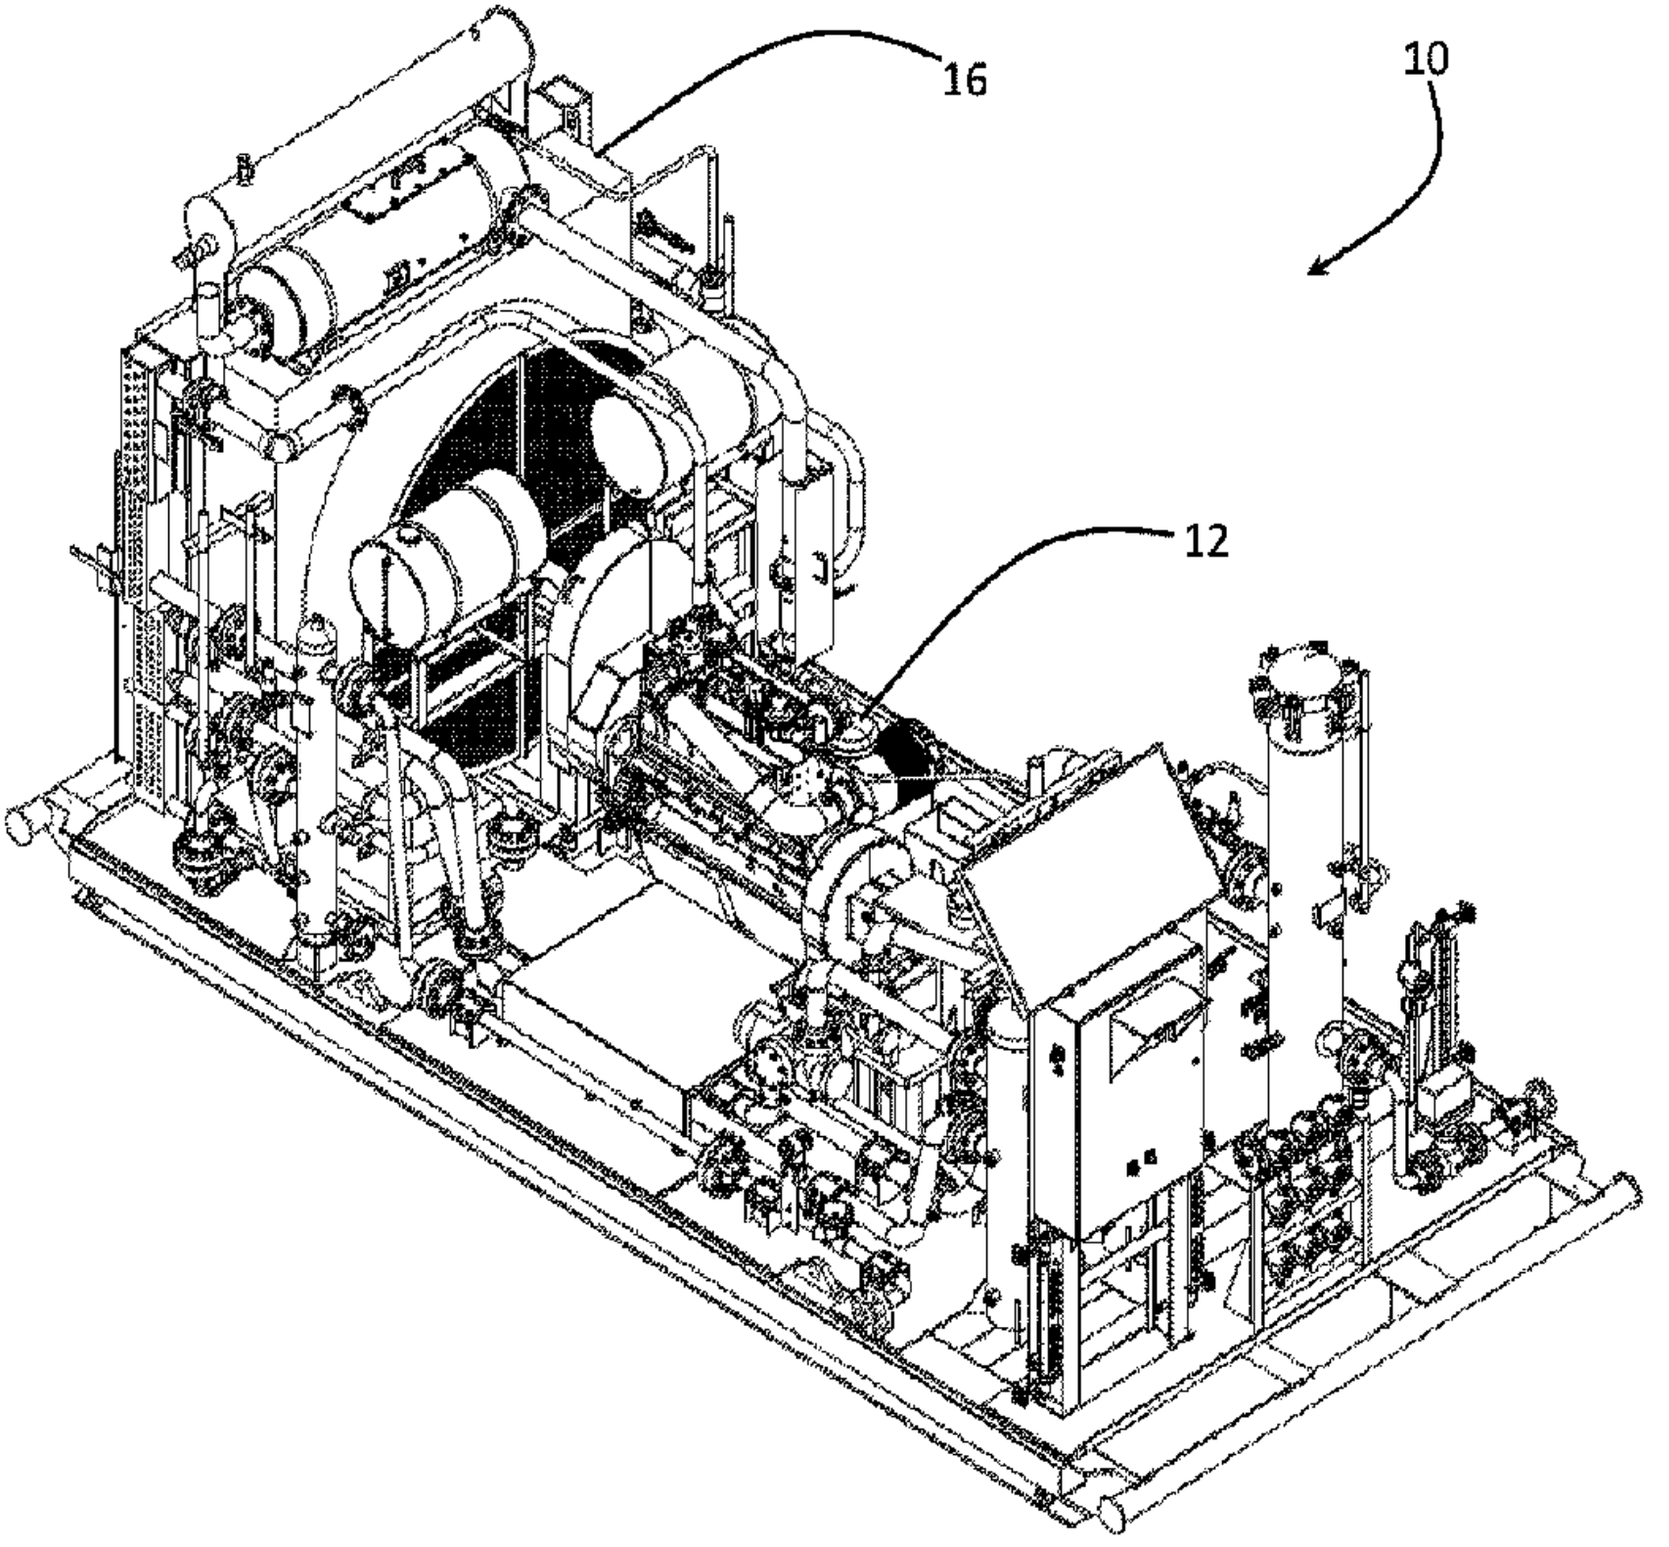
16
10
12