




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³ : G06F 13/00		A1	(11) International Publication Number: WO 83/ 02020
			(43) International Publication Date: 9 June 1983 (09.06.83)
<p>(21) International Application Number: PCT/US82/01673</p> <p>(22) International Filing Date: 29 November 1982 (29.11.82)</p> <p>(31) Priority Application Number: 326,335</p> <p>(32) Priority Date: 1 December 1981 (01.12.81)</p> <p>(33) Priority Country: US</p> <p>(71) Applicant: BURROUGHS CORPORATION [US/US]; Burroughs Place, Detroit, MI 48232 (US).</p> <p>(72) Inventor: HARRIS, Craig, Weaver ; 25592 Loganberry Lane, El Toro, CA 92630 (US).</p> <p>(74) Agents: CHUNG, Edmung, M.; Burroughs Corporation, Burroughs Place, 4B22, Detroit, MI 48232 (US) et al.</p> <p>(81) Designated State: JP.</p>			Published <i>With international search report.</i>

(54) Title: DIRECT MEMORY ACCESS FOR A DATA TRANSFER NETWORK

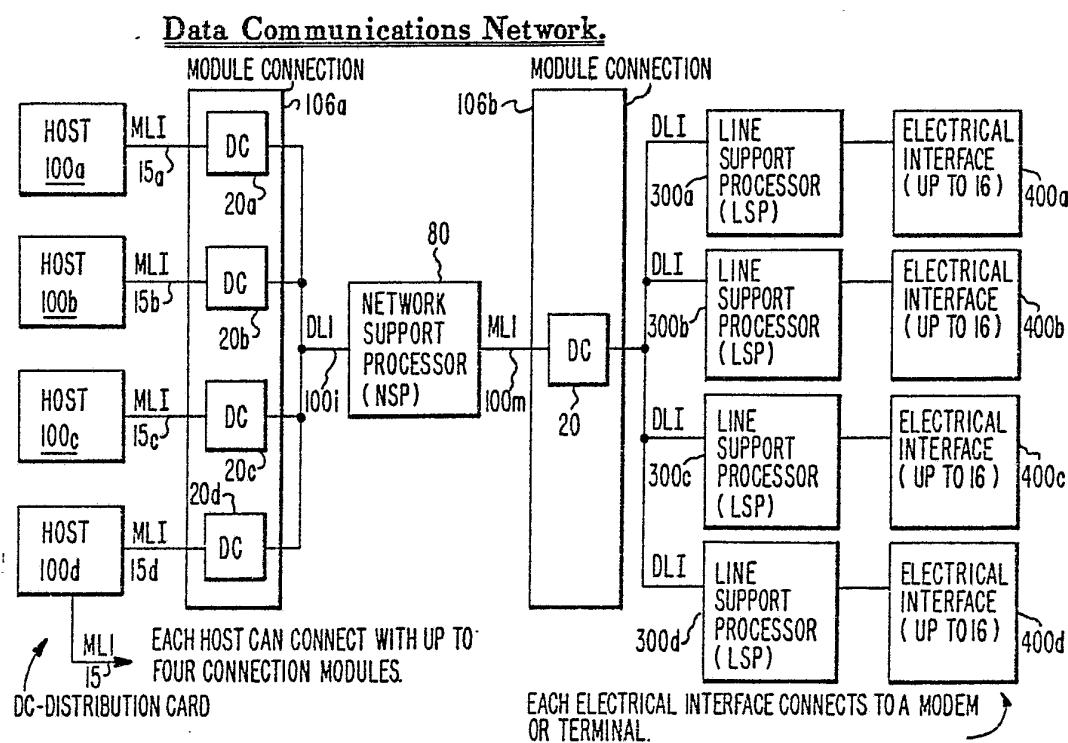

(57) Abstract

A system provided within the Interface Circuit of a subsystem - controller (80) for rapid and direct data transfer between the memory means (90) of the subsystem controller (80) and the main memory of a host computer (100) or selected remote peripheral terminals.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	LI	Liechtenstein
AU	Australia	LK	Sri Lanka
BE	Belgium	LU	Luxembourg
BR	Brazil	MC	Monaco
CF	Central African Republic	MG	Madagascar
CG	Congo	MR	Mauritania
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America
KP	Democratic People's Republic of Korea		

- 1 -

DIRECT MEMORY ACCESS FOR A DATA TRANSFER NETWORK

5 FIELD OF THE INVENTION

This invention relates to a direct memory access logic system used in a subsystem controller for data communications systems whereby a plurality of host computers can communicate with data-communication terminals by means of a data comm I/O subsystem using specialized types of processor-controllers.

CROSS REFERENCE TO RELATED APPLICATIONS AND PATENTS

This application is technically related to a number of patent applications and prior issued patents.

15 The related patent applications include:

"Memory Control Circuit for Subsystem Controller", inventor Ronald Mathews, filed August 24, 1981, Serial No. 295,588;

20 "Data Communications Network", inventors Robert Catiller, Craig Harris and Robert Mathews, filed August 24, 1981, Serial No. 295,587;

"I/O Subsystem Using Data Link Processors", inventors Kenneth Baun and Donald Millers II, filed December 14, 1979, Serial No. 103,739;



- 2 -

"Interface Circuit For Subsystem Controller", inventor Craig W. Harris, filed December 1, 1981, Serial No. 326,423.

5. The following issued patents which involve the use of an Input/Output Subsystem connecting a main host computer with remote terminal units are included herein by reference:

10 U.S. Patent 4,162,520, entitled "Intelligent Input/Output Interface Control Unit for Input/Output Subsystem", inventors Darwin Cook and Donald Millers II. This case describes the peripheral-controller known as a Line Control Processor which controls and handles data transfers between a given peripheral terminal unit and a main host system.

15 U.S. Patent 4,074,352, entitled "Modular Block Unit for I/O Subsystem", inventors Darwin Cook and Donald Millers II. This case described a Base Module unit which housed and supported a group of eight peripheral controllers and interfaced them to a main host computer 20 system.

25 U.S. Patent 4,106,092, entitled "Interface System Providing Interfaces to Central Processing Unit and Modular Processor Controllers for I/O Subsystem", inventor Donald Millers II. This patent describes the unit in the main host system, designated as an I/O Translator or "IOT" which controls and regulates data transfer between the main host system and a plurality of base modules and their peripheral controllers.

- 3 -

U.S. Patent 4,189,769, entitled "Input/Output Subsystem for Digital Data Processor System", inventors Darwin Cook and Donald Millers II. This case describes a subsystem wherein a plurality of peripheral-controllers (called Line Control Processors) are organized in base modules for data communication with a main host system. The peripheral-controllers and the base modules form an input/output subsystem for controlling data transfers to/from a large number of peripheral units to the main host computer system.

U.S. Patent 4,280,193, entitled "Data Link Processor for Magnetic Tape Data Transfer System", inventors Kenneth W. Baun, Jimmy G. Saunders. This patent describes an improved peripheral-controller called a Data Link Processor which handles data transfers between a main host computer and remote magnetic tape peripheral units.

U.S. Patent 4,290,106, entitled "Microprocessor System With Source Address Selection", inventors Robert Catiller and Brian Forbes, issued September 15, 1981;

U.S. Patent 4,291,372, entitled "Microprocessor System With Specialized Instruction Format", inventors Robert Catiller and Brian Forbes, issued September 22, 1981;



- 4 -

U.S. Patent No. 4,292,667, entitled "Microprocessor System Facilitating Repetition of Instructions" inventors Robert Catiller and Brian Forbes, issued September 29, 1981;

5 U.S. Patent No. 4,293,909, entitled "Digital System for Data Transfer Using Universal Input-Output Microprocessor" inventors Robert Catiller and Brian Forbes, issued October 6, 1981;

10 U.S. Patent No. 4,301,505, entitled "Microprocessor Having Word and Byte Handling", inventors Robert Catiller and Brian Forber, issued November 17, 1981.

15 The above issued patents form a foundation and background for the present application and are included by reference into this specification. These patents describe and discuss many of the elements of the data communication network and the functional operations whereby a main host computer provides I/O descriptor commands, data link word task identifiers, and receives back result descriptor words to indicate the completion or incompleteness of any job task. These patents also 20 describe the use of base connection module units which house slide-in cards which form processor-controllers, distribution control cards, maintenance cards, and other slide-in units. Each base module unit houses one or more processor-controllers and provides a 25 distribution control (DC) card for connection and disconnection to a main host computer and also provides a maintenance card for diagnostic testing of the circuitry in the base module. These card units have been described in the above cited patents which are included herein by 30 reference.



- 5 -

BACKGROUND OF THE INVENTION

By the use of the term "communication discipline" there is meant the set of rules or criteria governing the message format used by a particular remote peripheral device in its data transfer operations via communication lines to a central station with its main host computer. Some of the factors differentiating the various communication disciplines involved are: synchronous operation, synchronization, asynchronous operation, start and end of message sequence, message segment length, and so on.

Since there is no standard communication discipline which is common to all peripheral data communication terminals, it was generally required that a system include 15 individually separate communication controllers to accommodate each different discipline handled by the system. Further, since new types of peripherals with different disciplines are often developed, this would in turn require that a new communications controller be 20 designed on a system to accommodate this type of unit.

It has long been the purpose of those manufacturers and users of data communication networks and subsystems to increase the throughput of data per unit time and per unit amount of equipment; also to simplify 25 and economize in the number of elements involved while providing reliable data communications to and from remote stations in the most efficient manner.

Many data communication subsystems have used controllers, not only to handle the individual 30 idiosyncrasies of the various types of data-comm peripheral terminals, but also have used controllers with insufficient control capabilities such that the main host computer must continually be actively involved with every step of the



- 6 -

process involving data transfers to and from the remote terminal devices.

As indicated in the previously referenced patents, one way of reducing the complexity and cost, in addition to getting better controllability of a data communications network, is to relieve the main host processor of most of its monitoring and control functions and to place them in the hands of peripheral-controllers which maintain communication capability with remote terminal devices and which, at selected times, communicate back to the main host system to send data or to receive data from it.

Often problems arise as to just how the architectural and functional structure of a network should be arranged to provide the most efficient use of components for data transfers between remote terminals and a central main host computer or a plurality of such host computers.

The presently described data communication network which permits one or more main host computer systems to operate a large plurality of remote terminal devices for data communication purposes, provides means for controlling data transfers whereby up to 16 data communication lines from remote terminals are connected to 16 line adapters which are part of a Line Support Processor which sees to it that the various different line communication disciplines are satisfied and which then provides a common line discipline for operations with a Network Support Processor. The Network Support Processor receives initiating data transfer instructions from either a single main host processor or any one of a plurality of up to four main host processors, and sees to the execution of the required data transfers between remote data terminals and the particular host computer which initiated the data transfer instruction. Communications between the



- 7 -

Line Support Processor and the Network Support Processor are standardized and not subject to vagaries of the various disciplines required for the remote data communication terminals. The Network Support Processor and its 5 satellite Line Support Processors constitute front-end controllers which permit distributed processing functions to occur in the architecture of the communication network.

10 A basic building block of the described data communication network is a Subsystem Controller designated as the Network Support Processor which relieves the main host computer of involvement with data transfer functions.

SUMMARY OF THE INVENTION

15 The direct memory access system of the present invention involves specialized hardware located on the Interface Circuit Card (105_i, FIG. 8) and particularly is part of the Message Level Interface (MLI) Logic (100_m, FIG. 9A).

20 The MLI Interface Logic provides for direct and rapid data transfer between the shared memory means of the subsystem-controller (called a Network Support Processor, NSP) and a selected Line Support Processor (LSP) which connects to a plurality of peripheral devices.

25 A DMA logic circuit uses a MLI Control Register having a particular bit set to initiate a direct memory access operation by providing signals to control logic using a DMA Control PROM which will control DMA "Write" operations (host to peripheral) or DMA "Read" operations (peripheral to host). The Control Logic can then enable 30 the memory bus connecting the memory means of the NSP directly to a selected Line Support Processor (LSP) for direct and rapid word transfer.



- 8 -

The processor means of the NSP loads (i) a DMA counter to regulate the number of words to be transferred and loads (ii) a DMA address counter to point to the memory addresses of words to be transferred from the memory means to the selected Line Support Processor.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is a network block diagram of a data communications network using the Network Support Processor; FIG. 1B is a drawing showing the mechanical arrangement of the Base Connection Module and the slide-in cards which go to make up the Network Support Processor;

FIG. 2 is a block diagram of the card units which make up the Network Support Processor;

FIG. 3 is a block diagram showing the basic elements which constitute the Network Support Processor;

FIG. 4 is a block diagram showing the elements of the memory address logic of the State Machine Processor;

FIG. 5 is a block diagram showing the elements of the data manipulation logic of the State Machine Processor;

FIG. 6 is a block diagram showing the elements of the instruction execution logic for the State Machine Processor;

FIG. 7 is a block diagram showing the external bus connections between the various elements of the Network Support Processor;

FIG. 8 is a block diagram showing the relationship of the Interface Circuit to the State Machine Processor;

- 9 -

FIG. 9 is a block diagram showing the Message Level Interface logic of the Interface Circuit; FIG. 9A is a block diagram showing the major data paths of the MLI Interface Logic.;

5 FIG. 10 is a block diagram showing the Data Link Interface logic of the Interface Circuit; FIG. 10A is a block diagram showing major details and data paths of the DLI Interface Logic;

10 FIG. 11 is a block diagram showing the memory control circuit of the Network Support Processor;

FIG. 12 is a block diagram showing the port connections to and from the RAM cards of the external shared memory means;

15 FIG. 13 is a block diagram of the overall Network Support Processor showing the interconnecting bus lines and the links to an external host computer and external line communications processors;

20 FIG. 14 is a block diagram showing the State Machine Processor in relationship to the Interface Circuit for interrupt operations;

FIG. 15 is a block diagram showing the location of the various memory resources in the elements of the Network Support Processor;

25 FIG. 16 is a general block diagram showing the message transfer directions between the host computer, the Network Support Processor and the line communications processor in addition to certain firmware packets used in the Network Support Processor;

30 FIG. 17 is a block diagram of the Network Support Processor indicating certain firmware packets used in the master and the slave processors therein.

- 10 -

GENERAL

The Network Support Processor, which will herein be designated as NSP, is a dual-processor, general purpose, mini-computer which is programmed as 5 a front-end data communications processor. As discussed in the previously referenced patents, certain main host computers have been designed for systems which provide what is known as Message Level Interface (MLI) capability. It is these types of main host 10 computer systems that are compatible with the use of the network support processor and its data communication capabilities. Thus, there is herein involved a data communication subsystem which uses the mentioned message level interface capability and which involves a series 15 of data-comm processors. These data-comm processors are sometimes called data-comm frame-recognition processors and will herein be used with the formal name of Line Support Processor (LSP) on the idea that each of these line support processors provide data communications and 20 control capability to a series of data communication lines which connect to communication terminals or modems. Any given data communication subsystem is controlled by a network support processor. The operation and use of the Message Level Interface has 25 been discussed in the previously cited patents which have been incorporated by reference into this disclosure.

In this Data-Communications Subsystem, a host computer can support as many as four Network Support 30 Processors (NSPs). Further, each of the Network Support Processors can support as many as four Line Support Processors (LSPs) while each Line Support



- 11 -

Processor supports up to 16 line adapters. In this
wise, it is seen that a single host computer may then
have the capability to control as many as 256 data
communication lines. As in FIG. 1A, it will also be
5 seen that a single Network Support Processor can
interface with four separate host computers.

Referring to FIG. 1A there is seen an
overall diagram of a data communications network. The
Network Support Processor 80 has a connection 100_i
10 designated as the data link interface on one side
while the connections 100_m on the other side are
designated as Message Level Interface. A series of
host computers designated 100_a, 100_b, 100_c and 100_d
15 have connection lines 15 (15_{a,b,c,d}) designated as MLI
lines each of which connects to a Distribution Card
described in the previously cited patents which have
been incorporated by reference. A connection module
106_a is seen supporting four Distribution Cards
designated 20_a, 20_b, 20_c and 20_d. These Distribution
20 Control Cards (DC) provide for the connection-
disconnection function of any host computer system to
a specific Network Support Processor and these
Distributor Control Cards have been described in the
cited patents.

25 On the other side of the FIG. 1A network, there
again is seen a connection module 106_b which supports
distribution cards of which there is seen a typical
Distribution Card DC 20. This Distribution Card 20
provides for controlled connection and disconnection
30 to at least four Line Support Processors designated
300_a, 300_b, 300_c and 300_d. Each of the Line Support
Processors connects to a block designated "electrical
interface" which may consist of up to 16 Line Adapters.
The electrical interface units are designated 400_a,
35 400_b, 400_c and 400_d.



- 12 -

As indicated in FIG. 1A, each host computer can be connected with up to four connection modules similar to 106_a, thus further expanding the connective possibilities of the network.

5 DESCRIPTION OF PREFERRED EMBODIMENT

As described in the previously cited patents, the main host computer operates on a routine whereby I/O commands are conveyed to a front-end processor for execution after which the front-end processor will 10 return a "result descriptor" word or words to the main computer in order to indicate completion of the task or any exception conditions. The Network Support Processor communicates with the host computer systems at a "message level". This transfer process relieves the host computer 15 of much of the overhead which would be required in supporting a data communications network. The NSP accepts messages from the host system and translates them as required, and uses the proper data communications protocol to ensure that the messages are delivered to the 20 intended data communications device after which it returns a result descriptor word to the host computer.

Should it occur that a message cannot be delivered, the Network Support Processor maintains 25 integrity by ensuring that the message is not lost. This is done by storing the message temporarily and returning an appropriate result descriptor word to the main host computer. Messages which are incoming from the data communications network terminals are edited and translated when necessary, and then the edited messages 30 are placed in a queue after which message delivery is initiated when the host computer indicates a request for delivery of messages.



- 13 -

Referring to FIG. 1B, the hardware orientation of the Network Support Processor is shown as consisting of nine to twelve cards. A base module unit 106 is seen housing facilities for slide-in connector cards.

5 At one end is seen a Distribution Card DC 20 and at the opposite end is a maintenance card 20_m whose function has been described in the previously cited patents. The Network support Processor 80 will be seen, in its dual-processor aspect, to consist of a processor 50_a 10 designated as the MLI state machine and a second processor 50_b designated as the NDL (network definition language) state machine. Each of these processors have a memory control card designated as 66_a and 66_b. The MLI state machine processor 50_a connects to an Interface Card 15 105_i which has a foreplane cable 105_p which connects the Message Level Interface to the Line Support Processor 300. Connections to and from the host system are managed through the backplane of the base module 106 and through the Distribution Card 20. A series of 20 RAM circuit cards provide for "shared memory" facilities and are designated as the elements 90.

Thus, the Network Support Processor in its hardware arrangement involves two processor cards each of which is referred to as a Universal Input/Output 25 State Machine (UIOSM). Each of these processors has a separate memory control card (MEMCTL) designated as 66_a and 66_b. Then the Interface card 105_i (FIG.1B) provides an external data link interface and a Message Level Interface (DLI/MLI). In addition there are the four 30 to seven RAM cards 90 which provide the shared memory.

FIG. 2 shows a block diagram of the Network Support Processor. The state machine cards 50_a and 50_b are identical cards but are designated as the MLI state machine (master processor) and the NDL state machine 35 (slave processor). The only difference between the two



- 14 -

processor cards are the PROM and the jumpers involved. Each of the processor cards has a 16-bit processor element having as much as 32K bytes of PROM in addition to various control registers.

5 The master processor or MLI state machine 50_a together with its associated micro-code is responsible for communication with the host computer through the Interface Card 105_i. The master processor 50_a communicates with the slave processor 50_b (NDL state machine) through 10 the shared memory 90 and a control line 66_i.

15 The slave processor 50_b (NDL state machine) and its micro-code is the source of all the NSP messages exchanged with the host computer 100. Also general programs necessary for interfacing to a Line Support Processor 300 are executed by the NDL state machine. 20 Each memory control (MEMCTL) card 66_a and 66_b includes 16K bytes of "local" RAM memory. However, only the processor associated with the particular memory card has access to that local memory. The memory control card (whether 66_a or 66_b) also has logic circuits that permit 25 its associated processor to gain access to the shared memory 90 on the RAM cards of FIG. 1B. Logic provided on the MLI memory control card 66_a acts to resolve any processor memory access conflicts. This card also has a programmable rate generator and an interval timer.

30 The shared memory 90 in FIG. 2 is composed of RAM cards, each of which has 32K bytes. This memory is shared by the two (master and slave) processors on the State Machine cards 50_a and 50_b. Access to "shared memory" 90 is controlled by the memory control cards 66_a and 66_b.

35 The Interface Card 105_i (which is later described in conjunction with FIG. 8) has the logic which is used to interface between a host computer 100 and



- 15 -

the Line Support Processors (LSPs) 300. The Interface Card 105_i has one part called DLI or data link interface for interchange between a Distribution Card 20 and the host computer 100. The Interface Card 105_i also has a 5 foreplane connection designated Message Level Interface through which it connects to a Distribution Card, such as 20 and also the Line Support Processor 300. In addition to these external interfaces, the Interface Card 105_i includes logic circuits for unit clearing, 10 for interrupt request handling, and for master clock control (8 megahertz) for the entire Network Support Processor.

15 Each processor of the dual-processors of the NSP communicates through 3 buses as will be seen in FIG. 3. These are the I/O bus 10, the memory address bus 16 (MADDR), and the memory data bus 12 (MEMOUT).

20 The I/O bus 10 carries data to be written into the main memory of the host computer or transferred between registers of the State Machine processor (50_a, 50_b) or between registers on the memory control cards 66_a, 66_b, and the Interface Card 105_i. The MEMOUT bus 12 transfers information which is read from memory (shared memory 90). This information could be executable instructions, or memory operands, or data. 25 The memory address bus MADDR 16 points to the current memory word that is to be written or read.

30 As was seen in FIG. 2, the dual master-slave processor system of the NSP consists of two sections, a MLI processing section and an NDL processing section. MLI PROCESSING SECTION: Referring to FIG. 2, the MLI processing section of NSP 80 consists of the master processor 50_a (MLI state machine), the MLI memory control card 66_a and also the Interface Card 105_i.

35 The processor is driven by PROM in addition to RAM which is located on the memory control 66_a



- 16 -

and the shared memory 90 cards. The MLI state machine master 50_a determines the type of host data transfer to be accomplished and also controls the Line Support Processor data transfer through the MLI port 105_p of the Interface Card 105_i. The MLI processing section of the NSP communicates with the slave processor 50_b (NDL state machine) through the shared memory 90. The Interface Card 105_i has a PROM that permits this card to interface the MLI state machine to the host computer 100 at a high level mode. The Interface Card 105_i handles the details of the actual data transfer.

NDL PROCESSING SECTION: As seen in FIG. 2 the NDL processing section consists of the slave processor 50_b (NDL state machine) which is driven by local memory located on the NDL memory control card 66_b or which is driven by data from the shared RAM memory 90. The State Machine PROM (program memory) has a boot strap that loads program information from the host computer over to Local memory (in the memory control card) and to Shared RAM, when the Network Support Processor is initialized. This program then drives the NDL state machine 50_b (slave processor).

The NDL processing section provides communication with the Line Support Processor 300. Communication is done through shared memory 90 and the Interface Card 105_i, all under the control of the MLI state machine 50_a. Data transfers to and from the Line Support Processor 300 are controlled by a direct memory access (DMA) logic circuit located on the Interface Card 105_i (also see FIG. 7 and discussion thereof). This DMA logic circuit is operated under the control of the MLI state machine 50_a.



- 17 -

When the MLI state machine 50_a has a block of data for the LSP 300, the data is placed in Shared Memory 90. The NDL state machine 50_b notifies the MLI state machine 50_a by means of an interrupt signal that 5 the LSP is available. The MLI 50_a state machine then directs the Interface Card 105_i to transfer the data from Shared Memory 90 over to the LSP 300 via the message level interface channel 105_p. Similarly, when 10 the Line Support Processor 300 has data destined for the NDL state machine 50_b, the data is also placed in Shared Memory 90 under the control of the MLI state machine 50_a. The MLI state machine 50_a then signals the NDL state machine 50_b by means of interrupt signals that the Line Support Processor data is now available.

15 MEMORY FOR NETWORK SUPPORT PROCESSOR: The Network Support Processor (NSP) includes two basic types of memory which are: programmable read only memory (PROM) and random access memory (RAM). In the preferred embodiment of the Network Support Processor, the PROM 20 configuration of the MLI state machine is made to hold 8K bytes while the NDL state machine is made to hold 2K bytes. The PROM is accessible only to the processor state machine in which it is located.

Each of the memory control cards 66_a and 66_b 25 will have 16K bytes of local RAM that is accessible only to its associated state machine processor. On the other hand, the Shared RAM Memory 90 is available to either of the two processor state machines.

During a memory access operation, the clock 30 (8 megahertz) period is delayed in order to produce the appropriate memory timing. All memory Write operations require three clock periods. All PROM and Local Memory Read operations require one clock period while a Shared Memory Read operation requires two clock periods.



- 18 -

UNIVERSAL INPUT/OUTPUT STATE MACHINE: As seen in FIG. 3 the major functional elements of the Universal Input/Output state machine card is shown. Both the master processor state machine and the slave processor state machine cards are logically identical. Each card has processing logic circuits that control the sequence of operations for the Network Support Processor. The processing circuits consist of memory addressing logic 41, program memory PROM 50, data manipulation logic 32, 33, 34, instruction execution logic 23 and external bus logic 60_L. The processing logic interfaces the state machine to other circuits in the Network Support Processor.

MEMORY ADDRESSING LOGIC: The processor state machine memory addressing circuitry is shown in FIG. 4. The addressing logic is made of a Program Counter (PC) 41, a Memory Reference Register (MRR) 40, a Stack Memory 45, a Repeat Counter 42. The PC 41 and MRR 40 are used as the memory address pointers.

The PC 41 points to the current instruction or to the operand for that instruction. As each instruction is executed, the PC 41 automatically increments and then points to the next instruction. The instruction can either reside in the state machine PROM 50, or in Local Memory 66_m of FIG. 7, or Shared Memory 90.

The memory reference register (MRR) 40 is used to store the address of the next operand when the operand address cannot be stored at PC + 1 (incremented program counter 41). For instance, when the program must examine the contents of a word of data, the MRR 40 is loaded with the address of the data word. This allows any of the various state machine instructions to be executed while using this data word as the operand.



Repeat Counter 42 is a register that can cause an operation to be repeated up to 256 times. The Repeat Counter 42 is loaded with a value of zero through 255 and is decremented with each repeated 5 operation. When the Repeat Counter underflows (has a value less than zero) then the repeat operation is terminated and the next instruction is fetched. The address source of the memory operand (which is the MRR 40 or the PC 41) is automatically incremented with 10 each execution of the repeated operation. The Stack Memory 45 is used to retain the current program address when a subroutine is called for, and then used to restore that address when the subroutine is terminated with a "RETURN" instruction. The Stack Memory 45 can 15 retain as many as 16 addresses which permit storage of 16 nested subroutines.

PROM: The PROM 50, as used on the processor state machine, is, in the preferred embodiment, an 8K byte storage element.

20 DATA MANIPULATION LOGIC: In FIG. 5 there is seen a block diagram of the data manipulation logic of the UIO state machine processor. This data manipulation logic is made of 16 general purpose accumulators (designated as element 30) an operand register 31, an arithmetic logic 25 unit (ALU) 32, a byte-swap circuit 34 and a shift logic circuit 33. The 16-bit registers of the accumulators of accumulator 30 are used to store information for manipulation and also to retain the results of the various operations.

30 The operand register 31 holds the operand of the current instruction. The ALU 32 receives data from the operand register 31 and the accumulator 30. A variety of logical and arithmetic operations are then



- 20 -

performed on the data, as has been mentioned in the previously cited reference patents. The ALU 32 provides output to the byte-swap logic circuit 34 and the shift logic circuit 33.

5 The byte-swap logic output is used to replace the sequential order of the byte sequence provided by the ALU 32. In byte-swapping, the most significant byte of the ALU output is exchanged with the least significant byte, and similarly the least significant byte is exchanged with the most significant byte in sequential order.

10 The shift logic circuitry 33 can be used to shift or to rotate the ALU output to the left or to the right. Also, the shift logic circuitry can also transfer the ALU output directly and without alteration.

15 INSTRUCTION EXECUTION LOGIC: In FIG. 6 there is seen a block diagram of the instruction execution logic of the UIO state machine processor. The instruction execution logic circuitry is made of an instruction register 22, an instruction decoder set of PROMS and latching registers for the output of the PROMS at element 23. The instruction register 22 holds the current state machine instruction. This current instruction is received from the PROM 50, in the state machine, or from either local 66_m or shared memory 90. The instruction decode PROMS 23 are addressed by the instruction register 22. The PROMS 23 decode the instructions into 40 different control signals that control the operation of the state machine processor (such as chip enable, counting controls, etc.). The output of the decoder PROMS 23 is latched by registers when required for timing or for signal stability.



- 21 -

EXTERNAL BUS LOGIC: Referring to FIG. 7, the major external buses of the State Machine Processor 2 are seen connected to the Interface Card 105_i and the memory control card 66. These buses going external to the State Machine Card 2 are the I/O bus 10, the memory address bus (MADDR 16), the memory data-out bus (MEMOUT) 12 and the Put/Get Enable line 60_{pg}.

As seen in FIG. 7, the memory address bus 16 and the I/O bus 10 also connect to the memory control card 66 which holds its own Local Memory 66_m. Also, the memory data-out bus 12 can receive data from the memory control card 66 along the bus extension 12'. The memory control card 66 has a data bus and also an address bus which connects to the Shared Memory 90. The I/O bus 10 and 10' is used to transfer information to Local Memory 66_m and to the Shared Memory 90. I/O bus 10 is also used to bring instructions and data back into the State Machine Processor Card 2.

The memory address for the MADDR bus 16 is generated on either (a) the State Machine Processor Card 2 or else (b) the Interface Card 105_i. The State Machine 2 addresses either the Local Memory 66_m, the Shared Memory 90 or the PROM 50 (FIG. 4). The Interface Card addresses Local or Shared Memory during direct memory access (DMA) only. In the previously cited patents, which involved the Universal I/O State Machine Processor and which applications have been heretofore cited and incorporated by reference, it will be seen in FIG. 2B of these applications that there was described two control registers 37, 38. These are called application control registers and are used to store information for logic which is external to the State Machine Processor 2. These application control registers



- 22 -

are unique in that the registers receive data which is generated on the State Machine Processor 2, but the data in the control registers is clocked by signals that are generated on cards other than the State Machine

5 2.

In FIG. 7 the Interface Card 105_i will be seen having a data link interface (DLI) to the host computer 100 and also a message level interface (MLI) to the Line Support Processor 300. In addition, the 10 Interface Card has an interrupt line and an interrupt knowledge line between itself and the State Machine Card 2. The memory control card 66 also has a control line 66_i for interchange of signals between the NDL processor 50_b.

15 INTERFACE CARD: The major elements of the Interface Card 105_i are shown in the block diagram of FIG. 8. The Distribution Card 20_a connects, via the data link interface (DLI), to the Data Link Interface logic 100_i.

The Distribution Card 20 connects to the MLI logic 100_m via the bus 105_p. The MLI memory control card 66_a connects to the message level interface logic 100_m by means of buses 16 and 12. The message level interface (MLI) State Machine Processor 50_a connects via the frontplane I/O bus, to the DLI logic 100_i, to 25 the PROM sequencer 100_{ps} and to the MLI logic 100_m.

The Interface Card 105_i furnishes a data link interface (FIG. 7) between the host computer system 100 and the Network Support Processor; and it also furnishes a message level interface (FIG. 7) 30 between the Network Support Processor and the Line Support Processor (LSP) that it controls. In summary of FIG. 8, the Interface Card has an MLI section 100_m, a DLI section 100_i and a PROM sequencer 100_{ps}. As was seen in FIG. 1B, the Interface Card communicates 35 with the other NSP circuitry through foreplane connectors.



- 23 -

Interface Circuit Card (detailed description)

The interface circuit card 105, as seen in FIG. 8 provides the interconnecting links between the host computer 100 (via the distribution card 20_a) and between the Line Support Processor (LSP) 300 (via the Distribution Card 20) to the MLI state machine processor-controller 50_a via the I/O bus 10, and to the memory control circuit card 66_a via the memory address bus 16 and the memory data out bus 12.

The interface circuit card provides the Network Support Processor 80 with the following functions:

- (a) clock and clock control logic;
- (b) a backplane interface to the host system 100 which obeys the MLI protocol and frees the state machine processor-controller from much of the protocol details;
- (c) maintenance control logic;
- (d) clearing mechanisms which satisfy the requirements of shared systems, on-line maintenance, etc.;
- (e) an asynchronous MLI interface for the state machine processor-controller which allows the Network Support Processor (NSP) to act as a "host" and which can drive any outboard MLI compatible data link processors (DLP) such as LSP 300.
- (f) logic to coordinate interrupt requests and host computer DMA data transfer requests to give the NSP interface priority over host interface operations;
- (g) interrupt logic in order to reduce the state machine processor-controller's response time for serving the NSP interface and to remove polling considerations from the software design requirements.



- 24 -

The state machine processor-controller communicates with and controls the Line Support Processor interface and the host computer interface through a set of "GET" and a set of "PUT" instructions.

5 The NSP 80 (FIG. 2) can control the flow of data between the host computer 100 and the Line Support Processor 300, can specify various protocol sequences, detect transmission and protocol errors and perform other tasks through use of the "PUT" and "GET" instructions using
10 registers which are situated on the interface circuit card.

General System Overview: The base connection module 106 (FIG. 1) is a basic building block for the Network Support Processor subsystem. The base connection module consists of a backplane into which various cards and modules fit. For
15 example, these modules may consist of one to six distribution cards (DC) 20 for communication with selected host systems, a Network Support Processor such as is shown in FIG. 1B, a maintenance card 20_m and other cards as required. The typical Network Support Processor 80 contains the dual set of
20 state machine processor-controllers and an interface circuit comprising interface logic to interface the Network Support Processor with the Distribution Card and the maintenance card, and additional interface circuitry to connect a line communication processor called LSP (Line Support
25 Processor 300) which connects to data comm lines.

The Distribution Cards (20, 20_a, etc.) are used to provide a connection path between the "asynchronous" host message level interface and the "synchronous" NSP interface. The MLI is an asymmetrical interface used between any senior
30 system (such as a host computer) and a subordinate unit. The host computer unit 100 initiates an I/O operation by sending an I/O descriptor to a processor in the network. The processor then performs the specified operation,



- 25 -

requesting data from or sending data to the host computer as required, and finally sending a Result Descriptor to the host computer upon completion of the operation. The subordinate processor must be ready to accept another I/O descriptor from 5 the host computer immediately after a Result Descriptor is sent to the host computer. I/O descriptors are of variable length and it is the responsibility of the subordinate processor to ensure that the proper number of words are received to fulfill the I/O descriptor command. Vertical and 10 longitudinal parity are checked for all MLI transactions but no provision is made for recovery should an error be detected (other than to abort an I/O operation).

Once a Distribution Card has provided a connection between the host computer and a network support processor (NSP), 15 the Distribution Card becomes transparent to communication between the host computer and the Network Support Processor. The Network Support Processor's communication with the host is accomplished by a standard sequence of status signals, which indicates to the host computer the access requirements 20 of the Network Support Processor. When a Network Support Processor is connected to the host, all information transfers are as indicated by the NSP status lines. The Network Support Processor is provided with interface logic via the interface circuit card; this generates the NSP status in fixed 25 sequences to control the communication between the host and the NSP as requested by the processor controller 50_a (FIG. 2). All data transfers to or from the host computer are through a FIFO stack register buffer (100_{i3}, FIGS. 10; 10A) contained within the interface logic.

30 Referring to FIG. 9A, there is seen a block diagram of the MLI Interface Logic 100_m of FIG. 8.

As noted in FIGS. 2 and 8, the Interface Card, 105_i, connects the MLI State Machine processor-controller 50_a



- 26 -

to the host computer 100 and the LSP (Line Support Processor) 300.

In FIG. 9A, the LSP 300 is connected by the MLI Data Bus 105_p to the State Machine's Shared Memory Output Bus 12 through driver 60_m. The MLI Data Bus 105_p also connects to 5 transmitter-driver 60_{tx} and receiver-driver 60_{rx}.

The State Machine 50_a connects via I/O bus 10 to DMA transfer counter 160_{tc} and Address Counter 160; in addition bus 10 connects to Control Register 60_{cr}, to Data Register 60 10 and receiver-driver 60_{rx}.

The DMA Transfer Counter 160_{tc} provides its output to DMA Address Counter 160_d whose output address bus 16 connects to memory control 66_a and the State Machine 50_a.

The Control Register 60_{cr} connects to Control Logic 15 60_r which provides control signals to the interface circuitry and to status driver 60_t.

The Data Register 60 receives its input via the I/O bus 10 and sends its output to transmitter-driver 60_{tx}.

In FIG. 10A, the Data Link Interface Logic 100_i 20 (FIG. 8) is seen in block form.

The State Machine I/O bus 10 from the Memory Control 66_a and State Machine 50_a connects to receiver-driver 100_{i5} and to the Start Address Register 100_{i8}.

The Receiver-Driver 100_{i1} connects to host computer 25 100 and feeds Data Latching Register 100_{i2} and FIFO 100_{i3}. The FIFO output is inverted by driver-inverter 100_{i4} and checked by parity tree 100_t. The FIFO output also activates MLI counter 100_{ct} and receiver driver 100_{i5}.

Control signals are provided by the output from PROM 30 100_{im} to output register 100_{or}.

Register 100_{or} provides the normal next address to PROM 100_{im} and a branch next address signal also, in addition to control signals for the DLI Interface Logic 100_i.



- 27 -

I. Transfer of Data from Host Computer to NSP Memory to Line Support Processor

Referring to FIG. 10A, data from host computer 100 is transferred along the backplane data lines to receiver-driver 100_{i1} and latched in data register 100_{i2} for loading up to 5 64 words in FIFO register 100_{i3}.

The State Machine 50_a initiates a PUT address instruction to PROM Sequencer Start Address Register 100_{i8} to start the address sequencing of PROM 100_{im}.

10 PROM 100_{im} will then output a series of control words via PROM Output Register 100_{or} as is illustrated in Table A-6 hereinafter.

15 The lower portion of FIG. 10A, including start-address register 100_{i8}, PROM 100_{im}, PROM Output Register 100_{or} and Branch Logic 100_{br}, constitute the PROM Sequencer 100_{ps} of FIG. 14.

20 A PUT instruction from the State Machine 50_a (which instruction can be repeated 64 times) will load 64 words into the FIFO register 100_{i3}. The MLI Counter 100_{ct} will be loaded with the number of words to be transferred.

If 50 words are to be transferred from Host 100 to NSP Memory 90, then when the MLI Counter 100_{ct} counts the transfer of 50 words to the FIFO, the Counter will send an "interrupt" to the State Machine 50_a. The State Machine 50_a 25 will now provide a GET instruction (repeated 50 times) to remove the 50 words from the FIFO to the Shared Memory 90 of State Machine 50_a via Memory Control 66_a.

Any parity errors will be sensed by Parity Tree 100_t to set a flip-flop which will form a parity error signal to 30 the State Machine 50_a.

The 50 words from the host computer main memory have now been transferred to shared memory 90 (FIG. 2). Now it remains for these words to be sent to a selected line



communications processor (LSP 300) for transfer to a selected peripheral terminal.

Referring to FIG. 9A, the State Machine memory output bus 12 connects to data driver 60_m and to bus 105_p which 5 connects to LSP 300 for data transfer. This may also be seen in FIG. 7 where Shared Memory 90 has an output bus 12' which becomes bus 12.

The State Machine 50_a provides a PUT instruction to Data Register 60. The I/O bus 10 from the State Machine 10 provides control words onto bus 105_p to select a particular LSP 300.

Using the memory output bus 12 and DMA (Direct Memory Access) Driver 60_m , a burst of data words may pass from Shared Memory 90 directly to the selected LSP 300.

15 However, if the Non-DMA mode is used, the State Machine 50_a could laboriously transfer words on I/O bus 10 to Data Register 60 to Data Driver (Non-DMA) 60_{tx} to bus 105_p to the selected LSP 300.

Using the DMA mode for rapid data transfer, in 20 FIG. 9A, the I/O bus 10 carries a PUT instruction from State Machine 50_a which loads DMA transfer counter 160_{tc} with the number of words to be transferred, for example, 50 words. Also the DMA address counter 160 is loaded with an address (memory address pointer) to select the starting area of 25 Shared Memory 90 for data transfer.

Then MLI Control Register 60_{cr} is loaded to start the DMA operation. The Control Register 60_{cr} controls interface operations as indicated in Table A-2 hereinafter and uses Control Logic 60_s and DMA PROM 60_{sp} for DMA operations. The 30 Control Register 60_{cr} , Control Logic 60_s , Control PROM 60_{sp} and Driver 60_t may be designated as the "DMA Logic".

The Control Logic 60_s will enable memory output bus 12 DMA driver 60_m and MLI Data Bus 105_p for direct burst of word transfers from Shared Memory 90 to the selected LSP 300.

- 29 -

The Control Logic 60_s will decrement DMA Transfer Counter 160_{tc} for each word transferred and will increment the DMA address counter 160 in order to point to the address of each of the next words to be transferred.

5 II. Transfer of Data From Line Support Processor to NSP Memory to Host Computer Memory

Referring to FIG. 9A, the State Machine will poll the various Line Support Processors (LSP 300) to find which is ready to transfer information and instruct that LSP send its data on MLI Data Bus 105_p where it is received by Receiver 60_{rx} and passed on I/O bus 10 to Shared (NSP) Memory 90.

Then the State Machine 50_a will use repeated PUT instructions to load FIFO 100_{i3} with data words from memory 90. Then the State Machine 50_a will activate the PROM Sequencer 100_{ps} so it can generate control signals to handle word transfers from FIFO 100_{i3} to the memory of the host computer 100.

Output "registers" (which are actually software instructions) in the interface logic are loaded by the state machine processor-controller via the execution of "PUT" statements. These are: the Clear instruction used to clear the FIFO and to clear parity error flip-flop; the PUT address instruction is used to load the microcode starting address of a MLI sequence and also to load the data transfer counter 160_{tc} of FIG. 9A; and a PUT FIFO instruction which is used to load data into the FIFO for subsequent transmission to the host computer.

Communication to the state machine processor-controller 50_a from the data link interface logic 100_i (FIG. 8) is accomplished via "GET" instructions. The status register (in PROM sequencer 100_{ps}, FIG. 8 and in FIG. 14) contains the current status of the data link interface; a Count Register (in PROM sequencer 100_{ps}) contains the current value of the transfer counter 100_{ct}; the GET FIFO instruction is used to



- 30 -

access data (in the FIFO 100_{i3}) received from the host computer 100. An eight bit register is also provided to interrogate the system's unique identification number, SUID (which is settable by eight jumpers located on the board).

5 When the clear register is accessed via a "PUT" instruction, then the FIFO 100_{i3}, the vertical parity error flip-flop, and the Count Register are reset.

"PUT" FIFO Register: This register 100_{i2} (FIG. 10A) is used to load the FIFO 100_{i3} from the state machine processor-controller with either a "PUT" or with a "Repeat PUT" instruction. When a transfer is requested from a Network Support Processor to the Host Computer, the FIFO 100_{i3} must be loaded with three words of Descriptor Link followed by the message text, followed by the data message longitudinal parity word (LPW). The FIFO 100_{i3} holds 64 words of 16 bits each or 128 bytes.

"GET" FIFO Register: Data sent by the host computer is stored in the FIFO 100_{i3} as it arrives at the data link interface, FIG. 10. This data can be accessed by the Network Support Processor (and its state machine processor-controller) via the use of "GET" statements to the FIFO Register 100_{i2}. Each time data is taken from the FIFO 100_{i3}, the FIFO is advanced to the next word.

"PUT" Address Register: This register 100_{i8} (FIG. 10A) is used to initialize the data link interface logic by loading a microcode sequence starting address and a word count into the interface logic. The low order eight bits represents the value to be loaded into the MLI counter 100_{ct}. The high order eight bits of the register are used to specify the MLI sequence to be performed. The counter is used to count the words transferred over the message level interface.



- 31 -

"GET" Count Register: The least significant eight bits of the "GET" count register contain the count value of the transfer counter 160_{TC} , in complement form.

"GET" Status Register: A status register (200, FIG. 14)

5 provides information about the current state of the MLI interface logic and the DLI interface logic. The 16 bits of the status register are defined as follows:

TABLE A-1

	<u>Bit</u>	<u>Value</u>
10	0	DLP Status 1
	1	DLP Status 2
	2	DLP Status 4
	3	DLP Status 8
	4	PROM Status 0
15	5	PROM Status 1
	6	PROM Status 2
	7	DLP Connected
	8	DLP Service Request
	9	DLP Cleared
20	10	Address Reject
	11	DLP Vertical Parity Error
	12	Always 1
	13	Always 1
	14	Always 1
25	15	Always 1

Note: The LSP 300 is a type of DLP (Data Link Processor) and later references to DLP should be understood to include LSP (Line Support Processor) 300.



- 32 -

Notes: DLP Status 1, 2, 4, 8 are the status bits the DLP is currently presenting to the host computer.

5 PROM Status 0, 1, 2 are three bits used to indicate the condition of the MLI protocol to the state machine when an interface generated DLP service request is present.

Address reject is used as a flag indicating a failed attempt to load the Address and the Count Register.

10 State Machine Interface to LSP (FIG. 9A): To the software, the interface is viewed as a set of registers and drivers which are accessed via "GET" and "PUT" instructions from the state machine. Direct memory address (DMA) capability is provided to speed data transfers over the MLI but the state machine software is responsible for implementation of the MLI 15 protocol and must control all MLI operations.

Strobe Register: A "PUT" to the strobe register creates a 62 microsecond pulse on the MLI SIO line, which is used to clock output data and to acknowledge receipt of input data. A flip-flop called the "Strobe-Received Flip-Flop" is reset.

20 Send Data Register: A "PUT" instruction from the state machine to the "Send" Data Register 60 loads 16 bits of data plus one parity bit from the I/O bus into a data register 60, FIG. 9. The data is then driven on to the MLI data lines.

25 Read Data Register: A "GET" from this register will transfer the current contents of the MLI data lines to the state machine on the I/O bus 10.

MLI Control Register (FIG. 9A): A PUT to the Control Register 60_{cr} will set various flip-flops which control the operation of the interface. These bits are as follows:



- 33 -

TABLE A-2

<u>Bit</u>	<u>Action</u>
0	Set MLI parity error flip-flop
1	Address Select
5	Terminate or Master Clear
2	Access Granted
3	Transmit
4	Channel Select
5	DMA Enable
10	Normal Mode
6	Expected DLP Status 1
7	Expected DLP Status 2
8	Expected DLP Status 4
9	Expected DLP Status 8
10	Reset DLP Strobe Flip-flop
11	
15	Not Used
12	Not Used
13	Not Used
14	Not Used
15	Reset DLP Strobe Flip-flop
Notes:	(a) Any "PUT" to the control register 60 _{cr} will reset the MLI reset flip-flop.
20	(b) The MLI parity error flip-flop (60 _q) will set whenever a word with bad parity is transferred to the state machine from the MLI data lines. The reset bit should be set and then reset (i.e., the bit creates a level to the reset input of the flip-flop, and not a pulse).
25	(c) The Address Select, Terminate or Master Clear, Access Granted and the Channel Select bits correspond exactly with the signals of the same name on the message level interface (MLI).
30	(d) The Transmit bit enables the MLI interface to drive the MLI bi-directional lines. Control of this bit must be closely coordinated with the MLI protocol.

(e) The DMA enable-bit must be set in order to initiate a DMA operation, and reset otherwise. Bit 8, 9, 10, 11 (the Expected DLP status bits) are compared with the received DLP status bits while the MLI is in the direct memory access DMA mode. If the DLP status changes, the MLI will exit the DMA mode. When the Normal Mode bit is reset, the MLI logic is placed in maintenance mode. In maintenance mode the ADDSEL.1, AG plus SIO/1 and TRM plus MC/1 signal line on the MLI interface are put into a "high" state. Also, a received DLP strobe is simulated for any condition which would normally generate a SIO pulse on the MLI interface. Thus, maintenance can be performed without a MLI cable present.

(f) The four bits of "Expected DLP Status" are latched and compared with the actual DLP status received from the MLI cable. The expected and the actual status must be the same in order to enter and remain in the DMA operation.

(g) The Reset DLP strobe bit is used to reset the DLP strobe flip-flop which is normally set upon receipt of the signal DLPST and is reset by PUTs to the strobe register.

DMA Address Register (FIG. 9A): A PUT instruction to the DMA address register counter 160 loads the 16 bit address counter with the address of a buffer area in memory (66_a, 90) which is to receive or provide data during a DMA operation. The address register counter 160 increments by one after each word transfer. During a DMA cycle, the contents of the address register counter are placed on the state machine address lines 16. All address mapping and all relocation



- 35 -

features of the memory control card 66_a are enabled during a direct memory access DMA cycle. The PROM 50 on the state machine may not be accessed during DMA operations.

5 Set MLI Count: This is done in the DMA transfer counter register 160_{tc}. This uses a PUT instruction to specify the maximum number of words transferred during a direct memory access (DMA) operation. The number may range from 0 to 255 words as loaded and read in complement form. The most significant eight bits of the register are not used.

10 GET MLI Count: This is an instruction which uses part of the DMA transfer-counter register 160_{tc}. The lower eight bits of this register contain the value of the DMA counter register 160_{tc} in complement form. The most significant eight bits are always set true.

15 MLI Status Register (FIG. 9A): This register 60_{st} enables the driver 160_d for conveying addresses to the state machine 50_a and the memory control card 66_a. The MLI status register contains a number of bits which indicate the MLI status as defined hereinbelow:

20

TABLE A-3

	<u>Bit</u>	<u>Meaning</u>
	0	Received DLP Status 1
	1	Received DLP Status 2
	2	Received DLP Status 4
25	3	Received DLP Status 8
	4	DMA Over
	5	DLP Strobe Received Flip-Flop
	6	MLI Parity Error
	7	MLI Not Reset
30	8	-
	9	-
	10	-
	11	-
	12	-



- 36 -

<u>Bit</u>	<u>Meaning</u>
13	-
14	-
15	-

The status register is provided with bit fields as indicated below which have the meanings explained:

Bits 0-3: These bits indicate the status presented to the MLI by the data link processor (DLP) on the lines designated STC 1, STC 2, STC 4, STC 8.

Bit 7: This bit is cleared when the DLP is "Hard Cleared" and set when the MLI interface is initialized. No bi-directional MLI signal lines are driven by the MLI until the interface is initialized.

Bit 5: This bit is set when the signal DLPST is received and cleared by either a PUT to the strobe register which generates a SIO pulse, or by bit No. 15 of the MLI control register 60_{cr} which does not generate a SIO pulse.

Bit 6: This bit is set whenever a word with bad parity is received from the MLI. It is reset by bit No. 0 of the MLI control register 60_{cr}.

Bit 4: This bit is used to determine the cause of termination of a DMA operation. The DMA operation may be stopped because of a time-out condition (2 microseconds) which may or may not represent an error condition, or it may terminate because of either a status change by the Data Link Processor or a buffer overflow condition. The signal DMAOVER will be called "high" if the DMA was terminated due to a DLP status change or a DMA count overflow.

DMA OPERATIONS:

DMA Write Operation: To initiate a "DMA Write" operation, the state machine must initialize the DMA hardware as follows hereinbelow, although not necessarily in the order presented herein:



- 37 -

1. Load the DMA address counter 160 (FIG. 9A) with a value which is one less than the word address of the buffer which contains the data to be written to the Data Link Processor (DLP). The address is incremented by one before 5 each word is sent.

2. Load the DMA count register 160_{tc} with a value C which is calculated as follows:

10 C = the complement of the count minus 1 where the "count" is a number of words to be sent to the Data Link Processor before any status changes are expected.

3. The state machine must be "connected" to the Data Link Processor.

4. The MLI control register 60_{cr} must be loaded with 15 the following data:

- (a) The transmit bit set (bit 4)
- (b) DMA Enable bit set (bit 6)
- (c) Expected DLP status initialized to the DLP status (bits 8, 9, 10, 11).
- 20 (d) Normal mode set (bit 7)
- (e) All other bits reset.

Once the MLI hardware is initialized, there will be caused the following sequence:

25 1. The hardware will wait for the state machine to enter a fetch cycle by waiting for FETC8/ to go "low". When that happens, assuming the MLI interface is not ready to cause an interrupt, then the signal SDMARQB goes "high" into the DMA control PROM (100_{im}). The PROM output SDMARQ (DMA Request) then goes "high".

30 2. On the next leading edge of WTCLK (WTCLK is a 62 microsecond pulse which begins at the end of each memory cycle) the DMARQ flip-flop 60_r sets. When DMARQ is set, the

- 38 -

clock-enable signal to the state machine is put in a "false" state, thus "freezing" the state machine.

3. On the next leading edge of WTCLK, the DMAGNT flip-flop sets. When this DMAGNT flip-flop is set, it causes 5 the following to happen:

- (a) The state machine address drivers are tri-stated and the DMA address drivers are enabled causing the memory address to be driven from the DMA address counters of 160.
- 10 (b) The state machine I/O bus drivers are tri-stated.
- (c) The asynchronous clear signal to the cycle flip-flop is removed.
- 15 (d) The DMA count register 160_{tc} and the DMA address register counter (160) are allowed to count if the DMA control PROM output "AINCEN" (address increment enable) is true.

4. Wait for the conditions of either 4A or 4B (see below) at a leading edge.

20 4A. If the DLP SYNCH signal is high (i.e., the DLP is ready to receive a word of data from the memory buffer) and if the signal DMAOVR/ is high (that is the DLP status matches the expected DLP status and the DMA count register is not 0) and if the host MLI interface is not ready to interrupt, then on the next leading edge of WTCLK, the following happens:

- 30 1. Set of the cycle flip-flop.
- 2. Increment of the DMA count register 160_{tc} by one.
- 3. Increment of the DMA address register counter 160 by one.

In waiting for the next leading edge of WTCLK

- (a) Load the DMA data latch with the data from the memory buffer.



- 39 -

(b) Generate a SIO strobe to the Data Link Processor (DLP).

(c) Reset the signal DLPSYNCH and the DLP strobe received flip-flop.

5 4B. If the DLP SYNCH is "high" and the signal DMAOVR/ is "low" or if time-out is true, or if the MLI host interface is ready to interrupt, then do the following:

1. Reset DMARQ. This allows the state machine to resume execution.

10 2. Reset DMAGNT - this allows the state machine to drive the address and the I/O buses.

The DMA operation is now over. If the state machine determines (by interrogating the contents of the MLI status register) that the cause of the termination of the DMA was 15 due to time-out that it is desired that DMA be re-entered, then all that is required to re-enter DMA mode is to reload the MLI control register 60_{cr} (with no change in any of the bits).

20 DMA Read Operations (FIG. 9A): To initiate a DMA "Read" operation, the state machine must initialize several registers in the MLI hardware as follows:

1. Load the DMA address register 160 with the word address of the memory buffer to receive data from the data link processor (DLP), such as 25 LSP 300.

2. Load the DMA count register 160_{tc} with the complement of the number of words to be read.

3. Connect to the data link processor (LSP 300).

4. Load the MLI control register 60_{cr} with the 30 following data:

(a) DMA enable bit set (bit 4).

(b) Normal mode bit set (bit 7).



- 40 -

- (c) Expected DLP status bits initialized to the DLP status (bits 8, 9, 10, 11).

- (d) All the bits reset.

Once the MLI hardware is initialized, it will cause 5 the following DMA Read sequence to occur:

1. Wait for the state machine to enter the fetch state (that is, FETCH/ goes low). When FETCH/ is low, the signals SDMARQB and SDMARQ will go high.
2. On the next leading edge of WTCLK the DMARQ flip-flop will be set, causing the state machine to freeze due to removal of the clock-enable to the state machine.
3. The next leading edge of WTCLK, the DMAGNT flip-flop will be set allowing several things to happen:
 - (a) The state machine address drivers are tri-stated and the DMA address drivers are enabled allowing the memory to be driven by the DMA address counters.
 - (b) The state machine I/O bus drivers are tri-stated and the MLI receive-data buffers are enabled allowing the I/O bus to be driven with data received from the DLP over the (MLI) Message Level Interface.
 - (c) The asynchronous clear signal is removed from the cycle flip-flop; and
 - (d) The DMA count register 160_{tc} and the DMA address counters 160 are allowed to count when the AINCEN signal from the DMA control PROM is true.
4. Wait till either the conditions of paragraph 5 or 6 below are satisfied at the time of the leading edge of WTCLK and behave accordingly.



- 41 -

5. If (i) timeout is false and (ii) the MLI host interface is not ready to interrupt, and (iii) DLP SYNCH is true (that is, the DLP has presented valid data on the MLI cable), and (iv) DMAOVR/ is high (i.e., the DLP status matches the expected DLP status and the buffer in memory is not full) then set the cycle flip-flop initiating "memory write cycle" to store the data into memory. On the next leading edge of WTCLK, prepare for the next cycle:
 - (a) Generate a SIO pulse to acknowledge receipt of the word from the DLP.
 - (b) Increment the DMA count register.
 - (c) Increment the DMA address counter.
 - (d) Clear the DLP SYNCH and the DLP strobe-receive flip-flops.
 - (e) Clear the CYCLE flip-flops.
 - (f) Repeat as per paragraph 4 above.
6. If (a) "timeout" is true, or (b) the MLI host interface is at a point in the MLI protocol where state machine assistance is requested, or (c) DLP SYNCH is true and DMAOVR/ is "low" indicating that the DLP has changed status, or that the buffer is full, then reset DMARQ and DMAGNT flip-flop. This will cause the DMA operation to cease and will allow the state machine to drive the address and the I/O buses and to receive clocks and to resume its program execution. To restart DMA operation after a timeout condition has occurred, all that is required is to reload the MLI control register 60_{cr}. This will automatically reset the timeout logic and the DMA sequence will continue where it left off.



- 42 -

DMA Control PROM (FIG. 9A):

The heart of the control logic 60_s for the DMA read and DMA write operations is contained within the DMA Control (60_{sp}) PROM and for that reason, the programming of that PROM is

5 discussed here. There are five inputs to the PROM: they are

SDMARQ = Set DMA request: this term comes high when the following conditions are all met:

- (a) the state machine is in a FETCH cycle.
- (b) timeout is false.

10 (c) the DMA Enable bit in the MLI control register is set.

- (d) the MLI host interface is not requesting state machine attention.

DMAOVR/ = This term is false unless:

15 (a) the DMA Enable bit in the MLI control register is reset, or

- (b) the Expected DLP status does not match the actual received DLP status, or

- (c) the DMA count register overflowed indicating that the upper limit of the memory buffer has been reached.

XMITDTA = This term is true if the data direction is MLI to DLP and false otherwise.

DLPsynch = This term goes true on the first leading edge of the clock after a DLP strobe has been received from the DLP.

CYCLE = This term is set and reset by the PROM and is used to synchronize the DMA operations.

The PROM outputs are:

30 SDMARQ = Set DMA Request flip-flop - this output must be true to enter and remain in DMA mode.



- 43 -

AINCEN = Address Increment Enable - this bit when true and when the DMAGNT flip-flop is set, causes the DMA Count register and the DMA Address register to increment by one on the next leading edge of WTCLK.

5 SETCYCLE = When true causes the cycle flip-flop to set on the next leading edge of WTCLK.

SETSIO = Causes an SIO pulse to be generated on the next leading edge of STCLK. Also causes the

10 DLPSYNCH and DLP strobe received flip-flops to reset and loads the contents of the Memory Output Bus into the DMA Data latches.

The PROM programming is:

SDMARQ = (SDMARQS.DMAOVR/) + (SDMARQB.XMITDTA .
15 DLPSYNCH/)

AINCEN = (SDMARQB.XMITDTA/ . CYCLE/) + (SDMARQB.DMAOVR/ . XMITDTA . DLPSYNCH. CYCLE/)

SETCYCLE = (XMITDTA/.DLPSYNCH . CYCLE/)
+ (SDMARQB.DMAOVR/. . XMITDTA . DLPSYNCH .
20 CYCLE/)

SETSID = (XMITDTA.CYCLE) + (SDMARQB.XMITDTA/ . CYCLE)

BACKPLANE INTERFACE

Distribution Card Addressing: There are eight backplane lines used by the Distribution Cards to address any one of eight data link processors (DLPs) or Line Support Processors 300 which are DLP's used for data communications control.

Likewise, there are eight backplane lines which are used by the DLP's to indicate a service request to the Distribution Card. These lines are also unique so that only one data link processor can use any given request line. In addition, the lines in both sets are graded in priority. Thus, once the priority of the data link processor is determined within a given base module, that priority request is jumpered for use



- 44 -

by the data link processor on the interface board. The corresponding address line is also jumpered.

Maintenance Logic: The Maintenance Card 20_m (FIG. 1B) has an addressing capability to address 32 devices within an I/O

5 base module. The high order address line from the maintenance card must be false in order to address a data link processor. The other four address lines encode 1 of 16 lines for data link processor selection. Table A-4 shows the various "maintenance" addressing modes.

10

TABLE A-4

	<u>Base Local</u>	<u>Address Valid</u>	<u>Address Equal</u>	<u>Comment Comment</u>
	0	0	No	Normal on-line mode
	0	0	Yes	Normal on-line mode
15	0	1	No	Normal on-line mode
	0	1	Yes	Local mode
	1	0	No	Single pulse only
	1	0	Yes	Single pulse only
	1	1	No	Halt-stop clock
20	1	1	Yes	Local mode

Clock Logic: To minimize clock skew between various boards which comprise the data link processors, the clock is received on each board in a similar manner. Each board receives a clock with one input of a Schottky NAND gate and then drives 25 the clock to the various logic elements with terminated inverting or non-inverting buffers as required.

For maintenance diagnostic purposes, the clock to the data link processor must be inhibited when certain conditions are met. A clock-enable signal is generated on the 30 interface board 105_i, which is fed to all other boards in the data link processor which received the clock. This signal is gated with the backplane clock in the receiver-named gates on the various boards. The clock to the state machine must



- 45 -

also be inhibited when a DMA cycle is in progress. A special state machine clock enable signal is generated on the state machine clock.

5 Clear Logic: Two clear signals are generated by the clear logic (not shown). One signal causes the DLI interface to clear and to present a clear status to the host computer; the other signal causes all logic in the DLI to clear. The clear signals are PROM-generated, with the inputs and outputs of the PROM fully buffered with the backplane clock edge-triggered registers to prevent unwanted or spurious clear signals from being generated. The PROM is programmed as follows:

TABLE A-5

	<u>Address Bit</u>	<u>Signal</u>	<u>Comment</u>
15	0	MCLR/	"PUT" to clear register
	1	LOCAL/	Local Mode
	2	CONNECT/	DLP Connected to Host
	3	LCLCLR/	Local Clear
	4	SELCLR/	Selective Clear
	5	SELMCLR/	Selective Master Clear
	6	MSTCLR/	Master Clear
	7	PWRCLR/	Power-up Clear
20	8	CLPMLI	Clear DLP Interface Logic
	<u>Output Data</u>	<u>Bit</u>	<u>Signal</u>
25		0	CLRMLI/
		1	CL/
		2	CL
		3	Not Used
30	CI = PWRCLR		
			+ SELCLR.CONNECT
			+ LCLCLR.LOCAL



- 46 -

CLRMLI = CL
+ MSTCLR
+ SELMCLR.CONNECT
+ CLRMLI.MCLR/

5 MLI Logic-Data Paths:

The MLI interface logic consists of several major data-paths and functional units as depicted in FIG. 9A.

1. State Machine Address Bus (16)

10 The State Machine Address Bus is driven by the MLI logic while in DMA mode. The address is derived from a sixteen bit counter loaded from the I/O Bus via PUT instructions to the DMA address register 160. In DMA mode, the counter automatically increments by one each time a word is transferred on the MLI cable.

15 2. MLI Data Bus (105, FIG. 9A)

20 While the direction of information transfer is toward MLI (Read), data is gated from the MLI Data bus to the I/O bus when either DMA is active or a "GET" issued to the Read Data Register. When the MLI is driving the data lines, the data is driven either from the Data Register 60 or while in DMA mode, from the State Machine memory output bus (12).

25 3. The DMA transfer counter 160_{tc} is loaded from the I/O bus in complement form when "PUT" is executed. The register is "bumped" each time a word is transferred over the MLI in DMA mode and causes an exit from DMA when it overflows. The contents of the register in complement form are gated onto the I/O bus when a "GET" from the GET MLI Count Register is executed.

- 47 -

4. The interface between the control logic 60_s and the State Machine is via a set of GET and PUT registers which receive and drive the I/O bus 10 respectively.

5 DLI Interface Data Path Logic (FIG. 10A):

The internal data bus 10 of the DLI interface (FIG. 10A) may be driven from three sources: the backplane data lines, the I/O bus and the FIFO output. There are five sinks for the data: the backplane data lines, the I/O bus, the 10 FIFO input register, the MLI counter, and a parity three 100_t. The table below describes the source/sink combinations for the various operations performed.

TABLE A-6

<u>Operation</u>	<u>Source</u>	<u>Sink(s)</u>
15 S.M. PUT FIFO	I/O bus	FIFO
S.M. GET FIFO	FIFO	I/O bus, parity tree
Read (data to host)	FIFO	Backplane
Write (data from host)	Backplane	FIFO
Send 1st word A of		
20 Descriptor	Backplane	Parity tree
PUT MLI operation		
Code	I/O bus	MLI counter
Send 1st word of		
B I/O Descriptor	Backplane	MLI Counter, FIFO

25 Notes on DLI Data Path Logic:

When data is to be loaded into the FIFO, it is latched into a register 100_{i2} on the leading DLP clock edge and transferred to the FIFO 100_{i3} on the following half-clock.

All FIFO outputs are inverted. The FIFO is in the 30 path from the inverted backplane bus and the non-inverted I/O bus 10 and also in the return path. All data transfers between the two buses (either direction) must pass through the FIFO.



- 48 -

Although the parity tree is always connected to the internal bus, parity is only checked when (1) data is transferred from the FIFO to the I/O bus or (2) when the 1st word of an I/O descriptor is read and a decision must be made 5 to load or not to load the MLI Counter from the least significant byte of the word.

DLI Interface (FIG. 10A):

The DLI interface control logic consists of a sequential state machine in which the control sequences reside 10 in PROM 100_{im}. The 24 latched PROM outputs: (1) drive the MLI interface control signals, (2) control the internal timing and data paths, and (3) provide conditional branching within the PROM code and allow the sequence to follow the MLI protocol.

15 The PROM 100_{im} contains 1024 words of twenty four bits each and is addressed by ten address lines (A0 through A9). While operating, seven of the address lines (A3 through A9) are routed from the next address lines latched from the PROM outputs. Bits A1 and A2 are generated as "conditional 20 branches" with the conditions selected by the two "branch control" bits. The least significant bit (bit A0) always follows the latched system strobe (STIOL/).

When the State Machine loads a new sequence address by issuing a PUT instruction to the PUT ADDRESS and COUNT 25 register and the conditions are met which allow the UIOSM to change the PROM address, bits A3 through A9 are taken from the I/O bus, bits A1 and A2 are set to zero, and as always, address line A0 follows the latched system strobe.

PROM output Bits:

30 The function of each of the twenty four bits generated by the PROM 100_{im} are described in the table below:



- 49 -

TABLE A-6

<u>Bit</u>	<u>Name</u>	<u>Note</u>
	00 #STC1	DLP Status bit #1
	01 #STC2	DLP Status bit #2
5	02 #STC4	DLP Status bit #4
	03 #STC8	DLP Status bit #8
10		The DLP status bits are sent to the host when the DLP is connected. They may be read by the State Machine as bits 0, 1, 2, 3 respectively of the DLP interface status register. The functions and values of these bits are defined by the MLI protocol.
15	04 #LFIFO	This bit, when STIOL/ is low and DLPSTR/ is low, causes data to be loaded into the FIFO.
	05 #AFIFO	This bit, when STIOL/ is low, causes the output of the FIFO to advance.
20	06 #SERREQ	This bit disables the functions described for bit 08, 09, 10; and causes an Interrupt in the State Machine.
25	07 #IOSND	Controls the base backplane IOSND/ signal when the DLP is connected and also controls the data paths to receive or transmit.
	08 #PS0	These bits are used to encode one of seven internal control signals when the Service Request line (bit 06) is false or to encode special status = for the state machine when Service Request is true. The internal control signals are:
	09 #PS1	
30	10 #PS2	



- 50 -

Internal Control Signals

<u>Bit</u>	<u>Name</u>	<u>Comment</u>
0	#SBST	Starts a burst mode operation on the following block
5	#REQ	Generates a DLP request signal which is sent to a distribution card via the backplane
10	#ZERO	Disables the drivers onto the backplane data lines generating a "zero" data word. This may be used in some MLI sequences.
15	#EREQ	Generates an emergency request signal on the backplane.
20	#FORCEAF	This bit causes the FIFO to advance regardless of the state of STIOL/.
25	#COUNT	This bit when active causes the counter to increment by 1. This is the means by which the PROM code keeps track of the numbers of MLI data transfers performed.
30	Load Cntr	This bit causes the counter to be loaded with the least significant eight bits of the internal data bus. This operation is performed when the first word of an I/O descriptor is received which contains the length of the descriptor encoded as a binary number of words in the least significant byte.



- 51 -

	<u>Bit</u>	<u>Name</u>	<u>Comment</u>
	7	None	The value of bits 08, 09, and 10 must be "all ones" when none of the above operations are to be performed.
5	<u>Bit</u>	<u>Name</u>	<u>Note</u>
10	11	#one	This bit causes data bit 00 and the parity bit to be inverted as they are being sent to the backplane data lines. This is required for those MLI protocol sequences which call for "Extended Status" to be transmitted over the MLI.
15	12	#DLPSTR	When the DLP is connected, the LCPSTB/ backplane line follows the logical OR of BURST flip-flop and DLP strobe.
	13	#BCNTRLO	PROM branch control.
	14	#BCNTRL1	PROM branch control.

The value of these bits determine how PROM address bits A1 and A2 are generated.

	<u>Bit 13</u>	<u>Bit 14</u>	<u>A1</u>	<u>A2</u>
25	0	0	System Terminate (Inverted)	Counter Overflow
	0	1	Next Address Bit #1 (PROM bit 15)	Next Address bit #2 (PROM bit 16)
	1	0	System Terminate (Inverted)	Next Address bit #2 (PROM bit 16)
	1	1	DLP Connected (Inverted)	Bit XX



- 52 -

	<u>Bit</u>	<u>Name</u>	<u>Note</u>
5	15	#NAL	Next address bit A1 if bits 13 and 14 are 0, 1 respectively. 16 #NA2 = next address bit A2 if bits 13 and 14 are 0, 1 or 1, 0 respectively.
10			17-23 = #NA3 through #NA9. These bits provide the next PROM addresses except when a new address is loaded by the state machine or set by an DLP clear operation from the backplane.



- 53 -

MESSAGE LEVEL INTERFACE LOGIC 100_m: Data transfers between the Network Support Processor (NSP) 80 and any individual Line Support Processor (LSP) 300 are performed by means of a standard MLI logic circuit 100_m on the Interface Card 105_i. This will be seen in FIGS. 7, 8 and 9. The data transfers performed may be in either a DMA mode, a non-DMA mode.

In the DMA mode, a DMA address counter is initialized by the MLI state machine 50_a as a "pointer" to the first word in memory to be transferred. At the same time a transfer counter is initialized by the State Machine Processor 50_a together with the complement of the number of words to be transferred. DMA logic then handles the data transfer without further intervention by the State Machine Processor 50_a. As each word is transferred, the DMA address counter is incremented and the DMA "transfer counter" is decremented. The DMA operation is then normally completed when the DMA "transfer counter" overflows, that is to say, when the value is "0". The DMA logic also terminates DMA mode when an abnormal condition, such as a DMA time-out or an unexpected LASP status signal, is detected.

All direct memory access operations (DMA) are initialized by the MLI State Machine Processor 50_a and are controlled by a DMA control PROM. During DMA operations, the clock to the State Machine Processor is inhibited and the state machine PUT register, the GET register, and the I/O bus are disabled.

NON-DMA MODE: In the non-DMA mode, data is transferred word-by-word, to the Line Support Processor (LSP) 300 (specifically to the selected LSP 300_a, 300_b, 300_c or 300_d). In this non-DMA mode, the data transfers are performed under the direct control of the MLI State



- 54 -

Machine Processor 50_a. Data is transferred from the I/O bus 10 to a holding register (FIG. 9) and then via the MLI circuit 100_m of Interface Card 105_i to the LSP 300.

5 The message level interface logic circuit 100_m is shown in a block diagram of FIG. 9. The DMA register 120 receives data along the foreplane memory bus after which it is conveyed to transmitter TX and thence to receiver RX over to the State Machine
10 Processor Card 50_a. The Line Support Processor 300 connects via the DLI to a connection module 106_b and to the electrical interface EI (line adapter) through the MLI logic lines to the receiver RX. The State
15 Machine Processor 50_a connects via I/O bus 10 to the DMA address register 160 and the holding data-register 60. The output of address register 160 is conveyed via memory address bus 16 over to the memory control card 66 and to the State Machine 50_a.
20 DATA LINK INTERFACE LOGIC CIRCUIT (DLI): FIG. 10 is a block diagram of the data link interface logic circuitry originally shown in FIG. 8 as circuit 100_i. This data link interface logic circuit is the DLI circuit associated with the MLI State Machine Processor 50_a of FIG. 8. In FIG. 10 there is seen a first-in-first-out (FIFO) stack register 100_{i3}. This is a 64-word register, each word of which is 16-bits. This register holds data to be transferred to the host computer 100 or else it also holds data which is received from the host computer. The tri-state
25 driver-receiver circuit 100_{i1} sends and receives data to or from computer 100 via the backplane. It also receives data on the internal data bus. Another source of data is memory control card 66_a which has foreplane connections to the tri-state driver-receiver
30 100_{i5}. The tri-state driver-receiver 100_{i5} connects
35



- 55 -

via an internal data bus to a holding register 100_{i2} which provides an input to the stack register 100_{i3}. The output of the stack register 100_{i3} is fed to an inverter 100_{i4} which provides an output to both 5 tri-state driver-receivers 100_{i5} and 100_{i1}.

PROM SEQUENCER: The PROM sequencer 100_{ps} is shown in block relationship to the Interface Card 105_i of FIG. 8. This PROM sequencer is designed to relieve the State Machine Processor 50_a from the overhead 10 operations required to perform standard DLI operations which are directed to the host computer system. The logic circuitry in the PROM sequencer is designed to provide and adhere to the standard MLI protocol for host system data transfers. The PROM sequencer 15 receives a starting PROM address from a Start Address register which is initialized by the State Machine Processor. The PROM sequencer then steps through a series of control states to provide control signals which perform the required data transfer operation.

20 Sequencing continues until the PROM sequencer has completed the assigned tasks or until an unexpected condition is detected. The State Machine Processor is notified of the unexpected condition by means of an interrupt signal and a status register signal.

25 The status register defines the cause of the interrupt.

MEMORY CONTROL CARD (MEMCTL)

As previously discussed with respect to FIG. 2, the Network Support Processor 80 holds the memory control cards 66_a and 66_b; and each of these 30 control cards is associated with a particular one of the two State Machine (50_a, 50_b) Processor Cards within the Network Support Processor. A block diagram of the basic elements of the memory control card 66 is shown in FIG. 11.

- 56 -

As seen in FIG. 11, the memory control card 66 provides a Local Memory of 8K words. This Local Memory is for exclusive use by its associated State Machine Processor, that is, to say, memory control card 66_a is for exclusive use of the MLI processor 50_a, while the memory control card 66_b is exclusively for use of the NDL processor 50_b. The memory control card also includes logic circuitry that allows the particular state machine processor to address up to 132K words of Shared Memory 90. The actual Shared Memory that is allowed in the Network Support Processor 80 is limited to 115K words by the constraints of the NSP software. Communications with other cards in the Network Support Processor is conducted via the foreplane connectors shown in FIG. 1B.

The use of maintenance card signals (PRIF, DSIM, MAINT. SEL) shown in FIG. 11, have been discussed in the cited reference patents which have been included herein by reference.

As seen in FIG. 11, the memory control cards in each case are the same except that the MLI memory control card 66_a has an added module select logic circuit shown surrounded by the broken line.

The module select logic shown within the dotted line of the memory control card (66_a) only is necessary because one of the state machine cards is the master processor (50_a) while the other state machine, the NDL processor 50_b, is the slave processor. Thus, the module select logic differentiates the master processor card from the slave processor card and selects when each card will be able to use the Shared Memory 90.



- 57 -

The memory address bus 16 from the State Machine Processor is fed to arithmetic logic unit 66_u to the Local Memory 66_m and also to an address select register 66_s which has an output conveyed to the Base Address Register 66_r whose data output is fed to the ALU 66_u. The ALU 66_u provides a memory address which is sent to Shared Memory 90 for access. Simulated test signals from the maintenance card 20_m (FIG. 1B) may also be gated into the ALU 66_u and the Local Memory 66_m.

The I/O bus 10 can convey data into the Base Address Register 66_r, to the Local Memory 66_m and to the data bus 10_{db}.

LOCAL MEMORY: The Local Memory 66_m (FIG. 11) of the memory control card 66 provides 8,192 17-bit words of RAM for the particular state machine processor associated with that card. This RAM memory receives address information from the memory address bus 16 and also input data from the I/O bus 10. The data output from the local memory 66_m is through the common memory data-out bus, MEMOUT 12.

SHARED MEMORY CONTROL: The Shared Memory "control" section of the memory control card 66 has circuits which permit the expansion of the addressing capability of the state machine processor to 131K words. Logic circuits consist of a MAP generator PROM (not shown) and 16 base address registers (BAR) 66_r and a 17-bit arithmetic logic unit (ALU) 66_u.

The MAP generator is a 32-by-8 PROM that decodes the most significant 4-bits of the memory address on bus 16. This decoding determines whether or not the Shared Memory 90 is to be addressed.

5 The Base Address Register (BAR) 66_r is evenly divided into two groups of 8 BARs. Thus there are 16 of these base address registers. One group of these (BAR0-BAR7) is used when the Shared Memory 90 is being addressed by the state machine program counter 41. The other group of Base Address Registers (BAR8-BAR15) is used when the Shared Memory is being addressed by the memory reference register (MRR) 40 of the state machine processor.

10 15 Any one of the Base Address Registers 66_r are loaded through the I/O foreplane bus 10 by the software and they point to a base address that encompasses a 4K area in Shared Memory 90. A Base Address Register output to the ALU 66_u is selected by decoding the state machine memory address bus control line 16. This decoding selects one group of 8 Base Address Registers. By decoding the three high-order memory addresses (14:03), one of the 8 Base Address Registers in that particular group is selected.

20 25 ARITHMETIC LOGIC UNIT (ALU): The ALU 66_u of the memory control card 66 is a 17-bit adder. The A-inputs are derived from a Base Address Register and the B-inputs are derived from the memory bus 16. The data output are applied to the Shared Memory address bus (XMADR). The 16-bit Base Address Registers will furnish 14-bits (15:14) to bit positions 16:14 of the arithmetic logic unit A-input. Bit positions 0 and 1 are grounded. The 16-bit memory address bus (MADDR) 16 furnishes 12-bits (11:12) to bit positions 11:12 of the arithmetic logic unit B-input. The bit positions 16:05 are grounded. The ALU output, which is the sum of the most significant 14-bits of a selected Base Address



- 59 -

Register and the least significant 12-bits of the memory address bus 16, is a 17-bit Shared Memory address XMADR that selects one of 115K words.

MEMORY CONTROL WAIT LOGIC: Under certain conditions, 5 the memory control cards 66 will generate a WAIT signal that stop the associated state machine clock connected with that memory control card. This clock is stopped as long as the WAIT signal is "active". One of the WAIT conditions occurs when the memory 10 control card 66 is writing into, or reading from, the Shared Memory 90. The memory control card will insert the appropriate WAIT signal to provide the appropriate delay since the Shared Memory may be too slow to keep up with the faster action of the State Machine 15 Processor and the memory control card.

Another condition occurs when both of the memory control cards 66_a and 66_b , attempt a simultaneous access to the same Shared Memory card 90. A priority generator (PRIGEN) PROM, or the MLI memory control card 20 66_a will resolve the contention and cause the appropriate WAIT states to be generated.

A third condition occurs when the State Machine Processor detects a memory parity error. A WAIT signal resulting from a memory parity error is 25 "ungated", that is, to say, it is not passed through. The WAIT signal causes the state machine clock to remain stopped until the state machine is clear.

RAM CARDS

As seen in FIG. 12 a schematic diagram is 30 shown of the RAM cards designated as 90 on FIG. 1B.



- 60 -

5 Each of the cards has a 32KB capacity for use as contribution to the Shared Memory 90. The entire memory capacity of RAM 90 is shared by the 2 State Machines 50_a (MLI) and 50_b (NDL). As seen in FIG. 1B, this capacity may be provided by anywhere from 4 to 7 RAM cards.

10 One particular unit of the Shared Memory RAM cards is unique in that it has termination resistors for the Shared Memory address lines and for the memory-out (MEMOUT) bus. This particular card is called a RAM termination card and designated 32KB RAM TER. The termination RAM card must be located at the end of the memory buses in the Network Support Processor.

15 The RAM card contains 68 4096-by-1 RAM chips. Each card has one data and one addressing port (FIG. 12) connected to the MLI memory control card 66_a a second data and addressing port on the RAM card is connected to the NDL memory control card 66_b. This allows the Shared Memory to be accessed by either 20 State Machine Processor. Communication with the memory control cards is done through a foreplane connector.

25 As seen in FIG. 12 the addresses from the memory control cards of the MLI state machine and the NDL state machine, respectively enter the B port 90_{ab} and the A port 90_{aa} and are thence connected to the address input of a RAM card such as 90₁. The data from the first and second State Machine (master 50_a and slave 50_b) on the incoming data phase, are conveyed to ports B_{d1} and A_{d1} from which they are 30 at the data input of card 90₁. The data output of the RAM card 90₁ is fed into port B_{d2} and A_{d2} from whence they are respectively conveyed on the data lines to the MLI state machine memory control and NDL state machine memory control.



- 61 -

FUNCTIONAL ASPECTS OF THE NETWORK SUPPORT PROCESSOR

Integration of the various functions of the Network Support Processor is accomplished through the use of buses and consists of three basic links as 5 will be seen in FIG. 13. These links consists of the MLI link, the NDL link, and the INTER link. These links make it possible for the combination of cards, which constitute the Network Support Processor, to work in an integrated fashion as a total unit.

10 The Network Support Processor (NSP) 80 is essentially a multi-processor computer. One processor (designated as the MLI controller) consists of a MLI state machine card 50_a, a MLI memory control card 66_a, and an Interface Card 105_i, as indicated in FIG. 2.

15 The second processor (designated as the NDL controller 50_b) consists of the NDL state machine card 50_b and the NDL memory control card 66_b. Both of these processors-controllers are structured in the same manner and both can access Shared Memory 90.

20 The three primary buses that carry information and addresses among the various cards (FIG. 13) are the I/O bus 10, the Memory Address (MADDR) bus 16 and the memory data-out bus (MEMOUT) 12. Further, additional control information is passed among 25 the cards of each controller by means of the foreplane connectors (shown in FIG. 1B).

30 As seen in FIG. 13, the MLI link connects the three cards (105_i, 66_a, 50_a) of the MLI controller. It also provides connection between the MLI controller and the Shared Memory 90. The NDL link connects cards 66_b and 50_b. The INTER link connects Shared Memory 90 to 66_a and 66_b.



- 62 -

INPUT/OUTPUT (I/O) BUS: The I/O bus 10_a is a common data bus that connects the three cards of the MLI controller. The information on this bus involves the following:

- 5 (a) control information from the MLI state machine 50_a to the Interface Card, 105_i.
- (b) control information from the state machine 50_a to MLI memory control card, 66_a.
- 10 (c) status information from the Interface Card to the state machine.
- (d) data received from the host computer 100 on the DLI which is stored in the interface FIFO register (FIG. 10) and then sent to either the state machine or to Memory 90.
- 15 (e) data from either the state machine or memory is sent to the Interface Card 105_i for storing in FIFO register for subsequent transmission to the host computer over the DLI.
- 20 (f) data received from the LSP 300 on the MLI and sent to either the state machine, or to Memory 90 in a non-DMA mode, or to Memory 90 in a DMA mode.
- (g) data from either the State Machine 50_a or from Memory 90 which is sent to the Interface Card 105_i in the non-DMA mode for transmission to the Line Support Processor 300 on the MLI.
- 25 (h) data from the State Machine 50_a to be written in Local 66_m or into Shared Memory 90.



- 63 -

MEMORY ADDRESS (MADDR) BUS: The Memory Address Bus 16_a is a common address bus that connects the three controller cards for the MLI controller which consists of cards 50_a, 66_a and 105_i. The following information is conveyed on the Memory Address Bus 16_a:

5 (a) The program counter 41 outputs (or the memory reference register 40 outputs) of the State Machine when addressing: PROM circuitry on the State Machine 50_a, or Local Memory 66_m on the memory control card 66_a.

10 (b) The DMA address register (FIG. 9) on the Interface Card 105_i which is used for addressing Local Memory 66_m on the memory control card (MEMCTL) 66.

15 (c) The program counter 41 output, the State Machine MRR 40 output, or the DMA address register 160 on the MLI interface (FIG.9) for addressing the Base Address Register (BAR 66_r) and for addressing the module select logic (FIG. 11) on the memory control card 66_a in order to address Shared Memory 90. The module select logic on FIG. 11 is used to determine whether card 50_a or 50_b will get access to Memory 90 in any given period.

20 The Memory Address Bus 16_b is used as a common address bus that connects the NDL controller (state machine cards 50_b and memory control 66_b).

25 30 Here the following information data is transferred on the bus:



- 64 -

5 (a) The program counter 41 output (or the MRR 40 output) of the NDL state machine 50_b -outputs which are used for addressing the NDL PROM 50 or for addressing Local Memory 66_m on the memory control card 66_b .

10 (b) The program counter 41 output (or the MRR 40 output) of the NDL state machine which transfers information to the Base Address Register, BAR 66_r (FIG. 11) and the logic on the memory control card 66_b in order to address Shared Memory 90.

15 MEMORY OUTPUT BUS (MEMOUT): The Memory Output Bus 12_a is a common data bus that connects the three cards (50_a , 66_a , 105_i) of the MLI controller. Information on this bus consists of the following:

20 (a) The output of the Local Memory 66_m on the memory control card 66_a to either the state machine 50_a (for program information or data) or to the DMA register 120 (FIG. 9) on the Interface Card 105_i for transmission of data to the Line Support Processors (LSPs) over the message level interface.

25 (b) The output of Shared Memory 90 over to the state machine 50_a or to the Interface Card 105_i and LSP 300.

30 (c) The output of Local Memory 66_m on the memory control card 66_a which transfers either program information or data to the MLI state machine, 50_a .

(d) The output of the Shared Memory 90 which transfers information to the NDL state machine, 50_b .

- 65 -

Likewise, MEMOUT bus 12_b provides similar functions for the NDL state machine 50_b (FIG. 13).

5 SHARED MEMORY INTERFACE: The MLI memory control card 66_a sums the memory address (MADDR) together with the output of a Base Address Register (BAR) in order to generate a Shared Memory address for use to select a Shared Memory word in Memory 90. This MEMCTL card 66_a also handles a bi-directional shared memory data bus 10_a that transfers write-data over to Shared Memory 90 10 and returns read-data from the Shared Memory 90.

Write-data is provided by the I/O bus 10_a of the MLI link. Read-data is transferred through an isolator on to the memory out bus 12_a of the MLI link, FIG. 13.

15 The NDL memory control card 66_b sums the memory address together with the output of a Base Address Register (BAR) which is loaded to generate a shared-memory address that selects a memory word from Memory 90. The memory control card 66_b also handles a bi-directional shared memory data bus that transfers 20 Write data over to Shared Memory 90 and returns Read data from Shared Memory 90. Write-data is provided by the I/O bus 10_b of the NDL Link. Read-data is transferred through an isolator on to the memory out bus 12_b of the NDL Link.

25 NDL LINK: The NDL Link shown in FIG. 13 connects the two cards of the NDL controller which consist of 50_b and 66_b. This Link also provides a connection between the NDL controller and the Shared Memory 90.



- 66 -

NSP INTERLINK: The only "data" communication between the MLI controller (cards 50_a, 66_a and 105_i) and the NDL controller (cards 50_b and 66_b) is through the Shared Memory 90.

5 The MLI controller communicates with Shared Memory 90 through a shared memory interface within the MLI Link. The MLI Link, illustrated in FIG. 13, connected the three cards of the MLI controller and also connected the controller with the Shared Memory 90.

10 Similarly, the NDL controller communicates with Shared Memory 90. Each RAM card (FIG. 12), in Shared Memory 90, has a separate port and its own port selection logic circuits for each of two (MLI and NDL) shared memory interfaces.

15 The port selection logic, FIG. 12, is controlled by signals generated on the MLI memory control card 66_a. Control flags (FIG. 13) are passed between the two memory control cards 66_a and 66_b in order to control access to Memory 90. These flags cause the 20 MLI Link port to be selected when the MLI controller requires access to Shared Memory 90. Otherwise, the NDL link port is activated.

25 The same RAM card 90 cannot be accessed simultaneously by both the MLI controller and the NDL controller. Simultaneous access is prevented by the logic circuits on the MLI memory control card 66_a. However, two different RAM cards in the Shared Memory 90 can be simultaneously accessed by the MLI and NDL controllers as long as it is not the same RAM card 30 which is trying to be accessed at the same time.



- 67 -

STATE MACHINE EXTERNAL INTERRUPTS

A State Machine Processor, as discussed in FIGS. 3, 4, 5 and 6, operates in either a "foreground" or "background" mode. Foreground mode is used for 5 normal operations and can be interrupted by a signal from the Interface Card 105_i. Background mode is used when the State Machine services "external" 10 interrupts. While in background mode, the State Machine cannot be interrupted again until it is first returned to the foreground mode by the program.

The logic circuitry that handles the two modes consists of 16 accumulators of which eight accumulators are assigned to each mode; a flag 15 register assigned to each mode; and one MRR-save register 47 that retains the contents of the MRR 40 when the State Machine switches from foreground to background mode. As seen in FIG. 14 the foreground accumulators are indicated as 30_f while the background accumulators are 30_b. The foreground flag register is 20 designated 35 while the background flag register is 36 and the MRR-save register is designated as 47.

When a State Machine, which is operating 25 in the "foreground" mode, detects an interrupt, the status of the State Machine is saved. First, the contents of the program counter PC 41 are saved in the stack memory 45; second, the program counter 41 is loaded with an address furnished by the source of the interrupt (Interface Card 105_i); third, the foreground accumulators 30_f are disabled and the background 30 accumulators 30_b are enabled; fourth, the foreground flag register 35 is disabled, and the background flag register 36 is enabled; and fifth, the MRR 40 data is stored in the MRR-save register 47 (FIG. 14).



- 68 -

Thus, the pre-interrupt-status of the State Machine is stored, without alteration, for future use. The State Machine is then able to perform an interrupt service routine. The State Machine status is restored 5 by reversing the status-save procedure after the interrupt service is completed. The firmware routine that was in process when the external interrupt was detected, resumes execution at the point where the interrupt occurred.

10 In a Network Support Processor (NSP), only the MLI state machine 50_a can be interrupted. The interrupt is generated on the Interface Card 105_i. An interrupt occurs when the PROM sequencer 100_{ps} reaches a point where it requires State Machine 15 assistance in order to determine the next step. This point includes the complete transmission of a message to the host computer 100 and the complete receipt of a message from the host computer.

20 The Interface Card 105_i forces the MLI state machine to the address 0002. This address holds a branch to the interrupt servicing routine. Among the first instructions in this routine are instructions to fetch the contents of the Interface Card status 25 register 200. This information is used to determine the appropriate response to the interrupt signal.

30 The two flag registers 35, 36 are 7-bit registers on the State Machine that determine whether to perform conditional branch operations and execute a conditional call or a conditional return; or whether to call a subroutine or to return from a subroutine.



- 69 -

There are two sets of bits in the flag registers. One set of three bits are "external" flags. This set is used to accept data that is external to the card. The second set consists of four bits. 5 This set holds the state of the ALU output after the last arithmetic operation. These bits record whether or not the entire ALU output is zero (the state of the most significant and least significant ALU output bits) and the state of the ALU "carry" output.

10 The State Machine has a background-foreground control flip-flop (FIG. 14) that selects the operational mode. This flip-flop is automatically set to the foreground mode when the NSP is initiated. It is set to the background mode by an external interrupt. As 15 long as the flip-flop remains in the background mode, no further interrupts are acknowledged. This flip-flop is reset to foreground mode at the conclusion of the interrupt servicing routine. New interrupts are then accepted.

20 The State Machine acknowledges two program-interrupt instructions:

- (1) An instruction for interrupt disable
- (2) An instruction for interrupt detect enable

25 The instructions do not depend on the existence of external interrupt. Interrupt instructions protect certain areas of the program from external interruption. In FIG. 14 there is shown the NSP interrupt logic where the PROM sequencer 100_{ps} is initiated by a start address from a PUT instruction.



- 70 -

MEMORY ADDRESSING: As seen in FIG. 15, a block diagram of the Network Support Processor illustrates the major elements of the NSP 80 indicating the MLI controller (50_a, 66_a) and also the NDL controller (50_b, 66_b) each of which connect to a commonly Shared Memory 90.

5 There are three distinct types of memory in the Network Support Processor as follows:

(a) Each State Machine card has a PROM that holds part of the State Machine program. In FIG. 10 15 the MLI State Machine 50_a is seen having its 8K PROM 50_m for storage of its program; likewise, the NDL State Machine 50_b is seen to have its PROM 50_n for storage of its program with 2K words.

15 (b) Each memory control (MEMCTL) card contains part of the State Machine program and also a Local Memory for each of the State Machines. For example, in FIG. 15, the MLI memory control 66_a is seen to have a 16K word RAM 66_m 20 for its Local Memory; likewise, the NDL memory control 66_b has its own Local Memory 66_m which includes a 16K RAM; further, each memory control card in FIG. 15 also includes a PROM which contains part of the State Machine 25 program and which is part of the Local Memory 66_m.

25 (c) The Memory 90 of FIG. 15 (also seen in FIG. 1B) is a series of RAM cards, each of which 30 has a 32 kilobyte capacity. These RAM cards can hold part of the program for both of the



- 71 -

State Machines and they provide a Shared Memory 90 which can be accessed by either of the State Machines by means of their associated memory control cards.

5 The State Machines can have as many as 16K program words in PROM memory. In the preferred embodiment the MLI State Machine 50_a has 8K program words and the NDL State Machine 50_b has 2K words of program. Each memory control card has 8K words of
10 Local Memory available to its associated State Machine. The number of words in Shared Memory 90 will vary with the number of RAM cards installed in the Network Support Processor seen in FIG. 1B. The Shared Memory is addressed by either of the state machines.

15 As an example of the preferred embodiment seen in FIG. 1B, if there are 4 RAM cards, then the shared memory provides 65,536 words and 131,072 bytes; if there are 5 RAM cards then the shared memory includes 81,920 words and 163,840 bytes; with 6 RAM cards the shared memory is 98,304 words and 196,608 bytes; with 7 RAM cards the shared memory is 114,688 words and 229,376 bytes.

20 PROM AND LOCAL MEMORY: The PROM memory and Local RAM are divided into blocks of 4K words for addressing purposes. The PROM is divided into 4 addressable blocks: PROM 0, PROM 1, PROM 2, PROM 3. Not all of the PROM address blocks are used. Local RAM is divided into two addressable blocks: the RAM 0-4K and RAM 4-8K.

25 The PROM or the Local RAM is directly addressed by the 16-bits from the memory address MADDR bus 16. The foremost significant bits on the memory address bus (15:4) are used to select a 4K word block. Then a word within that block is selected by the 12
30 least significant bits (11:12).



- 72 -

5 SHARED MEMORY ADDRESSING: The 16-bits (on the memory address bus) address a maximum of 64K words. Since the Network Support Processor has up to 162K words of memory, then a method of expanding the basic address range is required.

10 In FIG. 11 the memory control card is shown to have a logic circuit (66_s, 66_r, 66_u) for the conversion of the 16-bit memory address into a 17-bit "shared memory" address. This logic circuit consists 15 of 16 Base Address Registers (BAR 66_r) and also a 17-bit ALU 66_u. A BAR is pre-loaded by software with a base address that is applied to the A-input of the ALU 66_u. The least significant 12-bits of the memory address bus 16 are applied to the B-input. The two values are 20 summed together in the ALU in order to provide 17-bit address to Shared Memory 90. Fourteen of Base Address Registers (BAR) are used and can be pre-loaded by software during a base address. The BAR can address all areas of shared memory. This is done, however, with two addressing restrictions:

25 (a) The base address which is loaded into the BAR must be modulus four since the two least significant BAR inputs to the ALU are forced to be LOW.

25 (b) The base address must point to a 4K memory block within the constraints of the installed Shared Memory 90.

30 Since the ALU 66_u is 17-bits wide and the BAR is 16-bits wide, the BAR input to the ALU must be offset by 1-bit. In other words BAR bit 15 is applied



- 73 -

to the ALU bit 16. As a result of this offset, the Shared Memory base address is two times the absolute value held in the BAR. The extra bit (bit-0) to the ALU is grounded. Bit-1 from the BAR to the ALU is 5 also grounded in order to prevent timing problems on the shared memory boards.

The Base Address Register (BAR) of the memory control (FIG. 11) is loaded by the means of the I/O bus 10 from the State Machine by a PUT STROBE 1 10 instruction. As an example of this, the following PUT instruction is illustrative:

PUT XVVV XX00 nnn nnn nnn nn00

Where: the X-bits are "do not care" bits;
15 the V-bits are used to select one of the 16 BAR's;
the n-bits are the data bits which are loaded in the BAR.

A particular Base Address Register BAR (66_r) is selected for addressing by a combination of bits (15:04) of the memory address bus 16 and the MRR output 20 enable signal. When the memory address is derived from the program counter, PC 41, the MRR output enable signal (MRROE) is "false" and the bit selection is that of BAR 0 through BAR 7.

When the memory address is derived from the 25 MRR 40 (FIG. 4), the MRR output enable signal is "true" and the bit selection is then BAR 8 through BAR 15. The following Table I indicates the Base Address Register selection as a function of the program counter 41 and memory address bits 15:04.



- 74 -

TABLE I

Program Counter Addressing

MADOR (15:4)											
											BAR Selected
5	0	1	1	1	1	1	1	1	1	1	07
	1	0	0	0	0	0	0	0	0	0	00
	1	0	0	0	1	1	1	1	1	1	01
	1	0	0	1	0	0	0	0	0	0	02
	1	0	0	1	1	1	1	1	1	1	03
10	1	1	0	0	0	0	0	0	0	0	04
	1	1	0	0	1	1	1	1	1	1	05
	1	1	1	1	1	1	1	1	1	1	07

Note: BAR six is not used.

15 The following Table II indicates the Base Address Register selection as a function of MRR 40.

TABLE II

Memory Reference Addressing

MADR 1											
											BAR Selected
20	0	1	1	1	1	1	1	1	1	1	15
	1	0	0	0	0	0	0	0	0	0	08
	1	0	0	0	1	1	1	1	1	1	09
	1	0	0	1	0	0	0	0	0	0	10
	1	0	0	1	1	1	1	1	1	1	11
25	1	1	0	0	0	0	0	0	0	0	12
	1	1	0	0	1	1	1	1	1	1	13
	1	1	1	1	1	1	1	1	1	1	15

Note: BAR fourteen is not used.



- 75 -

The 17 address bits apply to the Shared Memory 90 are divided into three groups. One group (16:03) is used to select one of eight possible RAM cards. A second group (13:12) is used to select one of the 4K word blocks within the selected page. The third group (01:02) is used to select one of the four pages on the selected card.

5 PROGRAM ADDRESSING: A program PROM 50, situated on each State Machine, holds the first 16K of memory addresses. However, only that portion of the PROM that includes program information is addressed directly by either the program counter, PC 41, or the memory reference register, MRR 40. As previously noted, the MLI State Machine has 8K words of PROM 10 while the NDL State Machine has 2K words of PROM in the preferred embodiment of the Network Support Processor.

15

FUNCTIONAL DESCRIPTION

20 It is the "firmware" that provides data communication capability to the Network Support Processor (NSP). The "firmware" refers to the instructions that are stored in the program PROM 50; firmware may be considered analogous to "software in a hardware form". Stored instructions allow the 25 hardware to perform as a front-end communications processor.

25 Within the host computer 100, the NSP communications are handled by a MCP (master control program) routine which is known as DCC or Data Communications Control. A separate host computer DCC routine exists for each and every NSP in the data communications subsystem, which is designated as IODC or Input Output Data Communications Subsystem. The




- 76 -

5 DCC initiates messages to the Network Support Processor (NSP) and receives messages back from the NSP. A "message" is a block of information followed by a longitudinal parity word (LPW) that checks the validity of the message contents.

10 Communications are conducted by means of messages that are called "requests" and "results". The messages (shown in Table III) are appended as the data component of the I/O Descriptor Word. A request message is sent from the host computer 100 to the NSP when a 15 SEND message I/O Descriptor is initiated. A result message is sent from the NSP to the host computer when a GET message I/O Descriptor is initiated. In both message cases, a Result Descriptor that describes the result of a particular I/O operation, is sent from the NSP over to the host computer. The Result Descriptor is not the same as the "Result Message" as is seen in Table III.

TABLE III

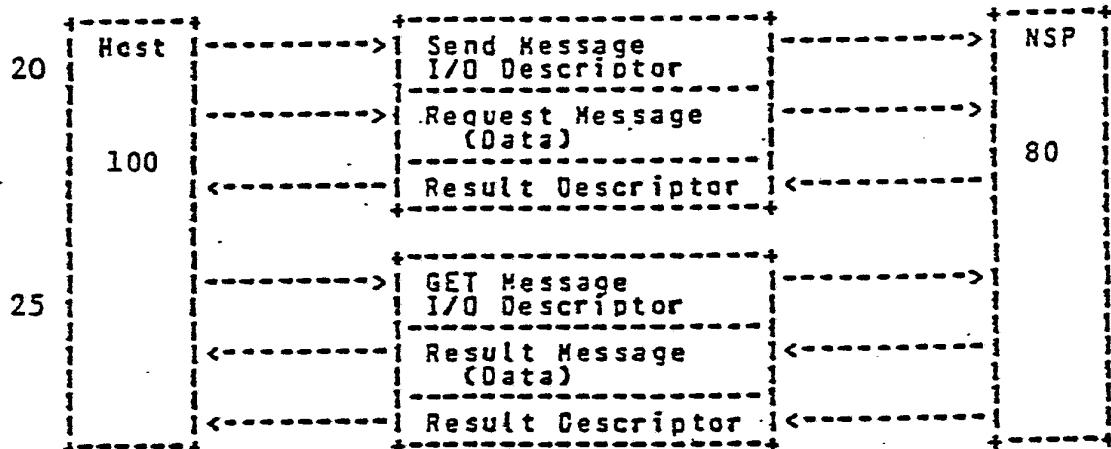


Request and Result Message

-77 -

The host computer and the Network Support Processor (NSP) use eight different message types as shown in Table IV.

TABLE IV

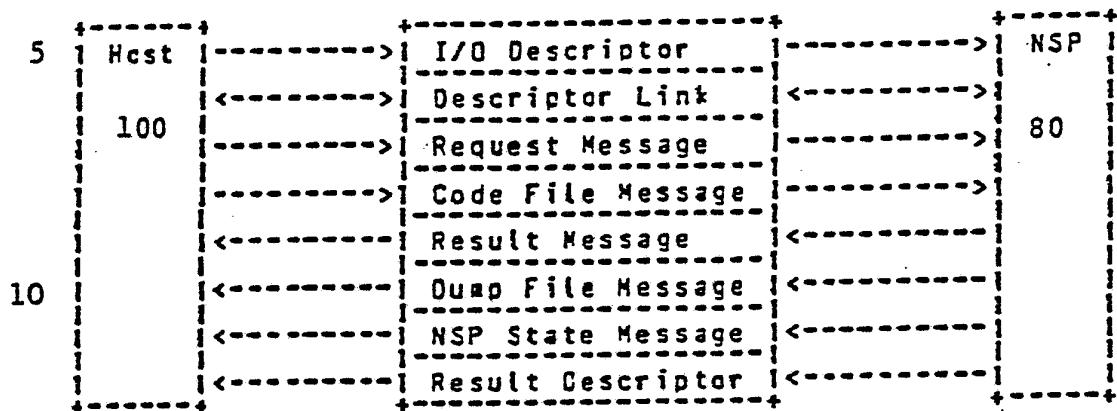

Message Types

An I/O Descriptor is a command from the host computer 100 that requires the NSP 80 to perform a certain operation. This command is followed by a Descriptor Link (D/L) that is used as a "job identifier". The job identifier is returned to the host computer at the start of every period during which information was transferred as a result of the I/O Descriptor and that the Descriptor Link initially accompanied. A Result Descriptor is a message that describes the results of the I/O Descriptor execution cycle. Result Descriptors, Descriptor Links and I/O Descriptors were discussed and explained in the priorly cited patents incorporated by reference.

- 78 -

The remaining 5 message types are the data transfers that are performed in response to the various type of I/O Descriptors.

There are three specialized message types 5 designated:

1. CODE FILE;
2. DUMP FILE;
3. NSP STATE.

The Code File message transfers the firmware 10 data from the host computer to the Network Support Processor. A Dump File message is used to dump portions of the NSP memory back to the host computer. The NSP State message is used to report the current condition of the Network Support Processor to the host computer.

15 All the remaining messages are either "request" or "result" messages. The valid messages are shown and listed in Tables V and VI. In the Tables, the unlisted message codes are not used. Request messages are sent as the data portion of a SEND message operation.

20 Result messages are returned to the host computer as the data portion of a GET message operation.

The ADD GROUP message adds a group to the subsystem. A group is a collection of station sets. A station set is defined as a set of stations that are 25 jointly and physically acceptable. Each station is associated with only one station set. Each station set is associated with only one group. Thus, when a group is added to the subsystem, the entire collection of station sets and the stations in each station set is 30 added to the system.



- 79 -

TABLE V

Table V Request Messages

Code#	Message Type	Meaning
01	Add Controller	Adds Line Control Process code file to subsystem
02	Delete Controller	Removes Line Control Process after process no longer in use
03	Add Editor	Adds Editor code file to subsystem
04	Delete Editor	Removes Editor from subsystem after Editor no longer in use
05	Add Group	Adds group to subsystem
06	Delete Group	Removes group, associated stationsets, stations, and lines from subsystem
07	Add Line	Adds line to subsystem and activates Line Control Process for line
08	Delete Line	Removes line from subsystem
09	Add Station	Adds station to subsystem after corresponding stationset added
0A	Delete Station	Removes station from subsystem after station no longer in use
0B	Add Stationset	Adds stationset to subsystem after corresponding group added



- 80 -

TABLE V
(Continued)

Table V Request Messages (Cont)

	Code	Message Type	Meaning
5	0C	Delete Stationset	Removes stationset and associated stations from subsystem after each station no longer in use; stationset removed after all stations removed
	0C	Add Translate Table	Adds translate table to subsystem
10	0E	Delete Translate Table	Removes translate table after table no longer in use
	0F	Clear Adapter	Soft clears line adapter firmware
	10	Dump Adapter	Dumps line data area in line adapter
	11	Initialize Adapter	Initializes line adapter
15	12	Test Adapter	Tests state of line adapter
	13	Ack Station	Acknowledges receipt of station input result message
	14	Change Station Editor	Changes station Editor to Editor loaded in NSP by previous Add Editor request message
20	15	Make Station Not Ready	Makes a station NOT READY in firmware
	16	Make Station Ready	Makes a station READY in firmware
	17	Output	Sends output message to station
25	18	Clear LSP	Sends selective CLEAR to LSP controlled by NSP
	19	Set Attribute	Sets value of certain parameters in specified line, station, or stationset
	1A	Set External	Sets value of specified station or line external variables
30	1B	Set Global	Sets value of certain global Executive variables
	1C	Status	Requests either global Executive status information or the values of certain characteristics of a specified Line Control Process, Editor, group, stationset, station, translate-table, or line



- 81 -

TABLE VI

Table VI Result Messages

Code	Message Type	Meaning	IFI
01	Cleared Station	Station has been cleared	1
02	Error	Unsuccessful attempt to receive from or transmit to station	1
03	Input	Returns input message received from station	1
04	Message Edit Error	Returns information about abnormal termination in Editor activation for station	1
05	Output Status	Acknowledges output request for station when required	1
06	Purged Output	Output request for station purged because station is cleared	1
07	Unprocessed Output	Output request for station discarded because station is cleared	1
0F	Line Suspended	Main Line Control Process suspended	1
10	Line EOT	Main Line Control Process terminated normally	1
11	Dump Adapter Reply	Returns line adapter data information for line in response to Dump Adapter message	1
12	Test Adapter Reply	Returns status information for line in response to Test Adapter message	1
13	Switched Line Change	Returns information about changes in status of switched line	1
14	Abnormal Termination	NSP or LSP S-Process terminated abnormally	1
30	15 Ack Request	Request processed normally	1



- 82 -

TABLE VI
(Continued)

5	16	Rejected Request	Request rejected due to invalid information or precondition not satisfied
10	17	Deleted	Line control process, Editor, group stationset, station, translate-table, or line deleted as requested
	18	Status Reply	Returns status information in response to status request
	19	Unsuccessful I/O	Returns information associated with an unsuccessful I/O attempt

NOTE

15

An asterisk in the F column indicates that the result message applies only to firmware, not to hardware.



- 83 -

Within the Network Support Processor, several firmware components jointly insure communications with the host computer and the Line Support Processors (LSPs). These firmware components can be classified as follows:

- 5 (a) Manager
- (b) Host Dependent Port (HDP) Control
- (c) Executive
- (d) Editor
- (e) Line Control Process

10 The host computer message level interface 15 in FIG. 1A (MLI) is used for communications between the host computer and the Network Support Processor (NSP) while the Network Support Processor message level interface 100_m (MLI) is used for communication between 15 the Network Support Processor and the Line Support Processor (LSP). In FIG. 16 there is shown how the separate firmware components are used in transferring information between the Line Support Processor, the Network Support Processor and the host computer.

20 In FIG. 17 there is shown a firmware block diagram which illustrates where the different components are located and their relative size.

25 In the message transfer block diagram of FIG. 16 the Line Support Processor 300 is connected to the Network Support Processor 80 via the message level interface 100_m. The NSP 80 is shown with the Executive firmware 80_{ex}, the Line Control Process firmware 80_{lcp}, and the Editor 80_{ed}. NSP 80 connects through the host MLI 15 over to the host computer 100, which includes a firmware DCC 30 (Data Comm Control).

30 The firmware block diagram of FIG. 17 shows the Network Support Processor 80 as composed of two controllers, that is the MLI controller and the NDL controller. Both of these controllers share the Memory 90.



- 84 -

The NDL controller has a 2K PROM on the state machine designated Bootstrap 80_b, and also a 32K RAM designated as Operating System Kernel 80_k.

5 The MLI controller has an 8K PROM designated as Manager 80_m and also a 32K RAM designated HDP control 80_h. The Manager 80_m connects via the MLI 15 to the host computer 100. The HDP control 80_h connects via MLI 100_m to the Line Support Processor, LSP 300.

10 MANAGER: The Manager (FIG. 17) is a software module that controls communication between the NSP and the host computer across the message level interface MLI 15. It has control of the MLI and performs the I/O operations. The majority of the firmware code 80_m is held in 8K words of the MLI state machine PROM 15 designated 50.

20 HDP CONTROL: The HDP Control (FIG. 17) drives a Network Support Processor and message level interface and provides an interface to the Executive 80_{ex}. Firmware for the HDP Control is resident in the RAM portion of the memory (66_m) control card associated with a particular MLI state machine.

25 EXECUTIVE: The Executive (FIG. 16) is a software module that performs most of the NSP data communication functions. It processes all the request messages from the host computer except for the OUTPUT Request Message. This particular message is passed on to the Line Control Process unit 80_{lcp}. When the host computer requests a status result, the Executive returns an OUTPUT STATUS Result Message after the OUTPUT request is completed. 30 The Executive sends Result messages to the host computer in response to both previously received Request messages and spontaneous subsystem events.



- 85 -

The components that make up the Executive 80_{ex} can be broadly classified as the Permanent Independent Runners, Interpreter, S-Processes, and the Operating System.

5 The firmware code for the Executive 80_{ex} resides in the RAM 66_m of the NDL memory control card 66_b and also in a portion of Shared Memory 90. The remainder of the Shared Memory is dynamically allocated and de-allocated, as the activity in the network demands.

10 PERMANENT INDEPENDENT RUNNERS: The Permanent Independent Runners perform the handler functions for the NSP 80. These functions are independent of network configurations and station types. The code for the Independent Runners is loaded during initialization and exists in fixed 15 locations of the Shared Memory 90. There are three Permanent Independent Runners which are:

- (a) The HDP Handler
- (b) Request Handler
- (c) The Status Handler

20 The function of each Handler is summarized as follows:

25 HDP HANDLER: The HDP Handler manages all of the I/O operations between the NSP 80 and the LSP 300 and analyzes each operation for I/O errors. It coordinates with the HDP control (firmware) for proper routing of the I/O to the Line Support Processors 300. It receives and analyzes all the Result Descriptors from the LSP 300 and reports the status of all NSP-LSP I/O operations to the host computer 100.

30 REQUEST HANDLER: The Request Handler manages the Request message queue from the host computer 100 and services all Request messages (except for OUTPUT Request Messages). The OUTPUT Request Message is sent to an appropriate Editor component, if one is defined; it is



then routed to the proper station destination. The Request Handler receives unqueued request messages from the Manager Component 80_m.

5 STATUS HANDLER: The Status Handler is driven by the "HDP Handler". The primary function of this handler is to perform I/O operations for the HDP Handler. Specifically the Status Handler examines those I/O operations that are rejected by the Line Support Processor (LSP) and interrogates the LSP for the 10 correct status of the Line Adapters involved. It uses this information to enable the HDP Handler to complete the original I/O operation.

15 S-PROCESSES: The S-Processes are collections of user defined code. The functions are dependent on the network configuration and the station types and the code is defined by the NDL program for a specific network. The code for an S-Process is individually loaded in the Executive 80_{ex} to perform specific tasks related to the network and is de-allocated when no 20 longer required. The execution of each S-Process requires that the Interpreter be invoked. The Interpreter enables the code in the S-Process to be executed by the NDL state machine 50_b. The editing and line control functions are typical examples of 25 S-Processes. The scope of an S-Process can be understood by an understanding of the functions of the Editor and the Line Control Process.

30 INTERPRETER: An Interpreter is a "transient" Independent Runner. Unlike the Permanent Independent Runners, the transient Independent Runner is invoked

- 87 -

for each S-Process that is activated and exists only as long as the S-Process exists. The Interpreter translates the code contained in the S-Process and provides an interface to the Operating System routines.

5 OPERATING SYSTEM: The Operating System Support is provided to the Network Support Processor in the form of two routines; these are:

- (a) Kernel routine
- (b) Secondary routine

10 KERNEL ROUTINES: Kernel routines are a collection of routines or procedures, each of which performs a single Operating System Task. For example, to acquire space in the Shared Memory 90, a procedure called "GET-Space" is activated, and to release this space a procedure called "Forget-Space" is activated. Kernel routines are organized into seven levels or sub-groups in order to increase the modularity of the design. The Kernel 80_k is resident in the fast RAM (66_m) portion of the NDL memory control card 66_b.

15 SECONDARY ROUTINES: Secondary Routines are a collection of routines or procedures, each of which provide a common subsystem function. These are tasks such as: Clear-Adapter; Clear-Station; and Notify Line, are accomplished by procedures which belong to this group.

20 EDITOR: Editor is a user-provided and user-defined routine within the NDL program. It is used to manipulate the text portion of the Request Message and Result Message according to the requirements of specific terminal types in the Data Communications Network. The code for the Editor exists in the Shared Memory 90 as a collection of S-Processes. Thus the code is derived from the user-written NDL program for the network and



- 88 -

is dependent on the network configuration. The NDL compiler insures the transformation of the Editor into a collection of S-Processes.

When specified by the NDL, the Editor 5 receives control from the Executive component when a "Request Message" is sent by the host computer to a terminal. This enables the Editor to edit the text portion of the "Request Message". The edited message is subsequently passed on to the firmware Line Control 10 Process 80_{lcp} to be sent to a terminal. A similar process occurs in the reverse direction, when a host input is received from the network. The Editor receives control from the Line Control Process and can edit the text of the host input "Result Message".

15 LINE CONTROL PROCESS: This firmware component 80_{lcp} is also user-provided and user-defined in the NDL program. The Line Control Process manages both a line and all the terminals connected to the subsystem through that line. It is responsible for implementing the line 20 protocol, for handling error recovery, and other functions. The code for this component exists in the Shared Memory 90 of the NSP 80 as a collection of S-Processes. The S-Processes representing the Line Control Process originates from the user-written NDL program for the 25 network and is dependent on the network configuration. The NDL compiler insures the transformation of the Line Control Process to a collection of S-Processes.

The Line Control Process in FIG. 16 is activated for each line added to the network and executes 30 in the NSP 80 so long as the line remains attached to the network. It receives the OUTPUT Request Message



- 89 -

from the Executive components or from the Editor components, if specified. In turn, it formats the INPUT "Result Message" and sends it to the Executive or Editor for delivery to the host computer 100.

5 The Line Control Process is primarily responsible for communication between the NSP 80 and the LSP 300. This communication uses messages called "SIGNAL" from the NSP to the LSP (FIG. 16) and messages called "Reply" from the LSP 300 to the NSP 80. While communications between the host computer and the NSP are entirely defined by NSP firmware, communication between the NSP and LSP 300 is defined by the user through the NDL program for the network.

10 15 A "SIGNAL" is a message created by the Line Control Process and sent to LSP 300. The Line Support Processor (LSP) 300 directs the signal to the proper destination within the network. A SIGNAL has two fields:

20 (a) Message text field
 (b) Control information field

25 The message text field consists of the text of the output request message from the host. The control information field consists of routing and other information for the LSP as defined by the NDL program.

30 A "Reply" is created by the NSP 300 and sent to the Line Control Process 80_{lcp} in the Network Support Processor 80. A "Reply" consists of two fields:

(a) Text field
(b) Control Information field



- 90 -

The Text field consists of the actual text that has entered the network. The Control Information field, appended to the text field, is used by the Line Control Process 80_{lcp} to handle the text properly and to transmit the text to the host computer 100.

HOST COMPUTER TO NETWORK COMMUNICATION

A network message originates in the host computer 100. The message is sent across the MLI 100_m by means of a SEND message operation to the Network Support Processor 80 as a "Request". If an Editor is defined in the NDL program, the NSP can edit the text portion of the message. The edited message is then prepared for transmission to the LSP 300.

Preparation is accomplished by re-formatting the message, under control of the Line Control Process firmware, into a SIGNAL. The SIGNAL is then passed to the Line Support Processor 300 across the MLI 100_m between the NSP 80 and the LSP 300. The Line Support Processor 300 receives the signal and directs it to the proper destination in the network.

NETWORK TO HOST COMPUTER COMMUNICATION

The Line Support Processor (LSP 300) receives the text from the network and formats it into a Reply message for transmission to the Network Support Processor (NSP 80). When the Network Support Processor receives the Reply message, it re-formats the text portion into an "input result message". The text portion is edited if an Editor is specified. The edited "input result message" is then ready for transmission into the host 100. In order for the host computer 100 to receive the "input result messages" from the NSP 80 across the MLI, a "GET message I/O Descriptor" must be issued by the host computer 100.



- 91 -

TRANSLATE TABLE: A translate table provides the mechanism to translate the EBCDIC character-set used by the data communication subsystem to the character-set used on a specific data communications line.

5 These translate tables are required by the NDL program.

DATA COMMUNICATIONS NETWORK

The I/O Data Communications Network (IODC) subsystem can interface a maximum of 256 data communications lines per host computer. The maximum configuration is derived by interfacing (as seen in FIG. 1A) four Network Support Processors (NSP) per host computer, four Line Support Processors (LSP) per each Network Support Processor (NSP) and 16 electrical interfaces (line adapters) for each Line Support Processor (LSP). Burroughs Data Communication Protocol allows data communication devices to be connected in series or parallel so that each data communications line can service multiple (nominally as many as ten) devices. Theoretically it is possible to attach 2560 data communication devices to one host computer.

The limiting factor in interfacing devices is the throughput that can be accommodated and the software utilized. In the case of the IODC subsystem, the limiting factor is the Line Support Processor (LSP) bandpass. The LSP 300 can process approximately 50K bits per second. A Network Support Processor (NSP) can support 10 to 15 terminals, such as the TD 830, operating at 9600 bauds or any mix that represents an equivalent workload. The exact number of terminals that can be accommodated depends on the average terminal throughput. This, in turn, depends on such factors as the average message length, the type of data, (keyboard or canned) acceptable response time and so on.



- 92 -

5 The Line Support Processor 300 is a unit composed of several slide-in cards which can be fitted into a base module. This unit will consist of a card for a UIO-state machine processor, a set of cards called "Quad LA" which means four line adapters are built into that card, and an interface card designated MLI/LA which designates the line adapter interface to the message level interface bus.

10 The data communications Line Adapter is basically a device which interfaces on one end to a data communications line electrical interface and on the other hand to a state machine processor (UIO-SM). The line adapter's primary functions are to serialize bit information from/to byte information, to provide timing, to generate service requests, to provide a RAM memory 15 storage, to provide auto-call interfacing and provide connection to level changers to match the data communications line.

20 The byte-oriented line adapter can be arranged into basic configurations; a Quad line adapter and a Single line adapter. The Single line adapter is part of the Line Support Processor 300, and shares the same circuit board with the MLI, and is always required regardless of the quantity of communication lines controlled by the Line Support Processor. The Quad line adapter card contains 25 four line adapters on the one board. These boards are slide-in boards which plug into the base module backplane.

30 The Line Adapter cards are connected together by means of frontplane cables to the state machine processor (UIO-SM). Connection to the data communications line is through an electrical interface board which cables to the Line Adapter. There are different types of electrical interface boards that exist which may be cabled into different combinations on the Quad Line Adapters; thus,



- 93 -

only the electrical interface board requires change depending on the data comm line electrical characteristics.

From one to 16 line adapters may be addressed by the state machine processor of the Line Support Processor. Each line adapter will be jumpered uniquely in order to identify its address.

Similar addressable components are contained on a line adapter which the state machine processor may communicate with in the form of write/read data or "status" or to provide control. Those addressable components in the line adapter are as follows: (a) USART; (b) Timer; (c) Auto-call output; (d) Auto-call Status; (e) component requestors; (f) memory.

The USART (Universal Synchronous/Asynchronous Receiver/Transmitter) accepts data bytes from the state machine processor and converts them into serial bits for transmission; it receives serial bit data and converts it to parallel data bytes. The device is initialized by writing into two control registers which specify the manner in which it operates. Various bits of the control registers specify such things as: (i) synchronous/asynchronous mode; (ii) bits per character; (iii) parity; (iv) Baud rate; (v) transparent mode; (vi) Echo mode.

Thus, the combination of line adapter cards, a state machine processor card and a line adapter interface card form the Line Support Processor which is connected to the network through the backplane of the base module and also the frontplane connectors.

The data communications line adapter used here is an application-dependent device which is controlled by the state machine processor of the LSP 300. There are two basic types of line adapters which are available: (a) character oriented and (b) bit oriented.



- 94 -

Each of these may have a variety of electrical interfaces to the data communications line.

One to 16 line adapters may be serviced by one LSP state machine processor. Each line adapter contains 5 components which are addressable and can be serviced by the state machine processor with PUT or GET instructions. The components on the line adapter are serviced with one instruction or a series of instructions which, in some cases, provide sequential control for the components.



- 95 -

What is claimed is:

1. In a peripheral controller for a data transfer network wherein said peripheral-controller includes processor means, external memory means and interface circuit means operating to control data transfers between a host computer and a plurality of peripheral terminals through line communication processors which control transfers to said peripheral terminals, a direct memory access system comprising:

5 (a) a DMA logic unit connecting said main host computer and said peripheral terminals via said line communication processor;

10 (a1) means to address said controller-memory means for storage of consecutive data words received from said line communications processor;

15 (a2) means for setting and counting the number of data words to be transferred;

(a3) control means for enabling a direct memory access mode to a selected line communications processor for direct bursts of word transfer from said line communications processor to said controller-memory means;

20 (a4) bus means connecting said processor means, said controller-memory means, and said host computer.

25



- 96 -

2. The direct memory access system of claim 1, wherein said means to address includes:

(a) a DMA address counter register providing address signals to an address bus connected to said controller-memory means, said address counter being incremented by said control means after each word is transferred to said controller-memory means.

3. The direct memory address system of claim 2, wherein said means for setting and counting includes:

(a) a transfer counter register loaded by said processor means with a value representing the number of words to be transferred, said transfer counter being decremented after each word that is transferred.

4. The system of claim 3, wherein said transfer counter register initiates an interrupt signal to said processor means when the desired number of words have been transferred.

5. The system of claim 3, wherein said control means includes:

(a) a control register which is loaded by signals, from said processor means, to initiate a direct memory access "read" mode.



- 97 -

6. The system of claim 5 which further includes:

(a) control logic activated by said control register to connect a selected communication processor onto a data bus connected directly to said controller-memory means.

5 7. The system of claim 6, wherein said control logic enables said transfer counter register and said address counter register.

8. In a peripheral controller for a data transfer network wherein said peripheral-controller includes processor means, external memory means and interface circuit means operating to control data transfers between a host computer and a plurality of peripheral terminals through line communication processors which control transfers to said peripheral terminals, a direct memory access system comprising:

10 (a) a message level interface logic means connected to said processor means and including:

(a1) a bi-directional message level data bus connecting said external memory means to any selected one of said plurality of peripheral terminals;

15 (a2) an I/O bus connecting said processor means to said interface logic means.



- 98 -

9. The direct memory access system of claim 8, wherein said message level interface (MLI) logic means includes:

5

- (a) a DMA address register for receiving address data, from said processor means, to select the area of said memory means which will receive data being transferred from said line communications processor;
- (b) a DMA count register for setting and counting the number of words to be transferred;
- 10 (c) means to select a peripheral terminal, via said line communication processor, connected to said bi-directional message level data bus;
- (d) means connecting said line communications processor to said external memory means.

10

10. The system of claim 9, wherein said means connecting said line communications processor to said external memory means includes:

5

- (a) receiver means for receiving data from said line communications processor for conveyance to said external memory.



- 99 -

11. The system of claim 9, wherein said MLI logic means includes:

- (a) a control logic circuit which includes:
 - (a1) a control register connected to said I/O bus and settable to the DMA mode by receipt of a DMA enable bit from said processor means;
 - (a2) a control circuit having an input from said control register and including:
 - (a2-1) a DMA Control PROM to provide control signals for DMA operation;
 - (a3) A DMA request flip-flop.

12. The system of claim 11, wherein said DMA Control PROM includes:

- (a) a control output signal (SDMARQ) to set said DMA request flip-flop which provides continuance of said DMA mode.

13. The system of claim 11, wherein said DMA Control PROM further includes:

- (a) a control output signal to enable incrementation of said DMA address register and decrementation of said DMA count register.



- 100 -

14. The direct memory access system of claim 8, wherein said MLI logic means includes:

- (a) a DMA address counter for loading by said processor means with the external memory address of data to be transferred to a selected peripheral terminal via said line communications processor;
- (b) a DMA count register for loading, by said processor means, with a value representing the number of words to be transferred to said line communications processor;
- (c) a control logic circuit including:
 - (c1) a control register connected to said I/O bus and settable to the DMA mode by receipt of a DMA enable bit from said processor means;
 - (c2) a control circuit having an input from said control register and including:
 - (c2-1) a DMA Control PROM to provide control signals for DMA operation;
 - (c3) a DMA request flip-flop.

15. The system of claim 14, wherein said DMA Control PROM includes:

- (a) first output signal means to set said DMA request flip-flop.



- 101 -

16. The system of claim 15, wherein the setting of said DMA request flip-flop enables memory addressing to occur from said DMA address counter.

17. The system of claim 15, wherein said DMA Control PROM includes:

- (a) second output signal means to enable counting by said DMA count register and said DMA address register.

5






FIG. 1A. Data Communications Network.**SUBSTITUTE SHEET**

FIG. 1B. Network Support Processor.



3 / 20

FIG. 2. NSP Card Level Block Diagram.

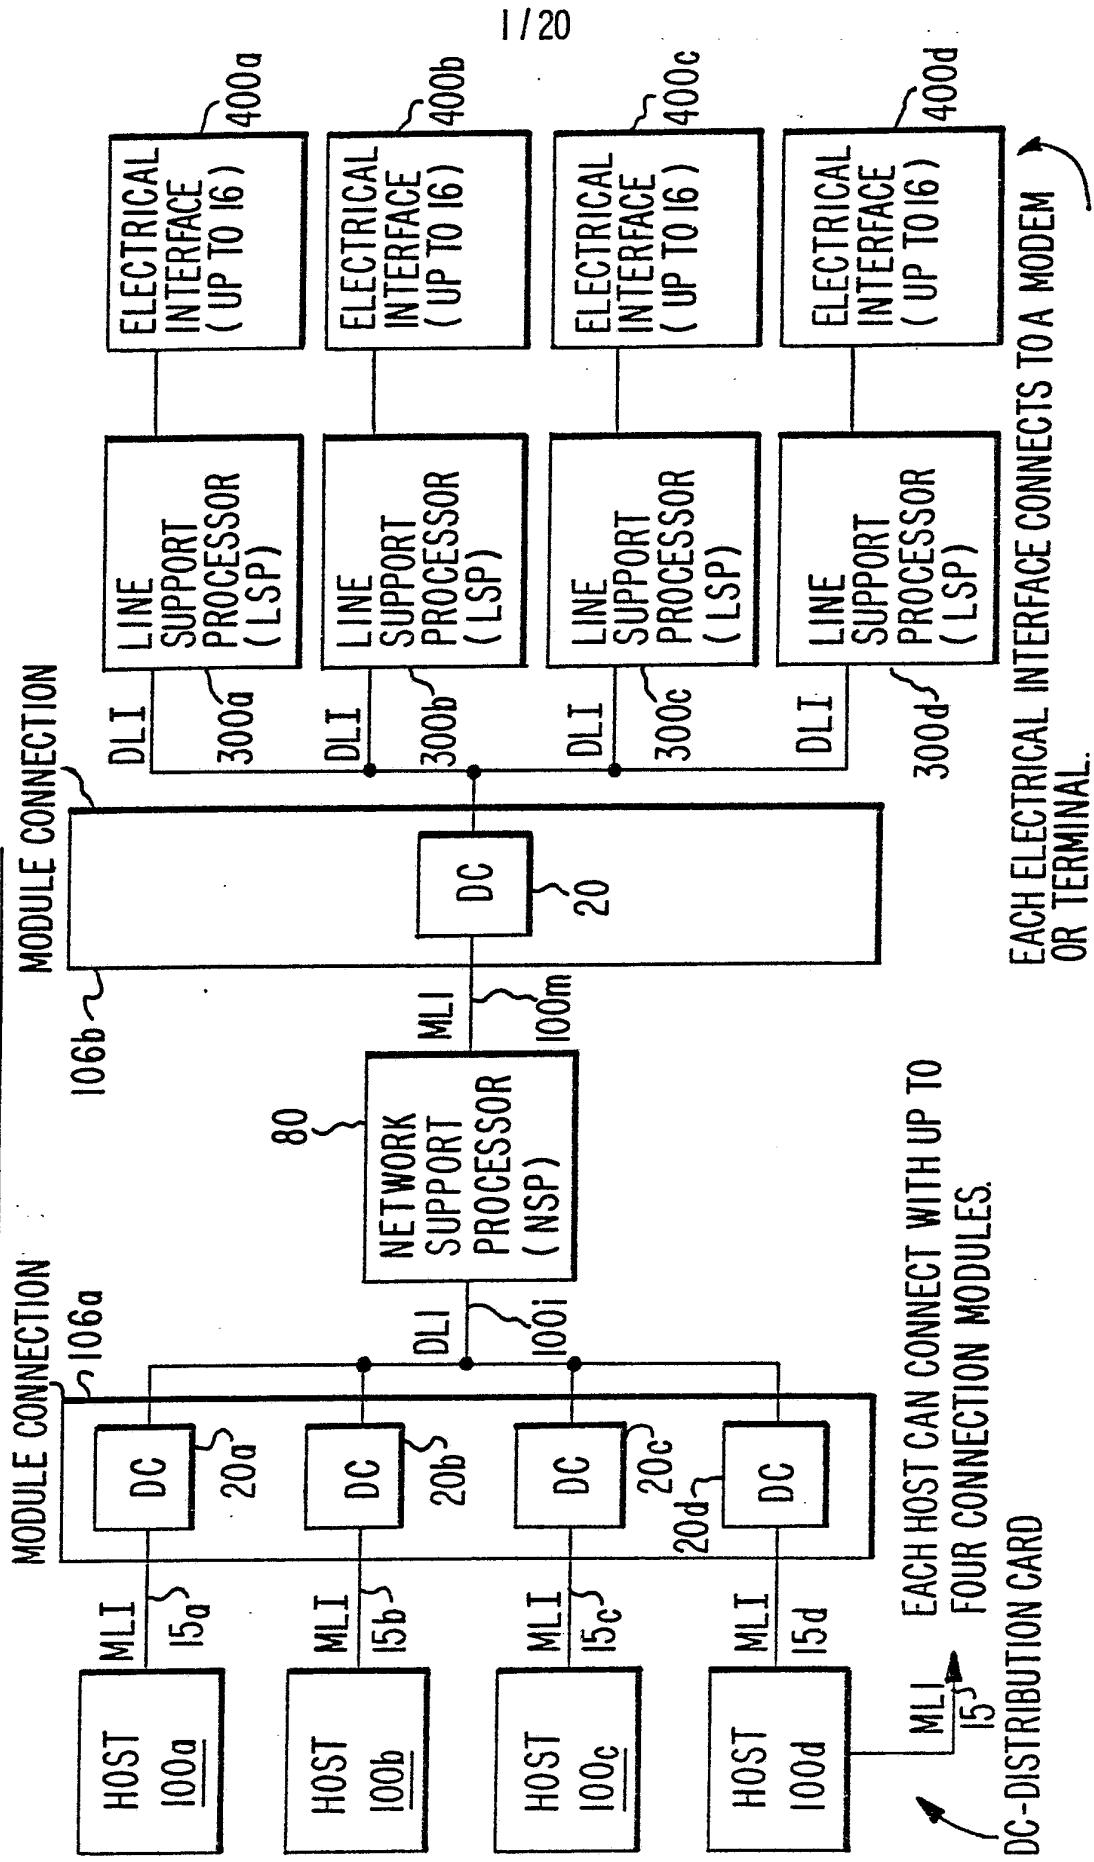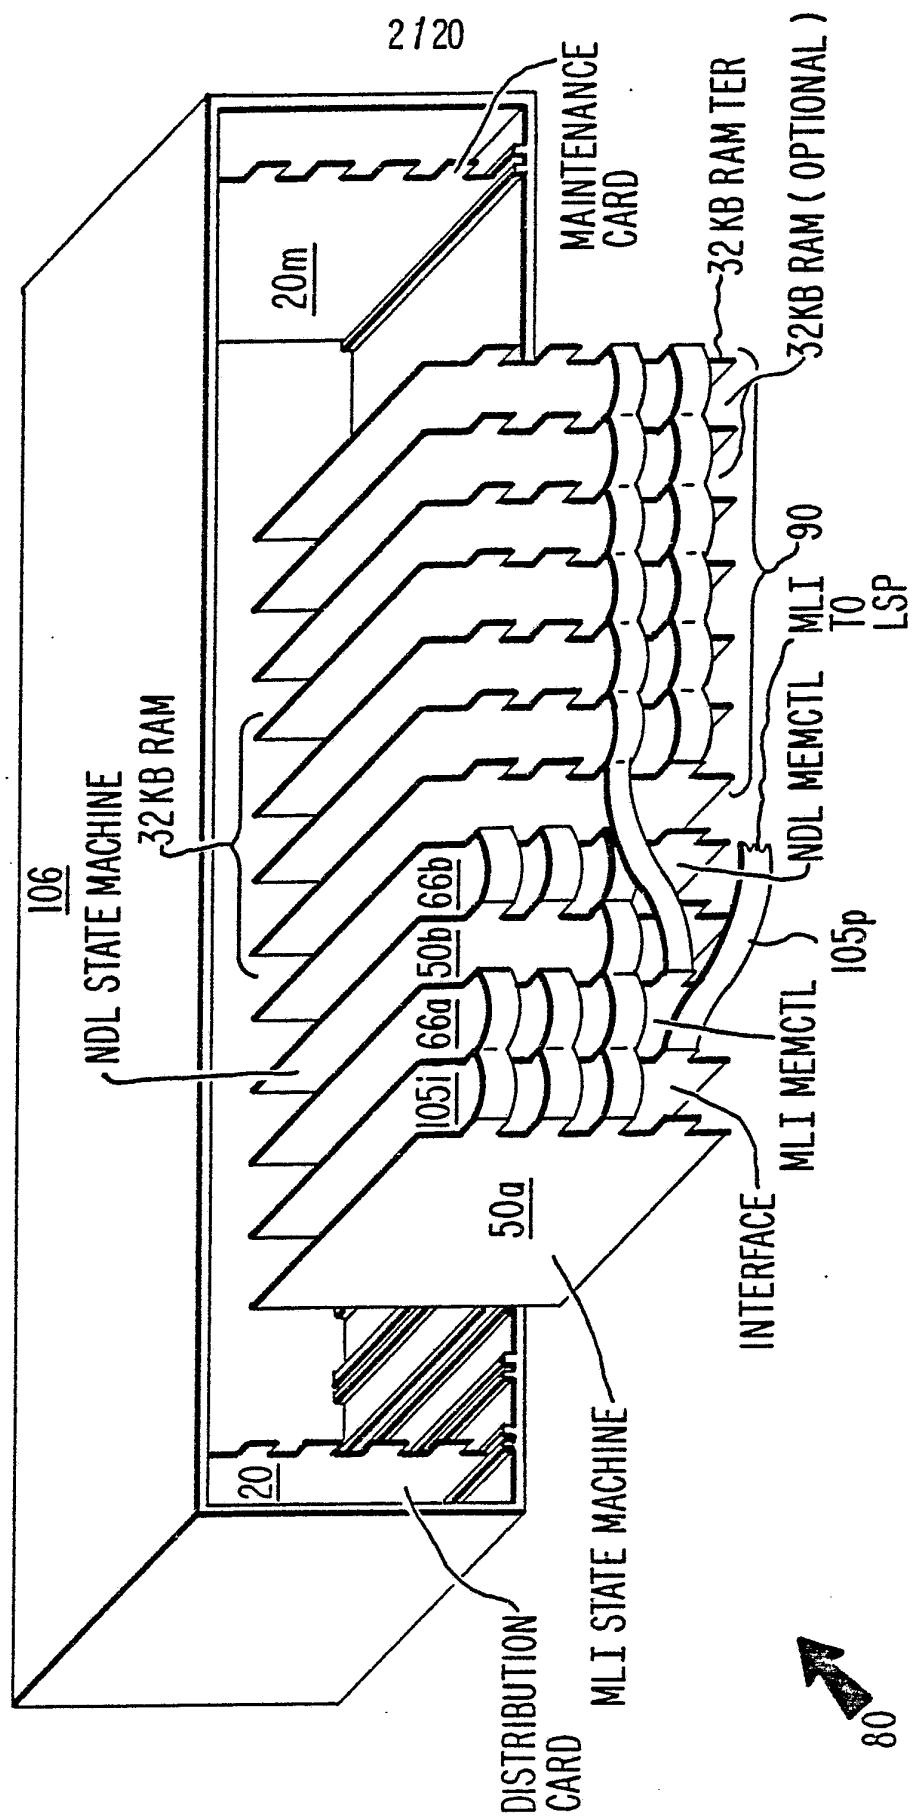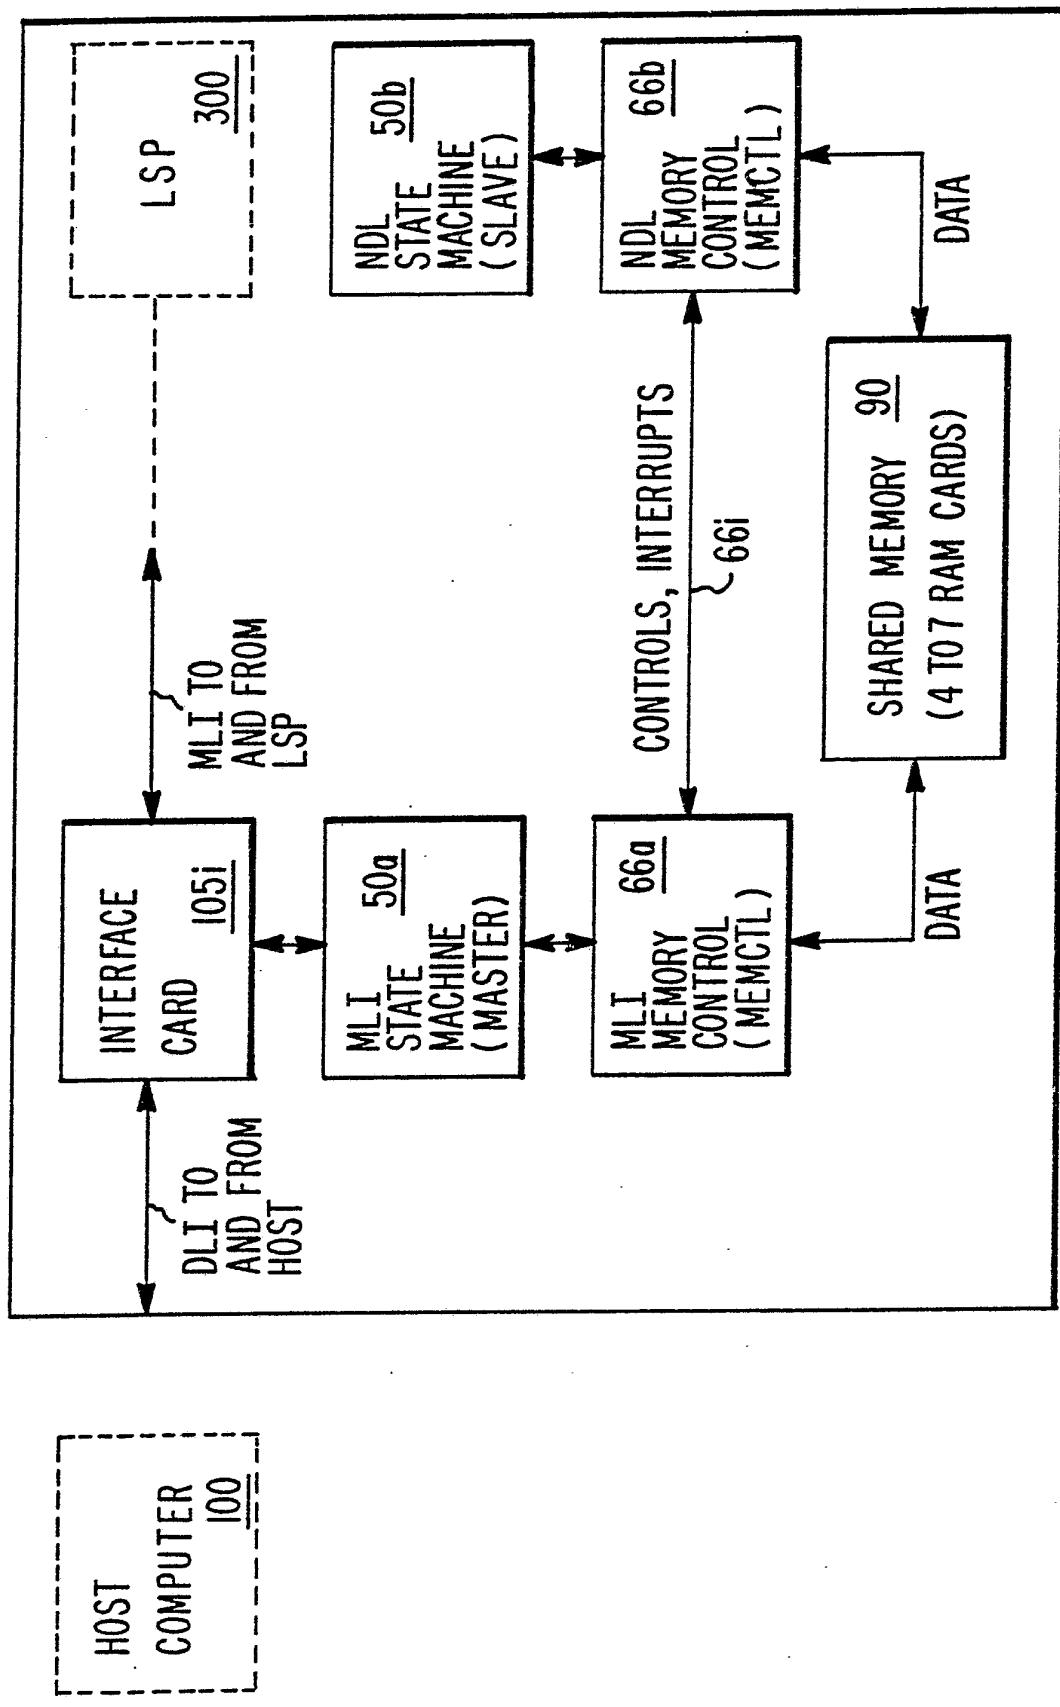

4/20


FIG.3. State Machine Block Diagram.


FIG.4. Memory Addressing Logic Block Diagram.

FIG. 5. Data Manipulation Logic Block Diagram.






FIG. 6. Instruction Execution Block Diagram.

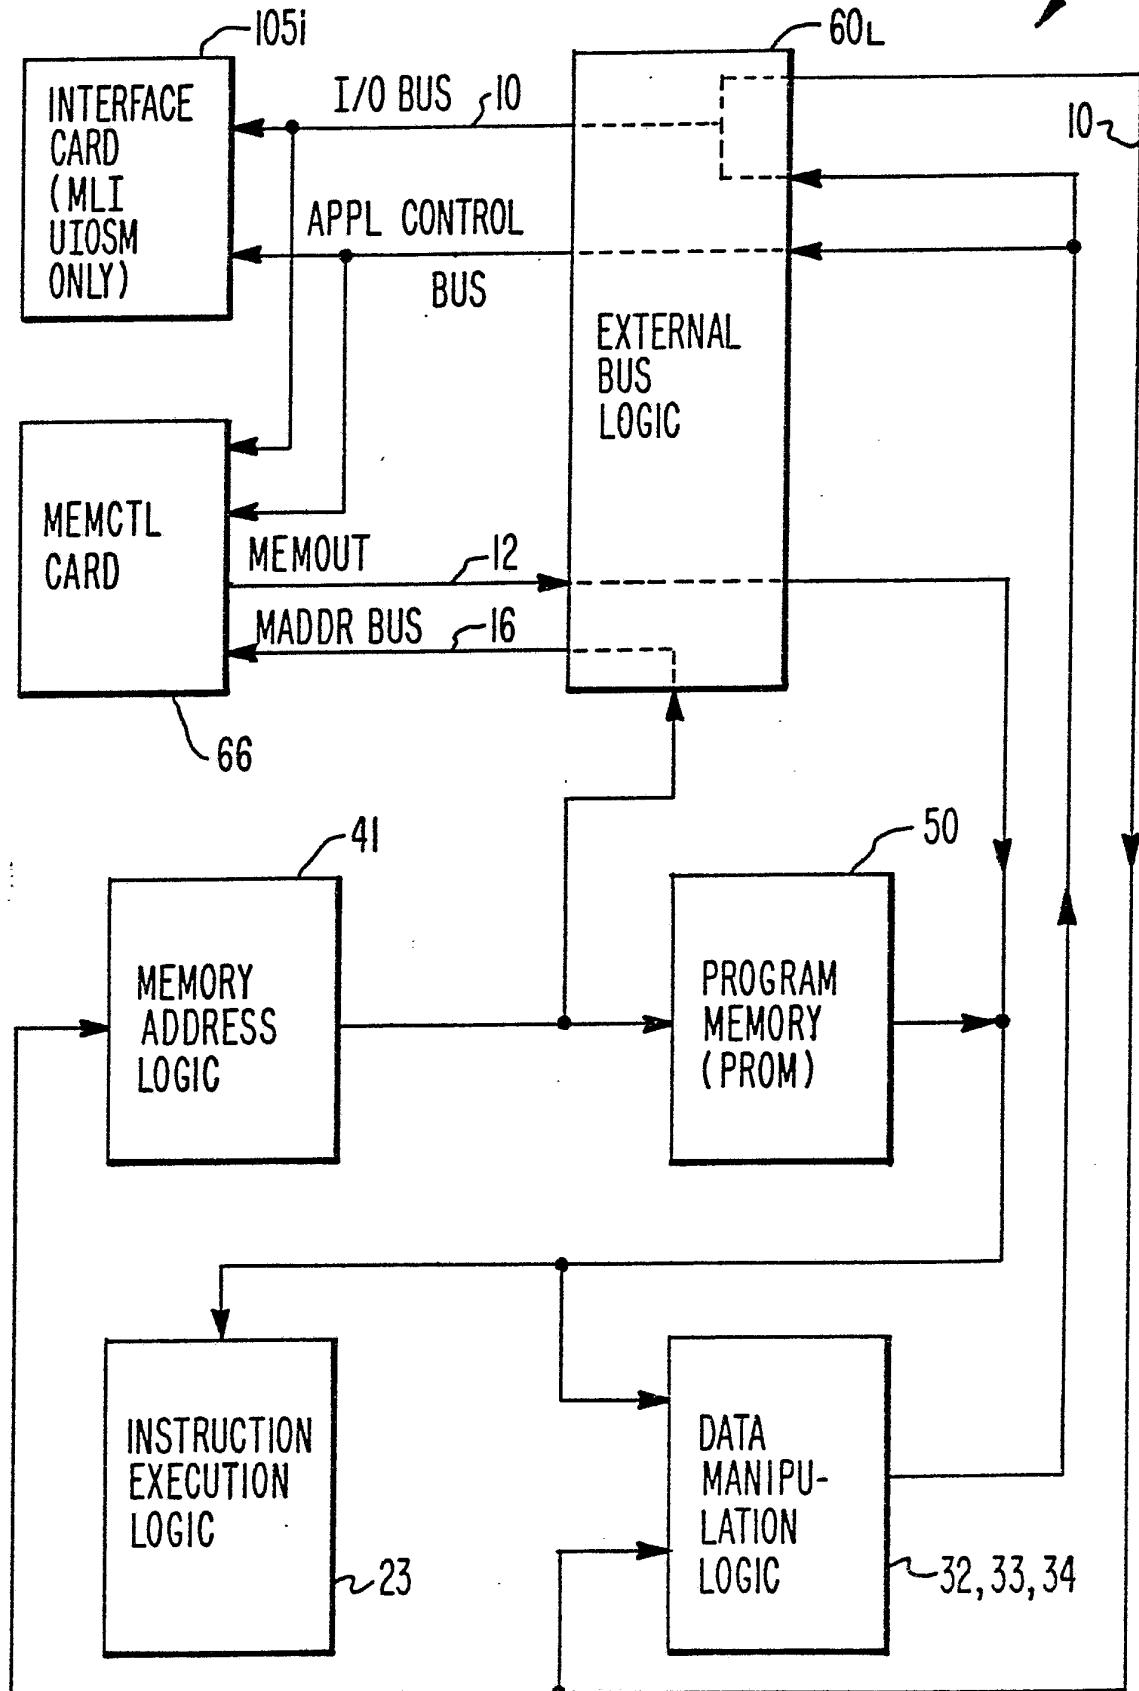


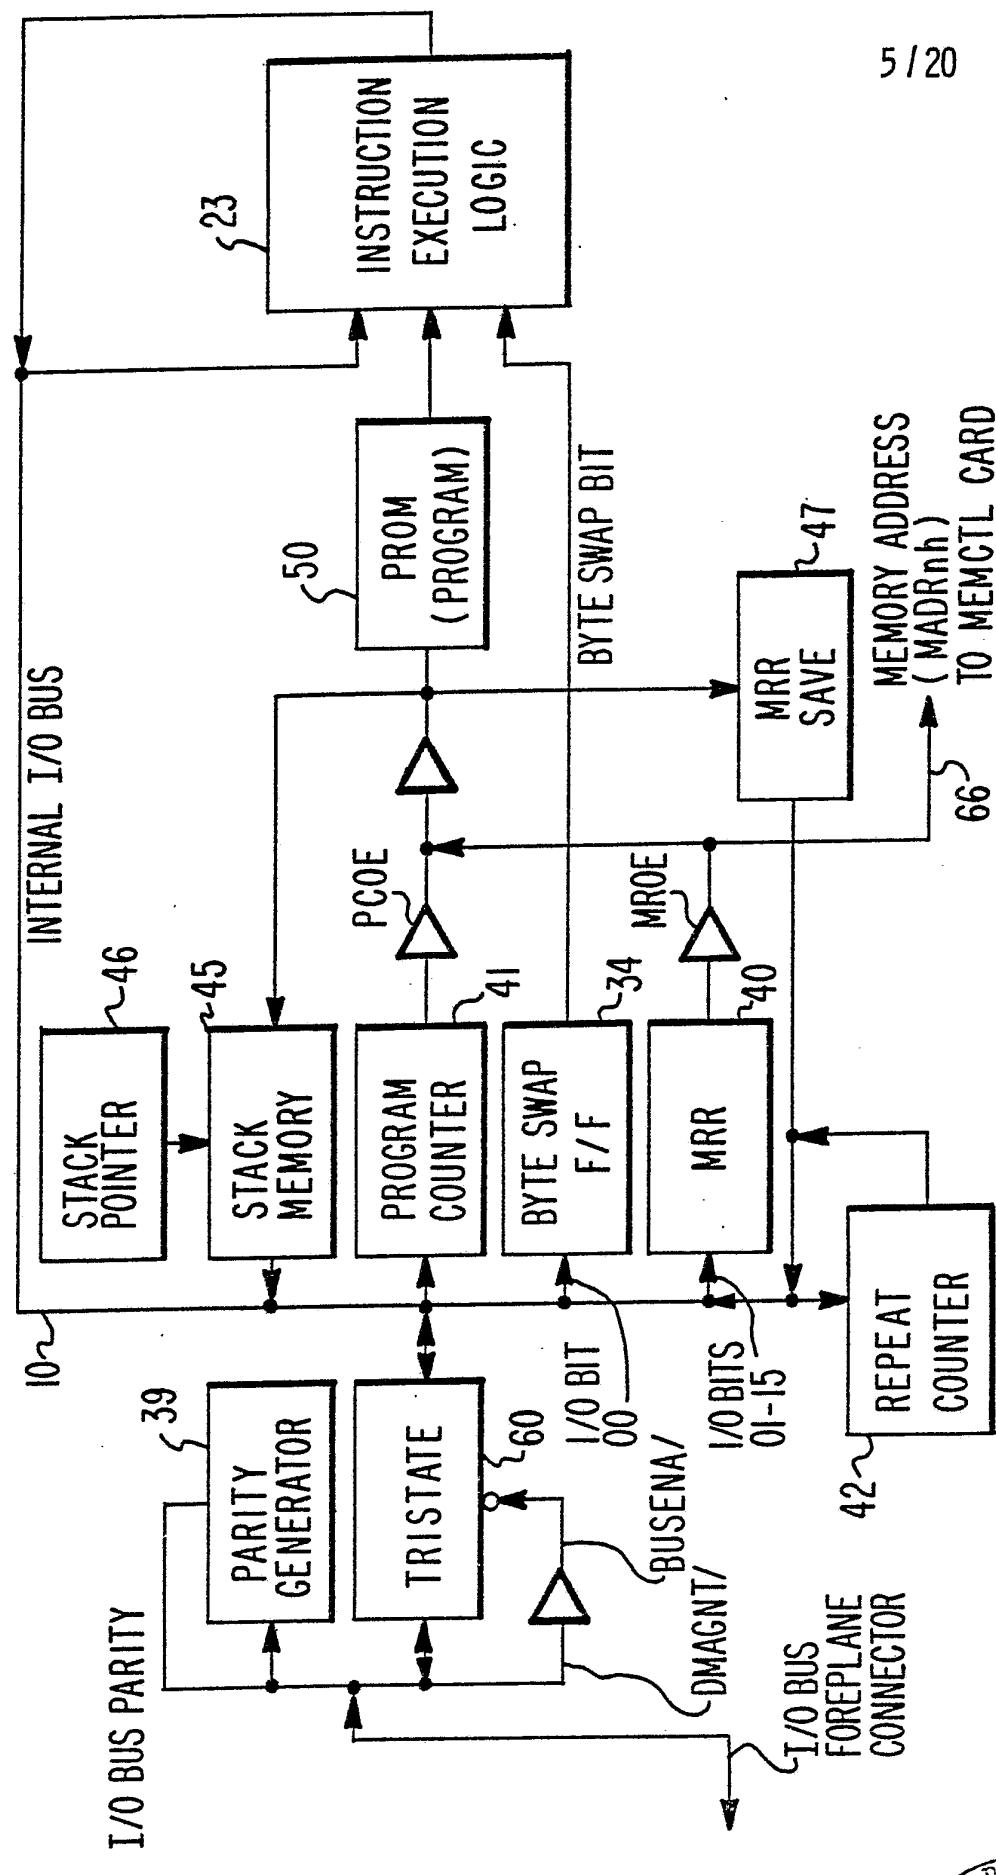SUBSTITUTE SHEET



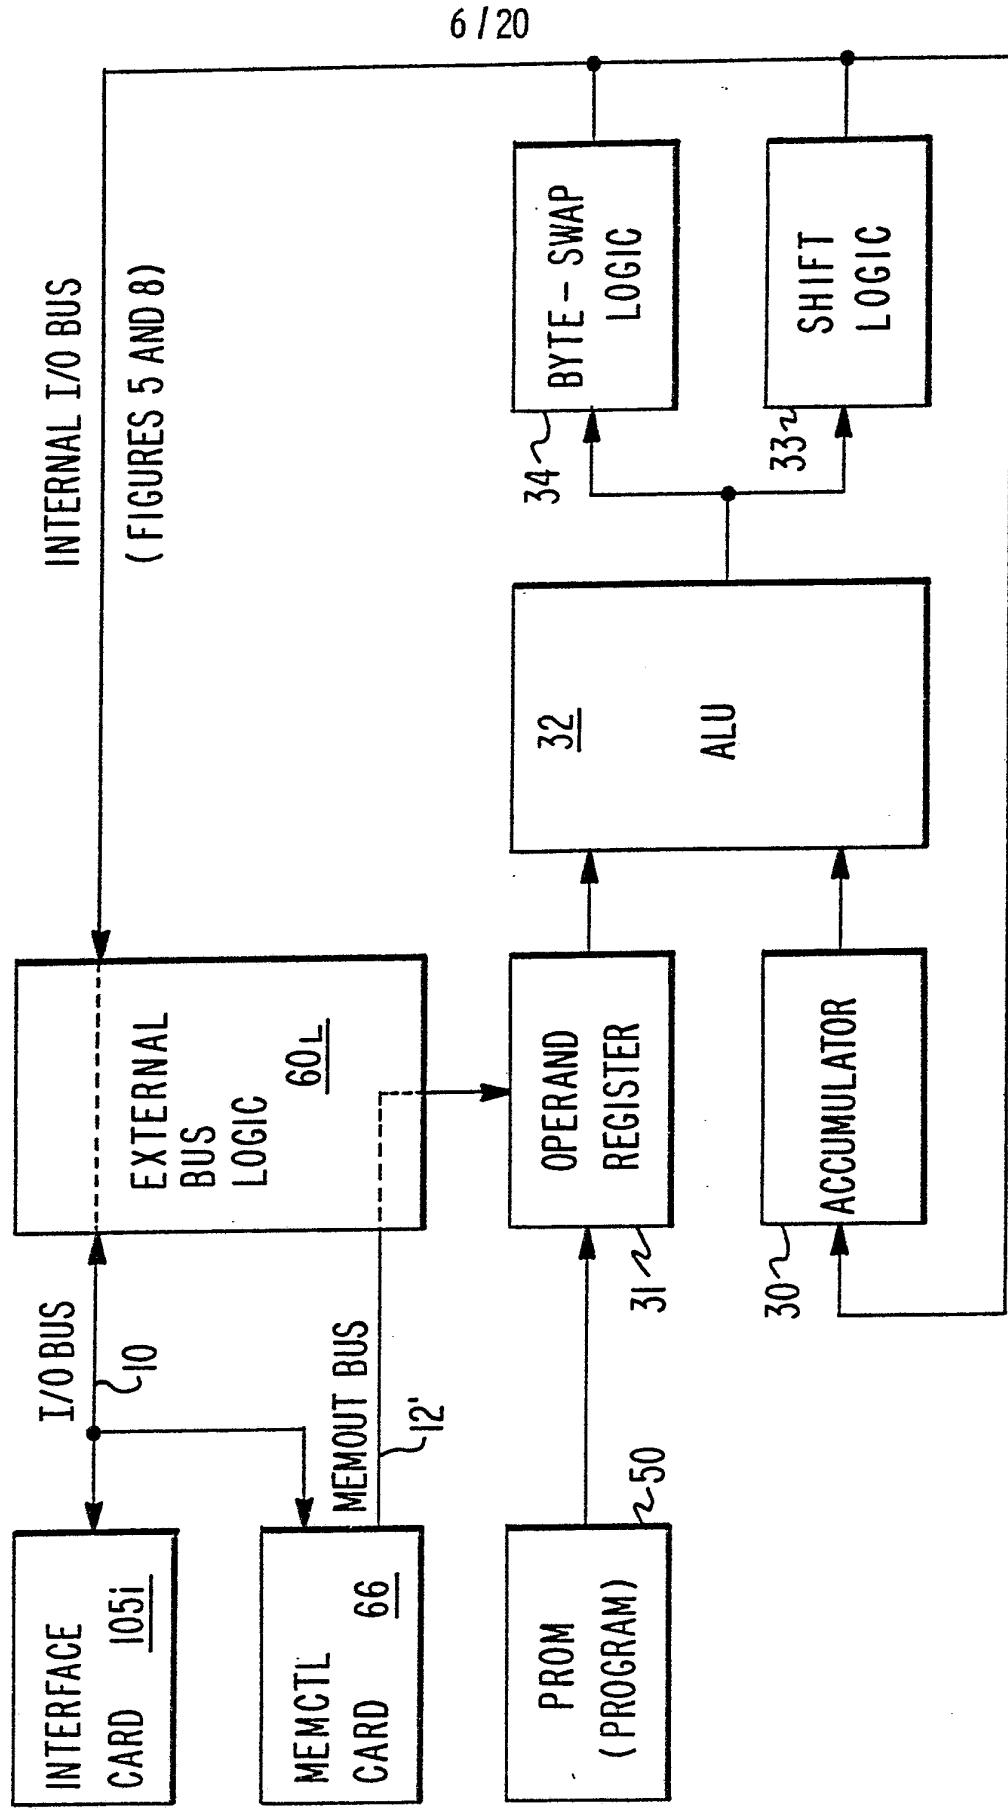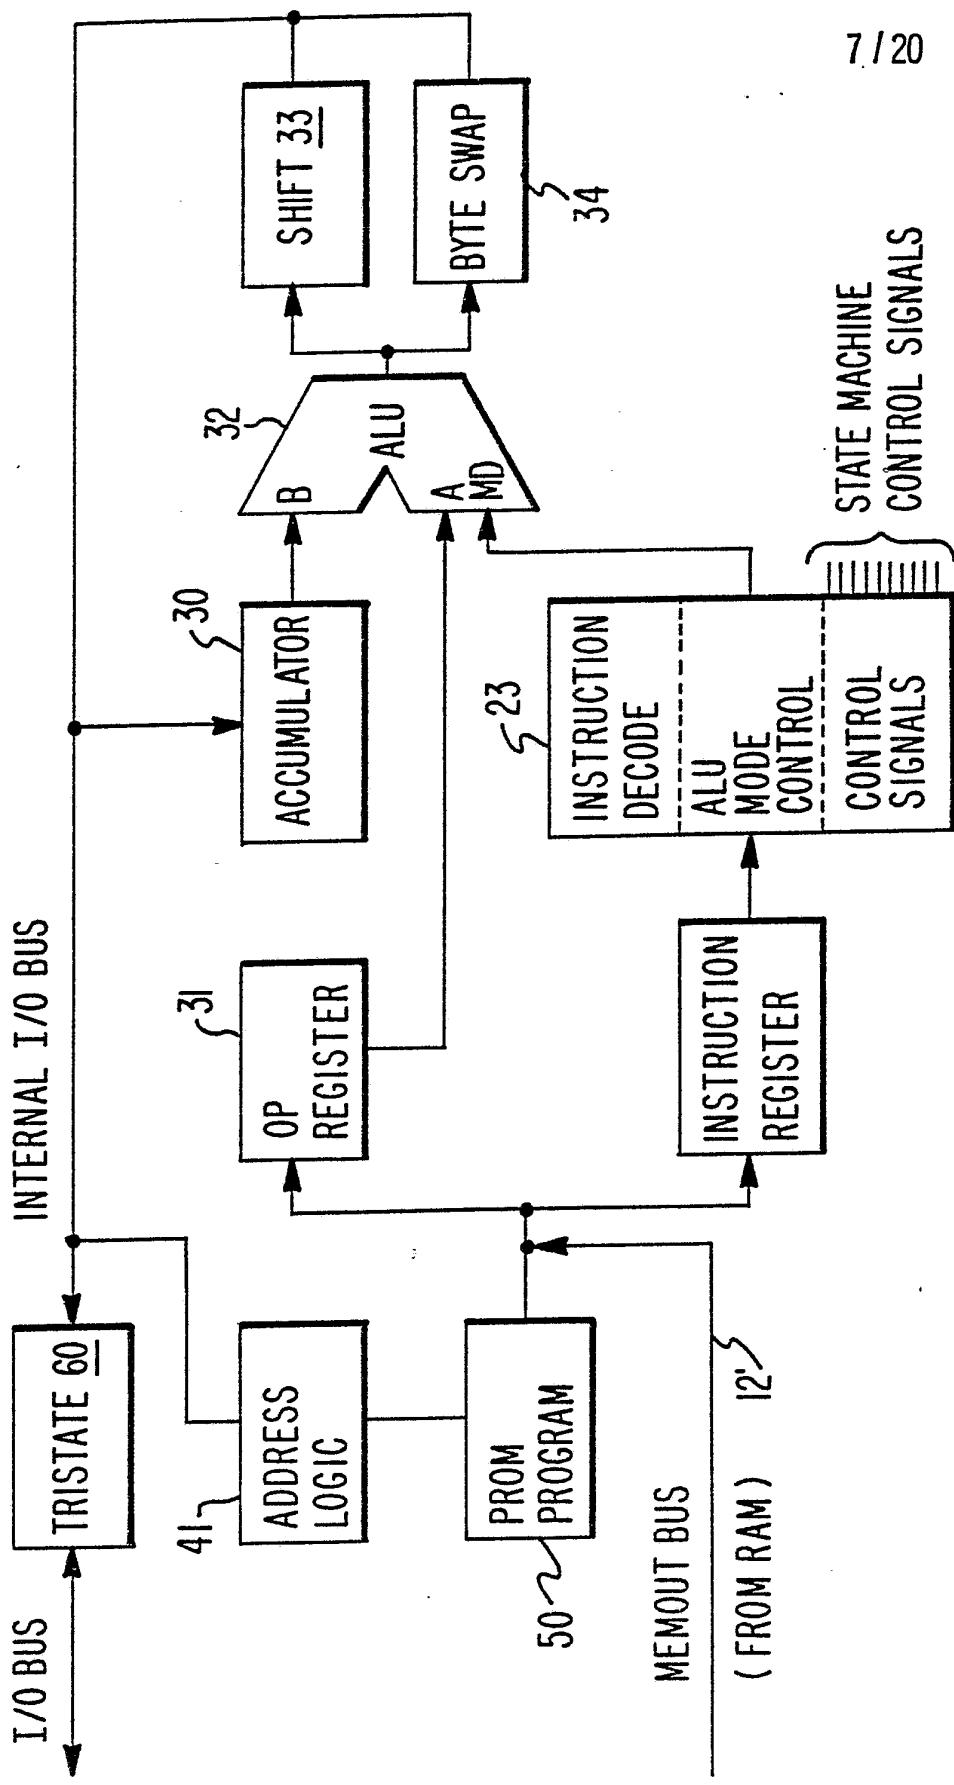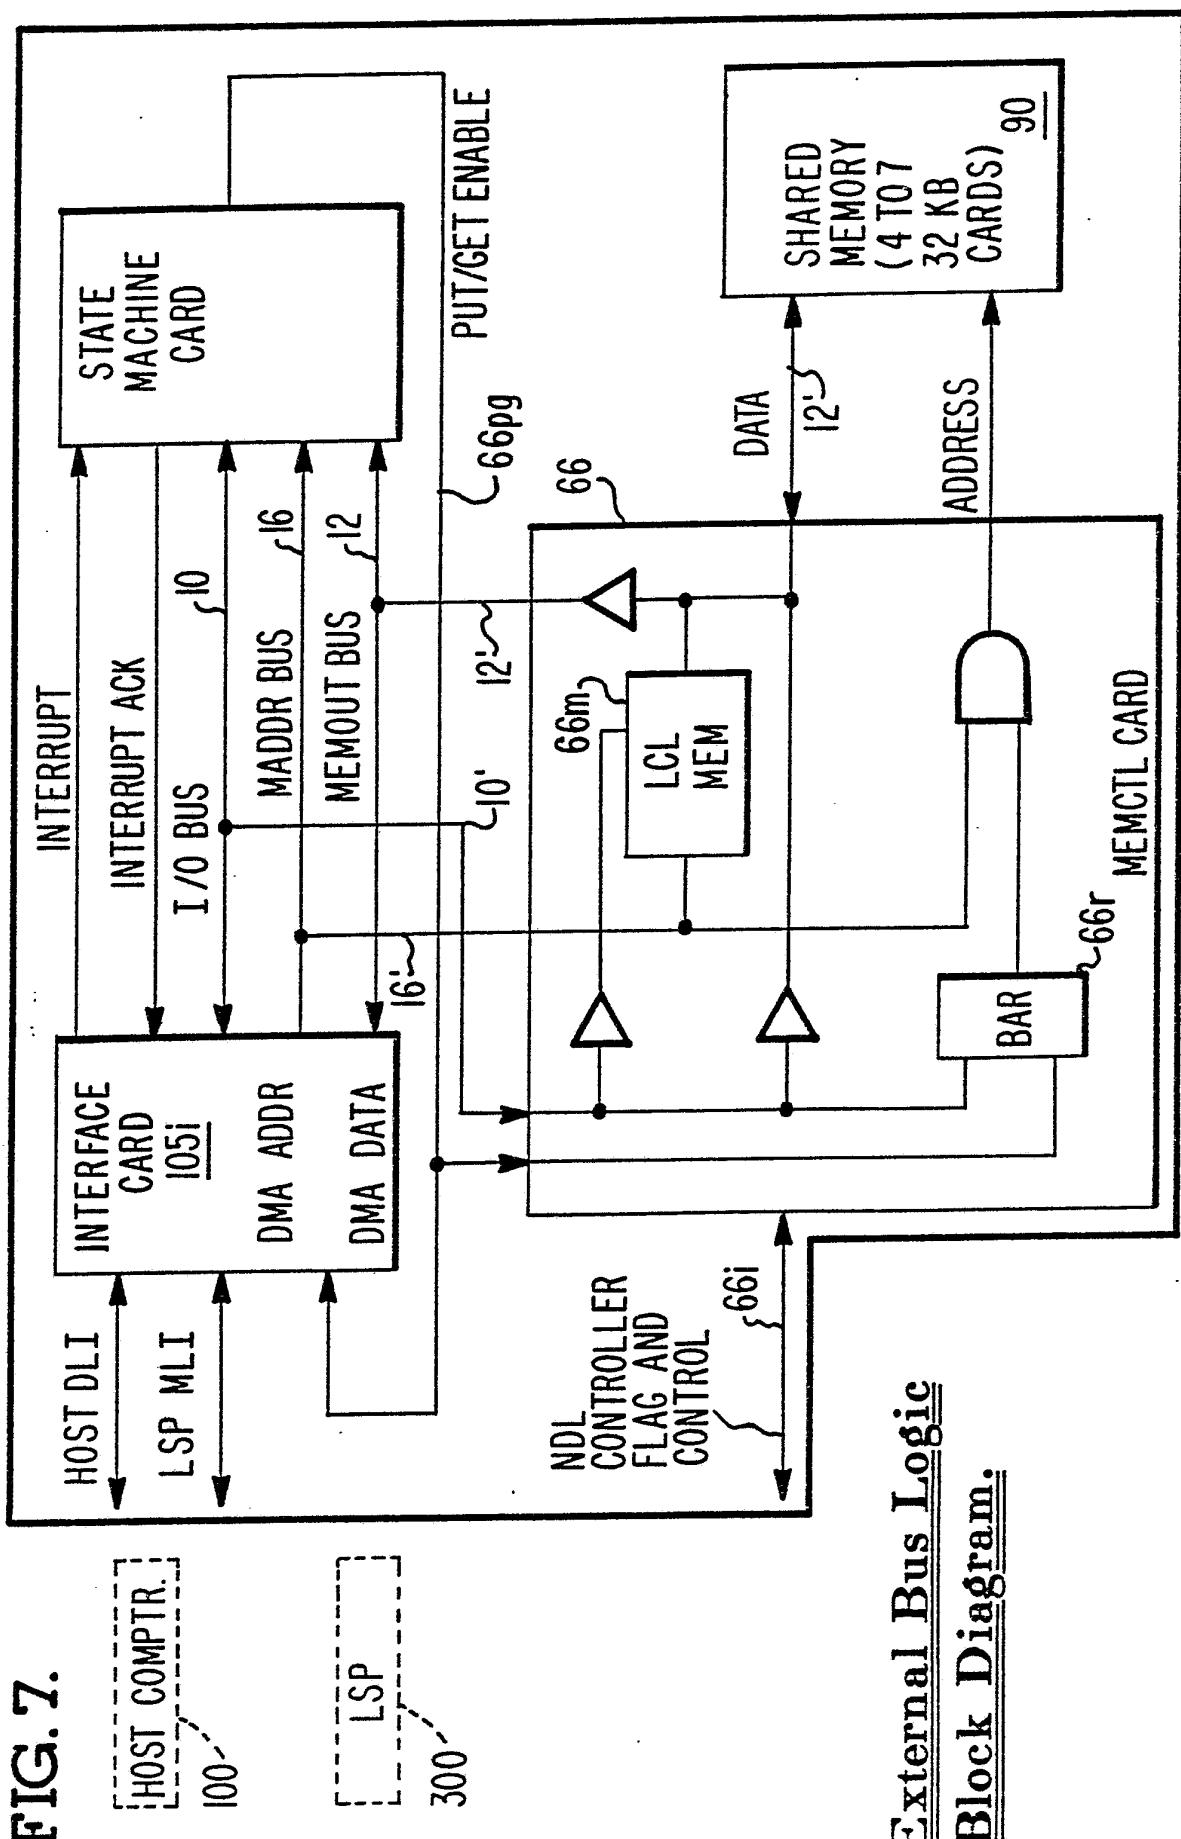


9 / 20

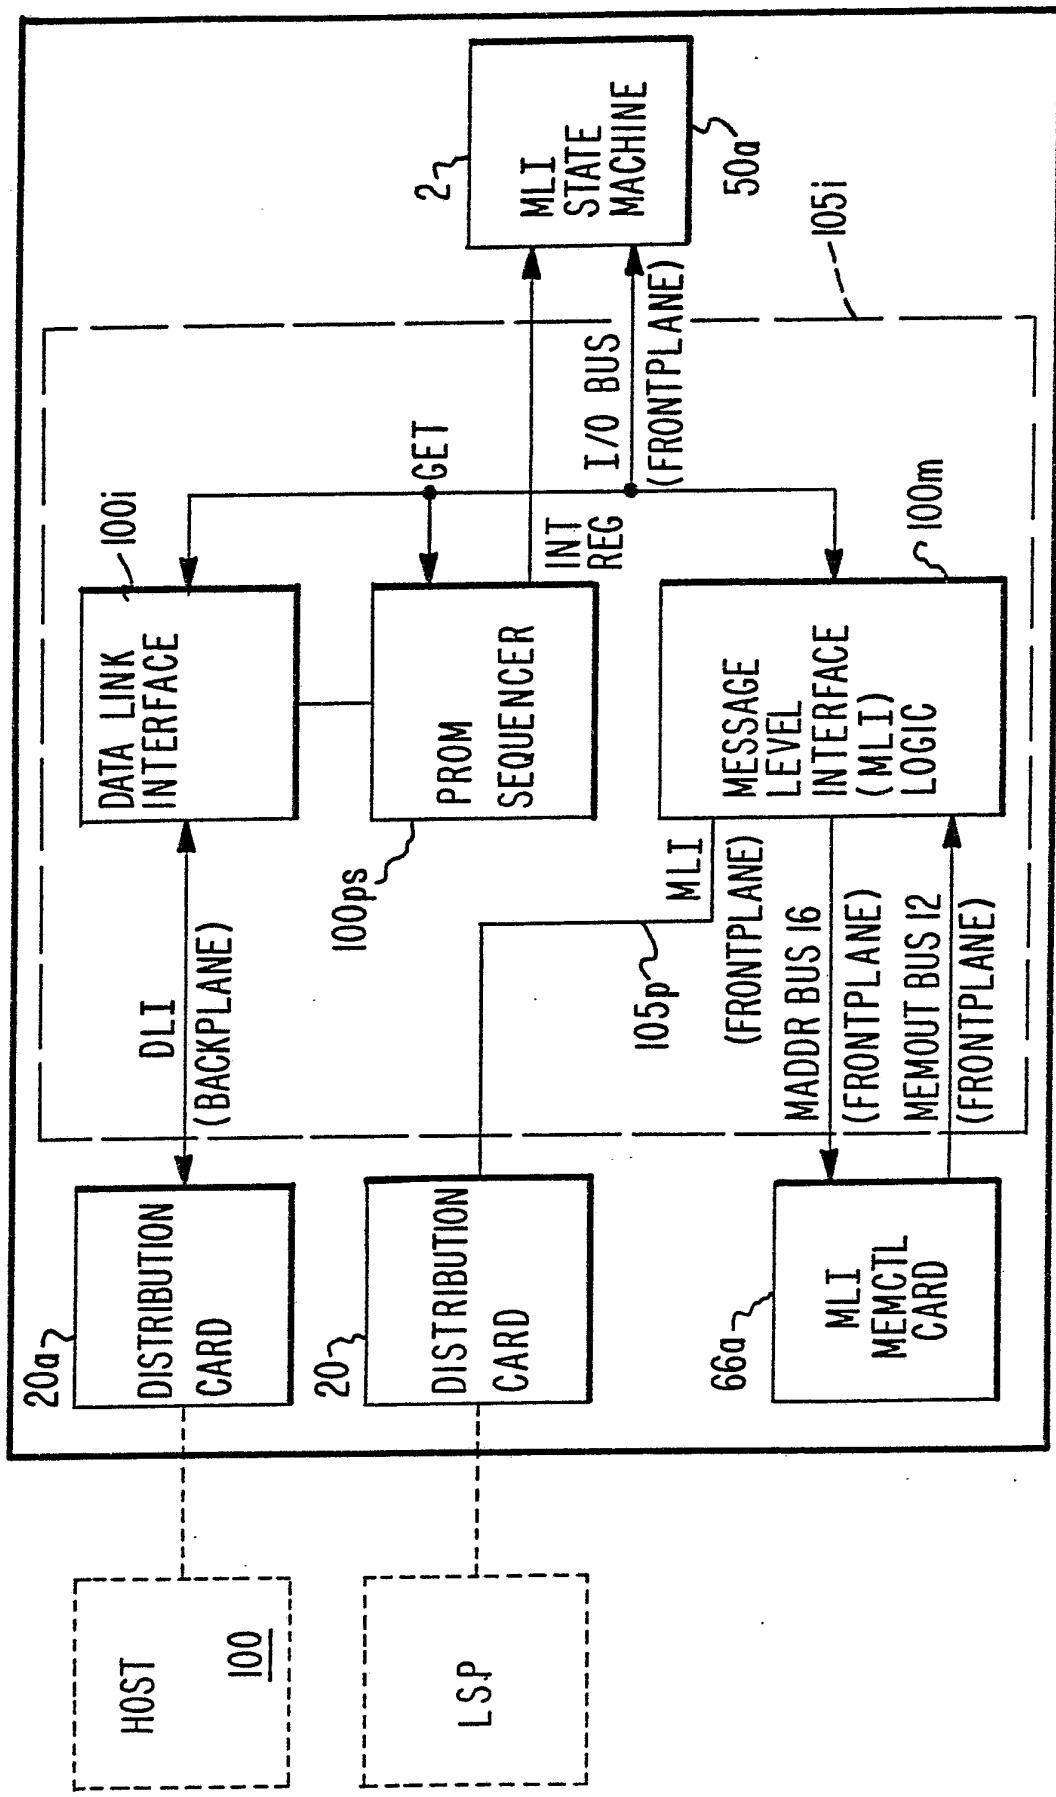
FIG.8. Interface Card (105i) Block Diagram.

SUBSTITUTE SHEET

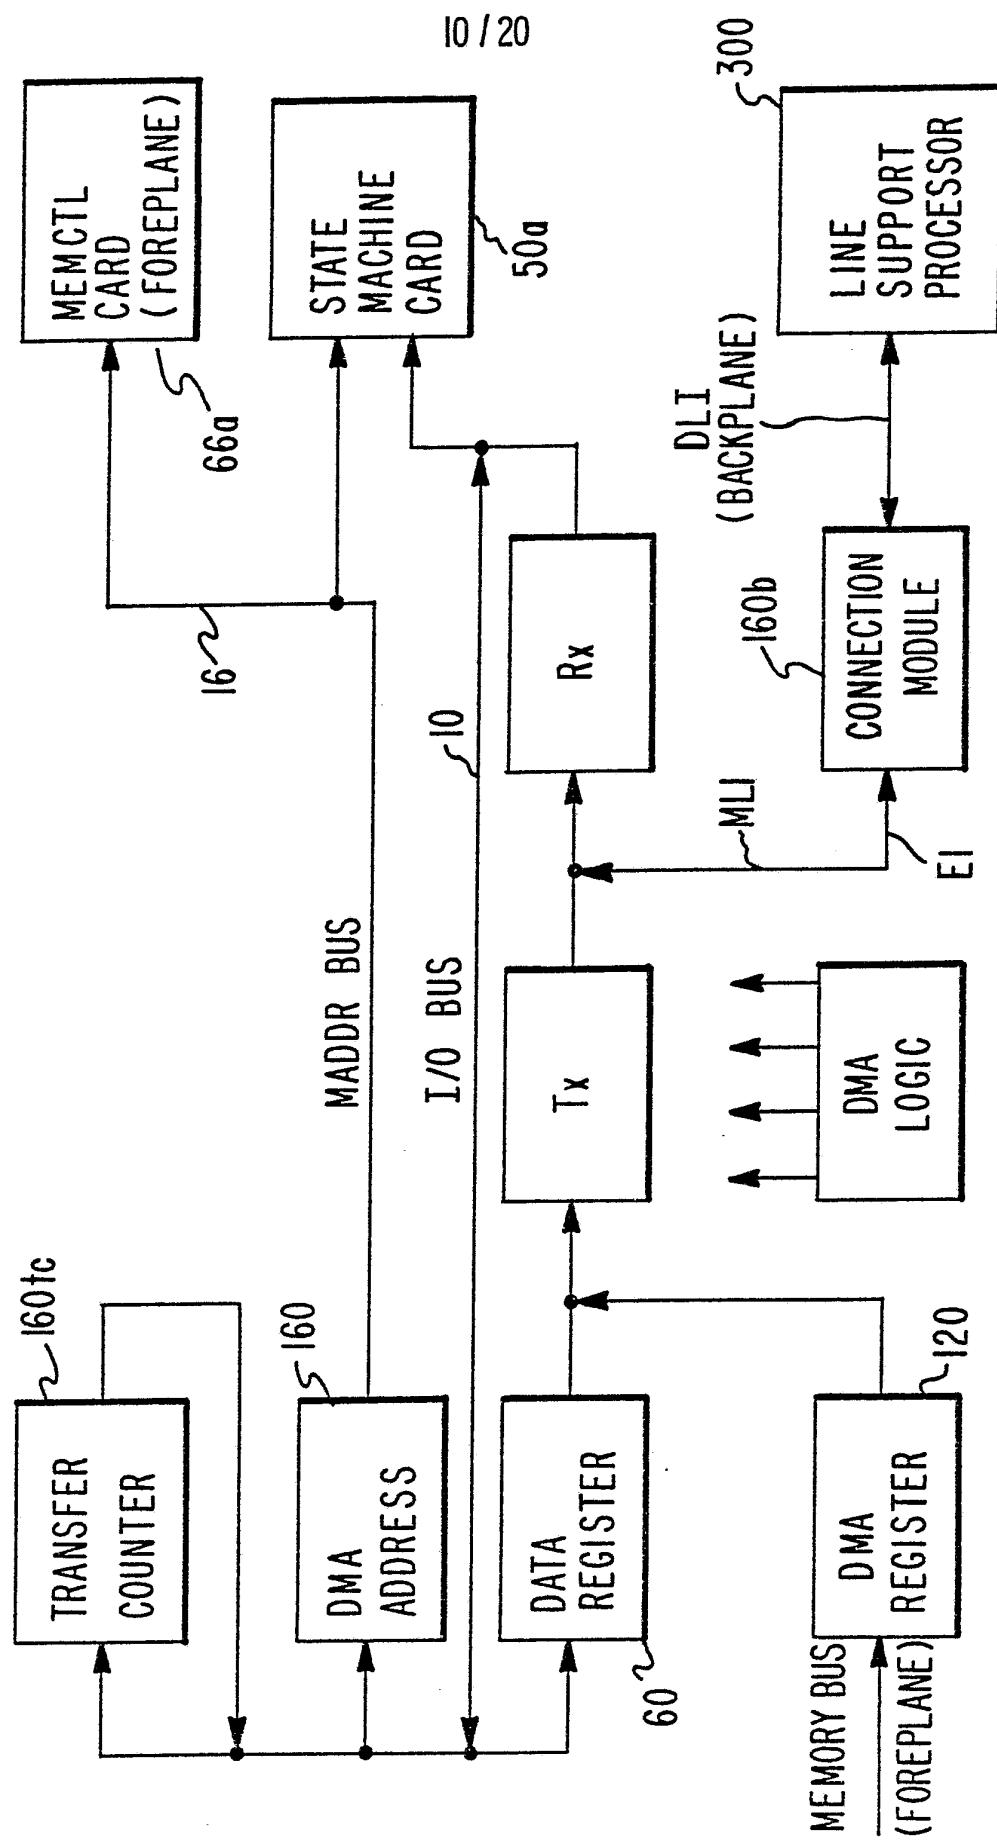


FIG. 9. MLI Interface Block Diagram.

II / 20

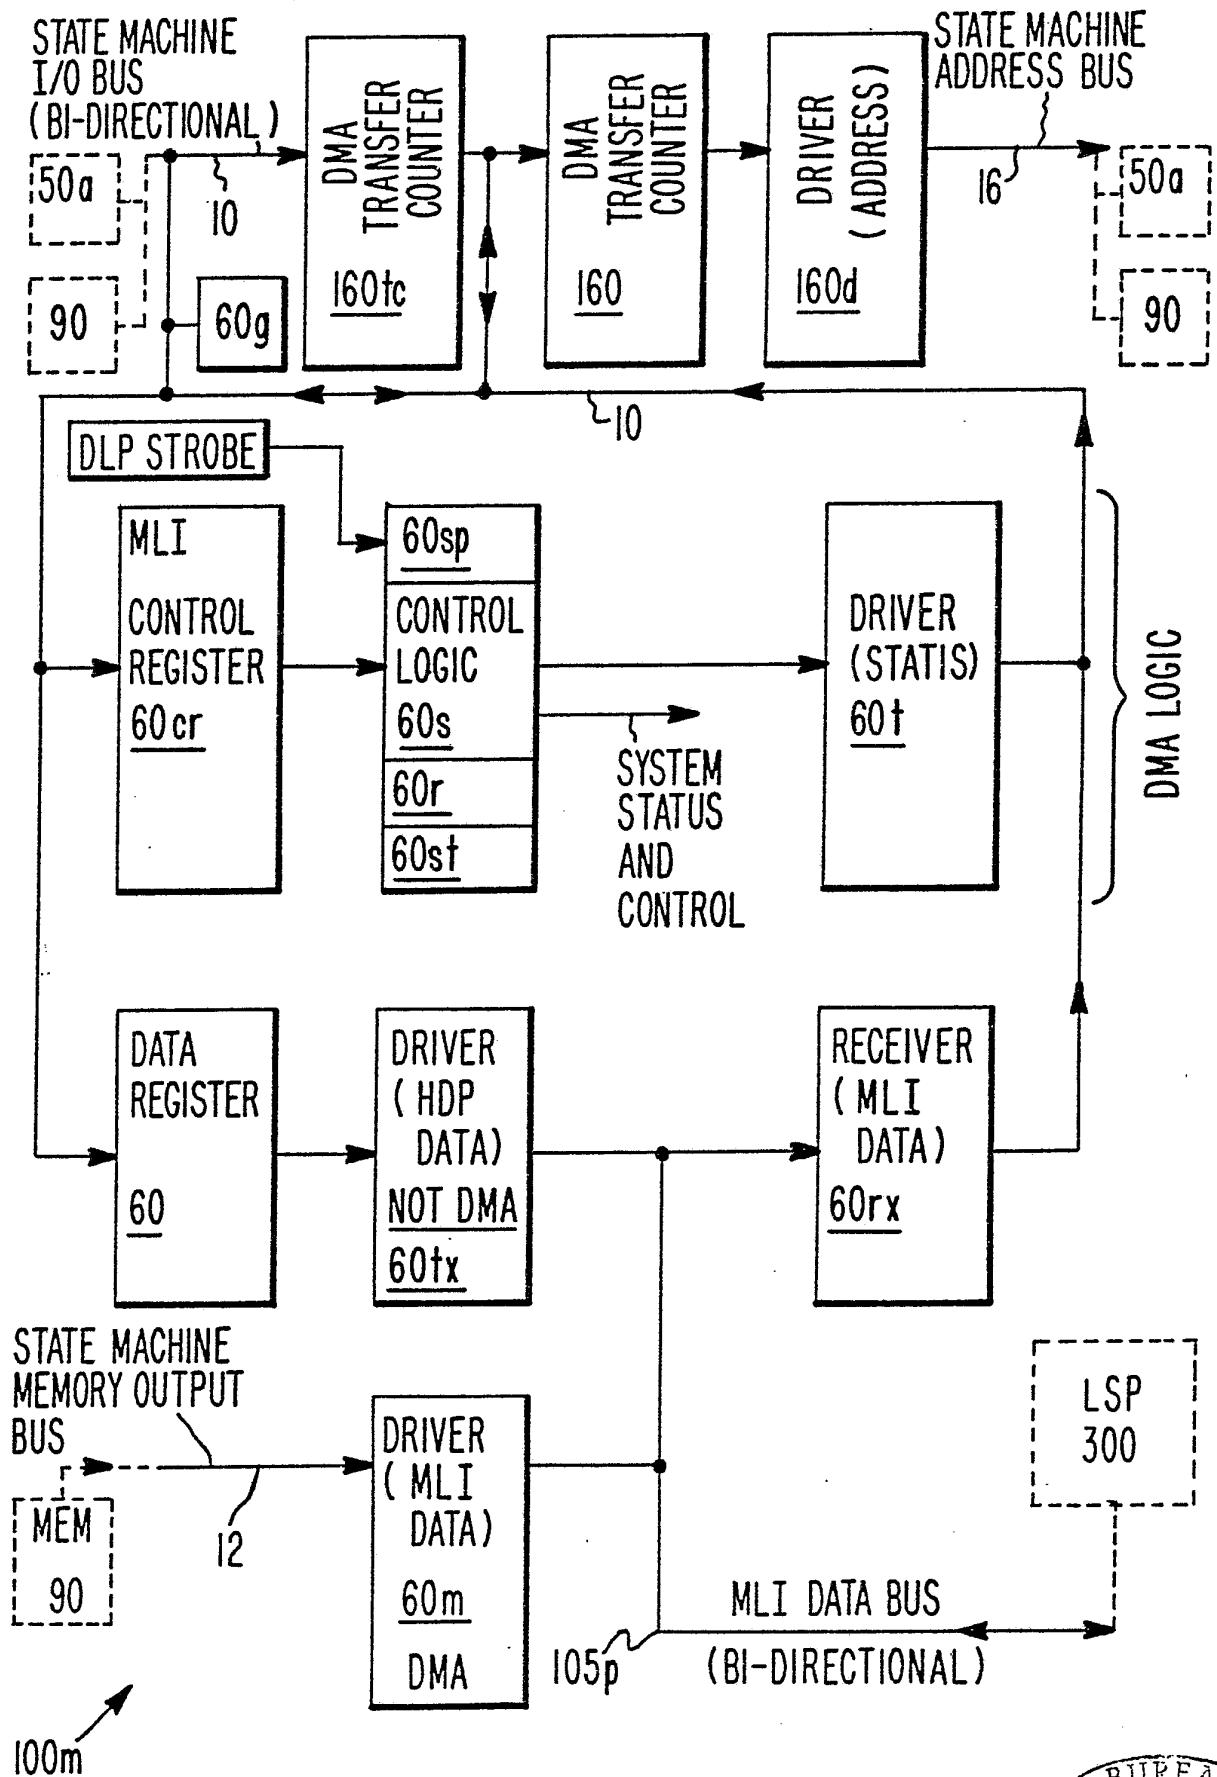FIG. 9A. MLI Interface Logic Primary Data Paths.

12 / 20

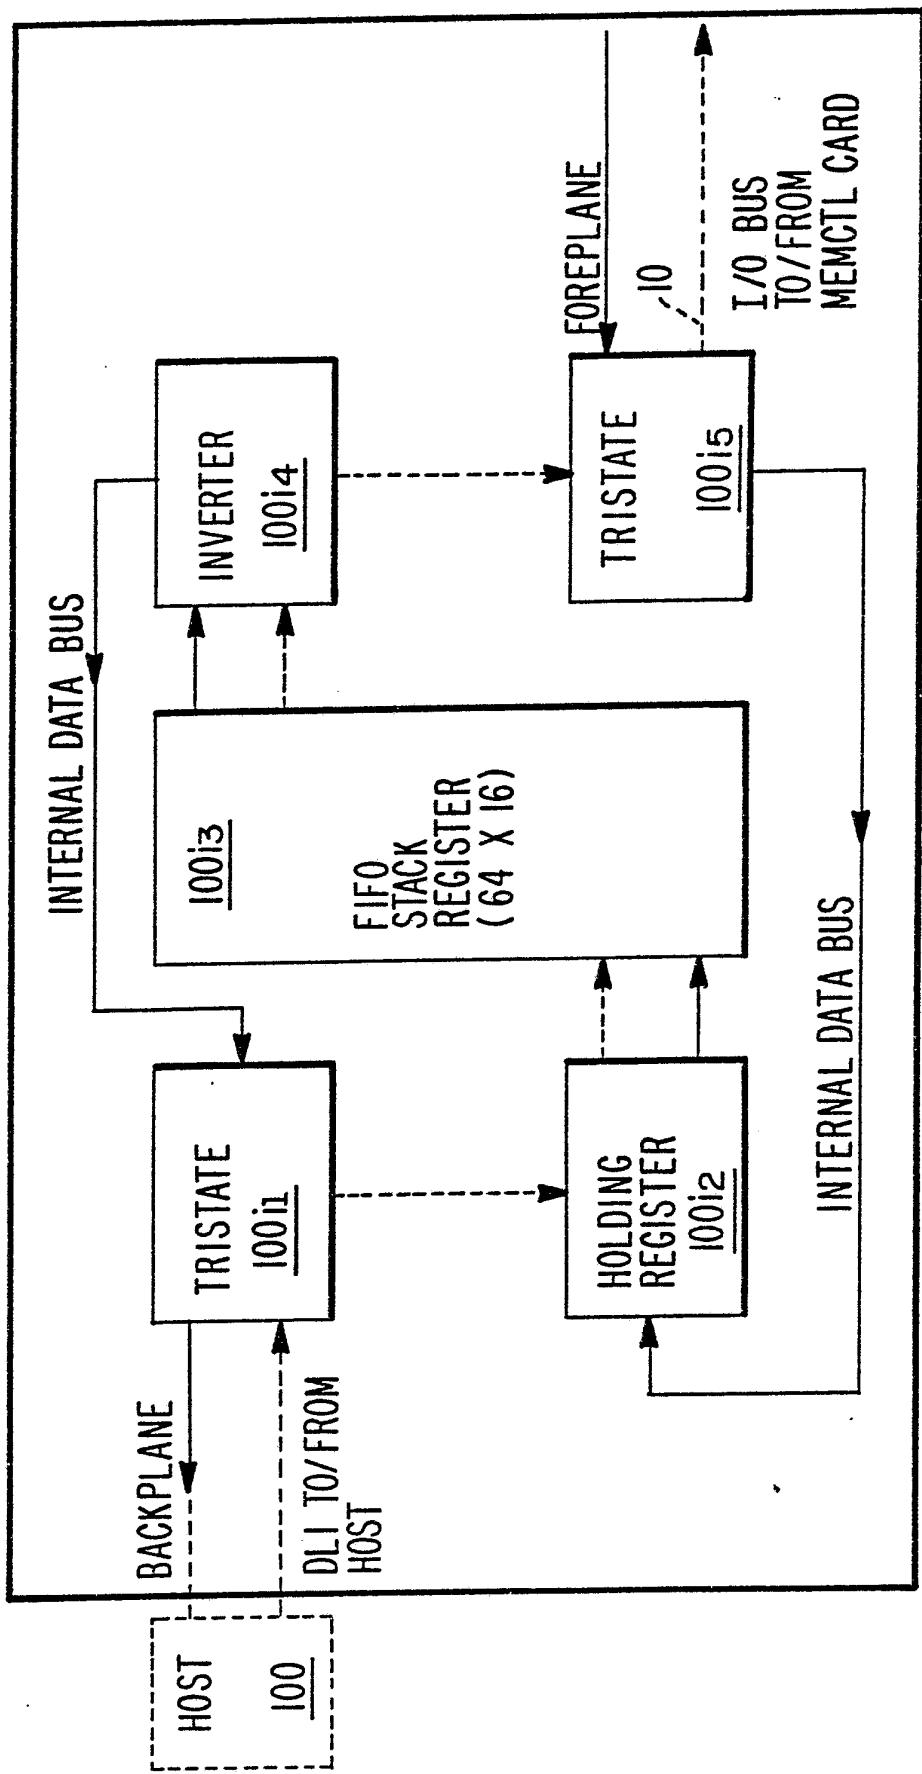FIG. 10. DLI Block Diagram.

SUBSTITUTE SHEET




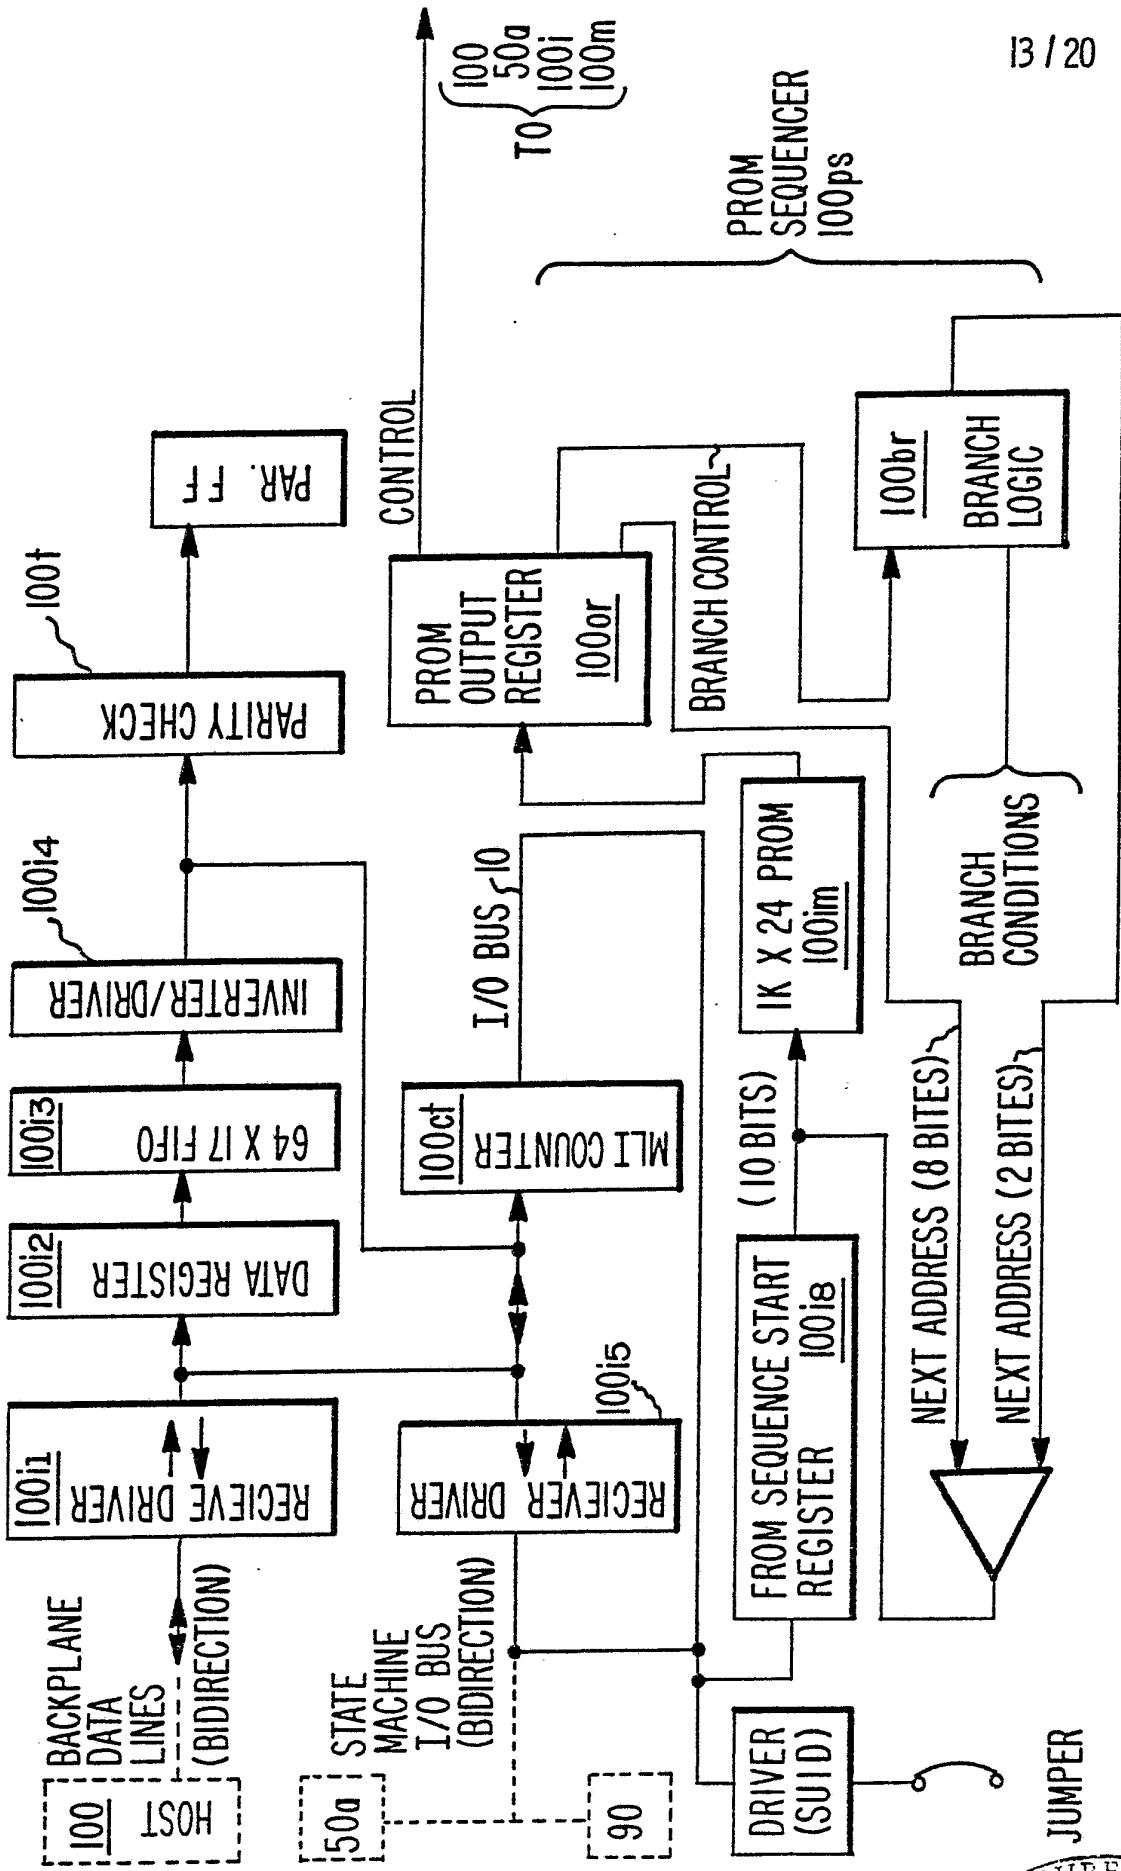
FIG.10A. DLI Interface Primary Data Paths.**SUBSTITUTE SHEET**

FIG.11. MEMCTL Block Diagram.

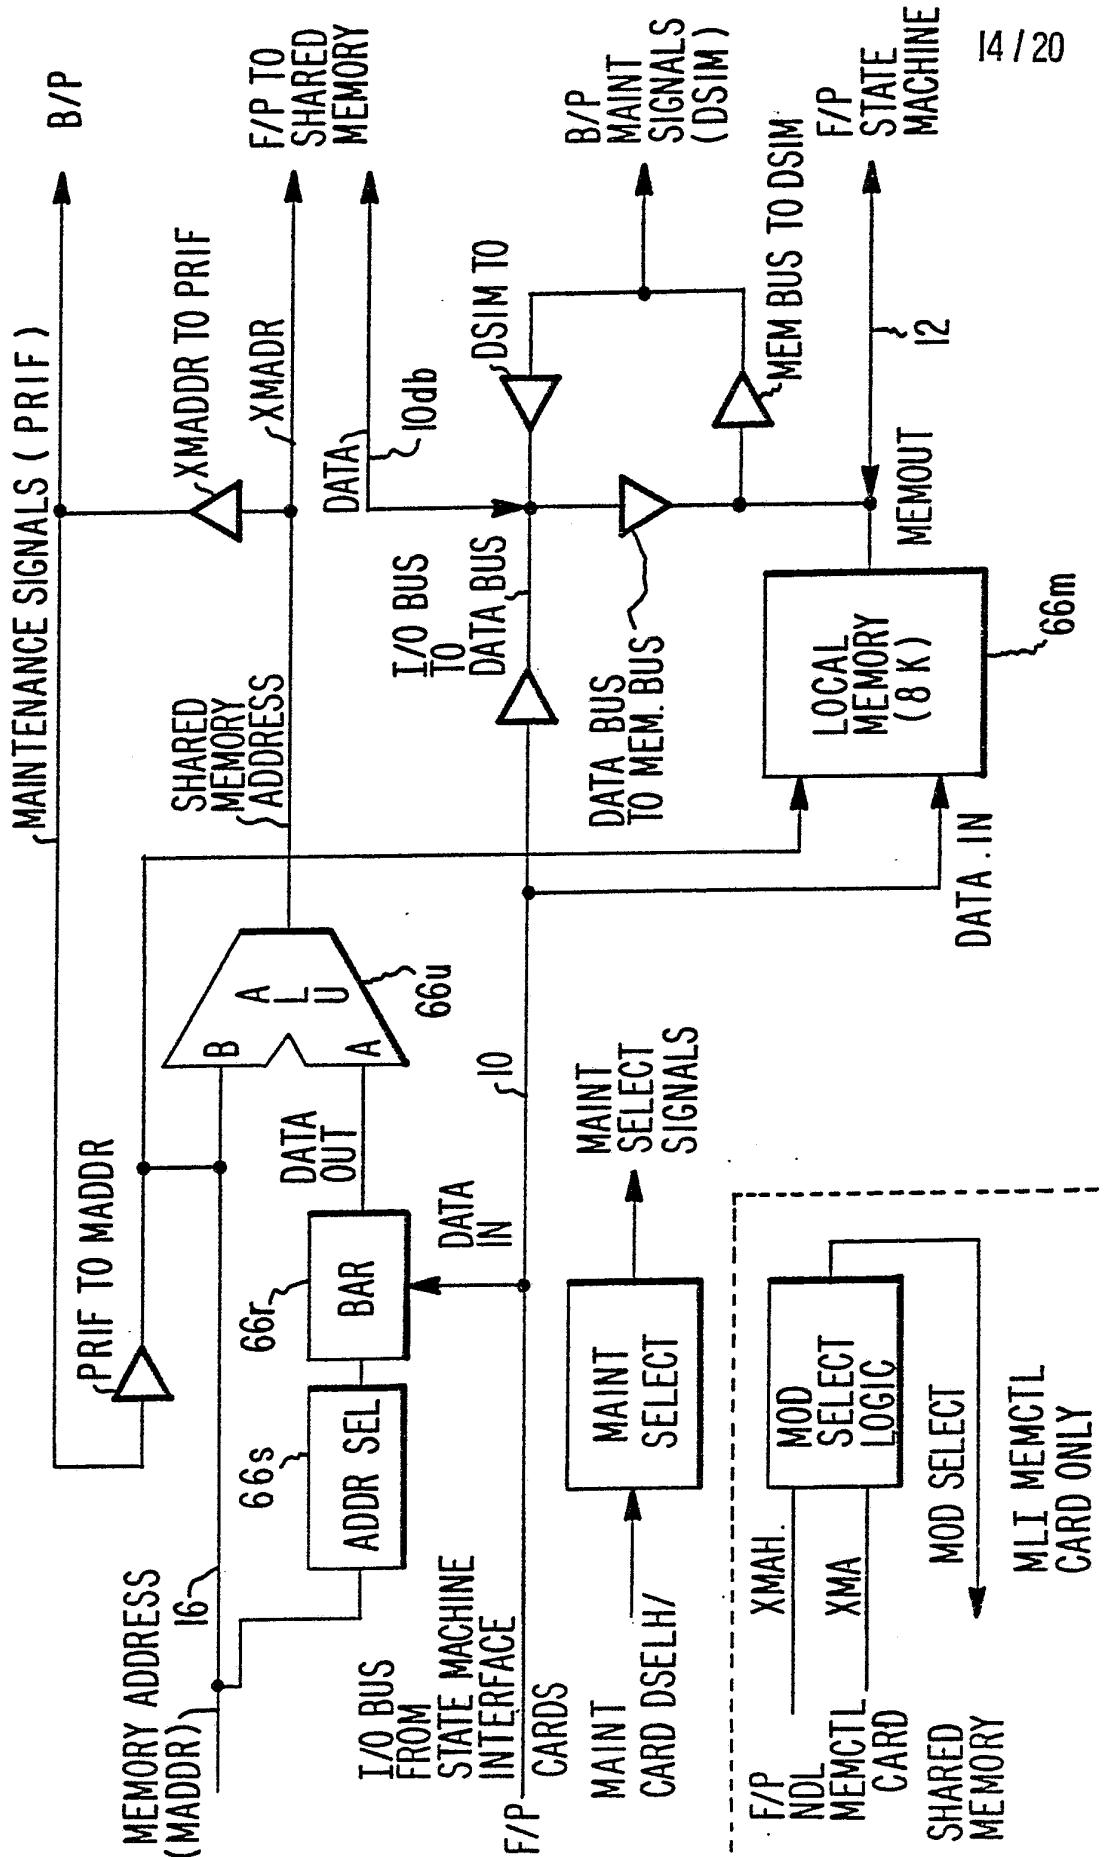

15 / 20



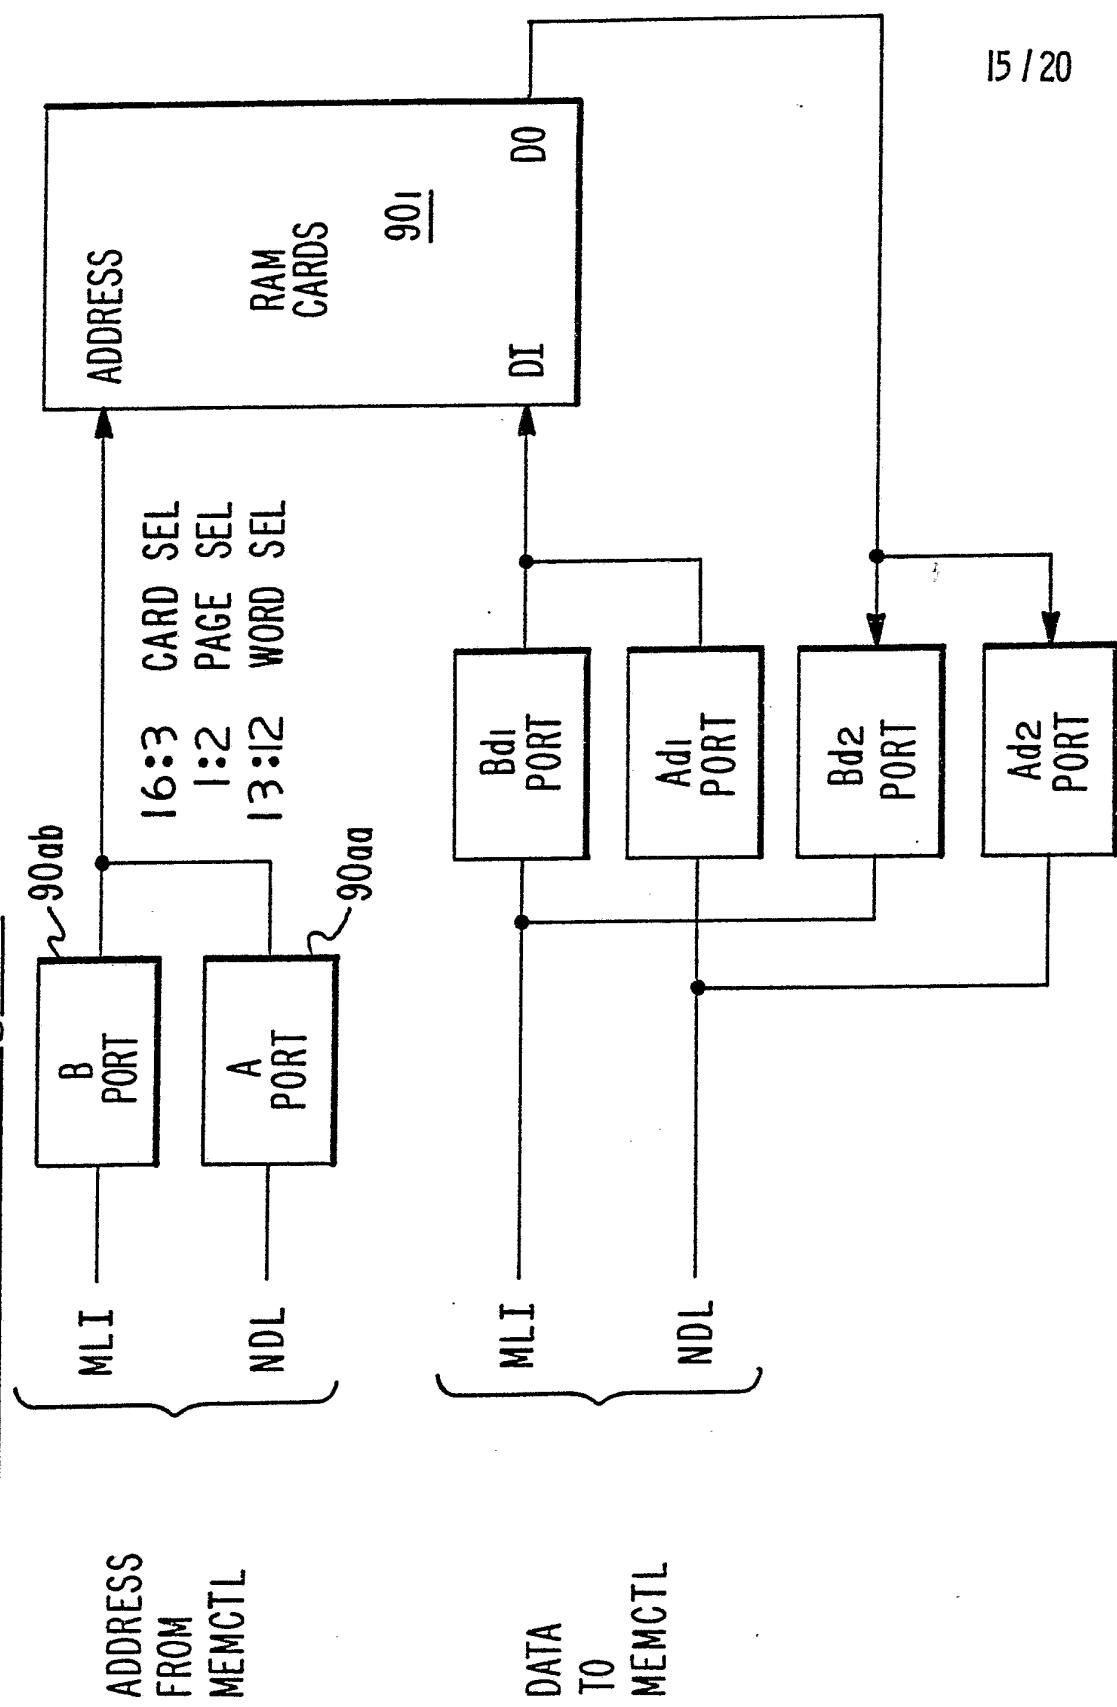
FIG. 12. 32 KB Ram Block Diagram.**SUBSTITUTE SHEET**

FIG.13. NSP Integrization.

SUBSTITUTE SHEET

FIG.14. Interrupt Logic Block Diagram.

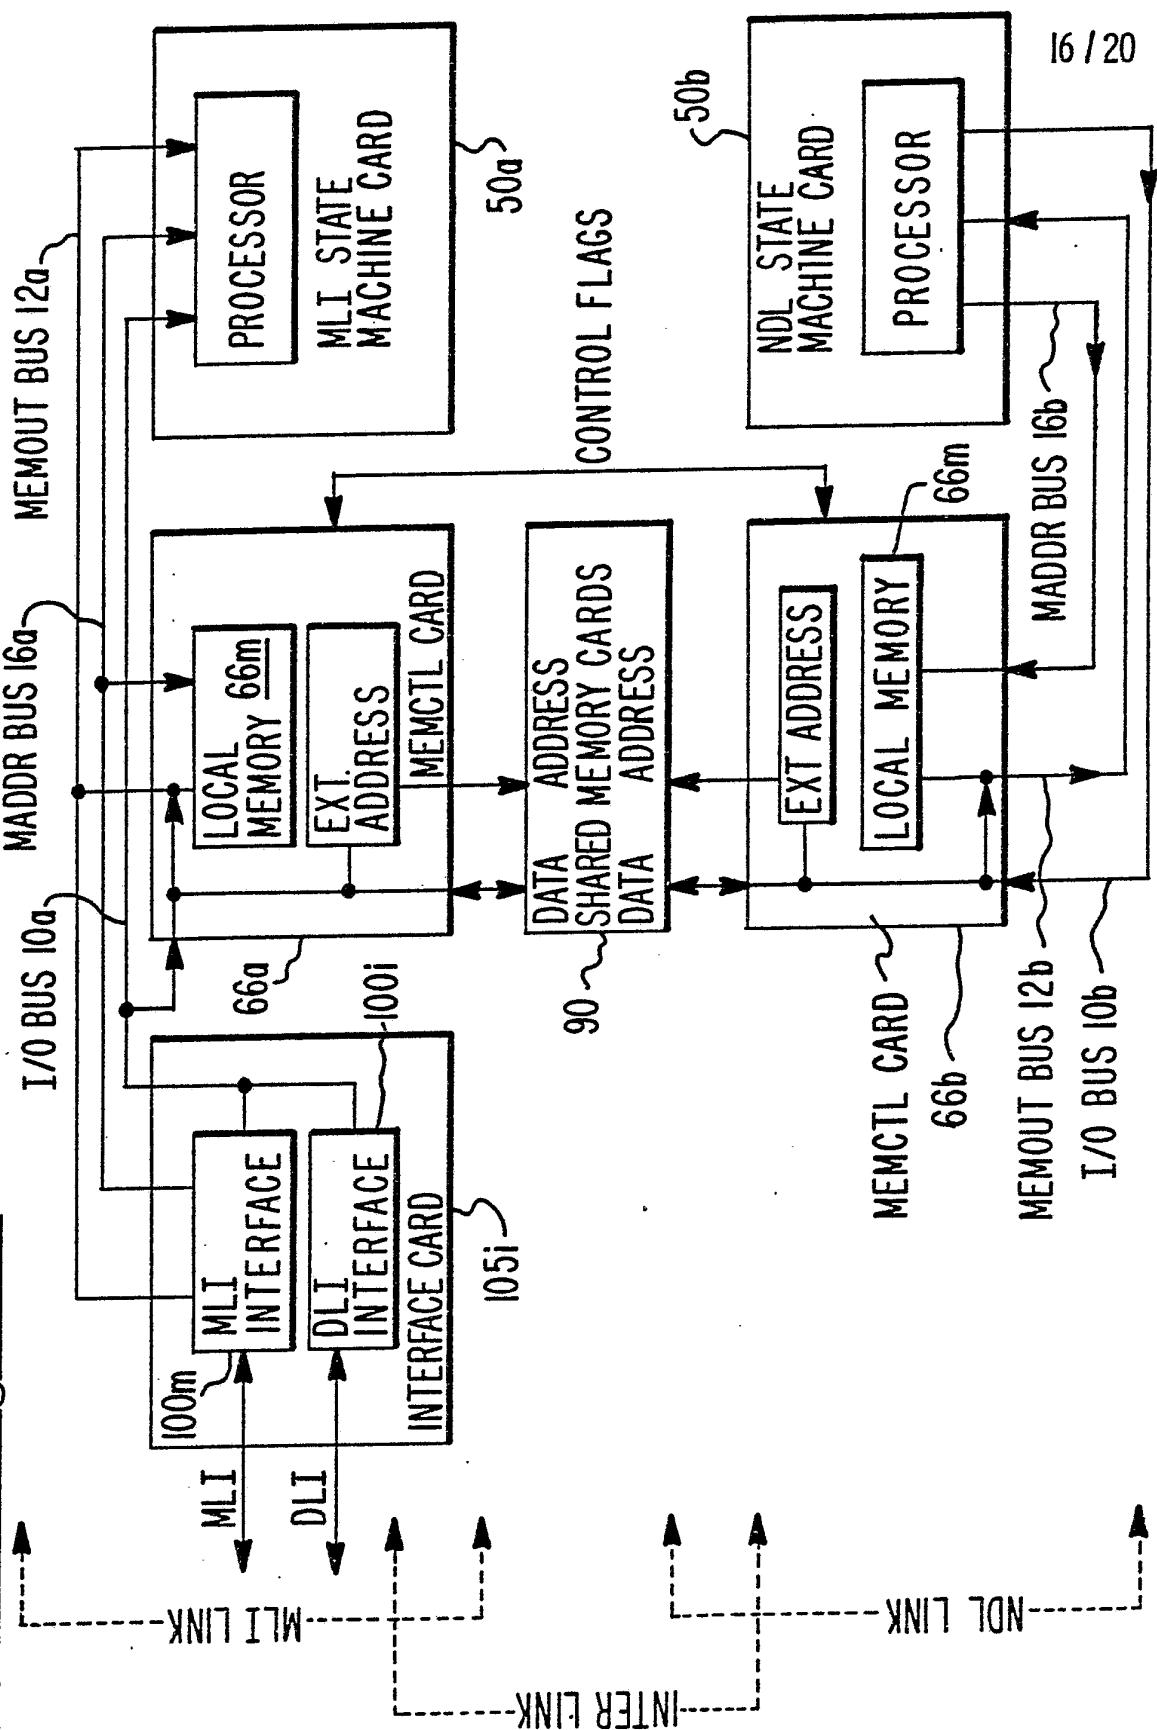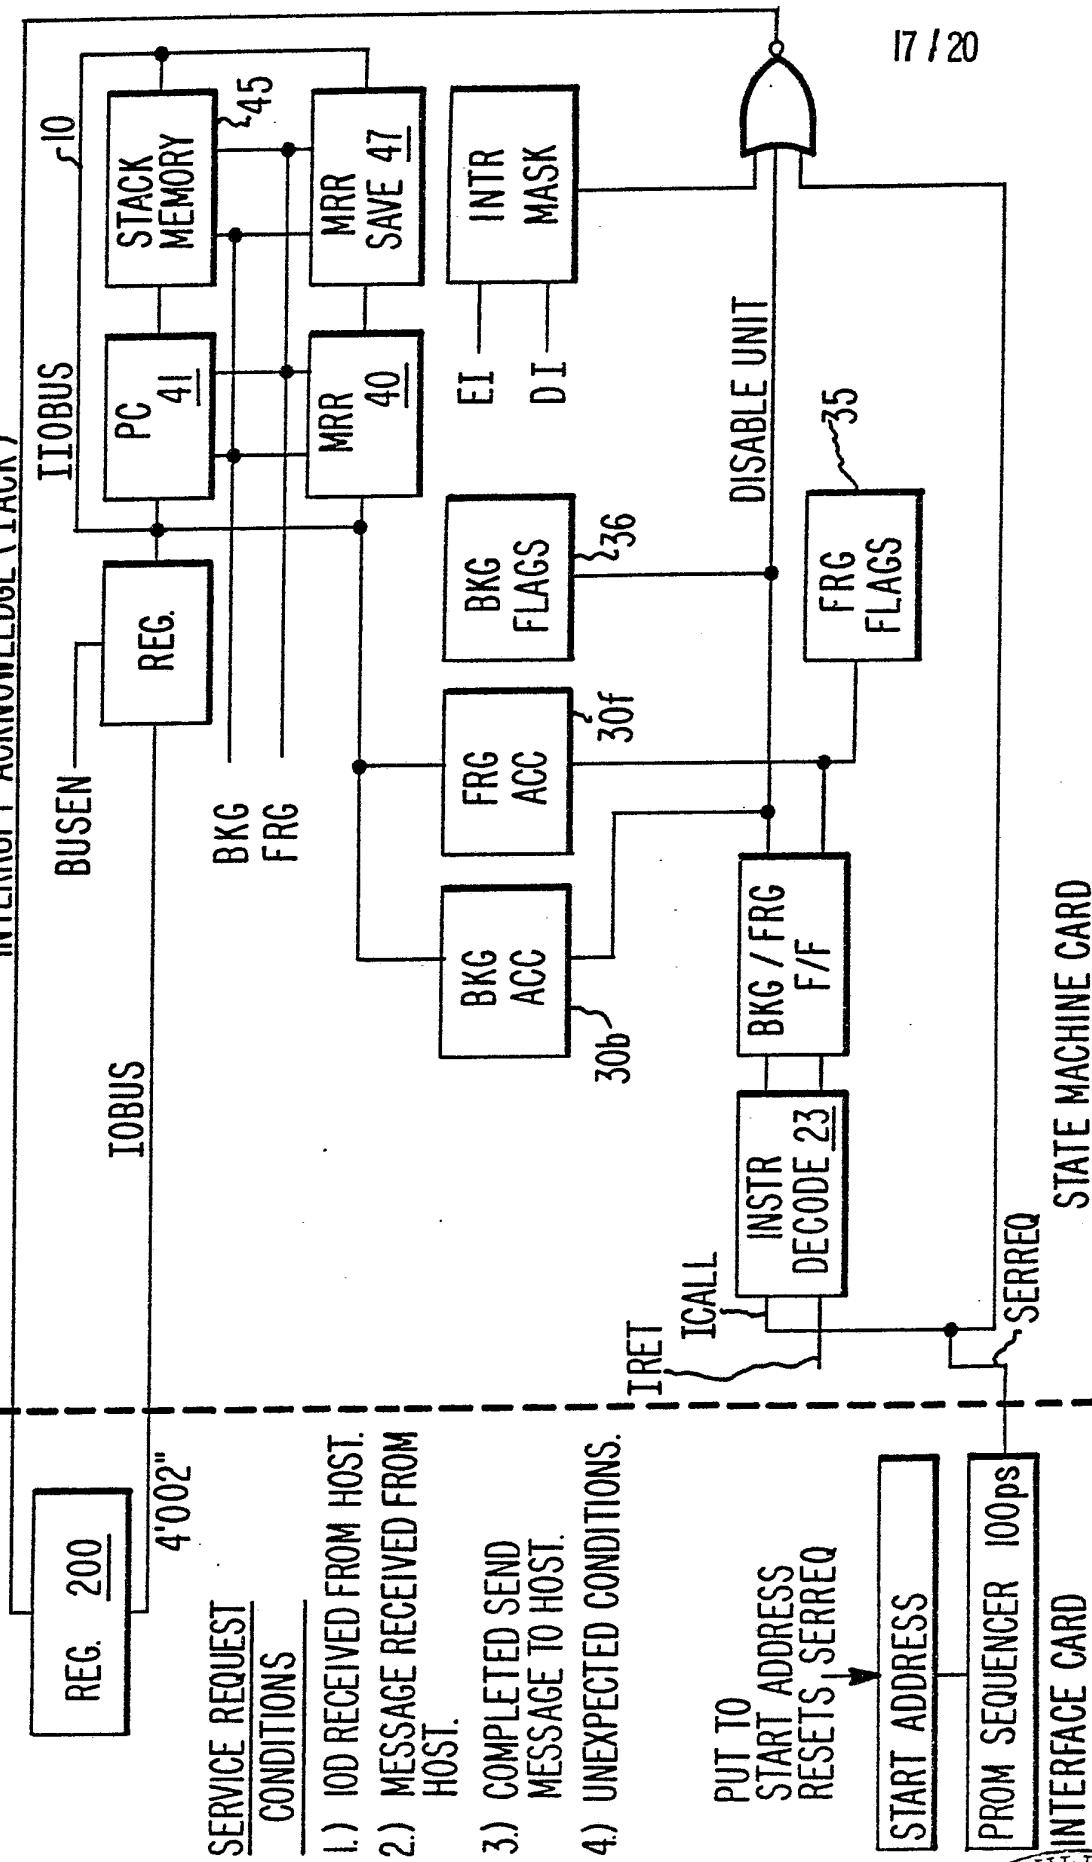

SUBSTITUTE SHEET

FIG.15. Memory Locations.

18 / 20

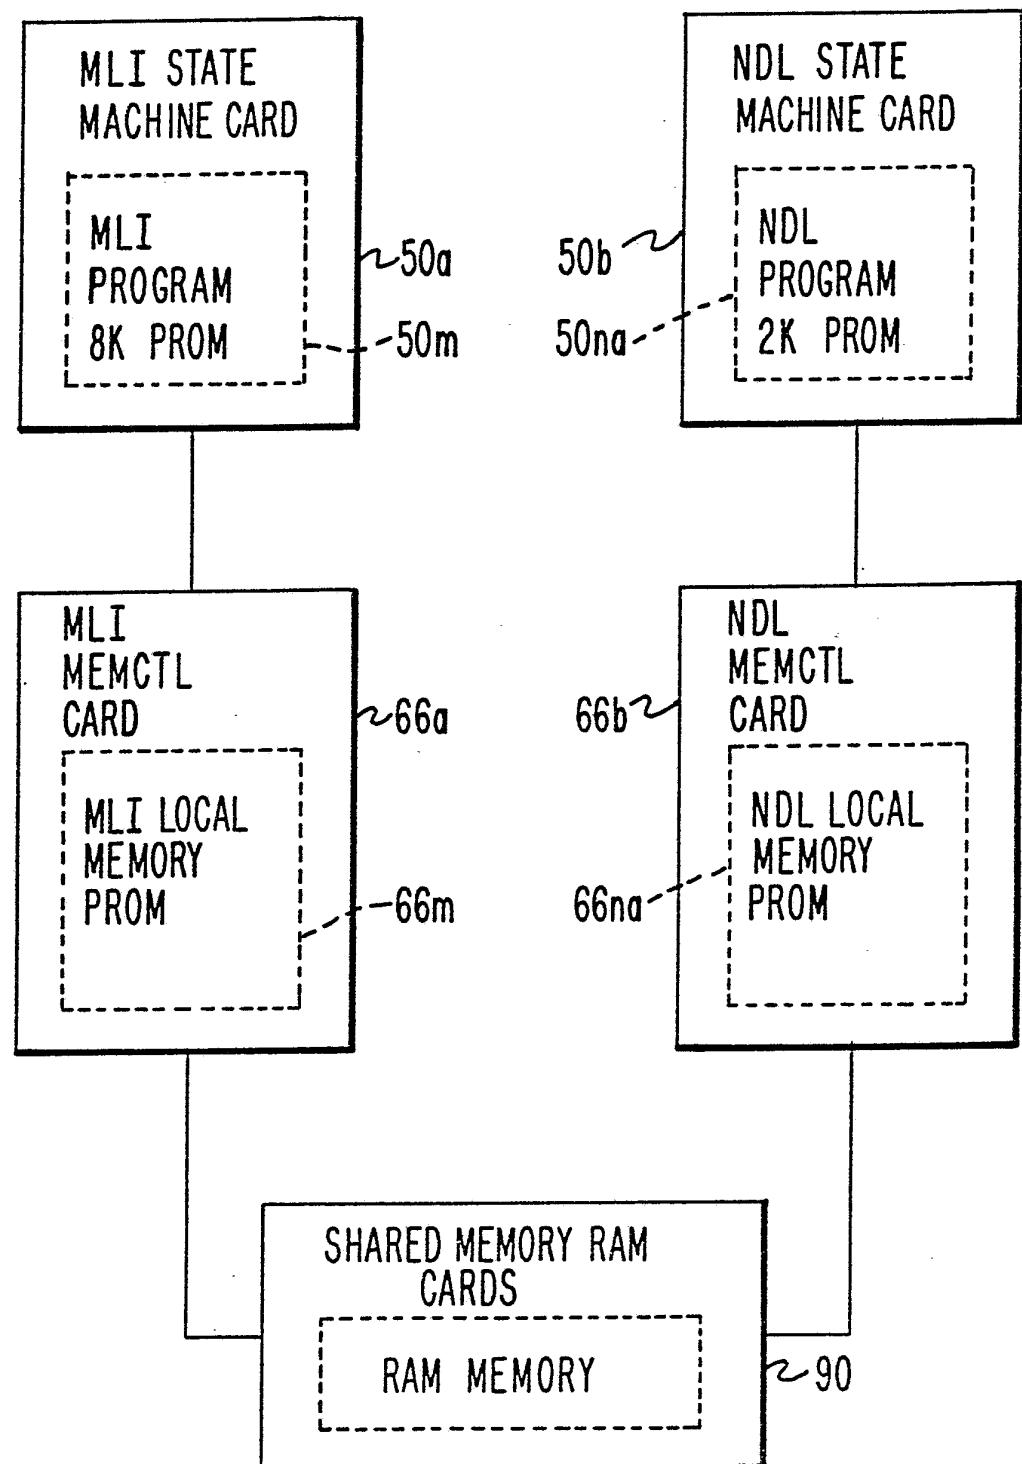
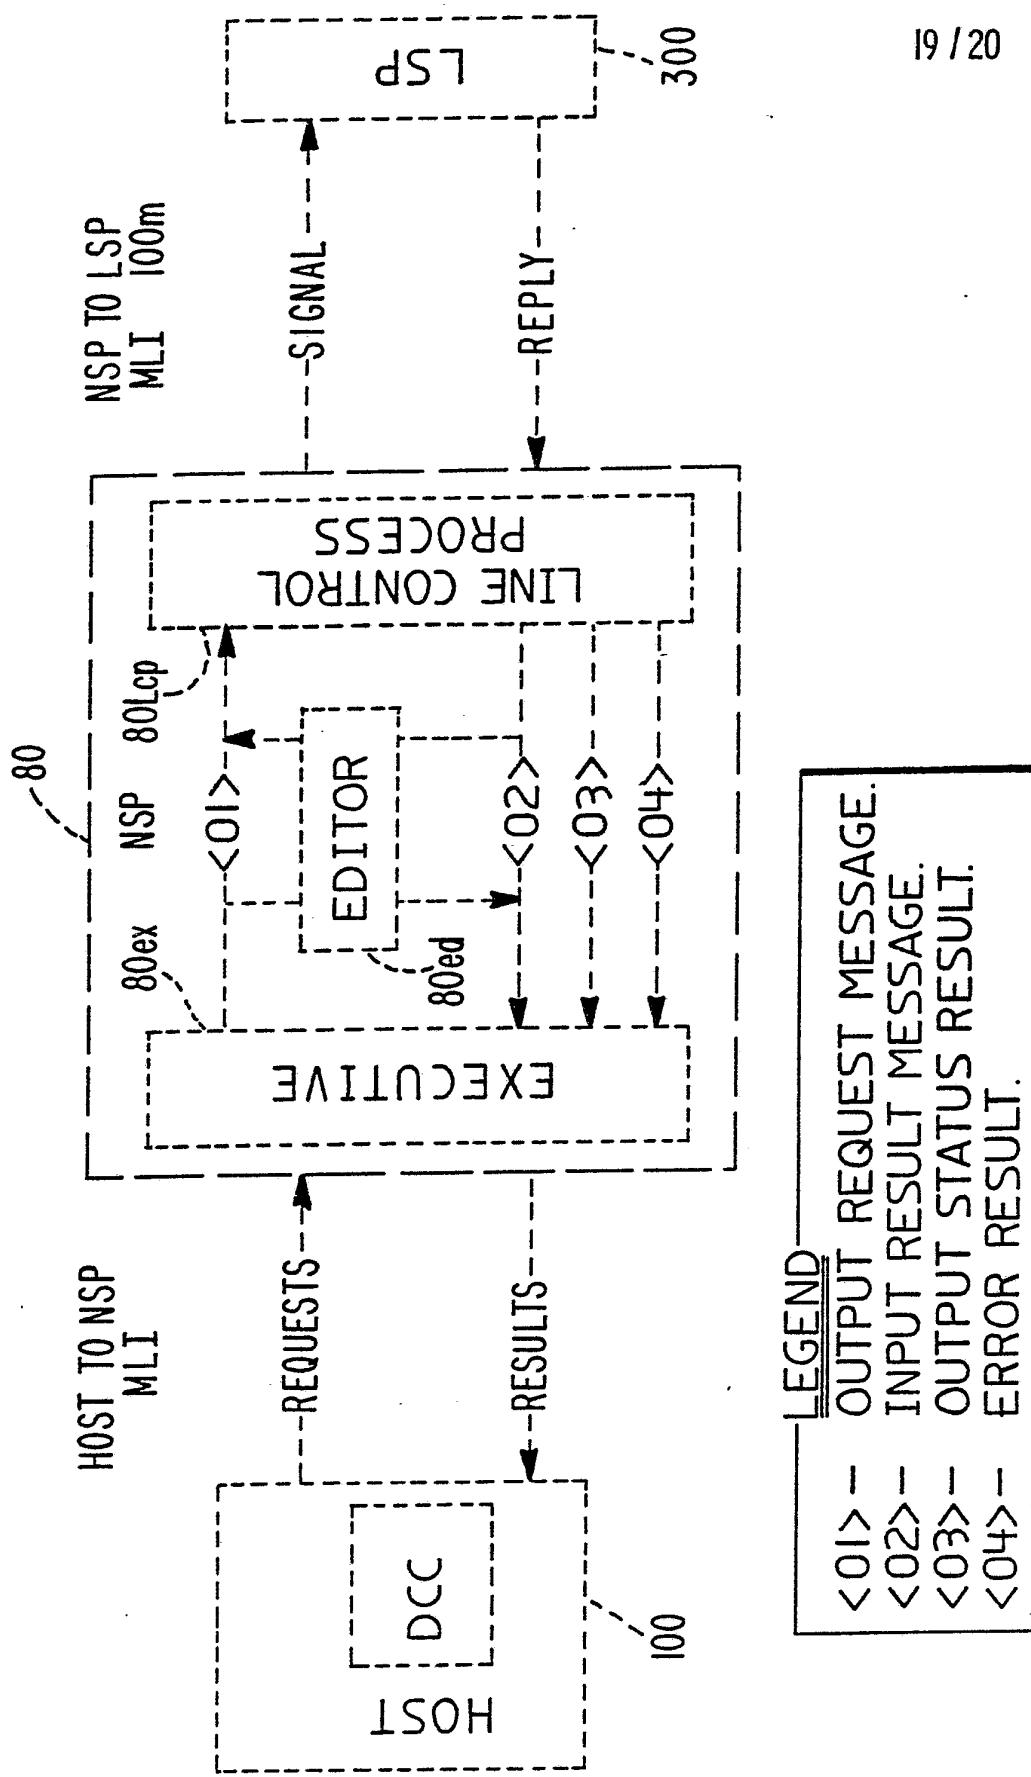
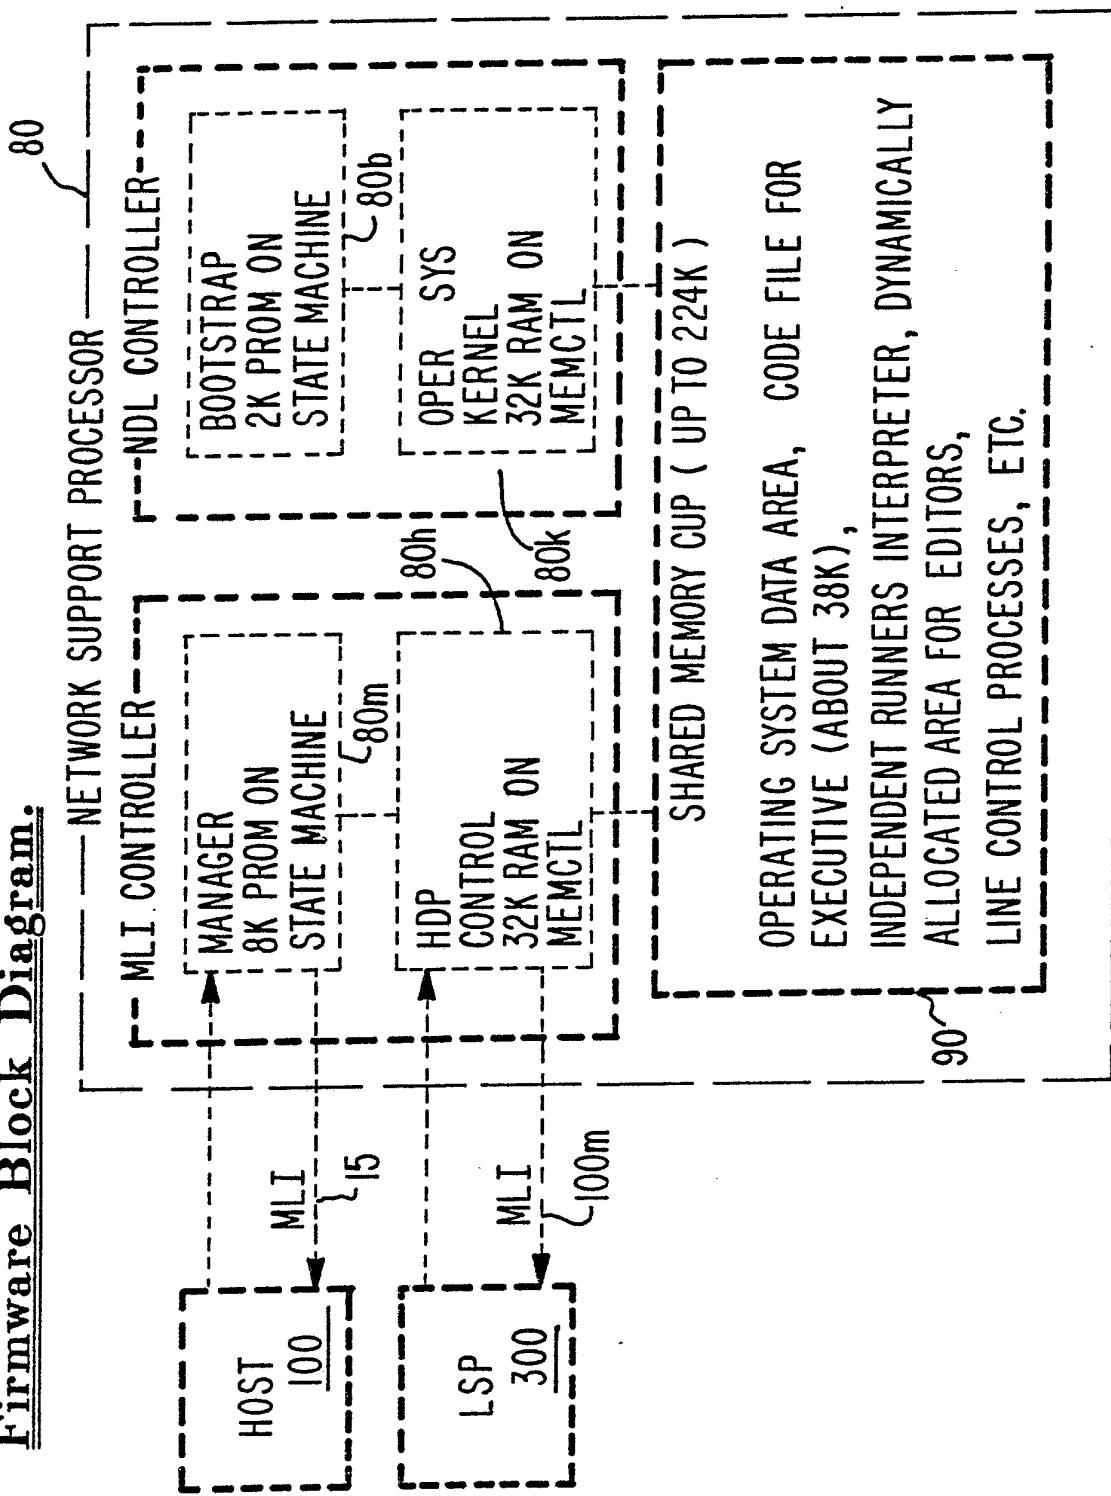


FIG. 16. Message Transfer Block Diagram.**SUBSTITUTE SHEET**

20 / 20

FIG. 17. Firmware Block Diagram.**SUBSTITUTE SHEET**

INTERNATIONAL SEARCH REPORT

International Application No PCT/US82/01673

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) *

According to International Patent Classification (IPC) or to both National Classification and IPC

Intl. Cl. ³ G06F 13/00

U.S. CL. 364/200

II. FIELDS SEARCHED

Minimum Documentation Searched ⁴

Classification System	Classification Symbols
U.S.	364/200, 900

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched *

III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁵

Category *	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X	US, A 4,272,819 (Matsumata et al) 09 June 1981	1 & 8
A	US, A 4,271,466 (Yamamoto et al) 02 June 1981	1-17
A	US, A 4,181,938 (Suzuki et al) 01 January 1980	1-17
A	US, A 4,137,565 (Mager et al) 30 January 1979	1-17
A	US, A 4,196,476 (Steiner) 01 April 1980	1-17

* Special categories of cited documents: ¹⁵

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on prior art claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search *

2/7/82

Date of Mailing of this International Search Report *

15 MAR 1983

International Searching Authority *

ISA/US

Signature of Authorized Officer *

Mark E. Rusbaum