



(86) Date de dépôt PCT/PCT Filing Date: 2011/08/02
(87) Date publication PCT/PCT Publication Date: 2012/02/23
(45) Date de délivrance/Issue Date: 2019/01/08
(85) Entrée phase nationale/National Entry: 2013/01/22
(86) N° demande PCT/PCT Application No.: US 2011/046166
(87) N° publication PCT/PCT Publication No.: 2012/024076
(30) Priorité/Priority: 2010/08/17 (EP10172993.7)

(51) Cl.Int./Int.Cl. *C11D 1/83* (2006.01),
C11D 1/14 (2006.01), *C11D 1/29* (2006.01)
(72) Inventeurs/Inventors:
BRAECKMAN, KARL GHISLAIN, BE;
KROLS, ROEL, BE;
BETTIOL, JEAN-LUC PHILIPPE, BE
(73) Propriétaire/Owner:
THE PROCTER & GAMBLE COMPANY, US
(74) Agent: WILSON LUE LLP

(54) Titre : DETERGENTS DURABLES ET STABLES POUR LAVER LA VAISSELLE A LA MAIN
(54) Title: STABLE SUSTAINABLE HAND DISH-WASHING DETERGENTS

(57) **Abrégé/Abstract:**

The need for a liquid hand dishwashing detergent composition, having excellent low temperature stability and delivering good cleaning and long-lasting suds, is met by incorporating a branched, alkoxyated nonionic surfactant, in combination with ethoxylated anionic surfactants having little or no branching, into the composition. Surprisingly, such a combination also provides an excellent sudsing profile during direct application dishwashing methods.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2012 (23.02.2012)

(10) International Publication Number
WO 2012/024076 A1

(51) International Patent Classification:

C11D 1/83 (2006.01) *C11D 1/29* (2006.01)
C11D 1/14 (2006.01)

Services, 299 East Sixth Street, Sycamore Building, 4th Floor, Cincinnati, Ohio 45202 (US).

(21) International Application Number:

PCT/US2011/046166

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:

2 August 2011 (02.08.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10172993.7 17 August 2010 (17.08.2010) EP

(71) Applicant (for all designated States except US): **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BRAECKMAN, Karl, Ghislain** [BE/BE]; Rue de la Chapelle 59, B-6280 Gerpinnes (BE). **KROLS, Roel** [BE/BE]; Louizastraat 11, B-2000 Antwerpen (BE). **BETTIOL, Jean-Luc, Philippe** [FR/BE]; Rue Louis Hap 218, B-1040 Brussel (BE).

Published:

— with international search report (Art. 21(3))

(74) Common Representative: **THE PROCTER & GAMBLE COMPANY**; c/o Eileen L. Hughett, Global Patent



WO 2012/024076 A1

(54) Title: STABLE SUSTAINABLE HAND DISH-WASHING DETERGENTS

(57) Abstract: The need for a liquid hand dishwashing detergent composition, having excellent low temperature stability and delivering good cleaning and long-lasting suds, is met by incorporating a branched, alkoxyated nonionic surfactant, in combination with ethoxylated anionic surfactants having little or no branching, into the composition. Surprisingly, such a combination also provides an excellent sudsing profile during direct application dishwashing methods.

STABLE SUSTAINABLE HAND DISH-WASHING DETERGENTS

FIELD OF THE INVENTION

The present invention relates to stable liquid detergent compositions for dishes, comprising low
5 branched anionic surfactants and branched nonionic surfactants that deliver effective grease-
cleaning with enduring suds.

BACKGROUND OF THE INVENTION

Consumers desire hand dish-washing products that deliver both long lasting grease cleaning and
10 long lasting suds. Additionally, more and more consumers are looking for products that contain a
greater proportion of ingredients that are derived from natural, renewable sources. These include
liquid hand dishwashing detergent compositions containing higher levels of surfactants derived
from renewable sources, and having less surfactants derived from crude oil. However, since
natural surfactants have little or no branching, such compositions produce lower levels of suds.
15 Even worse, such detergent compositions have low suds-mileage. That is, the suds endurance is
less than what most consumers would like.

In addition, high levels of linear anionic surfactants, such as those derived from renewable
natural sources, but also linear synthetic surfactants, lead to worse stability of the resultant
composition at low temperature.

20 Therefore, a need remains for a liquid hand dishwashing detergent composition providing good
cleaning and long lasting suds, while having excellent low temperature stability, which utilizes
anionic surfactants having little or no branching.

It has been surprisingly found that small amounts of a branched, alkoxyated nonionic surfactant,
in combination with ethoxyated anionic surfactants having little or no branching, provide
25 excellent grease cleaning and long-lasting suds. More surprisingly, by using the branched
alkoxyated nonionic surfactant, in combination with anionic surfactant having a minimum
degree of ethoxylation and little or no branching, a liquid hand dishwashing detergent
composition can be formulated having excellent low temperature stability.

WO 9533025, US 5968888, US 2007/0123447 A1, US 2005/0170990 A1, WO 2006/041740 A1,
30 and US 6,008,181 disclose liquid hand dishwashing detergent compositions comprising branched
surfactants.

SUMMARY OF THE INVENTION

According to the present invention, there is provided a liquid hand dishwashing detergent composition comprising: from 2 % to 70 % by weight of an ethoxylated anionic surfactant derived from a fatty alcohol, wherein: at least 80% by weight of said fatty alcohol is linear, and said fatty alcohol has an average degree of ethoxylation of from 0.8 to 4; and from 0.1 to 5% by weight of an alkoxyated branched nonionic surfactant, having an average degree of alkoxylation of from 1 to 40; wherein the total amount of surfactant is from 10 to 85 % by weight of the liquid detergent composition. The present invention further encompasses a method for hand washing dishes, using said composition, wherein the method comprises the step of contacting said composition in undiluted form, with the dish.

DETAILED DESCRIPTION OF THE INVENTION

As used herein "liquid hand dishwashing detergent composition" refers to those compositions
5 that are employed in manual (i.e. hand) cleaning of dishes. Such compositions are generally high sudsing or foaming in nature. As used herein "cleaning" means applying the liquid hand dishwashing detergent composition to a surface for the purpose of removing undesired residue such as soil, grease, stains and/or disinfecting.

As used herein "dish", "dishes", and "dishware" means a surface such as dishes, glasses, pots,
10 pans, baking dishes and flatware, made from ceramic, china, metal, glass, plastic (polyethylene, polypropylene, polystyrene, etc.) and wood.

As used herein "grease" means materials comprising at least in part (i.e., at least 0.5 wt% by weight of the grease) saturated and unsaturated fats and oils, preferably oils and fats derived from animal sources such as beef and/or chicken.

15 As used herein "suds profile" means the amount of sudsing (high or low) and the persistence of sudsing (how sustained or long lasting the suds are) throughout the washing process, resulting from the use of the liquid detergent composition. As used herein "high sudsing" or "long lasting suds" refers to liquid hand dishwashing detergent compositions which both generate a high level of suds (i.e. a level of sudsing considered acceptable to the consumer) and where the level of
20 suds is sustained during the dishwashing operation. This is particularly important with respect to liquid dishwashing detergent compositions as the consumer perceives high sudsing as an indicator of the performance of the detergent composition. Moreover, the consumer also uses the

sudsing profile as an indicator that the wash solution still contains active detergent ingredients. The consumer usually applies additional liquid hand dishwashing detergent composition when the suds subside. Thus, low sudsing liquid dishwashing detergent composition formulation will tend to be used by the consumer more frequently than is necessary.

5 By “in its neat form”, it is meant herein that said composition is applied directly onto the surface to be treated, or onto a cleaning device or implement such as a dish cloth, a sponge or a dish brush without undergoing any significant dilution by the user (immediately) prior to application. “In its neat form”, also includes slight dilutions, for instance, arising from the presence of water on the cleaning device, or the addition of water by the consumer to remove the remaining
10 quantities of the composition from a bottle. Therefore, the composition in its neat form includes mixtures having the composition and water at ratios ranging from 50:50 to 100:0, preferably 70:30 to 100:0, more preferably 80:20 to 100:0, even more preferably 90:10 to 100:0 depending on the user habits and the cleaning task. For the avoidance of doubt, a ratio of 100:0 is most preferred.

15 By “diluted form”, it is meant herein that said composition is diluted by the user, typically with water. By “rinsing”, it is meant herein contacting the dishes cleaned with the composition, with substantial quantities of water after the step of applying the liquid composition onto said dishes. By “substantial quantities”, it is meant usually 1 to 20 litres.

All percentages, ratios and proportions used herein are by weight percent of the liquid hand
20 dishwashing detergent composition. All average values are calculated “by weight” of the liquid hand dishwashing detergent composition, unless otherwise expressly indicated.

The liquid hand dishwashing detergent composition

The liquid hand dishwashing detergent compositions of the present invention are formulated to
25 provide grease cleaning, long lasting suds and optional benefits that are often desired by the consumer. Optional benefits include soil removal, shine, and hand care.

The compositions of the present invention comprise at least one ethoxylated anionic surfactant, having little or no branching, and at least one branched, nonionic, alkoxyated surfactant.

The compositions herein may further comprise from 30% to 80% by weight of an aqueous liquid
30 carrier, comprising water, in which the other essential and optional ingredients are dissolved, dispersed or suspended. More preferably the compositions of the present invention comprise from 45% to 70%, more preferable from 45% to 65% of the aqueous liquid carrier. Suitable optional ingredients include additional surfactant selected from other anionic surfactants, other

nonionic surfactants, amphoteric/ zwitterionic surfactants, cationic surfactants, and mixtures thereof; cleaning polymers; cationic polymers; enzymes; humectants; salts; solvents; hydrotropes; polymeric suds stabilizers; diamines; carboxylic acid; pearlescent agent; chelants; pH buffering agents; perfume; dyes; opacifiers; and mixtures thereof.

- 5 The aqueous liquid carrier, however, may contain other materials which are liquid, or which dissolve in the liquid carrier, at room temperature (20°C - 25°C) and which may also serve some other function besides that of an inert filler.

The liquid detergent composition may have any suitable pH. Preferably the pH of the composition is adjusted to between 4 and 14. More preferably the composition has pII of from 6
10 to 13, most preferably from 6 to 10. The pH of the composition can be adjusted using pH modifying ingredients known in the art.

The liquid detergent composition of the present invention is preferably clear or transparent. That is, the liquid detergent composition has a turbidity of from 5 NTU to less than 3000 NTU, preferably less than 1000 NTU, more preferably less than 500 NTU and most preferably less
15 than 100 NTU.

The ethoxylated anionic surfactant

The liquid hand dishwashing detergent composition of the invention comprises from 2% to 70%, preferably from 5% to 30%, more preferably from 10% to 25% by weight of anionic surfactant
20 having an average degree of ethoxylation of from 0.8 to 4, preferably from 1 to 2. The average degree of ethoxylation is defined as the average number of moles of ethylene oxide per mole of the ethoxylated anionic surfactant of the present invention. The ethoxylated anionic surfactant is derived from a fatty alcohol, wherein at least 80%, preferably at least 82%, more preferably at least 85%, most preferably at least 90% by weight of said fatty alcohol is linear. By linear, what
25 is meant is that the fatty alcohol comprises a single backbone of carbon atoms, with no branches. Preferably, said ethoxylated anionic surfactant is an ethoxylated alkyl sulphate surfactant of formula:

$R_1-(OCH_2CH_2)_n-O-SO_3^- M^+$, wherein:

R_1 is a saturated or unsaturated C₈-C₁₆, preferably C₁₂-C₁₄ alkyl chain; preferably, R_1 is a
30 saturated C₈-C₁₆, more preferably a saturated C₁₂-C₁₄ alkyl chain;

n is a number from 0.8 to 4, preferably from 1 to 2;

M^+ is a suitable cation which provides charge neutrality, preferably sodium, calcium, potassium, or magnesium, more preferably a sodium cation.

Suitable ethoxylated alkyl sulphate surfactants include saturated C₈-C₁₆ alkyl ethoxysulphates, preferably saturated C₁₂-C₁₄ alkyl ethoxysulphates.

The proportion of R₁ that is linear is such that at least 80% by weight of the starting fatty alcohol is linear. Saturated alkyl chains are preferred, since the presence of double bonds can lead to chemical reactions with other ingredients, such as certain perfume ingredients, or even with uv-light. Such reactions can lead to phase instabilities, discoloration and malodour.

The required carbon chain length distribution can be obtained by using alcohols with the corresponding chain length distribution prepared synthetically or from natural raw materials or corresponding pure starting compounds. Preferably, the anionic surfactant of the present invention is derived from a naturally sourced alcohol. Natural sources, such as plant or animal esters (waxes), can be made to yield linear chain alcohols with a terminal (primary) hydroxyl, along with varying degrees of unsaturation. Such fatty alcohols comprising alkyl chains ranging from C₈ to C₁₆, may be prepared by any known commercial process, such as those deriving the fatty alcohol from fatty acids or methyl esters, and occasionally triglycerides. For example, the addition of hydrogen into the carboxyl group of the fatty acid to the form fatty alcohol, by treating with hydrogen under high pressure and in the presence of suitable metal catalysts. By a similar reaction, fatty alcohols can be prepared by the hydrogenation of glycerides or methyl esters. Methyl ester reduction is a suitable means of providing saturated fatty alcohols, and selective hydrogenation with the use of special catalysts such as copper or cadmium oxides can be used for the production of oleyl alcohol. Synthetic or petroleum-based processes, such as the Ziegler process, are useful for producing suitable straight chain, even-numbered, saturated alcohols. Paraffin oxidation is a suitable process for making mixed primary alcohols. The fatty alcohol may be reacted with ethylene oxide to yield ethoxylated fatty alcohols. The ethoxylated alkyl sulphate surfactant(s) of formula R₁-(OCH₂CH₂)_n-O-SO₃⁻ M⁺ may then be obtained by the sulphonation of the corresponding ethoxylated fatty alcohol(s).

Ethoxylated alkyl sulphate surfactant(s) of formula R₁-(OCH₂CH₂)_n-O-SO₃⁻ M⁺, may be derived from coconut oil. Coconut oil usually comprises triglycerides which can be chemically processed to obtain a mixture of C₁₂-C₁₈ alcohols. A mixture of alkyl sulphates comprising a higher proportion of C₁₂-C₁₄ alkyl sulphates may be obtained by separating the corresponding alcohols before the ethoxylation or sulphation step, or by separating the obtained ethoxylated alcohol or ethoxylated alkyl sulphate surfactant(s).

Preferred ethoxylated anionic surfactants herein are ethoxylated alkyl sulphates having from 8 to 18, preferably 10 to 16, more preferably 12 to 14 carbon atoms in the alkyl chain, and are from


80% to 100% linear. Such surfactants can be made by any known processes, using suitable feedstock. For instance, from linear fatty alcohols which are preferably naturally derived, such as n-dodecanol, n-tetradecanol and mixtures thereof. If desired, such surfactants can contain linear alkyl moieties derived from synthetic sources, or can comprise mixtures of the linear ethoxylated
5 alkyl sulphates with lightly branched, e.g., methyl branched analogues. The ethoxylated alkyl sulphates can be in the form of their sodium, potassium, ammonium or alkanolamine salts. Suitable alcohol precursors for the ethoxylated anionic surfactants include Ziegler-derived linear alcohols, alcohols prepared by hydrogenation of oleochemicals, and 80% or more linear alcohols prepared by enrichment of the linear component of oxo derive alcohols, such as Neodol[®] or
10 Dobanol[®] from Shell. Other examples of suitable primary alcohols include those derived from: natural linear fatty alcohols such as those commercially available from Procter & Gamble Co.; and the oxidation of paraffins by the steps of (a) oxidizing the paraffin to form a fatty carboxylic acid; and (b) reducing the carboxylic acid to the corresponding primary alcohol. Other preferred ethoxylated anionic surfactants are those from Sasol, sold under the tradenames: Alfol[®], Nacol[®],
15 Nalfol[®], Alchem[®].

The alkoxyated branched nonionic, surfactant

The liquid hand dishwashing detergent compositions of the present invention comprise from 0.1% to 5%, preferably from 0.2% to 3%, more preferably from 0.5% to 2% by weight of
20 alkoxyated branched nonionic surfactant. Said alkoxyated branched nonionic surfactant has an average degree of alkoxylation of from 1 to 40, preferably from 3 to 20, more preferably from 7 to 12. The average degree of alkoxylation is defined as the average number of moles of alkyl oxide per mole of the alkoxyated branched nonionic surfactant of the present invention. Preferably the branched nonionic is ethoxylated and/or propoxylated, more preferably
25 ethoxylated.

Non-ethoxylated branched nonionic surfactants in combination with the ethoxylated anionic surfactant of the present compositions have been found to limit the sudsing performance of the liquid detergent composition. Therefore, the composition preferably comprises less than 10%, more preferably less than 5%, most preferably less than 2% by weight of non-alkoxyated
30 branched alcohol. For the surfactant to be suitably surface-active, the branched nonionic surfactant preferably comprises from 8 to 24, more preferably from 9 to 18, most preferably from 10 to 14 carbon atoms. Alkoxyated branched nonionic alcohols selected from: formula I, formula II, and mixtures thereof; are particularly preferred:

Formula I:

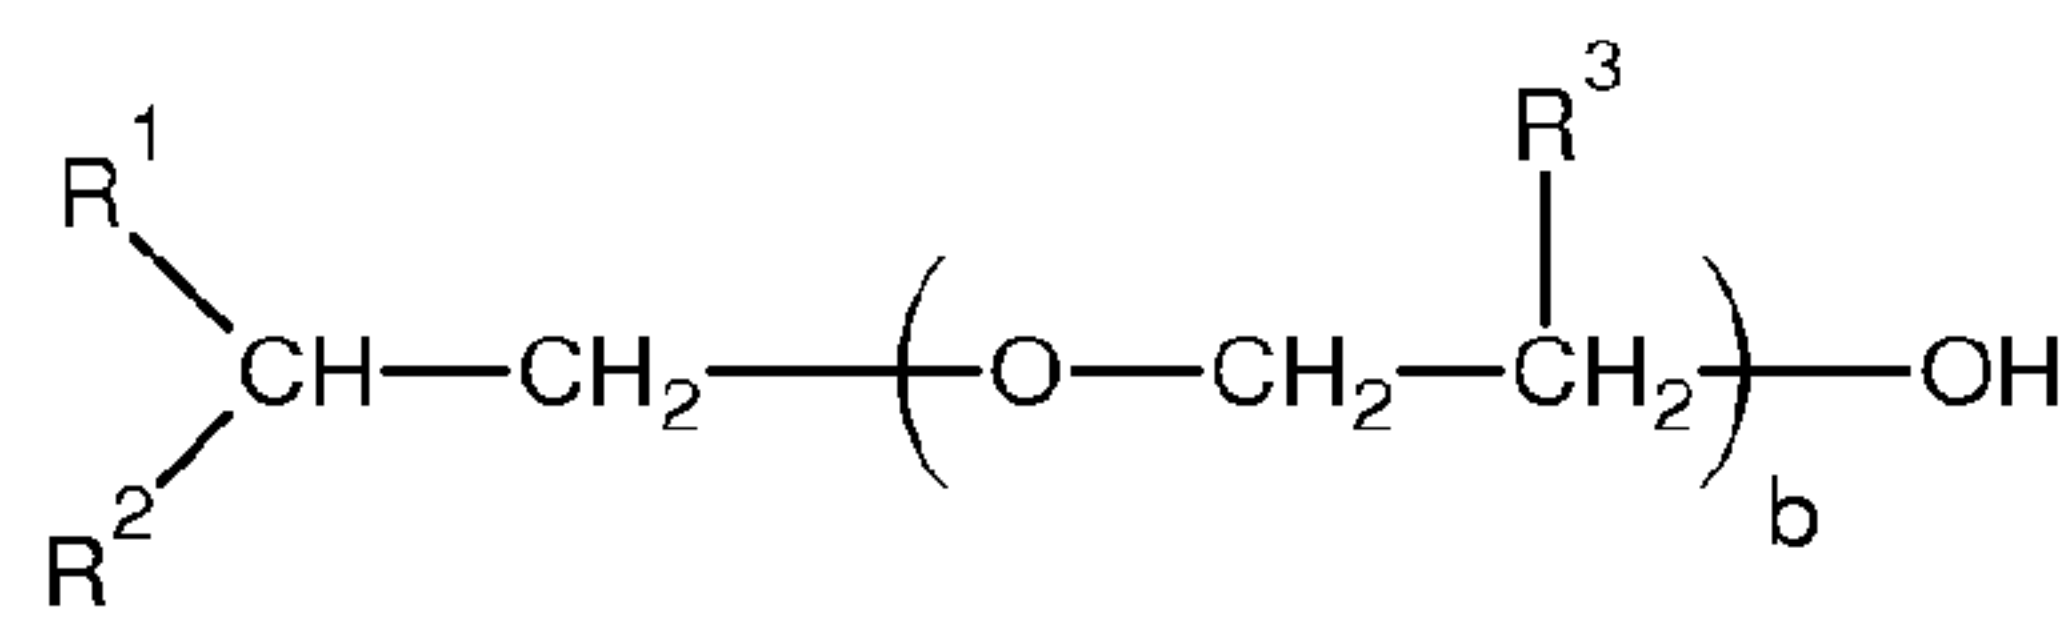

wherein, in formula I:


R1 is a C5 to C16 linear or branched, preferably linear, alkyl chain;

5 R2 is a C1 to C8 linear or branched, preferably linear, alkyl chain;

R3 is H or C1 to C4 alkyl, preferably H or methyl;

b is a number from 1 to 40, preferably from 5 to 20, more preferably from 7 to 12;

Formula II:

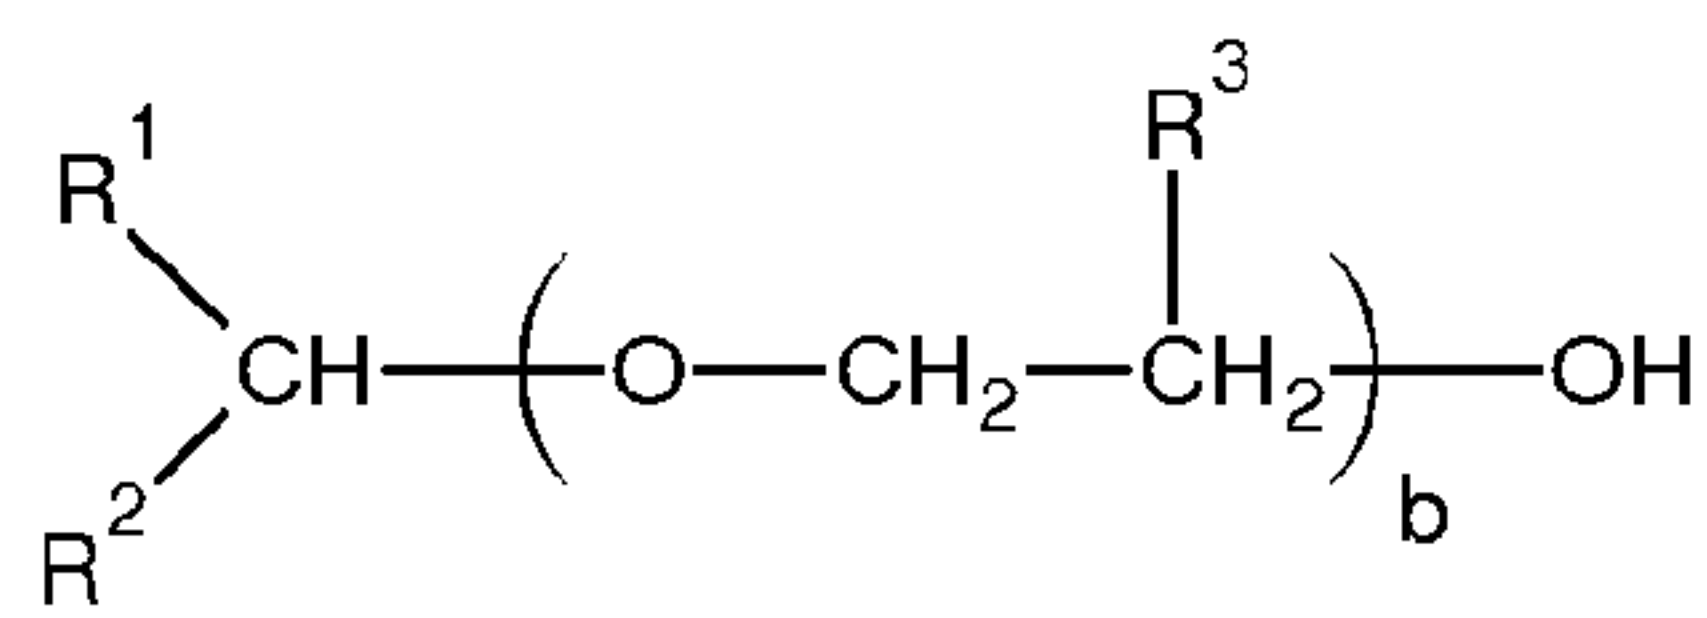

10

wherein, in formula II:

R1 is a C6 to C16 linear or branched, preferably linear, alkyl chain;

R2 is a C1 to C8 linear or branched, preferably linear, alkyl chain;

15 R3 is H or C1 to C4 alkyl, preferably H or methyl;

b is a number from 1 to 40, preferably from 5 to 20, more preferably from 7 to 12.

The degree of alkoxylation of said branched nonionic is preferably greater than the degree of ethoxylation of said ethoxylated anionic surfactant. As the degree of ethoxylation of the anionic surfactant is increased, the viscosity of the liquid hand dishwashing detergent composition increases. It is believed that this is because the hydrophilicity of the total surfactant system is increased. Moreover, liquid hand dishwashing detergent compositions are generally made using surfactant premixes. As the degree of ethoxylation of the anionic surfactant is increased, the likelihood of such surfactant premixes gelling during processing is increased. However, it has been discovered that by incorporating a small amount of branched nonionic surfactant, having a higher degree of alkoxylation than the degree of ethoxylation of the anionic surfactant, the viscosity of the surfactant premix, and resultant composition, can be controlled.

20

Alkoxyated branched nonionic surfactants can be classified as relatively water insoluble or relatively water soluble. While certain alkoxyated branched nonionic surfactants can be

25

considered water-insoluble, they can be formulated into liquid hand dishwashing detergent compositions of the present invention using suitable additional surfactants, particularly anionic or nonionic surfactants.

Preferred branched nonionic surfactants according to formula I are the Guerbet C10 alcohol ethoxylates with 7 or 8 EO, such as Ethylan[®] 1007 & 1008, and the Guerbet C10 alcohol alkoxyated nonionic surfactants (which are ethoxylated and/or propoxylated) such as the commercially available Lutensol[®] XI series (XI50, XI70, etc). Other exemplary alkoxyated branched nonionic surfactants include those available under the trade names: Lutensol[®] XP30, Lutensol[®] XP-50, and Lutensol[®] XP-80 available from BASF Corporation. In general, Lutensol[®] XP-30 can be considered to have 3 repeating ethoxy groups, Lutensol[®] XP-50 can be considered to have 5 repeating ethoxy groups, and Lutensol[®] XP-80 can be considered to have 8 repeating ethoxy groups. Other suitable branched nonionic surfactants include oxo branched nonionic surfactants such as the Lutensol[®] ON 50 (5 EO) and Lutensol[®] ON70 (7 EO).. Also suitable are: the ethoxylated fatty alcohols originating from the Fischer & Tropsch reaction comprising up to 50% branching (40% methyl (mono or bi), 10% cyclohexyl) such as those produced from the Safol[®] alcohols from Sasol; ethoxylated fatty alcohols originating from the oxo reaction wherein at least 50 % by weight of the alcohol is C2 isomer (methyl to pentyl) such as those produced from the Isalchem[®] alcohols or Lial[®] alcohols from Sasol.

Preferred branched non-ionic ethoxylates according to formula II are those available under the tradenames Tergitol[®] 15-S, with an alkoxylation degree of from 3 to 40. For instance Tergitol[®] 15-S-20 which has an average degree of alkoxylation of 20. Other suitable commercially available material according to formula II are the ones available under the tradename Softanol[®] M and EP series.

25 Additional surfactants

The composition of the present invention may comprise additional surfactant selected from other anionic, other nonionic, amphoteric/zwitterionic, cationic surfactants, and mixtures thereof. The liquid hand dishwashing compositions of the present invention comprise a total amount of surfactant of from 10% to 85% by weight, preferably from 12.5% to 65% by weight, more preferably 15% to 40% by weight of the composition. The total amount of surfactant is the sum of all the surfactants present, including the ethoxylated anionic surfactant, the alkoxyated branched nonionic surfactant, and any other anionic, other nonionic, amphoteric/zwitterionic, and cationic surfactants that may be present.

1) Other anionic surfactants:

The composition of the present invention will typically comprise 2% to 70%, preferably 5% to 30%, more preferably 7.5% to 25%, and most preferably 10% to 20% by weight of anionic
5 surfactant.

Suitable anionic surfactants of use in the compositions and methods of the present invention are sulphates, sulphasuccinates, sulphonates, and/or sulphoacetates; preferably alkyl sulphates.

Suitable sulphate or sulphonate surfactants for use in the compositions herein include water-soluble salts or acids of C₁₀-C₁₄ alkyl or hydroxyalkyl, sulphate or sulphonates. Suitable
10 counterions include hydrogen, alkali metal cation or ammonium or substituted ammonium, but preferably sodium. Where the hydrocarbyl chain is branched, it preferably comprises C₁₋₄ alkyl branching units.

The sulphate or sulphonate surfactants may be selected from C₁₁-C₁₈ alkyl benzene sulphonates (LAS), C₈-C₂₀ primary, branched chain and random alkyl sulphates (AS); C₁₀-C₁₈ secondary
15 (2,3) alkyl sulphates; mid-chain branched alkyl sulphates as discussed in US 6,020,303 and US 6,060,443; modified alkylbenzene sulphonate (MLAS) as discussed in WO 99/05243, WO 99/05242, WO 99/05244, WO 99/05082, WO 99/05084, WO 99/05241, WO 99/07656, WO 00/23549, and WO 00/23548; methyl ester sulphonate (MES); and alpha-olefin sulphonate (AOS).

20 The paraffin sulphonates may be monosulphonates or disulphonates and usually are mixtures thereof, obtained by sulphonating paraffins of 10 to 20 carbon atoms. Preferred sulphonates are those of C₁₂-18 carbon atoms chains and more preferably they are C₁₄-17 chains. Paraffin sulphonates that have the sulphonate group(s) distributed along the paraffin chain are described in US2,503,280; US2,507,088; US3,260,744; US 3,372,188 and in DE 735 096.

25 Also suitable are the alkyl glyceryl sulphonate surfactants and/or alkyl glyceryl sulphate surfactants described in the Procter & Gamble patent application WO06/014740: A mixture of oligomeric alkyl glyceryl sulfonate and/or sulphate surfactant selected from dimers, trimers, tetramers, pentamers, hexamers, heptamers, and mixtures thereof; wherein the weight percentage of monomers is from 0 wt% to 60 wt% by weight of the alkyl glyceryl sulfonate and/or sulphate
30 surfactant mixture.

Other suitable anionic surfactants are alkyl, preferably dialkyl sulphasuccinates and/or sulphoacetates. The dialkyl sulphasuccinates may be a C₆₋₁₅ linear or branched dialkyl

sulphosuccinates. The alkyl moieties may be symmetrical (i.e., the same alkyl moieties) or asymmetrical (i.e., different alkyl moieties). Preferably, the alkyl moiety is symmetrical.


2) Other nonionic surfactants

5 The liquid hand dishwashing detergent compositions may optionally comprise additional nonionic surfactant. The composition preferably comprises from 2% to 40%, more preferably from 3% to 30% by weight of nonionic surfactant.

Suitable additional nonionic surfactants include the condensation products of aliphatic alcohols having from 1 to 25 moles of ethylene oxide. The alkyl chain of the aliphatic alcohol generally
10 contains from 8 to 22 carbon atoms. Particularly preferred are the condensation products of alcohols having an alkyl group containing from 8 to 18 carbon atoms, more preferably from 9 to 15 carbon atoms, with from 2 to 18 moles, more preferably from 2 to 15 moles, most preferably from 5 to 12 moles of ethylene oxide per mole of alcohol.

Also suitable are alkylpolyglycosides having the formula $R^2O(C_nH_{2n}O)_t(\text{glycosyl})_x$ (formula (I)),
15 wherein R^2 of formula (I) is selected from the group consisting of alkyl, alkyl-phenyl, hydroxyalkyl, hydroxyalkylphenyl, and mixtures thereof in which the alkyl groups contain from 10 to 18, preferably from 12 to 14, carbon atoms; n of formula (I) is 2 or 3, preferably 2; t of formula (I) is from 0 to 10, preferably 0; and x of formula (I) is from 1.3 to 10, preferably from 1.3 to 3, most preferably from 1.3 to 2.7. The glycosyl is preferably derived from glucose. Also
20 suitable are alkyl glycerol ethers and sorbitan esters.

Also suitable are fatty acid amide surfactants having the formula (II):

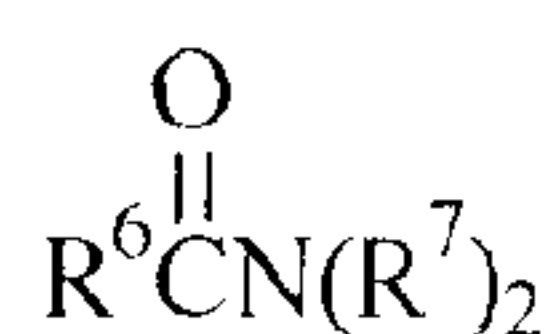

(II)

wherein R^6 of formula (II) is an alkyl group containing from 7 to 21, preferably from 9 to 17,
25 carbon atoms and each R^7 of formula (II) is selected from the group consisting of hydrogen, C_1 - C_4 alkyl, C_1 - C_4 hydroxyalkyl, and $-(C_2H_4O)_xH$ where x of formula (II) varies from 1 to 3. Preferred amides are C_8 - C_{20} ammonia amides, monoethanolamides, diethanolamides, and isopropanolamides.

Preferred nonionic surfactants for use in the present invention are the condensation products of
30 aliphatic alcohols with ethylene oxide, such as the mixture of nonyl (C9), decyl (C10) undecyl (C11) alcohol modified with on average 5 ethylene oxide (EO) units such as the commercially available Neodol™ 91-5 or the Neodol™ 91-8 that is modified with on average 8 EO units. Also

suitable are the longer alkyl chain ethoxylated nonionic surfactants such as C12, C13 modified with 5 EO (Neodol 23-5). Neodol is a Shell tradename. Also suitable is the C12, C14 alkyl chain with 7 EO, commercially available under the trade name Novel™ 1412-7 (Sasol) or the Lutensol A 7 N (BASF).

5

3) Amphoteric/ zwitterionic surfactants


It has been found that amphoteric/ zwitterionic surfactants further enhance the sudsing profile, while providing excellent cleaning and being mild on the hands. The amphoteric and zwitterionic surfactant can be comprised at a level of from 0.01% to 20%, preferably from 0.2% to 15%,
 10 more preferably 0.5% to 10% by weight of the liquid hand dishwashing detergent compositions. Preferred amphoteric and zwitterionic surfactants are amine oxide surfactants, betaine surfactants, and mixtures thereof.

Most preferred are amine oxides, especially coco dimethyl amine oxide or coco amido propyl dimethyl amine oxide. Amine oxide may have a linear or mid-branched alkyl moiety. Typical
 15 linear amine oxides include water-soluble amine oxides of formula $R^1 - N(R^2)(R^3) \rightarrow O$, wherein R^1 is a C_{8-18} alkyl moiety; R^2 and R^3 are independently selected from the group consisting of C_{1-3} alkyl groups and C_{1-3} hydroxyalkyl groups and preferably include methyl, ethyl, propyl, isopropyl, 2-hydroxyethyl, 2-hydroxypropyl and 3-hydroxypropyl. The linear amine oxide surfactants in particular may include linear C_{10} - C_{18} alkyl dimethyl amine oxides and linear C_8 -
 20 C_{12} alkoxy ethyl dihydroxy ethyl amine oxides. Preferred amine oxides include linear C_{10} , linear C_{10} - C_{12} , and linear C_{12} - C_{14} alkyl dimethyl amine oxides. As used herein "mid-branched" means that the amine oxide has one alkyl moiety having n_1 carbon atoms with one alkyl branch on the alkyl moiety having n_2 carbon atoms. The alkyl branch is located on the α carbon from the nitrogen on the alkyl moiety. This type of branching for the amine oxide is also known in the art
 25 as an internal amine oxide. The total sum of n_1 and n_2 is from 10 to 24 carbon atoms, preferably from 12 to 20, and more preferably from 10 to 16. The number of carbon atoms for the one alkyl moiety (n_1) should be approximately the same number of carbon atoms as the one alkyl branch (n_2) such that the one alkyl moiety and the one alkyl branch are symmetric. As used herein "symmetric" means that $|n_1 - n_2|$ is less than or equal to 5, preferably less than 4 carbon atoms
 30 in at least 50 wt%, more preferably at least 75 wt% to 100 wt% of the mid-branched amine oxides for use herein.

The amine oxide further comprises two moieties, independently selected from a C_{1-3} alkyl, a C_{1-3} hydroxyalkyl group, or a polyethylene oxide group containing an average of from 1 to 3 ethylene

oxide groups. Preferably the two moieties are selected from a C₁₋₃ alkyl, more preferably both are selected as a C₁ alkyl.

Other suitable surfactants include betaines such as: alkyl betaines, alkylamidobetaines, amidazoliniumbetaines, sulphobetaines (INCI Sultaines) and phosphobetaines, that preferably
5 meets formula (III):

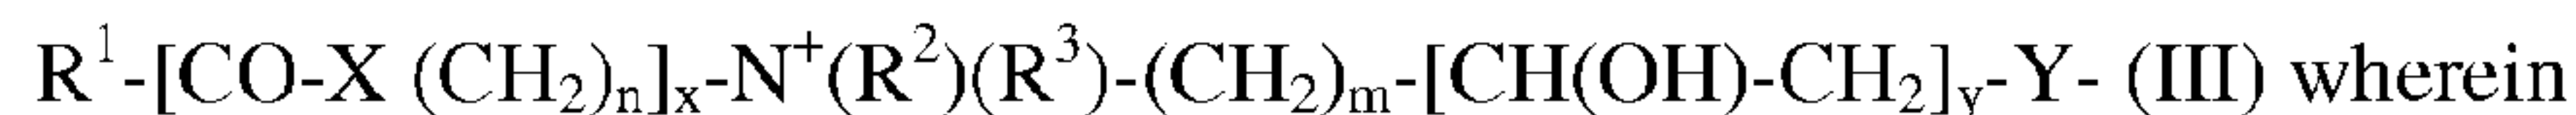

R¹ is a saturated or unsaturated C₆₋₂₂ alkyl chain, preferably a C₈₋₁₈ alkyl chain, more preferably a saturated C₁₀₋₁₆ alkyl chain, most preferably a saturated C₁₂₋₁₄ alkyl chain;

10 X is selected from the group consisting of: NH, NR⁴, O, and S; wherein R⁴ is a C₁₋₄ Alkyl chain;

n is an integer from 1 to 10, preferably from 2 to 5, more preferably 3;

x is either 0 or 1, preferably 1;



15 R², R³ are independently selected from C₁₋₄ alkyl chains, preferably a methyl chain; R², R³ may also be hydroxy substituted such as hydroxyethyl or hydroxymethyl chain;

m is an integer from 1 to 4, preferably 1, 2 or 3;

y is either 0 or 1; and

20 Y is selected from the group consisting of: COO, SO₃, OPO(OR⁵)O and P(O)(OR⁵)O; wherein R⁵ is H or a C₁₋₄ alkyl chain.

Preferred betaines are the alkyl betaines of the formula (IIIa), the alkyl amido betaine of the formula (IIIb), the sulphobetaines of the formula (IIIc) and the amido sulphobetaine of the formula (IIId);

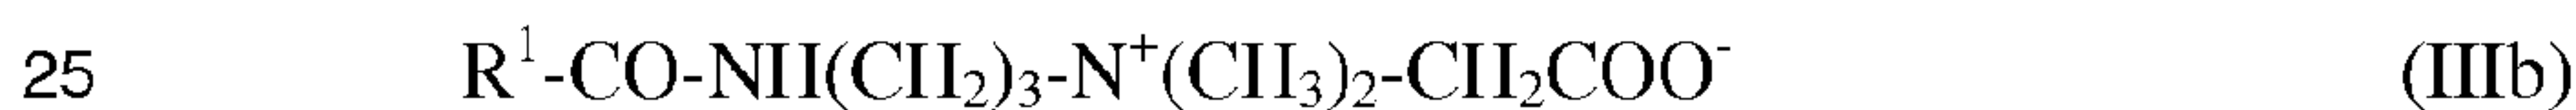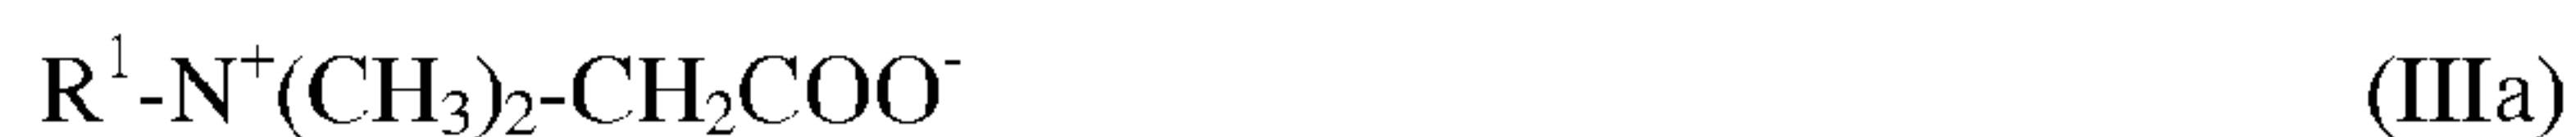

in which R¹ has the same meaning as in formula III. Particularly preferred betaines are the carbobetaines [wherein Y=COO⁻], in particular the carbobetaine of the formula (IIIa) and (IIIb),
30 more preferred are the alkylamidobetaines of the formula (IIIb).

Examples of suitable betaines and sulphobetaine are the following [designated in accordance with INCI]: Almondamidopropyl of betaines, Apricotamidopropyl betaines, Avocadamidopropyl of betaines, Babassuamidopropyl of betaines, Behenamidopropyl betaines, Behenyl of betaines,


betaines, Canolamidopropyl betaines, Capryl/Capramidopropyl betaines, Carnitine, Cetyl of
 betaines, Cocamidoethyl of betaines, Cocamidopropyl betaines, Cocamidopropyl
 Hydroxysultaine, Coco betaines, Coco Hydroxysultaine, Coco/Oleamidopropyl betaines, Coco
 Sultaine, Decyl of betaines, Dihydroxyethyl Oleyl Glycinate, Dihydroxyethyl Soy Glycinate,
 5 Dihydroxyethyl Stearyl Glycinate, Dihydroxyethyl Tallow Glycinate, Dimethicone Propyl of
 PG-betaines, Erucamidopropyl Hydroxysultaine, Hydrogenated Tallow of betaines, Isostearam
 idopropyl betaines, Lauramidopropyl betaines, Lauryl of betaines, Lauryl Hydroxysultaine,
 Lauryl Sultaine, Milkamidopropyl betaines, Minkamidopropyl of betaines, Myristamidopropyl
 betaines, Myristyl of betaines, Oleamidopropyl betaines, Oleamidopropyl Hydroxysultaine,
 10 Oleyl of betaines, Olivamidopropyl of betaines, Palmamidopropyl betaines, Palm itamidopropyl
 betaines, Palmitoyl Carnitine, Palm Kernelamidopropyl betaines, Polytetrafluoroethylene
 Acetoxypopyl of betaines, Ricinoleamidopropyl betaines, Sesamidopropyl betaines,
 Soyamidopropyl betaines, Stearamidopropyl betaines, Stearyl of betaines, Tallowamidopropyl
 betaines, Tallowamidopropyl Hydroxysultaine, Tallow of betaines, Tallow Dihydroxyethyl of
 15 betaines, Undecylenamidopropyl betaines and Wheat Germamidopropyl betaines.

A preferred betaine is, for example, Cocoamidopropyl betaine (Cocoamidopropyl betaine).

A preferred surfactant system is a mixture of anionic surfactant and amphoteric or zwitterionic
 surfactants in a ratio within the range of 1:1 to 5:1, preferably from 1:1 to 3.5:1.

20 4) Cationic Surfactants

Cationic surfactants, when present in the composition, are present in an effective amount, more
 preferably from 0.1% to 20%, by weight of the composition. Suitable cationic surfactants are
 quaternary ammonium surfactants, preferably selected from mono C₆-C₁₆, more preferably C₆-
 C₁₀ N-alkyl or alkenyl ammonium surfactants, wherein the remaining N positions are substituted
 25 by methyl, hydroxyethyl or hydroxypropyl groups. Another preferred cationic surfactant is an
 C₆-C₁₈ alkyl or alkenyl ester of a quaternary ammonium alcohol, such as quaternary chlorine
 esters. More preferably, the cationic surfactants have the formula (V):

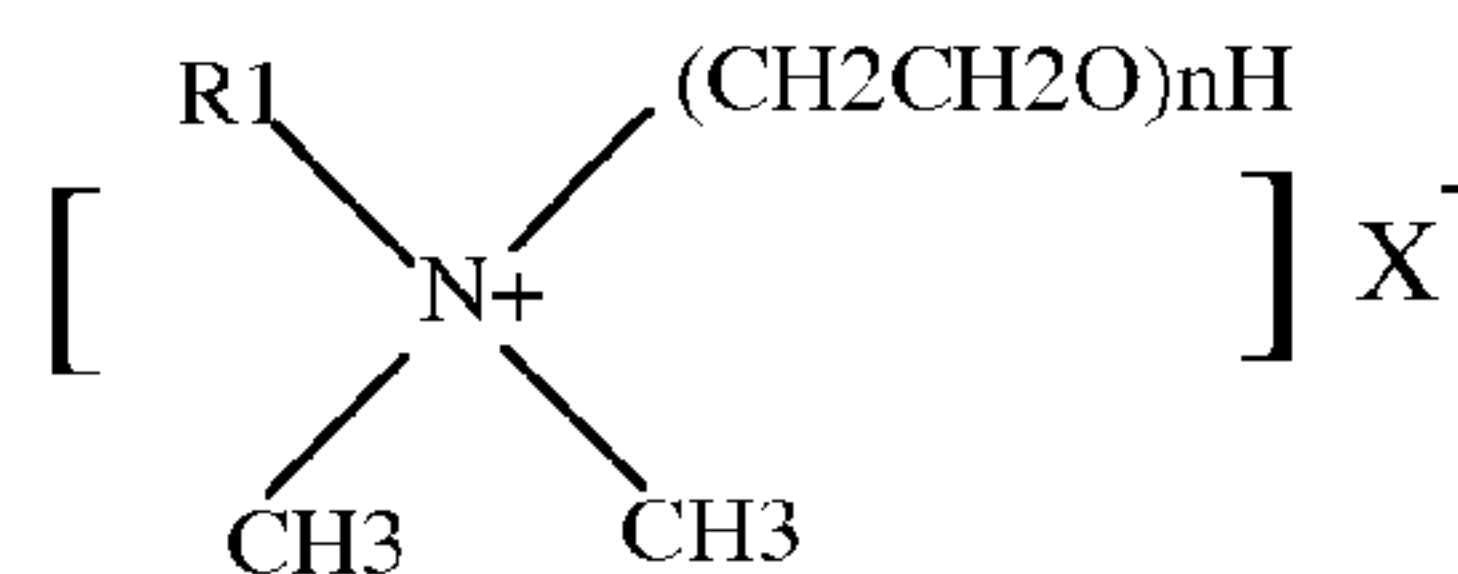

(V)

wherein R^1 of formula (V) is C_8 - C_{18} hydrocarbyl and mixtures thereof, preferably, C_{8-14} alkyl, more preferably, C_8 , C_{10} or C_{12} alkyl, and X^- of formula (V) is an anion, preferably, chloride or bromide.

5 Cleaning polymers

The liquid hand dishwashing composition herein may optionally further comprise one or more alkoxyated polyethyleneimine polymer. The composition may comprise from 0.01% to 10%, preferably from 0.01% to 2%, more preferably from 0.1% to 1.5%, even more preferable from 0.2% to 1.5% by weight of the total composition of an alkoxyated polyethyleneimine polymer as
10 described on page 2, line 33 to page 5, line 5 and exemplified in examples 1 to 4 on pages 5 to 7 of WO2007/135645 The Procter & Gamble Company.

A preferred alkoxyated polyethyleneimine polymer has a polyethyleneimine backbone having a weight average molecular weight of from 400 to 10000, preferably from 600 to 7000 weight, more preferably from 3000 to 6000.

15 The modification of the polyethyleneimine backbone includes: (1) one or two alkoxylation modifications per nitrogen atom, dependent on whether the modification occurs at a internal nitrogen atom or at an terminal nitrogen atom, in the polyethyleneimine backbone, the alkoxylation modification consisting of the replacement of a hydrogen atom by a polyalkoxylene chain having an average of 1 to 40 alkoxy moieties per modification, wherein the terminal
20 alkoxy moiety of the alkoxylation modification is capped with hydrogen, a C_1 - C_4 alkyl or mixtures thereof; (2) a substitution of one C_1 - C_4 alkyl moiety and one or two alkoxylation modifications per nitrogen atom, dependent on whether the substitution occurs at an internal nitrogen atom or at a terminal nitrogen atom, in the polyethyleneimine backbone, the alkoxylation modification consisting of the replacement of a hydrogen atom by a polyalkoxylene
25 chain having an average of 1 to 40 alkoxy moieties per modification wherein the terminal alkoxy moiety is capped with hydrogen, a C_1 - C_4 alkyl or mixtures thereof; or (3) a combination thereof.

The composition may also comprise the amphiphilic graft polymers based on water soluble polyalkylene oxides (A) as a graft base and sides chains formed by polymerization of a vinyl ester component (B), said polymers having an average of ≤ 1 graft site per 50 alkylene oxide
30 units and mean molar mass M_w of from 3,000 to 100,000, as described in BASF patent application WO2007/138053 on pages 2 line 14 to page 10, line 34 and exemplified on pages 15-18.

Cationic polymers

In a preferred embodiment, the liquid hand dishwashing compositions herein may comprise at least one cationic polymer. Without wishing to be bound by theory, it is believed that the interaction of the cationic polymer with the anionic surfactant results in a phase separation phenomena known as coacervation where a polymer-rich coacervate phase separates from the bulk phase of the composition. Coacervation enhances the deposition of the cationic polymer on the skin and aids on the deposition of other actives such as hydrophobic emollient materials that might be trapped in this coacervate phase and as such co-deposit on the skin. This coacervate phase can exist already within the liquid hand dishwashing detergent, or alternatively can be formed upon dilution or rinsing of the cleaning composition.

The cationic polymer will typically be present a level of from 0.001% to 10%, preferably from 0.01% to 5%, more preferably from 0.05% to 1% by weight of the total composition.

Suitable cationic polymers for use in the current invention comprise cationic nitrogen containing moieties such as quaternary ammonium or cationic protonated amino moieties. The average molecular weight of the cationic polymer is between 5000 to 10 million, preferably at least 100000, more preferably at least 200000, but preferably not more than 3000000. The cationic polymer preferably has a cationic charge density of from 0.1meq/g to 5meq/g, more preferably at least about 0.2meq/g, more preferably at least about 0.3meq/g, at the pH of intended use of the composition. The charge density is calculated by dividing the number of net charges per repeating unit by the molecular weight of the repeating unit. The positive charges could be located on the backbone of the polymers and/or the side chains of polymers. In general, adjustments of the proportions of amine or quaternary ammonium moieties in the polymer in function of the pH of the liquid dishwashing liquid in the case of amines, will affect the charge density. Any anionic counterions can be used in association with cationic deposition polymers, so long as the polymer remains soluble in water and in the composition of the present invention, and so long that the counterion is physically and chemically stable with the essential components of the composition, or do not unduly impair product performance, stability nor aesthetics. Non-limiting examples of such counterions include halides (e.g. chlorine, fluorine, bromine, iodine), sulphate and methylsulphate.

Specific examples of the water soluble cationized polymer include cationic polysaccharides such as cationized cellulose derivatives, cationized starch and cationized guar gum derivatives. Also included are synthetically derived copolymers such as homopolymers of diallyl quaternary ammonium salts, diallyl quaternary ammonium salt / acrylamide copolymers, quaternized

polyvinylpyrrolidone derivatives, polyglycol polyamine condensates, vinylimidazolium trichloride/vinylpyrrolidone copolymers, dimethyldiallylammonium chloride copolymers, vinylpyrrolidone / quaternized dimethylaminoethyl methacrylate copolymers, polyvinylpyrrolidone / alkylamino acrylate copolymers, polyvinylpyrrolidone / alkylamino acrylate / vinylcaprolactam copolymers, vinylpyrrolidone / methacrylamidopropyl trimethylammonium chloride copolymers, alkylacrylamide / acrylate / alkylaminoalkylacrylamide / polyethylene glycol methacrylate copolymers, adipic acid / dimethylaminohydroxypropyl ethylenetriamine copolymer (“Cartaretin™” – product of Sandoz / USA), and optionally quaternized/protonated condensation polymers having at least one heterocyclic end group connected to the polymer backbone through a unit derived from an alkylamide, the connection comprising an optionally substituted ethylene group (as described in WO 2007 098889, pages 2-19)

Specific non-limiting examples of commercial water soluble cationized polymers described generally above include: “Merquat™ 550” (a copolymer of acrylamide and diallyl dimethyl ammonium salt – CTFA name : Polyquaternium-7, product of ONDEO-NALCO), “Luviquat™ FC370” (a copolymer of 1-vinyl-2-pyrrolidone and 1-vinyl-3-methylimidazolium salt – CTFA name : Polyquaternium-16, product of BASF), “Gafquat™ 755N” (a copolymer of 1-vinyl-2-pyrrolidone and dimethylaminoethyl methacrylate - CTFA name : Polyquaternium-11, product ex ISP), “Polymer KG, “Polymer JR series” and “Polymer LR series” (salt of a reaction product between trimethyl ammonium substituted epoxide and hydroxyethyl cellulose - CTFA name : Polyquaternium-10, product of Amerchol) and “Jaguar™ series” (guar hydroxypropyl trimonium chloride, product of Rhodia) or “N-hance series” (guar hydroxypropyl trimonium chloride, product of Aqualon)

Preferred cationic polymers are cationic polysaccharides, more preferably cationic cellulose derivatives such as the salts of hydroxyethyl cellulose reacted with trimethyl ammonium substituted epoxide, referred to in the industry (CTFA) as Polyquaternium-10, such as the UCARE™ LR400, or UCARE JR-400 ex Dow Amerchol, even more preferred are cationic guar gum derivatives such as guar hydroxypropyltrimonium chloride, such as the Jaguar series ex Rhodia and N-Hance™ polymer series available from Aqualon.

30

Enzymes

Enzymes may be incorporated into the compositions in accordance with the invention at a level of from 0.00001% to 1% of enzyme protein by weight of the total composition, preferably at a

level of from 0.0001% to 0.5% of enzyme protein by weight of the total composition, more preferably at a level of from 0.0001% to 0.1% of enzyme protein by weight of the total composition.

In a preferred embodiment the composition of the present invention may comprise an enzyme,
5 preferably a protease and/or an amylase.

Protease of microbial origin is preferred. Chemically or genetically modified mutants are included. The protease may be a serine protease, preferably an alkaline microbial protease or a trypsin-like protease.

Preferred proteases for use herein include polypeptides demonstrating at least 90%, preferably at
10 least 95%, more preferably at least 98%, even more preferably at least 99% and especially 100% identity with the wild-type enzyme from *Bacillus lentus* or the wild-type enzyme from *Bacillus amyloliquefaciens*.

Preferred commercially available protease enzymes include those sold under the trade names Alcalase®, Savinase®, Primase®, Durazym®, Polarzyme®, Kannase®, Liquanase®,
15 Ovozyme®, Neutrase®, Everlase® and Esperase® by Novozymes A/S (Denmark), those sold under the tradename Maxatase®, Maxacal®, Maxapem®, Properase®, Purafect®, Purafect Prime®, Purafect Ox®, FN3® , FN4®, Excellase® and Purafect OXP® by Genencor International, and those sold under the tradename Opticlean® and Optimase® by Solvay Enzymes. In one aspect, the preferred protease is a subtilisin BPN' protease derived from
20 *Bacillus amyloliquefaciens*, preferably comprising the Y217L mutation, sold under the tradename Purafect Prime®, supplied by Genencor International.

Suitable alpha-amylases include those of bacterial or fungal origin. Chemically or genetically modified mutants (variants) are included. A preferred alkaline alpha-amylase is derived from a strain of *Bacillus*, such as *Bacillus licheniformis*, *Bacillus amyloliquefaciens*, *Bacillus*
25 *stearothermophilus*, *Bacillus subtilis*, or other *Bacillus* sp., such as *Bacillus* sp. NCIB 12289, NCIB 12512, NCIB 12513, DSM 9375 (USP 7,153,818) DSM 12368, DSMZ no. 12649, KSM AP1378 (WO 97/00324), KSM K36 or KSM K38 (EP 1,022,334). Preferred amylases include:

(a) the variants described in WO 94/02597, WO 94/18314, WO96/23874 and WO 97/43424, especially the variants with substitutions in one or more of the following positions versus the
30 enzyme listed as SEQ ID No. 2 in WO 96/23874: 15, 23, 105, 106, 124, 128, 133, 154, 156, 181, 188, 190, 197, 202, 208, 209, 243, 264, 304, 305, 391, 408, and 444.

(b) the variants described in USP 5,856,164 and WO99/23211, WO 96/23873, WO00/60060 and WO 06/002643, especially the variants with one or more substitutions in the following positions

versus the AA560 enzyme listed as SEQ ID No. 12 in WO 06/002643: 26, 30, 33, 82, 37, 106, 118, 128, 133, 149, 150, 160, 178, 182, 186, 193, 203, 214, 231, 256, 257, 258, 269, 270, 272, 283, 295, 296, 298, 299, 303, 304, 305, 311, 314, 315, 318, 319, 339, 345, 361, 378, 383, 419, 421, 437, 441, 444, 445, 446, 447, 450, 461, 471, 482, 484, preferably that also contain the
 5 deletions of D183* and G184*.

(c) variants exhibiting at least 90% identity with SEQ ID No. 4 in WO06/002643, the wild-type enzyme from *Bacillus* SP722, especially variants with deletions in the 183 and 184 positions and variants described in WO 00/60060.

(d) variants exhibiting at least 95% identity with the wild-type enzyme from *Bacillus* sp.707
 10 (SEQ ID NO:7 in US 6,093, 562), especially those comprising one or more of the following mutations M202, M208, S255, R172, and/or M261. Preferably said amylase comprises one or more of M202L, M202V, M202S, M202T, M202I, M202Q, M202W, S255N and/or R172Q. Particularly preferred are those comprising the M202L or M202T mutations.

Suitable commercially available alpha-amylases include DURAMYL[®], LIQUEZYME[®],
 15 TERMAMYL[®], TERMAMYL ULTRA[®], NATALASE[®], SUPRAMYL[®], STAINZYME[®], STAINZYME PLUS[®], FUNGAMYL[®] and BAN[®] (Novozymes A/S, Bagsvaerd, Denmark), KEMZYM[®] AT 9000 Biozym Biotech Trading GmbH Wehlstrasse 27b A-1200 Wien Austria, RAPIDASE[®], PURASTAR[®], ENZYSIZE[®], OPTISIZE HT PLUS[®] and PURASTAR OXAM[®] (Genencor International Inc., Palo Alto, California) and KAM[®] (Kao, 14-10 Nihonbashi
 20 Kayabacho, 1-chome, Chuo-ku Tokyo 103-8210, Japan). In one aspect, suitable amylases include NATALASE[®], STAINZYME[®] and STAINZYME PLUS[®] and mixtures thereof.

Humectants

In a preferred embodiment the composition of the present invention may comprise one or more
 25 humectants. It has been found that such composition comprising a humectant will provide additional hand skin mildness benefits.

When present, the humectant will typically be present in the composition of the present invention at a level of from 0.1% to 50%, preferably from 1% to 20%, more preferably from 1% to 10%, even more preferably from 1% to 6%, and most preferably from 2% to 5% by weight of the total
 30 composition.

Humectants that can be used according to this invention include those substances that exhibit an affinity for water and help enhance the absorption of water onto a substrate, preferably skin. Specific non-limiting examples of particularly suitable humectants include glycerol, diglycerol,

polyethyleneglycol (PEG-4), propylene glycol, hexylene glycol, butylene glycol, (di)-propylene glycol, glyceryl triacetate, polyalkyleneglycols, and mixtures thereof. Others can be polyethylene glycol ether of methyl glucose, pyrrolidone carboxylic acid (PCA) and its salts, pidolic acid and salts such as sodium pidolate, polyols like sorbitol, xylitol and maltitol, or polymeric polyols like
5 polydextrose or natural extracts like quillaia, or lactic acid or urea. Also included are alkyl polyglycosides, polybetaine polysiloxanes, and mixtures thereof. Additional suitable humectants are polymeric humectants of the family of water soluble and/or swellable polysaccharides such as hyaluronic acid, chitosan and/or a fructose rich polysaccharide which is e.g. available as Fucogel®1000 (CAS-Nr 178463-23-5) by SOLABIA S.

10

Electrolytes and chelants

It is preferable to limit electrolytes or chelants to less than 5%, preferably from 0.015% to 3%, more preferably from 0.025 % to 2.0%, by weight of the liquid detergent composition.

15 Electrolytes are water-soluble mono or polyvalent non-surface active (i.e. non-surfactant) salts that are capable of affecting the phase behaviour of aqueous surfactants. Such electrolytes include the chloride, sulphate, nitrate, acetate, and citrate salts of sodium, potassium, and ammonium.

Chelants are used to bind or complex with metal ions, including transition metal ions, that can have a detrimental effect on the performance and stability of surfactant systems, for instance,
20 leading to precipitation or scale formation. By sequestering ions such as calcium and magnesium ions, they also inhibit crystal growth that can result in streaking during drying. However, chelants are also capable of affecting the phase behaviour of aqueous surfactants.

Chelants include amino carboxylates, amino phosphonates, poly-functionally-substituted aromatic chelating agents and mixtures thereof. Examples of chelants include: MEA citrate,
25 citric acid, aminoalkylenepoly(alkylene phosphonates), alkali metal ethane 1-hydroxy disphosphonates, and nitrilotrimethylene, phosphonates, diethylene triamine penta (methylene phosphonic acid) (DTPMP), ethylene diamine tetra(methylene phosphonic acid) (DDTMP), hexamethylene diamine tetra(methylene phosphonic acid), hydroxy- ethylene 1,1 diphosphonic acid (HEDP), hydroxyethane dimethylene phosphonic acid, ethylene di-amine di-succinic acid
30 (EDDS), ethylene diamine tetraacetic acid (EDTA), hydroxyethylethylenediamine triacetate (HEDTA), nitrilotriacetate (NTA), methylglycinediacetate (MGDA), iminodisuccinate (IDS), hydroxyethyliminodisuccinate (HIDS), hydroxyethyliminodiacetate (HEIDA), glycine diacetate (GLDA), diethylene triamine pentaacetic acid (DTPA), and mixtures thereof.

Solvents

Suitable solvents include C₄₋₁₄ ethers and diethers, glycols, alkoxyated glycols, C₆₋₁₆ glycol ethers, alkoxyated aromatic alcohols, aromatic alcohols, aliphatic branched alcohols, 5 alkoxyated aliphatic branched alcohols, alkoxyated linear C₁₋₅ alcohols, linear C₁₋₅ alcohols, amines, C₈₋₁₄ alkyl and cycloalkyl hydrocarbons and halohydrocarbons, and mixtures thereof. When present, the liquid detergent composition will contain from 0.01% to 20%, preferably from 0.5% to 20%, more preferably from 1% to 10% by weight of the liquid detergent composition of a solvent. These solvents may be used in conjunction with an aqueous liquid carrier, such as 10 water, or they may be used without any aqueous liquid carrier being present.

Hydrotropes

The liquid detergent compositions of the invention may optionally comprise a hydrotrope in an effective amount so that the liquid detergent compositions are appropriately compatible in water. 15 Suitable hydrotropes for use herein include anionic-type hydrotropes, particularly sodium, potassium, and ammonium xylene sulfonate, sodium, potassium and ammonium toluene sulfonate, sodium potassium and ammonium cumene sulfonate, and mixtures thereof, and related compounds, as disclosed in U.S. Patent 3,915,903. The liquid detergent compositions of the present invention typically comprise from 0% to 15% by weight of the total liquid detergent 20 composition of a hydrotrope, or mixtures thereof, preferably from 1% to 10%, most preferably from 3% to 10% by weight of the total liquid hand dishwashing composition.

Polymeric suds stabilizers

The compositions of the present invention may optionally contain a polymeric suds stabilizer. 25 These polymeric suds stabilizers provide extended suds volume and suds duration of the liquid detergent compositions. These polymeric suds stabilizers may be selected from homopolymers of (N,N-dialkylamino) alkyl esters and (N,N-dialkylamino) alkyl acrylate esters. The weight average molecular weight of the polymeric suds boosters, determined via conventional gel permeation chromatography, is from 1,000 to 2,000,000, preferably from 5,000 to 1,000,000, 30 more preferably from 10,000 to 750,000, more preferably from 20,000 to 500,000, even more preferably from 35,000 to 200,000. The polymeric suds stabilizer can optionally be present in the form of a salt, either an inorganic or organic salt.

One preferred polymeric suds stabilizer is (N,N-dimethylamino)alkyl acrylate esters. Other preferred suds boosting polymers are copolymers of hydroxypropylacrylate/dimethyl aminoethylmethacrylate (copolymer of IIPA/DMAM).

When present in the compositions, the polymeric suds booster/stabilizer may be present from 5 0.01% to 15%, preferably from 0.05% to 10%, more preferably from 0.1% to 5%, by weight of the liquid detergent composition.

Another preferred class of polymeric suds booster polymers is hydrophobically modified cellulosic polymers having a number average molecular weight (Mw) below 45,000; preferably between 10,000 and 40,000; more preferably between 13,000 and 25,000. The hydrophobically 10 modified cellulosic polymers include water soluble cellulose ether derivatives, such as nonionic and cationic cellulose derivatives. Preferred cellulose derivatives include methylcellulose, hydroxypropyl methylcellulose, hydroxyethyl methylcellulose, and mixtures thereof.

Diamines

15 Another optional ingredient of the compositions according to the present invention is a diamine. Since the habits and practices of the users of liquid detergent compositions show considerable variation, the composition may contain 0% to 15%, preferably 0.1% to 15%, preferably 0.2% to 10%, more preferably 0.25% to 6%, more preferably 0.5% to 1.5% by weight of said composition of at least one diamine.

20 Preferred organic diamines are those in which pK1 and pK2 are in the range of 8.0 to 11.5, preferably in the range of 8.4 to 11, even more preferably from 8.6 to 10.75. Preferred materials include 1,3-bis(methylamine)-cyclohexane (pKa=10 to 10.5), 1,3 propane diamine (pK1=10.5; pK2=8.8), 1,6 hexane diamine (pK1=11; pK2=10), 1,3 pentane diamine (DYTEK EP®) (pK1=10.5; pK2=8.9), 2-methyl 1,5 pentane diamine (DYTEK A®) (pK1=11.2; pK2=10.0).

25 Other preferred materials include primary/primary diamines with alkylene spacers ranging from C₄ to C₈.

Carboxylic Acid

30 The liquid detergent compositions according to the present invention may comprise a linear or cyclic carboxylic acid or salt thereof to improve the rinse feel of the composition. The presence of anionic surfactants, especially when present in higher amounts in the region of 15-35% by weight of the composition, results in the composition imparting a slippery feel to the hands of the

user and the dishes. This feeling of slipperiness is reduced when using the carboxylic acids as defined herein i.e. the rinse feel becomes slippery.

Carboxylic acids useful herein include C₁₋₆ linear or at least 3 carbon containing cyclic acids. The linear or cyclic carbon-containing chain of the carboxylic acid or salt thereof may be substituted
5 with a substituent group selected from the group consisting of hydroxyl, ester, ether, aliphatic groups having from 1 to 6, more preferably 1 to 4 carbon atoms, and mixtures thereof.

Preferred carboxylic acids are those selected from the group consisting of salicylic acid, maleic acid, acetyl salicylic acid, 3 methyl salicylic acid, 4 hydroxy isophthalic acid, dihydroxyfumaric acid, 1,2, 4 benzene tricarboxylic acid, pentanoic acid and salts thereof and mixtures thereof.

10 Where the carboxylic acid exists in the salt form, the cation of the salt is preferably selected from alkali metal, alkaline earth metal, monoethanolamine, diethanolamine or triethanolamine and mixtures thereof.

The carboxylic acid or salt thereof, when present, is preferably present at the level of from 0.1% to 5%, more preferably from 0.2% to 1% and most preferably from 0.25% to 0.5%, by weight of
15 the total composition.

Viscosity

The compositions of the present invention preferably have a viscosity of from 50 to 4000 centipoises (50 to 4000 mPa*s), more preferably from 100 to 2000 centipoises (100 to 2000
20 mPa*s), and most preferably from 500 to 1500 centipoises (500 to 1500 mPa*s) at 20 s⁻¹ and 20°C. Viscosity according to the present invention is measured using an AR 550 rheometer from TA instruments using a plate steel spindle at 40 mm diameter and a gap size of 500 µm. The high shear viscosity at 20s⁻¹ and low shear viscosity at 0.05 s⁻¹ can be obtained from a logarithmic shear rate sweep from 0.1 s⁻¹ to 25 s⁻¹ in 3 minutes time at 20°C. The preferred rheology
25 described therein may be achieved using internal existing structuring with detergent ingredients or by employing an external rheology modifier. Hence, in a preferred embodiment of the present invention, the composition comprises further a rheology modifier.

Turbidity (NTU) measurement

30 The turbidity (measured in NTU: Nephelometric Turbidity Units) is measured using a Hach 2100P turbidity meter calibrated according to the procedure provided by the manufacture. The sample vials are filled with 15ml of representative sample and capped and cleaned according to the operating instructions. If necessary, the samples are degassed to remove any bubbles either

by applying a vacuum or using an ultrasonic bath (see operating manual for procedure). The turbidity is measured using the automatic range selection.

Methods for hand washing dishes

5 The liquid hand dishwashing detergent compositions of the present invention can be used to wash dishes by various methods, depending on the level and type of soil or grease, and consumer preference.

One typical method is neat application of the composition which comprises the step of contacting said composition in its neat form, with the dish. Said composition may be poured directly onto
10 the dish from its container. Alternatively, the composition may be applied first to a cleaning device or implement, such as a sponge, woven material or nonwoven material. The cleaning device or implement, and consequently the liquid dishwashing composition in its neat form, is then directly contacted to the surface of each of the soiled dishes, to remove said soiling. The cleaning device or implement is typically contacted with each dish surface for a period of time
15 range from 1 to 10 seconds, although the actual time of application will depend upon factors such as the degree of soiling of the dish. The contacting of the cleaning device or implement to the dish surface is preferably accompanied by concurrent scrubbing. Alternatively, the device may be immersed in the liquid hand dishwashing detergent composition in its neat form, in a small container that can accommodate the cleaning device.

20 Prior to the application of said composition, the soiled dish may be immersed into a water bath, or held under running water, to wet the surface of the dish.

The method may comprise an optional rinsing step, after the step of contacting the liquid detergent composition with the dishes.

25 EXAMPLES

- The composition of example 1 is the reference. The reference composition does not comprise the ethoxylated anionic surfactant of the present invention (wt% linearity below 80% and average degree of ethoxylation of less than 0.8), and does not comprise an alkoxyated branched non-ionic surfactant.
- 30 - Example 2 is outside the scope of the present invention. Example 2 has the anionic surfactant of the present invention, but does not contain an alkoxyated branched non-ionic surfactant. As demonstrated in the table below, such composition provides

improved grease-cleaning, no improvement of the suds profile but poorer low temperature stability.

- 5 - Example 3 is also outside the scope of the present invention since it does not contain the specified anionic surfactant. However the composition of example 3 does contain the alkoxyated nonionic surfactant of the present invention. As demonstrated in the table below, such composition provides only limited improvement in grease-cleaning and suds longevity.
- 10 - Example 4 exemplifies a composition of the present invention. Such composition demonstrates a synergistic improvement in both grease-cleaning and suds longevity, while also having excellent low temperature stability.

TABLE 1

wt%	Ex. 1 (Ref)	Ex.2	Ex. 3	Ex. 4
Alkyl C ₁₀₋₁₄ Ethoxy Sulphate	26.9	26.9	26.9	26.9
- wt% linear alkyl chain	76	82	76	82
- molar av. degree ethoxylation	0.6	1	0.6	1
C12-14 dimethyl amine oxide	6.1	6.1	6.1	6.1
Branched Nonionic: 3-propyl heptanol EO8	-	-	1.0	1.0
PEI600-EO10-PO7 block polymer	0.8	0.8	0.8	0.8
Ethanol	3.0	3.0	2.5	2.5
Polypropylene glycol MW2000	1.1	1.1	1.1	1.1
Sodium Chloride	1.3	1.3	1.3	1.3
Minors* and water	to balance up to 100%			
Performance:	(Ref)			
Grease cleaning index	0	+12	+3	+20
Suds mileage index	0	0	+1	+8
Low temperature stability	pass	fail	pass	pass

* Dyes, opacifiers, perfumes, preservatives, processing aids, stabilizers, etc

Test methods:

1) Grease cleaning:

The grease cleaning performance was evaluated by measuring the relative removal of consumer average beef fat (CABF), coated in excess onto a support, removed after immersing for 90 minutes in a 0.1% by weight solution of the composition in water at 35°C and a water hardness of 15 dH. This was compared to the removal of beef fat (CABF) obtained with the reference detergent under the same conditions.

2) Suds endurance:

The longevity of the suds was measured by counting the number of plates, soiled with average consumer levels of beef fat (CABF), that could be washed, with a 0.1% by weight solution of the composition in water at 35°C and a water hardness of 15 dH, before the suds completely disappeared from the surface of the sink. This was compared to the number of plates that could be washed with the reference detergent under the same conditions.

3) Low temperature stability:

The stability of the compositions was evaluated by storing 50mL of the composition in 100mL PET bottles, at a constant temperature of -3°C for 3 days. The composition was inspected visually for visible precipitation and/or phase separation. Presence of visible precipitate and/or visually distinct phases were recorded as Fail, whereas a visually clear composition was recorded as Pass.

20

TABLE 2: Examples 5 to 11 are further embodiments of compositions of the present invention.

	Ex. 5	Ex. 6	Ex. 7	Ex. 8	Ex. 9	Ex. 10	Ex. 11
Alkyl C ₁₀₋₁₄ Ethoxy Sulphate	26.9	18.7	26.9	25.7	18.7	26.9	26.9
- wt% linear alkyl chain	82	92	82	92	82	83	92
- molar av. degree ethoxylation	1	1	1	2	1	1	1
Sodium alkyl benzene sulfonate	-	8.0	-	-	-	-	-
Sodium paraffin sulfonate	-	-	-	-	8.0	-	-
C12-14 dimethyl amine oxide	6.1	-	-	4.1	-	-	6.1
Cocamido propyl betaine	-	4.5	6.8	3.2	6.0	-	-
C12-13 EO7 nonionic	-	-	-	-	-	6.0	-

Branched Nonionic:								
3-propyl heptanol EO8	3.0	-	1.0	-	-	1.0	-	
3-propyl heptanol EO3	-	2.0	-	3.0	-	-	2.0	
C11-15 secondary alcohol EO20	-	-	-	-	2.0	-	-	
PEI600-EO10-PO7 block polymer	-	-	0.8	-	-	0.8	0.8	
Ethanol	4.0	5.0	3.0	3.0	2.0	3.0	3.0	
Polypropylene glycol MW2000	1.1	0.8	1.1	1.1	1.1	1.1	1.1	
Sodium Chloride	1.3	0.8	1.3	0.5	0.8	1.3	1.3	
Minors* and water	to balance up to 100%							


The dimensions and values disclosed herein are not to be understood as being strictly limited to the exact numerical values recited. Instead, unless otherwise specified, each such dimension is intended to mean both the recited value and a functionally equivalent range surrounding that value. For example, a dimension disclosed as “40 mm” is intended to mean “about 40 mm.”

What is claimed is:

1. A liquid hand dishwashing detergent composition comprising:
 - a. from about 2 % to about 70 % by weight of the composition of an ethoxylated anionic surfactant derived from a fatty alcohol, wherein:
 - i. at least 80% by weight of said fatty alcohol is linear, and
 - ii. said fatty alcohol has an average degree of ethoxylation of from about 0.8 to about 4; and
 - b. from about 0.1 to about 5% by weight of the composition of an alkoxyated branched nonionic surfactant, having an average degree of alkoxylation of from about 1 to about 40;wherein the total amount of surfactant is from about 10 to about 85 % by weight of the liquid detergent composition.
2. The composition according to claim 1, wherein the degree of alkoxylation of said branched nonionic is greater than the degree of ethoxylation of said ethoxylated anionic surfactant.
3. The composition according to claim 1, wherein said ethoxylated anionic surfactant is present at a level of from about 5 % to about 30 % by weight of the composition.
4. The composition according to any one of claims 1 to 3, further comprising from about 0.01% to about 20% by weight of amphoteric/zwitterionic surfactants.
5. The composition according to any one of claims 1 to 4, wherein said ethoxylated anionic surfactant is a saturated C₈-C₁₆ alkyl ethoxysulphate.
6. The composition according to any one of claims 1 to 5, wherein said ethoxylated anionic surfactant is derived from a naturally sourced alcohol.

7. The composition according to any one of claims 1 to 6, wherein said nonionic surfactant is present at a level of from about 0.2 % to about 3 % by weight of the composition.
8. The composition according to claim 7, wherein said nonionic surfactant has from 9 to 18 carbon atoms.
9. The composition according to claim 8, wherein said nonionic surfactant has from 10 to 14 carbon atoms.
10. The composition according to any one of claims 1 to 9, wherein said composition comprises less than 2% by weight of non-alkoxylated branched alcohol.
11. The composition according to any one of claims 1 to 10, wherein said nonionic surfactant has an average degree of alkoxylation of from about 3 to about 20.
12. The composition according to claim 11, wherein said nonionic surfactant has an average degree of alkoxylation of from about 7 to about 12.
13. The composition according to any one of claims 1 to 12, wherein said nonionic surfactant is ethoxylated and/or propoxylated.
14. The composition according to claim 13, wherein said nonionic surfactant is ethoxylated.
15. The composition according to claim 1, wherein said branched nonionic surfactant selected from:

a. Formula I:

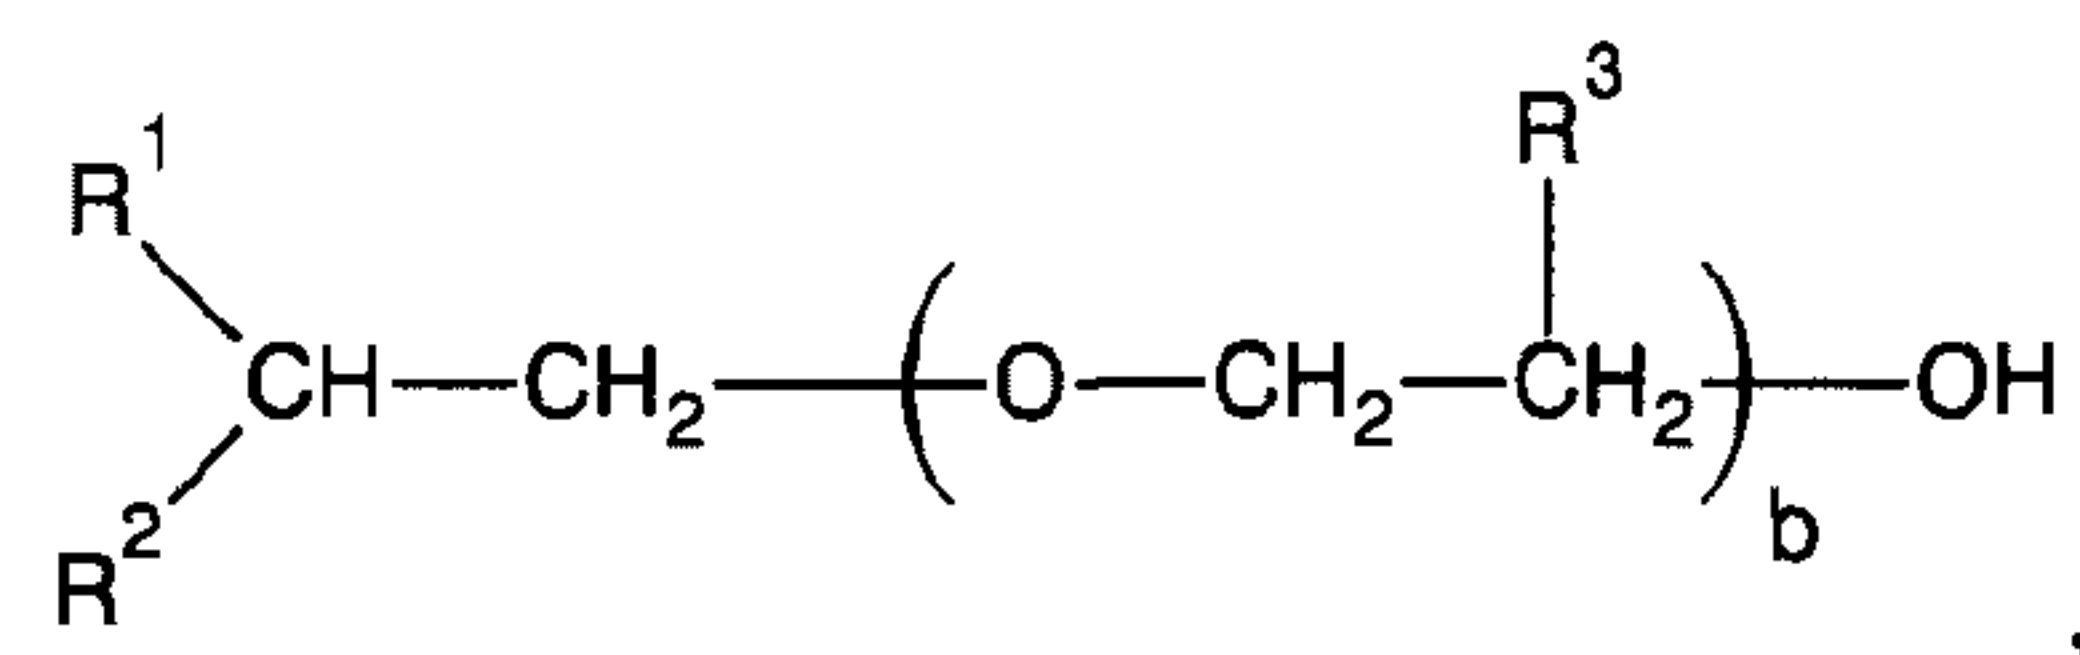

wherein, in formula I:


R1 is a C5 to C16 linear or branched;

R2 is a C1 to C8 linear or branched;

R3 is H or C1 to C4 alkyl;

b is a number from 1 to 40

b. Formula II:

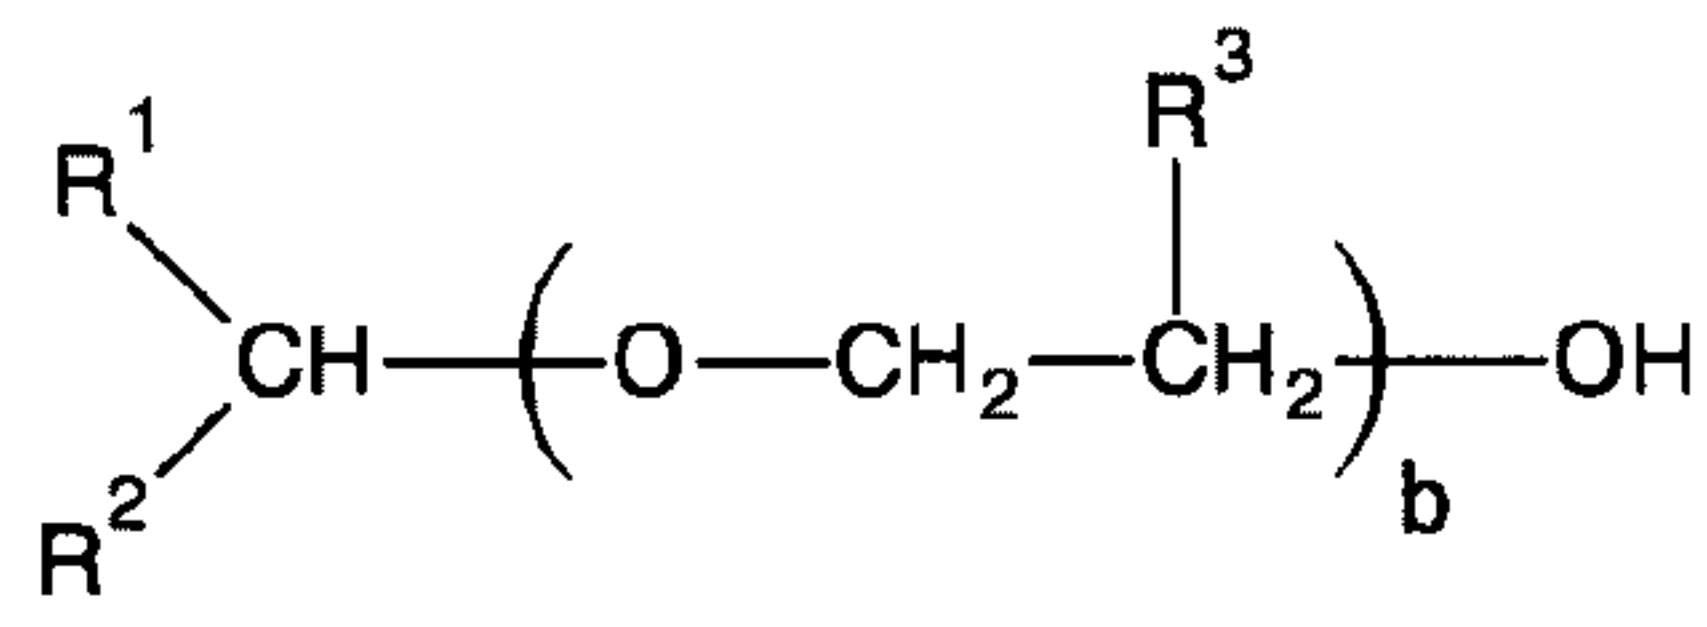

wherein, in formula II:

R1 is a C6 to C16 linear or branched, alkyl chain;

R2 is a C1 to C8 linear or branched, alkyl chain;

R3 is H or C1 to C4 alkyl;

b is a number from 1 to 40;

c. and mixtures thereof.

16. The composition according to claim 15, wherein the branched nonionic surfactant is selected from the group consisting of: Formula I, Formula II, and mixtures thereof, and R1 in Formula I and Formula II are independently linear alkyl chains.

17. The composition according to claim 15, wherein the branched nonionic surfactant is selected from the group consisting of: Formula I, Formula II, and mixtures thereof, and R2 in Formula I and Formula II are independently linear alkyl chains.

18. The composition according to claim 15, wherein the branched nonionic surfactant is selected from the group consisting of: Formula I, Formula II, and mixtures thereof, and R3 in Formula I and Formula II are independently H or methyl.

19. The composition according to claim 15, wherein the branched nonionic surfactant is selected from the group consisting of: Formula I, Formula II, and mixtures thereof, and b in Formula I and Formula II are independently a number from about 5 to about 20.

20. The method for hand washing dishes, using a composition according to any one of claims 1 to 19, wherein the method comprises the step of contacting said composition in undiluted form, with the dish.