

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2012282936 B2

(54) Title
Process for the preparation of fluticasone propionate form 1

(51) International Patent Classification(s)
C07J 7/00 (2006.01)

(21) Application No: **2012282936** (22) Date of Filing: **2012.07.06**

(87) WIPO No: **WO13/009591**

(30) Priority Data

(31) Number **61/505,612** (32) Date **2011.07.08** (33) Country **US**

(43) Publication Date: **2013.01.17**

(44) Accepted Journal Date: **2016.11.10**

(71) Applicant(s)
Pfizer Limited

(72) Inventor(s)
Ticehurst, Martyn David;Marziano, Ivan;Kougoulos, Eleftherios

(74) Agent / Attorney
Shelston IP Pty Ltd., Level 21, 60 Margaret Street, Sydney, NSW, 2000

(56) Related Art
WO 2000/038811 A1
STECKEL, H. ET. AL. International Journal of Pharmaceutics, 2003, 258, 63-75
WO 2003/061816 A1
US 2003/0181432 A1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/009591 A1

(43) International Publication Date
17 January 2013 (17.01.2013)

WIPO | PCT

(51) International Patent Classification:

C07J 7/00 (2006.01)

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/US2012/045660

(22) International Filing Date:

6 July 2012 (06.07.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/505,612 8 July 2011 (08.07.2011) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TICEHURST, Martyn David** [GB/GB]; Ramsgate Road, Sandwich Kent CT13 9NJ (GB). **MARZIANO, Ivan** [IT/GB]; Ramsgate Road, Sandwich Kent CT13 9NJ (GB). **KOUGOULOS, Eleftherios** [GR/US]; 4407 Hopson Road, Apt. 2308, Morrisville, North Carolina 27560 (US).

(74) Agent: **BALTATZIS, Andreas**; Kramer / Amado, P.C., 1725 Duke St., Suite 240, Alexandria, Virginia 22314 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

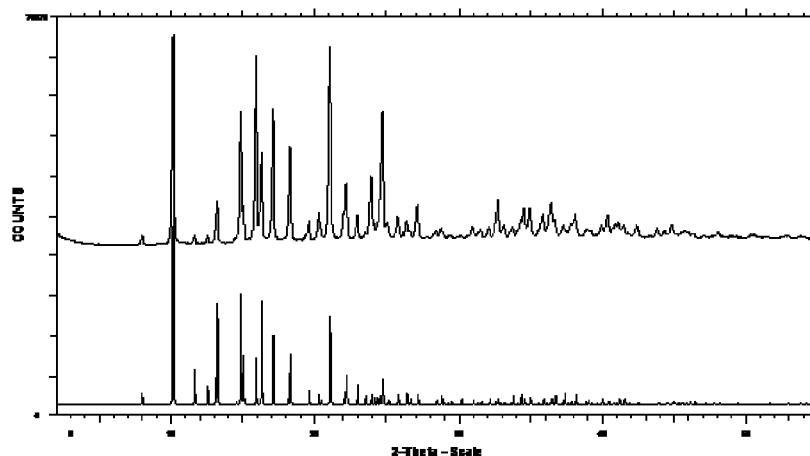
Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))
- with amended claims and statement (Art. 19(1))

(54) Title: PROCESS FOR THE PREPARATION OF FLUTICASONE PROPIONATE FORM 1



(57) Abstract: The invention relates to a novel crystallisation process for preparing fluticasone propionate as crystalline form 1 polymorph with controlled particle size and suitable for micronisation. Said process comprises the step of dissolving fluticasone propionate in acetone or in a mixture of acetone and water and then adding this solution to water or to a mixture of water 10 and acetone, thereby causing fluticasone propionate to crystallise out of the solution as crystalline form

WO 2013/009591 A1

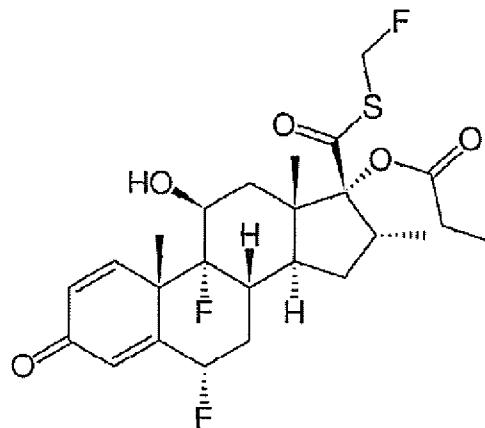
Process for the preparation of fluticasone propionate form 1

FIELD OF THE INVENTION

The present invention relates to a novel crystallisation process for preparing fluticasone propionate as crystalline form 1 polymorph with controlled particle size and suitable for micronisation.

BACKGROUND

Fluticasone propionate is a corticosteroid acting as a potent anti-inflammatory and which is used as crystalline form 1 in the treatment of rhinitis, eczema, psoriasis, asthma and COPD. It has the chemical name S-(fluoromethyl)-6 α ,9-10 difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate and the following chemical structure:



Several processes for preparing fluticasone propionate, in particular as its stable crystalline form 1, have been described in the literature. For example, WO 15 00/38811 discloses the crystallisation of fluticasone propionate dissolved in acetone by mixing with water in the presence of ultrasound radiation. WO 01/32125 discloses the crystallisation of fluticasone propionate by admitting a stream of solution of fluticasone propionate in acetone and a stream of water as 20 anti-solvent tangentially into a cylindrical mixing chamber having an axial outlet port such that said streams are intimately mixed through formation of a vortex. However, these processes are not easily scalable and use complex apparatus and technologies (such as use of ultrasound).

Other, more simple, crystallisation processes have also been proposed. For example, the so-called crystalline form 1 of fluticasone propionate can be obtained by dissolving the 25 crude product as obtained in e.g. GB 2088877 in 5 ethyl acetate and then re-crystallising.

Alternatively, a method for preparing fluticasone propionate as crystalline polymorphic form 1 by mixing a solution of fluticasone propionate in a non-solvating organic liquid solvent such as methyl acetate, ethyl acetate or 10 pentanone, with a non-solvating organic liquid anti-solvent such as toluene, isoctane or hexane thereby causing fluticasone propionate as crystalline form 1 to crystallise out of the solution has been described in WO 03/066653. However, it has been found that these crystallisation processes do not offer control and 15 flexibility in terms of output particle size distribution for fluticasone propionate. Similar to the majority of drugs intended for delivery to the lung, fluticasone propionate is usually subjected to micronisation prior to formulation to enable 20 production of appropriately sized respirable particles.

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

20 It is however well known from the literature that there is a link between the particle size of ingoing material and the size of micronized product, hence it is an object of a preferred embodiment of the invention to precisely control the particle size of the material that is fed into the microniser to ensure reliable and effective 25 drug delivery to the lung.

Any discussion of the prior art throughout the specification should in no way be considered as an admission that such prior art is widely known or forms part of common general knowledge in the field.

30 Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising", and the like are to be construed in an

inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

STATEMENTS OF THE INVENTION

- 5 According to a first aspect of the invention there is provided a process for preparing fluticasone propionate as crystalline polymorphic form 1 comprising the step of dissolving fluticasone propionate in a solvent to form a solution, and then adding the solution to a water-containing non-solvent, thereby causing fluticasone propionate to crystallise out of the solution as particles of crystalline
10 form 1 having a $D_{[V,0.5]}$ of between 2.8 microns and 11.4 microns;
 - wherein the solvent comprises acetone and from 0% to 10% water, based on the volume of the solvent; and
 - wherein the non-solvent comprises water and from 0% to 25% acetone, based on the volume of the non-solvent.
- 15 According to a second aspect of the invention there is provided fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained by a process according to the first aspect,
 - wherein said fluticasone propionate form 1 has a median particle size of between 5 microns and 35 microns.
- 20 According to a third aspect of the invention there is provided fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained in the form of particles by a process according to the first aspect,
 - wherein said particles do not exhibit agglomeration.

According to a fourth aspect of the invention there is provided fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained in the form of particles by a process according to the first aspect,

- wherein said particles are between 5 and 200 microns in length, and have a width of between 3 and 30 microns.

The present invention represents a solution to the above mentioned problems.

The present invention is indeed directed to a new crystallisation process for preparing fluticasone propionate as crystalline form 1 which is scalable, reproducible and does not involve complex apparatus. The crystallisation process according to the present invention also enables more flexibility and precise 5 control of product particle size distribution through variations in solvent composition. Finally the crystallisation process according to the present invention shows lower product loss in the micronisation chamber compared to a traditional anti-solvent crystallisation.

The present invention is thus directed to a process for preparing fluticasone 10 propionate as crystalline form 1, which comprises the step of dissolving fluticasone propionate in acetone or in a mixture of acetone and water and then adding this solution to water or to a mixture of water and acetone, thereby causing fluticasone propionate to crystallise out of the solution as crystalline form 1.

15 According to the present invention, the water or water/acetone mixture in which the fluticasone propionate solution is added may also be referred as the "non-solvent" or the "non-solvating mixture" respectively.

According to an embodiment, fluticasone propionate is dissolved in acetone containing 0 to 10% water, and the resulting solution is added to water containing 0 to 35% acetone. Preferably, fluticasone propionate is dissolved in acetone, and the resulting solution is added to water containing 0 to 30 % acetone.

5

According to another embodiment, a solution is prepared through dissolving fluticasone propionate in acetone or an acetone/water mixture with concentrations between 30 and 50 grams per litre of solvent. Preferably, said solution is prepared through dissolving fluticasone propionate in acetone or an acetone/water mixture with concentrations between 10 35 and 45 grams per litre of solvent.

According to a further embodiment, fluticasone propionate is dissolved in 1 volume of acetone or acetone/water mixture and this solution is then added to a volume of water or water/acetone mixture comprised between 0.65 and 1.35. Preferably, 1 volume of the 15 fluticasone propionate solution is added to a volume of water or water/acetone mixture comprised between 0.8 and 1.2. More preferably, 1 volume of the acetone/ fluticasone propionate solution is added to a volume of water or water/acetone mixture of about 1.

According to another embodiment, the addition takes place at a temperature comprised 20 between 10°C and 40°C. Preferably, the addition takes place at ambient temperature.

According to another embodiment, the addition takes place over a period comprised between 10 minutes and 6 hours. Preferably, the addition takes place over a period comprised between 30 minutes and 2 hours. More preferably, the addition takes place over 25 a period of about 1 hour.

According to another embodiment, the addition of the fluticasone propionate solution occurs via a pump in the form of pulsed aliquots.

30 During and following from the addition of the fluticasone propionate solution into the non-solvent or non-solvating mixture, nucleation and growth of fluticasone propionate occur. Once the fluticasone propionate solution addition into the non-solvent or non-solvating mixture is completed, the slurry formed is stirred over a period comprised between 0 and

12 hours, followed by filtration and drying. Preferably, the slurry is stirred over a period of comprised between 1 hour and 10 hours. More preferably, the slurry is stirred over a period comprised between 4 hours and 8 hours. Still more preferably, the slurry is stirred over a period of about 1 hour.

5

The process according to the present invention is particularly advantageous since it allows good flexibility and control of the physical properties of the fluticasone propionate obtained, in particular the size and shape of the particles obtained. This is exemplified in Figure 1, showing the dependence of particle size on solvent composition when fluticasone 10 propionate is crystallised using the process described in the present invention. Surprisingly, it has been found that the specific reverse anti-solvent crystallization process according to the present invention allows the crystallization of fluticasone propionate with different particle sizes through variations in solvent composition and also delivers fluticasone propionate particles which do not exhibit the agglomeration which is typical of conventional 15 anti-solvent crystallization, as described for example by Murnane *et al.* in Cryst. Growth Des. 2008, 8, 2753-2764 and as illustrated in Figure 2.

In addition to influencing the efficacious delivery of intra-nasal and pulmonary drug 20 formulations, control of physical properties of fluticasone propionate is also important since these properties influence bulk density, flow and downstream processing characteristics of the product.

Typically, the process according to the present invention yields particles that are 5-200 µm 25 in length with a width of 3-30 µm. The fluticasone propionate particles obtained by the process according to the present invention thus have the most appropriate design, in particular for micronisation and formulation with lactose as a dry powder and administration with a dry powder inhaler such as the device described in e.g. WO 2005/002654. The particles of fluticasone propionate obtainable from the herein described crystallisation process thus constitute another object of the present invention.

30

An additional and significant advantage of the particles resulting from the process according to the present invention is the increased yield in micronized fluticasone propionate due to lower loss of product in the jet milling chamber, compared to

micronisation input obtained from a conventional anti-solvent process

Fluticasone propionate may be prepared according to any of the processes known from the literature such as e.g the process described in GB 2088877. Alternatively, fluticasone propionate is also commercially available for a number of suppliers, e.g. Hovione, Sterling or NewChem.

5 The particles of fluticasone propionate as obtained from the crystallisation process according to the present invention may be micronized to a controlled size and formulated 10 with lactose so as to form a dry powder blend.

Fluticasone propionate as obtained from the process according to the present invention is particularly suitable for micronisation and administration by inhalation from a dry powder inhaler. Typically, it is administered in the form of a dry powder as a mixture with lactose.

15 To that effect, the particles of fluticasone propionate as obtained from the process according to the present invention are micronized by jet miling, and subsequently blended with lactose. The lactose used according to the present invention may be anhydrous or in the form of the monohydrate. Preferably, α -lactose monohydrate is used. The blend thus 20 obtained is then suitable for filling into a dry powder inhaler.

25 The dosage unit is determined by a pre-filled capsule, blister or pocket or by a system that uses a gravimetrically fed dosing chamber. Units in accordance with the invention are typically arranged to administer a metered dose or "puff" containing from 50 to 500 μ g of fluticasone propionate as obtained from the process according to the present invention. The overall daily dose will typically be in the range of 50 μ g to 2 mg which may be administered in a single dose or, more usually, as divided doses throughout the day.

30 The fluticasone propionate obtained from the process according to the present invention may be administered alone or in combination with one or more other drugs. Suitable examples of other therapeutic agents which may be used in combination with fluticasone propionate include, but are by no means limited to β_2 agonists, preferably long-acting β_2

agonists, and M3 muscarinic antagonists, preferably long-acting M3 muscarinic antagonists.

Examples of suitable β_2 agonists include in particular salbutamol, terbutaline, bambuterol,

5 fenoterol, salmeterol, formoterol, tulobuterol and their salts. Preferably the β_2 agonist is selected from salmeterol or formoterol and their salts. More preferably, the β_2 agonist is salmeterol xinafoate.

Examples of suitable M3 muscarinic antagonists include in particular ipratropium,

10 oxitropium, tiotropium and their salts. Preferably the M3 muscarinic antagonist is tiotropium bromide.

According to a preferred embodiment, fluticasone propionate as obtained from the process according to the present invention is administered by inhalation as a dry powder either 15 alone or in combination with salmeterol xinafoate.

The figures and examples below further illustrate the present invention.

FIGURES

20

Figure 1/10: Effect of acetone % in the anti-solvent mixture on the volume median diameter D[v, 0.5] for a reverse anti-solvent process.

Figure 2/10: Crystals of fluticasone propionate obtained from example 1.

Figure 3/10: Crystals of fluticasone propionate obtained from example 2.

25 **Figure 4/10:** PXRD patterns for Example 2 product (top line) and reference fluticasone propionate form 1 pattern for comparison (bottom line).

Figure 5/10: Crystals of fluticasone propionate obtained from example 3.

Figure 6/10: PXRD pattern for example 3 product (top line) and reference fluticasone propionate form 1 pattern for comparison (bottom line).

30 **Figure 7/10:** Crystals of fluticasone propionate obtained from example 4.

Figure 8/10: PXRD pattern for example 4 product (top line) and reference fluticasone propionate form 1 pattern for comparison (bottom line).

Q: Crystals of fluticasone propionate obtained from example 5.

Figure 10/10: PXRD pattern for example 5 product (top line) and reference fluticasone propionate form 1 pattern for comparison (bottom line).

5 EXAMPLES

Example 1: Re-crystallisation of fluticasone propionate using a standard anti-solvent process

10 1.0g of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 25mL acetone. The mixture was heated to 40°C, and then cooled to 20°C. 25mL water was added to the solution at approximatively 20°C. Crystallisation of the product was observed during the addition. The slurry was
15 filtered under vacuum, and the isolated solid was dried in an oven at 50°C under 0.9 bar vacuum, yielding fluticasone propionate Form 1. Crystals obtained from this experiment are shown in Figure 2.

Example 2: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

20 7.5g of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 225mL acetone. The mixture was heated to 40°C, and then cooled to 10°C. The chilled solution was added to a separate agitated vessel containing 225mL water at 40°C over a period of 10 minutes. Crystallisation of the product was observed during the addition. The mixture was cooled down to 20°C and held at that temperature for 12 hours. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 50°C under 0.9 bar vacuum, yielding 6.94g of fluticasone propionate 30 (92.4% theoretical yield).

Crystals obtained from this experiment are shown in Figure 3.

Powder X-Ray Diffraction Data

The powder X-ray diffraction pattern was determined using a Bruker-AXS Ltd. D4 powder X-ray diffractometer fitted with an automatic sample changer, a theta-theta goniometer, automatic beam divergence slit, and a PSD Vantec-1 detector. The sample was prepared 5 for analysis by mounting on a low background cavity silicon wafer specimen mount. The peaks obtained were aligned against a silicon reference standard. The specimen was rotated whilst being irradiated with copper K-alpha1 X-rays (wavelength = 1.5406 Ångstroms) with the X-ray tube operated at 40kV/35mA. The analyses were performed with the goniometer running in continuous mode set for a 0.2 second count per 0.018° step 10 over a two theta range of 2° to 55°. Characteristic diffraction angles for the two known polymorphs of fluticasone propionate, as reported in EU Patent EP 0 937 100 B1, are as indicated below in table 1:

TABLE 1

Polymorph	Primary Peaks (°)		Secondary peaks (°)						
	Form 1	7.9	10.0	11.5	12.4	13.1	-	14.9	-
Form 2	7.6	9.8	-	-	13.0	13.6	-	15.2	-

15 A PXRD pattern of the product obtained from this experiment, shown to match that of form 1 for fluticasone propionate, is shown in Figure 4.

Example 3: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

20 10g of fluticasone propionate [S-(fluoromethyl)-6α,9-difluoro-11β-17-dihydroxy-16α-methyl-3-oxoandrosta-1,4-diene-17β-carbothioate, 17-propionate] obtained from a commercial source was mixed with 200mL acetone. The mixture was heated to 40°C, and then cooled to 10°C. The chilled solution was added to a separate agitated vessel containing 200mL 25 water at 10°C over a period of 10 minutes. Crystallisation of the product was observed during the addition. The mixture was heated to 20°C and held at that temperature for 12 hours. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 50°C under 0.9 bar vacuum, yielding 9.33g of fluticasone propionate (93.3% theoretical yield).

Crystals obtained from this experiment are shown in Figure 5.

A PXRD pattern from the product, shown to match that of form 1 for fluticasone propionate,

5 is shown in Figure 6.

Example 4: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

10 9g of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 270mL acetone. The mixture was heated to 40°C, and then cooled to 10°C. The chilled solution was added to a separate agitated vessel containing 175mL water and 75mL acetone at 10°C over a period of 6 hours. Crystallisation of the product 15 was observed during the addition. The mixture was heated to 20°C and held at that temperature for 12 hours. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 50°C under 0.9 bar vacuum, yielding 8.56g of fluticasone propionate (95.1% theoretical yield).

20 Crystals obtained from this experiment are shown in Figure 7.

A PXRD pattern from the product, shown to match that of form 1 for fluticasone propionate, is shown in Figure 8.

25 **Example 5: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention**

9g of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial 30 source was mixed with 162mL acetone and 18mL water. The mixture was heated to 40°C, and then cooled to 10°C. The chilled solution was added to a separate agitated vessel containing 270mL water at 10°C over a period of 6 hours. Crystallisation of the product was observed during the addition. The mixture was heated to 20°C and filtered under vacuum.

1 solid was dried in an oven at 50°C under 0.9 bar vacuum, yielding 7.56 g of fluticasone propionate (84.0% theoretical yield).

Crystals obtained from this experiment are shown in Figure 9.

5

A PXRD pattern from the product, shown to match that of form 1 for fluticasone propionate, is shown in Figure 10.

Example 6: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

10 0.958Kg of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 24.7L acetone. The mixture was heated to 35°C, 15 and then cooled to 20°C. The solution was added to a separate agitated vessel containing 24L water at 20°C over a period of 2 hours. Crystallisation of the product was observed during the addition. The mixture was held at 20°C for 1 hour with agitation. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 75°C under 0.9 bar vacuum, yielding 0.85Kg of fluticasone propionate (88.3% 20 theoretical yield).

Example 7: Re-crystallisation of fluticasone propionate using the reverse antisolvent process of the present invention

25 2.50Kg of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α - 25 methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 62.5L acetone. The mixture was heated to 35°C, and then cooled to 20°C. The solution was added to a separate agitated vessel containing 47L water and 15.5L acetone at 20°C over a period of 2 hours. 30 Crystallisation of the product was observed during the addition. The mixture was held at 20°C for 1 hour with agitation. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 75°C under 0.9 bar vacuum, yielding 2.26Kg of fluticasone propionate (90.4% theoretical yield).

Example 8: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

9.5Kg of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 237.5L acetone. The mixture was heated to 35°C, and then cooled to 20°C. The solution was added to a separate agitated vessel containing 237.5L water at 20°C over a period of 4 hours. Crystallisation of the product was observed during the addition. The mixture was held at 20°C for 4 hours with agitation. The slurry was 10 filtered under vacuum, and the isolated solid was dried in an agitated dryer at 75°C under 0.9 bar vacuum, yielding 8.5Kg of fluticasone propionate (89.2% theoretical yield).

Example 9: Re-crystallisation of fluticasone propionate using the reverse anti-solvent process of the present invention

15 2.50Kg of fluticasone propionate [S-(fluoromethyl)-6 α ,9-difluoro-11 β -17-dihydroxy-16 α -methyl-3-oxoandrosta-1,4-diene-17 β -carbothioate, 17-propionate] obtained from a commercial source was mixed with 56.25L acetone and 6.25L water. The mixture was heated to 35°C, and then cooled to 20°C. The solution was added to a separate agitated 20 vessel containing 40.6L water and 21.9L acetone at 20°C over a period of 1 hour. Crystallisation of the product was observed during the addition. The mixture was held at 20°C for 1 hour with agitation. The slurry was filtered under vacuum, and the isolated solid was dried in an oven at 75°C under 0.9 bar vacuum, yielding 2.15Kg of fluticasone propionate (86.0% theoretical yield).

25

Example 10: Particle size data as measured by laser diffraction

The following particle size assays for crystallised and micronized fluticasone propionate were used in this experiment:

30

Particle size method for recrystallised FP:

The particle size distribution was measured on the Malvern Mastersizer 2000 laser diffraction system equipped with a Hydro 2000S liquid dispersion unit and flow cell. The

sample was prepared by adding 15 drops of Tween 80 to crystallised fluticasone propionate within the glass 4 dram vial and mixing into a paste using a spatula, until all of the powder is wetted out and a smooth, uniform paste is achieved. Then the paste is added to the Hydro 2000S containing dispersant (0.1% Tween 80 in deionised water) using a spatula. When the obscuration target is achieved (20% \pm 5%) the sample is left to stir within the Hydro 2000S for 1 minute to allow the particles to wet out, disperse and ensure a stable obscuration is achieved. Measurement is initiated after 1 minute of stirring.

Particle size method for micronised FP:

10 The particle size distribution was measured on the Sympatec HELOS laser diffraction system (with R1 optical module giving a measuring range of 0.1 / 0.18 – 35 μm) together with SUCELL dispersing module. 100 mg of micronised sample is weighed into a 4-dram vial and 15 drops (approximately 0.5 mL) of Tween 80 is added from a 3ml wide-tipped pipette to the powder. The mixture is then carefully stirred into a paste until all the particles 15 are wetted out and a uniform smooth mixture is achieved. Then the paste is added to the SUCELL containing dispersant (0.025% Tween 80 in deionised water) using a spatula. Once the optical concentration target is achieved (10-15%) then a measurement is taken.

20 The particle size data expressed as $D[v, 0.1]$, $D[v, 0.5]$ and $D[v, 0.9]$ obtained from examples 2-9 are summarized below in Table 2. $D[v, 0.1]$, $D[v, 0.5]$ and $D[v, 0.9]$ represent the 10th percentile volume diameter; 50th percentile volume diameter; and 90th percentile volume diameter respectively. In general the n^{th} percentile volume diameter is defined so that $n\%$ of the particles have a volume equivalent particle diameter smaller than or equal to the n^{th} percentile diameter. In the case of $D[v, 0.5]$, it coincides with the median value.

25

TABLE 2

Batch	$D[v, 0.1]$ (μm)	$D[v, 0.5]$ (μm)	$D[v, 0.9]$ (μm)
Example 2	2.5	6.7	15.7
Example 3	2.1	5.1	11.357
Example 4	15.4	55.1	135.9
Example 5	2.1	5.9	15.2

Example 6	2.0	5.3	12.4
Example 7	3.4	11.4	32.1
Example 8	1.3	2.8	5.6
Example 9	6.2	22.5	53.4

This experiment shows that the particle size distribution varies through variations in solvent composition.

5 **Example 11: particle size data before and after micronisation**

Particles were micronized using a JetPharma MC150 (6 inch spiral jet mill) using the following conditions:

- Feed rate: 15 g/min
- Mill pressure: 3.5 bar
- Venturi Pressure: 5.5 bar
- Micronisation scale: 0.5 Kg.

The micronisation comparison of Examples 8 and 9 showing the impact of ingoing particle size on micronisation output is summarized in Table 3 below:

TABLE 3

Batch	Ingoing particle size $D[v,0.5]$ (μm)	Post-micronisation particle size $D[v,0.5]$ (μm)
Example 8	2.8	2.3
Example 9	22.5	4.0

Example 12: product recovery after micronisation

An additional and significant advantage of the particles resulting from the process according to the present invention is the increased yield in micronized fluticasone propionate due to lower loss of product in the jet milling chamber, compared to

micronisation input obtained from a conventional anti-solvent process such as the one described in Example 1. Several batches crystallised by either conventional anti-solvent techniques (as described in Example 1) or reverse anti-solvent techniques according to the present invention (as described Examples 2-9) were micronized, and the results 5 summarised on Table 4 below show that the percentage of product collected after micronisation was on average much higher for reverse anti-solvent product batches than for conventional anti-solvent ones. Additionally, a much lower portion of product was left in the mill chamber if the product had originated from reverse anti-solvent.

10

TABLE 4: Summary of product recovery after micronisation for anti-solvent and reverse anti-solvent batches.

Crystallization technique	% batch left in mill chamber	% batch recovered
Conventional anti-solvent technique	10.6	53
Conventional anti-solvent technique	13.9	46.5
Conventional anti-solvent technique	5.5	35.6
Conventional anti-solvent technique	8.5	59.2
Reverse anti-solvent according to present invention	2.1	63.1
Reverse anti-solvent according to present invention	2.2	78.9
Reverse anti-solvent according to present invention	3.7	43.7
Reverse anti-solvent according to present invention	1.0	63.1
Reverse anti-solvent according to present invention	1.0	81

CLAIMS

1. A process for preparing fluticasone propionate as crystalline polymorphic form 1 comprising the step of dissolving fluticasone propionate in a solvent to form a solution, and then adding the solution to a water-containing non-solvent, 5 thereby causing fluticasone propionate to crystallise out of the solution as particles of crystalline form 1 having a $D_{[v,0.5]}$ of between 2.8 microns and 11.4 microns;
 - wherein the solvent comprises acetone and from 0% to 10% water, based on the volume of the solvent; and
 - 10 wherein the non-solvent comprises water and from 0% to 25% acetone, based on the volume of the non-solvent.
2. A process according to claim 1, wherein fluticasone propionate is dissolved in the solvent in an amount between 30 and 50 grams per litre of 15 solvent.
3. A process according to claim 1, wherein fluticasone propionate is dissolved in a first defined volume of the solvent to form a solution, and the solution is then added to a second defined volume of the non-solvent;
 - 20 a ratio of the first defined volume to the second defined volume being between 1:0.65 and 1:1.35.
4. A process according to claim 2, wherein fluticasone propionate is dissolved in a first defined volume of the solvent to form a solution, and the 25 solution is then added to a second defined volume of the non-solvent;
 - a ratio of the first defined volume to the second defined volume being between 1:0.65 and about 1:1.35.
5. A process according to any one of the preceding claims, wherein said 30 adding the solution takes place at a temperature between about 10°C and about 40°C.
6. A process according to any one of the preceding claims, wherein said

adding the solution takes place over a period of between about 10 minutes and about 6 hours.

7. A process according to claim 5, wherein said adding the solution takes 5 place over a period of between about 10 minutes and about 6 hours.

8. A process according to any one of the preceding claims, wherein said adding the solution occurs via a pump in the form of pulsed aliquots.

10 9. A process according to any one of the preceding claims, wherein said adding the solution occurs over a period of between about 10 minutes and about 6 hours via a pump in the form of pulsed aliquots.

15 10. A process according to any one of the preceding claims, wherein once the step of adding the solution to the non-solvent is completed, a slurry forms and the slurry is stirred over a period of between 0 and about 12 hours, followed by filtration of the slurry to recover fluticasone propionate as crystalline form 1 and drying of the recovered fluticasone propionate.

20 11. A process according to claim 5, wherein once the step of adding the solution to the non-solvent is completed, a slurry forms and the slurry is stirred over a period of between 0 and about 12 hours, followed by filtration of the slurry to recover fluticasone propionate as crystalline form 1 and drying of the recovered fluticasone propionate.

25 12. A process according to 7, wherein once the step of adding the solution to the non-solvent is completed, a slurry forms and the slurry is stirred over a period of between 0 and about 12 hours, followed by filtration of the slurry to recover fluticasone propionate as crystalline form 1 and drying of the recovered 30 fluticasone propionate.

13. A process according to claim 8, wherein once the step of adding the solution to the non-solvent is completed, a slurry forms and the slurry is stirred over a period of between 0 and about 12 hours, followed by filtration of the slurry

to recover fluticasone propionate as crystalline form 1 and drying of the recovered fluticasone propionate.

14. Fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained by a process according to any one of the preceding claims,

wherein said fluticasone propionate form 1 has a median particle size of between 5 microns and 35 microns.

10 15. Fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained in the form of particles by a process according to any one of the preceding claims,

wherein said particles do not exhibit agglomeration.

15 16. Fluticasone propionate form 1, wherein said fluticasone propionate form 1 is obtained in the form of particles by a process according to any one of the preceding claims,

wherein said particles are between 5 and 200 microns in length, and have a width of between 3 and 30 microns.

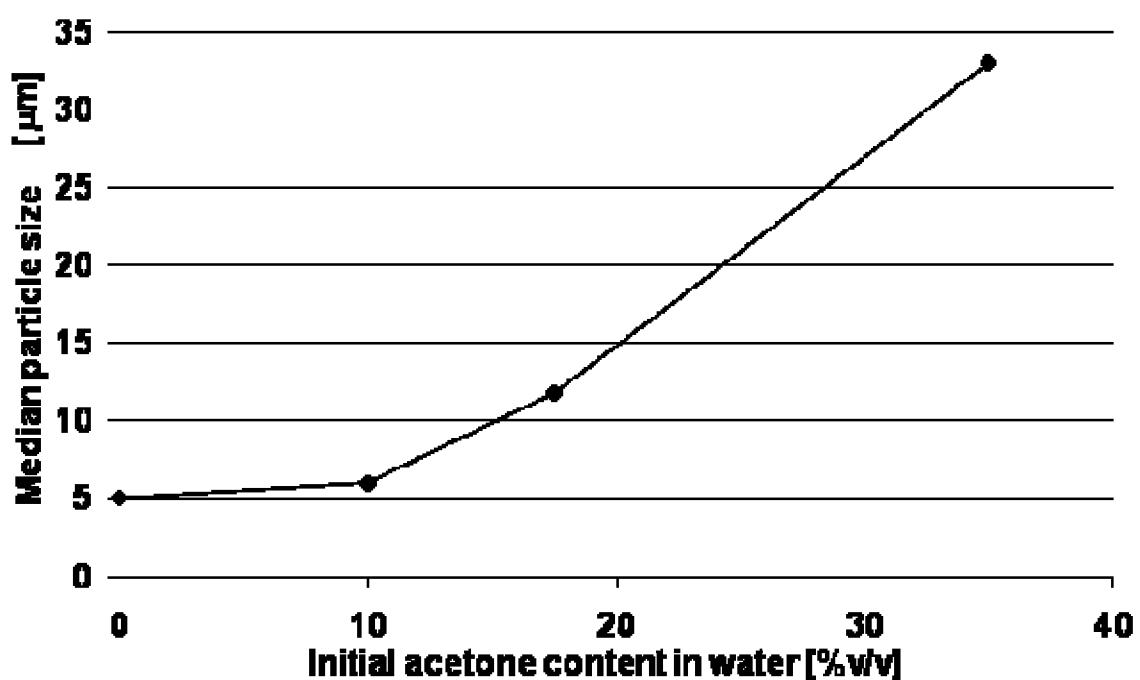
FIGURE 1 OF 10

FIGURE 2 OF 10

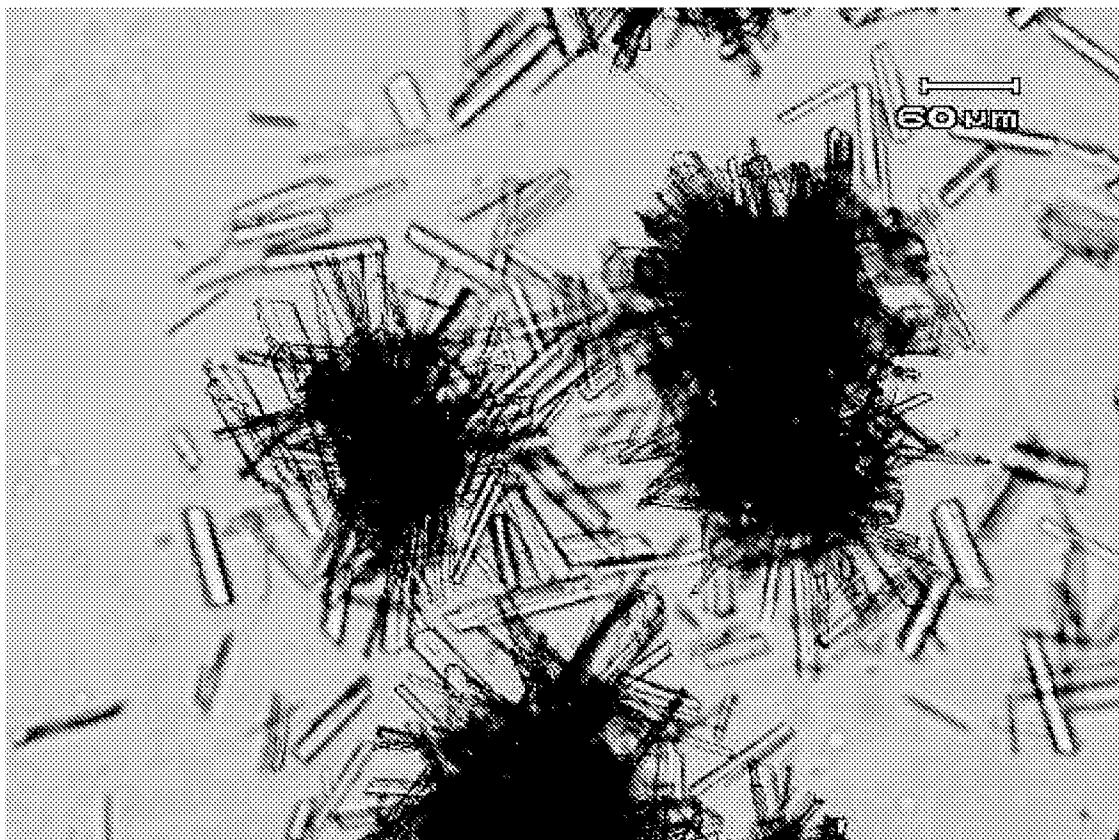


FIGURE 3 OF 10

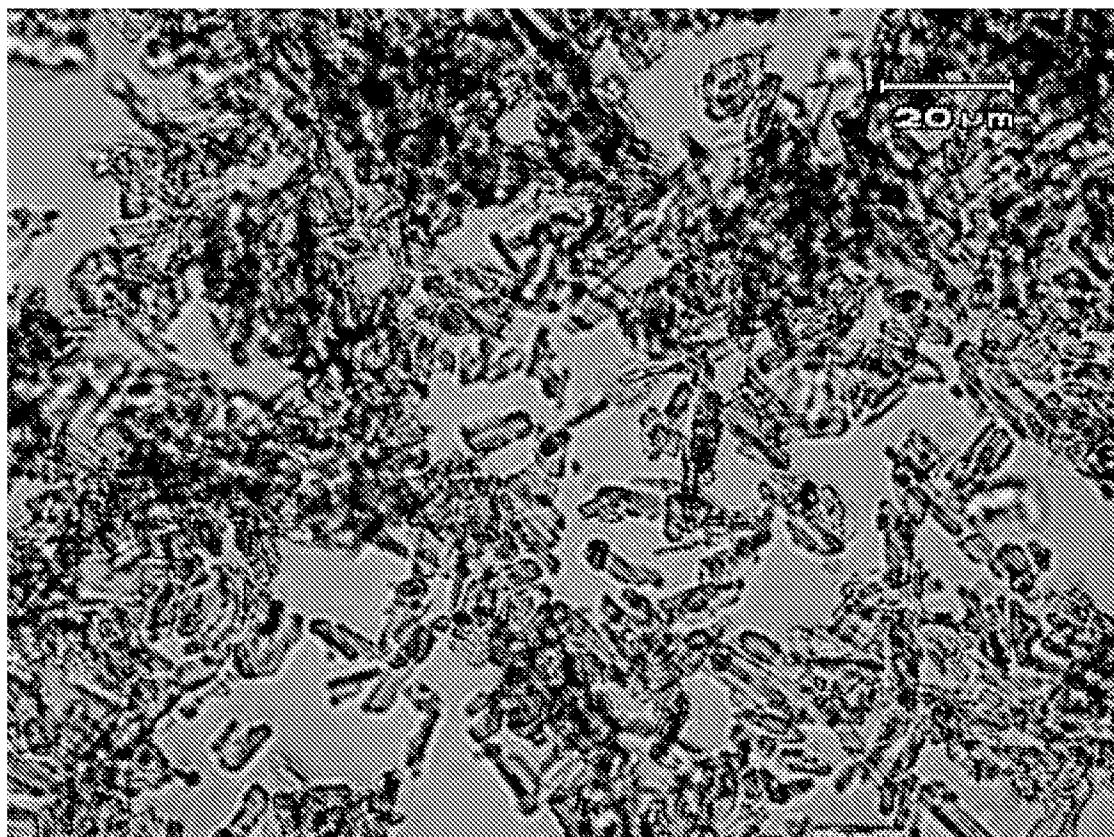



FIGURE 4 OF 10

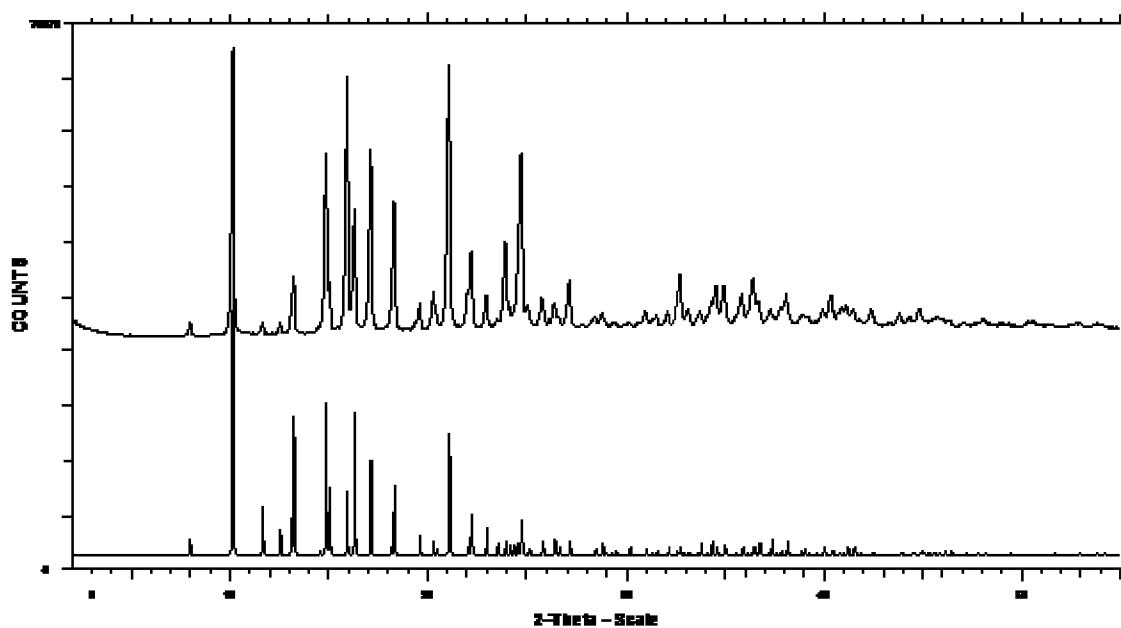FIGURE 5 OF 10

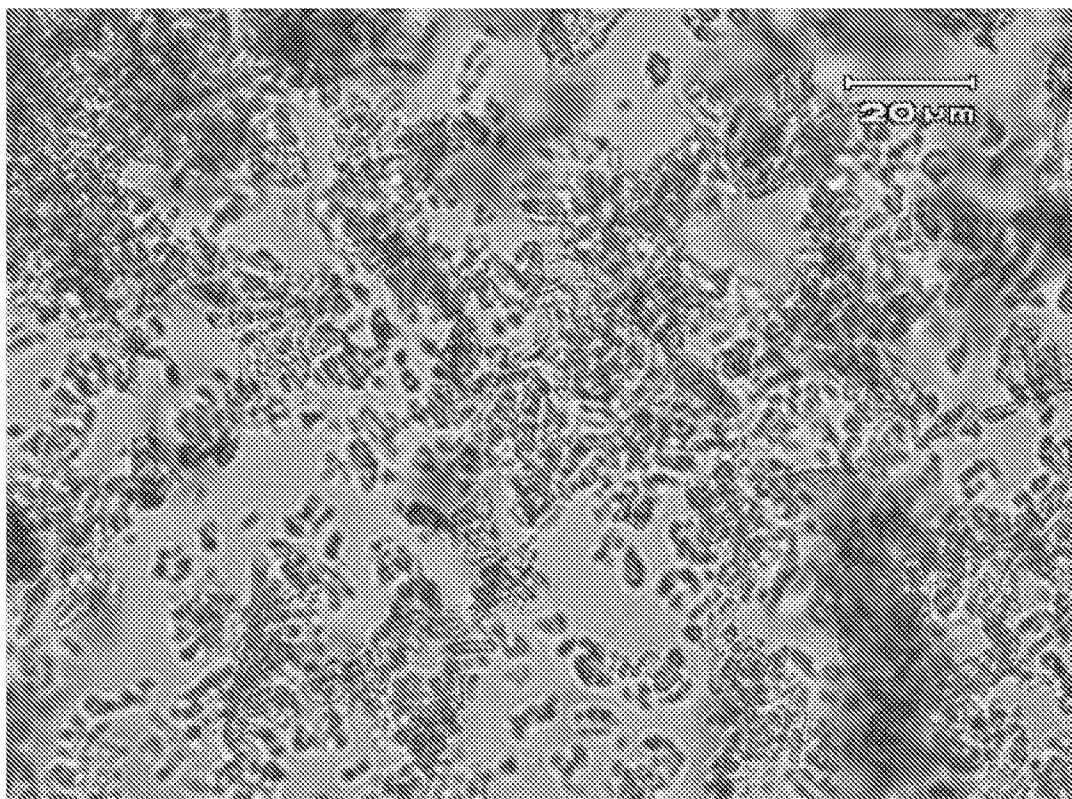


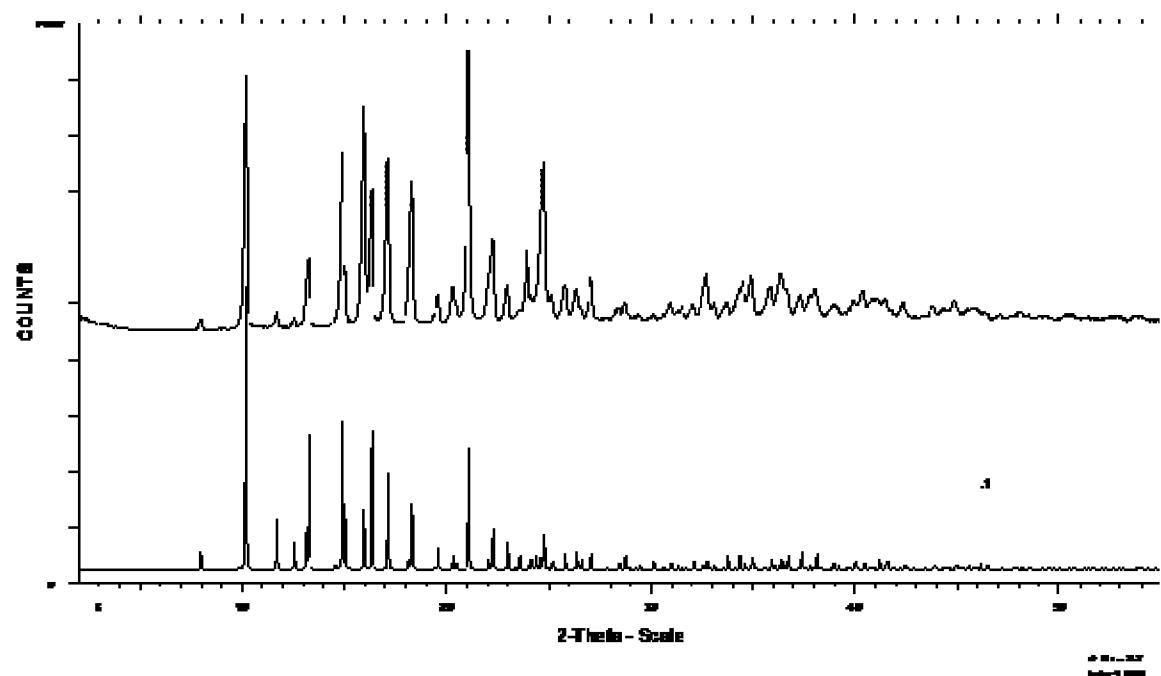
FIGURE 6 OF 10

FIGURE 7 OF 10

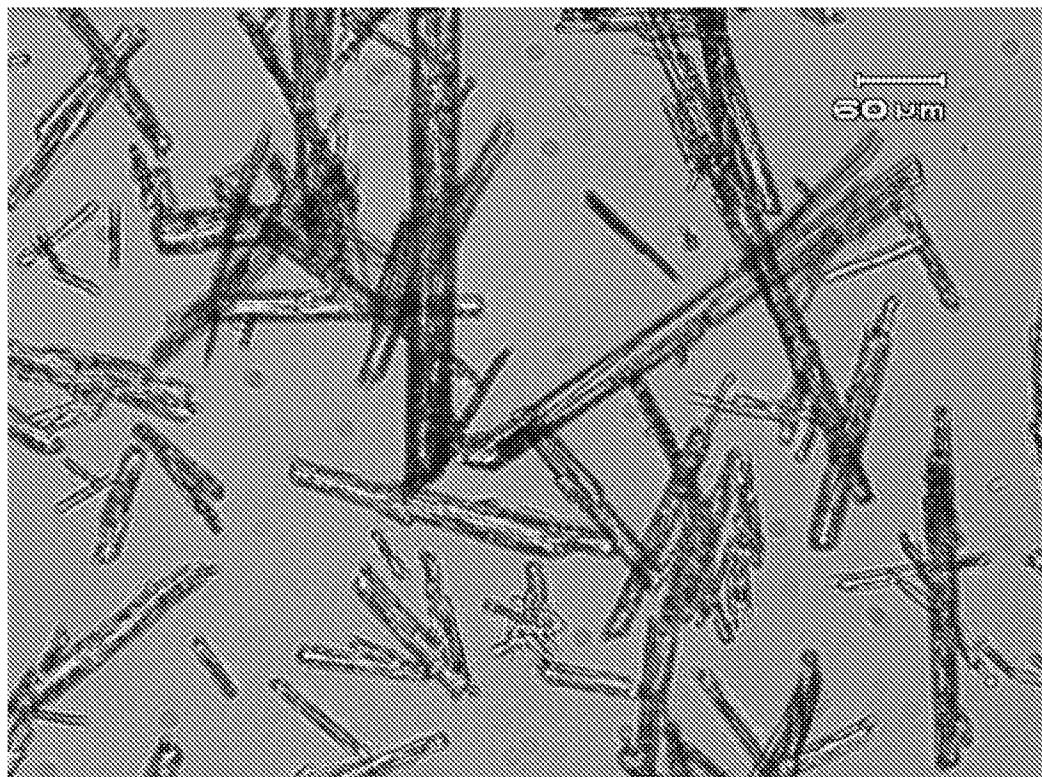


FIGURE 8 OF 10

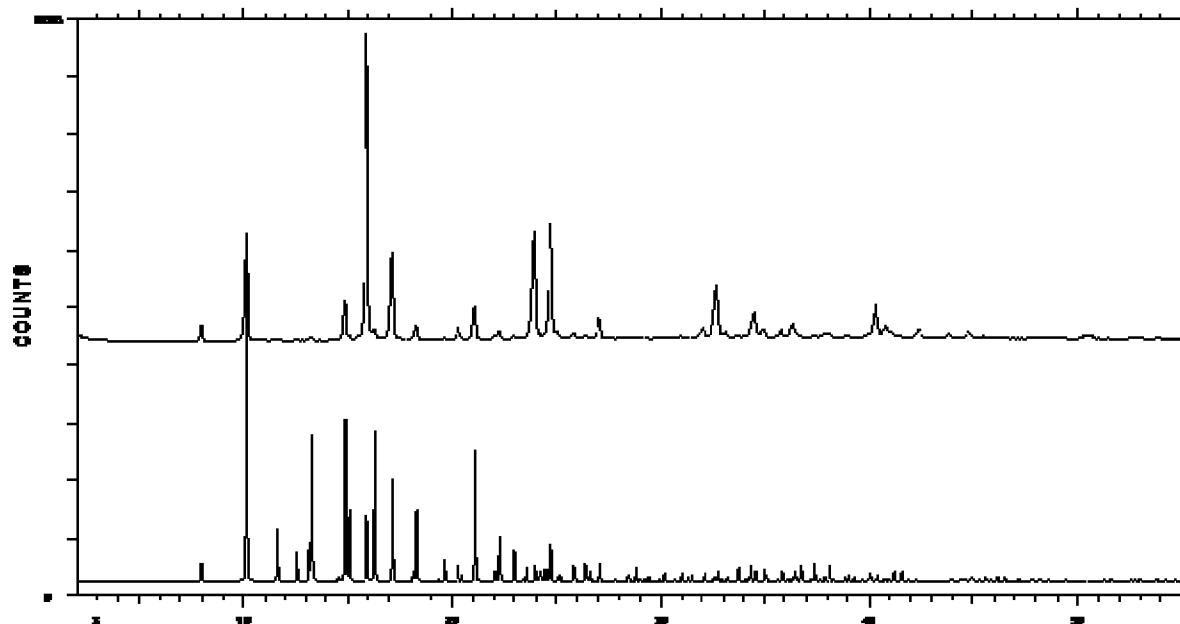


FIGURE 9 OF 10

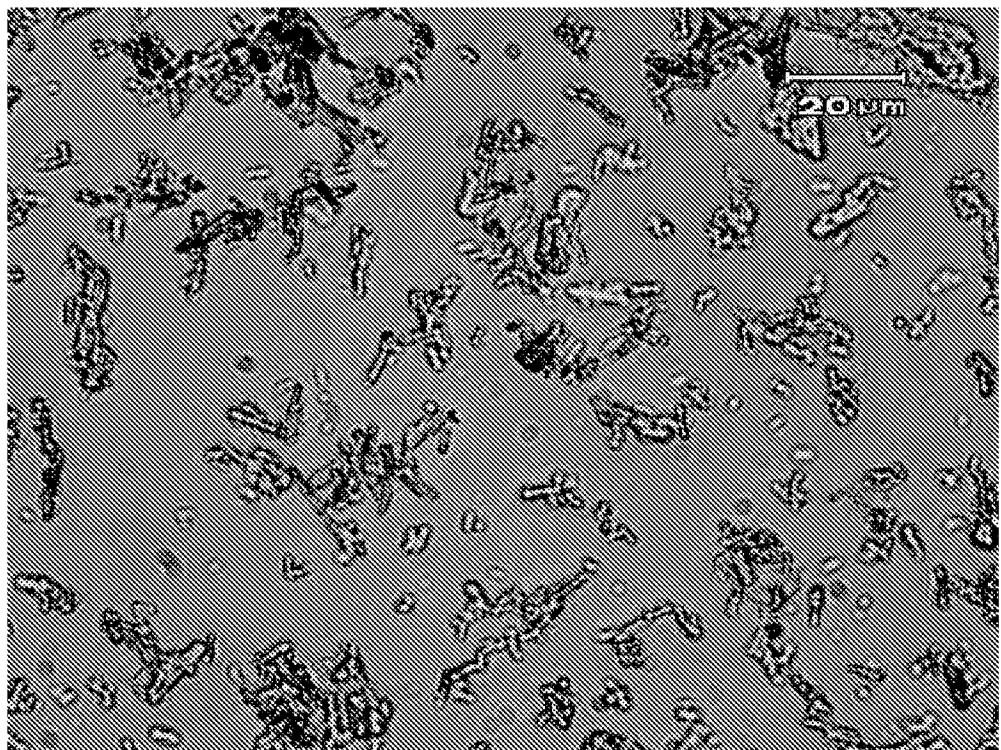


FIGURE 10 OF 10