



(51) International Patent Classification:

B82Y 20/00 (2011.01) **G02F 1/01** (2006.01)
G02B 6/35 (2006.01)

(21) International Application Number:

PCT/IL2016/050339

(22) International Filing Date:

30 March 2016 (30.03.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/139,814 30 March 2015 (30.03.2015) US

(71) Applicant: **YEDA RESEARCH AND DEVELOPMENT CO. LTD.** [IL/IL]; At The Weizmann Institute of Science, P.O Box 95, 7610002 Rehovot (IL).(72) Inventors: **DAYAN, Barak**; 19 Yaakov Meridor Street, 69411 Tel Aviv (IL). **SHOMRONI, Itay**; c/o YEDA RESEARCH AND DEVELOPMENT CO.LTD, At the Weizmann Institute of Science, P.O Box 95, 7610002 Rehovot (IL). **ROSENBLUM, Serge**; c/o YEDA RESEARCH AND DEVELOPMENT CO.LTD, At the Weizmann Institute of Science, P.O Box 95, 7610002 Rehovot (IL).(74) Agents: **VAN DER BOOM, Tamar** et al.; Pearl Cohen Zedek Latzer Baratz, P.O.Box 12704, 4673339 Herzliya (IL).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ALL-OPTICAL SINGLE-ATOM PHOTON ROUTER CONTROLLED BY A SINGLE PHOTON

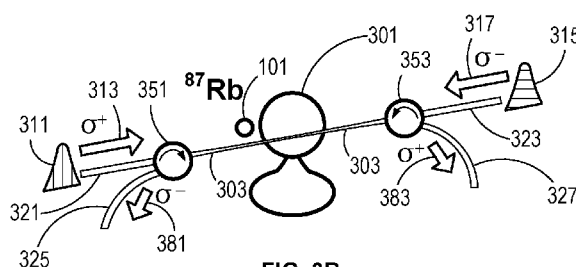**FIG. 3B**

(57) **Abstract:** A switch activated by a single control photon for routing a single target photon from either of two switch inputs to either of two switch outputs. The device is based on a single quantum emitter, such as an atom, coupled to a fiber-coupled, chip-based optical micro-resonator. A single reflected control photon toggles the switch from high reflection to high transmission mode, with no additional control fields required. The control and target photons are both in-fiber and practically identical, for compatibility with scalable architectures for quantum information processing.

ALL-OPTICAL SINGLE-ATOM PHOTON ROUTER CONTROLLED BY A SINGLE PHOTON

BACKGROUND

[001] Photons are considered ideal for communication of quantum information because they are the most convenient carriers of quantum bits (qubits), yet the lack of photon-photon interactions limits their use for quantum information processing. Achieving nonlinear behavior at the level of single photons – that is, photon-photon interactions and quantum gates controlled by single photons in particular – is a major challenge in realizing quantum networks in which quantum information would be processed by material quantum nodes interconnected by photonic channels.

[002] Because photons do not interact directly with other photons, considerable effort has been put into implementing materially-mediated photon-photon interactions. A significant advancement was the attainment of strong coupling between single atoms and optical micro-resonators in the field of cavity quantum electrodynamics, where the tight confinement of light in tiny volumes leads to extreme enhancement of the electric field associated with photons in the cavity mode.

[003] Most notably, based on a scheme involving auxiliary control fields, recent works have demonstrated: nondestructive measurement of an optical photon; a single-photon phase switch; and a quantum gate between flying photons and a single atom, showing atom-photon, photon-photon, and atom-photon-photon quantum entanglement. All of these effects can be directly applied to photonic routing.

[004] Yet the need in auxiliary control fields (e.g. Raman laser beams or microwave fields, or other classical control fields) seriously limits both the scalability and the speed of

such schemes, as each operation of each individual atom or other material node requires a series of a few microseconds-long (typically) control pulses and/or measurements.

[005] In order to enable scalable quantum networks there is a need for a passive device that coherently routes and manipulates photons between multiple ports, enabling conversion of the photons from one wavelength to another, and which is activated solely by single photons, making it compatible with large-scale photonic circuits. This goal is achieved by embodiments of the present invention.

SUMMARY

[006] Embodiments of the present invention provide a robust, simple and scalable device for all-optical coherent routing of single photons by single photons, with no need for any additional control fields. A device according to an embodiment of the invention utilizes a single three-level quantum emitter (non-limiting examples of which include: an atom, a Rubidium atom, a ^{87}Rb atom, a ^{85}Rb atom; and a quantum dot) proximate to, and associated with, a resonant cavity such as a micro-resonator cavity, and features mediation of the cavity-enhanced three-level quantum emitter to route a single photon from one input port, or from a coherent superposition of the input ports, to an output port or to a coherent superposition of the output ports.

[007] The crucial parameter in such a system is the Purcell enhancement factor, or the equivalent Cooperativity parameter $C = g^2/\kappa\gamma$ (with $\kappa = \kappa_i + \kappa_{ex}$), where g is the coherent coupling rate between the quantum emitter and the cavity mode, κ_i is the incoherent loss of the cavity, κ_{ex} is the coupling between the cavity and its input/output modes and 2γ is the spontaneous emission rate of the quantum emitter. C is the ratio between the quantum emitter's cavity-enhanced spontaneous emission rate g^2/κ into the output mode, to the free-

space emission rate γ , and is proportional to the ratio between the cavity's quality factor Q to its mode volume V . Accordingly, by coupling the quantum emitter to high-quality (small κ_i) optical micro-resonators with tiny mode volumes, it is therefore possible to reach $C \gg 1$ including both the "fast-cavity regime" and the "strong coupling regime".

[008] The underlying mechanism in embodiments of the invention is simple and robust, and is similar to the interference mechanism that makes metallic mirrors reflect light. The free charges in the mirror oscillate in response to the incoming field and radiate both forward and backward fields that are opposite in phase to the incoming field. The result is destructive interference in the forward direction, which forces the incoming light to be reflected backwards. The same effect occurs with a probe photon incident on a two-level quantum emitter in one-dimensional geometry: the system radiates both forward and backwards with a phase shift of π (radians), and the destructive interference with the incoming probe in the forward direction leads to reflection of the probe backwards.

[009] Various embodiments of the invention rely on a special 3-level Λ system coupled to a waveguide, which exhibits the same effect. Specifically, each 'leg' of the Λ system is coupled only to one mode, e.g. one transition is coupled to the forward direction of the waveguide, and the other to the backward direction. In this configuration the same destructive interference effect occurs, meaning that a photon coming in one mode (or a coherent combination of input modes) would be routed to an output mode (or a coherent combination of input modes) that is determined by the initial state of the Λ system. This process is accompanied by projecting the Λ system to the state dictated by the incoming photon.

[0010] Embodiments of the present invention provide compatibility with scalable photonic architectures. A device according to various embodiments requires only single-

photon pulses for operation, all of which are identical, and routed to the selected output ports over waveguides. In a related embodiment, the waveguide is a single-mode waveguide. In another related and non-limiting embodiment, a tapered nanofiber is used as a waveguide. Thus, a routed target photon can serve as the control photon in another device, and that same control photon can activate a number of devices. Embodiments of the present invention therefore provide versatile, robust and simple building-blocks for a variety of all-optical photonic devices, including, but not limited to: quantum memory, single photon add/drop filters, and photonic quantum gates, all of which require no additional power, and which are compatible with scalable quantum networks.

[0011] Therefore, according to an embodiment of the present invention there is provided a device for storing and reading a circular polarization of a photon and for routing single photons by single photons, the device including: (a) a waveguide supporting a first electromagnetic mode and a second electromagnetic mode, wherein the first electromagnetic mode is distinct from the second electromagnetic mode, the waveguide having: (b) a first input port for a photon; (c) a second input port for a photon; (d) a first output port for a photon; and (e) a second output port for a photon; (f) wherein the first input port is distinct from the second input port and the first output port is distinct from the second output port; (g) a quantum emitter having: (h) a first ground state; (i) a second ground state; (j) an excited state; (k) a first transition, between the first ground state and the excited state, the first transition having a first circular polarization; and (l) a second transition, between the second ground state and the excited state, the second transition having a second circular polarization; (m) wherein: (n) the first ground state is distinct from the second ground state; (o) the first circular polarization is opposite of the second

circular polarization; (p) the first electromagnetic mode couples to the first transition; and the second electromagnetic mode couples to the second transition.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The subject matter disclosed may best be understood by reference to the following detailed description when read with the accompanying drawings in which:

[0013] Fig. 1A is an energy-level diagram of transitions in a quantum emitter which reflects a right-propagating photon.

[0014] Fig. 1B is an energy-level diagram of transitions in quantum emitter which reflects a left-propagating photon.

[0015] Fig. 1C is an energy-level diagram of a quantum emitter which transmits a right-propagating photon with no transitions.

[0016] Fig. 1D is an energy-level diagram of quantum emitter which transmits a left-propagating photon with no transitions.

[0017] Fig. 2 is a schematic diagram of a photon routing device according to an embodiment of the present invention.

[0018] Fig. 3A illustrates a physical configuration of a photon routing device according to an embodiment of the present invention.

[0019] Fig. 3B illustrates a physical configuration of a photon routing device according to another embodiment of the present invention.

[0020] Fig. 3C illustrates details of the port arrangement for the configuration shown in Fig. 3B.

[0021] For simplicity and clarity of illustration, elements shown in the figures are not necessarily drawn to scale, and the dimensions of some elements may be exaggerated

relative to other elements. In addition, reference numerals may be repeated among the figures to indicate corresponding or analogous elements.

DETAILED DESCRIPTION

[0022] Embodiments of the invention use the above-described mechanism for optical switching, by introducing ‘memory’ into the system, that is, making the reflection of a single control photon toggle the internal state of the quantum emitter.

[0023] Various embodiments of the present invention utilize bi-directional photon paths. For simplicity, the descriptions and illustrations herein arbitrarily refer to the first direction of photon propagation as “right” (or equivalently “left-to-right”) and the second direction of photon propagation as “left” (or equivalently “right-to-left”). It is understood, however, that this is non-limiting, and that other distinguishing representations can equivalently be used (e.g., “up” and “down”, “forward” and “backward”, etc.) to describe the same embodiments.

[0024] In an embodiment of the present invention, a photon is considered to be circularly polarized if the probability of detecting the photon in a particular state of circular polarization is greater than $2/3$. In a related embodiment of the invention, the two distinct circular polarization states correspond to two distinct electromagnetic modes of a waveguide. In another related embodiment, the waveguide is an optical waveguide. In a further related embodiment, the waveguide is a microwave waveguide.

[0025] In certain embodiments of the invention, the waveguide couples directly to the quantum emitter. In other embodiments, the waveguide couples to the quantum emitter indirectly via a resonant cavity. In a related embodiment, a circular polarization of a photon corresponds to a Transverse Magnetic (TM) mode of a waveguide.

[0026] In various embodiments of the invention, the two distinct quantum emitter transitions from the two distinct ground states to the excited state correspond respectively to the two different circular polarizations.

[0027] According to an embodiment of the invention, an initial ground state of the quantum emitter is at $m_F = -1$ with an incoming σ^+ probe photon. Destructive interference between the probe and the σ^+ photon emitted by the quantum emitter forces the quantum emitter to emit a σ^- photon in the opposite direction, thereby deterministically ending at a final ground state at $m_F = +1$. As a result, any subsequent σ^+ photons will not interact with the quantum emitter and will accordingly be transmitted. Symmetrically, at this stage the system becomes reflective to σ^- photons coming right-to-left from the right.

[0028] Fig. 1A conceptually illustrates the above embodiment, implemented by a Λ configuration for a three-level quantum emitter **101** which has a transition **103** from a first ground state **113** ($m_F = -1$) to an excited state **115**; and a transition **105** from excited state **115** to a second ground state **117** ($m_F = +1$). Transition **103** is coupled only to an input photon having a left-to-right direction of propagation, shown for a σ^+ input photon **111**. Transition **105** is coupled only to an output photon having a right-to-left direction of propagation, shown for a σ^- output photon **109**. As discussed previously, left-to-right propagating output photon **107** is 180 degrees out of phase with input photon **111**, and through destructive interference, the net transmission **119** is zero.

[0029] Fig. 1B conceptually illustrates the symmetrical complement of the arrangement in Fig. 1A, in which three-level quantum emitter **101** has a transition **123** from second ground state **117** ($m_F = +1$) to excited state **115**; and a transition **125** from excited state **115** to first ground state **113** ($m_F = -1$). Transition **123** is coupled only to an input photon having a right-to-left direction of propagation, shown for a σ^- input photon **131**.

Transition **125** is coupled only to an output photon having a left-to-right direction of propagation, shown for a σ^+ output photon **129**. As discussed previously, right-to-left propagating output photon **127** is 180 degrees out of phase with input photon **131**, and through destructive interference, the net transmission **139** is zero.

[0030] Fig. 1C conceptually illustrates the above embodiment in the case when three-level quantum emitter **101** is in second ground state **117** for a right-propagating σ^+ input photon **151**. No transition occurs in this case: three-level atom **101** remains in second ground state **117** and σ^+ photon **151** is transmitted without reflection.

[0031] Fig. 1D conceptually illustrates the above embodiment in the case when three-level quantum emitter **101** is in first ground state **113** for a left-propagating σ^- input photon **171**. No transition occurs in this case: three-level atom **101** remains in first ground state **114** and σ^- photon **171** is transmitted without reflection.

[0032] For certain embodiments of the present invention, an input photon may serve the purpose of setting or discovering the state of the quantum emitter. In a non-limiting example, the input photon may be intended to put the quantum emitter into a selected state (to reflect or transmit a photon); in this case, such an input photon may be denoted as a “control” photon, and a subsequent input photon which is to be routed by the quantum emitter (i.e., switched to a selective path via reflection or transmission by the quantum emitter) may be denoted as a “target” photon. In another non-limiting example, the input photon may be intended to discover the quantum emitter’s state; in this case, such an input photon may be denoted as a “probe” photon. Structurally, however, there is no qualitative difference between a control photon, a target photon, and a probe photon. These terms are used in the context of particular embodiments simply according to the intended purpose of the photon.

[0033] Fig. 2 schematically illustrates an embodiment of the present invention, which provides a symmetric toggle-switch **200** with two inputs (an input **201** and an input **203**), two outputs (an output **205** and an output **207**), and two internal states (state **113** and state **117**), where a transition of atom **101** (transition **105** or transition **125**) toggles the state of switch **200** (accompanied by a reflection of an input control photon) for routing one or more subsequent target photons. A first input **201** and a second input **203** accept photons for control of the switch and/or routing of photons by switch **200**. Photon routing is according to the state of switch **200**, in keeping with the transition rules shown in Fig. 1A through Fig. 1D:

[0034] when three-level quantum emitter **101** is in state **113**, a photon input into input port 1 **201** undergoes a reflection **211** to output port 1 **205**;

[0035] when three-level quantum emitter **101** is in state **117**, a photon input into input port 1 **201** continues with a transmission **221** to output port 2 **207**;

[0036] when three-level quantum emitter **101** is in state **117**, a photon input into input port 2 **203** undergoes a reflection **213** to output port 2 **207**;
and

[0037] when three-level quantum emitter **101** is in state **113**, a photon input into input port 2 **203** continues with a transmission **223** to output port 1 **205**.

[0038] In a related embodiment, a conventional time-bin protocol is used to define a first input photon as the control photon, and a second input photon as the target, to be routed from a selected input to a selected output.

[0039] Fig. 3A illustrates a physical configuration of an embodiment of the present invention, in which three-level quantum emitter **101** is a single Rubidium atom. In a related embodiment, the Rubidium atom is the isotope ^{87}Rb . In another related embodiment, three-level atom **101** is coupled to a chip-based whispering-gallery mode (WGM) silica microsphere resonator **301**. Light is evanescently coupled to and from resonator **301** by a tapered nanofiber **303**. The coupling κ_{ex} between resonator **301** and nanofiber is **303** set by careful alignment of their relative position using a piezo positioning system **371**. In other embodiments of the present invention, micro-resonator **301** is a microdisk resonator; in additional embodiments, micro-resonator **301** is a micro-toroid resonator; in still further embodiments, micro-resonator **301** is a ring resonator.

[0040] In various embodiments of the invention, a transverse-magnetic (TM) mode of the micro-resonator is used, which approximates to a high degree the coupling of σ^+ and σ^- polarizations to opposite directions of propagation. It is known that the polarization in the evanescent wave region is very close to σ^+ in one direction, and σ^- in the other, with minimal cross-contamination. In these embodiments the polarizations of the respective σ^+ and σ^- input photons are the polarizations that maximally couple to the CW and CCW modes of the cavity resonance. Thus, there is a one-to-one correspondence between the direction in which the photon propagates in the fiber, and the transition in the atom. A σ^+ photon input in a pulse **311** propagating in a left-to-right direction **313** from a face **305** of nanofiber **303** triggers a transition from the $m_F = -1$ state to the $m_F = +1$ state (and the input photon is reflected), whereas a σ^- input photon in a pulse **315** propagating in a right-to-left direction **317** from a face **307** of nanofiber **303** triggers a transition from the $m_F = +1$ state to the $m_F = -1$ state (and the input photon in pulse **315** is reflected in a left-to-right direction **325**).

[0041] A photon automatically has the proper polarization to initiate the transition if it is sent from the proper input port and is resonantly coupled to the cavity. As described and illustrated herein, if the atom is already in the $m_F = +1$ state, left-to-right σ^+ input photon in pulse **311** triggers no transition (and input photon in pulse **311** is transmitted in a direction **325** without reflection); if the atom is already in the $m_F = -1$ state, right-to-left σ^- input photon in pulse **315** triggers no transition (and the input photon in pulse **315** is transmitted in a direction **323** without reflection).

[0042] According to an embodiment of the present invention, resonator **301** and the probe photon are tuned to be resonant with the $F = 1 \rightarrow F = 0$ transition of the ^{87}Rb D_2 line. As atoms in the state $m_F = 0$ barely interact with the TM mode, by choosing this manifold the desired Λ -configuration is attained, as illustrated in Fig. 1A and Fig. 1B, although, for this specific non-limiting case, at the price of decreasing the coherent coupling rate g by a factor of the square root of 3 compared to the cycling transition ($F = 2 \rightarrow F = 3$), in which mean $g = 27$ MHz is measured. To reach the fast cavity limit κ_{ex} is set to 30 MHz, corresponding to mean $g^2/\kappa\gamma = 2.2$.

[0043] Fig. 3B illustrates a physical configuration of another embodiment of the present invention, in which input ports are separated and isolated from output ports, meaning that only input photons propagate in input fibers, and only output photons propagate in output fibers. A first input fiber **321** is coupled to tapered nanofiber **303** by an optical circulator **351**. In addition, a first output fiber **325** is also coupled to tapered nanofiber **303** by optical circulator **351**. Likewise, a second input fiber **323** is coupled to tapered nanofiber **303** by an optical circulator **353**, and a second output fiber **327** is also coupled to tapered nanofiber **303** by optical circulator **353**.

[0044] Although photon propagation in tapered nanofiber **303** is bidirectional, optical circulator **351** enables uni-directional photon propagation in input fiber **321** (in which σ^+ photons propagate in direction **313**) and in output fiber **325** (in which σ^- photons propagate in a direction **381**). Likewise, optical circulator **353** enables uni-directional photon propagation in input fiber **323** (in which σ^- photons propagate in direction **317**) and in output fiber **327** (in which σ^+ photons propagate in a direction **383**).

[0045] Fig. 3C illustrates details of the configuration of Fig. 3B, to show how optical circulator **351** and optical circulator **353** separate and isolate inputs from outputs. In this embodiment, first input port **201** is the face of optical fiber **321**, and first output port **205** is the face of optical fiber **325**. Photons (σ^+) in input fiber **321** propagating into optical circulator **351** via a circulator port **341** are routed from a circulator port **343** into tapered nanofiber **303**. However, photons (σ^-) propagating from nanofiber **303** into optical circulator **351** via circulator port **343** are routed by a circulator port **345** into output fiber **325**. Likewise, second input port **203** is the face of optical fiber **323**, and second output port **207** is the face of optical fiber **327**. Photons (σ^-) in input fiber **323** propagating into optical circulator **353** via a circulator port **361** are routed from a circulator port **363** into tapered nanofiber **303**. However, photons (σ^+) propagating from nanofiber **303** into optical circulator **353** via circulator port **363** are routed by a circulator port **365** into output fiber **327**.

NON-LIMITING EXAMPLE OF DETECTING PRESENCE AND STATE OF A QUANTUM EMITTER

[0046] The presence of a single atom within the evanescent wave of the TM mode can be identified by sending weak (averaging about 2.5 photons per pulse) and short (approximately 15 ns FWHM) pulses in the nanofiber in alternating directions and

detecting at least three reflected photons within less than 400 ns. Interleaved between the detection pulses are much weaker pulses (an average of 0.24 photons in each pulse) and longer (approximately 50 ns FWHM) target pulses, whose purpose is to accurately measure single-photon reflection and transmission properties of the switch-router. The last detection pulse before each target pulse serves as the control to set the atom in a predetermined initial state. The pulse sequence includes control pulses in both directions, thereby preparing the atom half of the time in $m_F = -1$, and half of the time in $m_F = +1$, with the target pulse always polarized σ^+ .

OTHER USES

[0047] Besides serving as a switch or router for photons, an embodiment of the present invention can also serve as device for storing a classical bit of information, encoded in the state of the quantum emitter. In another embodiment, a qubit (quantum bit) of information can be stored, wherein the qubit is in a superposition of two distinct states.

CLAIMS

What is claimed is:

1. A device for storing and reading a circular polarization of a photon and for routing single photons by single photons, the device comprising:

a waveguide supporting a first electromagnetic mode and a second electromagnetic mode, wherein the first electromagnetic mode is distinct from the second electromagnetic mode, the waveguide having:

a first input port for a photon;
a second input port for a photon;
a first output port for a photon; and
a second output port for a photon;

wherein the first input port is distinct from the second input port and the first output port is distinct from the second output port;

a quantum emitter having:

a first ground state;
a second ground state;
an excited state;
a first transition, between the first ground state and the excited state, the first transition having a first circular polarization; and
a second transition, between the second ground state and the excited state, the second transition having a second circular polarization;

wherein:





the first ground state is distinct from the second ground state;
the first circular polarization is opposite of the second circular polarization;

the first electromagnetic mode couples to the first transition; and the second electromagnetic mode couples to the second transition.

2. The device of claim 1, wherein the waveguide couples to the quantum emitter via a resonant cavity.
3. The device of claim 2, wherein the resonant cavity is a micro-resonator.
4. The device of claim 1, wherein the waveguide is an optical waveguide.
5. The device of claim 1, wherein the waveguide is a microwave waveguide.
6. The device of claim 1, wherein the quantum emitter is a Rubidium atom.
7. The device of claim 6, wherein the Rubidium atom is a ^{87}Rb atom.
8. The device of claim 1, wherein the micro-resonator is in a transverse magnetic (TM) mode.
9. The device of claim 2, wherein the micro-resonator is a microsphere.
10. The device of claim 9, wherein the microsphere is a silica microsphere.
11. The device of claim 3, wherein the micro-resonator is a micro-toroid.
12. The device of claim 11, wherein the micro-toroid is a silica micro-toroid.
13. The device of claim 3, wherein the micro-resonator is a microdisk.
14. The device of claim 3, wherein the micro-resonator is a ring resonator.
15. The device of claim 4, wherein the optical waveguide comprises one and only one tapered nanofiber and the waveguide is coupled to the quantum emitter via a micro-resonator..
16. The device of claim 15, further comprising a piezo positioning device, for aligning the tapered nanofiber with the micro-resonator.
17. The device of claim 15, wherein an input port is coupled to the tapered nanofiber by an optical circulator.
18. The device of claim 17, wherein the optical circulator is further coupled to an output port.

19. The device of claim 18, wherein the input port is isolated from the output port by the optical circulator.

1/3

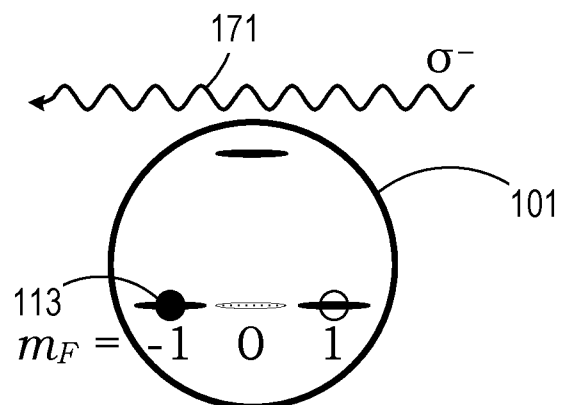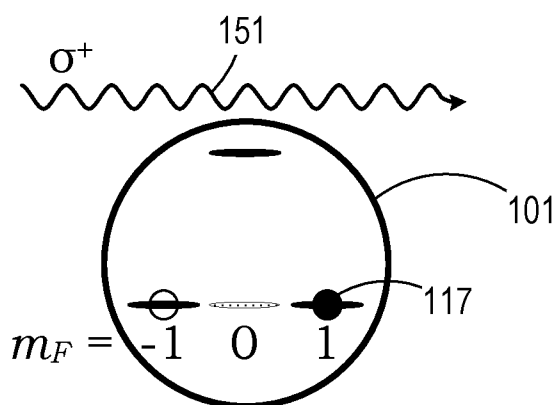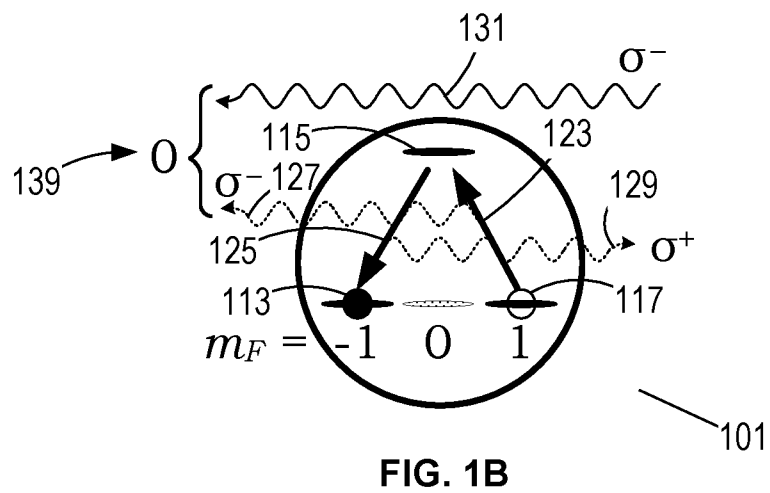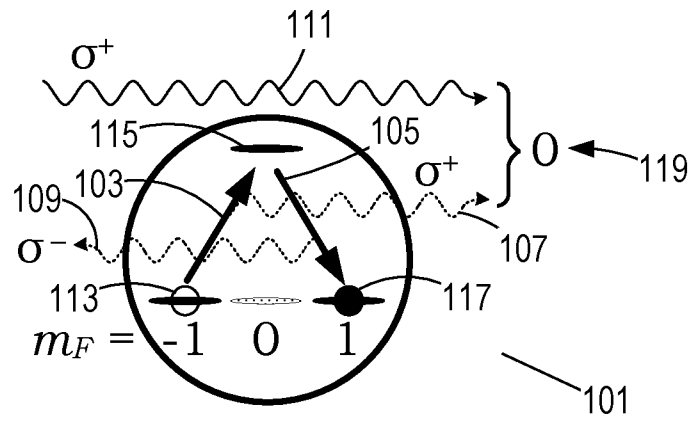

2/3

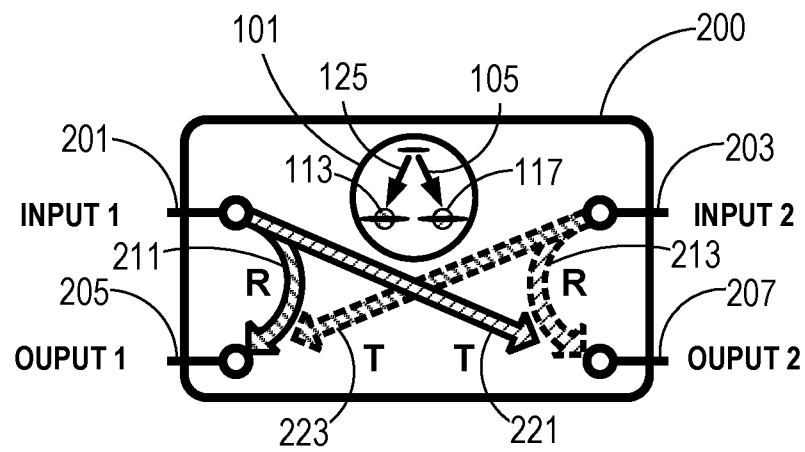


FIG. 2

3/3

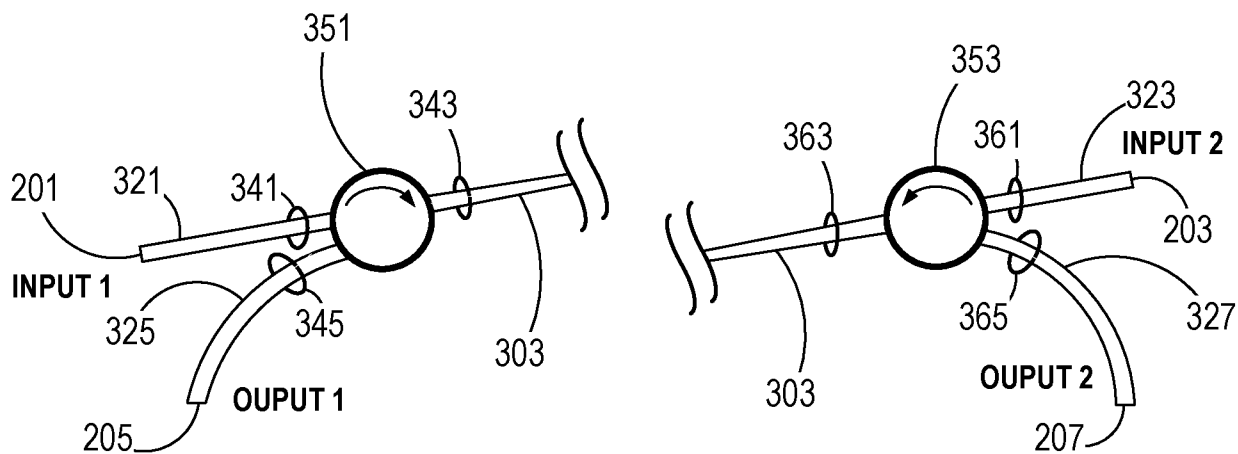
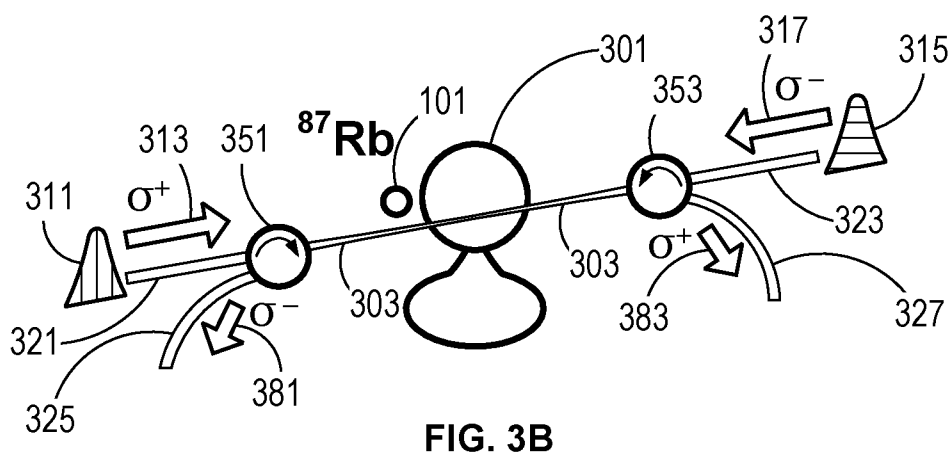
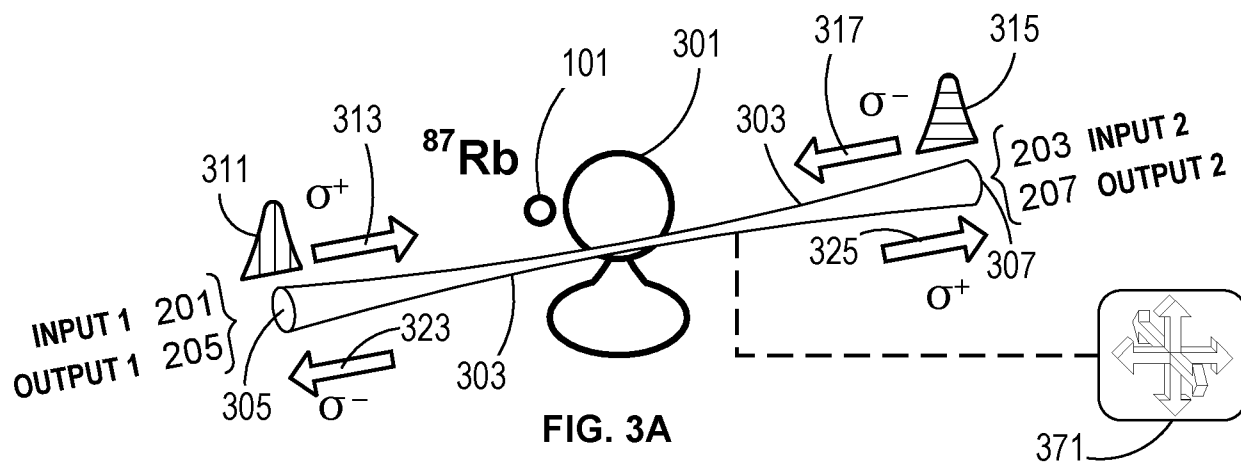


FIG. 3C

INTERNATIONAL SEARCH REPORT

International application No
PCT/IL2016/050339

A. CLASSIFICATION OF SUBJECT MATTER
INV. B82Y20/00 G02B6/35 G02F1/01
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02B G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	I. SHOMRONI ET AL: "All-optical routing of single photons by a one-atom switch controlled by a single photon", SCIENCE, vol. 345, no. 6199, 22 August 2014 (2014-08-22), pages 903-906, XP055283580, US ISSN: 0036-8075, DOI: 10.1126/science.1254699 the whole document ----- -/--	1-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

15 July 2016

Date of mailing of the international search report

26/07/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Hohmann, Leander

INTERNATIONAL SEARCH REPORT

International application No
PCT/IL2016/050339

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Giancarlo Righini ET AL: "Whispering gallery mode microresonators : Fundamentals and applications", Rivista del Nuovo Cimento, 16 June 2011 (2011-06-16), pages 435-488, XP055283590, DOI: 10.1393/ncr/i2011-10067-2 Retrieved from the Internet: URL:http://www.ifac.cnr.it/~righini/Righini_RNC2011_WGM_microresonators.pdf [retrieved on 2016-07-06] Section 4.2 figures 16,17	11-14
A	IO-CHUN HOI ET AL: "Demonstration of a Single-Photon Router in the Microwave Regime", PHYSICAL REVIEW LETTERS, vol. 107, no. 7, 9 August 2011 (2011-08-09), XP055286401, US ISSN: 0031-9007, DOI: 10.1103/PhysRevLett.107.073601 the whole document	5
A	US 2014/140651 A1 (HAFEZI MOHAMMAD [US] ET AL) 22 May 2014 (2014-05-22) the whole document	1
A	US 2007/104420 A1 (FRANSON JAMES D [US] ET AL) 10 May 2007 (2007-05-10) the whole document	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IL2016/050339

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014140651	A1	22-05-2014	NONE

US 2007104420	A1	10-05-2007	NONE
