

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 October 2011 (06.10.2011)

(10) International Publication Number
WO 2011/123596 A1

(51) International Patent Classification:
G06F 17/30 (2006.01)

(74) Agents: **HOOD, Jeffrey, C.** et al.; Meyertons, Hood, Kivlin; Kowert & Goetzel, P.C., P.O. Box 398, Austin, TX 78767-0398 (US).

(21) International Application Number:
PCT/US2011/030657

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
31 March 2011 (31.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/319,604 31 March 2010 (31.03.2010) US

(71) Applicant (for all designated States except US): **SMSC HOLDING S.A.R.L.**; 6 rue Philippe II, L-2340 Luxembourg (LU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KASHEF, Hooman** [US/US]; 30 Corral Road, Bell Canyon, CA 91307 (US). **SHERIDAN, Gene** [US/US]; 3617 Navajo Place, Palos Verdes Estates, CA 90274 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

[Continued on next page]

(54) Title: GLOBALLY -MAINTAINED USER PROFILE FOR MEDIA/AUDIO USER PREFERENCES

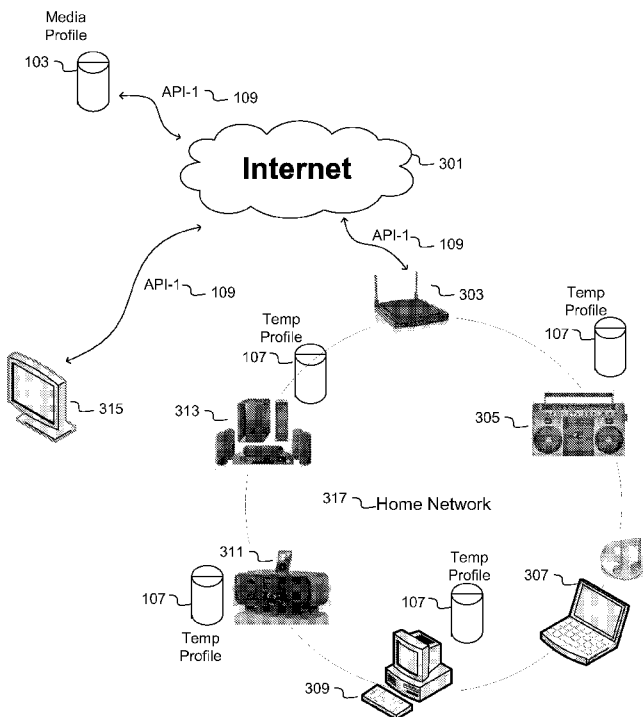


Fig. 3

(57) Abstract: Systems and methods for providing a media profile that is based on receiving data from various content distributors and creating a media profile. The media profile is web-based and accessible via an API. Data can be provided to the media profile host server via the API, and an end-user's media preferences can be stored in the media profile. The media profile is accessed by content distributors such that a customized media experience may be offered to the end-user without the need for the content distributor to gather his own separate data. The media profile can also store billing information for the end-user and act as a single reputable platform to conduct financial transactions.

WO 2011/123596 A1



SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Published:

— *with international search report (Art. 21(3))*

GLOBALLY-MAINTAINED USER PROFILE FOR MEDIA/AUDIO USER PREFERENCES

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of U.S. provisional patent application with serial number 61/319,604 filed on March 31, 2010, entitled "Profile for Media/Audio User Preferences Database."

FIELD OF THE INVENTION

[0002] The present invention relates generally to the provision and use of a media profile in connection with a user preference database. The media profile is related to content provided by numerous network and internet-based media content distributors and/or providers.

BACKGROUND

[0003] Demand for networked and internet-based media/content is rising. In addition, the number and types of media sources available to end-users continues to grow rapidly and for various reasons. For instance, the amount of quality content made available to end-users is increasing, and advances in technology make it easier for the content distributors and providers to make the media content widely available. The types of sources of media is also increasing, and may include virtually any source of networked or internet-based media content, such as content stored on a networked storage device or PC (running, e.g., a Windows, Apple, or other operating system) and/or content from free or subscription-based internet media portals.

[0004] In part, the demand for networked and internet-based media is rising due to the quality and types of content now available to the end-users. This content may include any type of content distributed or provided over a network or internet-based system, such as audio (e.g., music, radio programming or content, audio books, podcasts, educational audio, etc.), video (television programming or content, movies, music videos, HD television programming or content, 3D television programming or content, etc.), and/or text and pictures (newspaper subscriptions, blog feeds or content, etc.). Many other examples of content exist, but a key

- 2 -

development in the demand for these types of content is the quality and ease of use of the enabling technology and the variety of quality content made available to the end-users.

[0005] Another reason for the rise in the demand for content is the convenience of access to the end-user to the new sources of media content. Examples of these sources include
5 media/content distributors and providers such as iTunes, Netflix, AppleTV, Pandora, Hulu, LastFM, in addition to the traditional content sources such as the national broadcast and cable television networks and broadcast radio, and any other companies that provide or distribute media content to end-users. These distributors and providers often take advantage of the ability to provide a personalized end-user experience to allow the end-users to customize the media
10 experience to conform to individual preferences.

[0006] Advances in media-rendering technology make the media experience more enjoyable to end-users. Media rendering devices include a variety of product categories, such as networked TVs, IP Set Top Boxes, networked consumer electronic (CE) devices and/or networked portable devices. These devices may allow end-users to experience the media in a
15 variety of ways and at nearly any point in time. For instance, an end-user might listen to an mp3 player while riding a bus to work, and then watch a 3D television program at home later in the day. In general, users have more access to a wide variety of media content from many types of sources than ever before.

[0007] But as the media content becomes more widely-accessible, managing the content
20 becomes more difficult due to the fragmented and uncoordinated nature of the storage medium and internet-based sources. In part, this is due to the different design approaches taken by the different media content providers/distributors. The fragmented nature of the content/media often leads to the non-interoperability of media storage devices such as a Digital Living Network Alliance (“DLNA”) server, iTunes server, Net based digital lockers, etc. In addition,
25 in some cases, there may be multiple copies or sources for the same content or, in other cases, the rendering device may limit the availability of some content. For instance, a particular song might stored in MP3 format on a Windows PC in iTunes, but stored in Advanced Audio Coding (“AAC”) format on a hand-held device.

- 3 -

[0008] Typically, end-users use some sort of ad-hoc or hierarchal file structure on storage media (e.g., Network Media Storage, PC/Win, iTunes, etc.) to manage media content. Some Internet-based media service providers (e.g., Pandora) provide tools for users to define their preferences and assist in searching available media content provided by that specific service provider. But these tools are inconsistent across platforms, and there are many different ways in which existing media servers might learn about the end-user's preferences. For instance, Pandora uses a thumbs-up thumbs-down approach, LastFM uses "spoofing" to keep track of songs listened from various sources, iTunes uses a ranking and comparison methodology, etc. Often the end-user must maintain multiple but similar versions of their preferred media experience profile (e.g., preferences) on multiple platforms and service provider systems because a profile on one platform (e.g., iTunes) may be incompatible with another (e.g., Pandora) based on the current design approaches.

[0009] In addition, depending on the way in which the end-user is experiencing the content, the fragmented hierarchal file structure on various storage media might negatively affect the efficiency of the system and the ultimate experience of the end-user experience. For instance, it might be difficult for an end-user to sort through a long list of files or multiple lists of files on different media serves (for example stored on a Win7 server, iTunes, universal plug-and-play ("upnp")/DLNA media server, etc.) without any coherent way to present and sort through the files.

[0010] Thus, current methods of managing and searching of media content and Internet-based sources of media are often redundant, fragmented, and lacking in efficiency. These methods often lack the use of metadata for some or all of user-owned and stored content. These methods also often lack the storage of compatible metadata from one platform to another platform or application. Thus, these methods limit how user preferences might be applied from one platform to another. As described above, it is often necessary for the end-user to enter the same or similar user preferences multiple times using different methods on different media servers.

[0011] Further compounding the problems explained above are various problems associated with managing multiple users on the same devices or networks. For instance, it can be difficult for one end-user to use a device that is customized with his or her specific user

- 4 -

preferences, and then another end-user to use the same device customized with his or her specific user preferences. And for network-based services, it can be difficult for a device to access the user profiles unless connected to the Internet, because user profiles are often not available on local devices. There is a clear need for a good consumer experience such that preferences can be applied even if the local device should become unconnected from the network. Clearly, a need exists for a comprehensive user profile that addresses these problems.

SUMMARY OF THE INVENTION

[0012] Accordingly, techniques and supporting systems and methods as described herein address the above-described problems, as well as other issues facing current media and content providers and associated end-users. In order for media/content providers and end-users to fully realize the benefits of systems designed to provide customized content related to end-user preferences, it must become simpler for the providers to access and gather user-specific preferences, as well as easier for the end-users to customize and manage their preferences no matter what device or service they are using.

[0013] Therefore, in one aspect of the present invention, a computer-implemented method provides a media profile. The method includes receiving at a host server data from a first media distributor. The data includes an end-user's media preferences with respect to media distributed from the media distributor to the user. The method also includes receiving at the host server data from a second media distributor, this data including the end-user's media preferences with respect to media distributed from the second media distributor. The method further includes storing a media profile for the end-user on the host server. The media profile includes at least a subset of the data provided by the first media distributor and at least a subset of the data provided by the second media distributor. An application programming interface is also provided, such that the media profile, or a subset of the media profile, may be accessed by a requesting media content distributor.

[0014] In certain embodiments, the method also includes providing the application programming interface to each of the media content distributors, such that each can provide media information for an end-user to the host server, as well as receive media information from

- 5 -

the host server. This application programming interface may facilitate receipt of the data as well as distribution of the data.

[0015] In a further exemplary embodiment, the requesting media content distributor might be the first media distributor, the second media distributor, or, in some cases, a different media distributor altogether.

[0016] In further implementations, the end-user's preferences being stored in the media profile may include metadata such as musical genre preferences, musical artist preferences, specific song preferences, playlist preferences, or other audio/music preferences. The end-user's preferences might also include things such as movie genre preferences, favorite actor/actress preferences, specific movie preferences, and billing information.

[0017] In a further exemplary embodiment, the part of the media profile provided to the requesting media/content distributor is particularized based on the distributor's preferences and the types of media that the distributor distributes and renders to the end-user.

[0018] In another aspect of the present invention, a system for providing a media profile includes a module for receiving at a host server data from a first media distributor. The data includes an end-user's media preferences with respect to media distributed from the first media distributor to the end-user. The system also includes a module for receiving at the host server data from a second media distributor, which includes the end-user's media preferences with respect to media distributed from the second media distributor. The system further includes a module for storing a media profile for the end-user on a host server. The, media profile includes at least a subset of the data provided by the first media distributor and at least a subset of the data provided by the second media distributor. The system further includes a module for providing an application programming interface such that the media profile, or a subset of the media profile, may be accessed by a requesting media content distributor.

[0019] In an exemplary embodiment, the system also includes a module for providing the application programming interface to each of the media content distributors, such that each can provide media information for an end-user to the host server, as well as receive media information from the host server. This application programming interface may facilitate receipt of the data as well as distribution of the data.

- 6 -

[0020] In a further exemplary embodiment, the requesting media content distributor may be the first media distributor, the second media distributor, or, in some cases be a different media distributor altogether.

5 [0021] In a further exemplary embodiment, the end-user's preferences stored in the media profile may include metadata such as musical genre preferences, musical artist preferences, specific song preferences, playlist preferences, or other audio/music preferences. The end-user's preferences might also include things such as movie genre preferences, favorite actor/actress preferences, specific movie preferences, and billing information.

10 [0022] In yet a further exemplary embodiment, the part of the media profile provided to the requesting media/content distributor is particularized based on the distributor's preferences and the types of media that the distributor distributes and renders to the end-user.

15 [0023] In another aspect of the present invention, a computer-implemented method for accessing a local media profile on a media device includes receiving at the media device at least part of the data that is included in a media profile from an Internet-based host server. The method also includes creating a copy of the data received to be stored locally on the media device and used as a local media profile, if, for example the device is not connected to an network. The host server generates the subset of data by receiving data from a first media/content distributor that includes an end-user's preferences with respect to media distributed from the first media/content distributor to the end-user and receiving data from a
20 second media/content distributor that includes the end-user's preferences with respect to media distributed from the second media/content distributor. The media profile is then stored on the host server; and media profile data is distributed to the media device to be locally stored on the media device as the local media profile. The media profile includes at least a subset of the data provided by the first media distributor, and at least a subset of the data provided by the second
25 media distributor. The method also includes determining at the media device that the media device cannot communicate with the host server, and then using the local media profile stored on the media device to customize the media experience for the end-user.

[0024] The method may also include, in some implementations, determining that the media device can communicate with the host server, and updating the local media profile based on

- 7 -

data received from the host server. A determination may also be made that the media device can communicate on a local network with a different media device that has its own local media profile. The first media device then accesses the different media device's local media profile so that it can customize a media experience for the end-user. The media device can be any of a
5 PC, laptop, car stereo, DVD player, Blu-Ray player, television, set-top box, mp3 player, iPod, mobile phone, iPad, tablet, or other media-rendering device.

[0025] In certain cases, the end-user's preferences stored in the media profile can include data and information such as musical genre preferences, musical artist preferences, specific song preferences, playlist preferences, or other audio/music preferences. The end-user's
10 preferences might also include things such as movie genre preferences, favorite actor/actress preferences, specific movie preferences, and billing information.

[0026] In another aspect, a system for accessing a local media profile on a media device includes a module for receiving at a media device at least some data included in a media profile received from or provided by an Internet-based host server. The system also includes a module
15 for creating a locally-stored copy of the data for use by the media device as a local media profile. The host server generates the subset of data by receiving data from a first media/content distributor that includes an end-user's preferences with respect to media distributed from the first media/content distributor to the end-user, and receiving data from a second media/content distributor that includes the end-user's preferences with respect to media
20 distributed from the second media/content distributor to the end-user. The media profile is stored for the end-user on the host server and data is generated for distribution to the media device to be locally stored on the media device as the local media profile. The media profile includes at least a subset of the data provided by the first media distributor and at least a subset of the data provided by the second media distributor. The system also includes a module at the
25 media device for determining that the media device cannot communicate with the host server, and a module for using the local media profile stored on the media device to customize the media experience for the end-user.

[0027] The media device may be a PC, laptop, car stereo, DVD player, Blu-Ray player, television, set-top box, mp3 player, iPod, mobile phone, iPad, tablet, or other media-rendering
30 device.

- 8 -

[0028] In some implementations, the system also includes a module at the media device for determining that the media device can communicate with the host server, and then updating the local media profile based on data received from the host server.

5 [0029] In yet a further exemplary embodiment, the system also includes a module at the media device for determining that the media device can communicate on a local network with a different media device that has its own local media profile. The first media device then accesses the different media device's local media profile so that it can customize a media experience for the end-user.

10 [0030] In yet a further exemplary embodiment, the end-user's preferences stored in the media profile might include things such as musical genre preferences, musical artist preferences, specific song preferences, playlist preferences, or other audio/music preferences. The end-user's preferences might also include things such as movie genre preferences, favorite actor/actress preferences, specific movie preferences, and billing information.

15 [0031] It is to be understood that both the foregoing general description of the invention and the following detailed descriptions are exemplary, but are not restrictive, of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] The foregoing and other objects, features, and advantages of the present invention, as well as the invention itself, will be more fully understood from the following description of various embodiments, when read together with the accompanying drawings, in which:

20 [0033] Figure 1 illustrates an exemplary network diagram of the user preferences database for storing media profiles according to various embodiments of the invention;

[0034] Figure 2 illustrates an exemplary diagram of tables that could be used to comprise the media profiles according to various embodiments of the invention;

[0035] Figure 3 illustrates an exemplary network diagram of the use of the locally stored profiles on media-rendering devices according to various embodiments of the invention; and

25 [0036] Figure 4 illustrates another exemplary network diagram of the use of the locally stored profiles on media-rendering devices according to various embodiments of the invention.

- 9 -

DETAILED DESCRIPTION

[0037] The detailed description set forth below, in connection with the associated drawings, is intended to provide a description of the presently-preferred embodiments of the invention, and is in no way intended to limit the forms in which the present invention may be construed or used. Accordingly, it is well-understood by those with ordinary skill in the art that the same or
5 equivalent functions may be accomplished by different embodiments that are also intended to be encompassed within the spirit and scope of the present invention. Moreover, with respect to particular method steps, it is readily understood by those with skill in the art that the steps may be performed in any order, and are not limited to any particular order unless expressly stated or otherwise inherent within the steps.

10 [0038] The systems and methods described herein facilitate the customization of a media experience for an end-user of a media device. This customization experience is facilitated by an Internet-based server, which acts as a global repository to store various “media profiles” for one or more devices and, in some cases, end-users. The term “media profile” is used herein to describe as a standardized way to store end-user media preferences related to media content.
15 As explained above, due to the large number of different content distributors, and due to the various ways in which these distributors store media preferences, the data that exists for a particular end-user is greatly fragmented across various platforms and systems. This leads to inefficiencies and duplicative efforts on the part of the end-user, as well as a high cost of entrance into the market for new and upcoming content providers.

20 [0039] As shown in Fig. 1, a web-based server **101** is used to store the media profile **103**, also known as the primary profile or globally-maintained media profile. In a preferred embodiment, each end-user has a single media profile **103**, and the media profile **103** has associated therewith certain uniquely identifying information such as a profile ID or account ID. The media profile may be stored in a relational database, or in any other type of memory or
25 storage that provides access across various platforms. In some cases, a relational or other structured database may provide such functionality, for example as a database management system which stores data related to the services and consumers utilizing the service on a physical medium. Examples of the database include the MySQL Database Server or ORACLE Database Server offered by ORACLE Corp. of Redwood Shores, CA, the PostgreSQL

- 10 -

Database Server by the PostgreSQL Global Development Group of Berkeley, CA, or the DB2 Database Server offered by IBM. One with ordinary skill in the art would readily understand that any type of system that stores, organizes, and/or retrieves large amounts of data easily may be used, and that the type of database used is flexible such that any particular implementation
5 should not limit the invention as disclosed herein. Databases used to support and implement the systems and techniques described herein may also reside and execute on Internet-based servers that are managed by third party services providers such as Amazon, Google, etc.

[0040] As Fig. 1 further shows, various access and rendering devices **105** allow an end-user to engage in a customized media experience. These rendering devices **105** may be any type of
10 media device that delivers and/or renders media content to an end-user. This might include any type of music/audio player (e.g., iPod, mp3 player, home stereo system, car stereo, etc.), video player (set-top box, television, DVD player, Blu-ray player, etc.), computer or computing device (PC, Mac, laptop, or tablet) and or handheld device (iPhone, smart phone, PDA, etc.). One with ordinary skill in the art would readily understand that the present invention is not
15 limited by the devices listed herein, and would readily understand that so long as a device is capable of rendering media to an end-user, it is understood to be within the spirit and scope of the present invention.

[0041] The access and rendering devices **105** may have a temporary or local profile **107** stored on the device, such that the local profile **107** is quickly and easily accessible by other
20 components of the rendering device **105**. For example, one with ordinary skill in the art would readily understand that a computer that must access a database on a centralized server over the Internet may take more time to access the Web-content than the computer accessing its own local memory. This difference in access timing may be caused, in part, by latency of the network transmission, authentication time delay issues, firewall time delays, etc. Thus, it is
25 usually more efficient to store a local copy of frequently accessed data for all these reasons.

[0042] In essence, the temporary media profile **107** acts as a locally-stored version of the globally-maintained media profile. In one embodiment, the user media profile information is consolidated in an easy-to-use and easy-to-access database in which standard APIs (Application Programming Interfaces) **109** are made available to third-party services providers
30 and/or developers for accessing the media profile database. In this way, third-party

- 11 -

applications may be developed to take advantage of the media profile database **103** in customizing, personalizing and enriching the media experience to the end-user by providing the most relevant media to the user (through media recommendations, personalized media playlists, personalized media streams, etc.). In some instances, the APIs may also provide access to
5 other platforms that facilitate sharing of media profile information with friends (e.g., social networking sites such as Facebook or MySpace) and/or purchasing goods or services related to the profiles (e.g., Ticketmaster, PayPal, Amazon, etc.). APIs are generally understood by those with ordinary skill in the art to be a set of protocols or functions that allow an application to interact with another application. In this case, the API typically (but not exclusively) performs
10 functions such as querying content, setting new parameters, modifying account access information, setting operational triggers, etc.

[0043] Media/content distributors and third parties that provide information to the media profile and access the media profile may include services such as Sirius satellite radio, Pandora, Rhapsody, iTunes, lost fm, flickr, napster, Netflix, YouTube, etc. These media/content
15 providers are not limited to a particular type of media, but include any provider of media that is capable of customizing the experience for the particular preferences of an end-user.

[0044] In each of the rendering devices, the temporary/local profile may be accessed by a navigation and search engine **111**. As further shown in the embodiment of Fig. **1**, a well-defined API (API-1) interface **109** specification may be used to synchronize the primary media
20 profile **103** and one or more of the temp/local media profile(s) **107**. In one embodiment, the API-1 interface **109** enables secure access to a user's account information to or from various media service providers. The API-1 interface **109** may enable appropriate network location and addresses for other Internet-based services and/or web-based or local media storage devices
105. The API-1 interface **109** may also allow separate applications to easily access the media
25 profile **103** to thereby provide more intuitive navigation, search, organization or recommendations **111** back to the user.

[0045] Multiple users may be managed on a single device **105** through the use of multiple user media profiles **103**, typically one for each user. When a new and different end-user logs onto a device, his or her user media profile **103** may be downloaded and/or synchronized to the

- 12 -

device **105** for use therewith. The API-1 interface **113** may also be used to manage multiple users accounts for the same rendering device.

[0046] In one embodiment, upon power-up or other start-up sequences, the rendering devices **105** attempt to establish contact with the web-based server **101** to start an initial set up of the temporary/local media profile database **107** or synchronization of an already-existing local copy. Modifications to the end-user's global media profile **103** may be communicated by event messages between the primary and the temporary/local profile databases. These message might include updates or inserts to the database, representing actions taken by the end-user on the media device **109**, or may represent preferences regarding the end-user determined automatically by the rendering-device **105** or media/content distributor. While the messages may be of any form or format, certain implementations may use well-structured markup languages such as XML to transmit profile information among system components.

[0047] In another embodiment, a local navigation and search engine **111** on the rendering devices **105** queries the local temporary profile database **107** for locating the appropriate media content based on the end-user's profile. The interface **113** between the local navigation and search engine to the temporary local profile database may also conform to the API-1 interface **109** specification. Use of API-1 by the navigation and search engine **111** may allow access to both the primary profile as well as the local/temporary profile, depending on the capabilities of the local rendering device **105**. For instance, a rendering device **105** which may not be able to store a local/temporary profile **107**, may access the primary profile **103** directly from the web-server **101** via its navigation and search engine **111** utilizing the API-1 interface **113**.

[0048] Fig. 2 illustrates one form of an exemplary media profile. It should be understood in accordance with Fig. 2, that any media preference data may be stored in the media profile **103**, and the media profile database **103** is not limited to the tables and/or fields of Fig. 2, nor is this very generic description intended to limit the invention in any way. Accordingly, it is generally understood that data identifying and describing the end-user is to be stored in an end-user table **203**, such that media preference information concerning that user may be linked for insert, update, and retrieval.

- 13 -

[0049] In one embodiment, the media profile database **103** resides on an Internet-based server and is accessed from any device connected to the Internet. Depending on the capabilities of a media-rendering device **105**, the information held within the media profile **103** may be used to search across all available media content and media sources in delivering,
5 recommending or personalizing the content for each user. The end-user need not keep track of the location or the method of access for their preferred media content. The end-user also need not re-input their preferences or user profile across multiple media services. In fact, in one embodiment, metadata is automatically generated by continuously monitoring all of the digital media that the consumer is rendering (i.e., across all media sources and all rendering devices).
10 In fact, in some instances the end-user may not need to provide any stated user preferences to create a useful and comprehensive media profile, as the profile is automatically built based on causal use of the media device in conjunction with one or more media sources. In addition, multiple users may be accommodated by including a user log-in for each media-rendering device **105** and each media rendering experience to create and maintain unique media profiles
15 for each user, even within the same local network **317** and for the same devices.

[0050] It is also possible for the metadata to track and store the location of the media content, as well as any relevant information regarding the platform, content provider, etc. related to the content. In many cases, the stored media content may not originally be accompanied by any metadata (e.g., an mp3 file stored on a PC), and the invention described
20 herein facilitates the generation of appropriate metadata related to the media/content as part of the aggregating and managing of the content across multiple platforms.

[0051] In other implementations, a single user preferences database, or media profile **103** may be automatically created for use with all of a user's media-rendering devices **105** and with all of the user's stored media content (including any and all network-based media services that
25 the user is subscribed to or frequently uses). The media profile **103** may be stored on a central host server **101**, and maintained such that it contains current information about the end-user's media experiencing preferences, list and access information of privately owned storage media that contain private content (such as content purchased by the end-user and stored locally on a PC as opposed to Internet-based content only available via streaming such as Pandora or
30 YouTube), list of subscription-based service providers with appropriate account access

- 14 -

information, and/or a preferred list of free media service providers, etc. Preferences may describe the type of media a user frequently listens to (e.g., pop, country, classic rock), particular artists, eras, albums, and the like.

[0052] The media profile **103** may also include user stated/given inputs on media preferences, metadata for some or all user owned/stored content, and/or automatically-generated metadata of most commonly rendered media across all sources of content and media sources (e.g., media playing history). This broad and comprehensive definition of the media profile **103** enables a much more customizable, intelligent and relevant media experience for the end-user. The media profile **103** may also include traditional user profile information such as name, age, address and/or region, preferred language and payment or billing information (credit card number, PayPal account, etc.).

[0053] In another exemplary embodiment, there may be multiple sub-profiles associated with a media profile **103** such that an end-user can expressly choose a sub-profile for use at a particular time, or, in some cases, a sub-profile may be automatically selected based on the day and/or time of day. For instance, an end-user might prefer loud rock music while exercising, but prefer soft classical music while at work, and a sports radio transmission while in the car. Thus, the integration of sub-profiles in the media profile **103** allows for better customization and personalization to be delivered to the end-user.

[0054] The media profile **103** may be stored on a web-based server. This profile may be referred to as the “primary profile” or universal profile. The web-based server may support a well-defined set of APIs for securely accessing the primary profile data by the end-user from any web-enabled rendering device **105**.

[0055] Authentication may be achieved by using any kind of password-controlled access or even biometric methods (e.g., fingerprint scan, etc.), and the communication protocol itself may be made securing using, for instance, http and SSL/TLS or SSH type protocols and encryption mechanism.

[0056] The rendering device **105** may download a version of the media profile and keep a local copy, also referred to as the temporary profile or temp profile **107**. In one embodiment, the local/temporary profile **107** allows the same level of search and experience to the user when

- 15 -

the rendering device **105** is disconnected from the Internet **301**. The local/temporary profile **107** may provide the capability of use in a private network **317** (e.g., within a home network that is disconnected to the Internet).

5 [0057] The primary **103** and temporary **107** profiles may synchronize on a regular basis, on special trigger events, or at other times if they are connected. In one embodiment, synchronization occurs upon the next available opportunity after a disconnected rendering device **105** becomes reconnected to the Internet **301**. The use of a local/temporary profile **107** may also serve as a local cache of the primary profile **103** data to speed the response time when accessing the media profile data base **103**.

10 [0058] The media profile **103** may include billing information **201** stored in a secure database, so that various media/content provider platforms do not need to separately store this billing information. Then, for instance, if an end-user wishes to purchase content from a particular content provider or platform, the content provider simply needs to access the media profile **103** from either the globally-maintained media profile or from the temporary media profile **107** in order to retrieve the end-user's billing information. As explained above, this
15 may be facilitated through the API-1 interface **113**.

[0059] Numerous benefits may be realized by using a common billing platform. For instance, this type of system allows new entrants into the content provision market to take advantage of the respected name of the host billing system. Analogously, an end-user may be
20 comfortable purchasing products on the Internet using a service such as Paypal, because of the trusted name Paypal and the security associated therewith. Likewise, an end-user could become comfortable with the security of the transactions conducted with new media/content providers, based on the trusted name of the media profile database and the billing information provided therein.

25 [0060] Referring still to Fig. 2, a user platforms table **205** is stored such that various media/content distributors may be linked to the end-user. This facilitates the storage of global information that may be inserted, updated, and accessed by the media/content distributors. The actual media preferences may depend on the needs of the media/content distributors, but in general, the preferred embodiment stores a superset of the information stored by the

- 16 -

media/content distributors. Thus, for example if iTunes stores the most frequently listened to music by a particular end-user, and if Pandora stores an “up” or “down” rating by the end-user of a particular song, then the media profile database can include both the frequently listened to list as well as the “up” and “down” ratings of particular songs. In this way, the system
5 collaborates of all the media preferences for a given end-user based on the data received from the various sources of content.

[0061] The media profile **103** may also adapt to a new content/media distributor wishing to store new media preference information. In such cases, the back-end schema of the database may be updated and new functions may be included in the API such that the new media
10 preference information may be utilized.

[0062] In some implementations, an end-user may be provided with direct access to the media profile database **103** to update the various pieces of information through a portal or Internet-based website, other than the intermediary media/content distributors. In this way, an end-user can login to the media profile system and update her billing information **201**
15 associated with the account. Alternatively, an end-user might change her billing information through a media/content distributor such as, for example, iTunes, at which point iTunes uses the API to update the end-user’s billing information **201** on the globally-maintained media profile database.

[0063] Various other tables may be utilized by the media profile **103**, such as a music preferences table **207** or a movie preferences table **209**. These tables can include information
20 such as favorite artists or actors, favorite genres, favorite movies or songs, etc. In many instances, the user-preference information stored in the media profile **103** is stored in a greater number of tables, due to the size and diverse types of information that media/content distributors currently use to determine user preferences and to customize the media experience.
25 For instance, it is also possible to store playlist and shuffle preferences, which also allows a media/content distributor in delivering a customized media experience to the end-user.

[0064] Fig. **3** shows one embodiment of a deployment and use case model for the proposed architecture. It is understood that they system may contain software and hardware **303**, **305**, **307**, **309**, **311**, **313**, **315** connected to the Internet **301** via a network. In this way, the media

- 17 -

devices are capable of communicating with the media profile **103** located on the web-based host server **101**. Although Fig. **1** shows the web-based server **101** as a single box imply a single physical hardware device, it should be appreciated that the functionality of these components may be implemented on any number of computers. A communications network connects a client with a server. The communication may take place via any media such as standard telephone lines, LAN or WAN links (e.g., T1, T3, 56kb, X.25), broadband connections (ISDN, Frame Relay, ATM), wireless links (802.11, Bluetooth, etc.), and so on. Preferably, the network can carry TCP/IP protocol communications, and HTTP/HTTPS requests made by the web browser and the connection between the client software and the server can be communicated over such TCP/IP networks. The type of network is not a limitation, however, and any suitable network may be used. Non-limiting examples of networks that can serve as or be part of the communications network include a wireless or wired Ethernet-based intranet, a local or wide-area network (LAN or WAN), and/or the global communications network known as the Internet **16**, which may accommodate many different communications media and protocols.

[0065] As further shown in Fig. **3**, the media profile, also known as the primary profile, may be accessed by any of the media-rendering devices **303, 305, 307, 309, 311, 313, 315**. However, such access is dependent on an active Internet connection **301** and might present a difficulty if the Internet access is unavailable or if the available bandwidth is insufficient for any reason. Thus, once it is determined at a media-rendering device **303, 305, 307, 309, 311, 313, 315** that Internet **301** connection is available, a copy of the media profile **103** may be stored locally on the media-rendering device such that when Internet access becomes unavailable or the bandwidth falls below a certain acceptable threshold, the media preferences can still be accessed and utilized. Thus, an end-user listening to music using an application on PC **309** might not need to have Internet **301** connection in order to enjoy a personalized media experience based on preferences captured at various online media content sites if the application contains a temporary media profile **107** that the application is capable of utilizing.

[0066] For example, as shown in Fig. **3**, the portable radio **305**, PC **309**, home radio **311**, and home DVD/stereo system **313** all contain or otherwise use a temporary/local profile **107** that is a copy of the media profile **103**, or, in some cases, a subset of the media profile **103**.

- 18 -

One with ordinary skill in the art would readily understand that a copy of the entire media profile may be utilized by more extensive applications that offer both music, video, and other types of media/content. However, if a content/media distributor only offered, for instance, music, the only type of temporary/local profile information that would be necessary to store for the media-rendering application on the media device would be information related to music. These decisions could be implemented via the API, and thus, the system is flexible depending on the third-party requirements.

[0067] As an alternative embodiment, the television **315** and laptop computer **307** might only choose to access the media profile **103** through the Internet connection **301**. A benefit to this approach may include that the most current and up-to-date information is always in use at the media-rendering device, although access time to the profile may suffer, and the system may become inoperable without Internet connection. One with ordinary skill in the art would also readily understand that various configurations of the above are possible, such that a device first attempts to access the web-based profile, but then resorts to its own local copy if the web connection is unavailable.

[0068] By way of example, in one embodiment, if an end-user entered billing information into a media-rendering application on laptop **307**, the application may access the API **109** on the web-based server **101** in order to update the global information in the end-user's media profile. Then in the future when the end-user desires to purchase content using an application on television **315**, the television application might also access the billing information already entered by the end-user and stored in the web-based server **101**.

[0069] The media profile database **103** may continuously (or in some instances with certain frequency) monitor the end-user's inputs and behavior to improve and add to the media profile **103**, via the API **109**. In a non-limiting manner various inputs may be continuously monitored and included in the database. For example, some or all frequently played media files, playlists or streams (frequency could be, for instance, tracked based on any file/playlist/stream that is rendered for more than 15 seconds) may be monitored. In addition, some or all end-user explicit inputs regarding media preferences may be monitored. These inputs may be "stated" (entered) inputs from the end-user on media preferences from any source or application, and/or any positive/negative feedback received for a given media file/stream from any source or

- 19 -

application (as created thru existing third-party applications). Even specific end-user searches related to various media requests may be stored and analyzed to determine the end-user's interests and preferences. Also, the media profile database **103** may monitor the most frequently used media devices **105** for rendering the media (e.g., frequency may be tracked
5 based on cumulative time spent rendering media on a given device), and/or any purchased media, or downloaded content or media streaming services to which the user subscribes.

[0070] By way of example, the above end-user inputs and behaviors may be integrated into the media profile **103** database as described herein. For example, the system may integrate frequently rendered media (e.g., metadata for files and/or URLs for media streams along with
10 frequency data), frequently used rendering devices (e.g., device type, MAC ID with frequency data), new media "accessed" (e.g., downloaded, purchased or subscribed/registered), metadata for files and/or URL for media streams, stated media preferences (e.g., genre, era, artist, album, etc) as gathered from all user inputs across all media applications, services or subscriptions, and/or basic user profile information (name, age, address and/or region, preferred language and
15 payment/billing information, etc).

[0071] The above-described media profile database **103** may be made accessible by numerous third-party service providers or application developers through the stated API-1 interface **109** specification. In some instances, the determination as to which third-party
20 providers have access is made by the end-user, thus allowing the user to control which companies, websites, services and individuals can view and share their profile information. An additional advantage of the above-described invention is that the user-preference media content is easily translated from one format to another, as required by the media/content providers, such that the translation is completely transparent to the end-user. Since the above systems and methods allow the end-user to enter data only once, it facilitates the translation of data as
25 required by different formats and protocols.

[0072] It is also possible for other network renderers or controllers to access the local/temporary profile of another media-device through a local network as long as at least one rendering device on the local network has access to and downloaded the media profile data **103** from the server **101**. Fig. **4** shows a possible network configuration for such an embodiment.
30 In this example, each of the media devices **313**, **311**, **307**, and **305** has access to the

- 20 -

temporary/local media profile **107** stored on the PC **309**, so that when an Internet connection **301** to the server **101** is disabled, a customized media experience can still be delivered to the end-user.

[0073] As described above, the foregoing discussion discloses and describes merely
5 exemplary embodiments of the present invention. As will be understood by those skilled in the art, the present invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. Accordingly, the disclosure of the present invention is intended to be illustrative, but not limiting of the scope of the invention, as well as other claims. The disclosure, including any readily discernible variants of the teachings herein, define, in
10 part, the scope of the foregoing claim terminology.

[0074] What is claimed is:

- 21 -

CLAIMS

- 1 1. A computer-implemented method for providing a media profile, said method
2 comprising:
3 receiving at a host server first data from a first content distributor, said first data
4 comprising an end-user's preferences associated with first media distributed from the first
5 content distributor to the end-user;
6 receiving at the host server second data from a second content distributor, said second
7 data comprising the end-user's preferences associated with second media distributed from the
8 second content distributor to the end-user;
9 storing a media profile for the end-user on the host server, said media profile including
10 (i) at least a subset of the first data comprising the end-user's preferences associated with the
11 first media, and (ii) at least a subset of the second data comprising the end-user's preferences
12 associated with the second media; and
13 providing, via an application programming interface, at least a subset of the media
14 profile to a requesting content distributor in response to a request from the requesting content
15 distributor.
- 1 2. The method of claim 1, further comprising:
2 providing the application programming interface to the first content distributor, the
3 second content distributor, and the requesting content distributor,
4 wherein the application programming interface facilitates receipt of the first data by the
5 host server and the second data by the host server.
- 1 3. The method of claim 1, wherein the requesting content distributor is selected from
2 the group consisting of: a new content distributor different from the first content distributor and
3 the second content distributor, the first content distributor, and the second content distributor.
- 1 4. The method of claim 1, wherein the end-user's preferences include: musical genre
2 preferences, musical artist preferences, specific song preferences, movie genre preferences,
3 movie actor/actress preferences, specific movie preferences, and billing information.
- 1 5. The method of claim 1, wherein the subset of the media profile provided to the
2 requesting content distributor is particularized based on distributor preferences and the types of
3 media that the requesting content distributor distributes or renders to the end-user.

- 22 -

1 6. A system for providing a media profile, said system comprising:
2 a module for receiving at a host server first data from a first content distributor, said
3 first data comprising an end-user's preferences associated with first media distributed from the
4 first content distributor to the end-user;
5 a module for receiving at the host server second data from a second content distributor,
6 said second data comprising the end-user's preferences associated with second media
7 distributed from the second content distributor to the end-user;
8 a module for storing a media profile for the end-user on the host server, said media
9 profile including (i) at least a subset of the first data comprising the end-user's preferences
10 associated with the first media, and (ii) at least a subset of the second data comprising the end-
11 user's preferences associated with the second media; and
12 a module for providing, via an application programming interface, at least a subset of
13 the media profile to a requesting content distributor in response to a request from the requesting
14 content distributor.

1 7. The system of claim 6, further comprising:
2 a module for providing the application programming interface to the first content
3 distributor, the second content distributor, and the requesting content distributor,
4 wherein the application programming interface facilitates receipt of the first data by the
5 host server and the second data by the host server.

1 8. The system of claim 6, wherein the requesting content distributor is selected from
2 the group consisting of: a new content distributor different from the first content distributor and
3 the second content distributor, the first content distributor, and the second content distributor.

1 9. The system of claim 6, wherein the end-user's preferences include: musical genre
2 preferences, musical artist preferences, specific song preferences, movie genre preferences,
3 movie actor/actress preferences, specific movie preferences, and billing information.

1 10. The system of claim 6, wherein the subset of the media profile provided to the
2 requesting content distributor is particularized based on distributor preferences and the types of
3 media that the requesting content distributor distributes or renders to the end-user.

1 11. A computer-implemented method for accessing a local media profile on a media
2 device, said method comprising:

- 23 -

3 receiving at a media device at least a subset of data included in a media profile from an
4 Internet-based host server,

5 creating a copy of the subset of the data included in the media profile to store locally on
6 the media device as a local media profile, wherein the host server generates the subset of the
7 data included in the media profile by:

8 receiving at the host server first data from a first content distributor, said first
9 data comprising an end-user's preferences associated with first media distributed from
10 the first content distributor to the end-user;

11 receiving at the host server second data from a second content distributor, said
12 second data comprising an end-user's preferences associated with second media
13 distributed from the second content distributor to the end-user;

14 storing the media profile for the end-user on the host server, said media profile
15 including (i) at least a subset of the first data comprising the end-user's preferences
16 associated with the first media, and (ii) at least a subset of the second data comprising
17 the end-user's preferences associated with the second media; and

18 generating the subset of the data included in the media profile to distribute to the
19 media device to be stored locally on the media device as the local media profile;

20 determining at the media device that the media device cannot communicate with the
21 host server; and

22 using the local media profile stored on the media device to customize a media
23 experience for the end-user.

1 12. The method of claim 11, further comprising:

2 determining at the media device that the media device can communicate with the host
3 server, and updating the local media profile based on data received from the host server.

1 13. The method of claim 11, further comprising:

2 determining at the media device that the media device can communicate on a local
3 network with a different media device having a local media profile, and accessing the local
4 media profile of the different media device to customize a media experience of the end-user.

1 14. The method of claim 11, wherein the media device is selected from the group
2 consisting of: a PC, laptop, car stereo, DVD player, Blu-Ray player, television, set-top box,
3 iPod, mp3 player, mobile phone, and tablet.

- 24 -

1 15. The method of claim 11, wherein the end-user's preferences include: musical genre
2 preferences, musical artist preferences, specific song preferences, movie genre preferences,
3 movie actor/actress preferences, specific movie preferences, and billing information.

1 16. A system for accessing a local media profile on a media device, said system
2 comprising:

3 a module for receiving at a media device at least a subset of data included in a media
4 profile from an Internet-based host server,

5 a module for creating a copy of the subset of the data included in the media profile to
6 store locally on the media device as a local media profile, wherein the host server generates the
7 subset of the data included in the media profile by:

8 receiving at the host server first data from a first content distributor, said first
9 data comprising an end-user's preferences associated with first media distributed from
10 the first content distributor to the end-user;

11 receiving at the host server second data from a second content distributor, said
12 second data comprising an end-user's preferences associated with second media
13 distributed from the second content distributor to the end-user;

14 storing the media profile for the end-user on the host server, said media profile
15 including (i) at least a subset of the first data comprising the end-user's preferences
16 associated with the first media, and (ii) at least a subset of the second data comprising
17 the end-user's preferences associated with the second media; and

18 generating the subset of the data included in the media profile to distribute to the
19 media device to be stored locally on the media device as the local media profile;

20 a module at the media device for determining that the media device cannot
21 communicate with the host server; and

22 a module at the media device for using the local media profile on the media device to
23 customize a media experience for the end-user.

1 17. The system of claim 16, further comprising:

2 a module at the media device for determining that the media device can communicate
3 with the host server, and updating the local media profile based on data received from the host
4 server.

- 25 -

1 18. The system of claim 16, further comprising;
2 a module at the media device for determining that the media device can communicate
3 on a local network with a different media device having a local media profile, and accessing the
4 local media profile of the different media device to customize a media experience of the end-
5 user.

1 19. The system of claim 16, wherein the media device is selected from the group
2 consisting of: a PC, laptop, car stereo, DVD player, Blu-Ray player, television, set-top-box,
3 iPod, mp3 player, mobile phone, and tablet.

1 20. The system of claim 16, wherein the end-user's preferences include: musical genre
2 preferences, musical artist preferences, specific song preferences, movie genre preferences,
3 movie actor/actress preferences, specific movie preferences, and billing information.

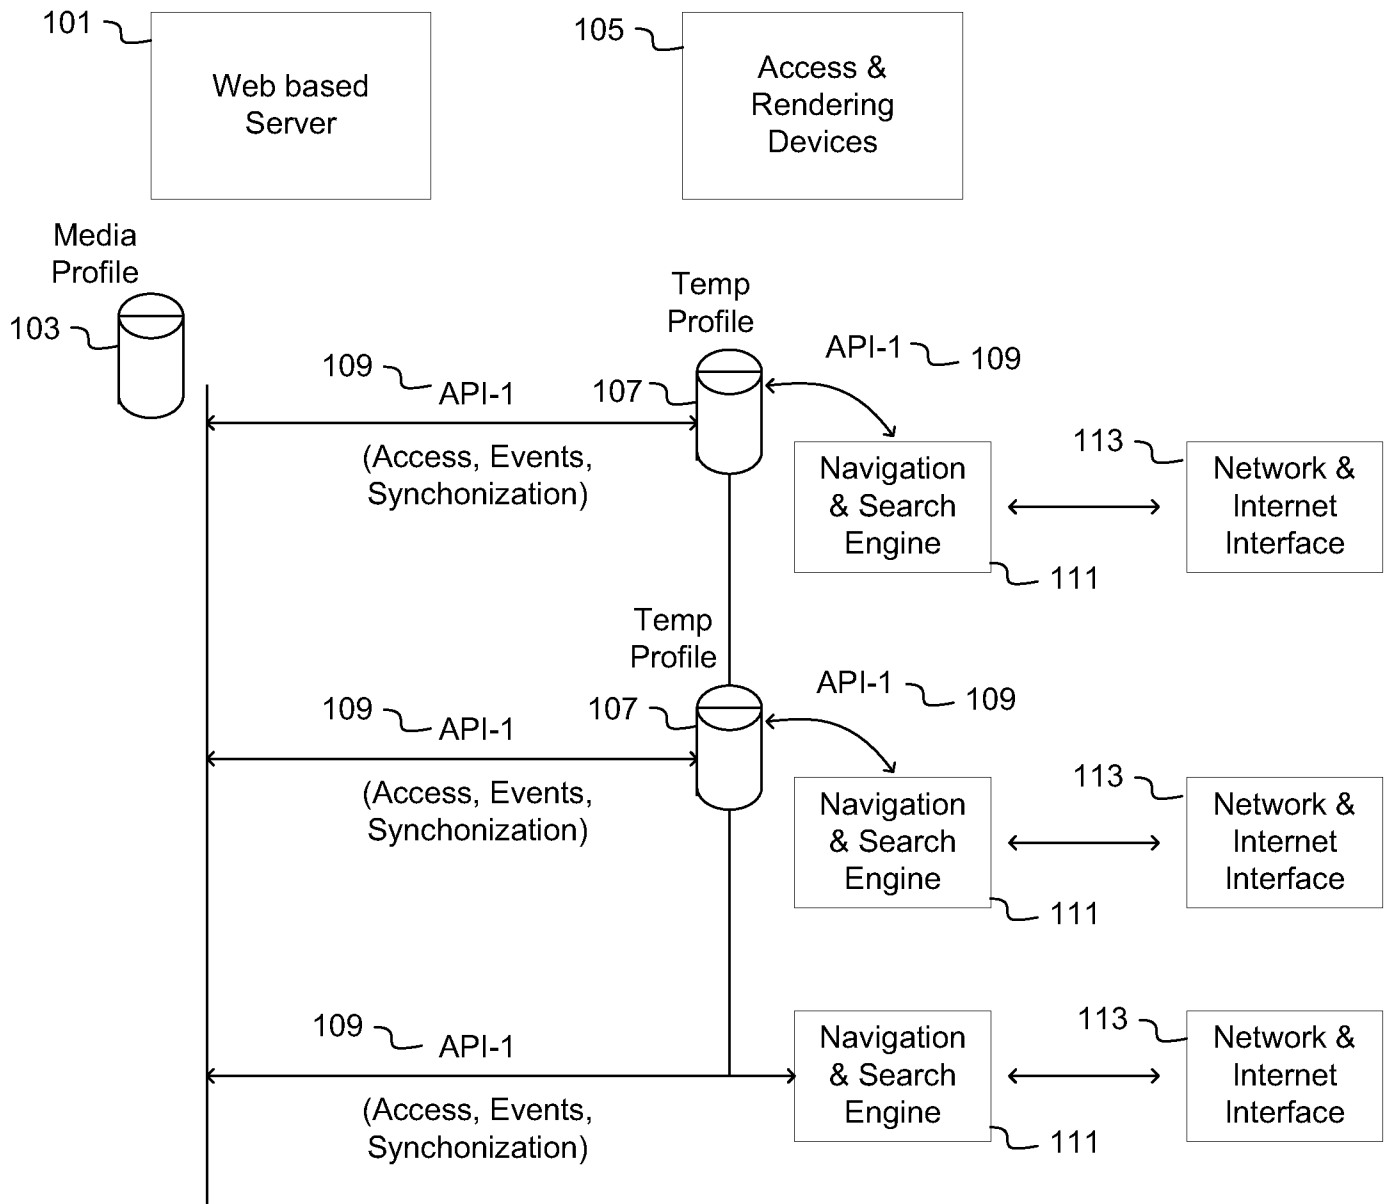


Fig. 1

Example Media Profile

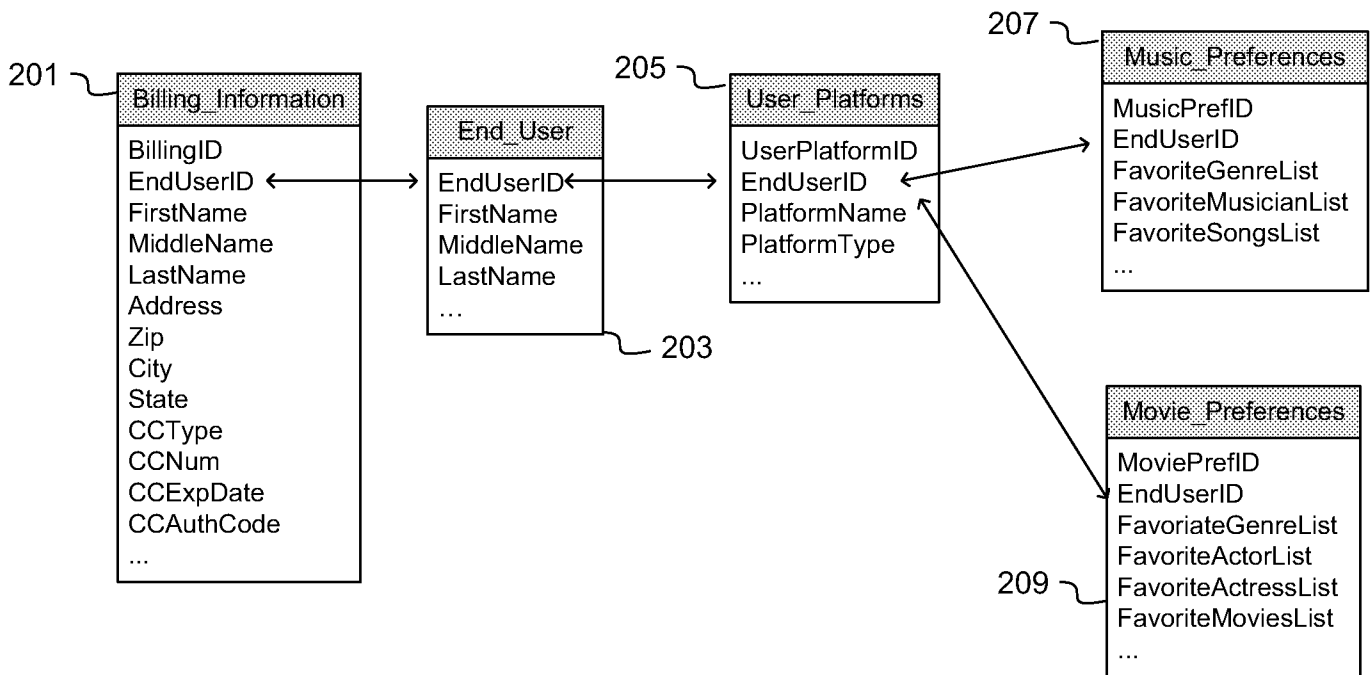


Fig. 2

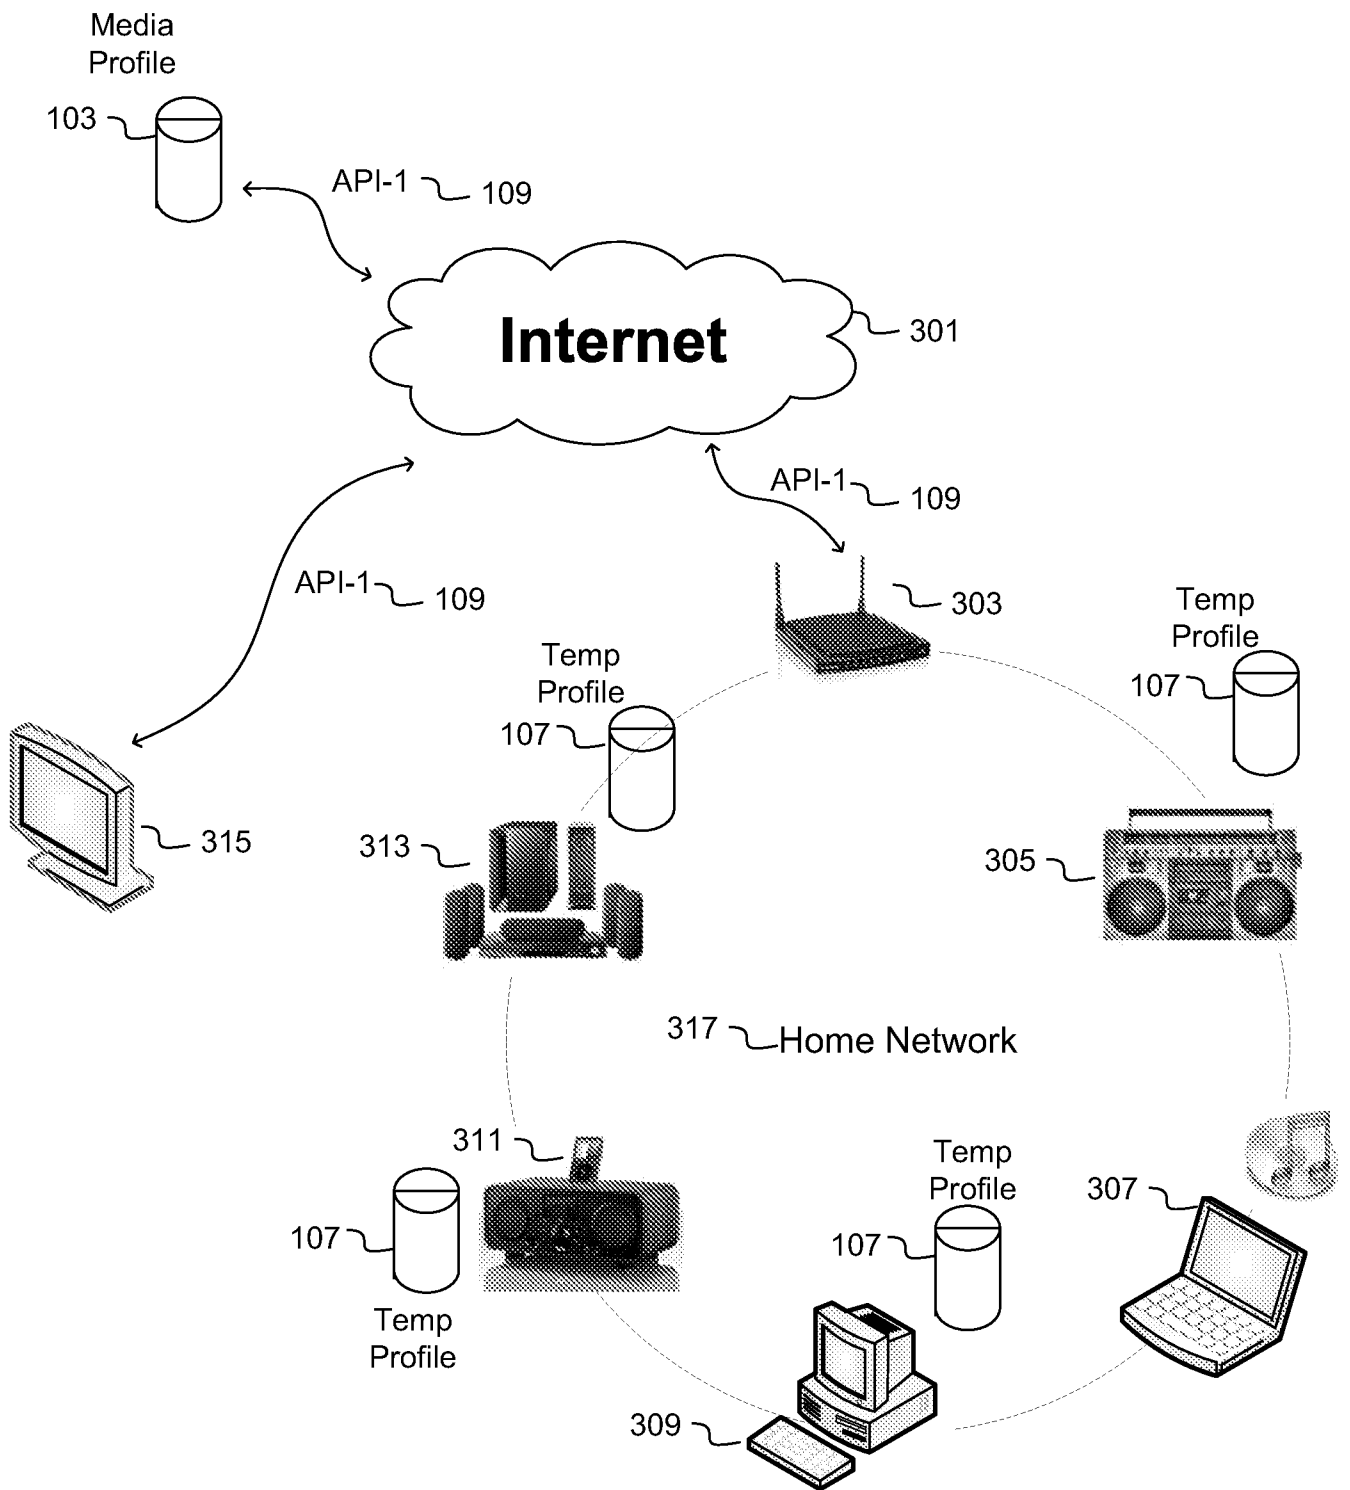


Fig. 3

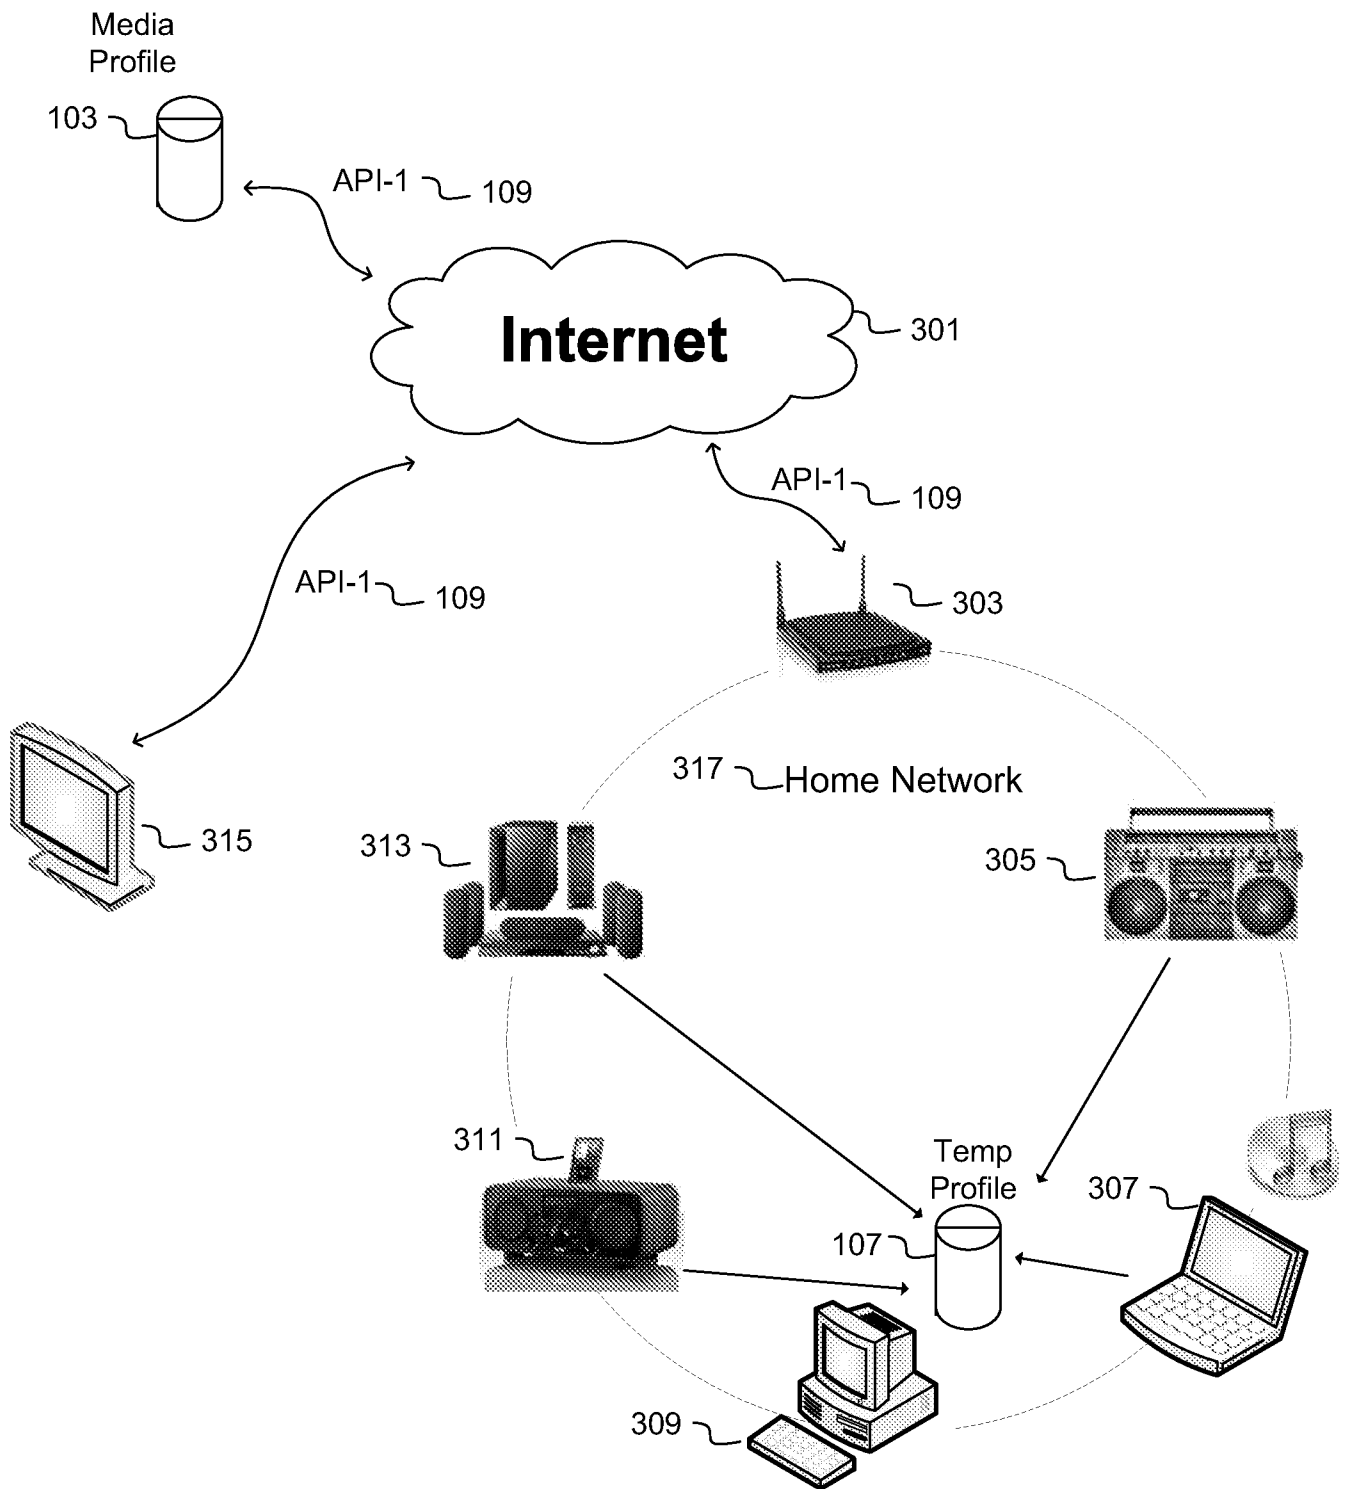


Fig. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2011/030657

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06F17/30
ADD.
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
Minimum documentation searched (classification system followed by classification symbols)
G06F
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/117202 A1 (MARTINEZ RONALD [US] ET AL) 22 May 2008 (2008-05-22) figures 1-2 paragraph [0035] - paragraph [0036] paragraph [0042] - paragraph [0043] paragraph [0045] - paragraph [0061] paragraph [0067] paragraph [0084] - paragraph [0088] figure 6a figure 7 paragraph [0091] - paragraph [0094] figures 9-10a paragraph [0096] - paragraph [0108] -----	1-20

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search 12 July 2011	Date of mailing of the international search report 21/07/2011
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Konak, Eyüp
--	---------------------------------------

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2011/030657

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008117202	A1	22-05-2008	
		CN 101542923 A	23-09-2009
		EP 2084820 A2	05-08-2009
		JP 2010510606 A	02-04-2010
		KR 20090081027 A	27-07-2009
		US 2009024452 A1	22-01-2009
		WO 2008064071 A2	29-05-2008
