

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/015921 A1

(51) International Patent Classification⁷: **H04L 12/26**,
12/24

(GB). **WIDLEY, Garry** [GB/GB]; 20 Cameron Avenue,
Kinross, Perth and Kinross-shire KY13 8BG (GB).

(21) International Application Number:
PCT/GB2003/003210

(74) **Agent: FLINT, Adam**; W.H. Beck, Greener & Co., 7 stone
Buildings, Lincoln's Inn, London WC2A 3SZ (GB).

(22) International Filing Date: 30 July 2003 (30.07.2003)

(81) **Designated States (national)**: AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/402,704 13 August 2002 (13.08.2002) US

(71) **Applicant (for all designated States except US): XYRA-
TEX TECHNOLOGY LIMITED** [GB/GB]; Langstone
Road, Havant, Hampshire PO9 1SA (GB).

(84) **Designated States (regional)**: ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) **Inventors; and**


(75) **Inventors/Applicants (for US only): WORRALL,
Alexander, Carl** [GB/GB]; Flat 1, Southdown House,
436A Havant Road, farlington, Portsmouth, Hampshire
PO9 1AB (GB). **CARTER, Brian, R.** [GB/GB]; 25
Churchill Avenue, Bognor Regis, Sussex PO21 5QF

Declaration under Rule 4.17:

— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) **Title: NETWORK MONITOR AND METHOD**

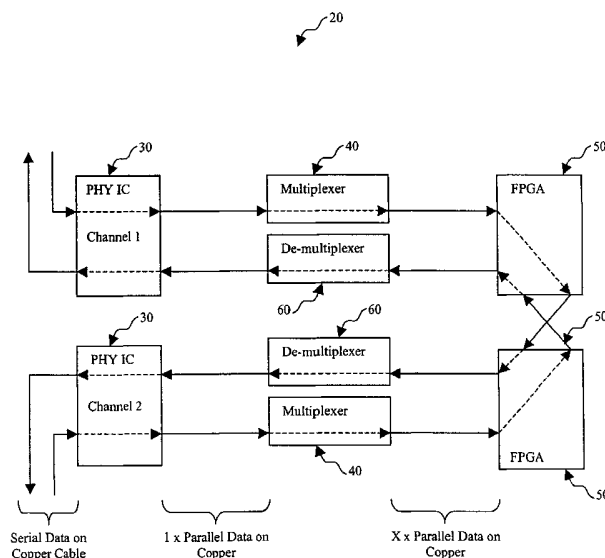

(57) **Abstract:** A network monitor (20) that taps data from a network link has first and second interfaces (30) that allow the network monitor (20) to be connected in-line in the network link between two network devices. The monitor (20) has first and second programmable logic devices (50). The programmable logic devices (50) are arranged to receive parallel data output by the interfaces (30) and to process said data for network analysis purposes. Each programmable logic device (50) is controllable so as to selectively pass a copy of the received parallel data to the other programmable logic device (50) so that the network monitor (20) can operate in in-line mode and not to pass a copy of the received parallel data to the other programmable logic device (50) so that the network monitor (20) can operate in end station mode.

WO 2004/015921 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

NETWORK MONITOR AND METHOD

The present invention relates to a network monitor and method.

5

Network monitoring systems analyse frames or packets of data as they pass through a network. The medium on which the data is carried is typically optical fibre or copper cable. The network monitor requires access to this
10 medium in order to obtain visibility of the data passing through it. This requires the network monitor to be placed either in-line with the network link or on the span port output of a network switch or router. These connection methods are shown schematically in Figures 1(a) to 1(c).
15 In particular, in Figure 1(a) there is shown two network devices 1,2 connected by a link 3. In Figure 1(b) there is shown an in-line connection of a network monitor 4 between the two network devices 1,2. In Figure 1(c) there is shown the connection of the network monitor 4 to the span port
20 output 5 of a network switch or router 6. The method of gaining access to data on the network link is commonly referred to as "tapping".

In-line tapping may be achieved using passive or
25 active tapping methods. Both of these methods require that the insertion into the network be unobtrusive so as not to affect the transmission of data between the devices on the network. An active tap re-drives the network data passing through it, typically using a retimer circuit which
30 regenerates the signal, restoring signal amplitude and timing, thus restoring signal integrity such that the ongoing signal passed back to the network is not degraded. Thus, an active tap may have to buffer and re-time the data

in order to pass data between the two network segments. A passive tap does not provide for any regeneration of the signal.

5 Active tapping of optical Gigabit Ethernet networks has been achieved using serial loopback or port-bypass features of serialiser-deserialiser (SERDES) devices in the front-end portion of the network monitor. This type of implementation is shown schematically in Figure 2. The
10 optical fibres 10 from the two sides of the network link are plugged into gigabit interface converters (GBICs) 11 of the network monitor 3, which convert the optical data stream into high-speed serial electrical signals. These signals are passed to the SERDES devices 12, which loop the
15 serial data back to the opposite channel of the network monitor 3, which re-drives the data back onto the network link, whilst providing a copy of the data, in parallel form, to the FPGA programmable devices 13 that process the data.

20

Although active tapping has been employed to optical network structures in manners such as that shown in Figure 2, the use of high-speed serial loopback or port bypass tends to limit the network monitor 3 to having a fixed
25 operation in either an in-line mode or end station mode. This is due to the need to connect and disconnect the crossover paths between the two sides of the monitor 3, to provide either a data path through the monitor 3 for in-line mode or to terminate the data path in the monitor 3 for end
30 station mode. The constraint is due to the lack of cost-effective means to reliably switch high-speed electrical signals on the printed circuit board of the monitor 3, whilst maintaining good signal integrity. Moreover, in

practice each implementation of this type of active tap architecture usually only supports one network speed, therefore limiting the scope of the product. This is typically due to the speed constraints on the serial
5 loopback features of the SERDES devices 12.

Passive tapping of 10 and 100 Base-T Ethernet networks, which operate on Category 5 twisted pair copper cables, has been achieved. However, 1000 Base-T, the
10 copper implementation of Gigabit Ethernet, has not been possible due to the signalling techniques employed on the network link. These enable simultaneous full-duplex data transmissions on each twisted pair, unlike 10 and 100 Base-T which use separate pairs for transmit and receive
15 signals. Complex signalling techniques are also likely to be employed in the forthcoming 10 Gigabit network physical layer which will be referred to as 10 GBase-T. Therefore, an active tap is likely to be the only feasible method of accessing networks which use complex signalling techniques.

20

According to a first aspect of the present invention, there is provided a network monitor that taps data from a network link between two network devices, the network monitor comprising: first and second interfaces that allow
25 the network monitor to be connected in-line in a network link between two network devices and to receive serial data therefrom and to transmit serial data thereto, each interface providing for serial-to-parallel conversion of data such that serial data received from a said network
30 link at the interface is output as parallel data, and each interface providing for parallel-to-serial conversion of data such that parallel data received at the interface is output as serial data for transmission to a said network

-4-

link; and, first and second programmable logic devices, the first programmable logic device being arranged to receive parallel data output by the first interface and to process said data for network analysis purposes, the second
5 programmable logic device being arranged to receive parallel data output by the second interface and to process said data for network analysis purposes, each programmable logic device being controllable so as to selectively pass a copy of the received parallel data to the other
10 programmable logic device so that the network monitor can operate in in-line mode and not to pass a copy of the received parallel data to the other programmable logic device so that the network monitor can operate in end station mode, the second programmable logic device being
15 arranged to pass the copy of the parallel data received from the first programmable logic device to the second interface for parallel-to-serial conversion and for transmission of the serial data back to a said network link when the network monitor is operating in in-line mode, the
20 first programmable logic device being arranged to pass the copy of the parallel data received from the second programmable logic device to the first interface for parallel-to-serial conversion and for transmission of the serial data back to a said network link when the network
25 monitor is operating in in-line mode.

The use of programmable logic devices to perform the data connection between two channels provides flexible control over the routing of the data as their
30 programmability allows their function to be changed during normal operation. This is particularly useful as it allows the network monitor to dynamically switch between operating as an in-line or end station monitoring device. In the

preferred embodiment, standard interfaces, such as physical layer (PHY) ICs, are used, which provide a cost-effective method of providing an interface to allow the network monitor to be interfaced with a network link operating at
5 several different speeds with different signalling technologies. The preferred embodiment of the present invention enables active tapping of data from any serial data network protocol and particularly an Ethernet network operating at 10, 100 and 1000 Base-T with data rates of 10,
10 100 and 1000 Megabits per second, respectively. The preferred embodiment may also be applied to 10 GBase-T, operating at 10 Gbps, which has yet to be fully specified and implemented.

15

In a preferred embodiment, the monitor comprises a first parallel data frequency and width adjuster between the first interface and the first programmable logic device, the first parallel data frequency and width
20 adjuster being constructed and arranged to reduce the frequency and to increase the width of parallel data received from the first interface by a predetermined amount prior to said data being passed to the first programmable logic device; and, a second parallel data frequency and
25 width adjuster between the second programmable logic device and the second interface, the second parallel data frequency and width adjuster being constructed and arranged to increase the frequency and to reduce the width of parallel data received from the second programmable logic
30 device by said predetermined amount prior to said data being transmitted to a said network link by the second interface when the network monitor is operating in in-line mode. The adjusting of data frequency and width

-6-

facilitates the use of low cost programmable logic devices.
The cost of a programmable logic device is typically
proportional to its speed capability and therefore,
programmable logic devices that operate at lower
5 frequencies are cheaper.

Preferably, the first parallel data frequency and
width adjuster is provided by a multiplexer and the second
parallel data frequency and width adjuster is provided by a
10 demultiplexer.

The network monitor preferably comprises a third
parallel data frequency and width adjuster between the
second interface and the second programmable logic device,
15 the third parallel data frequency and width adjuster being
constructed and arranged to reduce the frequency and to
increase the width of parallel data received from the
second interface by a predetermined amount prior to said
data being passed to the second programmable logic device;
20 and, a fourth parallel data frequency and width adjuster
between the first programmable logic device and the first
interface, the fourth parallel data frequency and width
adjuster being constructed and arranged to increase the
frequency and to reduce the width of parallel data received
25 from the first programmable logic device by said
predetermined amount prior to said data being transmitted
to a said network link by the first interface when the
network monitor is operating in in-line mode. The third
parallel data frequency and width adjuster is preferably
30 provided by a multiplexer and the fourth parallel data
frequency and width adjuster is preferably provided by a
demultiplexer.

The network monitor preferably comprises a clock signal provider for providing a clock signal so that data can be clocked through the network monitor. Preferably, the clock signal provider is constructed and arranged to
5 obtain said clock signal by recovering a clock signal from data received at the first and second interfaces respectively. The use of the recovered data clock to clock the data through the network monitor from the input of one channel though to the output of the opposite channel
10 ensures that the data and clock remain synchronised throughout the network monitor. This minimises the skew between the clock and the data. It also removes the requirement for memory based buffering between channels, therefore reducing the component count or logic requirement
15 inside the programmable logic devices.

Preferably, each programmable logic device is a field programmable gate array.

20 According to a second aspect of the present invention, there is provided a method of monitoring data on a network link, the method comprising: receiving data in serial form from a network link; converting the data in serial form to data in parallel form; passing the parallel data to a first
25 programmable logic device for processing for network analysis purposes; controlling the first programmable logic device such that the method takes place selectively in in-line mode or in end station mode, whereby in in-line mode the first programmable logic device provides a copy of
30 the received parallel data, the copy of the received parallel data being converted to data in serial form, said serial data being transmitted back onto the network link, and whereby in end station mode the first programmable

logic device does not provide a copy of the received parallel data for conversion into serial form and transmission back onto the network link.

5 The method preferably comprises, after converting the data in serial form to data in parallel form, reducing the frequency and increasing the width of the parallel data by a predetermined amount prior to said parallel data being passed to the first programmable logic device; and, when
10 operating in in-line mode, increasing the frequency and reducing the width of the copy of the parallel data by the predetermined amount prior to the copy of the parallel data being converted to data in serial form for transmission back onto the network link.

15

 The method preferably comprises recovering a clock signal from the data received in serial form from the network link and using the recovered clock signal when operating in in-line mode to clock the data throughout the
20 step of converting of the data in serial form to the data in parallel form to the step of transmitting serial data being back onto the network link.

 Embodiments of the present invention will now be
25 described by way of example with reference to the accompanying drawings, in which:

 Figs. 1(a) to 1(c) respectively show schematically two network devices connected by a network link, an in-line
30 connection of a network monitor between the two network devices, and the connection of the network monitor to the span port output of a network switch or router, all as known in the prior art;

Fig. 2 shows schematically a block circuit diagram of a prior art network monitor;

5 Figs. 3(a) to 3(c) respectively show schematically two network devices connected by a link, an in-line connection of an example of a network monitor according to an embodiment of the present invention between the two network devices, and operation of the network monitor in end
10 station mode;

Fig. 4 shows schematically a block circuit diagram of a network monitor according to an embodiment of the present invention; and,
15

Fig. 5 shows schematically an example of the clocking of data through a network monitor according to an embodiment of the present invention.

20 Referring now to Figure 3, in Figure 3(a) there is shown two network devices 1,2 connected by a link 3. In Figure 3(b) there is shown an in-line connection of an example of a network monitor 20 according to an embodiment of the present invention between the two network devices
25 1,2. Once inserted, the network monitor 20 is capable of disconnecting the in-line link to enable operation in end station mode as shown in Figure 3(c).

Referring now to Figure 4, the network monitor 20 uses
30 two identical circuits, referred to as Channel 1 and Channel 2, to tap data from the network. The network monitor 20 uses pairs of four different functional blocks to implement each of these circuits as shown in Figure 4.

-10-

These blocks are a physical layer IC 30, a multiplexer 40, field programmable gate array (FPGA) 50, and a de-multiplexer 60.

5 The physical layer (PHY) IC 30 provides the interface to the physical layer of the monitored network. The PHY IC 30 is preferably a multi-speed Ethernet PHY IC, which provides speed negotiation and signalling changes between the various speeds available on Ethernet. The PHY IC 30
10 performs serial-to-parallel conversion of the data entering the network monitor 20 from the network link. The PHY IC 30 also performs parallel-to-serial conversion of the data that is to be transmitted back onto the network link from the network monitor 20. The line-side and system-side
15 interfaces of the PHY IC 30 may be industry standard. In practice, the PHY IC 30 may be changed to support different physical layers. The use of standard PHY ICs 30 provide a cost-effective method of providing an interface that allows the network monitor 20 to be interfaced with a network link
20 operating at several different speeds with different signalling technologies.

 The multiplexer 40 interfaces the received parallel
25 data from the PHY IC 20 to the FPGA 50. The multiplexer 40 applies a conversion factor X to the received data. In particular, the multiplexer 40 decreases the frequency of the data by X times and also increases the width of the data words by X times. For example, if data is transmitted
30 into the multiplexer 40 where X=2, then 10-bit words at a frequency of 125 MHz are output as 20-bit words at a frequency of 62.5 MHz. The conversion factor is chosen so that the frequency of the data matches the capabilities of

-11-

the chosen FPGA 50. This adjusting of the data frequency and width facilitates the use of low cost FPGAs 50. The cost of an FPGA is approximately proportional to its speed capability and thus FPGAs that operate at lower frequencies are cheaper. This method of decreasing the frequency by X and increasing the word width by X results in no loss of bandwidth.

The FPGA 50 processes the data passed to it by the multiplexer 40. The FPGA 50 takes a copy of the data which it has been passed for processing purposes. The FPGA 50 passes a copy of the data to the FPGA 50 on the opposite channel if the network monitor 20 is operating in in-line mode. If required, the FPGA 50 on the opposite channel buffers the received data when the monitor 20 is operating in in-line mode. In this mode, the FPGA 50 on the opposite channel outputs the received parallel data to its associated de-multiplexer 60 for retransmission onto the network link.

20

When the monitor 20 is not operating in in-line mode, a control signal is sent to each FPGA 50 to reconfigure it such that a copy of the data received at each FPGA 50 from a channel is not passed to the other FPGA 50. In this way, the network monitor 20 can act as an end station for two channels simultaneously.

The use of FPGAs 50, or some other functionally equivalent programmable logic device, to perform the data connection between the two channels provides flexible control over the routing of the data through the network monitor 20 and thus allows the network monitor 20 to switch dynamically between in-line and end station modes. This is

due to the flexibility provided by the reconfigurability of the FPGAs 50 or other programmable logic devices, allowing their function to be changed during normal operation.

5 When the network monitor 20 is operating in in-line mode, the de-multiplexer 60 interfaces the parallel data received from the FPGA 50 to the PHY IC 30. The de-multiplexer 60 increases the frequency of the data by X times and decreases the width of the data words by X times.
10 For example, if data is transmitted into the de-multiplexer 60 where $X=2$, then 20-bit words at a frequency of 62.5 MHz are output to the PHY IC as 10-bit words at a frequency of 125 MHz. This method of increasing the frequency by X and decreasing the word width by X results in no loss of
15 bandwidth.

 The conversion factor X of the de-multiplexer 60 and the multiplexer 40 should be the same to ensure that the retransmitted data rate matches the received data rate.
20

 In a preferred embodiment, a synchronous clock signal is used to clock the data 80 through each of the aforementioned functional blocks 30-60. A clock signal 70 can be provided by the PHY IC 30, which recovers a clock
25 signal from the data 80 received from the network link. This recovered data clock, and/or its derivatives, is used to clock the data 80 through each of the four functional blocks 30-60, before clocking the data 80 into the PHY IC 30 of the opposite channel for retransmission back onto the
30 network link. Figure 5 shows the flow of the clock signal 70 from Channel 1 to Channel 2 of the network monitor 20. The same arrangement is used to clock the transfer of data from Channel 2 to Channel 1. The frequency of the clock

-13-

signal 70 may be decreased or increased by the conversion factor X as required in order to match changes in the frequency of the data 80 as it passes through each block 30-60. This use of the received data clock to clock the data through every stage of the network monitor 20 removes the need for re-timing the data. This is particularly valuable when the network monitor 20 is connected to a 1000 Base-T network. This arrangement minimises the skew between the clock and the data and removes the requirement for memory based buffering between channels, therefore reducing the component count or logic requirement inside the FPGAs 50.

The flow of the clock signal 70 to the opposite channel only occurs during in-line mode. When the network monitor 20 is operating in end station mode, the clocks of the two channels are independent of each other.

Embodiments of the present invention have been described with particular reference to the examples illustrated. However, it will be appreciated that variations and modifications may be made to the examples described within the scope of the present invention. For example, the multiplexer and de-multiplexer blocks 40, 60 could be replaced by programmable logic devices, such as FPGAs, though FPGAs that can operate at the speed required of these functional blocks are relatively expensive.

CLAIMS

1. A network monitor that taps data from a network link between two network devices, the network monitor
- 5 comprising:
- first and second interfaces that allow the network monitor to be connected in-line in a network link between two network devices and to receive serial data therefrom and to transmit serial data thereto, each interface
- 10 providing for serial-to-parallel conversion of data such that serial data received from a said network link at the interface is output as parallel data, and each interface providing for parallel-to-serial conversion of data such that parallel data received at the interface is output as
- 15 serial data for transmission to a said network link; and,
- first and second programmable logic devices,
- the first programmable logic device being arranged to receive parallel data output by the first interface and to process said data for network analysis purposes, the second
- 20 programmable logic device being arranged to receive parallel data output by the second interface and to process said data for network analysis purposes, each programmable logic device being controllable so as to selectively pass a copy of the received parallel data to the other
- 25 programmable logic device so that the network monitor can operate in in-line mode and not to pass a copy of the received parallel data to the other programmable logic device so that the network monitor can operate in end station mode,
- 30 the second programmable logic device being arranged to pass the copy of the parallel data received from the first programmable logic device to the second interface for parallel-to-serial conversion and for transmission of the

serial data back to a said network link when the network monitor is operating in in-line mode,

the first programmable logic device being arranged to pass the copy of the parallel data received from the second programmable logic device to the first interface for parallel-to-serial conversion and for transmission of the serial data back to a said network link when the network monitor is operating in in-line mode.

10 2. A network monitor according to claim 1, comprising:

a first parallel data frequency and width adjuster between the first interface and the first programmable logic device, the first parallel data frequency and width adjuster being constructed and arranged to reduce the frequency and to increase the width of parallel data received from the first interface by a predetermined amount prior to said data being passed to the first programmable logic device; and,

a second parallel data frequency and width adjuster between the second programmable logic device and the second interface, the second parallel data frequency and width adjuster being constructed and arranged to increase the frequency and to reduce the width of parallel data received from the second programmable logic device by said predetermined amount prior to said data being transmitted to a said network link by the second interface when the network monitor is operating in in-line mode.

3. A network monitor according to claim 2, wherein the first parallel data frequency and width adjuster is provided by a multiplexer and the second parallel data frequency and width adjuster is provided by a demultiplexer.

4. A network monitor according to claim 2 or claim 3, comprising:

a third parallel data frequency and width adjuster
5 between the second interface and the second programmable logic device, the third parallel data frequency and width adjuster being constructed and arranged to reduce the frequency and to increase the width of parallel data received from the second interface by a predetermined
10 amount prior to said data being passed to the second programmable logic device; and,

a fourth parallel data frequency and width adjuster between the first programmable logic device and the first interface, the fourth parallel data frequency and width
15 adjuster being constructed and arranged to increase the frequency and to reduce the width of parallel data received from the first programmable logic device by said predetermined amount prior to said data being transmitted to a said network link by the first interface when the
20 network monitor is operating in in-line mode.

5. A network monitor according to claim 4, wherein the third parallel data frequency and width adjuster is provided by a multiplexer and the fourth parallel data
25 frequency and width adjuster is provided by a demultiplexer.

6. A network monitor according to any of claims 1 to 5, comprising a clock signal provider for providing a clock
30 signal so that data can be clocked through the network monitor.

7. A network monitor according to claim 6, wherein the clock signal provider is constructed and arranged to obtain said clock signal by recovering a clock signal from data received at the first and second interfaces respectively.

5

8. A network monitor according to any of claims 1 to 7, wherein each programmable logic device is a field programmable gate array.

10 9. A method of monitoring data on a network link, the method comprising:

receiving data in serial form from a network link;

converting the data in serial form to data in parallel form;

15 passing the parallel data to a first programmable logic device for processing for network analysis purposes; controlling the first programmable logic device such that the method takes place selectively in in-line mode or in end station mode,

20 whereby in in-line mode the first programmable logic device provides a copy of the received parallel data, the copy of the received parallel data being converted to data in serial form, said serial data being transmitted back onto the network link, and

25 whereby in end station mode the first programmable logic device does not provide a copy of the received parallel data for conversion into serial form and transmission back onto the network link.

30 10. A method according to claim 9, comprising:

after converting the data in serial form to data in parallel form, reducing the frequency and increasing the width of the parallel data by a predetermined amount prior

-18-

to said parallel data being passed to the first
programmable logic device; and,

when operating in in-line mode, increasing the
frequency and reducing the width of the copy of the
5 parallel data by the predetermined amount prior to the copy
of the parallel data being converted to data in serial form
for transmission back onto the network link.

11. A method according to claim 9 or claim 10, comprising
10 recovering a clock signal from the data received in serial
form from the network link and using the recovered clock
signal when operating in in-line mode to clock the data
throughout the step of converting of the data in serial
form to the data in parallel form to the step of
15 transmitting serial data being back onto the network link.

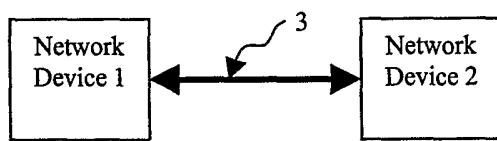


Fig. 1 (a)

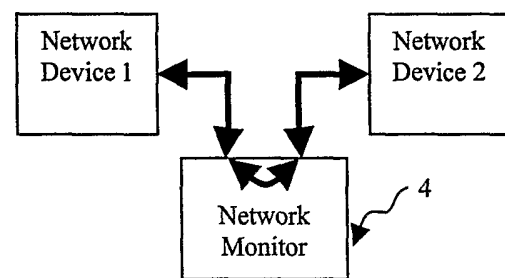


Fig. 1(b)

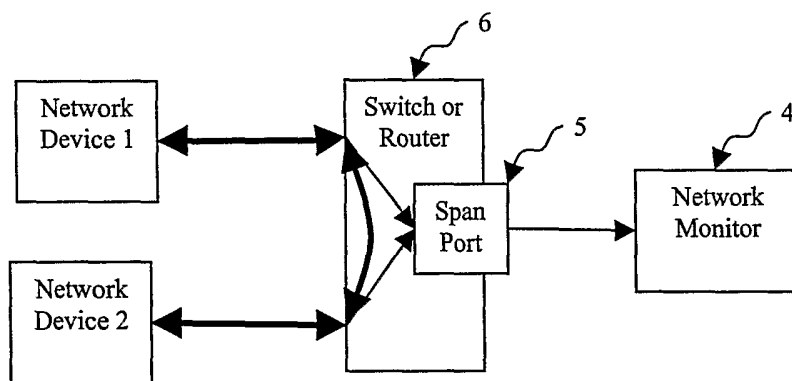


Fig. 1(c)

PRIOR ART

2/5

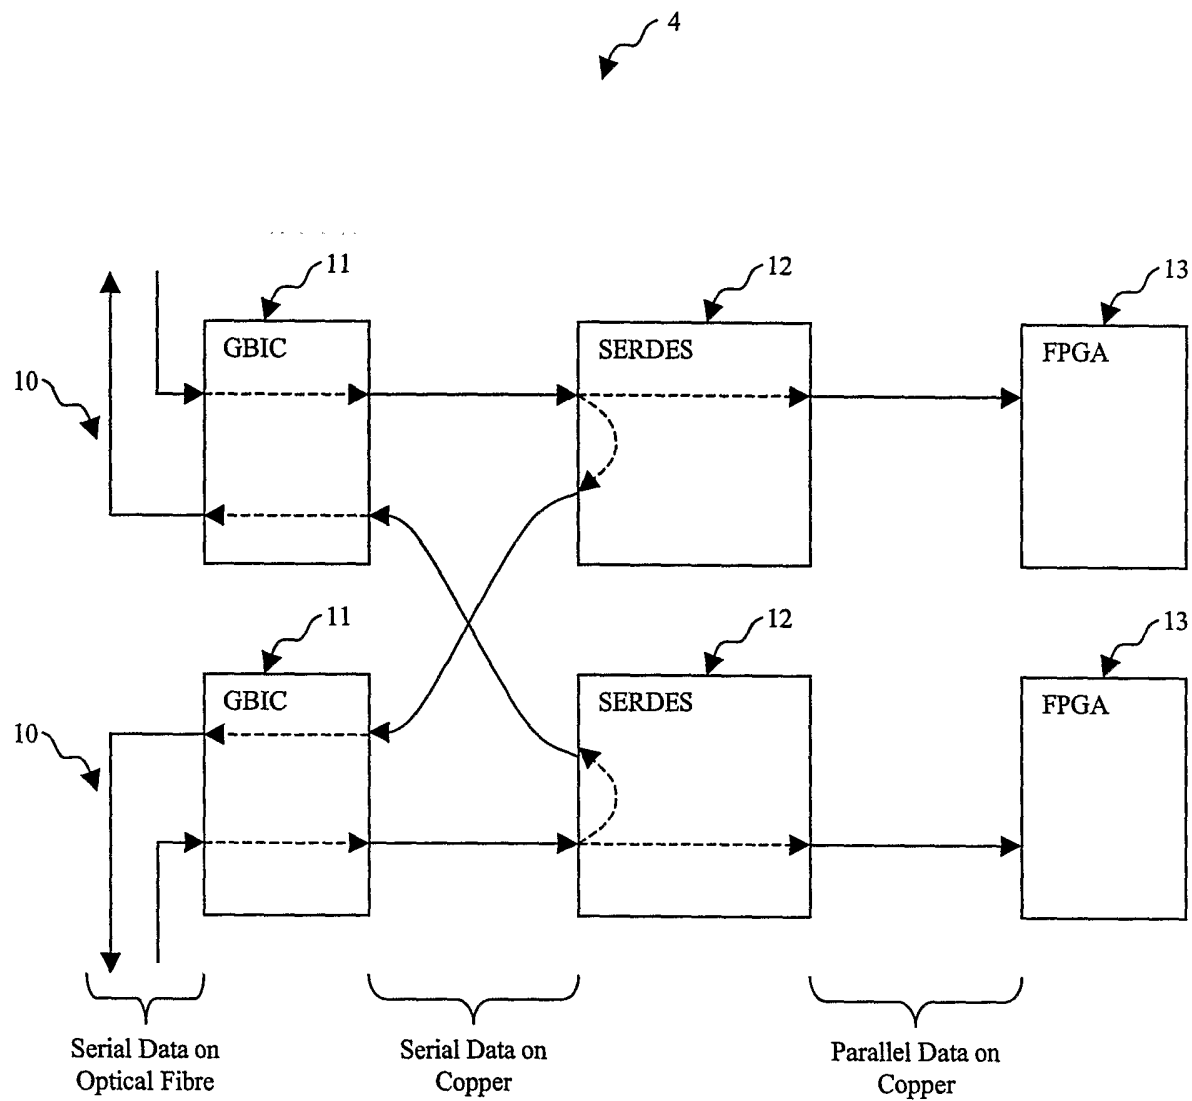


Fig. 2
PRIOR ART

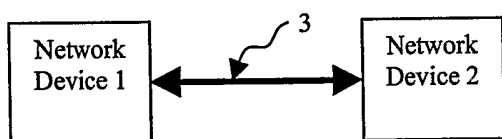


Fig. 3(a)

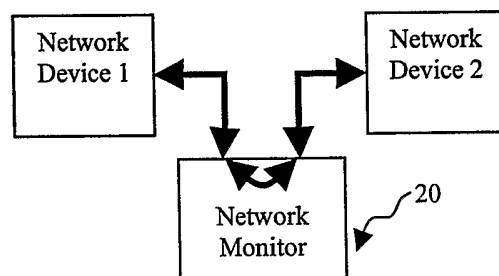


Fig. 3(b)


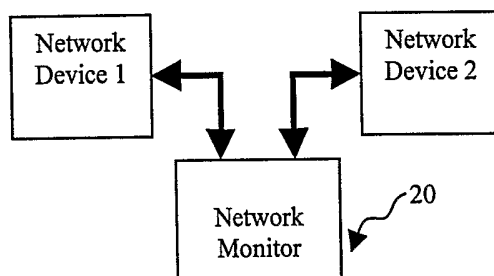


Fig. 3(c)

4/5

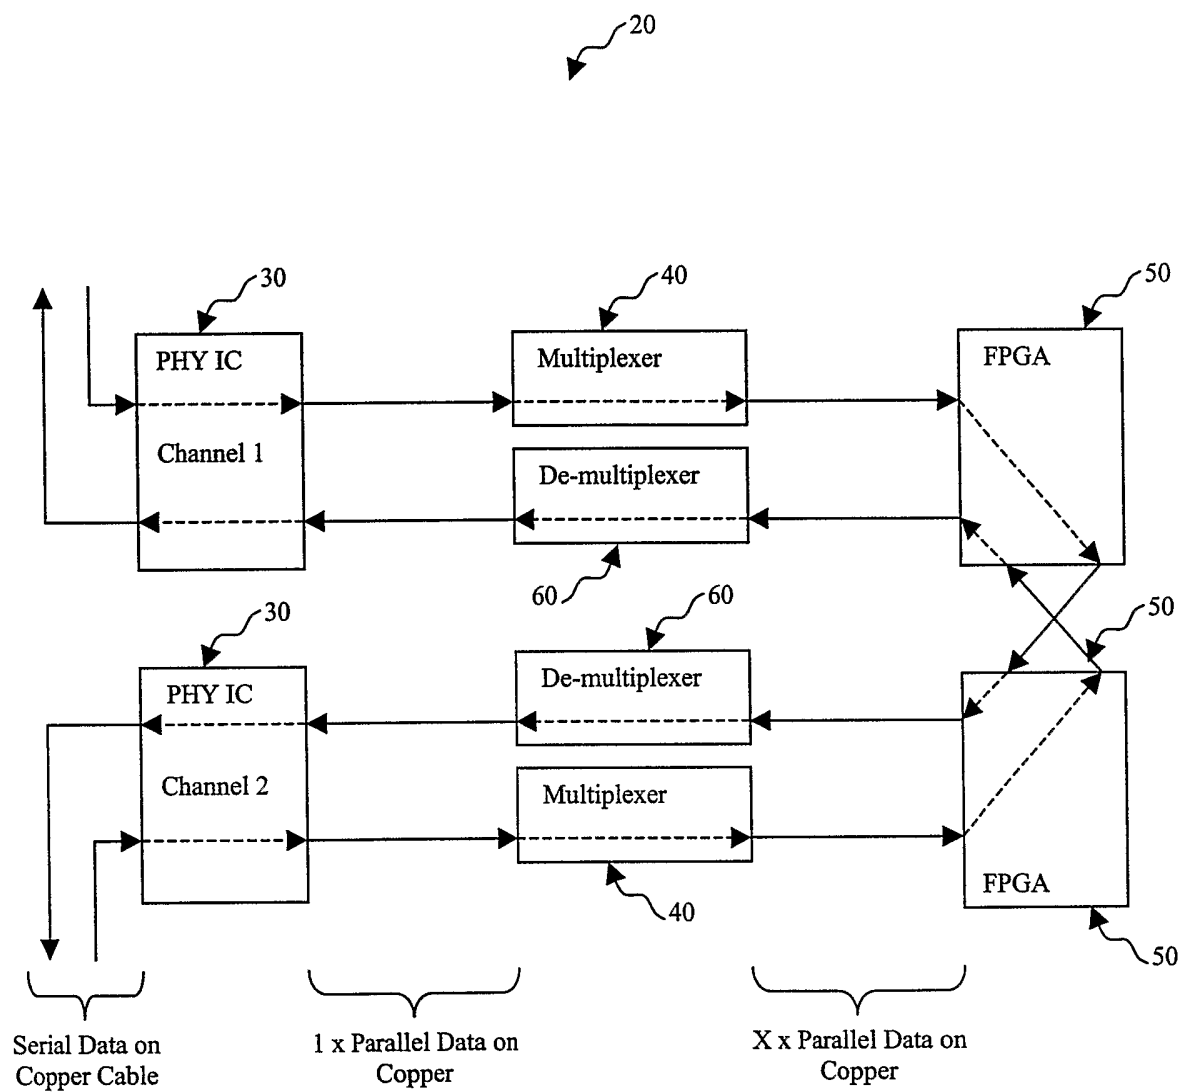

5/5

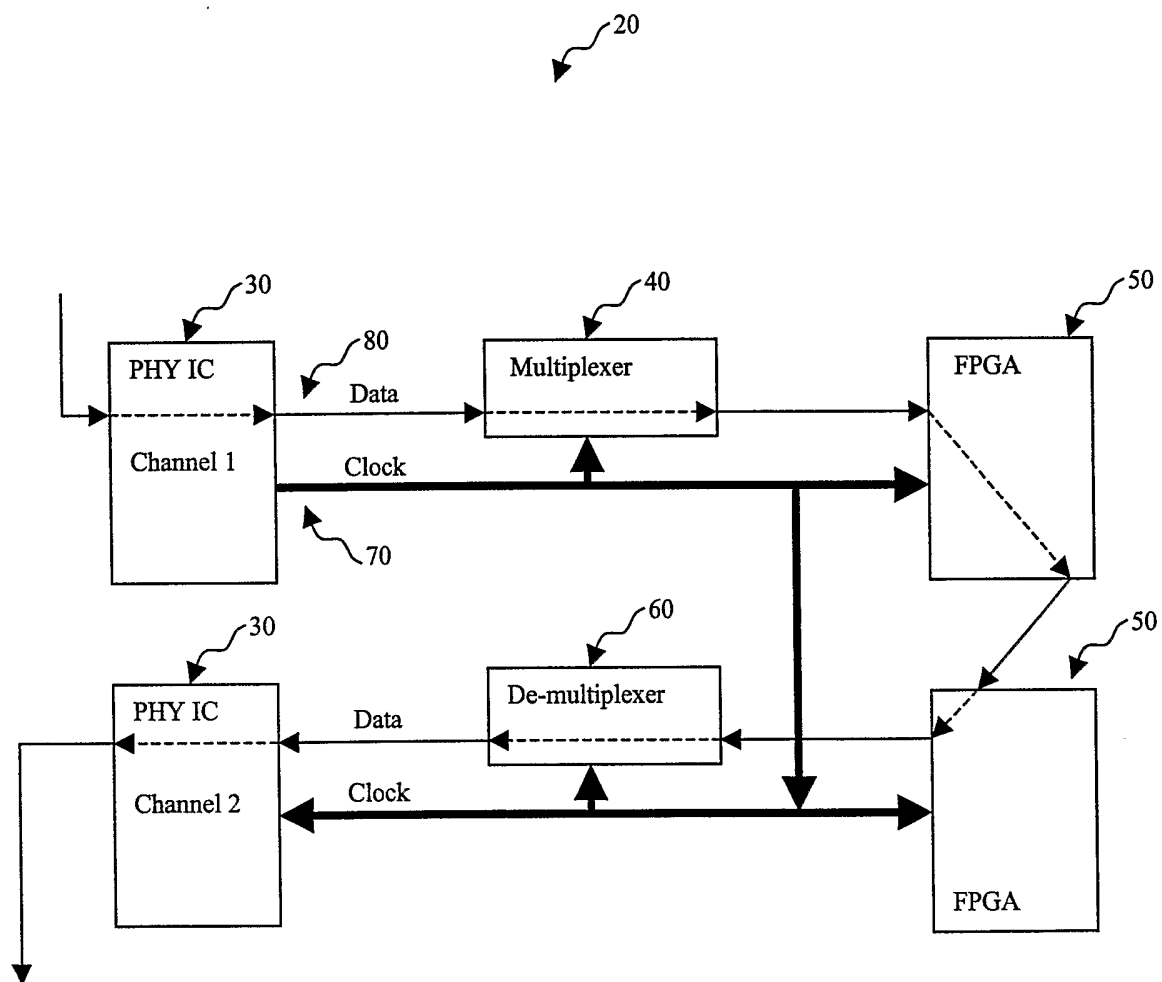


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 03/03210

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04L12/26 H04L12/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 6 047 321 A (RAAB ILAN ET AL) 4 April 2000 (2000-04-04) abstract claims 1-4,13,21,24,27 figure 5 column 2, line 61 -column 3, line 16 column 4, line 38 -column 5, line 30 ---	1-11
A	EP 0 661 848 A (NIPPON ELECTRIC CO) 5 July 1995 (1995-07-05) abstract claims 1-4 column 1, line 25 -column 2, line 54 column 3, line 48 -column 4, line 14 --- -/--	1-11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

4 December 2003

Date of mailing of the international search report

16/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Cichra, M

INTERNATIONAL SEARCH REPORT

Internatio

ication No

PCT/GB 03/03210

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 724 344 A (HEWLETT PACKARD CO) 31 July 1996 (1996-07-31) abstract claims 1,5,6 page 1, line 6-35 page 5, line 16-47 page 6, line 48 -page 7, line 40 -----	1-11
A	WO 00 30293 A (VIXEL CORP) 25 May 2000 (2000-05-25) abstract claims 1,5,18,21,22 page 5, line 25 -page 6, line 28 page 13, line 17-38 page 19, line 18-25 -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International publication No

PCT/GB 03/03210

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6047321	A	04-04-2000	US 6441931 B1	27-08-2002
			US 5898837 A	27-04-1999
EP 0661848	A	05-07-1995	EP 0661848 A2	05-07-1995
			JP 2885103 B2	19-04-1999
			JP 7236185 A	05-09-1995
EP 0724344	A	31-07-1996	US 5548590 A	20-08-1996
			CA 2160934 A1	31-07-1996
			EP 0724344 A2	31-07-1996
			JP 8298536 A	12-11-1996
WO 0030293	A	25-05-2000	AU 1722400 A	05-06-2000
			WO 0030293 A2	25-05-2000