



(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) **Date de dépôt PCT/PCT Filing Date:** 2022/08/22
(87) **Date publication PCT/PCT Publication Date:** 2023/03/02
(85) **Entrée phase nationale/National Entry:** 2024/02/27
(86) **N° demande PCT/PCT Application No.:** CN 2022/114061
(87) **N° publication PCT/PCT Publication No.:** 2023/025113
(30) **Priorité/Priority:** 2021/08/24 (CN202110977323.6)

(51) **Cl.Int./Int.Cl.** *H04W 72/04* (2023.01)
(71) **Demandeur/Applicant:**
HUAWEI TECHNOLOGIES CO., LTD., CN
(72) **Inventeurs/Inventors:**
GONG, BO, CN;
HU, MENGSHI, CN;
LIU, CHENCHEN, CN;
YU, JIAN, CN;
GAN, MING, CN
(74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : PROCÉDE DE TRANSMISSION D'INFORMATIONS, APPAREIL DE COMMUNICATION, SUPPORT DE STOCKAGE, PUCES ET PRODUIT-PROGRAMME**
(54) **Title: INFORMATION TRANSMISSION METHOD, COMMUNICATION APPARATUS, STORAGE MEDIUM, CHIP AND PROGRAM PRODUCT**

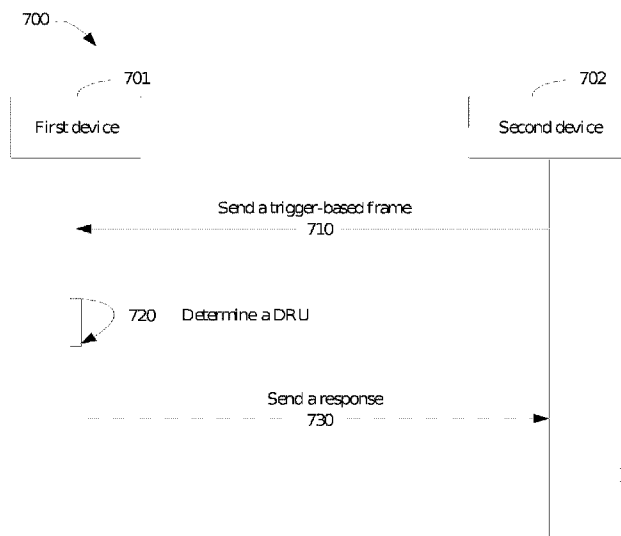


FIG. 7

(57) **Abrégé/Abstract:**

Provided in the embodiments of the present disclosure are an information transmission method, a communication apparatus, a storage medium, a chip and a program product. The method comprises: a first device receiving a trigger-based frame from a second device, wherein the trigger-based frame comprises distributed resource unit indication information; on the basis of the distributed resource unit indication information, determining one or more distributed resource blocks, wherein each distributed resource block comprises N1 data subcarriers and N2 pilot subcarriers, and the absolute value of the difference between indexes of every two data subcarriers in N3 data subcarriers from among the N1 data subcarriers is greater than or equal to 4; and sending, on the one or more distributed resource blocks and to the second device, a response concerning the trigger-based frame. By means of the method, complete dispersion of the subcarriers comprised in a DRU can be realized, and pilot subcarriers comprised therein are also completely dispersed, such that under the same power spectral density, the maximum power amplification factor can be achieved in comparison with a continuous RU, thereby improving the transmission efficiency.

Date Submitted: 2024/02/27

CA App. No.: 3230271

Abstract:

Embodiments of this disclosure provide an information transmission method, a communication apparatus, a storage medium, a chip, and a program product. The method includes: receiving, by a first device, a trigger-based frame from a second device, where the trigger-based frame includes distributed resource unit indication information; determining one or more distributed resource blocks based on the distributed resource unit indication information, where each distributed resource block includes $N1$ data subcarriers and $N2$ pilot subcarriers, and an absolute value of an index difference between every two data subcarriers of $N3$ data subcarriers in the $N1$ data subcarriers is greater than or equal to 4; and sending a response to the trigger-based frame to the second device on the one or more distributed resource blocks. In this manner, subcarriers included in a DRU can be fully discrete, and pilot subcarriers included in the DRU can also be fully discrete. Therefore, compared with a continuous RU, the DRU can implement a maximum power amplification multiple at a same power spectral density. This improves transmission efficiency.

INFORMATION TRANSMISSION METHOD, COMMUNICATION APPARATUS, STORAGE MEDIUM, CHIP, AND PROGRAM PRODUCT

[0001] This application claims priority to Chinese Patent Application No. 202110977323.6, filed with the China National Intellectual Property Administration on August 24, 2021 and entitled "INFORMATION TRANSMISSION METHOD, COMMUNICATION APPARATUS, STORAGE MEDIUM, CHIP, AND PROGRAM PRODUCT", which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

[0002] This disclosure relates to the communication field, and more specifically, to an information transmission method, a communication apparatus, a storage medium, a chip, and a program product.

BACKGROUND

[0003] The 802.11 standards of a wireless local area network (Wireless Local Area Network, WLAN) system are evolving. The evolution starts from 802.11a/b/g and goes through 802.11n, 802.11ac, 802.11ax, and 802.11be. The 802.11ax standard is referred to as high efficiency (High Efficiency, HE), the 802.11be standard is referred to as extremely high throughput (Extremely High Throughput, EHT), and the standards later than the 802.11be are represented by EHT+.

[0004] Starting from the 802.11ax and the 802.11be, multi-user transmission is supported. However, due to a limitation of a maximum power and a maximum power spectral density, a power of each transmission in current multi-user transmission is low, and consequently, transmission efficiency is not high.

SUMMARY

[0005] Embodiments of this disclosure provide an information transmission solution, to support multi-user transmission and implement high transmission efficiency.

[0006] According to a first aspect, an information transmission method is provided. The

method includes: A first device receives a trigger-based frame from a second device, where the trigger-based frame includes distributed resource unit (Distributed Resource Unit, DRU) indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; the first device
5 determines one or more distributed resource blocks based on the distributed resource unit indication information, where each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$; and the first device sends a response to
10 the trigger-based frame to the second device on the one or more distributed resource blocks.

[0007] Therefore, in this embodiment of this disclosure, the distributed resource unit is used for information transmission. In this way, at a limited power spectral density, finite subcarriers can be discrete on a larger bandwidth, and a transmit power can be increased. Therefore, compared with a continuous RU, the resource unit in this embodiment of this disclosure includes the
15 subcarriers discrete on a larger bandwidth. When the discrete RU is used for data transmission, the transmit power can be increased without increasing a power spectral density, to obtain a higher gain.

[0008] According to a second aspect, an information transmission method is provided. The method includes: A second device sends a trigger-based frame to a first device, where the trigger-
20 based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; and the second device receives a response to a trigger-based frame from the first device on one or more distributed resource blocks, where the one or more distributed resource blocks are determined based on the distributed resource unit indication information, each of the one or more
25 distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$.

[0009] According to a third aspect, this disclosure provides a communication apparatus. The communication apparatus may be a station or a chip in a station, for example, a Wi-Fi chip. The communication apparatus includes: a receiving unit, configured to receive a trigger-based frame from a second device, where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the communication apparatus; a determining unit,
30 configured to determine one or more distributed resource blocks based on the distributed resource
35

unit indication information, where each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$; and a sending unit, configured to send a response to the trigger-based frame to the second device on the one or more distributed resource blocks.

[0010] According to a fourth aspect, this disclosure provides a communication apparatus. The communication apparatus may be an access point or a chip in an access point, for example, a Wi-Fi chip. The communication apparatus includes: a sending unit, configured to send a trigger-based frame to a first device, where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; and a receiving unit, configured to receive a response to the trigger-based frame from the first device on one or more distributed resource blocks, where the one or more distributed resource blocks are determined based on the distributed resource unit indication information, and each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$.

[0011] According to a fifth aspect, a communication apparatus is provided. The communication apparatus includes: a transceiver, a processor, and a memory. The memory stores instructions executed by the processor. When the instructions are executed by the processor, the communication apparatus receives a trigger-based frame from a second device by using the transceiver, where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the communication apparatus; determines one or more distributed resource blocks based on the distributed resource unit indication information, where each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$; and sends a response to the trigger-based frame to the second device on the one or more distributed resource blocks by using the transceiver.

[0012] According to a sixth aspect, a communication apparatus is provided. The communication apparatus includes: a transceiver, a processor, and a memory. The memory stores instructions executed by the processor. When the instructions are executed by the processor, the communication apparatus sends a trigger-based frame to a first device by using the transceiver,

where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; and receives a response to the trigger-based frame from the first device on one or more distributed resource blocks by using the transceiver, where the one or more distributed resource blocks are determined based on the distributed resource unit indication information, each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$.

[0013] In some embodiments of any one of the foregoing aspects, the trigger-based frame may include a type of control frame, referred to as a trigger frame (trigger frame), for example, a trigger frame in the 802.11be, in a medium access control (Medium Access Control, MAC) frame specified in a standard, or may be another MAC frame with a trigger function. The another MAC frame with a trigger function may also be referred to as a MAC frame with a triggered response scheduling (Triggered Response Scheduling, TRS) function, and the function is generally implemented by using a TRS control subfield included in the MAC frame. In some embodiments, the DRU indication information may be carried in an RU allocation field in a user information field in the trigger frame, or may be carried in an RU allocation field in a TRS control subfield in another MAC frame.

[0014] In some embodiments of any one of the foregoing aspects, the DRU indication information may indicate a size and a location of the DRU allocated to the first device. The size of the DRU may be a quantity of subcarriers in the DRU, and the location of the DRU may be a location of a subcarrier in the DRU in frequency domain. For example, the DRU indication information may be carried in at least one of an RU allocation subfield, an uplink bandwidth subfield, an uplink bandwidth extension subfield, and a primary-secondary 160 subfield.

[0015] In some embodiments of any one of the foregoing aspects, the one or more distributed resource blocks may be determined from a predetermined quantity of distributed resource blocks, where the predetermined quantity of distributed resource blocks is predefined or preconfigured. In some embodiments, a specific value of the predetermined quantity is related to a bandwidth and a size of the distributed resource block.

[0016] In some embodiments of any one of the foregoing aspects, an operating bandwidth of the first device is 40 MHz. The predetermined quantity of distributed resource blocks includes 18 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 5 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight

distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 6 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 8 in the description of embodiments below. Details are not described herein again.

[0017] In some embodiments of any one of the foregoing aspects, an operating bandwidth of the first device is 80 MHz. The predetermined quantity of distributed resource blocks includes 36 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 16 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 17 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 19 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included in each DRU242 satisfies Table 21 in the description of embodiments below. Details are not described herein again.

[0018] In some embodiments of any one of the foregoing aspects, an operating bandwidth of the first device is 160 MHz. The predetermined quantity of distributed resource blocks includes 72 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 26 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 32 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 27 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 29 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included in each DRU242 satisfies Table 31 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU484 whose subcarrier

quantity is 484, where an index of a subcarrier included in each DRU484 satisfies Table 34 in the description of embodiments below. Details are not described herein again.

[0019] In some embodiments of any one of the foregoing aspects, an operating bandwidth of the first device is 320 MHz. The predetermined quantity of distributed resource blocks includes 144 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 37 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 64 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 38 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 32 distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 40 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included in each DRU242 satisfies Table 42 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU484 whose subcarrier quantity is 484, where an index of a subcarrier included in each DRU484 satisfies Table 45 in the description of embodiments below. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU996 whose subcarrier quantity is 996, where an index of a subcarrier included in each DRU996 satisfies Table 47 in the description of embodiments below. Details are not described herein again.

[0020] In some embodiments of any one of the foregoing aspects, when $N1 = 24$, $N2 = 2$. When $N1 = 48$, $N2 = 4$. When $N1 = 102$, $N2 = 4$. When $N1 = 234$, $N2 = 8$. When $N1 = 468$, $N2 = 16$. When $N1 = 980$, $N2 = 16$. In some embodiments of any one of the foregoing aspects, when $N1 = 24$ and $N2 = 2$, the DRU is referred to as a 26-tone DRU. When $N1 = 48$ and $N2 = 4$, the DRU is referred to as a 52-tone DRU. When $N1 = 102$ and $N2 = 4$, the DRU is referred to as a 106-tone DRU. When $N1 = 234$ and $N2 = 8$, the DRU is referred to as a 242-tone DRU. When $N1 = 468$ and $N2 = 16$, the DRU is referred to as a 484-tone DRU. When $N1 = 980$ and $N2 = 16$, the DRU is referred to as a 996-tone DRU.

[0021] In some embodiments of any one of the foregoing aspects, when a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, $N1 = 24$, $N2 = 2$, and $N3 = 24$, or when a bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N1 = 48$, $N2 = 4$, and $N3 = 48$, or when a bandwidth is 160 MHz or 320 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$, or when a bandwidth is 320 MHz, $N1 = 234$, $N2 = 8$, and $N3 = 192$, the $N3$ data subcarriers satisfy: If the $N3$ data subcarriers are divided into $N3/6$

groups in ascending order of indices, every six data subcarriers form one group, and an absolute value of an index difference between two adjacent data subcarriers in a same group is 18.

[0022] In some embodiments of any one of the foregoing aspects, when a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, $N_1 = 24$, $N_2 = 2$, and $N_3 = 24$, or when a bandwidth is 80 MHz, $N_1 = 48$, $N_2 = 4$, and $N_3 = 48$, or when a bandwidth is 160 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 320 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the $N_3/6$ groups are alternately 33 and 43.

[0023] In some embodiments of any one of the foregoing aspects, if a bandwidth is 160 MHz, $N_1 = 48$, and $N_3 = 48$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the $N_3/6$ groups are sequentially 33, 43, 33, 555, 33, 43, and 33.

[0024] In some embodiments of any one of the foregoing aspects, if a bandwidth is 320 MHz, $N_1 = 48$, and $N_3 = 48$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the $N_3/6$ groups are sequentially 33, 43, 33, 1579, 33, 43, and 33.

[0025] In some embodiments of any one of the foregoing aspects, if a bandwidth is 320 MHz, $N_1 = 102$, and $N_3 = 96$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the $N_3/6$ groups are sequentially 33, 43, 33, 555, 33, 43, 33, 555, 33, 43, 33, 555, 33, 43, and 33.

[0026] In some embodiments of any one of the foregoing aspects, when a bandwidth is 40 MHz, $N_1 = 48$, $N_2 = 4$, and $N_3 = 48$, or when a bandwidth is 80 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 160 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, or when a bandwidth is 320 MHz, $N_1 = 468$, $N_2 = 16$, and $N_3 = 384$, the N_3 data subcarriers satisfy: If the N_3 data subcarriers are divided into $N_3/12$ groups in ascending order of indices, every 12 data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 9, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 24 and 34.

[0027] In some embodiments of any one of the foregoing aspects, when a bandwidth is 40 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 80 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, or when a bandwidth is 160 MHz, $N_1 = 468$, $N_2 = 16$, and $N_3 = 384$, or when a bandwidth is 320 MHz, $N_1 = 980$, $N_2 = 16$, and $N_3 = 768$, the N_3 data subcarriers satisfy: If the N_3 data subcarriers are divided into $N_3/24$ groups in ascending order of indices, every 24 data subcarriers form one group, absolute values of index differences between two adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences

between two most adjacent data subcarriers in two adjacent groups are alternately 19 and 29.

[0028] In some embodiments of any one of the foregoing aspects, when the bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N1 = 234$, $N2 = 8$, $N3 = 192$, and $N4 = 24$, or when the bandwidth is 160 MHz or 320 MHz, $N1 = 468$, $N2 = 16$, $N3 = 384$, and $N4 = 48$, or when the bandwidth is 320 MHz, $N1 = 980$, $N2 = 16$, $N3 = 768$, and $N4 = 96$, $N4$ data subcarriers of remaining data subcarriers other than the $N3$ data subcarriers in the $N1$ data subcarriers satisfy: If the $N4$ data subcarriers are divided into $N4/6$ groups in ascending order of indices, every six data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 18, the absolute value $N4$ of the index difference is a positive integer, $N4 < N3$, and $N3 + N4 < N1$.

[0029] In some embodiments of any one of the foregoing aspects, if $N1 = 234$, $N3 = 192$, and $N4 = 24$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of $N4/6$ groups are sequentially and alternately 33 and 43.

[0030] In some embodiments of any one of the foregoing aspects, a lowest-frequency index of a data subcarrier at a lowest frequency in the $N3$ data subcarriers satisfies: When the bandwidth is 40 MHz, the lowest-frequency index is $-a-128$; when the bandwidth is 80 MHz, the lowest-frequency index is $-a-128-256$; when the bandwidth is 160 MHz, the lowest-frequency index is $-a-128-256-512$; or when the bandwidth is 320 MHz, the lowest-frequency index is $-a-128-256-512-1024$; and a is any positive integer from 110 to 122.

[0031] In some embodiments of any one of the foregoing aspects, a is 115. In this way, subcarriers in a same transmission resource block can be fully discrete.

[0032] In some embodiments of any one of the foregoing aspects, an absolute value of an index difference between every two pilot subcarriers in the $N2$ pilot subcarriers is greater than 1, thereby implementing frequency domain diversity.

[0033] According to a seventh aspect, a computer-readable storage medium is provided. The computer-readable storage medium stores a computer program. When the computer program is executed by a processor, an operation of the method according to any one of the first aspect or the second aspect, or the implementations of the first aspect or the second aspect is implemented.

[0034] According to an eighth aspect, a chip or a chip system is provided. The chip or the chip system includes a processing circuit, and is configured to perform an operation of the method according to any one of the first aspect or the second aspect, or the implementations of the first aspect or the second aspect.

[0035] According to a ninth aspect, a computer program or a computer program product is provided. The computer program or the computer program product is tangibly stored in a computer-readable medium and includes computer-executable instructions. When the computer-

executable instructions are run on a computer, the computer is enabled to perform an operation of the method according to any one of the first aspect or the second aspect, or the implementations of the first aspect or the second aspect.

[0036] According to a tenth aspect, a communication system is provided. The system includes a first device and a second device. The first device may implement an operation of the method according to any one of the first aspect or the implementations of the first aspect, and the second device may implement an operation of the method according to any one of the second aspect or the implementations of the second aspect.

[0037] In some embodiments of the tenth aspect, the first device includes the communication apparatus in the third aspect or the communication apparatus in the fifth aspect, and the second device includes the communication apparatus in the fourth aspect or the communication apparatus in the sixth aspect.

[0038] In some embodiments of the tenth aspect, the first device is a station device, and the second device is an access point device.

BRIEF DESCRIPTION OF DRAWINGS

[0039] The foregoing and other features, advantages, and aspects of embodiments of this disclosure become more obvious with reference to the accompanying drawings and with reference to the following detailed descriptions. In the accompanying drawings, same or similar reference numerals represent same or similar elements.

[0040] FIG. 1 is a schematic diagram of RU distribution when a bandwidth is 20 MHz;

[0041] FIG. 2 is a schematic diagram of RU distribution when a bandwidth is 40 MHz;

[0042] FIG. 3 is a schematic diagram of RU distribution when a bandwidth is 80 MHz;

[0043] FIG. 4 is a schematic diagram of multi-user transmission between an AP and a STA;

[0044] FIG. 5 is a schematic diagram of a frame format of a trigger frame;

[0045] FIG. 6 is a schematic diagram of a communication system in which embodiments of this disclosure may be implemented;

[0046] FIG. 7 is a diagram of signaling interaction of an information transmission process according to an embodiment of this disclosure;

[0047] FIG. 8 is a schematic block diagram of a communication apparatus according to an embodiment of this disclosure;

[0048] FIG. 9 is another schematic block diagram of a communication apparatus according to an embodiment of this disclosure; and

[0049] FIG. 10 is a schematic block diagram of an example device according to an

embodiment of this disclosure.

DESCRIPTION OF EMBODIMENTS

[0050] The following describes embodiments of this disclosure in detail with reference to the accompanying drawings. Although some embodiments of this disclosure are shown in the accompanying drawings, it should be understood that this disclosure may be implemented in various forms, and should not be construed as being limited to the embodiments described herein. On the contrary, these embodiments are provided so that this disclosure will be thoroughly and completely understood. It should be understood that the accompanying drawings and embodiments of this disclosure are merely used as examples, but are not intended to limit the protection scope of this disclosure.

[0051] In descriptions of embodiments of this disclosure, the term "include" and similar terms thereof should be understood as open inclusion, that is, "include but are not limited to". The term "based" should be understood as "at least partially based". The terms "one embodiment" or "the embodiment" should be understood as "at least one embodiment". The terms "first", "second", and the like may indicate different or same objects. Other explicit and implicit definitions may also be included below.

[0052] In descriptions of this disclosure, unless otherwise specified, "/" means "or". For example, A/B may represent A or B. A term "and/or" in this specification describes only an association relationship between associated objects and indicates that there may be three relationships. For example, A and/or B may represent the following three cases: Only A exists, both A and B exist, and only B exists. In addition, "at least one" means one or more, and "a plurality of" means two or more. "At least one of the following items (pieces)" or a similar expression thereof refers to any combination of these items, including any combination of singular items (pieces) or plural items (pieces). For example, at least one item (piece) of a, b, or c may indicate a, b, c, a and b, a and c, b and c, or a, b, and c, where a, b, and c may be singular or plural.

[0053] In the description of this disclosure, the terms such as "first" and "second" do not limit a quantity and an execution sequence, and the terms such as "first" and "second" do not indicate a definite difference.

[0054] In this disclosure, the terms such as "example" or "for example" are used to represent giving an example, an illustration, or descriptions. Any embodiment or design scheme described by using "example", "in an example", or "for example" in this disclosure shall not be construed as being more preferred or having more advantages than another embodiment or design scheme. Exactly, use of the word such as "example", "in an example", or "for example" is intended to

present a related concept in a specific manner.

[0055] It should be understood that, in this disclosure, "when" and "if" mean that an apparatus performs corresponding processing in an objective situation, and are not intended to limit time. The terms do not mean that the apparatus is required to have a determining action during implementation, and do not mean any other limitation.

[0056] In this disclosure, an element represented in a singular form is intended to represent "one or more", but does not represent "one and only one", unless otherwise specified.

[0057] It should be understood that, in embodiments of this disclosure, "B corresponding to A" indicates that B is associated with A, and B may be determined based on A. However, it should be further understood that, determining B based on A does not mean that B is determined only based on A, and B may also be determined based on A and/or other information.

[0058] In this disclosure, unless otherwise specified, for same or similar parts in the embodiments or implementations, refer to each other. In embodiments of this disclosure and the implementations/implementation methods in embodiments, unless otherwise specified or a logical conflict occurs, terms and/or descriptions are consistent and may be mutually referenced between different embodiments and between the implementations/implementation methods in embodiments. Technical features in the different embodiments and the implementations/implementation methods in embodiments may be combined to form a new embodiment, implementation, or implementation method based on an internal logical relationship thereof. The following implementations of this disclosure are not intended to limit the protection scope of this disclosure.

[0059] In the context of this disclosure, the term "wireless communication system" may be, for example, a wide area network system or a wireless local area network (Wireless Local Area Network, WLAN) system. The wireless communication system may support a plurality of WLAN communication protocols, for example, the 802.11ac/802.11ax/802.11be in the Institute of Electrical and Electronics Engineers (Institute of Electrical and Electronics Engineers, IEEE) 802.11 series protocols, or any protocol in future IEEE 802.11 series. For ease of description, embodiments of this application use the WLAN as an example for description. A WLAN may include a plurality of basic service sets (Basic Service Set, BSS). A BSS may have a basic service set identifier (BSS identifier, BSSID). A node of the BSS includes an access point station and a non-access point station (Non Access Point Station, Non-AP STA).

[0060] The term "access point (Access Point, AP)" may also be referred to as the access point station. The AP is an apparatus having a wireless transceiver function, and may provide a service for the station. The AP may also be referred to as a wireless access point, a hotspot, or the like.

The AP is an access point used by a mobile user to access a wired network, and is mainly deployed

in a home, inside a building, and inside a campus, with a typical coverage radius of tens of meters to hundreds of meters. Certainly, the AP may alternatively be deployed outdoors. The AP is equivalent to a bridge connecting a wired network and a wireless network. Main functions of the AP are to connect STAs together and then connect the wireless network to the wired network.

Optionally, the AP may be a terminal device or a network device with a wireless fidelity (Wireless Fidelity, Wi-Fi) chip. For example, the AP may be a communication server, a router, a switch, or a bridge. Optionally, the AP may be a device that supports the 802.11 standard in the current network system or the future network system.

[0061] The term "station (STA)" may be an apparatus having a wireless transceiver function, and may access a wireless local area network based on an access point. The STA may be a wireless communication chip, a wireless sensor, or a wireless communication terminal. For example, the STA may also be referred to as a system, a subscriber unit, an access terminal, a mobile station, a remote station, a remote terminal, a mobile device, a user terminal, a terminal, a wireless communication device, a user agent, a user apparatus, or user equipment (user equipment, UE).

The STA may be a wireless communication chip, a wireless sensor, or a wireless communication terminal. For example, the STA is a mobile phone, a tablet computer, a set-top box, a smart television set, a smart wearable device, a vehicle-mounted communication device, a computer that supports a Wi-Fi communication function, and the like. Optionally, the STA may be a device that supports the 802.11 standard in the current network system or a future network system.

[0062] The term "multiple input multiple output (Multiple Input Multiple Output, MIMO) technology" is a technology that can use a plurality of antennas to generate additional spatial degree of freedom, to multiply a system throughput and effectively improve a rate of a communication system. In addition, a transmit end may send data to a plurality of users over a plurality of spatial streams, to implement concurrent transmission of multi-user (Multiple-User, MU) data and improve data transmission concurrency, which may also be referred to as MU-MIMO.

[0063] 802.11 standards of a WLAN system are evolving from the 802.11a/b/g, to the 802.11n, 802.11ac, 802.11ax, and 802.11be. Only single user single input single output (Single User Single Input Single Output, SU-SISO) is supported in standards earlier than the 802.11n. Single user multiple input multiple output (Single User Multiple Input Multiple Output, SU-MIMO) is supported since the 802.11n. In addition, the MU-MIMO is supported since the 802.11ac and 802.11ax. Before 802.11ax, the 802.11 standard supports orthogonal frequency division multiplexing (Orthogonal Frequency Division Multiplexing, OFDM) transmission. Since 802.11ax, the orthogonal frequency division multiple access (Orthogonal Frequency Division Multiple Access, OFDMA) technology is introduced. The entire bandwidth can be divided into

multiple resource units (Resource Unit, RU). The MU-MIMO and OFDMA are supported in the 802.11be that is currently under research, where an extremely high throughput multi-user physical layer protocol data unit (Extremely High Throughput Multi-User Physical Protocol Data Unit, EHT MU PPDU) is defined.

5 **[0064]** With evolution of the WLAN 802.11, a transmission bandwidth allowed by the WLAN 802.11 is also gradually changed. A transmission bandwidth allowed by the 802.11a/g standard is 20 MHz, a transmission bandwidth allowed by the 802.11n standard is 20 MHz or 40 MHz, a transmission bandwidth allowed by the 802.11ax standard is 20 MHz, 40 MHz, 80 MHz, or 160 MHz, and a bandwidth supported by the 802.11be standard is expanded to 320 MHz. In this case,
10 a peak throughput can be significantly improved, and a transmission rate can be further improved.

[0065] In a current WLAN standard, resource allocation is performed on resource units (Resource Unit, RU). A quantity of subcarriers (tones or subcarriers) included in an entire bandwidth (any one of 20 MHz, 40 MHz, 80 MHz, 160 MHz, and 320 MHz) is fixed. For example, in 20 MHz, there are 256 subcarriers in total. All subcarriers in the entire bandwidth may be
15 numbered sequentially. For example, from a low frequency to a high frequency, each subcarrier has a corresponding index (index). The entire bandwidth may be divided into a low-frequency band and a high-frequency band. The low-frequency band and the high-frequency band are relative to a central location of the entire bandwidth. An index of a subcarrier at the central location is 0. Starting from the central location, an index of a subcarrier in a high-frequency direction is a
20 positive number and gradually increases, and an index of a subcarrier in a low-frequency direction is a negative number and an absolute value gradually increases. For example, a subcarrier range corresponding to 256 subcarriers within 20 MHz is $[-128, 127]$, and a subcarrier range (subcarrier range) corresponding to 512 subcarriers within 40 MHz is $[-256, 255]$.

[0066] RUs of different sizes may be designed for different bandwidths. RUs of different sizes
25 mean that the RUs include different quantities of subcarriers. RUs supported by the WLAN may include a 26-tone RU, a 52-tone RU, a 106-tone RU, a 242-tone RU, a 484-tone RU, and a 996-tone RU in ascending order. In addition, the WLAN may further support a combined multiple resource unit (multiple RU, MRU). For example, a 52-tone RU and a 26-tone RU form a $(52 + 26)$ -tone MRU, a 106-tone RU and a 26-tone RU form a $(106 + 26)$ -tone MRU, a 996-tone RU
30 and a 484-tone RU form a $(996 + 484)$ -tone MRU, and two 996-tone RUs and a 484-tone RU form a $(2 \times 996 + 484)$ -tone MRU, three 996-tone RUs form a 3×996 -tone MRU, and three 996-tone RUs and one 484-tone RU form a $(3 \times 996 + 484)$ -tone RU.

[0067] Each RU includes data subcarriers and pilot subcarriers. The data subcarrier is used to carry data information, and the pilot subcarrier is used to estimate a phase offset and/or a frequency
35 offset. Specifically, the 26-tone RU includes 24 data subcarriers and two pilot subcarriers, the 52-

tone RU includes 48 data subcarriers and four pilot subcarriers, the 106-tone RU includes 102 data subcarriers and four pilot subcarriers, the 242-tone RU includes 234 data subcarriers and eight pilot subcarriers, the 484-tone RU includes 468 data subcarriers and 16 pilot subcarriers, and the 996-tone RU includes 980 data subcarriers and 16 pilot subcarriers.

5 **[0068]** In addition, in addition to the RU, the entire bandwidth may further include at least one of a guard (guard) subcarrier, a null subcarrier, and a direct current (direct current, DC) subcarrier. The following describes RU distribution in different bandwidths with reference to FIG. 1 to FIG. 3.

10 **[0069]** FIG. 1 is a schematic diagram of RU distribution 100 when a bandwidth is 20 MHz. In FIG. 1, from left to right in a horizontal direction may be understood as from a low frequency to a high frequency. There are several guard subcarriers at a low-frequency edge (edge) and a high-frequency edge. For example, there are six guard subcarriers at a low-frequency edge, and there are five guard subcarriers at a high-frequency edge. As shown in FIG. 1, the 20 MHz bandwidth may include one 242-tone RU, two 106-tone RUs, four 52-tone RUs, or nine 26-tone RUs.

15 **[0070]** FIG. 2 is a schematic diagram of RU distribution 200 when a bandwidth is 40 MHz. In FIG. 2, there are 12 guard subcarriers at a low-frequency edge, and there are 11 guard subcarriers at a high-frequency edge. As shown in FIG. 2, the 40 MHz bandwidth may include one 484-tone RU, two 242-tone RUs, four 106-tone RUs, eight 52-tone RUs, or 18 26-tone RUs.

20 **[0071]** FIG. 3 is a schematic diagram of RU distribution 300 when a bandwidth is 80 MHz. In FIG. 3, there are 12 guard subcarriers at a low-frequency edge, and there are 11 guard subcarriers at a high-frequency edge. As shown in FIG. 3, the 80 MHz bandwidth may include one 996-tone RU, two 484-tone RUs, four 242-tone RUs, eight 106-tone RUs, 16 52-tone RUs, or 36 26-tone RUs.

25 **[0072]** RU distribution when a bandwidth is 160 MHz may be understood as two replications of 80 MHz RU distribution. To be specific, the 160 MHz bandwidth may include two 996-tone RUs or include various combinations of 26-tone RUs, 52-tone RUs, 106-tone RUs, 242-tone RUs, 484-tone RUs, and 996-tone RUs. RU distribution when a bandwidth is 320 MHz may be understood as four replications of 80 MHz RU distribution. To be specific, the 320 MHz bandwidth may include four 996-tone RUs or include various combinations of 26-tone RUs, 52-tone RUs, 106-tone RUs, 242-tone RUs, 484-tone RUs, and 996-tone RUs. In view of a limitation of space, details are not described herein again.

30 **[0073]** In addition, a plurality of RUs of a same size in a bandwidth may be sequentially numbered from a low frequency to a high frequency. For example, the 40 MHz bandwidth may include eight 52-tone RUs. Therefore, from a low frequency to a high frequency, for example, in
35 a direction from left to right in FIG. 2, the 52-tone RUs may be sequentially numbered as a 52-

tone RU 1, a 52-tone RU 2, ..., and a 52-tone RU 8.

[0074] It should be understood that the foregoing descriptions of RU distribution with reference to FIG. 1 to FIG. 3 are merely examples. For a subcarrier range corresponding to each RU, refer to related records and tables in the 802.11. Details are not described herein again.

5 **[0075]** In the 802.11ax and the 802.11be, uplink multi-user transmission is supported. Transmission between one AP and a plurality of STAs is used as an example. FIG. 4 is a schematic diagram of multi-user transmission 400. The AP sends a trigger frame, to trigger transmission of the plurality of STAs. A frame format of the trigger frame may be shown in FIG. 5.

[0076] As shown in FIG. 4, after receiving the trigger frame, each STA may obtain resource allocation information corresponding to an identifier of the STA. The resource allocation information may indicate an RU that can be used by the corresponding STA. In this way, each STA may send, after a short interframe space (short interframe space, SIFS), an uplink data frame on an allocated RU by using a trigger-based physical layer protocol data unit (trigger based physical layer protocol data unit, TB PPDU). In addition, after the SIFS, each STA may receive a block acknowledgment (block acknowledgment, BA) frame sent by the AP.

15 **[0077]** FIG. 5 is a schematic diagram of the frame format 500 of the trigger frame sent by the AP. FIG. 5 shows the frame format 500 of the trigger frame defined in the 802.11be. The trigger frame includes the following fields: a frame control (Frame Control) field 501, a duration (Duration) field 502, a receiver address (Receiver Address, RA) field 503, a transmitter address (Transmitter Address, TA) field 504, a common information (Common Info) field 505, a user information list (User Info List) field 506, a padding (Padding) field 507, and a frame check sequence (Frame Check Sequence, FCS) field 508.

[0078] The common information field 505 includes common information that needs to be read by all STAs (the STAs herein include at least one of an HE STA and an EHT STA), where the EHT STA refers to a station that supports the EHT protocol, and is also compatible with and supports the HE protocol and previous protocols. The common information field 505 includes at least an uplink bandwidth (UL BW) subfield 5051 that is used together with an uplink bandwidth extension subfield (UL BW Extension subfield) in a special user information field to indicate a total bandwidth of uplink transmission.

25 **[0079]** The user information list field 506 includes information for each user. As shown in FIG. 5, the user information list field 506 includes a user information field 1 506-1 and a user information field 2 506-2. Each user information field 506 may include an RU allocation subfield 516 and a primary-secondary 160 (PS160) subfield 526. The RU allocation subfield 516 indicates a location of a specific resource unit allocated to a corresponding STA. A mapping relationship
35 between B0 in the RU allocation subfield 516, B7–B1 in the RU allocation subfield 516, and the

PS160 subfield 526 is shown in the following Table 1.

[0080] The bandwidth (Bandwidth) in Table 1 is determined by both the UL BW subfield and the UL BW extension subfield, and N may be obtained according to an equation $N = 2 \times X1 + X0$. For values of X1 and X0, refer to the following Table 2. Table 2 shows conversion from logical parameters PS160 and B0 to physical parameters X1 and X0.

Table 1

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
0–3: (indicating 80 MHz where an RU is located)		0–8	20, 40, 80, 160, or 320	26	RU1 to RU9, respectively (separately/sequentially/in sequence)	$37 \times N +$ RU index
		9–17	40, 80, 160, or 320		RU10 to RU18, respectively	
		18	80, 160, or 320		Reserved (reserved)	
		19–36	80, 160, or 320		RU20 to RU37 respectively	
		37–40	20, 40, 80, 160, or 320	52	RU1 to RU4, respectively	$16 \times N +$ RU index
		41–44	40, 80, 160, or 320		RU5 to RU8, respectively	
		45–52	80, 160, or		RU9 to	

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
			320		RU16, respectively	
		53, 54	20, 40, 80, 160, or 320	106	RU1 and RU2, respectively	$8 \times N +$ RU index
		55, 56	40, 80, 160, or 320		RU3 and RU4, respectively	
		57–60	80, 160, or 320		RU5 to RU8, respectively	
		61	20, 40, 80, 160, or 320	242	RU1	$4 \times N +$ RU index
		62	40, 80, 160, or 320		RU2	
		63, 64	80, 160, or 320		RU3 and RU4, respectively	
		65	40, 80, 160, or 320	484	RU1	$2 \times N +$ RU index
		66	80, 160, or 320		RU2	
		67	80, 160, or 320	996	RU1	$N +$ RU index
0–1: (indicating	0	68	Reserved (reserved)			Reserved (reserved)

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
160 MHz where an RU is located)	1		160 or 320	2 × 996	RU1	X1 + RU index
0	0	69	Reserved (reserved)			Reserved (reserved)
0	1					
1	0					
1	1		320	4 × 996	RU1	RU1
0–3: indicating 80 MHz where an MRU is located		70–72	20, 40, 80, 160, or 320	52 + 26	MRU1 to MRU3, respectively	12 × N + MRU index
		73–75	40, 80, 160, or 320	52 + 26	MRU4 to MRU6, respectively	
		76–81	80, 160, or 320	52 + 26	MRU7 to MRU12, respectively	
		82, 83	20, 40, 80, 160, or 320	106 + 26	MRU1 and MRU2, respectively	8 × N + MRU index
		84, 85	40, 80, 160, or 320	106 + 26	MRU3 and MRU4, respectively	
		86–89	80, 160, or 320	106 + 26	MRU5 to MRU8,	

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
					respectively	
		90–93	80, 160, or 320	484 + 242	MRU1 to MRU4, respectively	$4 \times N + \text{MRU index}$
0–1: 160 MHz where an MRU is located	0	94, 95	160 or 320	996 + 484	MRU1 and MRU2, respectively	$4 \times X1 + \text{MRU index}$
	1				MRU3 and MRU4, respectively	
0–1: 160 MHz where an MRU is located	0	96–99	160 or 320	996 + 484 + 242	MRU1 to MRU4, respectively	$8 \times X1 + \text{MRU index}$
	1				MRU5 to MRU8, respectively	
0	0	100–103	320	$2 \times 996 + 484$	MRU1 to MRU4, respectively	MRU index
0	1				MRU5 and MRU6, respectively	
1	0				MRU7 and MRU8, respectively	

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
1	1				MRU9 to MRU12, respectively	
0	0	104	320	3×996	MRU1	MRU index
0	1				MRU2	
1	0				MRU3	
1	1				MRU4	
0	0	105, 106	320	$3 \times 996 + 484$	MRU1 and MRU2, respectively	MRU index
0	1				MRU3 and MRU4, respectively	
1	0				MRU5 and MRU6, respectively	
1	1				MRU7 and MRU8, respectively	
Any	Any	107–127	Any (any)	Reserved	Reserved	Reserved
Note: In a primary 160 MHz, if B0 of the RU allocation subfield is set to 0, it indicates that the RU/MRU allocation is applied to a primary 80 MHz, and if B0 of the RU allocation subfield is set to 1, it indicates that the RU/MRU allocation is applied to a secondary 80 MHz. In a secondary 160 MHz, if B0 of the RU allocation subfield is set to 0, it indicates that the RU/MRU allocation is applied to low-frequency 80 MHz, and if B0 of the RU/MRU allocation						

PS160 subfield (PS160 subfield)	B0 of the RU allocation subfield (B0 of the resource unit allocation subfield)	B7–B1 of the RU allocation subfield (B7–B1 of the resource unit allocation subfield)	Bandwidth (MHz) (Bandwidth)	RU/MRU size (RU/MRU size)	RU/MRU index (RU/MRU index)	PHY RU/MRU index (physical RU/MRU index)
is set to 1, it indicates that the RU/MRU allocation is applied to high frequency 80 MHz.						

Table 2

Bandwidth (MHz)	Logical input			Physical output		
	Frequency band configuration	PS160	B0	X0	X1	N
20/40/80	[P80]	0	0	0	0	0
160	[P80 S80]	0	0	0	0	0
		0	1	1	0	1
	[S80 P80]	0	0	1	0	1
		0	1	0	0	0
320	[P80 S80 S160]	0	0	0	0	0
		0	1	1	0	1
		1	0	0	1	2
		1	1	1	1	3
	[S80 P80 S160]	0	0	1	0	1
		0	1	0	0	0
		1	0	0	1	2
		1	1	1	1	3
	[S160 P80 S80]	0	0	0	1	2
		0	1	1	1	3
		1	0	0	0	0
		1	1	1	0	1
	[S160 S80 P80]	0	0	1	1	3

Bandwidth (MHz)	Logical input			Physical output		
	Frequency band configuration	PS160	B0	X0	X1	N
		0	1	0	1	2
		1	0	0	0	0
		1	1	1	0	1

[0081] It should be understood that in Table 2, P80 represents a primary 80 MHz channel, S80 represents a secondary 80 MHz channel, and S160 represents a secondary 160 MHz channel. The "frequency band configuration" column indicates a sequence of P80, S80, and S160 in absolute frequencies. A sequence from left to right indicates a sequence from a low frequency to a high frequency. For example, [P80 S80] indicates that the primary 80 MHz channel is a first 80 MHz channel in ascending order of frequencies, and the secondary 80 MHz channel is a second 80 MHz channel in ascending order of frequencies; or in other words, [P80 S80] indicates that the primary 80 MHz channel is a low 80 MHz channel, and the secondary 80 MHz channel is a high 80 MHz channel. For another example, [S80 P80 S160] indicates that the secondary 80 MHz channel is a low 80 MHz channel of a low 160 MHz channel, the primary 80 MHz channel is a high 80 MHz channel of the low 160 MHz channel, and the secondary 160 MHz channel is a high 160 MHz channel.

[0082] In this way, in a multi-user transmission scenario shown in FIG. 4, each STA may determine, based on a corresponding field in a received trigger frame, an RU allocated to each STA to transmit a data frame.

[0083] However, in a low power indoor (Low Power Indoor, LPI) communication scenario, both a maximum transmit power and a maximum power spectral density of a STA are strictly limited. The maximum power spectral density refers to a maximum transmit power of 1 MHz, or the maximum power spectral density is limited in a form in which a transmit power of 1 MHz does not exceed x dBm ($\text{dBm} = 10 \lg(\text{mW})$, $\lg$ represents a logarithm to base 10, and mW represents milliwatt). A minimum granularity of the maximum power spectral density is 1 MHz. As described above, the 20 MHz bandwidth includes 256 subcarriers. In other words, 1 MHz includes 12.8 (approximately 13) subcarriers. In a sending process, an average power of each subcarrier is the same. For any 13 continuous subcarriers, assuming that a maximum value of a quantity of subcarriers carrying a signal is n , the average power of each subcarrier is approximately $(10^{(x/10)})/n$ mW, that is, $10 \lg((10^{(x/10)})/n)$ dBm.

[0084] For example, due to a limitation of a regulation on a 6 GHz spectrum released by the Federal Communications Commission of the United States, the maximum transmit power of each

STA is 24 dBm, and the maximum power spectral density is -1 dBm/MHz. In this way, the transmit power of the STA can reach 24 dBm only when the bandwidth reaches 320 MHz. However, when the bandwidth is less than 320 MHz, although the transmit power of the STA does not exceed 24 dBm, the STA can only use a power less than the transmit power corresponding to the bandwidth due to a limitation of the maximum power spectral density. For example, due to a limitation of a regulation on a 6 GHz spectrum released by Europe, the maximum transmit power of each STA is 23 dBm, and the maximum power spectral density is 10 dBm/MHz. In this case, when the bandwidth is 20 MHz, the transmit power is mainly limited by the maximum power spectral density, and when the bandwidth exceeds 20 MHz, the transmit power is mainly limited by the maximum transmit power.

[0085] It should be noted that all the RUs mentioned above are continuous RUs. It should be understood that the continuous RU is an RU including a plurality of continuous subcarriers; or the continuous RU is an RU including two continuous subcarrier groups, where a plurality of subcarriers included in each continuous subcarrier group are continuous, and the two continuous subcarrier groups are spaced by only a guard subcarrier, a null subcarrier, or a direct current subcarrier; or all subcarriers on a bandwidth between a lowest-frequency subcarrier of the continuous RU and a highest-frequency subcarrier of the continuous RU belong to the continuous RU. Certainly, the continuous RU may also have another name, and the name of the continuous RU is not limited herein. In the LPI communication scenario, the maximum transmit power and the maximum power spectral density are limited. Compared with the maximum power, the maximum power spectral density is more strictly limited, and the allowed maximum transmit power is generally more limited by the power spectral density. Due to a limitation of the maximum power spectral density, the transmit power of a single continuous RU is limited, and consequently transmission efficiency is low.

[0086] In view of this, this disclosure provides a design solution of a distributed resource unit, so that transmission can be performed at a large transmit power, thereby improving transmission efficiency. In other words, if the transmit power of 1 MHz is not changed, that is, the power spectral density is not changed, a distributed resource unit, or referred to as a distributed RU technology, is proposed to increase the transmit power.

[0087] In this embodiment of this disclosure, the distributed resource unit (Distributed Resource Unit, DRU) is also referred to as a discrete RU, and is relative to the foregoing continuous RU.

[0088] The DRU in this embodiment of this disclosure includes a plurality of subcarriers discrete in frequency domain. Some or all of the plurality of discrete subcarriers may be discrete.

In other words, the plurality of discrete subcarriers may include some subcarriers continuous in

frequency, and some subcarriers discontinuous in frequency. Alternatively, none of the plurality of discrete subcarriers is continuous in frequency. It should be understood that the "discrete RU", the "distributed RU", and the "DRU" in this specification may be used interchangeably. It should be further understood that the discrete RU/distributed RU/DRU mentioned in this specification is an RU with subcarriers discrete in frequency domain. In other words, an RU with this characteristic is referred to as a discrete RU/distributed RU/DRU in this specification. However, in practice, an RU with this characteristic may have another name. This is not limited in this disclosure.

[0089] The following describes in detail technical solutions provided in this disclosure with reference to more accompanying drawings.

[0090] FIG. 6 is a schematic diagram of a communication system 600 in which an embodiment of this disclosure may be implemented. FIG. 6 shows two APs: an AP 601 and an AP 602. FIG. 6 further shows three user stations: a STA 621, a STA 622, and a STA 623. Wireless communication may be performed between the APs, between the AP and the STA, and between the STAs according to various standards. This embodiment of this disclosure may be applied to the communication between the APs, the communication between the STAs, and the communication between the AP and the STA, for example, as shown in FIG. 6, communication between the AP 601 and the AP 602, communication between the STA 622 and the STA 623, communication between the AP 601 and the STA 621, or communication between the AP 601 and the STA 623. It should be noted that FIG. 6 is merely an example. For example, in some embodiments, the AP 602 may also communicate with at least one of the STA 621, the STA 622, and the STA 623. For example, in some embodiments, the STA 621 may also communicate with the STA 622 and/or the STA 623.

[0091] For ease of description, the AP 601 and the AP 602 are collectively referred to as an AP 60 below, and the STA 621, the STA 622, and the STA 623 are collectively referred to as a STA 62 below.

[0092] It may be understood that both the AP 60 and the STA 62 shown in FIG. 6 support the 802.11be protocol, may also support another WLAN communication protocol (such as 802.11ax and 802.11ac protocols), and may further support a newly-developed protocol (such as a next-generation protocol) after the 802.11be. Correspondingly, the method provided in this embodiment of this disclosure is applicable to the 802.11be protocol, and may also be applicable to a next-generation protocol of the 802.11be.

[0093] It should be further understood that FIG. 6 is only a schematic diagram. The system 600 may further include another network device or terminal device, for example, may further include a wireless relay device and a wireless backhaul device. In addition, quantities of APs 60 and STAs 62 included in the system 600 are not limited in this embodiment of this disclosure.

[0094] FIG. 7 is a diagram of signaling interaction of an information transmission process 700

according to an embodiment of this disclosure. A first device 701 and a second device 702 are designed in the process 700.

[0095] It may be understood that in some embodiments, the first device 701 may be the STA 62 in FIG. 6, and the second device 702 may be the AP 60 in FIG. 6. In some other embodiments, the first device 701 may be the AP 60 in FIG. 6, and the second device 702 may be the STA 62 in FIG. 6. In some other embodiments, the first device 701 may be one STA 62 in FIG. 6, and the second device 702 may be another STA 62 in FIG. 6. In some other embodiments, the first device 701 may be one AP 60 (for example, the AP 601) in FIG. 6, and the second device 702 may be the other AP 60 (for example, the AP 602) in FIG. 6. It may be understood that the communication process shown in FIG. 7 is only an example rather than a limitation. In this embodiment of this disclosure, interaction signaling that is not shown in FIG. 7 may be included, or some signaling shown in FIG. 7 is omitted.

[0096] In the process 700, the second device 702 sends 710 a trigger-based frame.

[0097] Further or optionally, the second device 702 may generate the trigger-based frame and then send the frame.

[0098] In some embodiments, the trigger-based frame may be a trigger frame. Correspondingly, the second device 702 may generate the trigger frame. The trigger frame may have a frame format shown in FIG. 5. Further, the second device 702 may send the trigger frame to one or more first devices that are collectively referred to as the first device 701 in FIG. 7. Correspondingly, it may be understood that the first device 701 may receive the trigger-based frame from the second device 702.

[0099] The trigger frame may include an RU allocation field that carries DRU indication information. Further or optionally, the trigger frame may further include a bandwidth field that carries bandwidth indication information.

[00100] As shown in FIG. 5, if a user information list field 506 of the trigger frame includes subfields corresponding to the plurality of first devices 701, the trigger frame may be sent to the plurality of corresponding first devices 701. Correspondingly, the first device 701 may receive the trigger frame, and parse the subfield that is in the user information list field 506 and that corresponds to the first device 701.

[00101] It may be understood that the trigger-based frame may include a type of control frame, referred to as a trigger frame, for example, a trigger frame in the 802.11be, in a MAC frame specified in a standard, or may be another MAC frame with a trigger function. The another MAC frame with a trigger function may also be referred to as a MAC frame with a TRS function, and the function is generally implemented by using a TRS control subfield included in the MAC frame.

In some embodiments, the DRU indication information may be carried in an RU allocation field

in a user information field in the trigger frame, or may be carried in an RU allocation field in a TRS control subfield in another MAC frame.

[00102] Specifically, the DRU indication information may indicate a size and a location of the DRU allocated to the first device. The size of the DRU may be a quantity of subcarriers in the DRU, and the location of the DRU may be a location of a subcarrier in the DRU in frequency domain. For example, the DRU indication information may be carried in at least one of an RU allocation subfield, an uplink bandwidth subfield, an uplink bandwidth extension subfield, and a primary-secondary 160 subfield. Generally, a subcarrier index range (subcarrier index range) indicates a location of a subcarrier in the DRU in frequency domain. The size and the location of the DRU conform to a size and a location predefined in the standard. The DRU indication information may be carried in the RU allocation subfield. For example, the DRU indication information may be designed with reference to the foregoing Table 1. In some embodiments, "RU" in Table 1 may be replaced with "DRU" as an example of the DRU indication information in this embodiment of this disclosure. In this way, the DRU can be indicated without changing a format in an existing protocol, thereby reducing complexity.

[00103] For example, as shown in Table 1, the PS160 subfield may indicate a location of a DRU (locations of continuous RUs are indicated in Table 1). The "RU/MRU index" in Table 1 may be redefined as a predefined logical index of the DRU. For a set of the logical index of the DRU and indices of subcarriers included in the DRU, refer to any one of the following Table 5 to Table 50. For brevity, a table form of the DRU indication information obtained based on Table 1 is not described again.

[00104] Optionally, the trigger frame includes indication information for indicating whether the first device (for example, the STA) uses a DRU or a continuous RU. Based on the indication information, after receiving the trigger frame, the first device may learn of a type of a scheduled RU, that is, whether the RU is a DRU or a continuous RU, so that compatible use of the DRU and the continuous RU can be implemented without increasing signaling overheads. Optionally, the indication information may be carried in a subfield in a common information field (Common info Field) of the trigger frame. The subfield in the Common info Field may be a reserved field (a reserved field in the 802.11be) in the common information field of the trigger frame, or may be another field. This is not specifically limited herein. If the reserved field in the common information field of the trigger frame is used to carry the indication information, the reserved field is used, and is no longer considered as a reserved field. It should be understood that the trigger frame herein may also be replaced with the MAC frame with the TRS function, and the indication information for indicating whether the station uses a distributed RU or a continuous RU may be located in a reserved bit or a newly added subfield of the TRS subfield. Similarly, when the

reserved bit is used, the reserved bit is no longer considered as a reserved bit.

[00105] In the process 700, the first device 701 determines 720 one or more distributed resource blocks based on the DRU indication information.

[00106] Optionally, the one or more distributed resource blocks may be determined from a predetermined quantity of distributed resource blocks, where the predetermined quantity of distributed resource blocks is predefined or preconfigured. A specific value of the predetermined quantity is related to a bandwidth and a size of the distributed resource block. The predetermined quantity of distributed resource blocks may also be referred to as predefined or preconfigured distributed resource blocks.

[00107] Specifically, the predetermined quantity of distributed resource blocks may be shown in the following embodiments with reference to Table 5 to Table 50. In other words, the predetermined quantity of distributed resource blocks may be considered as a pre-designed DRU tone plan (tone plan) in different bandwidths (for example, 40 MHz, 80 MHz, 160 MHz, or 320 MHz).

[00108] In this embodiment of this disclosure, the one or more distributed resource blocks may also be referred to as transmission resource blocks. In some embodiments, the first device 701 may determine the transmission resource block based on the bandwidth indication information and the DRU indication information. The transmission resource block may be a DRU. In the detailed descriptions of the following embodiments, as shown in Table 1, the first device 701 may determine a size of the DRU and an identifier of the DRU. Further, based on the following embodiments with reference to Table 3 to Table 50, the first device 701 may determine an index of each subcarrier included in the transmission resource block.

[00109] As described above, the transmission resource block may include N subcarriers, including N1 data subcarriers and N2 pilot subcarriers, where $N = N1 + N2$. In addition, an absolute value of an index difference between any two data subcarriers of N3 data subcarriers is greater than or equal to 4, and $N3 < N1$. An absolute value of an index difference between any two pilot subcarriers of the N1 pilot subcarriers included in the transmission resource block is greater than 1.

[00110] For example, for a distribution characteristic satisfied by the subcarriers included in the transmission resource block, refer to the following specific embodiments described with reference to Table 5 to Table 50. For brevity, details are not described herein again.

[00111] In the process 700, the first device 701 sends a response to the trigger-based frame to the second device 702 on the one or more distributed resource blocks.

[00112] Correspondingly, it may be understood that the second device 702 may receive the response from the first device 701.

[00113] In some embodiments, the response may be in a format of a trigger-based physical layer protocol data unit (Trigger Based Physical Layer Protocol Data Unit, TB PPDU). It may be understood that the response may be in another format. Details are not described herein again.

[00114] In this way, a transmission resource block used by the first device 701 occupies a minimum quantity of subcarriers in each 1 MHz bandwidth (approximately 13 continuous subcarriers), so that the first device 701 can use a larger transmit power, thereby improving transmission efficiency.

[00115] It may be understood that if the trigger frame is sent to the plurality of first devices 701, each first device 701 may similarly perform 720 and 730, thereby implementing multi-user uplink transmission.

[00116] In this embodiment of this disclosure, the DRU is used for information transmission. Compared with a continuous RU including a same quantity of subcarriers, the DRU strides across a bandwidth that is from a low-frequency subcarrier start location to a high-frequency subcarrier end location in frequency domain and that is greater than a frequency domain bandwidth occupied by the continuous RU. In this way, at a same maximum power spectral density, a total transmit power of the DRU is greater than a total transmit power of the continuous RU. In other words, at a limited power spectral density, finite subcarriers (for example, 26 subcarriers included in a continuous 26-tone RU) are discrete on a larger bandwidth, and a transmit power can be increased. Therefore, compared with a continuous RU, the DRU can increase a transmit power of a single RU during data transmission, thereby increasing a transmit power on a single subcarrier, and increasing a signal-to-noise ratio (signal to noise ratio, SNR).

[00117] It may be understood that, for a first device (such as a STA), in one information transmission process, a transmit power of each subcarrier in a DRU allocated to the first device is the same. A carrier spacing of 78.125 kHz is used as an example. 1 MHz includes 12.8 (approximately 13) subcarriers. It is assumed that a transmit power of 1 MHz does not exceed p mW (namely, the maximum power spectral density). A maximum value of a quantity of subcarriers carrying a signal in any 13 continuous subcarriers determines an average power of each subcarrier, and further determines a transmit power of the signal. The transmit power of the signal is equal to a product of the average power of each subcarrier and the quantity of subcarriers. For example, assuming that a maximum of five subcarriers in any 13 continuous subcarriers (1 MHz) carry a signal, an average power of each subcarrier in the 1 MHz bandwidth is $(p/5)$ mW. Assuming that a maximum of two subcarriers in any 13 continuous subcarriers (1 MHz) carry a signal, an average power of each subcarrier in the 1 MHz bandwidth is $(p/2)$ mW. In other words, at a specific maximum power spectral density, a larger quantity of subcarriers carrying a signal in any 13 continuous subcarriers indicates a smaller average power on each subcarrier and a smaller total

transmit power. It may be learned that, it is assumed that a resource unit allocated to the first device is a discrete 26-tone RU, that is, a quantity of subcarriers carrying a signal is 26. If there are a maximum of two subcarriers carrying a signal in any 13 continuous subcarriers, a bandwidth occupied by the discrete 26-tone RU is $26/2 = 13$ MHz, and an average power of each subcarrier in the 1 MHz bandwidth is $(p/2)$ mW. In this case, a total transmit power of the discrete 26-tone RU may be calculated based on a total transmit power of subcarriers, specifically, $(p/2) \times 26$ mW, or may be calculated based on a bandwidth occupied by subcarriers, specifically, $13 \times p$ mW. If a resource unit allocated to the first device is a continuous 26-tone RU, because the continuous 26-tone RU includes 26 continuous subcarriers (two groups of 13 continuous subcarriers), that is, a bandwidth occupied by the continuous 26-tone RU is 2 MHz, an average power of each subcarrier in the 1 MHz bandwidth is $(p/13)$ mW. In this case, a total transmit power of the continuous 26-tone RU may be calculated based on a total transmit power of subcarriers, specifically, $(p/13) \times 26$ mW, or may be calculated based on a bandwidth occupied by subcarriers, specifically, $2 \times p$ mW. Through comparison, at a same maximum power spectrum density, the total transmit power of the discrete 26-tone RU is 6.5 times the total transmit power of the continuous 26-tone RU.

[00118] According to this embodiment of this disclosure, the design solution of the DRU tone plan (tone plan) is provided, and may be applied to uplink or downlink transmission. For example, the DRU is applied to uplink multi-user transmission. Different first devices (for example, STAs) may alternately send the DRU. At a specific bandwidth and a required power spectral density, a transmit power of each first device may be increased compared with a transmission manner in which a continuous RU is used. Further, a continuous RU signaling indication method may be reused, to reduce complexity.

[00119] In this embodiment of this disclosure, the DRU may have various sizes. The size of the DRU may indicate a quantity of subcarriers included in the DRU. The size of the DRU may be N, that is, the DRU includes N subcarriers, and may be specifically represented as an N-tone DRU. The DRU may include data subcarriers and pilot subcarriers. For example, the N-tone DRU may include N1 data subcarriers and N2 pilot subcarriers, and $N1 + N2 = N$. In some embodiments, N, N1, and N2 may satisfy a correspondence shown in Table 3. For example, $N = 26$, $N1 = 24$, and $N2 = 2$. It indicates a 26-tone DRU that may include 24 data subcarriers and two pilot subcarriers. Meanings of other rows in Table 3 are similar to this, and details are not described again.

Table 3

N	N1	N2
26	24	2

N	N1	N2
52	48	4
106	102	4
242	234	8
484	468	16
996	980	16

[00120] Specifically, in some embodiments, an absolute value of an index difference between every two data subcarriers of the N3 data subcarriers in the N1 data subcarriers of the DRU of any size is greater than or equal to 4. Specifically, if the N3 data subcarriers are sorted from a low frequency to a high frequency of indices, an absolute value of an index difference between any two adjacent subcarriers of the N3 data subcarriers is greater than or equal to 4, and N3 is less than or equal to N1. Optionally, a ratio of N3 to N1 may be greater than a preset ratio, for example, 78%. In some embodiments, a correspondence between N1 and N3 may be shown in the following Table 4.

Table 4

N1	N3	N4
24	24	
48	48	
102	96	
234	192	24
468	384	48
980	768	96

[00121] In some embodiments, when a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, N1 = 24, N2 = 2, and N3 = 24, or when a bandwidth is 80 MHz, 160 MHz, or 320 MHz, N1 = 48, N2 = 4, and N3 = 48, or when a bandwidth is 160 MHz or 320 MHz, N1 = 102, N2 = 4, and N3 = 96, or when a bandwidth is 320 MHz, N1 = 234, N2 = 8, and N3 = 192, the N3 data subcarriers satisfy: If the N3 data subcarriers are divided into N3/6 groups from a low frequency to a high frequency of indices, every six data subcarriers form one group, and an absolute value of an index difference between two adjacent data subcarriers in a same group is 18. In other words, for the N3 data subcarriers, if indices of the subcarriers are sorted in ascending order, every six data subcarriers may be considered as or regarded as one group, so that the N3 data subcarriers may be considered as or regarded as the N3/6 groups, and each group includes six data subcarriers. For

six data subcarriers in a same group, an absolute value of an index difference between every two adjacent data subcarriers is 18. In other words, a quantity of subcarriers between every two adjacent data subcarriers is 17.

[00122] In addition, for the $N/6$ groups from a low frequency to a high frequency, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups in the four groups at the lowest frequency may be sequentially 33, 43, and 33, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups in the four groups at the highest frequency may be sequentially 33, 43, and 33. In other words, in the $N/6$ groups, an absolute value of a subcarrier index difference between a first subcarrier in a second group and a last subcarrier in a first group is 33, an absolute value of a subcarrier index difference between a first subcarrier in a third group and a last subcarrier in the second group is 43, and an absolute value of a subcarrier index difference between a first subcarrier in a fourth group and a last subcarrier in the third group is 33. In the $N/6$ groups, an absolute value of a subcarrier index difference between a first subcarrier in an $(N/6 - 2)^{\text{th}}$ group and a last subcarrier in an $(N/6 - 3)^{\text{th}}$ group is 33, an absolute value of a subcarrier index difference between a first subcarrier in an $(N/6 - 1)^{\text{th}}$ group and a last subcarrier in the $(N/6 - 2)^{\text{th}}$ group is 43, and an absolute value of a subcarrier index difference between a first subcarrier in an $(N/6)^{\text{th}}$ group and a last subcarrier in the $(N/6 - 1)^{\text{th}}$ group is 33.

[00123] In this embodiment of this disclosure, an absolute value of a subcarrier index difference between two groups (for example, two adjacent groups) may be understood as a minimum absolute value of a difference between any subcarrier index in a second group and any subcarrier index in a first group in all subcarriers included in the two groups, or may be understood as a difference between a lowest index of all subcarriers in a second group and a highest index of all subcarriers in a first group. An index of each subcarrier in the first group is less than an index of any subcarrier in the second group. The first group in the two groups may be referred to as a lower-frequency group, and the second group in the two groups may be referred to as a higher-frequency group. In other words, an index of each subcarrier in the lower-frequency group is less than an index of any subcarrier in the higher-frequency group. However, it should be understood that whether a specific group is a lower-frequency group or a higher-frequency group depends on the two considered groups. For example, it is assumed that a group 1, a group 2, a group 3, and the like are included from a low frequency to a high frequency. In this case, when the two groups, namely, the group 1 and the group 2, are considered, the group 1 is a first group, and the group 2 is a second group. In other words, the group 1 is a lower-frequency group, and the group 2 is a higher-frequency group. When the two groups, namely, the group 2 and the group 3, are considered, the group 2 is a first group, and the group 3 is a second group. In other words, the group 2 is a lower-frequency group,

and the group 3 is a higher-frequency group. In the description of the following embodiments of this disclosure, a lower-frequency group and a higher-frequency group are relative. A term such as the lower-frequency group and the higher-frequency group is merely for ease of description, and should not be construed as a limitation on embodiments of this disclosure.

[00124] Further, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the N3/6 groups are alternately 33 and 43 in any one of the following cases (1) to (4): (1) a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, $N1 = 24$, $N2 = 2$, and $N3 = 24$; (2) a bandwidth is 80 MHz, $N1 = 48$, $N2 = 4$, and $N3 = 48$; (3) a bandwidth is 160 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$; or (4) a bandwidth is 320 MHz, $N1 = 234$, $N2 = 8$, and $N3 = 192$. In other words, for two adjacent groups, an absolute value of an index difference between a smallest subcarrier index in a higher-frequency group and a largest subcarrier index in a lower-frequency group is 33 or 43. Specifically, in ascending order of frequencies, an absolute value of an index difference between a first subcarrier in a second group and a last subcarrier in a first group is 33, an absolute value of an index difference between a first subcarrier in a third group and a last subcarrier in the second group is 43, an absolute value of an index difference between a first subcarrier in a fourth group and a last subcarrier in the third group is 33, and the rest may be deduced by analogy. In other words, a quantity of subcarriers between an odd-numbered group and a subsequent adjacent even-numbered group is 32, and a quantity of subcarriers between an even-numbered group and a subsequent adjacent odd-numbered group is 42.

[00125] Alternatively further, if a bandwidth is 160 MHz, $N1 = 48$, and $N3 = 48$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the N3/6 groups are sequentially 33, 43, 33, 555, 33, 43, and 33.

[00126] Alternatively further, if a bandwidth is 320 MHz, $N1 = 48$, and $N3 = 48$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the N3/6 groups are sequentially 33, 43, 33, 1579, 33, 43, and 33.

[00127] Alternatively further, if a bandwidth is 320 MHz, $N1 = 102$, and $N3 = 96$, absolute values of index differences between two most adjacent data subcarriers in two adjacent groups of the N3/6 groups are sequentially 33, 43, 33, 555, 33, 43, 33, 555, 33, 43, 33, 555, 33, 43, and 33.

[00128] In some embodiments, the N3 data subcarriers satisfy: If the N3 data subcarriers are divided into N3/12 groups from a low frequency to a high frequency of indices, every 12 data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 9, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 24 and 34 in any one of the following cases (1) to (4): (1) a bandwidth is 40 MHz, $N1 = 48$, $N2 = 4$, and $N3 = 48$; (2) a bandwidth is 80 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$; (3) a bandwidth is 160 MHz, $N1 = 234$,

$N2 = 8$, and $N3 = 192$; or (4) a bandwidth is 320 MHz, $N1 = 468$, $N2 = 16$, and $N3 = 384$.

[00129] In other words, for the $N3$ data subcarriers, indices of the subcarriers may be sorted in ascending order, and then every 12 data subcarriers may be considered as one group, so that the $N3$ data subcarriers may be considered as the $N3/12$ groups, and each group includes 12 data subcarriers. For 12 data subcarriers in a same group, an absolute value of an index difference between every two adjacent data subcarriers is 9. In other words, a quantity of subcarriers between every two adjacent data subcarriers is 8. For two adjacent groups, an absolute value of an index difference between a smallest index in a higher-frequency group and a largest index in a lower-frequency group is 24 or 34. Specifically, in ascending order of frequencies, an absolute value of an index difference between a first subcarrier in a second group and a last subcarrier in a first group is 24, an absolute value of an index difference between a first subcarrier in a third group and a last subcarrier in the second group is 34, an absolute value of an index difference between a first subcarrier in a fourth group and a last subcarrier in the third group is 24, and the rest may be deduced by analogy. In other words, a quantity of subcarriers between an odd-numbered group and a subsequent adjacent even-numbered group is 23, and a quantity of subcarriers between an even-numbered group and a subsequent adjacent odd-numbered group is 33.

[00130] In some embodiments, the $N3$ data subcarriers satisfy: If the $N3$ data subcarriers are divided into $N3/24$ groups from a low frequency to a high frequency of indices, every 24 data subcarriers form one group, absolute values of index differences between two adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 19 and 29 in any one of the following cases (1) to (4): (1) a bandwidth is 40 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$; (2) a bandwidth is 80 MHz, $N1 = 234$, $N2 = 8$, and $N3 = 192$; (3) a bandwidth is 160 MHz, $N1 = 468$, $N2 = 16$, and $N3 = 384$; or (4) a bandwidth is 320 MHz, $N1 = 980$, $N2 = 16$, and $N3 = 768$.

In other words, for the $N3$ data subcarriers, indices of the subcarriers may be sorted in ascending order, and then every 24 data subcarriers may be considered as one group, so that the $N3$ data subcarriers may be considered as the $N3/24$ groups, and each group includes 24 data subcarriers. For 24 data subcarriers in a same group, an absolute value of an index difference between every two adjacent data subcarriers is 5 or 4. In other words, a quantity of subcarriers between every two adjacent data subcarriers is 4 or 3. In other words, in the 24 data subcarriers in the same group, an absolute value of an index difference between a data subcarrier in an even-numbered location and a data subcarrier in a previous adjacent odd-numbered location is 5, and an absolute value of an index difference between a data subcarrier in an odd-numbered location and a data subcarrier in a previous adjacent even-numbered location is 4.

[00131] For two adjacent groups, an absolute value of an index difference between a smallest

index in a higher-frequency group and a largest index in a lower-frequency group is 19 or 29. Specifically, in ascending order of frequencies, an absolute value of an index difference between a first subcarrier in a second group and a last subcarrier in a first group is 19, an absolute value of an index difference between a first subcarrier in a third group and a last subcarrier in the second group is 29, an absolute value of an index difference between a first subcarrier in a fourth group and a last subcarrier in the third group is 19, and the rest may be deduced by analogy. In other words, a quantity of subcarriers between an odd-numbered group and a subsequent adjacent even-numbered group is 18, and a quantity of subcarriers between an even-numbered group and a subsequent adjacent odd-numbered group is 28.

[00132] For a DRU whose size is N , that is, an N -tone DRU, indices of $N/3$ data subcarriers included in the DRU are all negative values, or indices of $N/3$ data subcarriers are all positive values, or half ($N/6$) of indices of $N/3$ data subcarriers are positive values and half ($N/6$) of indices of the $N/3$ data subcarriers are negative values.

[00133] Specifically, M1 26-tone DRUs may be distributed on a bandwidth of 80 MHz, 160 MHz, or 320 MHz, where indices of $N/3$ ($N/3 = 24$) data subcarriers included in each of M1/2 26-tone DRUs are all negative values, and indices of $N/3$ ($N/3 = 24$) data subcarriers included in each of the other M1/2 26-tone DRUs are all positive values. It may be understood that when the bandwidth is 80 MHz, $M1 = 36$. When the bandwidth is 160 MHz, $M1 = 72$. When the bandwidth is 320 MHz, $M1 = 144$.

[00134] $N/3$ data subcarriers in each N -tone DRU include $N/6$ data subcarriers whose indices are negative and the other $N/6$ data subcarriers whose indices are positive in any one of the following cases (1) to (6): (1) a 26-tone DRU on a 40 MHz bandwidth; (2) a 52-tone DRU on a bandwidth of 40 MHz, 80 MHz, 160 MHz, or 320 MHz; (3) a 106-tone DRU on a bandwidth of 40 MHz, 80 MHz, 160 MHz, or 320 MHz; (4) a 242-tone DRU on a bandwidth of 80 MHz, 160 MHz, or 320 MHz; (5) a 484-tone DRU on a bandwidth of 160 MHz or 320 MHz; and (6) a 996-tone DRU on a bandwidth of 320 MHz.

[00135] In addition, when the size of the DRU is greater than or equal to 242, that is, $N \geq 242$, remaining subcarriers other than the $N/3$ data subcarriers in the N data subcarriers further include $N/6$ data subcarriers, and an absolute value of an index difference between every two data subcarriers of the $N/6$ data subcarriers is greater than or equal to 18. Specifically, if the $N/6$ data subcarriers are sorted from a low frequency to a high frequency of indices, an absolute value of an index difference between any two adjacent subcarriers of the $N/6$ data subcarriers is greater than or equal to 18. $N/6$ is less than $N/3$, and $N/3 + N/6 < N$. In some embodiments, correspondences between $N/6$ and N and between $N/6$ and $N/3$ may also be shown in the foregoing Table 4.

[00136] Further, if $N = 234$, $N/3 = 78$, and $N/6 = 24$, absolute values of index differences

between two most adjacent data subcarriers in two adjacent groups of $N_4/6$ groups are sequentially and alternately 33 and 43.

[00137] For a DRU whose size is 242, that is, a 242-tone DRU, indices of N_4 data subcarriers included in the DRU are all negative values, or indices of N_4 data subcarriers are all positive values.

5 **[00138]** Specifically, M_2 242-tone DRUs may be distributed on a bandwidth of 80 MHz, 160 MHz, or 320 MHz, where indices of N_4 ($N_4 = 24$) data subcarriers included in each of $M_2/2$ 242-tone DRUs are all negative values, and indices of N_4 ($N_4 = 24$) data subcarriers included in each of the other $M_4/2$ 242-tone DRUs are all positive values. It may be understood that when the bandwidth is 80 MHz, $M_2 = 4$. When the bandwidth is 160 MHz, $M_2 = 8$. When the bandwidth is
10 320 MHz, $M_2 = 16$.

[00139] For a DRU whose size is 484 or 996, that is, a 484-tone DRU or a 996-tone DRU, half ($N_4/2$) of indices of N_4 data subcarriers included in the DRU are positive values and half ($N_4/2$) are negative values.

[00140] Specifically, in a case of a 484-tone DRU on a bandwidth of 160 MHz or 320 MHz, or
15 a 996-tone DRU on a bandwidth of 320 MHz, N_4 data subcarriers in each N -tone DRU include $N_4/2$ data subcarriers whose indices are negative and the other $N_4/2$ data subcarriers whose indices are positive.

[00141] In some embodiments, a lowest-frequency index of a data subcarrier at a lowest frequency in the N_3 data subcarriers satisfies: (1) When the bandwidth is 40 MHz, the lowest-frequency index is $-a-128$; (2) when the bandwidth is 80 MHz, the lowest-frequency index is $-a-128-256$ (namely, $-a-384$); (3) when the bandwidth is 160 MHz, the lowest-frequency index is $-a-128-256-512$ (namely, $-a-896$); or (4) when the bandwidth is 320 MHz, the lowest-frequency index is $-a-128-256-512-1024$ (namely, $-a-1920$); and a is any positive integer from 110 to 122. For example, a may be 110, 113, 115, 117, or 122.

25 **[00142]** In this embodiment of this disclosure, an absolute value of an index difference between every two pilot subcarriers of N_2 pilot subcarriers in a same DRU is greater than 1. Specifically, for a DRU of a specific size, N_2 pilot subcarriers included in each of the DRU of the specific size are determined from remaining subcarriers of all subcarriers in the entire bandwidth other than guard subcarriers, direct current subcarriers, N_3 data subcarriers in each DRU, N_4 data subcarriers
30 (if any) in each DRU. In addition, in this determining manner, N_2 pilot subcarriers in a same DRU are fully discrete, thereby implementing maximum frequency domain diversity. In addition, it may be understood that, for a case in which $N_3 + N_4 < N_1$, $N_1 - N_3 - N_4$ data subcarriers are determined from remaining subcarriers other than the determined pilot subcarriers, so that the $N_1 - N_3 - N_4$ data subcarriers included in each of the DRU of the specific size are fully discrete.

35 **[00143]** The following separately describes DRUs of different sizes in the 40 MHz bandwidth,

the 80 MHz bandwidth, the 160 MHz bandwidth, and the 320 MHz bandwidth with reference to specific embodiments.

[00144] In this embodiment of this disclosure, a subcarrier may have a corresponding index. It should be noted that, in this embodiment of this disclosure, square brackets [s01, s02] may indicate a subcarrier index range, s01 indicates a subcarrier index with a smallest sequence number in the range, and s02 indicates a subcarrier index with a largest sequence number in the range. For example, $[-a, -a + 107]$ indicates 108 subcarriers whose subcarrier indices range from $-a$ to $-a + 107$. In another manner, in this embodiment of this disclosure, $[s1: \Delta: s2]$ may indicate a subcarrier index range, where s1 is a start subcarrier index, Δ is used as a step (which may also be understood as an absolute value of an index difference between two adjacent subcarriers), and s2 is a last subcarrier index in the subcarrier range, that is, $[s1: \Delta: s2]$ indicates that subcarrier indices are s1, $s1 + \Delta$, $s1 + 2 \times \Delta$, ..., and s2. For example, $[-a, -a + 107]$ may indicate $[-a: 1: -a + 107]$, that is, $-a$ is a start subcarrier index, 1 is a step, and $-a + 107$ is a last subcarrier index. In the following descriptions, the manner [s01, s02] or $[s1: \Delta: s2]$ still indicates a subcarrier index range. Details are not described again each time the manner appears.

[00145] In addition, for brevity of description, in the following descriptions, a subcarrier whose subcarrier index is a positive value is referred to as a "high-frequency subcarrier", and a subcarrier whose subcarrier index is a negative value is referred to as a "low-frequency subcarrier". However, a person skilled in the art may understand that the name is merely for ease of description, and should not be construed as a limitation on embodiments of this disclosure.

[00146] It should be noted that, in embodiments of this disclosure, an "index" represents a "subcarrier index", and a value range of the "index" depends on a bandwidth. For example, when the bandwidth is 40 MHz, the subcarrier index range is $[-256, 255]$. When the bandwidth is 80 MHz, the subcarrier index range is $[-512, 511]$. When the bandwidth is 160 MHz, the subcarrier index range is $[-1024, 1023]$. When the bandwidth is 320 MHz, the subcarrier index range is $[-2048, 2047]$. In this embodiment of this disclosure, an index difference between two subcarriers indicates a difference obtained by subtracting an index with a smaller value from an index with a larger value, so that the difference is a positive number. It may be understood that, as another expression, the index difference may alternatively be a negative number obtained by subtracting an index with a larger value from an index with a smaller value. For example, correspondingly "the index difference is greater than or equal to 4" should be understood as "an absolute value of the index difference is greater than or equal to 4". For brevity, the following embodiments of this specification are described by using an example in which "the index difference" indicates that "the absolute value of the index difference" is a positive number.

[00147] The following separately describes design solutions of DRUs of different sizes in a 40

MHz bandwidth, an 80 MHz bandwidth, a 160 MHz bandwidth, and a 320 MHz bandwidth with reference to specific embodiments.

[00148] It may be understood that, after receiving the trigger-based frame sent by the second device 702 (for example, the AP), the first device 701 (for example, the STA) may determine, based on the DRU indication information in the trigger-based frame, the DRU allocated to the first device 701. Specific subcarriers included in the DRU allocated to the first device 701 may be determined according to a tone plan of the distributed RU in the corresponding bandwidth. The tone plan of the distributed RU in the corresponding bandwidth herein is also a predefined distributed resource block. A plurality of embodiments of this disclosure provide tone plans of distributed RUs in different bandwidths. For details, refer to the following embodiments with reference to Table 5 to Table 50.

[00149] For a 40 MHz bandwidth:

[00150] The 40 MHz bandwidth includes 512 subcarriers in total, and the subcarrier index range is $[-256, 255]$. As shown in FIG. 2, the 40 MHz bandwidth may include 18 26-tone RUs.

[00151] In a tone plan solution of a DRU, the 40 MHz bandwidth includes 18 26-tone DRUs, and each 26-tone DRU includes 24 data subcarriers and two pilot subcarriers. For example, Table 5 shows 18 26-tone DRUs corresponding to the 40 MHz bandwidth, and shows indices of 24 data subcarriers and indices of two pilot subcarriers included in each 26-tone DRU, and a lowest-frequency index of a data subcarrier in a 26-tone DRU whose identifier is 1 is -243 .

Table 5

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$-243, -225, -207, -189, -171, -153, -120, -102, -84, -66, -48, -30, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226$	$-12, 121$
2	$-242, -224, -206, -188, -170, -152, -119, -101, -83, -65, -47, -29, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227$	$-11, 122$
3	$-241, -223, -205, -187, -169, -151, -118, -100, -82, -64, -46, -28, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228$	$-10, 123$
4	$-240, -222, -204, -186, -168, -150, -117, -99, -81, -63, -45, -27, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229$	$-9, 124$
5	$-239, -221, -203, -185, -167, -149, -116, -98, -80, -62, -44, -26, 17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230$	$-8, 125$

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
6	–238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231	–7, 126
7	–237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232	–6, 127
8	–236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233	–5, 128
9	–235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234	–4, 129
10	–234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235	–3, 130
11	–233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236	–128, 3
12	–232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237	–127, 4
13	–231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238	–126, 5
14	–230, –212, –194, –176, –158, –140, –107, –89, –71, –53, –35, –17, 26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239	–125, 6
15	–229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240	–124, 7
16	–228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241	–123, 8
17	–227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242	–122, 9
18	–226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243	–121, 10

[00152] Specifically, as shown in Table 5, each 26-tone DRU includes 24 data subcarriers, including 12 high-frequency subcarriers (whose subcarrier indices are positive values) and 12 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 24 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences

between adjacent data subcarriers in a same group are all 18 (or a quantity of subcarriers in the middle is 17), and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33. In other words, if 24 data subcarriers included in each 26-tone DRU are viewed in ascending order of subcarrier indices, quantities of subcarriers between two adjacent data subcarriers in every six data subcarriers in ascending order of frequencies are the same. Specifically, a quantity of subcarriers in the middle is 17.

[00153] In other words, it is assumed that indices of 24 data subcarriers included in each 26-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00154] It should be noted that, in this embodiment of this disclosure, an absolute value Δ of an index difference between two subcarriers may be equivalently described as a quantity of subcarriers between two subcarriers, that is, $\Delta - 1$. For brevity, the following mainly describes this embodiment by using the absolute value of the index difference. A person skilled in the art may obtain a description manner of the quantity of subcarriers between on this basis.

[00155] In addition, if 24 data subcarriers included in each 26-tone DRU are viewed in ascending order of subcarrier indices, every six data subcarriers of the 24 data subcarriers may be considered as one group, and therefore the 24 data subcarriers may be considered as four groups.

[00156] Using the 26-tone DRU whose identifier is 1 in Table 5 as an example, 24 data subcarriers included in the 26-tone DRU may be considered as the following four groups: (1) -243, -225, -207, -189, -171, -153; (2) -120, -102, -84, -66, -48, -30; (3) 13, 31, 49, 67, 85, 103; and (4) 136, 154, 172, 190, 208, 226. (1) and (2) are low-frequency groups, and (3) and (4) are high-frequency groups. An absolute value of an index difference between subcarriers of the two low-frequency groups (1) and (2) is a difference between -120 and -153, that is, 33. An absolute value of an index difference between subcarriers of the two high-frequency groups (3) and (4) is a difference between 136 and 103, that is, 33. An absolute value of a subcarrier index difference between the high-frequency group and the low-frequency group, namely, an absolute value of a subcarrier index difference between the high-frequency group (3) and the low-frequency group (2), is a difference between 13 and -30, that is, 43.

[00157] In addition, there is a fixed offset between indices of data subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 24 data subcarriers in a 26-tone DRU whose identifier is i ($i = 1, 2, \dots$, or 17) all plus 1, to obtain indices of 24 data subcarriers in a 26-tone DRU whose identifier is $i + 1$.

[00158] In Table 5, the identifier of the 26-tone DRU may be based on an index of a lowest-

frequency subcarrier included in the 26-tone DRU. In other words, an identifier of a 26-tone DRU having a data subcarrier with a minimum value index is 1. As shown in Table 5, in all data subcarriers in the "index of a data subcarrier" column, a minimum value index is -243. Therefore, an identifier of a 26-tone DRU in which the subcarrier is located is 1. In addition, a minimum value index other than that of the 26-tone DRU whose identifier is 1 is -242. Therefore, the identifier of the 26-tone DRU in which the subcarrier is located is 2.

[00159] It may be understood that although the lowest-frequency index shown in Table 5 is -243, the value is merely an example. For example, the value may be any integer from -250 to -238, for example, -250, -245, or -238.

[00160] As shown in Table 5, each 26-tone DRU further includes two pilot subcarriers, where one pilot subcarrier is a high-frequency subcarrier, and the other pilot subcarrier is a low-frequency subcarrier. In addition, for 26-tone DRUs whose identifiers are 1 to 10, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 133. For 26-tone DRUs whose identifiers are 11 to 18, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 131. In this way, pilot subcarriers can be fully discrete, thereby implementing frequency domain diversity.

[00161] Specifically, pilot subcarriers included in each 26-tone DRU are determined from remaining subcarriers other than all data subcarriers in the "index of a data subcarrier" column in Table 5 and DC subcarriers [-2, 2] and guard subcarriers [-256, -245] and [245, 255] in [-256, 255].

[00162] As shown in Table 5, for identifiers 1 to 10, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 11 to 18, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of two pilot subcarriers in a 26-tone DRU whose identifier is i ($i = 1, 2, \dots, \text{or } 9$) all plus 1, to obtain indices of two pilot subcarriers in a 26-tone DRU whose identifier is $i + 1$. For example, indices of two pilot subcarriers in a 26-tone DRU whose identifier is i ($i = 11, 12, \dots, \text{or } 17$) all plus 1, to obtain indices of two pilot subcarriers in a 26-tone DRU whose identifier is $i + 1$.

[00163] In this way, for a 40 MHz bandwidth, by using a design of a 26-tone DRU shown in Table 5, a spacing between pilot subcarriers is not less than 25% of a total quantity of subcarriers, thereby implementing frequency domain diversity. Compared with the continuous 26-tone RUs shown in FIG. 2, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00164] It may be understood that the pilot subcarriers shown in Table 5 are merely examples, and other pilot subcarriers may alternatively be used. For example, two pilot subcarriers in a 26-

tone DRU are both high-frequency subcarriers, and two pilot subcarriers in another 26-tone DRU are both low-frequency subcarriers. In different 26-tone DRUs, quantities of subcarriers between two pilot subcarriers may be different.

[00165] The foregoing describes a tone plan solution of the 26-tone DRU in the 40 MHz bandwidth with reference to Table 5. The solution is merely an example. A person skilled in the art may obtain another solution on this basis. For example, the lowest-frequency index is no longer -243 but another value. For example, an index of a pilot subcarrier is determined by using another solution. In addition, the tone plan of other DRUs described below in this disclosure may also be similarly varied, and these variations are not described below for each DRU.

[00166] In a tone plan of a DRU, the 40 MHz bandwidth includes eight 52-tone DRUs, and each 52-tone DRU includes 48 data subcarriers and four pilot subcarriers. For example, Table 6 shows an example of eight 52-tone DRUs corresponding to the 40 MHz bandwidth, and shows indices of 48 data subcarriers and indices of four pilot subcarriers included in each 52-tone DRU, and a lowest-frequency index of a data subcarrier in a 52-tone DRU whose identifier is 1 is -243.

Table 6

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	-243, -234, -225, -216, -207, -198, -189, -180, -171, -162, -153, -144, -120, -111, -102, -93, -84, -75, -66, -57, -48, -39, -30, -21, 13, 22, 31, 40, 49, 58, 67, 76, 85, 94, 103, 112, 136, 145, 154, 163, 172, 181, 190, 199, 208, 217, 226, 235	-12, -3, 121, 130
2	-242, -233, -224, -215, -206, -197, -188, -179, -170, -161, -152, -143, -119, -110, -101, -92, -83, -74, -65, -56, -47, -38, -29, -20, 14, 23, 32, 41, 50, 59, 68, 77, 86, 95, 104, 113, 137, 146, 155, 164, 173, 182, 191, 200, 209, 218, 227, 236	-128, -11, 3, 122
3	-241, -232, -223, -214, -205, -196, -187, -178, -169, -160, -151, -142, -118, -109, -100, -91, -82, -73, -64, -55, -46, -37, -28, -19, 15, 24, 33, 42, 51, 60, 69, 78, 87, 96, 105, 114, 138, 147, 156, 165, 174, 183, 192, 201, 210, 219, 228, 237	-127, -10, 4, 123
4	-240, -231, -222, -213, -204, -195, -186, -177, -168, -159, -150, -141, -117, -108, -99, -90, -81, -72, -63, -54, -45, -36, -27, -18, 16, 25, 34, 43, 52, 61, 70, 79, 88, 97, 106, 115, 139, 148, 157, 166,	-126, -9, 5, 124

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	175, 184, 193, 202, 211, 220, 229, 238	
5	−238, −229, −220, −211, −202, −193, −184, −175, −166, −157, −148, −139, −115, −106, −97, −88, −79, −70, −61, −52, −43, −34, −25, −16, 18, 27, 36, 45, 54, 63, 72, 81, 90, 99, 108, 117, 141, 150, 159, 168, 177, 186, 195, 204, 213, 222, 231, 240	−124, −7, 7, 126
6	−237, −228, −219, −210, −201, −192, −183, −174, −165, −156, −147, −138, −114, −105, −96, −87, −78, −69, −60, −51, −42, −33, −24, −15, 19, 28, 37, 46, 55, 64, 73, 82, 91, 100, 109, 118, 142, 151, 160, 169, 178, 187, 196, 205, 214, 223, 232, 241	−123, −6, 8, 127
7	−236, −227, −218, −209, −200, −191, −182, −173, −164, −155, −146, −137, −113, −104, −95, −86, −77, −68, −59, −50, −41, −32, −23, −14, 20, 29, 38, 47, 56, 65, 74, 83, 92, 101, 110, 119, 143, 152, 161, 170, 179, 188, 197, 206, 215, 224, 233, 242	−122, −5, 9, 128
8	−235, −226, −217, −208, −199, −190, −181, −172, −163, −154, −145, −136, −112, −103, −94, −85, −76, −67, −58, −49, −40, −31, −22, −13, 21, 30, 39, 48, 57, 66, 75, 84, 93, 102, 111, 120, 144, 153, 162, 171, 180, 189, 198, 207, 216, 225, 234, 243	−121, −4, 10, 129

[00167] Specifically, as shown in Table 6, each 52-tone DRU includes 48 data subcarriers, including 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every 12 of the 48 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 9. In addition, absolute values of index differences between data subcarriers of two adjacent groups are alternately 24 and 34.

[00168] In other words, it is assumed that indices of 48 data subcarriers included in each 52-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes 12 data subcarriers. 12 data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 8.

[00169] In this embodiment of this disclosure, for ease of description, [s1: Δ : s2] indicates that s1 is used as a start subcarrier index, Δ is used as a step, and s2 is used as a last subcarrier index in

the subcarrier range, for example, $[-243: 9: -144]$ indicates the following subcarrier indices: -243 , $-243 + 9$, $-243 + 18$, $-243 + 27$, ..., and -144 , that is, -243 , -234 , -225 , -216 , -207 , -198 , -189 , -180 , -171 , -162 , -153 , and -144 .

[00170] Using a 52-tone DRU whose identifier is 1 in Table 6 as an example, 48 data subcarriers included in the 52-tone DRU may be considered as the following four groups: (1) $[-243: 9: -144]$; (2) $[-120: 9: -21]$; (3) $[13: 9: 112]$; and (4) $[136: 9: 235]$. (1) and (2) are low-frequency groups, and (3) and (4) are high-frequency groups. An absolute value of an index difference between subcarriers of the two low-frequency groups (1) and (2) is a difference between -120 and -144 , that is, 24. An absolute value of an index difference between subcarriers of the two high-frequency groups (3) and (4) is a difference between 136 and 112, that is, 24. An absolute value of a subcarrier index difference between the high-frequency group and the low-frequency group, namely, an absolute value of a subcarrier index difference between the high-frequency group (3) and the low-frequency group (2), is a difference between 13 and -21 , that is, 34.

[00171] As shown in Table 6, for identifiers 1 to 4, and 5 to 8, there is a fixed offset between indices of data subcarriers included in two 52-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is i ($i = 1, 2, 3, 5, 6$, or 7) all plus 1, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is $i + 1$. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 4 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 5 is 2. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is 4 all plus 2, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is 5.

[00172] In another description, eight 52-tone DRUs may include four 52-tone DRUs with large identifiers (identifiers 5 to 8) and four 52-tone DRUs with low identifiers (identifiers 1 to 4). In the four 52-tone DRUs with large identifiers, there is a fixed offset between two adjacent DRUs, and the fixed offset is 1. In the four 52-tone DRUs with small identifiers, there is a fixed offset between two adjacent DRUs, and the fixed offset is 1. An offset between a 52-tone DRU with a large identifier and a 52-tone DRU with a low identifier, specifically between a 52-tone DRU whose identifier is 4 and a 52-tone DRU whose identifier is 5, is 2.

[00173] As shown in Table 6, each 52-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00174] In addition, as shown in Table 5, the 52-tone DRU whose identifier is i ($i = 1$ to 4) may be considered as a combination of a 26-tone DRU whose identifier is i and a 26-tone DRU whose identifier is $i + 9$, and the 52-tone DRU whose identifier is i ($i = 5$ to 8) may be considered as a combination of a 26-tone DRU whose identifier is $i + 1$ and a 26-tone DRU whose identifier is $i +$

10. In this way, subcarriers in the 52-tone DRU can be fully discrete. For example, 48 data subcarriers in a 52-tone DRU whose identifier is 1 are a combination of 24 data subcarriers in a 26-tone DRU whose identifier is 1 and 24 data subcarriers in a 26-tone DRU whose identifier is 10 in Table 5. Four pilot subcarriers in the 52-tone DRU whose identifier is 1 are a combination of two pilot subcarriers in the 26-tone DRU whose identifier is 1 and two pilot subcarriers in the 26-tone DRU whose identifier is 10 in Table 5. Correspondingly, Table 6 may also be simplified and represented as the following Table 7 based on Table 5.

Table 7

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
1	1, 10
2	2, 11
3	3, 12
4	4, 13
5	6, 15
6	7, 16
7	8, 17
8	9, 18

[00175] In addition, in this embodiment of this disclosure, the identifier of the 52-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 52-tone DRU. For example, an identifier of a 52-tone DRU having a lowest-frequency index -243 is 1, and an identifier of a 52-tone DRU with a second lowest-frequency index -242 is 2.

[00176] According to the design of the 52-tone DRU shown in Table 6 or Table 7 in this embodiment of this disclosure, compared with the continuous 52-tone RU in FIG. 2, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 6.5.

[00177] In this embodiment of this disclosure, an association between a 52-tone DRU and a 26-tone DRU in 40 MHz is described by using Table 7. It may be understood that the foregoing described manner of determining a 52-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 52-tone DRU can be fully discrete. In another embodiment, a 52-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of two 26-tone DRUs whose identifiers are 1 and 2 is determined as the 52-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that, considering the association between the 52-tone DRU and the

26-tone DRU, if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -243, correspondingly the lowest-frequency index of the data subcarrier included in the 52-tone DRU also adaptively changes to another value.

[00178] In a tone plan solution of a DRU, the 40 MHz bandwidth includes four 106-tone DRUs, and each 106-tone DRU includes 102 data subcarriers and four pilot subcarriers. For example, Table 8 shows an example of four 106-tone DRUs corresponding to the 40 MHz bandwidth, and shows indices of 102 data subcarriers and indices of four pilot subcarriers included in each 106-tone DRU. As shown in Table 8, the 102 data subcarriers may be considered as two parts. A first part of data subcarriers includes 96 data subcarriers, a second part of data subcarriers includes six data subcarriers, and a lowest-frequency index of a data subcarrier in a 106-tone DRU whose identifier is 1 is -243. It should be understood that, although the data subcarriers are divided into the first part and the second part in Table 8 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 106-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in two parts, and do not need to be distinguished. In other words, the first part and the second part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 106-tone DRU.

Table 8

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
1	-243, -238, -234, -229, -225, -220, -216, -211, -207, -202, -198, -193, -189, -184, -180, -175, -171, -166, -162, -157, -153, -148, -144, -139, -120, -115, -111, -106, -102, -97, -93, -88, -84, -79, -75, -70, -66, -61, -57, -52, -48, -43, -39, -34, -30, -25, -21, -16, 13, 18, 22, 27, 31, 36, 40, 45, 49, 54, 58, 63, 67, 72, 76, 81, 85, 90, 94, 99, 103, 108, 112, 117, 136, 141, 145, 150, 154, 159, 163, 168, 172, 177, 181, 186, 190, 195, 199, 204,	-135, 244, -7, -3, 126, 121	-124, -12, 7, 130

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	208, 213, 217, 222, 226, 231, 235, 240		
2	–242, –237, –233, –228, –224, –219, –215, –210, –206, –201, –197, –192, –188, –183, –179, –174, –170, –165, –161, –156, –152, –147, –143, –138, –119, –114, –110, –105, –101, –96, –92, –87, –83, –78, –74, –69, –65, –60, –56, –51, –47, –42, –38, –33, –29, –24, –20, –15, 14, 19, 23, 28, 32, 37, 41, 46, 50, 55, 59, 64, 68, 73, 77, 82, 86, 91, 95, 100, 104, 109, 113, 118, 137, 142, 146, 151, 155, 160, 164, 169, 173, 178, 182, 187, 191, 196, 200, 205, 209, 214, 218, 223, 227, 232, 236, 241	–134, 131, –123, –6, 3, 122	–128, –11, 8, 127
3	–241, –236, –232, –227, –223, –218, –214, –209, –205, –200, –196, –191, –187, –182, –178, –173, –169, –164, –160, –155, –151, –146, –142, –137, –118, –113, –109, –104, –100, –95, –91, –86, –82, –77, –73, –68, –64, –59, –55, –50, –46, –41, –37, –32, –28, –23, –19, –14, 15, 20, 24, 29, 33, 38, 42, 47, 51, 56, 60, 65, 69, 74, 78, 83, 87, 92, 96, 101, 105, 110, 114, 119, 138, 143, 147, 152, 156, 161, 165, 170, 174, 179, 183, 188, 192, 197, 201, 206, 210, 215, 219, 224, 228, 233, 237, 242	–133, 132, –122, –5, 4, 123	–127, –10, 9, 128
4	–240, –235, –231, –226, –222, –217, –213, –208, –204, –199, –195, –190, –186, –181, –177, –172, –168, –163, –159, –154, –150, –145, –141, –136, –117, –112, –108, –103, –99, –94, –90, –85, –81, –76, –72, –67, –63, –58, –54, –49, –45, –40, –36, –31, –27, –22, –18, –13, 16, 21, 25, 30, 34, 39, 43, 48, 52, 57, 61, 66, 70, 75, 79, 84, 88, 93, 97, 102, 106, 111, 115, 120, 139, 144, 148, 153, 157, 162, 166, 171, 175, 180, 184, 189, 193, 198, 202, 207, 211, 216, 220, 225, 229, 234, 238, 243	–132, 133, –126, –4, 5, 124	–121, –9, 10, 129

[00179] Specifically, as shown in Table 8, each 106-tone DRU includes 102 data subcarriers, and some (namely, the first part in Table 8: 96 data subcarriers) of the 102 data subcarriers include 48 high-frequency subcarriers (whose subcarrier indices are positive values) and 48 low-frequency subcarriers (whose subcarrier indices are negative values). If every 24 of the 96 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 19 and 29.

[00180] In other words, for the 24 data subcarriers in the same group, an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in odd-numbered locations is 9, and an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in even-numbered locations is 9. An absolute value of an index difference between a data subcarrier in an even-numbered location and a previous adjacent data subcarrier is 5. Correspondingly, an absolute value of an index difference between a data subcarrier in an odd-numbered location and a previous adjacent data subcarrier is 4. In some embodiments, the 24 data subcarriers in the same group may be considered to include two sequences, for example, an odd-numbered location sequence and an even-numbered location sequence. An absolute value of an index difference between adjacent data subcarriers in each sequence is 9. For example, indices of the first 24 data subcarriers of the first part of data subcarriers of the 242-tone DRU whose identifier is 1 include -243, -238, -234, -229, -225, -220, -216, -211, -207, -202, -198, -193, -189, -184, -180, -175, -171, -166, -162, -157, -153, -148, -144, and -139, and may be represented as a combination of two sequences [-243: 9: -144] and [-238: 9: -139].

[00181] In other words, it is assumed that indices of 96 data subcarriers of 102 data subcarriers included in each 106-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes 24 data subcarriers. Absolute values of index differences between 24 data subcarriers in a same group are alternately 5 and 4.

[00182] Using a 106-tone DRU whose identifier is 1 in Table 8 as an example, 96 data subcarriers included in the 106-tone DRU may be considered as the following four groups: (1) -243, -238, -234, -229, -225, -220, -216, -211, -207, -202, -198, -193, -189, -184, -180, -175, -171, -166, -162, -157, -153, -148, -144, -139; (2) -120, -115, -111, -106, -102, -97, -93, -88, -84, -79, -75, -70, -66, -61, -57, -52, -48, -43, -39, -34, -30, -25, -21, -16; (3) 13, 18, 22, 27, 31, 36, 40, 45, 49, 54, 58, 63, 67, 72, 76, 81, 85, 90, 94, 99, 103, 108, 112, 117; and (4) 136, 141, 145, 150, 154, 159, 163, 168, 172, 177, 181, 186, 190, 195, 199, 204, 208, 213, 217, 222, 226, 231, 235, 240. (1) and (2) are low-frequency groups, and (3) and (4) are high-frequency groups.

An absolute value of an index difference between subcarriers of the two low-frequency groups (1)

and (2) is a difference between -120 and -139 , that is, 19. An absolute value of an index difference between subcarriers of the two high-frequency groups (3) and (4) is a difference between 136 and 117, that is, 19. An absolute value of a subcarrier index difference between the high-frequency group and the low-frequency group, namely, an absolute value of a subcarrier index difference between the high-frequency group (3) and the low-frequency group (2), is a difference between 13 and -16 , that is, 29.

[00183] As shown in Table 8, there is a fixed offset between indices of 96 data subcarriers (the first part) included in two 106-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 96 data subcarriers in a 106-tone DRU whose identifier is i ($i = 1, 2$, or 3) all plus 1, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is $i + 1$.

[00184] In addition to the 96 data subcarriers in the first part column of the foregoing table, each 106-tone DRU further includes six data subcarriers and four pilot subcarriers. In some embodiments, six data subcarriers and four pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, and data subcarriers in the first part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 8 shows an example, so that subcarriers included in the 106-tone DRU can be fully discrete.

[00185] With reference to the foregoing Table 5 or Table 6, it may be considered that a 106-tone DRU is obtained based on a 26-tone DRU or a 52-tone DRU. For example, the four pilot subcarriers included in the 106-tone DRU may be a part of a set of eight pilot subcarriers included in the corresponding four 26-tone DRUs. In addition, the other six data subcarriers included in the 106-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, and the pilot subcarriers, and the data subcarriers may be fully discrete, as shown in the "second part" column of Table 8.

[00186] As shown in Table 8, each 106-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers, and an absolute value of an index difference between a low-frequency pilot subcarrier and a high-frequency pilot subcarrier is 19. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00187] For example, Table 8 may be simplified and represented as the following Table 9. The "first part" column in Table 9 means that the first part of (96) data subcarriers in the 106-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 5. For example, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers (the first part) of 102 data subcarriers included in the 106-tone DRU include all data subcarriers of four 26-

tone DRUs whose identifiers are 1, 6, 10, and 15 shown in Table 5. In another understanding, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers (the first part) of 102 data subcarriers included in the 106-tone DRU include all data subcarriers of two 52-tone DRUs whose identifiers are 1 and 5 shown in Table 6.

5

Table 9

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part	
1	1, 6, 10, 15	−135, −7, −3, 121, 126, 244	−124, −12, 7, 130
2	2, 7, 11, 16	−134, −123, −6, 3, 122, 131	−128, −11, 8, 127
3	3, 8, 12, 17	−133, −122, −5, 4, 123, 132	−127, −10, 9, 128
4	4, 9, 13, 18	−132, −126, −4, 5, 124, 133	−121, −9, 10, 129

[00188] In addition, in this embodiment of this disclosure, the identifier of the 106-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 106-tone DRU. For example, an identifier of a 106-tone DRU having a lowest-frequency index −243 is 1.

10 **[00189]** According to the design of the 106-tone DRU shown in Table 8 or Table 9 in this embodiment of this disclosure, compared with the continuous 106-tone RU in FIG. 2, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 4.33.

15 **[00190]** In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 106-tone DRU in 40 MHz is described by using Table 9. It may be understood that a manner of determining a 106-tone DRU based on a 26-tone DRU in Table 9 is merely an example, and subcarriers in the 106-tone DRU can be fully discrete. In another embodiment, a 106-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of four 26-tone DRUs whose identifiers are 1 to 4 is
20 determined as the first part of data subcarriers of the 106-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than −243, correspondingly the lowest-frequency index of the data subcarrier included in the 106-tone DRU also adaptively changes to another value.

25 **[00191]** Tone plans of 26-tone DRUs, 52-tone DRUs, and 106-tone DRUs in 40 MHz are separately described above with reference to Table 5 to Table 9. An index −243 is used as a lowest-

frequency index of a data subcarrier.

[00192] The foregoing content describes in detail subcarriers (data subcarriers and pilot subcarriers) separately included in different DRUs in the 40 MHz bandwidth. To make characteristics of the subcarriers clearer, the following describes characteristics followed by a tone plan of the DRUs in the 40 MHz bandwidth.

[00193] The tone plan of the DRUs in the 40 MHz bandwidth may include a predetermined quantity of DRUs, and the predetermined quantity of DRUs satisfies one or more of the following characteristics.

[00194] Characteristic a: The characteristic includes a data subcarrier set and a pilot subcarrier set.

[00195] Characteristic b: A data subcarrier set includes M subcarrier sets (tone sets), where M is greater than or equal to 18, and M is a positive integer. For example, M is 18 or 36. Quantities of subcarriers included in the subcarrier sets are the same, and indices of the subcarriers are distributed as evenly as possible. For example, a subcarriers set includes six subcarriers (for example, M = 36) or 12 subcarriers (for example, M = 18).

[00196] Characteristic c: Data subcarriers in a single DRU of the predetermined quantity of DRUs include a plurality of evenly discrete subcarrier sets in the M subcarrier sets. For example, when M = 36, data subcarriers in a single DRU include at least four subcarrier sets in the M sets. For example, when M = 18, data subcarriers in a single DRU include at least two subcarrier sets in the M sets.

[00197] Specifically, index sets of the data subcarriers may be $[-a, -a + 107]$ and $[b - 107, b]$, where a and b may be any integer in a closed interval [110, 122], and a and b may be equal or unequal. Certainly, a data subcarrier set may alternatively be another subcarrier index range, and is not listed herein again.

[00198] In some embodiments, as shown in Table 10, the index sets of the data subcarriers are $[-a, -a + 107]$ and $[b - 107, b]$, and may include 36 groups, where each group includes six subcarriers. Six subcarriers in a same group include three high-frequency subcarriers (whose subcarrier indices are positive values) and three low-frequency subcarriers (whose subcarrier indices are negative values). In addition, the three high-frequency subcarriers are equally spaced, and the three low-frequency subcarriers are equally spaced. Specifically, an absolute value of an index difference between two adjacent high-frequency subcarriers is 36, and an absolute value of an index difference between two adjacent low-frequency subcarriers is also 36. An absolute value of an index difference between a high-frequency subcarrier with a minimum index and a low-frequency subcarrier with a minimum absolute value index in a same group is $a + b - 179$. In other words, an absolute value of an index difference between a high-frequency subcarrier and a low-

frequency subcarrier in a same group is $a + b - 179$. In addition, there is a fixed offset between two adjacent groups, and the fixed offset is 1. For example, an index of each subcarrier whose group number is i ($i = 1, 2, \dots$, or 35) plus 1, to obtain an index of each subcarrier whose group number is $i + 1$.

5

Table 10

Group number	Subcarrier index
1	$-a, -a + 36, -a + 72, b - 107, b - 71, b - 35$
2	$-a + 1, -a + 37, -a + 73, b - 106, b - 70, b - 34$
3	$-a + 2, -a + 38, -a + 74, b - 105, b - 69, b - 33$
4	$-a + 3, -a + 39, -a + 75, b - 104, b - 68, b - 32$
5	$-a + 4, -a + 40, -a + 76, b - 103, b - 67, b - 31$
6	$-a + 5, -a + 41, -a + 77, b - 102, b - 66, b - 30$
7	$-a + 6, -a + 42, -a + 78, b - 101, b - 65, b - 29$
8	$-a + 7, -a + 43, -a + 79, b - 100, b - 64, b - 28$
9	$-a + 8, -a + 44, -a + 80, b - 99, b - 63, b - 27$
10	$-a + 9, -a + 45, -a + 81, b - 98, b - 62, b - 26$
11	$-a + 10, -a + 46, -a + 82, b - 97, b - 61, b - 25$
12	$-a + 11, -a + 47, -a + 83, b - 96, b - 60, b - 24$
13	$-a + 12, -a + 48, -a + 84, b - 95, b - 59, b - 23$
14	$-a + 13, -a + 49, -a + 85, b - 94, b - 58, b - 22$
15	$-a + 14, -a + 50, -a + 86, b - 93, b - 57, b - 21$
16	$-a + 15, -a + 51, -a + 87, b - 92, b - 56, b - 20$
17	$-a + 16, -a + 52, -a + 88, b - 91, b - 55, b - 19$
18	$-a + 17, -a + 53, -a + 89, b - 90, b - 54, b - 18$
19	$-a + 18, -a + 54, -a + 90, b - 89, b - 53, b - 17$
20	$-a + 19, -a + 55, -a + 91, b - 88, b - 52, b - 16$
21	$-a + 20, -a + 56, -a + 92, b - 87, b - 51, b - 15$
22	$-a + 21, -a + 57, -a + 93, b - 86, b - 50, b - 14$
23	$-a + 22, -a + 58, -a + 94, b - 85, b - 49, b - 13$
24	$-a + 23, -a + 59, -a + 95, b - 84, b - 48, b - 12$
25	$-a + 24, -a + 60, -a + 96, b - 83, b - 47, b - 11$
26	$-a + 25, -a + 61, -a + 97, b - 82, b - 46, b - 10$
27	$-a + 26, -a + 62, -a + 98, b - 81, b - 45, b - 9$

Group number	Subcarrier index
28	$-a + 27, -a + 63, -a + 99, b - 80, b - 44, b - 8$
29	$-a + 28, -a + 64, -a + 100, b - 79, b - 43, b - 7$
30	$-a + 29, -a + 65, -a + 101, b - 78, b - 42, b - 6$
31	$-a + 30, -a + 66, -a + 102, b - 77, b - 41, b - 5$
32	$-a + 31, -a + 67, -a + 103, b - 76, b - 40, b - 4$
33	$-a + 32, -a + 68, -a + 104, b - 75, b - 39, b - 3$
34	$-a + 33, -a + 69, -a + 105, b - 74, b - 38, b - 2$
35	$-a + 34, -a + 70, -a + 106, b - 73, b - 37, b - 1$
36	$-a + 35, -a + 71, -a + 107, b - 72, b - 36, b$

[00199] In some embodiments, as shown in Table 11, the sets of the data subcarriers are $[-a, -a + 107]$ and $[b - 107, b]$, and may include 18 groups, where each group includes 12 subcarriers. 12 subcarriers in a same group include six high-frequency subcarriers (whose subcarrier indices are positive values) and six low-frequency subcarriers (whose subcarrier indices are negative values). In addition, the six high-frequency subcarriers are equally spaced, and the six low-frequency subcarriers are equally spaced. Specifically, an absolute value of an index difference between two adjacent high-frequency subcarriers is 18, and an absolute value of an index difference between two adjacent low-frequency subcarriers is also 18. An absolute value of an index difference between a high-frequency subcarrier with a minimum index and a low-frequency subcarrier with a minimum absolute value index in a same group is $a + b - 197$. In other words, an absolute value of an index difference between a high-frequency subcarrier and a low-frequency subcarrier in a same group is $a + b - 197$. In addition, there is a fixed offset between two adjacent groups, and the fixed offset is 1. For example, an index of each subcarrier whose group number is i ($i = 1, 2, \dots, \text{or } 17$) plus 1, to obtain an index of each subcarrier whose group number is $i + 1$.

Table 11

Group number	Subcarrier index
1	$-a, -a + 18, -a + 36, -a + 54, -a + 72, -a + 90, b - 107, b - 89, b - 71, b - 53, b - 35, b - 17$
2	$-a + 1, -a + 19, -a + 37, -a + 55, -a + 73, -a + 91, b - 106, b - 88, b - 70, b - 52, b - 34, b - 16$
3	$-a + 2, -a + 20, -a + 38, -a + 56, -a + 74, -a + 92, b - 105, b - 87, b - 69, b - 51, b$

Group number	Subcarrier index
	$-33, b-15$
4	$-a+3, -a+21, -a+39, -a+57, -a+75, -a+93, b-104, b-86, b-68, b-50, b-32, b-14$
5	$-a+4, -a+22, -a+40, -a+58, -a+76, -a+94, b-103, b-85, b-67, b-49, b-31, b-13$
6	$-a+5, -a+23, -a+41, -a+59, -a+77, -a+95, b-102, b-84, b-66, b-48, b-30, b-12$
7	$-a+6, -a+24, -a+42, -a+60, -a+78, -a+96, b-101, b-83, b-65, b-47, b-29, b-11$
8	$-a+7, -a+25, -a+43, -a+61, -a+79, -a+97, b-100, b-82, b-64, b-46, b-28, b-10$
9	$-a+8, -a+26, -a+44, -a+62, -a+80, -a+98, b-99, b-81, b-63, b-45, b-27, b-9$
10	$-a+9, -a+27, -a+45, -a+63, -a+81, -a+99, b-98, b-80, b-62, b-44, b-26, b-8$
11	$-a+10, -a+28, -a+46, -a+64, -a+82, -a+100, b-97, b-79, b-61, b-43, b-25, b-7$
12	$-a+11, -a+29, -a+47, -a+65, -a+83, -a+101, b-96, b-78, b-60, b-42, b-24, b-6$
13	$-a+12, -a+30, -a+48, -a+66, -a+84, -a+102, b-95, b-77, b-59, b-41, b-23, b-5$
14	$-a+13, -a+31, -a+49, -a+67, -a+85, -a+103, b-94, b-76, b-58, b-40, b-22, b-4$
15	$-a+14, -a+32, -a+50, -a+68, -a+86, -a+104, b-93, b-75, b-57, b-39, b-21, b-3$
16	$-a+15, -a+33, -a+51, -a+69, -a+87, -a+105, b-92, b-74, b-56, b-38, b-20, b-2$
17	$-a+16, -a+34, -a+52, -a+70, -a+88, -a+106, b-91, b-73, b-55, b-37, b-19, b-1$
18	$-a+17, -a+35, -a+53, -a+71, -a+89, -a+107, b-90, b-72, b-54, b-36, b-18, b$

[00200] In an example, it may be assumed that $a = b = 115$, so that Table 11 may be changed to

Table 12. Table 12 shows 18 groups included in a total of 216 subcarriers whose subcarrier indices are $[-a, -a + 107]$ and $[b - 107, b]$ (that is, $[-115, -8]$ and $[8, 115]$). 12 subcarriers in a same group include six high-frequency subcarriers (whose subcarrier indices are positive values) and six low-frequency subcarriers (whose subcarrier indices are negative values). In addition, the six high-frequency subcarriers are equally spaced, and the six low-frequency subcarriers are equally spaced. Specifically, an absolute value of an index difference between two adjacent high-frequency subcarriers is 18, and an absolute value of an index difference between two adjacent low-frequency subcarriers is also 18. An absolute value of an index difference between a high-frequency subcarrier and a low-frequency subcarrier in a same group is 33. In addition, there is a fixed offset between two adjacent groups, and the fixed offset is 1. For example, an index of each subcarrier whose group number is i ($i = 1, 2, \dots$, or 17) plus 1, to obtain an index of each subcarrier whose group number is $i + 1$.

Table 12

Group number	Subcarrier index
1	-115, -97, -79, -61, -43, -25, 8, 26, 44, 62, 80, 98
2	-114, -96, -78, -60, -42, -24, 9, 27, 45, 63, 81, 99
3	-113, -95, -77, -59, -41, -23, 10, 28, 46, 64, 82, 100
4	-112, -94, -76, -58, -40, -22, 11, 29, 47, 65, 83, 101
5	-111, -93, -75, -57, -39, -21, 12, 30, 48, 66, 84, 102
6	-110, -92, -74, -56, -38, -20, 13, 31, 49, 67, 85, 103
7	-109, -91, -73, -55, -37, -19, 14, 32, 50, 68, 86, 104
8	-108, -90, -72, -54, -36, -18, 15, 33, 51, 69, 87, 105
9	-107, -89, -71, -53, -35, -17, 16, 34, 52, 70, 88, 106
10	-106, -88, -70, -52, -34, -16, 17, 35, 53, 71, 89, 107
11	-105, -87, -69, -51, -33, -15, 18, 36, 54, 72, 90, 108
12	-104, -86, -68, -50, -32, -14, 19, 37, 55, 73, 91, 109
13	-103, -85, -67, -49, -31, -13, 20, 38, 56, 74, 92, 110
14	-102, -84, -66, -48, -30, -12, 21, 39, 57, 75, 93, 111
15	-101, -83, -65, -47, -29, -11, 22, 40, 58, 76, 94, 112
16	-100, -82, -64, -46, -28, -10, 23, 41, 59, 77, 95, 113
17	-99, -81, -63, -45, -27, -9, 24, 42, 60, 78, 96, 114
18	-98, -80, -62, -44, -26, -8, 25, 43, 61, 79, 97, 115

[00201] In some embodiments, data subcarriers included in the 26-tone DRU in 40 MHz shown in Table 5 may be determined by using Table 12. In some examples, the subcarrier indices whose group number is i in Table 12 may be shifted leftward by n_{11} to obtain 12 low-frequency data subcarriers in the 26-tone DRU whose identifier is i , and the subcarrier indices whose group number is i in Table 12 may be shifted rightward by n_{12} to obtain 12 high-frequency data subcarriers in the 26-tone DRU whose identifier is i . In an example of Table 5, $n_{11} = n_{12} = 128$. However, it may be understood that n_{11} and n_{12} may alternatively be other values, and are not listed herein again.

[00202] In other words, for the 26-tone DRU whose identifier is i shown in Table 5, it may be considered that indices of subcarriers whose group number is i in Table 12 are shifted leftward by 128 (that is, all minus 128) to obtain 12 low-frequency data subcarriers in the 26-tone DRU whose identifier is i , and indices of subcarriers whose group number is i in Table 12 are shifted rightward by 128 (that is, all plus 128) to obtain 12 high-frequency data subcarriers in the 26-tone DRU whose identifier is i . Correspondingly, Table 5 may also be simplified and represented as the following Table 13, where numbers in brackets $\{\}$ are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12.

Table 13

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$\{1\} \pm 128$	-12, 121
2	$\{2\} \pm 128$	-11, 122
3	$\{3\} \pm 128$	-10, 123
4	$\{4\} \pm 128$	-9, 124
5	$\{5\} \pm 128$	-8, 125
6	$\{6\} \pm 128$	-7, 126
7	$\{7\} \pm 128$	-6, 127
8	$\{8\} \pm 128$	-5, 128
9	$\{9\} \pm 128$	-4, 129
10	$\{10\} \pm 128$	-3, 130
11	$\{11\} \pm 128$	-128, 3
12	$\{12\} \pm 128$	-127, 4
13	$\{13\} \pm 128$	-126, 5
14	$\{14\} \pm 128$	-125, 6

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
15	$\{15\} \pm 128$	-124, 7
16	$\{16\} \pm 128$	-123, 8
17	$\{17\} \pm 128$	-122, 9
18	$\{18\} \pm 128$	-121, 10

[00203] Similarly, Table 6 may also be simplified and represented as the following Table 14, where numbers in brackets {} are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12.

5

Table 14

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$\{1, 10\} \pm 128$	-12, -3, 121, 130
2	$\{2, 11\} \pm 128$	-128, -11, 3, 122
3	$\{3, 12\} \pm 128$	-127, -10, 4, 123
4	$\{4, 13\} \pm 128$	-126, -9, 5, 124
5	$\{6, 15\} \pm 128$	-124, -7, 7, 126
6	$\{7, 16\} \pm 128$	-123, -6, 8, 127
7	$\{8, 17\} \pm 128$	-122, -5, 9, 128
8	$\{9, 18\} \pm 128$	-121, -4, 10, 129

[00204] Similarly, Table 8 may also be simplified and represented as the following Table 15, where numbers in brackets {} are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12.

10

Table 15

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
1	$\{1, 6, 10, 15\} \pm 128$	-135, -7, -3, 121, 126, 244	-124, -12, 7, 130
2	$\{2, 7, 11, 16\} \pm 128$	-134, -123, -6, 3, 122, 131	-128, -11, 8, 127
3	$\{3, 8, 12, 17\} \pm 128$	-133, -122, -5, 4, 123, 132	-127, -10, 9, 128
4	$\{4, 9, 13, 18\} \pm 128$	-132, -126, -4, 5, 124, 133	-121, -9, 10, 129

[00205] It may be understood that, although an embodiment of obtaining DRUs of various sizes in 40 MHz based on Table 12 is described with reference to Table 13 to Table 15, this disclosure

is not limited thereto. For example, an index of a subcarrier included in each DRU may be determined without considering the grouping in Table 12. For example, an index of a subcarrier included in each DRU may be determined based on another grouping form. This is not limited in this disclosure.

5 **[00206]** For an 80 MHz bandwidth:

[00207] The 80 MHz bandwidth includes 1024 subcarriers in total, and the subcarrier index range is [−512, 511].

[00208] In a tone plan solution of a DRU, the 80 MHz bandwidth includes 36 26-tone DRUs, and each 26-tone DRU includes 24 data subcarriers and two pilot subcarriers. For example, Table 10 16 shows an example of 36 26-tone DRUs corresponding to the 80 MHz bandwidth, and shows indices of 24 data subcarriers and indices of two pilot subcarriers included in each 26-tone DRU, and a lowest-frequency index of a data subcarrier in a 26-tone DRU whose identifier is 1 is −499.

Table 16

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	−499, −481, −463, −445, −427, −409, −376, −358, −340, −322, −304, −286, −243, −225, −207, −189, −171, −153, −120, −102, −84, −66, −48, −30	−268, −135
2	−498, −480, −462, −444, −426, −408, −375, −357, −339, −321, −303, −285, −242, −224, −206, −188, −170, −152, −119, −101, −83, −65, −47, −29	−267, −134
3	−497, −479, −461, −443, −425, −407, −374, −356, −338, −320, −302, −284, −241, −223, −205, −187, −169, −151, −118, −100, −82, −64, −46, −28	−266, −133
4	−496, −478, −460, −442, −424, −406, −373, −355, −337, −319, −301, −283, −240, −222, −204, −186, −168, −150, −117, −99, −81, −63, −45, −27	−265, −132
5	−495, −477, −459, −441, −423, −405, −372, −354, −336, −318, −300, −282, −239, −221, −203, −185, −167, −149, −116, −98, −80, −62, −44, −26	−264, −131
6	−494, −476, −458, −440, −422, −404, −371, −353, −335, −317, −299, −281, −238, −220, −202, −184, −166, −148, −115, −97, −79,	−263, −130

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	–61, –43, –25	
7	–493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24	–262, –129
8	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23	–261, –128
9	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22	–260, –127
10	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21	–259, –126
11	–489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20	–384, –253
12	–488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19	–383, –252
13	–487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18	–382, –251
14	–486, –468, –450, –432, –414, –396, –363, –345, –327, –309, –291, –273, –230, –212, –194, –176, –158, –140, –107, –89, –71, –53, –35, –17	–381, –250
15	–485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16	–380, –249
16	–484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15	–379, –248

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
17	–483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14	–378, –247
18	–482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13	–377, –246
19	13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482	244, 377
20	14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	245, 378
21	15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484	246, 379
22	16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	247, 380
23	17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	248, 381
24	18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	249, 382
25	19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	250, 383
26	20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	251, 384
27	21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	252, 385
28	22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	253, 386
29	23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	128, 259
30	24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	129, 260
31	25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299,	130, 261

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	317, 335, 353, 371, 404, 422, 440, 458, 476, 494	
32	26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	131, 262
33	27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	132, 263
34	28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	133, 264
35	29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	134, 265
36	30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499	135, 266

[00209] Specifically, as shown in Table 16, the 36 26-tone DRUs corresponding to the 80 MHz bandwidth include 18 high-frequency 26-tone DRUs and 18 low-frequency 26-tone DRUs, where subcarrier indices of 26 subcarriers in a high-frequency 26-tone DRU are all positive values, and subcarrier indices of 26 subcarriers in a low-frequency 26-tone DRU are all negative values.

[00210] Each 26-tone DRU includes 24 data subcarriers. If every six data subcarriers of the 24 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33.

[00211] In other words, it is assumed that indices of 24 data subcarriers included in each 26-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00212] Using the 26-tone DRU whose identifier is 1 in Table 16 as an example, 24 data subcarriers included in the 26-tone DRU may be considered as the following four groups: (1) –499, –481, –463, –445, –427, –409; (2) –376, –358, –340, –322, –304, –286; (3) –243, –225, –207, –189, –171, –153; and (4) –120, –102, –84, –66, –48, –30. An absolute value of an index difference between subcarriers of (1) and (2) is a difference between –376 and –409, that is, 33. An absolute value of an index difference between subcarriers of (2) and (3) is a difference between –243 and –

286, that is, 43. An absolute value of an index difference between subcarriers of (3) and (4) is a difference between -120 and -150 , that is, 33.

[00213] In addition, in the 18 low-frequency 26-tone DRUs, there is a fixed offset between indices of data subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. Specifically, indices of 24 data subcarriers in a 26-tone DRU whose identifier is i ($i = 1, 2, \dots, \text{or } 17$) all plus 1, to obtain indices of 24 data subcarriers in a 26-tone DRU whose identifier is $i + 1$. Similarly, in the 18 high-frequency 26-tone DRUs, there is a fixed offset between indices of data subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. Specifically, indices of 24 data subcarriers in a 26-tone DRU whose identifier is i ($i = 19, 20, \dots, \text{or } 35$) all plus 1, to obtain indices of 24 data subcarriers in a 26-tone DRU whose identifier is $i + 1$. In addition, there is an offset 495 between a low-frequency 26-tone DRU and a high-frequency 26-tone DRU, that is, between a 26-tone DRU whose identifier is 18 and a 26-tone DRU whose identifier is 19.

[00214] In Table 16, the identifier of the 26-tone DRU may be based on an index of a lowest-frequency subcarrier included in the 26-tone DRU. In other words, an identifier of a 26-tone DRU having a data subcarrier with a minimum value index is 1. As shown in Table 16, in all data subcarriers in the "index of a data subcarrier" column, a minimum value index is -499 . Therefore, an identifier of a 26-tone DRU in which the subcarrier is located is 1. In addition, a minimum value index other than that of the 26-tone DRU whose identifier is 1 is -498 . Therefore, the identifier of the 26-tone DRU in which the subcarrier is located is 2.

[00215] It may be understood that although the lowest-frequency index shown in Table 16 is -499 , the value is merely an example. For example, the value may be any integer from -506 to -494 .

[00216] As shown in Table 16, each 26-tone DRU further includes two pilot subcarriers. For 26-tone DRUs whose identifiers are 1 to 10 or 19 to 28, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 133. For 26-tone DRUs whose identifiers are 11 to 18 or 29 to 36, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 131.

[00217] As shown in Table 16, for identifiers 1 to 10, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 11 to 18, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 19 to 28, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 29 to 36, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed

offset is 1. For example, indices of two pilot subcarriers in a 26-tone DRU whose identifier is i ($i = 1 - 9, 11 - 17, 19 - 27, \text{ or } 29 - 35$) all plus 1, to obtain indices of two pilot subcarriers in a 26-tone DRU whose identifier is $i + 1$.

[00218] In this embodiment of this disclosure, for the 80 MHz bandwidth, a manner of determining two pilot subcarriers in a 26-tone DRU is similar to the foregoing manner of determining the two pilot subcarriers in the 26-tone DRU for the 40 MHz bandwidth, so that pilot subcarriers in a same DRU are fully discrete, thereby implementing frequency domain diversity. Details are not described herein again.

[00219] It may be understood that the pilot subcarriers shown in Table 16 are merely examples, and other pilot subcarriers may alternatively be used. For example, spacings between two pilot subcarriers in different 26-tone DRUs may be unequal to each other.

[00220] In this way, for the 80 MHz bandwidth, through the design of the 26-tone DRU shown in Table 16, compared with the continuous 26-tone RU shown in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00221] The foregoing describes a tone plan solution of the 26-tone DRU in the 80 MHz bandwidth with reference to Table 16. The solution is merely an example. A person skilled in the art may obtain another solution on this basis. For example, the lowest-frequency index is no longer -499 but another value. For example, an index of a pilot subcarrier is determined by using another solution. In addition, the tone plan of other DRUs described below in this disclosure may also be similarly varied, and these variations are not described below for each DRU.

[00222] In a tone plan solution of a DRU, the 80 MHz bandwidth includes 16 52-tone DRUs, and each 52-tone DRU includes 48 data subcarriers and four pilot subcarriers. For example, Table 17 shows an example of 16 52-tone DRUs corresponding to the 80 MHz bandwidth, and shows indices of 48 data subcarriers and indices of four pilot subcarriers included in each 52-tone DRU, and a lowest-frequency index of a data subcarrier in a 52-tone DRU whose identifier is 1 is -499 .

Table 17

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$-499, -481, -463, -445, -427, -409, -376, -358, -340, -322, -304, -286, -243, -225, -207, -189, -171, -153, -120, -102, -84, -66, -48, -30, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190,$	$-268, -135, 244, 377$

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482	
2	–498, –480, –462, –444, –426, –408, –375, –357, –339, –321, –303, –285, –242, –224, –206, –188, –170, –152, –119, –101, –83, –65, –47, –29, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	–267, –134, 245, 378
3	–497, –479, –461, –443, –425, –407, –374, –356, –338, –320, –302, –284, –241, –223, –205, –187, –169, –151, –118, –100, –82, –64, –46, –28, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484	–266, –133, 246, 379
4	–496, –478, –460, –442, –424, –406, –373, –355, –337, –319, –301, –283, –240, –222, –204, –186, –168, –150, –117, –99, –81, –63, –45, –27, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	–265, –132, 247, 380
5	–494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	–263, –130, 249, 382
6	–493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	–262, –129, 250, 383
7	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	–261, –128, 251, 384
8	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216,	–260, –127, 252, 385

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	
9	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	–259, –126, 253, 386
10	–489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	–384, –253, 128, 259
11	–488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	–383, –252, 129, 260
12	–487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494	–382, –251, 130, 261
13	–485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	–380, –249, 132, 263
14	–484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	–379, –248, 133, 264
15	–483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	–378, –247, 134, 265
16	–482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67,	–377, –246, 135,

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	–49, –31, –13, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499	266

[00223] As shown in Table 17, each 52-tone DRU includes 48 data subcarriers, including 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 48 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 33 and 43.

[00224] In other words, it is assumed that indices of 48 data subcarriers included in each 52-tone DRU are sequentially arranged in a frequency direction and then divided into eight groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00225] Using a 52-tone DRU whose identifier is 1 in Table 17 as an example, 48 data subcarriers included in the 52-tone DRU are divided into the following eight groups: (1) [–499: 18: –409]; (2) [–376: 18: –286]; (3) [–243: 18: –153]; (4) [–120: 18: –30]; (5) [13: 18: 103]; (6) [136: 18: 226]; (7) [269: 18: 359]; and (8) [392: 18: 482]. (1) to (4) are low-frequency groups, and (5) to (8) are high-frequency groups. An absolute value of an index difference between subcarriers of (1) and (2) is a difference between –376 and –409, that is, 33. An absolute value of an index difference between subcarriers of (2) and (3) is a difference between –243 and –286, that is, 43. An absolute value of an index difference between subcarriers of (3) and (4) is a difference between –120 and –153, that is, 33. An absolute value of an index difference between subcarriers of (4) and (5) is a difference between 13 and –30, that is, 43. An absolute value of an index difference between subcarriers of (5) and (6) is a difference between 136 and 103, that is, 33. An absolute value of an index difference between subcarriers of (6) and (7) is a difference between 269 and 226, that is, 43. An absolute value of an index difference between subcarriers of (7) and (8) is a difference between 392 and 359, that is, 33. It may be learned that absolute values of index differences between adjacent groups are alternately 33 and 43.

[00226] As shown in Table 17, for identifiers 1 to 4, 5 to 12, or 13 to 16, there is a fixed offset between indices of data subcarriers included in two 52-tone DRUs having adjacent identifiers, and

the fixed offset is 1. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is i ($i = 1, 2, 3, 5, 6, 7, 8, 9, 10, 11, 13, 14$, or 15) all plus 1, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is $i + 1$. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 4 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 5 is 2. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 12 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 13 is 2. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is 4 all plus 2, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is 5. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is 12 all plus 2, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is 13.

[00227] As shown in Table 17, each 52-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00228] As shown in Table 16, the 52-tone DRU whose identifier is i ($i = 1$ to 4) may be considered as a combination of a 26-tone DRU whose identifier is i and a 26-tone DRU whose identifier is $i + 18$, the 52-tone DRU whose identifier is i ($i = 5$ to 12) may be considered as a combination of a 26-tone DRU whose identifier is $i + 1$ and a 26-tone DRU whose identifier is $i + 19$, and the 52-tone DRU whose identifier is i ($i = 13$ to 16) may be considered as a combination of a 26-tone DRU whose identifier is $i + 2$ and a 26-tone DRU whose identifier is $i + 20$. In this way, subcarriers in the 52-tone DRU can be fully discrete. For example, 48 data subcarriers in a 52-tone DRU whose identifier is 1 are a combination of 24 data subcarriers in a 26-tone DRU whose identifier is 1 and 24 data subcarriers in a 26-tone DRU whose identifier is 19 in Table 16. Four pilot subcarriers in the 52-tone DRU whose identifier is 1 are a combination of two pilot subcarriers in the 26-tone DRU whose identifier is 1 and two pilot subcarriers in the 26-tone DRU whose identifier is 19 in Table 16. Correspondingly, Table 17 may also be simplified and represented as the following Table 18 based on Table 16.

Table 18

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
1	1, 19
2	2, 20
3	3, 21
4	4, 22
5	6, 24

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
6	7, 25
7	8, 26
8	9, 27
9	10, 28
10	11, 29
11	12, 30
12	13, 31
13	15, 33
14	16, 34
15	17, 35
16	18, 36

[00229] In addition, in this embodiment of this disclosure, the identifier of the 52-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 52-tone DRU. For example, an identifier of a 52-tone DRU having a lowest-frequency index -499 is 1.

5 **[00230]** According to the design of the 52-tone DRU shown in Table 17 or Table 18 in this embodiment of this disclosure, compared with the continuous 52-tone RU in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

10 **[00231]** In this embodiment of this disclosure, an association between a 52-tone DRU and a 26-tone DRU in 80 MHz is described by using Table 18. It may be understood that the foregoing described manner of determining a 52-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 52-tone DRU can be fully discrete. In another embodiment, a 52-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of two 26-tone DRUs whose identifiers are 1 and 20 is determined as the 52-tone
15 DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that, considering the association between the 52-tone DRU and the 26-tone DRU, if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -499 , correspondingly the lowest-frequency index of the data subcarrier included in the 52-tone DRU also adaptively changes to another value.

20 **[00232]** In a tone plan solution of a DRU, the 80 MHz bandwidth includes eight 106-tone DRUs, and each 106-tone DRU includes 102 data subcarriers and four pilot subcarriers. For example, Table 19 shows an example of eight 106-tone DRUs corresponding to the 80 MHz bandwidth, and shows indices of 102 data subcarriers and indices of four pilot subcarriers included in each 106-

tone DRU. As shown in Table 19, the 102 data subcarriers may be considered as two parts. A first part of data subcarriers includes 96 data subcarriers, a second part of data subcarriers includes six data subcarriers, and a lowest-frequency index of a data subcarrier in a 106-tone DRU whose identifier is 1 is -499. It should be understood that, although the data subcarriers are divided into the first part and the second part in Table 19 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 106-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in two parts, and do not need to be distinguished. In other words, the first part and the second part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 106-tone DRU.

Table 19

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
1	-499, -490, -481, -472, -463, -454, -445, -436, -427, -418, -409, -400, -376, -367, -358, -349, -340, -331, -322, -313, -304, -295, -286, -277, -243, -234, -225, -216, -207, -198, -189, -180, -171, -162, -153, -144, -120, -111, -102, -93, -84, -75, -66, -57, -48, -39, -30, -21, 13, 22, 31, 40, 49, 58, 67, 76, 85, 94, 103, 112, 136, 145, 154, 163, 172, 181, 190, 199, 208, 217, 226, 235, 269, 278, 287, 296, 305, 314, 323, 332, 341, 350, 359, 368, 392, 401, 410, 419, 428, 437, 446, 455, 464, 473, 482, 491	-259, -135, -12, 5, 253, 377	-268, -126, 244, 386
2	-498, -489, -480, -471, -462, -453, -444, -435, -426, -417, -408, -399, -375, -366, -357, -348, -339, -330, -321, -312, -303, -294, -285, -276, -242, -233, -224, -215, -206, -197, -188, -179, -170, -161, -152, -143, -119, -110, -101, -92, -83, -74, -65, -56, -47, -38, -29, -20, 14, 23, 32, 41, 50, 59, 68, 77, 86, 95, 104, 113, 137, 146, 155, 164, 173,	-267, -253, -11, 6, 245, 259	-384, -134, 128, 378

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	182, 191, 200, 209, 218, 227, 236, 270, 279, 288, 297, 306, 315, 324, 333, 342, 351, 360, 369, 393, 402, 411, 420, 429, 438, 447, 456, 465, 474, 483, 492		
3	–497, –488, –479, –470, –461, –452, –443, –434, – 425, –416, –407, –398, –374, –365, –356, –347, – 338, –329, –320, –311, –302, –293, –284, –275, – 241, –232, –223, –214, –205, –196, –187, –178, – 169, –160, –151, –142, –118, –109, –100, –91, –82, –73, –64, –55, –46, –37, –28, –19, 15, 24, 33, 42, 51, 60, 69, 78, 87, 96, 105, 114, 138, 147, 156, 165, 174, 183, 192, 201, 210, 219, 228, 237, 271, 280, 289, 298, 307, 316, 325, 334, 343, 352, 361, 370, 394, 403, 412, 421, 430, 439, 448, 457, 466, 475, 484, 493	–266, –252, – 10, 7, 246, 260	–383, – 133, 129, 379
4	–496, –487, –478, –469, –460, –451, –442, –433, – 424, –415, –406, –397, –373, –364, –355, –346, – 337, –328, –319, –310, –301, –292, –283, –274, – 240, –231, –222, –213, –204, –195, –186, –177, – 168, –159, –150, –141, –117, –108, –99, –90, –81, – 72, –63, –54, –45, –36, –27, –18, 16, 25, 34, 43, 52, 61, 70, 79, 88, 97, 106, 115, 139, 148, 157, 166, 175, 184, 193, 202, 211, 220, 229, 238, 272, 281, 290, 299, 308, 317, 326, 335, 344, 353, 362, 371, 395, 404, 413, 422, 431, 440, 449, 458, 467, 476, 485, 494	–265, –251, – 9, 8, 247, 261	–382, – 132, 130, 380
5	–494, –485, –476, –467, –458, –449, –440, –431, – 422, –413, –404, –395, –371, –362, –353, –344, – 335, –326, –317, –308, –299, –290, –281, –272, – 238, –229, –220, –211, –202, –193, –184, –175, – 166, –157, –148, –139, –115, –106, –97, –88, –79, – 70, –61, –52, –43, –34, –25, –16, 18, 27, 36, 45, 54,	–263, –249, – 8, 9, 249, 263	–380, – 130, 132, 382

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	63, 72, 81, 90, 99, 108, 117, 141, 150, 159, 168, 177, 186, 195, 204, 213, 222, 231, 240, 274, 283, 292, 301, 310, 319, 328, 337, 346, 355, 364, 373, 397, 406, 415, 424, 433, 442, 451, 460, 469, 478, 487, 496		
6	–493, –484, –475, –466, –457, –448, –439, –430, –421, –412, –403, –394, –370, –361, –352, –343, –334, –325, –316, –307, –298, –289, –280, –271, –237, –228, –219, –210, –201, –192, –183, –174, –165, –156, –147, –138, –114, –105, –96, –87, –78, –69, –60, –51, –42, –33, –24, –15, 19, 28, 37, 46, 55, 64, 73, 82, 91, 100, 109, 118, 142, 151, 160, 169, 178, 187, 196, 205, 214, 223, 232, 241, 275, 284, 293, 302, 311, 320, 329, 338, 347, 356, 365, 374, 398, 407, 416, 425, 434, 443, 452, 461, 470, 479, 488, 497	–262, –248, –7, 10, 250, 264	–379, –129, 133, 383
7	–492, –483, –474, –465, –456, –447, –438, –429, –420, –411, –402, –393, –369, –360, –351, –342, –333, –324, –315, –306, –297, –288, –279, –270, –236, –227, –218, –209, –200, –191, –182, –173, –164, –155, –146, –137, –113, –104, –95, –86, –77, –68, –59, –50, –41, –32, –23, –14, 20, 29, 38, 47, 56, 65, 74, 83, 92, 101, 110, 119, 143, 152, 161, 170, 179, 188, 197, 206, 215, 224, 233, 242, 276, 285, 294, 303, 312, 321, 330, 339, 348, 357, 366, 375, 399, 408, 417, 426, 435, 444, 453, 462, 471, 480, 489, 498	–261, –247, –6, 11, 251, 265	–378, –128, 134, 384
8	–491, –482, –473, –464, –455, –446, –437, –428, –419, –410, –401, –392, –368, –359, –350, –341, –332, –323, –314, –305, –296, –287, –278, –269, –235, –226, –217, –208, –199, –190, –181, –172, –163, –154, –145, –136, –112, –103, –94, –85, –76, –	–260, –246, –5, 12, 252, 266	–377, –127, 135, 385

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	67, -58, -49, -40, -31, -22, -13, 21, 30, 39, 48, 57, 66, 75, 84, 93, 102, 111, 120, 144, 153, 162, 171, 180, 189, 198, 207, 216, 225, 234, 243, 277, 286, 295, 304, 313, 322, 331, 340, 349, 358, 367, 376, 400, 409, 418, 427, 436, 445, 454, 463, 472, 481, 490, 499		

[00233] As shown in Table 19, each 106-tone DRU includes 102 data subcarriers, and some (namely, the first part in Table 19: 96 data subcarriers) of the 102 data subcarriers include 48 high-frequency subcarriers (whose subcarrier indices are positive values) and 48 low-frequency subcarriers (whose subcarrier indices are negative values). If every 12 of the 96 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 9, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 24 and 34.

[00234] In other words, if indices of 96 data subcarriers of 102 data subcarriers included in each 106-tone DRU are sequentially arranged in a frequency direction and then divided into eight groups, and each group includes 12 data subcarriers. 12 data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 8.

[00235] Using a 106-tone DRU whose identifier is 1 in Table 19 as an example, 96 data subcarriers of 102 data subcarriers included in the 106-tone DRU are divided into the following eight groups: (1) [-499: 9: -400]; (2) [-376: 9: -277]; (3) [-243: 9: -144]; (4) [-120: 9: -21]; (5) [13: 9: 112]; (6) [136: 9: 235]; (7) [269: 9: 368]; and (8) [392: 9: 491]. (1) to (4) are low-frequency groups, and (5) to (8) are high-frequency groups. Absolute values of subcarrier index differences between (1) and (2), between (3) and (4), between (5) and (6), and between (7) and (8) are all 24. Absolute values of subcarrier index differences between (2) and (3), between (4) and (5), and between (6) and (7) are all 34. It may be learned that absolute values of index differences between adjacent groups are alternately 24 and 34.

[00236] As shown in Table 19, for identifiers 1 to 4, or 5 to 8, there is a fixed offset between indices of 96 data subcarriers (the first part) included in two 106-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 96 data subcarriers in a 106-tone DRU

whose identifier is i ($i = 1, 2, 3, 5, 6, \text{ or } 7$) all plus 1, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is $i + 1$. An offset between indices of 96 data subcarriers (the first part) in the 106-tone DRU whose identifier is 4 and indices of 96 data subcarriers in the 106-tone DRU whose identifier is 5 is 2. For example, indices of 96 data subcarriers in a 106-tone DRU whose identifier is 4 all plus 2, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is 5.

[00237] In addition to the 96 data subcarriers in the first part column of the foregoing table, each 106-tone DRU further includes six data subcarriers and four pilot subcarriers. In some embodiments, six data subcarriers and four pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, and data subcarriers in the first part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 19 shows an example, so that subcarriers included in the 106-tone DRU can be fully discrete.

[00238] With reference to the foregoing Table 16 or Table 17, it may be considered that a 106-tone DRU is obtained based on a 26-tone DRU or a 52-tone DRU. For example, the four pilot subcarriers included in the 106-tone DRU may be a part of a set of eight pilot subcarriers included in the corresponding four 26-tone DRUs. In addition, the other six data subcarriers included in the 106-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, and the pilot subcarriers, and the data subcarriers may be fully discrete, as shown in the "second part" column of Table 19.

[00239] As shown in Table 19, each 106-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers, and any two pilot subcarriers in a same DRU are not adjacent. The pilot subcarriers shown in Table 19 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity.

[00240] For example, Table 19 may be simplified and represented as the following Table 20. The "first part" column in Table 20 means that the first part of (96) data subcarriers in the 106-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 16. For example, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers (the first part) of 102 data subcarriers included in the 106-tone DRU include all data subcarriers of four 26-tone DRUs whose identifiers are 1, 10, 19, and 28 shown in Table 16. In another understanding, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers (the first part) of 102 data subcarriers included in the 106-tone DRU include all data subcarriers of two 52-tone DRUs whose identifiers are 1 and 9 shown in Table 17.

Table 20

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part	
1	1, 10, 19, 28	−259, −135, −12, 5, 253, 377	−268, −126, 244, 386
2	2, 11, 20, 29	−267, −253, −11, 6, 245, 259	−384, −134, 128, 378
3	3, 12, 21, 30	−266, −252, −10, 7, 246, 260	−383, −133, 129, 379
4	4, 13, 22, 31	−265, −251, −9, 8, 247, 261	−382, −132, 130, 380
5	6, 15, 24, 33	−263, −249, −8, 9, 249, 263	−380, −130, 132, 382
6	7, 16, 25, 34	−262, −248, −7, 10, 250, 264	−379, −129, 133, 383
7	8, 17, 26, 35	−261, −247, −6, 11, 251, 265	−378, −128, 134, 384
8	9, 18, 27, 36	−260, −246, −5, 12, 252, 266	−377, −127, 135, 385

[00241] In addition, in this embodiment of this disclosure, the identifier of the 106-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 106-tone DRU.

5 For example, an identifier of a 106-tone DRU having a lowest-frequency index −499 is 1.

[00242] According to the design of the 106-tone DRU shown in Table 19 or Table 20 in this embodiment of this disclosure, compared with the continuous 106-tone RU in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 6.5.

10 **[00243]** In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 106-tone DRU in 80 MHz is described by using Table 20. It may be understood that the foregoing described manner of determining a 106-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 106-tone DRU can be fully discrete. In another embodiment, a 106-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of four 26-tone DRUs whose identifiers are 1 to 4 is determined as the first part of data subcarriers of the 106-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than −499, correspondingly the lowest-frequency index of the data subcarrier included in the 106-tone DRU also adaptively changes to another value.

20 **[00244]** In a tone plan solution of a DRU, the 80 MHz bandwidth includes four 242-tone DRUs, and each 242-tone DRU includes 234 data subcarriers and eight pilot subcarriers. For example, Table 21 shows an example of four 242-tone DRUs corresponding to the 80 MHz bandwidth, and

shows indices of 234 data subcarriers and indices of eight pilot subcarriers included in each 242-tone DRU. As shown in Table 21, the 234 data subcarriers may be considered as three parts. A first part of data subcarriers includes 192 data subcarriers, a second part of data subcarriers includes 24 data subcarriers, a third part of data subcarriers includes 18 data subcarriers, and a lowest-frequency index of a data subcarrier in a 242-tone DRU whose identifier is 1 is -499. It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part in Table 21 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 242-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 242-tone DRU.

Table 21

Identifier of a 242-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	-499, -494, -490, -485, -481, -476, -472, -467, -463, -458, -454, -449, -445, -440, -436, -431, -427, -422, -418, -413, -409, -404, -400, -395, -376, -371, -367, -362, -358, -353, -349, -344, -340, -335, -331, -326, -322, -317, -313, -308, -304, -299, -295, -290, -286, -281, -277, -272, -243, -238, -234, -229, -225, -220, -216, -211, -207, -202, -198, -193, -189, -184, -180, -175, -171, -166, -162, -157, -153, -148, -144, -139, -120, -115, -111, -106, -102, -97, -93, -88, -84, -79, -75, -70, -66, -61, -57, -52, -48, -43, -39, -34, -30, -25, -21, -16, 13, 18, 22, 27, 31, 36, 40, 45, 49, 54, 58, 63, 67, 72, 76, 81, 85, 90, 94, 99,	-495, -477, -459, -441, -423, -405, -372, -354, -336, -318, -300, -282, -239, -221, -203, -185, -167, -149, -116, -98, -80, -62, -44, -26	-264, -263, -259, -249, -135, -131, -12, -8, -4, 5, 9, 121, 249, 253, 254, 263, 377, 387	-380, -268, -130, -126, 132, 244, 382, 386

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	103, 108, 112, 117, 136, 141, 145, 150, 154, 159, 163, 168, 172, 177, 181, 186, 190, 195, 199, 204, 208, 213, 217, 222, 226, 231, 235, 240, 269, 274, 278, 283, 287, 292, 296, 301, 305, 310, 314, 319, 323, 328, 332, 337, 341, 346, 350, 355, 359, 364, 368, 373, 392, 397, 401, 406, 410, 415, 419, 424, 428, 433, 437, 442, 446, 451, 455, 460, 464, 469, 473, 478, 482, 487, 491, 496			
2	–498, –493, –489, –484, –480, –475, –471, –466, –462, –457, –453, –448, –444, –439, –435, –430, –426, –421, –417, –412, –408, –403, –399, –394, –375, –370, –366, –361, –357, –352, –348, –343, –339, –334, –330, –325, –321, –316, –312, –307, –303, –298, –294, –289, –285, –280, –276, –271, –242, –237, –233, –228, –224, –219, –215, –210, –206, –201, –197, –192, –188, –183, –179, –174, –170, –165, –161, –156, –152, –147, –143, –138, –119, –114, –110, –105, –101, –96, –92, –87, –83, –78, –74, –69, –65, – 60, –56, –51, –47, –42, –38, –33, –29, –24, –20, –15, 14, 19, 23, 28, 32, 37, 41, 46, 50, 55, 59, 64, 68, 73, 77, 82, 86, 91, 95, 100, 104, 109, 113, 118, 137, 142, 146, 151, 155, 160, 164, 169, 173, 178, 182, 187, 191, 196, 200, 205, 209, 214, 218, 223, 227, 232, 236, 241, 270, 275, 279, 284, 288, 293, 297, 302, 306, 311, 315, 320, 324, 329, 333, 338, 342, 347, 351, 356,	–486, – 468, –450, –432, – 414, –396, –363, – 345, –327, –309, – 291, –273, –230, – 212, –194, –176, – 158, –140, –107, –89, –71, –53, –35, –17	–381, – 267, –262, –253, – 250, –248, –11, –7, – 3, 6, 10, 122, 245, 250, 255, 259, 264, 388	–384, – 379, –134, –129, 128, 133, 378, 383

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	360, 365, 369, 374, 393, 398, 402, 407, 411, 416, 420, 425, 429, 434, 438, 443, 447, 452, 456, 461, 465, 470, 474, 479, 483, 488, 492, 497			
3	-497, -492, -488, -483, -479, -474, -470, -465, -461, -456, -452, -447, -443, -438, -434, -429, -425, -420, -416, -411, -407, -402, -398, -393, -374, -369, -365, -360, -356, -351, -347, -342, -338, -333, -329, -324, -320, -315, -311, -306, -302, -297, -293, -288, -284, -279, -275, -270, -241, -236, -232, -227, -223, -218, -214, -209, -205, -200, -196, -191, -187, -182, -178, -173, -169, -164, -160, -155, -151, -146, -142, -137, -118, -113, -109, -104, -100, -95, -91, -86, -82, -77, -73, -68, -64, - 59, -55, -50, -46, -41, -37, -32, -28, -23, -19, -14, 15, 20, 24, 29, 33, 38, 42, 47, 51, 56, 60, 65, 69, 74, 78, 83, 87, 92, 96, 101, 105, 110, 114, 119, 138, 143, 147, 152, 156, 161, 165, 170, 174, 179, 183, 188, 192, 197, 201, 206, 210, 215, 219, 224, 228, 233, 237, 242, 271, 276, 280, 285, 289, 294, 298, 303, 307, 312, 316, 321, 325, 330, 334, 339, 343, 348, 352, 357, 361, 366, 370, 375, 394, 399, 403, 408, 412, 417, 421, 426, 430, 435, 439, 444, 448, 453, 457, 462, 466, 471, 475, 480, 484, 489, 493, 498	17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	-266, - 261, -252, -247, -10, -6, 3, 7, 11, 123, 246, 248, 251, 256, 260, 265, 381, 389	-383, - 378, -133, -128, 129, 134, 379, 384
4	-496, -491, -487, -482, -478, -473, -469, -464, -460, -455, -451, -446, -442, -437,	26, 44, 62, 80, 98,	-265, - 260, -251,	-382, - 377, -132,

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-433, -428, -424, -419, -415, -410, -406, -401, -397, -392, -373, -368, -364, -359, -355, -350, -346, -341, -337, -332, -328, -323, -319, -314, -310, -305, -301, -296, -292, -287, -283, -278, -274, -269, -240, -235, -231, -226, -222, -217, -213, -208, -204, -199, -195, -190, -186, -181, -177, -172, -168, -163, -159, -154, -150, -145, -141, -136, -117, -112, -108, -103, -99, - 94, -90, -85, -81, -76, -72, -67, -63, -58, -54, -49, -45, -40, -36, -31, -27, -22, - 18, -13, 16, 21, 25, 30, 34, 39, 43, 48, 52, 57, 61, 66, 70, 75, 79, 84, 88, 93, 97, 102, 106, 111, 115, 120, 139, 144, 148, 153, 157, 162, 166, 171, 175, 180, 184, 189, 193, 198, 202, 207, 211, 216, 220, 225, 229, 234, 238, 243, 272, 277, 281, 286, 290, 295, 299, 304, 308, 313, 317, 322, 326, 331, 335, 340, 344, 349, 353, 358, 362, 367, 371, 376, 395, 400, 404, 409, 413, 418, 422, 427, 431, 436, 440, 445, 449, 454, 458, 463, 467, 472, 476, 481, 485, 490, 494, 499	116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	-246, -9, -5, 4, 8, 12, 124, 131, 247, 252, 257, 261, 262, 266, 390	-127, 130, 135, 380, 385

[00245] As shown in Table 21, each 242-tone DRU includes 234 data subcarriers, and the first part (192 data subcarriers) of the 234 data subcarriers include 96 high-frequency subcarriers (whose subcarrier indices are positive values) and 96 low-frequency subcarriers (whose subcarrier indices are negative values). If every 24 of the 192 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are alternately 5 and 4. In addition, absolute values of index differences between data subcarriers

of two adjacent groups are alternately 19 and 29.

[00246] In other words, for the 24 data subcarriers in the same group, an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in odd-numbered locations is 9, and an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in even-numbered locations is 9. An absolute value of an index difference between a data subcarrier in an even-numbered location and a previous adjacent data subcarrier is 5. Correspondingly, an absolute value of an index difference between a data subcarrier in an odd-numbered location and a previous adjacent data subcarrier is 4. In some embodiments, the 24 data subcarriers in the same group may be considered to include two sequences, for example, an odd-numbered location sequence and an even-numbered location sequence. An absolute value of an index difference between adjacent data subcarriers in each sequence is 9. For example, indices of the first 24 data subcarriers of the first part of data subcarriers of the 242-tone DRU whose identifier is 1 include -499, -494, -490, -485, -481, -476, -472, -467, -463, -458, -454, -449, -445, -440, -436, -431, -427, -422, -418, -413, -409, -404, -400, and -395, and may be represented as a combination of two sequences [-499: 9: -400] and [-494: 9: -395].

[00247] In other words, it is assumed that indices of 192 data subcarriers of 234 data subcarriers included in each 242-tone DRU are sequentially arranged in a frequency direction and then divided into eight groups, and each group includes 24 data subcarriers. Absolute values of index differences between 24 data subcarriers in a same group are alternately 5 and 4.

[00248] As shown in Table 21, there is a fixed offset between indices of 192 data subcarriers (the first part) included in two 242-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 192 data subcarriers in a 242-tone DRU whose identifier is i ($i = 1, 2$, or 3) all plus 1, to obtain indices of 192 data subcarriers in a 242-tone DRU whose identifier is $i + 1$.

[00249] As shown in Table 21, each 242-tone DRU includes 234 data subcarriers. If every six data subcarriers of the second part (24 data subcarriers) of the 234 data subcarriers may be considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33. In addition, indices of 24 data subcarriers in the second part of the 242-tone DRU whose identifier is i ($i = 1$ or 3) all plus 9, to obtain indices of 24 data subcarriers in the second part of the 242-tone DRU whose identifier is $i + 1$. Indices of 24 data subcarriers in the second part of the 242-tone DRU whose identifier is 2 all plus 503, to obtain indices of 24 data subcarriers in the second part of the 242-tone DRU whose identifier is 3.

[00250] In addition to the 192 data subcarriers in the first part column and the 24 data subcarriers in the second part column of the foregoing table, each 242-tone DRU further includes 18 data subcarriers (the third part) and eight pilot subcarriers. In some embodiments, 18 data subcarriers and eight pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 21 shows an example, so that subcarriers included in the 242-tone DRU can be fully discrete.

[00251] With reference to the foregoing Table 16, it may be considered that a 242-tone DRU is obtained based on a 26-tone DRU. For example, Table 21 may be simplified and represented as the following Table 22. The "first part" column in Table 22 means that the first part of (192) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 16. The "second part" column in Table 22 means that the second part of (24) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 16. For example, a 242-tone DRU whose identifier is 1 is used as an example. 192 data subcarriers (the first part) included in the 242-tone DRU include all data subcarriers in eight 26-tone DRUs whose identifiers are 1, 6, 10, 15, 19, 24, 28, and 33 shown in Table 16, and 24 data subcarriers (the second part) included in the 242-tone DRU include all data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 16.

Table 22

Identifier of a 242-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 6, 10, 15, 19, 24, 28, 33	5	-264, -263, -259, -249, -135, -131, -12, -8, -4, 5, 9, 121, 249, 253, 254, 263, 377, 387	-380, -268, -130, -126, 132, 244, 382, 386
2	2, 7, 11, 16, 20, 25, 29, 34	14	-381, -267, -262, -253, -250, -248, -11, -7, -3, 6, 10, 122, 245,	-384, -379, -134, -129,

Identifier of a 242-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			250, 255, 259, 264, 388	128, 133, 378, 383
3	3, 8, 12, 17, 21, 26, 30, 35	23	−266, −261, −252, −247, −10, −6, 3, 7, 11, 123, 246, 248, 251, 256, 260, 265, 381, 389	−383, −378, −133, −128, 129, 134, 379, 384
4	4, 9, 13, 18, 22, 27, 31, 36	32	−265, −260, −251, −246, −9, −5, 4, 8, 12, 124, 131, 247, 252, 257, 261, 262, 266, 390	−382, −377, −132, −127, 130, 135, 380, 385

[00252] For example, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 18 pilot subcarriers included in the corresponding nine 26-tone DRUs. Alternatively, in some embodiments, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 16 pilot subcarriers included in the eight 26-tone DRUs in the corresponding first part. In addition, the other 18 data subcarriers included in the 242-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, the data subcarriers in the second part column, and the pilot subcarriers, and the data subcarriers may be fully discrete.

[00253] As shown in Table 21, each 242-tone DRU includes eight pilot subcarriers, and any two pilot subcarriers in a same DRU are not adjacent. The pilot subcarriers shown in Table 21 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity.

[00254] In addition, in this embodiment of this disclosure, the identifier of the 242-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 242-tone DRU. For example, an identifier of a 242-tone DRU having a lowest-frequency index −499 is 1.

[00255] According to the design of the 242-tone DRU shown in Table 21 or Table 22 in this embodiment of this disclosure, compared with the continuous 242-tone RU in FIG. 3, at a same

power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 3.25.

[00256] In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 106-tone DRU in 80 MHz is described by using Table 22. It may be understood that the foregoing described manner of determining a 242-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 242-tone DRU can be fully discrete. In another embodiment, a 242-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of data subcarriers of nine 26-tone DRUs whose identifiers are 1 to 9 is determined as the first part and the second part of the 242-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again.

[00257] In addition, it should be noted that the 242-tone DRU in 80 MHz described with reference to Table 21 and Table 22 is merely an example. For example, 234 data subcarriers in the 242-tone DRU may alternatively be divided into three parts in another manner, for example, a first part, a second part, and a third part shown in Table 23 below. In Table 23, the "first part" column means that a first part of data subcarriers (204) in the 242-tone DRU include a combination of data subcarriers in corresponding 106-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The first part of (204) data subcarriers included in the 242-tone DRU include all data subcarriers of 106-tone DRUs whose identifiers are 1 and 5 shown in Table 19. In Table 23, the "second part" column means that the second part of (24) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The second part of (24) data subcarriers included in the 242-tone DRU include data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 16.

Table 23

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 5	5	-264, -131, -4, 121, 254, 387	-380, -268, -130, -126, 132, 244, 382, 386
2	2, 6	14	-381, -250, -3, 122, 255, 388	-384, -379, -134, -129, 128, 133, 378, 383
3	3, 7	23	3, 123, 248,	-383, -378, -133, -128,

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			256, 381, 389	129, 134, 379, 384
4	4, 8	32	4, 124, 131, 257, 262, 390	−382, −377, −132, −127, 130, 135, 380, 385

[00258] It may be understood that the manner of determining the 242-tone DRU based on the 106-tone DRU and the 26-tone DRU described in the foregoing Table 23 is merely an example, and subcarriers in the 242-tone DRU can be fully discrete. In another embodiment, the 242-tone DRU may alternatively be determined in another manner. This is not limited in this disclosure. Details are not described again.

[00259] In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than −499, correspondingly the lowest-frequency index of the data subcarrier included in the 242-tone DRU also adaptively changes to another value.

[00260] Tone plans of 26-tone DRUs, 52-tone DRUs, 106-tone DRUs, and 242-tone DRUs in 80 MHz are separately described above with reference to Table 16 to Table 23. An index −499 is used as a lowest-frequency index of a data subcarrier.

[00261] The foregoing content describes in detail subcarriers (data subcarriers and pilot subcarriers) separately included in different DRUs in the 80 MHz bandwidth. Further, for a characteristic followed by a tone plan of the DRUs in the 80 MHz bandwidth and related description, refer to descriptions of the 40 MHz bandwidth. Details are not described again.

[00262] In some embodiments, data subcarriers included in the 26-tone DRU in 80 MHz may be obtained by shifting leftward by n_{11} , shifting rightward by n_{12} , shifting leftward by n_{21} , and shifting rightward by n_{22} based on Table 12. Alternatively, if $n_{11} = n_{12} = 128$, data subcarriers included in the 26-tone DRU in 80 MHz may be obtained by shifting leftward by n_{21} and/or shifting rightward by n_{22} based on the 26-tone DRU in 40 MHz (Table 5). In an example of Table 16, $n_{21} = n_{22} = 256$. However, n_{21} and n_{22} may alternatively be other values, and are not listed herein again.

[00263] Correspondingly, Table 16 may also be simplified and represented as the following Table 24, where numbers in brackets {} are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12, and may be understood as being obtained by shifting leftward/rightward by 256 based on Table 5.

Table 24

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$\{1\} - 128, \{1\} - 384$	-268, -135
2	$\{2\} - 128, \{2\} - 384$	-267, -134
3	$\{3\} - 128, \{3\} - 384$	-266, -133
4	$\{4\} - 128, \{4\} - 384$	-265, -132
5	$\{5\} - 128, \{5\} - 384$	-264, -131
6	$\{6\} - 128, \{6\} - 384$	-263, -130
7	$\{7\} - 128, \{7\} - 384$	-262, -129
8	$\{8\} - 128, \{8\} - 384$	-261, -128
9	$\{9\} - 128, \{9\} - 384$	-260, -127
10	$\{10\} - 128, \{10\} - 384$	-259, -126
11	$\{11\} - 128, \{11\} - 384$	-384, -253
12	$\{12\} - 128, \{12\} - 384$	-383, -252
13	$\{13\} - 128, \{13\} - 384$	-382, -251
14	$\{14\} - 128, \{14\} - 384$	-381, -250
15	$\{15\} - 128, \{15\} - 384$	-380, -249
16	$\{16\} - 128, \{16\} - 384$	-379, -248
17	$\{17\} - 128, \{17\} - 384$	-378, -247
18	$\{18\} - 128, \{18\} - 384$	-377, -246
19	$\{1\} + 128, \{1\} + 384$	244, 377
20	$\{2\} + 128, \{2\} + 384$	245, 378
21	$\{3\} + 128, \{3\} + 384$	246, 379
22	$\{4\} + 128, \{4\} + 384$	247, 380
23	$\{5\} + 128, \{5\} + 384$	248, 381
24	$\{6\} + 128, \{6\} + 384$	249, 382
25	$\{7\} + 128, \{7\} + 384$	250, 383
26	$\{8\} + 128, \{8\} + 384$	251, 384
27	$\{9\} + 128, \{9\} + 384$	252, 385
28	$\{10\} + 128, \{10\} + 384$	253, 386
29	$\{11\} + 128, \{11\} + 384$	128, 259
30	$\{12\} + 128, \{12\} + 384$	129, 260

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
31	$\{13\} + 128, \{13\} + 384$	130, 261
32	$\{14\} + 128, \{14\} + 384$	131, 262
33	$\{15\} + 128, \{15\} + 384$	132, 263
34	$\{16\} + 128, \{16\} + 384$	133, 264
35	$\{17\} + 128, \{17\} + 384$	134, 265
36	$\{18\} + 128, \{18\} + 384$	135, 266

[00264] Similarly, Table 17 may also be simplified and represented as the following Table 25, where numbers in brackets $\{\}$ are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12.

5

Table 25

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$\{1\} \pm 128, \{1\} \pm 384$	-268, -135, 244, 377
2	$\{2\} \pm 128, \{2\} \pm 384$	-267, -134, 245, 378
3	$\{3\} \pm 128, \{3\} \pm 384$	-266, -133, 246, 379
4	$\{4\} \pm 128, \{4\} \pm 384$	-265, -132, 247, 380
5	$\{6\} \pm 128, \{6\} \pm 384$	-263, -130, 249, 382
6	$\{7\} \pm 128, \{7\} \pm 384$	-262, -129, 250, 383
7	$\{8\} \pm 128, \{8\} \pm 384$	-261, -128, 251, 384
8	$\{9\} \pm 128, \{9\} \pm 384$	-260, -127, 252, 385
9	$\{10\} \pm 128, \{10\} \pm 384$	-259, -126, 253, 386
10	$\{11\} \pm 128, \{11\} \pm 384$	-384, -253, 128, 259
11	$\{12\} \pm 128, \{12\} \pm 384$	-383, -252, 129, 260
12	$\{13\} \pm 128, \{13\} \pm 384$	-382, -251, 130, 261
13	$\{15\} \pm 128, \{15\} \pm 384$	-380, -249, 132, 263
14	$\{16\} \pm 128, \{16\} \pm 384$	-379, -248, 133, 264
15	$\{17\} \pm 128, \{17\} \pm 384$	-378, -247, 134, 265
16	$\{18\} \pm 128, \{18\} \pm 384$	-377, -246, 135, 266

[00265] It may be understood that, for the 106-tone DRU in 80 MHz, with reference to the foregoing Table 20 and Table 24, indices of data subcarriers included in the 106-tone DRU may

also be represented as variations based on Table 12. For the 242-tone DRU in 80 MHz, with reference to the foregoing Table 22 and Table 24, indices of data subcarriers included in the 242-tone DRU may also be represented as variations based on Table 12. For brevity, the examples are not elaborated herein.

5 **[00266]** In addition, it may be understood that, although an embodiment of obtaining DRUs of various sizes in 80 MHz based on Table 12 is described, this disclosure is not limited thereto. For example, an index of a subcarrier included in each DRU may be determined without considering the grouping in Table 12. For example, an index of a subcarrier included in each DRU may be determined based on another grouping form. This is not limited in this disclosure.

10 **[00267]** For a 160 MHz bandwidth:

[00268] The 160 MHz bandwidth includes 2048 subcarriers in total, and the subcarrier index range is $[-1024, 1023]$. The 160 MHz bandwidth may include 72 26-tone RUs.

[00269] In a tone plan solution of a DRU, the 160 MHz bandwidth includes 72 26-tone DRUs, and each 26-tone DRU includes 24 data subcarriers and two pilot subcarriers. For example, Table 15 26 shows an example of 72 26-tone DRUs corresponding to the 160 MHz bandwidth, and shows indices of 24 data subcarriers and indices of two pilot subcarriers included in each 26-tone DRU, and a lowest-frequency index of a data subcarrier in a 26-tone DRU whose identifier is 1 is -1011 .

Table 26

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$-1011, -993, -975, -957, -939, -921, -888, -870, -852, -834, -816, -798, -755, -737, -719, -701, -683, -665, -632, -614, -596, -578, -560, -542$	$-780, -647$
2	$-1010, -992, -974, -956, -938, -920, -887, -869, -851, -833, -815, -797, -754, -736, -718, -700, -682, -664, -631, -613, -595, -577, -559, -541$	$-779, -646$
3	$-1009, -991, -973, -955, -937, -919, -886, -868, -850, -832, -814, -796, -753, -735, -717, -699, -681, -663, -630, -612, -594, -576, -558, -540$	$-778, -645$
4	$-1008, -990, -972, -954, -936, -918, -885, -867, -849, -831, -813, -795, -752, -734, -716, -698, -680, -662, -629, -611, -593, -575, -557, -539$	$-777, -644$

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
5	–1007, –989, –971, –953, –935, –917, –884, –866, –848, –830, –812, –794, –751, –733, –715, –697, –679, –661, –628, –610, –592, –574, –556, –538	–776, –643
6	–1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537	–775, –642
7	–1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, –810, –792, –749, –731, –713, –695, –677, –659, –626, –608, –590, –572, –554, –536	–774, –641
8	–1004, –986, –968, –950, –932, –914, –881, –863, –845, –827, –809, –791, –748, –730, –712, –694, –676, –658, –625, –607, –589, –571, –553, –535	–773, –640
9	–1003, –985, –967, –949, –931, –913, –880, –862, –844, –826, –808, –790, –747, –729, –711, –693, –675, –657, –624, –606, –588, –570, –552, –534	–772, –639
10	–1002, –984, –966, –948, –930, –912, –879, –861, –843, –825, –807, –789, –746, –728, –710, –692, –674, –656, –623, –605, –587, –569, –551, –533	–771, –638
11	–1001, –983, –965, –947, –929, –911, –878, –860, –842, –824, –806, –788, –745, –727, –709, –691, –673, –655, –622, –604, –586, –568, –550, –532	–896, –765
12	–1000, –982, –964, –946, –928, –910, –877, –859, –841, –823, –805, –787, –744, –726, –708, –690, –672, –654, –621, –603, –585, –567, –549, –531	–895, –764
13	–999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530	–894, –763
14	–998, –980, –962, –944, –926, –908, –875, –857, –839, –821, –803, –785, –742, –724, –706, –688, –670, –652, –619, –601, –583, –565, –547, –529	–893, –762
15	–997, –979, –961, –943, –925, –907, –874, –856, –838, –820, –	–892, –761

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	802, -784, -741, -723, -705, -687, -669, -651, -618, -600, -582, -564, -546, -528	
16	-996, -978, -960, -942, -924, -906, -873, -855, -837, -819, -801, -783, -740, -722, -704, -686, -668, -650, -617, -599, -581, -563, -545, -527	-891, -760
17	-995, -977, -959, -941, -923, -905, -872, -854, -836, -818, -800, -782, -739, -721, -703, -685, -667, -649, -616, -598, -580, -562, -544, -526	-890, -759
18	-994, -976, -958, -940, -922, -904, -871, -853, -835, -817, -799, -781, -738, -720, -702, -684, -666, -648, -615, -597, -579, -561, -543, -525	-889, -758
19	-499, -481, -463, -445, -427, -409, -376, -358, -340, -322, -304, -286, -243, -225, -207, -189, -171, -153, -120, -102, -84, -66, -48, -30	-268, -135
20	-498, -480, -462, -444, -426, -408, -375, -357, -339, -321, -303, -285, -242, -224, -206, -188, -170, -152, -119, -101, -83, -65, -47, -29	-267, -134
21	-497, -479, -461, -443, -425, -407, -374, -356, -338, -320, -302, -284, -241, -223, -205, -187, -169, -151, -118, -100, -82, -64, -46, -28	-266, -133
22	-496, -478, -460, -442, -424, -406, -373, -355, -337, -319, -301, -283, -240, -222, -204, -186, -168, -150, -117, -99, -81, -63, -45, -27	-265, -132
23	-495, -477, -459, -441, -423, -405, -372, -354, -336, -318, -300, -282, -239, -221, -203, -185, -167, -149, -116, -98, -80, -62, -44, -26	-264, -131
24	-494, -476, -458, -440, -422, -404, -371, -353, -335, -317, -299, -281, -238, -220, -202, -184, -166, -148, -115, -97, -79, -61, -43, -25	-263, -130
25	-493, -475, -457, -439, -421, -403, -370, -352, -334, -316, -298, -280, -237, -219, -201, -183, -165, -147, -114, -96, -78,	-262, -129

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	–60, –42, –24	
26	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23	–261, –128
27	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22	–260, –127
28	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21	–259, –126
29	–489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20	–384, –253
30	–488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19	–383, –252
31	–487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18	–382, –251
32	–486, –468, –450, –432, –414, –396, –363, –345, –327, –309, –291, –273, –230, –212, –194, –176, –158, –140, –107, –89, –71, –53, –35, –17	–381, –250
33	–485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16	–380, –249
34	–484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15	–379, –248
35	–483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14	–378, –247

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
36	–482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13	–377, –246
37	13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482	244, 377
38	14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	245, 378
39	15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484	246, 379
40	16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	247, 380
41	17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	248, 381
42	18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	249, 382
43	19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	250, 383
44	20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	251, 384
45	21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	252, 385
46	22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	253, 386
47	23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	128, 259
48	24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	129, 260
49	25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494	130, 261
50	26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	131, 262

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
51	27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	132, 263
52	28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	133, 264
53	29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	134, 265
54	30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499	135, 266
55	525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994	756, 889
56	526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	757, 890
57	527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996	758, 891
58	528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997	759, 892
59	529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	760, 893
60	530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999	761, 894
61	531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000	762, 895
62	532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001	763, 896
63	533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002	764, 897
64	534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003	765, 898
65	535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	640, 771
66	536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	641, 772

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005	
67	537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006	642, 773
68	538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007	643, 774
69	539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008	644, 775
70	540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009	645, 776
71	541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	646, 777
72	542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011	647, 778

[00270] As shown in Table 26, the 72 26-tone DRUs corresponding to the 160 MHz bandwidth include 36 high-frequency 26-tone DRUs and 36 low-frequency 26-tone DRUs, where subcarrier indices of 26 subcarriers in a high-frequency 26-tone DRU are all positive values, and subcarrier indices of 26 subcarriers in a low-frequency 26-tone DRU are all negative values.

[00271] Each 26-tone DRU includes 24 data subcarriers. If every six data subcarriers of the 24 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33.

[00272] In other words, it is assumed that indices of 24 data subcarriers included in each 26-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00273] In addition, in every 18 26-tone DRUs, there is a fixed offset between indices of data subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 24 data subcarriers in a 26-tone DRU whose identifier is i ($i = 1, 2, \dots, \text{or } 17; \text{ or } 19, 20, \dots, \text{or } 35; \text{ or } 37, 38, \dots, \text{or } 53; \text{ or } 55, 56, \dots, \text{or } 71$) all plus 1, to obtain indices of 24

data subcarriers in a 26-tone DRU whose identifier is $i + 1$. In addition, there is an offset 495 between 18 different 26-tone DRUs, that is, between a 26-tone DRU whose identifier is 18 and a 26-tone DRU whose identifier is 19, between a 26-tone DRU whose identifier is 36 and a 26-tone DRU whose identifier is 37, and between a 26-tone DRU whose identifier is 54 and a 26-tone DRU whose identifier is 55.

[00274] In Table 26, the identifier of the 26-tone DRU may be based on an index of a lowest-frequency subcarrier included in the 26-tone DRU. In other words, an identifier of a 26-tone DRU having a data subcarrier with a minimum value index is 1. As shown in Table 26, in all data subcarriers in the "index of a data subcarrier" column, a minimum value index is -1011 . Therefore, an identifier of a 26-tone DRU in which the subcarrier is located is 1. In addition, a minimum value index other than that of the 26-tone DRU whose identifier is 1 is -1010 . Therefore, the identifier of the 26-tone DRU in which the subcarrier is located is 2.

[00275] It may be understood that although the lowest-frequency index shown in Table 26 is -1011 , the value is merely an example. For example, the value may be any integer from -1018 to -1006 .

[00276] As shown in Table 26, each 26-tone DRU further includes two pilot subcarriers. For 26-tone DRUs whose identifiers are 1 to 10, 19 to 28, 37 to 46, or 55 to 64, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 133. For 26-tone DRUs whose identifiers are 11 to 18, 29 to 36, 47 to 54, or 65 to 72, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 131.

[00277] As shown in Table 26, for identifiers 1 to 10, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 11 to 18, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 19 to 28, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 29 to 36, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 37 to 46, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 47 to 54, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 55 to 64, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For identifiers 65 to 72, there is a fixed offset between indices of pilot subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of two pilot subcarriers in a 26-tone DRU whose identifier is i ($i = 1$ to 9, 11

to 17, 19 to 27, 29 to 35, 37 to 45, 47 to 53, 55 to 63, or 65 to 71) all plus 1, to obtain indices of two pilot subcarriers in a 26-tone DRU whose identifier is $i + 1$.

[00278] In this embodiment of this disclosure, for the 160 MHz bandwidth, a manner of determining two pilot subcarriers in a 26-tone DRU is similar to the foregoing manner of determining the two pilot subcarriers in the 26-tone DRU for the 40 MHz bandwidth. The pilot subcarriers shown in Table 26 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity. Details are not described herein again.

[00279] It may be understood that the pilot subcarriers shown in Table 26 are merely examples, and other pilot subcarriers may alternatively be used. For example, spacings between two pilot subcarriers in different 26-tone DRUs may be unequal to each other.

[00280] In this way, for the 160 MHz bandwidth, through the design of the 26-tone DRU shown in Table 26, compared with the continuous 26-tone RU in the 160 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00281] The foregoing describes a tone plan solution of the 26-tone DRU in the 160 MHz bandwidth with reference to Table 26. The solution is merely an example. A person skilled in the art may obtain another solution on this basis. For example, the lowest-frequency index is no longer -1011 but another value. For example, an index of a pilot subcarrier is determined by using another solution. In addition, the tone plan of other DRUs described below in this disclosure may also be similarly varied, and these variations are not described below for each DRU.

[00282] In a tone plan solution of a DRU, the 160 MHz bandwidth includes 32 52-tone DRUs, and each 52-tone DRU includes 48 data subcarriers and four pilot subcarriers. For example, Table 27 shows an example of 32 52-tone DRUs corresponding to the 160 MHz bandwidth, and shows indices of 48 data subcarriers and indices of four pilot subcarriers included in each 52-tone DRU, and a lowest-frequency index of a data subcarrier in a 52-tone DRU whose identifier is 1 is -1011 .

Table 27

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$-1011, -993, -975, -957, -939, -921, -888, -870, -852, -834, -816, -798, -755, -737, -719, -701, -683, -665, -632, -614, -596, -578, -560, -542, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446,$	$-780, -647, 244, 377$

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	464, 482	
2	–1010, –992, –974, –956, –938, –920, –887, –869, –851, –833, –815, –797, –754, –736, –718, –700, –682, –664, –631, –613, –595, –577, –559, –541, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	–779, –646, 245, 378
3	–1009, –991, –973, –955, –937, –919, –886, –868, –850, –832, –814, –796, –753, –735, –717, –699, –681, –663, –630, –612, –594, –576, –558, –540, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484	–778, –645, 246, 379
4	–1008, –990, –972, –954, –936, –918, –885, –867, –849, –831, –813, –795, –752, –734, –716, –698, –680, –662, –629, –611, –593, –575, –557, –539, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	–777, –644, 247, 380
5	–1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	–775, –642, 249, 382
6	–1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, –810, –792, –749, –731, –713, –695, –677, –659, –626, –608, –590, –572, –554, –536, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	–774, –641, 250, 383
7	–1004, –986, –968, –950, –932, –914, –881, –863, –845, –827, –809, –791, –748, –730, –712, –694, –676, –658, –625, –607, –589, –571, –553, –535, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	–773, –640, 251, 384

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
8	–1003, –985, –967, –949, –931, –913, –880, –862, –844, –826, –808, –790, –747, –729, –711, –693, –675, –657, –624, –606, –588, –570, –552, –534, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	–772, –639, 252, 385
9	–1002, –984, –966, –948, –930, –912, –879, –861, –843, –825, –807, –789, –746, –728, –710, –692, –674, –656, –623, –605, –587, –569, –551, –533, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	–771, –638, 253, 386
10	–1001, –983, –965, –947, –929, –911, –878, –860, –842, –824, –806, –788, –745, –727, –709, –691, –673, –655, –622, –604, –586, –568, –550, –532, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	–896, –765, 128, 259
11	–1000, –982, –964, –946, –928, –910, –877, –859, –841, –823, –805, –787, –744, –726, –708, –690, –672, –654, –621, –603, –585, –567, –549, –531, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	–895, –764, 129, 260
12	–999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494	–894, –763, 130, 261
13	–997, –979, –961, –943, –925, –907, –874, –856, –838, –820, –802, –784, –741, –723, –705, –687, –669, –651, –618, –600, –582, –564, –546, –528, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	–892, –761, 132, 263
14	–996, –978, –960, –942, –924, –906, –873, –855, –837, –819, –	–891, –

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	801, -783, -740, -722, -704, -686, -668, -650, -617, -599, -581, -563, -545, -527, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	760, 133, 264
15	-995, -977, -959, -941, -923, -905, -872, -854, -836, -818, -800, -782, -739, -721, -703, -685, -667, -649, -616, -598, -580, -562, -544, -526, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	-890, -759, 134, 265
16	-994, -976, -958, -940, -922, -904, -871, -853, -835, -817, -799, -781, -738, -720, -702, -684, -666, -648, -615, -597, -579, -561, -543, -525, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499	-889, -758, 135, 266
17	-499, -481, -463, -445, -427, -409, -376, -358, -340, -322, -304, -286, -243, -225, -207, -189, -171, -153, -120, -102, -84, -66, -48, -30, 525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994	-268, -135, 756, 889
18	-498, -480, -462, -444, -426, -408, -375, -357, -339, -321, -303, -285, -242, -224, -206, -188, -170, -152, -119, -101, -83, -65, -47, -29, 526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	-267, -134, 757, 890
19	-497, -479, -461, -443, -425, -407, -374, -356, -338, -320, -302, -284, -241, -223, -205, -187, -169, -151, -118, -100, -82, -64, -46, -28, 527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996	-266, -133, 758, 891
20	-496, -478, -460, -442, -424, -406, -373, -355, -337, -319, -301, -283, -240, -222, -204, -186, -168, -150, -117, -99, -81,	-265, -132, 759,

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	–63, –45, –27, 528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997	892
21	–494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999	–263, –130, 761, 894
22	–493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000	–262, –129, 762, 895
23	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23, 532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001	–261, –128, 763, 896
24	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22, 533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002	–260, –127, 764, 897
25	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21, 534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003	–259, –126, 765, 898
26	–489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20, 535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	–384, –253, 640, 771

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	
27	–488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19, 536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005	–383, –252, 641, 772
28	–487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006	–382, –251, 642, 773
29	–485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008	–380, –249, 644, 775
30	–484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009	–379, –248, 645, 776
31	–483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	–378, –247, 646, 777
32	–482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13, 542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993,	–377, –246, 647, 778

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1011	

[00283] As shown in Table 27, each 52-tone DRU includes 48 data subcarriers, including 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 48 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 48 data subcarriers may be considered as eight groups, including four low-frequency groups and four high-frequency groups. An index of each data subcarrier in a low-frequency group is a negative value, and an index of each data subcarrier in a high-frequency group is a positive value. Absolute values of index differences between adjacent data subcarriers in a same group are all 18, absolute values of index differences between data subcarriers in two adjacent low-frequency groups or two adjacent high-frequency groups are sequentially 33, 43, and 33, and absolute values of index differences between data subcarriers in a high-frequency group and a low-frequency group (an absolute value of a difference between a minimum index of all data subcarriers in a high-frequency group and a maximum index of all data subcarriers in a low-frequency group) are 555.

[00284] In other words, it is assumed that indices of 48 data subcarriers included in each 52-tone DRU are sequentially arranged in a frequency direction and then divided into eight groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00285] As shown in Table 27, for identifiers 1 to 4, 5 to 12, 13 to 16, 17 to 20, 21 to 28, or 29 to 32, there is a fixed offset between indices of data subcarriers included in two 52-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is i ($i = 1$ to 3, 5 to 11, 13 to 15, 17 to 19, 21 to 27, or 29 to 31) all plus 1, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is $i + 1$. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 4 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 5 is 2. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is 4 all plus 2, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is 5. Similarly, an offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 12 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 13 is 2. An offset between an index of a

data subcarrier included in a 52-tone DRU whose identifier is 16 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 17 is 2. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 20 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 21 is 2. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 28 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 29 is 2.

[00286] As shown in Table 27, each 52-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete.

[00287] As shown in Table 26, the 52-tone DRU whose identifier is i ($i = 1$ to 4) may be considered as a combination of a 26-tone DRU whose identifier is i and a 26-tone DRU whose identifier is $i + 36$, the 52-tone DRU whose identifier is i ($i = 5$ to 12) may be considered as a combination of a 26-tone DRU whose identifier is $i + 1$ and a 26-tone DRU whose identifier is $i + 37$, the 52-tone DRU whose identifier is i ($i = 13$ to 20) may be considered as a combination of a 26-tone DRU whose identifier is $i + 2$ and a 26-tone DRU whose identifier is $i + 38$, the 52-tone DRU whose identifier is i ($i = 21$ to 28) may be considered as a combination of a 26-tone DRU whose identifier is $i + 3$ and a 26-tone DRU whose identifier is $i + 39$, and the 52-tone DRU whose identifier is i ($i = 29$ to 32) may be considered as a combination of a 26-tone DRU whose identifier is $i + 4$ and a 26-tone DRU whose identifier is $i + 40$. In this way, subcarriers in the 52-tone DRU can be fully discrete. For example, 48 data subcarriers in a 52-tone DRU whose identifier is 1 are a combination of 24 data subcarriers in a 26-tone DRU whose identifier is 1 and 24 data subcarriers in a 26-tone DRU whose identifier is 37 in Table 26. Four pilot subcarriers in the 52-tone DRU whose identifier is 1 are a combination of two pilot subcarriers in the 26-tone DRU whose identifier is 1 and two pilot subcarriers in the 26-tone DRU whose identifier is 37 in Table 26. Correspondingly, Table 27 may also be simplified and represented as the following Table 28 based on Table 26.

Table 28

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
1	1, 37
2	2, 38
3	3, 39
4	4, 40
5	6, 42

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
6	7, 43
7	8, 44
8	9, 45
9	10, 46
10	11, 47
11	12, 48
12	13, 49
13	15, 51
14	16, 52
15	17, 53
16	18, 54
17	19, 55
18	20, 56
19	21, 57
20	22, 58
21	24, 60
22	25, 61
23	26, 62
24	27, 63
25	28, 64
26	29, 65
27	30, 66
28	31, 67
29	33, 69
30	34, 70
31	35, 71
32	36, 72

[00288] In addition, in this embodiment of this disclosure, the identifier of the 52-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 52-tone DRU. For example, an identifier of a 52-tone DRU having a lowest-frequency index –1011 is 1.

- 5 **[00289]** According to the design of the 52-tone DRU shown in Table 27 or Table 28 in this embodiment of this disclosure, compared with the continuous 52-tone RU in the 160 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this

disclosure can implement a maximum power amplification multiple, specifically, 13.

[00290] In this embodiment of this disclosure, an association between a 52-tone DRU and a 26-tone DRU in 160 MHz is described by using Table 28. It may be understood that the foregoing described manner of determining a 52-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 52-tone DRU can be fully discrete. In another embodiment, a 52-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of two 26-tone DRUs whose identifiers are 1 and 39 is determined as the 52-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that, considering the association between the 52-tone DRU and the 26-tone DRU, if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -1011, correspondingly the lowest-frequency index of the data subcarrier included in the 52-tone DRU also adaptively changes to another value.

[00291] In a tone plan solution of a DRU, the 160 MHz bandwidth includes 16 106-tone DRUs, and each 106-tone DRU includes 102 data subcarriers and four pilot subcarriers. For example, Table 29 shows an example of 16 106-tone DRUs corresponding to the 160 MHz bandwidth, and shows 102 data subcarriers and four pilot subcarriers included in each 106-tone DRU. The 102 data subcarriers may be considered as two parts. A first part of data subcarriers includes 96 data subcarriers, a second part of data subcarriers includes six data subcarriers, and a lowest-frequency index of a data subcarrier in a 106-tone DRU whose identifier is 1 is -1011. It should be understood that, although the data subcarriers are divided into the first part and the second part in Table 29 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 106-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in two parts, and do not need to be distinguished. In other words, the first part and the second part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 106-tone DRU.

Table 29

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
1	-1011, -993, -975, -957, -939, -921, -888, -870, -852, -834, -816, -798, -755, -737, -719, -701, -683, -665, -632, -614, -596, -	-647, -524, -135, 244, 500, 756	-780, -268, 377, 889

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	578, –560, –542, –499, –481, –463, –445, – 427, –409, –376, –358, –340, –322, –304, – 286, –243, –225, –207, –189, –171, –153, – 120, –102, –84, –66, –48, –30, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482, 525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994		
2	–1010, –992, –974, –956, –938, –920, –887, – 869, –851, –833, –815, –797, –754, –736, – 718, –700, –682, –664, –631, –613, –595, – 577, –559, –541, –498, –480, –462, –444, – 426, –408, –375, –357, –339, –321, –303, – 285, –242, –224, –206, –188, –170, –152, – 119, –101, –83, –65, –47, –29, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483, 526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	–646, –523, –134, 245, 501, 757	–779, –267, 378, 890
3	–1009, –991, –973, –955, –937, –919, –886, – 868, –850, –832, –814, –796, –753, –735, – 717, –699, –681, –663, –630, –612, –594, – 576, –558, –540, –497, –479, –461, –443, – 425, –407, –374, –356, –338, –320, –302, – 284, –241, –223, –205, –187, –169, –151, – 118, –100, –82, –64, –46, –28, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484, 527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837,	–645, –522, –133, 246, 502, 758	–778, –266, 379, 891

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	855, 873, 906, 924, 942, 960, 978, 996		
4	–1008, –990, –972, –954, –936, –918, –885, –867, –849, –831, –813, –795, –752, –734, –716, –698, –680, –662, –629, –611, –593, –575, –557, –539, –496, –478, –460, –442, –424, –406, –373, –355, –337, –319, –301, –283, –240, –222, –204, –186, –168, –150, –117, –99, –81, –63, –45, –27, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485, 528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997	–644, –521, –132, 247, 503, 759	–777, –265, 380, 892
5	–1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537, –494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487, 530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999	–642, –520, –130, 249, 504, 761	–775, –263, 382, 894
6	–1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, –810, –792, –749, –731, –713, –695, –677, –659, –626, –608, –590, –572, –554, –536, –493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 19, 37, 55, 73,	–641, –519, –129, 250, 505, 762	–774, –262, 383, 895

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488, 531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000		
7	–1004, –986, –968, –950, –932, –914, –881, – 863, –845, –827, –809, –791, –748, –730, – 712, –694, –676, –658, –625, –607, –589, – 571, –553, –535, –492, –474, –456, –438, – 420, –402, –369, –351, –333, –315, –297, – 279, –236, –218, –200, –182, –164, –146, – 113, –95, –77, –59, –41, –23, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489, 532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001	–640, –518, –128, 251, 506, 763	–773, –261, 384, 896
8	–1003, –985, –967, –949, –931, –913, –880, – 862, –844, –826, –808, –790, –747, –729, – 711, –693, –675, –657, –624, –606, –588, – 570, –552, –534, –491, –473, –455, –437, – 419, –401, –368, –350, –332, –314, –296, – 278, –235, –217, –199, –181, –163, –145, – 112, –94, –76, –58, –40, –22, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490, 533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002	–639, –517, –127, 252, 507, 764	–772, –260, 385, 897
9	–1002, –984, –966, –948, –930, –912, –879, – 861, –843, –825, –807, –789, –746, –728, – 710, –692, –674, –656, –623, –605, –587, –	–638, –516, –126, 253, 508, 765	–771, –259, 386, 898

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	569, –551, –533, –490, –472, –454, –436, – 418, –400, –367, –349, –331, –313, –295, – 277, –234, –216, –198, –180, –162, –144, – 111, –93, –75, –57, –39, –21, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491, 534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003		
10	–1001, –983, –965, –947, –929, –911, –878, – 860, –842, –824, –806, –788, –745, –727, – 709, –691, –673, –655, –622, –604, –586, – 568, –550, –532, –489, –471, –453, –435, – 417, –399, –366, –348, –330, –312, –294, – 276, –233, –215, –197, –179, –161, –143, – 110, –92, –74, –56, –38, –20, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492, 535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	–765, –515, –253, 128, 509, 640	–896, –384, 259, 771
11	–1000, –982, –964, –946, –928, –910, –877, – 859, –841, –823, –805, –787, –744, –726, – 708, –690, –672, –654, –621, –603, –585, – 567, –549, –531, –488, –470, –452, –434, – 416, –398, –365, –347, –329, –311, –293, – 275, –232, –214, –196, –178, –160, –142, – 109, –91, –73, –55, –37, –19, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493, 536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846,	–764, –509, –252, 129, 515, 641	–895, –383, 260, 772

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	864, 882, 915, 933, 951, 969, 987, 1005		
12	–999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530, –487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494, 537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006	–763, –508, –251, 130, 516, 642	–894, –382, 261, 773
13	–997, –979, –961, –943, –925, –907, –874, –856, –838, –820, –802, –784, –741, –723, –705, –687, –669, –651, –618, –600, –582, –564, –546, –528, –485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496, 539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008	–761, –507, –249, 132, 517, 644	–892, –380, 263, 775
14	–996, –978, –960, –942, –924, –906, –873, –855, –837, –819, –801, –783, –740, –722, –704, –686, –668, –650, –617, –599, –581, –563, –545, –527, –484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 28, 46, 64, 82,	–760, –506, –248, 133, 518, 645	–891, –379, 264, 776

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497, 540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009		
15	–995, –977, –959, –941, –923, –905, –872, –854, –836, –818, –800, –782, –739, –721, –703, –685, –667, –649, –616, –598, –580, –562, –544, –526, –483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498, 541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	–759, –505, –247, 134, 519, 646	–890, –378, 265, 777
16	–994, –976, –958, –940, –922, –904, –871, –853, –835, –817, –799, –781, –738, –720, –702, –684, –666, –648, –615, –597, –579, –561, –543, –525, –482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499, 542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011	–758, –504, –246, 135, 520, 647	–889, –377, 266, 778

[00292] Similar to the 106-tone DRU in the 80 MHz bandwidth, the first part of data subcarriers may be considered as being obtained based on a 26-tone DRU or a 52-tone DRU. For brevity, as

shown in Table 30, indices of the first part of data subcarriers included in the 106-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 26.

Table 30

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part	
1	1, 19, 37, 55	−647, −524, −135, 244, 500, 756	−780, −268, 377, 889
2	2, 20, 38, 56	−646, −523, −134, 245, 501, 757	−779, −267, 378, 890
3	3, 21, 39, 57	−645, −522, −133, 246, 502, 758	−778, −266, 379, 891
4	4, 22, 40, 58	−644, −521, −132, 247, 503, 759	−777, −265, 380, 892
5	6, 24, 42, 60	−642, −520, −130, 249, 504, 761	−775, −263, 382, 894
6	7, 25, 43, 61	−641, −519, −129, 250, 505, 762	−774, −262, 383, 895
7	8, 26, 44, 62	−640, −518, −128, 251, 506, 763	−773, −261, 384, 896
8	9, 27, 45, 63	−639, −517, −127, 252, 507, 764	−772, −260, 385, 897
9	10, 28, 46, 64	−638, −516, −126, 253, 508, 765	−771, −259, 386, 898
10	11, 29, 47, 65	−765, −515, −253, 128, 509, 640	−896, −384, 259, 771
11	12, 30, 48, 66	−764, −509, −252, 129, 515, 641	−895, −383, 260, 772
12	13, 31, 49, 67	−763, −508, −251, 130, 516, 642	−894, −382, 261, 773
13	15, 33, 51, 69	−761, −507, −249, 132, 517, 644	−892, −380, 263, 775
14	16, 34, 52, 70	−760, −506, −248, 133, 518, 645	−891, −379, 264, 776
15	17, 35, 53, 71	−759, −505, −247, 134, 519, 646	−890, −378, 265, 777
16	18, 36, 54, 72	−758, −504, −246, 135, 520, 647	−889, −377, 266, 778

- 5 **[00293]** In Table 30, the "first part" column means that the first part of (96) data subcarriers in the 106-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 26. For example, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers in the 102 data subcarriers included in the 106-tone DRU include all data subcarriers in four 26-tone DRUs whose identifiers are 1, 19, 37, and 55 shown in Table 26.
- 10 **[00294]** Specifically, as shown in Table 29, each 106-tone DRU includes 102 data subcarriers, and some (namely, the first part in Table 29: 96 data subcarriers) of the 102 data subcarriers include 48 high-frequency subcarriers (whose subcarrier indices are positive values) and 48 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 96 data subcarriers are considered as one group in a frequency direction (for example, from low to

high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are 18. In addition, absolute values of index differences between data subcarriers of two adjacent groups are alternately 33 and 43.

[00295] In other words, if indices of 96 data subcarriers of 102 data subcarriers included in each 106-tone DRU are sequentially arranged in a frequency direction and then divided into 16 groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00296] In Table 29, for identifiers 1 to 4, 5 to 12, or 13 to 16, there is a fixed offset between indices of 96 data subcarriers (the first part) included in two 106-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 96 data subcarriers in a 106-tone DRU whose identifier is i ($i = 1$ to 3, 5 to 11, or 13 to 15) all plus 1, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is $i + 1$. An offset between indices of 96 data subcarriers (the first part) in the 106-tone DRU whose identifier is 4 and indices of 96 data subcarriers in the 106-tone DRU whose identifier is 5 is 2. For example, indices of 96 data subcarriers in a 106-tone DRU whose identifier is 4 all plus 2, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is 5. Similarly, an offset between indices of 96 data subcarriers (the first part) in the 106-tone DRU whose identifier is 12 and indices of 96 data subcarriers in the 106-tone DRU whose identifier is 13 is 2.

[00297] In addition to the 96 data subcarriers in the first part column, each 106-tone DRU further includes six data subcarriers and four pilot subcarriers. In some embodiments, six data subcarriers and four pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, and data subcarriers in the first part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 29 or Table 30 shows an example, so that subcarriers included in the 106-tone DRU can be fully discrete.

[00298] For example, the four pilot subcarriers included in the 106-tone DRU may be a part of a set of eight pilot subcarriers included in the corresponding four 26-tone DRUs. In addition, the other six data subcarriers included in the 106-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, and the pilot subcarriers, and the data subcarriers may be fully discrete, as shown in the "second part" column of Table 29 or Table 30.

[00299] In addition, in this embodiment of this disclosure, the identifier of the 106-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 106-tone DRU.

For example, an identifier of a 106-tone DRU having a lowest-frequency index -1011 is 1.

[00300] According to the design of the 106-tone DRU shown in Table 29 in this embodiment of this disclosure, compared with the continuous 106-tone RU in the 160 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

5 **[00301]** In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 106-tone DRU in 160 MHz is described by using Table 30. It may be understood that the foregoing described manner of determining a 106-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 106-tone DRU can be fully discrete. In another embodiment, a 106-tone DRU may alternatively be determined in another manner based
10 on a 26-tone DRU. For example, a combination of four 26-tone DRUs whose identifiers are 1 to 4 is determined as the first part of data subcarriers of the 106-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -1011 , correspondingly the lowest-frequency index of the data subcarrier included
15 in the 106-tone DRU also adaptively changes to another value.

[00302] In a tone plan solution of a DRU, the 160 MHz bandwidth includes eight 242-tone DRUs, and each 242-tone DRU includes 234 data subcarriers and eight pilot subcarriers.

[00303] For example, Table 31 shows an example of eight 242-tone DRUs corresponding to the 160 MHz bandwidth, and shows 234 data subcarriers and eight pilot subcarriers included in each
20 242-tone DRU. The 234 data subcarriers may be considered as three parts. A first part of data subcarriers includes 192 data subcarriers, a second part of data subcarriers includes 24 data subcarriers, a third part of data subcarriers includes 18 data subcarriers, and a lowest-frequency index of a data subcarrier in a 242-tone DRU whose identifier is 1 is -1011 . It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part
25 in Table 31 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 242-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but
30 are considered as a whole, namely, a data subcarrier index included in each 242-tone DRU.

Table 31

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	-1011, -1002, -993, -984, -975, -966, -957, -948, -939, -930, -921, -912, - 888, -879, -870, -861, -852, -843, - 834, -825, -816, -807, -798, -789, - 755, -746, -737, -728, -719, -710, - 701, -692, -683, -674, -665, -656, - 632, -623, -614, -605, -596, -587, - 578, -569, -560, -551, -542, -533, - 499, -490, -481, -472, -463, -454, - 445, -436, -427, -418, -409, -400, - 376, -367, -358, -349, -340, -331, - 322, -313, -304, -295, -286, -277, - 243, -234, -225, -216, -207, -198, - 189, -180, -171, -162, -153, -144, - 120, -111, -102, -93, -84, -75, -66, - 57, -48, -39, -30, -21, 13, 22, 31, 40, 49, 58, 67, 76, 85, 94, 103, 112, 136, 145, 154, 163, 172, 181, 190, 199, 208, 217, 226, 235, 269, 278, 287, 296, 305, 314, 323, 332, 341, 350, 359, 368, 392, 401, 410, 419, 428, 437, 446, 455, 464, 473, 482, 491, 525, 534, 543, 552, 561, 570, 579, 588, 597, 606, 615, 624, 648, 657, 666, 675, 684, 693, 702, 711, 720, 729, 738, 747, 781, 790, 799, 808, 817, 826, 835, 844, 853, 862, 871, 880, 904, 913, 922, 931, 940, 949, 958, 967, 976, 985, 994, 1003	-1007, - 989, -971, - 953, -935, - 917, -884, - 866, -848, - 830, -812, - 794, -751, - 733, -715, - 697, -679, - 661, -628, - 610, -592, - 574, -556, - 538	-776, - 647, -643, -638, - 524, -516, -389, - 256, -135, -126, 121, 244, 253, 500, 508, 521, 756, 765	-780, -268, 377, 889, - 771, -259, 386, 898
2	-1010, -1001, -992, -983, -974, -965,	-998, -980,	-893, -	-779, -267,

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	–956, –947, –938, –929, –920, –911, – 887, –878, –869, –860, –851, –842, – 833, –824, –815, –806, –797, –788, – 754, –745, –736, –727, –718, –709, – 700, –691, –682, –673, –664, –655, – 631, –622, –613, –604, –595, –586, – 577, –568, –559, –550, –541, –532, – 498, –489, –480, –471, –462, –453, – 444, –435, –426, –417, –408, –399, – 375, –366, –357, –348, –339, –330, – 321, –312, –303, –294, –285, –276, – 242, –233, –224, –215, –206, –197, – 188, –179, –170, –161, –152, –143, – 119, –110, –101, –92, –83, –74, –65, – 56, –47, –38, –29, –20, 14, 23, 32, 41, 50, 59, 68, 77, 86, 95, 104, 113, 137, 146, 155, 164, 173, 182, 191, 200, 209, 218, 227, 236, 270, 279, 288, 297, 306, 315, 324, 333, 342, 351, 360, 369, 393, 402, 411, 420, 429, 438, 447, 456, 465, 474, 483, 492, 526, 535, 544, 553, 562, 571, 580, 589, 598, 607, 616, 625, 649, 658, 667, 676, 685, 694, 703, 712, 721, 730, 739, 748, 782, 791, 800, 809, 818, 827, 836, 845, 854, 863, 872, 881, 905, 914, 923, 932, 941, 950, 959, 968, 977, 986, 995, 1004	–962, –944, –926, –908, –875, –857, –839, –821, –803, –785, –742, –724, –706, –688, –670, –652, –619, –601, –583, –565, –547, –529	765, –762, –646, – 523, –515, –388, – 255, –253, –134, 122, 128, 245, 501, 509, 522, 640, 757	378, 890, – 896, –384, 259, 771
3	–1009, –1000, –991, –982, –973, –964, –955, –946, –937, –928, –919, –910, – 886, –877, –868, –859, –850, –841, – 832, –823, –814, –805, –796, –787, –	–495, –477, –459, –441, –423, –405, –372, –354,	–899, – 764, –757, –645, – 522, –509,	–778, –266, 379, 891, – 895, –383, 260, 772

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	753, –744, –735, –726, –717, –708, – 699, –690, –681, –672, –663, –654, – 630, –621, –612, –603, –594, –585, – 576, –567, –558, –549, –540, –531, – 497, –488, –479, –470, –461, –452, – 443, –434, –425, –416, –407, –398, – 374, –365, –356, –347, –338, –329, – 320, –311, –302, –293, –284, –275, – 241, –232, –223, –214, –205, –196, – 187, –178, –169, –160, –151, –142, – 118, –109, –100, –91, –82, –73, –64, – 55, –46, –37, –28, –19, 15, 24, 33, 42, 51, 60, 69, 78, 87, 96, 105, 114, 138, 147, 156, 165, 174, 183, 192, 201, 210, 219, 228, 237, 271, 280, 289, 298, 307, 316, 325, 334, 343, 352, 361, 370, 394, 403, 412, 421, 430, 439, 448, 457, 466, 475, 484, 493, 527, 536, 545, 554, 563, 572, 581, 590, 599, 608, 617, 626, 650, 659, 668, 677, 686, 695, 704, 713, 722, 731, 740, 749, 783, 792, 801, 810, 819, 828, 837, 846, 855, 864, 873, 882, 906, 915, 924, 933, 942, 951, 960, 969, 978, 987, 996, 1005	–336, –318, –300, –282, –239, –221, –203, –185, –167, –149, –116, –98, – 80, –62, – 44, –26	–391, – 264, –258, –252, – 133, –131, 129, 246, 502, 515, 641, 758	
4	–1008, –999, –990, –981, –972, –963, – 954, –945, –936, –927, –918, –909, – 885, –876, –867, –858, –849, –840, – 831, –822, –813, –804, –795, –786, – 752, –743, –734, –725, –716, –707, – 698, –689, –680, –671, –662, –653, – 629, –620, –611, –602, –593, –584, –	–486, –468, –450, –432, –414, –396, –363, –345, –327, –309, –291, –273, –230, –212,	–898, – 763, –756, –644, – 521, –508, –390, – 381, –257, –251, –	–777, –265, 380, 892, – 894, –382, 261, 773

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	575, –566, –557, –548, –539, –530, – 496, –487, –478, –469, –460, –451, – 442, –433, –424, –415, –406, –397, – 373, –364, –355, –346, –337, –328, – 319, –310, –301, –292, –283, –274, – 240, –231, –222, –213, –204, –195, – 186, –177, –168, –159, –150, –141, – 117, –108, –99, –90, –81, –72, –63, –54, –45, –36, –27, –18, 16, 25, 34, 43, 52, 61, 70, 79, 88, 97, 106, 115, 139, 148, 157, 166, 175, 184, 193, 202, 211, 220, 229, 238, 272, 281, 290, 299, 308, 317, 326, 335, 344, 353, 362, 371, 395, 404, 413, 422, 431, 440, 449, 458, 467, 476, 485, 494, 528, 537, 546, 555, 564, 573, 582, 591, 600, 609, 618, 627, 651, 660, 669, 678, 687, 696, 705, 714, 723, 732, 741, 750, 784, 793, 802, 811, 820, 829, 838, 847, 856, 865, 874, 883, 907, 916, 925, 934, 943, 952, 961, 970, 979, 988, 997, 1006	–194, –176, –158, –140, –107, –89, – 71, –53, – 35, –17	250, –132, 130, 247, 503, 516, 642, 759	
5	–1006, –997, –988, –979, –970, –961, – 952, –943, –934, –925, –916, –907, – 883, –874, –865, –856, –847, –838, – 829, –820, –811, –802, –793, –784, – 750, –741, –732, –723, –714, –705, – 696, –687, –678, –669, –660, –651, – 627, –618, –609, –600, –591, –582, – 573, –564, –555, –546, –537, –528, – 494, –485, –476, –467, –458, –449, – 440, –431, –422, –413, –404, –395, –	17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450,	–903, – 770, –761, –642, – 637, –520, –507, – 503, –249, –130, 132, 248, 249, 381, 504, 517, 644,	–775, –263, 382, 894, – 892, –380, 263, 775

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	371, –362, –353, –344, –335, –326, – 317, –308, –299, –290, –281, –272, – 238, –229, –220, –211, –202, –193, – 184, –175, –166, –157, –148, –139, – 115, –106, –97, –88, –79, –70, –61, –52, –43, –34, –25, –16, 18, 27, 36, 45, 54, 63, 72, 81, 90, 99, 108, 117, 141, 150, 159, 168, 177, 186, 195, 204, 213, 222, 231, 240, 274, 283, 292, 301, 310, 319, 328, 337, 346, 355, 364, 373, 397, 406, 415, 424, 433, 442, 451, 460, 469, 478, 487, 496, 530, 539, 548, 557, 566, 575, 584, 593, 602, 611, 620, 629, 653, 662, 671, 680, 689, 698, 707, 716, 725, 734, 743, 752, 786, 795, 804, 813, 822, 831, 840, 849, 858, 867, 876, 885, 909, 918, 927, 936, 945, 954, 963, 972, 981, 990, 999, 1008	468, 486	761	
6	–1005, –996, –987, –978, –969, –960, – 951, –942, –933, –924, –915, –906, – 882, –873, –864, –855, –846, –837, – 828, –819, –810, –801, –792, –783, – 749, –740, –731, –722, –713, –704, – 695, –686, –677, –668, –659, –650, – 626, –617, –608, –599, –590, –581, – 572, –563, –554, –545, –536, –527, – 493, –484, –475, –466, –457, –448, – 439, –430, –421, –412, –403, –394, – 370, –361, –352, –343, –334, –325, – 316, –307, –298, –289, –280, –271, – 237, –228, –219, –210, –201, –192, –	26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	–902, – 769, –760, –641, – 636, –519, –506, – 502, –248, –129, 131, 133, 250, 262, 505, 518, 645, 762	–774, –262, 383, 895, – 891, –379, 264, 776

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	183, –174, –165, –156, –147, –138, – 114, –105, –96, –87, –78, –69, –60, –51, –42, –33, –24, –15, 19, 28, 37, 46, 55, 64, 73, 82, 91, 100, 109, 118, 142, 151, 160, 169, 178, 187, 196, 205, 214, 223, 232, 241, 275, 284, 293, 302, 311, 320, 329, 338, 347, 356, 365, 374, 398, 407, 416, 425, 434, 443, 452, 461, 470, 479, 488, 497, 531, 540, 549, 558, 567, 576, 585, 594, 603, 612, 621, 630, 654, 663, 672, 681, 690, 699, 708, 717, 726, 735, 744, 753, 787, 796, 805, 814, 823, 832, 841, 850, 859, 868, 877, 886, 910, 919, 928, 937, 946, 955, 964, 973, 982, 991, 1000, 1009			
7	–1004, –995, –986, –977, –968, –959, – 950, –941, –932, –923, –914, –905, – 881, –872, –863, –854, –845, –836, – 827, –818, –809, –800, –791, –782, – 748, –739, –730, –721, –712, –703, – 694, –685, –676, –667, –658, –649, – 625, –616, –607, –598, –589, –580, – 571, –562, –553, –544, –535, –526, – 492, –483, –474, –465, –456, –447, – 438, –429, –420, –411, –402, –393, – 369, –360, –351, –342, –333, –324, – 315, –306, –297, –288, –279, –270, – 236, –227, –218, –209, –200, –191, – 182, –173, –164, –155, –146, –137, – 113, –104, –95, –86, –77, –68, –59, –50, –41, –32, –23, –14, 20, 29, 38, 47, 56,	529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	–901, – 768, –759, –640, – 635, –518, –505, – 501, –247, –128, 134, 251, 506, 519, 646, 760, 763, 893	–773, –261, 384, 896, – 890, –378, 265, 777

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	65, 74, 83, 92, 101, 110, 119, 143, 152, 161, 170, 179, 188, 197, 206, 215, 224, 233, 242, 276, 285, 294, 303, 312, 321, 330, 339, 348, 357, 366, 375, 399, 408, 417, 426, 435, 444, 453, 462, 471, 480, 489, 498, 532, 541, 550, 559, 568, 577, 586, 595, 604, 613, 622, 631, 655, 664, 673, 682, 691, 700, 709, 718, 727, 736, 745, 754, 788, 797, 806, 815, 824, 833, 842, 851, 860, 869, 878, 887, 911, 920, 929, 938, 947, 956, 965, 974, 983, 992, 1001, 1010			
8	–1003, –994, –985, –976, –967, –958, – 949, –940, –931, –922, –913, –904, – 880, –871, –862, –853, –844, –835, – 826, –817, –808, –799, –790, –781, – 747, –738, –729, –720, –711, –702, – 693, –684, –675, –666, –657, –648, – 624, –615, –606, –597, –588, –579, – 570, –561, –552, –543, –534, –525, – 491, –482, –473, –464, –455, –446, – 437, –428, –419, –410, –401, –392, – 368, –359, –350, –341, –332, –323, – 314, –305, –296, –287, –278, –269, – 235, –226, –217, –208, –199, –190, – 181, –172, –163, –154, –145, –136, – 112, –103, –94, –85, –76, –67, –58, –49, –40, –31, –22, –13, 21, 30, 39, 48, 57, 66, 75, 84, 93, 102, 111, 120, 144, 153, 162, 171, 180, 189, 198, 207, 216, 225, 234, 243, 277, 286, 295, 304, 313, 322,	538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007	–900, – 767, –758, –639, – 634, –517, –504, – 500, –246, –127, 135, 252, 507, 520, 643, 647, 764, 774	–772, –260, 385, 897, – 889, –377, 266, 778

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	331, 340, 349, 358, 367, 376, 400, 409, 418, 427, 436, 445, 454, 463, 472, 481, 490, 499, 533, 542, 551, 560, 569, 578, 587, 596, 605, 614, 623, 632, 656, 665, 674, 683, 692, 701, 710, 719, 728, 737, 746, 755, 789, 798, 807, 816, 825, 834, 843, 852, 861, 870, 879, 888, 912, 921, 930, 939, 948, 957, 966, 975, 984, 993, 1002, 1011			

[00304] As shown in Table 31, a first part of (192) data subcarriers in each 242-tone DRU include 96 high-frequency subcarriers (whose subcarrier indices are positive values) and 96 low-frequency subcarriers (whose subcarrier indices are negative values). If every 12 of the 192 data subcarriers (the first part) are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are 9. In addition, absolute values of index differences between data subcarriers of two adjacent groups are alternately 24 and 34.

[00305] In Table 31, for identifiers 1 to 4, or 5 to 8, there is a fixed offset between indices of 192 data subcarriers (the first part) included in two 242-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 192 data subcarriers in a 242-tone DRU whose identifier is i ($i = 1$ to 3, or 5 to 7) all plus 1, to obtain indices of 192 data subcarriers in a 242-tone DRU whose identifier is $i + 1$. An offset between indices of 192 data subcarriers (the first part) in a 242-tone DRU whose identifier is 4 and indices of 192 data subcarriers in a 242-tone DRU whose identifier is 5 is 2. For example, indices of 192 data subcarriers in a 242-tone DRU whose identifier is 4 all plus 2, to obtain indices of 192 data subcarriers in a 242-tone DRU whose identifier is 5.

[00306] As shown in Table 31, 234 data subcarriers of each 242-tone DRU further include a second part of data subcarriers (24 data subcarriers). If every six data subcarriers may be considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33. In addition, indices of 24 data

subcarriers in a second part of a 242-tone DRU whose identifier is i ($i = 1, 3, 5, \text{ or } 7$) all plus 9, to obtain indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is $i + 1$. Indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is i ($i = 2, 4, \text{ or } 6$) all plus 503, to obtain indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is $i + 1$.

[00307] In addition to the 192 data subcarriers in the first part column and the 24 data subcarriers in the second part column, each 242-tone DRU further includes 18 data subcarriers (the third part) and eight pilot subcarriers. In some embodiments, 18 data subcarriers and eight pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 31 shows an example, so that subcarriers included in the 242-tone DRU can be fully discrete.

[00308] Similar to the 242-tone DRU in the 80 MHz bandwidth, the first part of data subcarriers may be considered as being obtained based on a 26-tone DRU or a 52-tone DRU, and the second part of data subcarriers may be considered as being obtained based on a 26-tone DRU. For brevity, as shown in Table 32, indices of the first part of data subcarriers included in the 242-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 26, and indices of the second part of data subcarriers included in the 242-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 26.

Table 32

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 10, 19, 28, 37, 46, 55, 64	5	−776, −647, −643, −638, − 524, −516, −389, −256, − 135, −126, 121, 244, 253, 500, 508, 521, 756, 765	−780, −268, 377, 889, −771, −259, 386, 898
2	2, 11, 20, 29, 38, 47, 56, 65	14	−893, −765, −762, −646, − 523, −515, −388, −255, − 253, −134, 122, 128, 245, 501, 509, 522, 640, 757	−779, −267, 378, 890, −896, −384, 259, 771

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
3	3, 12, 21, 30, 39, 48, 57, 66	23	–899, –764, –757, –645, – 522, –509, –391, –264, – 258, –252, –133, –131, 129, 246, 502, 515, 641, 758	–778, –266, 379, 891, –895, –383, 260, 772
4	4, 13, 22, 31, 40, 49, 58, 67	32	–898, –763, –756, –644, – 521, –508, –390, –381, – 257, –251, –250, –132, 130, 247, 503, 516, 642, 759	–777, –265, 380, 892, –894, –382, 261, 773
5	6, 15, 24, 33, 42, 51, 60, 69	41	–903, –770, –761, –642, – 637, –520, –507, –503, – 249, –130, 132, 248, 249, 381, 504, 517, 644, 761	–775, –263, 382, 894, –892, –380, 263, 775
6	7, 16, 25, 34, 43, 52, 61, 70	50	–902, –769, –760, –641, – 636, –519, –506, –502, – 248, –129, 131, 133, 250, 262, 505, 518, 645, 762	–774, –262, 383, 895, –891, –379, 264, 776
7	8, 17, 26, 35, 44, 53, 62, 71	59	–901, –768, –759, –640, – 635, –518, –505, –501, – 247, –128, 134, 251, 506, 519, 646, 760, 763, 893	–773, –261, 384, 896, –890, –378, 265, 777
8	9, 18, 27, 36, 45, 54, 63, 72	68	–900, –767, –758, –639, – 634, –517, –504, –500, – 246, –127, 135, 252, 507, 520, 643, 647, 764, 774	–772, –260, 385, 897, –889, –377, 266, 778

[00309] In Table 32, the "first part" column means that the first part of (192) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The first part of 192 data subcarriers included in the 242-tone DRU include all data subcarriers in eight 26-tone DRUs whose identifiers are 1, 10, 19, 28, 37, 46, 55, and 64 shown in Table 26. Similarly, the "second part" column means that the second part of (24) data subcarriers in the 242-tone DRU include a

combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The second part of 24 data subcarriers included in the 242-tone DRU includes data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 26.

5 **[00310]** For example, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 18 pilot subcarriers included in the corresponding nine 26-tone DRUs. Alternatively, in some embodiments, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 16 pilot subcarriers included in the eight 26-tone DRUs in the corresponding first part. In addition, the other 18 data subcarriers included in the 242-tone DRU may be selected from
10 remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, the data subcarriers in the second part column, and the pilot subcarriers, and the data subcarriers may be fully discrete.

[00311] As shown in Table 31 or Table 32, each 242-tone DRU includes eight pilot subcarriers, and any two pilot subcarriers in a same DRU are not adjacent. The pilot subcarriers shown in Table
15 31 or Table 32 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity.

[00312] In addition, in this embodiment of this disclosure, the identifier of the 242-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 242-tone DRU. For example, an identifier of a 242-tone DRU having a lowest-frequency index –1011 is 1.

20 **[00313]** In addition, it should be noted that the 242-tone DRU in 160 MHz described with reference to Table 31 or Table 32 is merely an example. For example, 234 data subcarriers in the 242-tone DRU may alternatively be divided into three parts in another manner, for example, a first part, a second part, and a third part shown in Table 33 below. In Table 33, the "first part" column means that a first part of data subcarriers (204) in the 242-tone DRU include a combination of data
25 subcarriers in corresponding 106-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The first part of (204) data subcarriers included in the 242-tone DRU include all data subcarriers of 106-tone DRUs whose identifiers are 1 and 9 shown in Table 29. In Table 33, the "second part" column means that the second part of (24) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a
30 242-tone DRU whose identifier is 1 is used as an example. The second part of (24) data subcarriers included in the 242-tone DRU include data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 26.

Table 33

Identifier of a 242-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 9	5	−776, −643, −389, −256, 121, 521	−780, −268, 377, 889, −771, −259, 386, 898
2	2, 10	14	−893, −762, −388, −255, 122, 522	−779, −267, 378, 890, −896, −384, 259, 771
3	3, 11	23	−899, −757, −391, −264, −258, −131	−778, −266, 379, 891, −895, −383, 260, 772
4	4, 12	32	−898, −756, −390, −381, −257, −250	−777, −265, 380, 892, −894, −382, 261, 773
5	5, 13	41	−903, −770, −637, −503, 248, 381	−775, −263, 382, 894, −892, −380, 263, 775
6	6, 14	50	−902, −769, −636, −502, 131, 262	−774, −262, 383, 895, −891, −379, 264, 776
7	7, 15	59	−901, −768, −635, −501, 760, 893	−773, −261, 384, 896, −890, −378, 265, 777
8	8, 16	68	−900, −767, −634, −500, 643, 774	−772, −260, 385, 897, −889, −377, 266, 778

[00314] In this way, for the 160 MHz bandwidth, through the design of the 242-tone DRU shown in Table 31 to Table 33, compared with the continuous 242-tone RU in the 160 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 4.33.

[00315] In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 242-tone DRU in 160 MHz is described by using Table 32. It may be understood that the foregoing described manner of determining a 242-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 242-tone DRU can be fully discrete. In another embodiment, a 242-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of data subcarriers of nine 26-tone DRUs whose identifiers are 1 to 9 is determined as the first part and the second part of the 242-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again.

[00316] In this embodiment of this disclosure, an association between a 106-tone DRU and a

26-tone DRU in 160 MHz is described by using Table 33. It may be understood that the foregoing described manner of determining a 242-tone DRU based on a 106-tone DRU and a 26-tone DRU is merely an example, and subcarriers in the 242-tone DRU can be fully discrete. In another embodiment, a 242-tone DRU may alternatively be determined in another manner. For example, a combination of data subcarriers of two 106-tone DRUs whose identifiers are 1 and 2 is determined as the first part of the 242-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again.

[00317] In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -1011, correspondingly the lowest-frequency index of the data subcarrier included in the 242-tone DRU also adaptively changes to another value.

[00318] In a tone plan solution of a DRU, the 160 MHz bandwidth includes four 484-tone DRUs, and each 484-tone DRU includes 468 data subcarriers and 16 pilot subcarriers.

[00319] For example, Table 34 shows an example of four 484-tone DRUs corresponding to the 160 MHz bandwidth, and shows 468 data subcarriers and 16 pilot subcarriers included in each 484-tone DRU. The 468 data subcarriers may be divided into three parts. A first part includes 384 data subcarriers, a second part includes 48 data subcarriers, a third part includes 36 data subcarriers, and a lowest-frequency index of a data subcarrier in a 484-tone DRU whose identifier is 1 is -1011. It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part in Table 34 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 284-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 484-tone DRU.

Table 34

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	-1011, -1006, -1002, -997, -993, -988, -984, -979, -975, -970, -966, -961, -957, -952, -948, -943, -939,	-1007, -989, -971, -953, -935, -917, -	-903, -776, -770, -761, -	-780, -268, 377, 889, -771, -259,

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-934, -930, -925, -921, -916, -912, -907, -888, -883, -879, -874, -870, -865, -861, -856, -852, -847, -843, -838, -834, -829, -825, -820, -816, -811, -807, -802, -798, -793, -789, -784, -755, -750, -746, -741, -737, -732, -728, -723, -719, -714, -710, -705, -701, -696, -692, -687, -683, -678, -674, -669, -665, -660, -656, -651, -632, -627, -623, -618, -614, -609, -605, -600, -596, -591, -587, -582, -578, -573, -569, -564, -560, -555, -551, -546, -542, -537, -533, -528, -499, -494, -490, -485, -481, -476, -472, -467, -463, -458, -454, -449, -445, -440, -436, -431, -427, -422, -418, -413, -409, -404, -400, -395, -376, -371, -367, -362, -358, -353, -349, -344, -340, -335, -331, -326, -322, -317, -313, -308, -304, -299, -295, -290, -286, -281, -277, -272, -243, -238, -234, -229, -225, -220, -216, -211, -207, -202, -198, -193, -189, -184, -180, -175, -171, -166, -162, -157, -153, -148, -144, -139, -120, -115, -111, -106, -102, -97, -93, -88, -84, -79, -75, -70, - 66, -61, -57, -52, -48, -43, -39, - 34, -30, -25, -21, -16, 13, 18, 22, 27, 31, 36, 40, 45, 49, 54, 58, 63, 67, 72, 76, 81, 85, 90, 94, 99, 103, 108, 112, 117, 136, 141, 145, 150, 154,	884, -866, - 848, -830, - 812, -794, - 751, -733, - 715, -697, - 679, -661, - 628, -610, - 592, -574, - 556, -538, 17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	647, -643, -642, - 638, -637, -524, - 520, -516, -507, - 503, -389, -256, - 249, -135, -130, - 126, 121, 132, 244, 248, 249, 253, 381, 500, 504, 508, 517, 521, 644, 756, 761, 765	386, 898, - 775, -263, 382, 894, - 892, -380, 263, 775

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	159, 163, 168, 172, 177, 181, 186, 190, 195, 199, 204, 208, 213, 217, 222, 226, 231, 235, 240, 269, 274, 278, 283, 287, 292, 296, 301, 305, 310, 314, 319, 323, 328, 332, 337, 341, 346, 350, 355, 359, 364, 368, 373, 392, 397, 401, 406, 410, 415, 419, 424, 428, 433, 437, 442, 446, 451, 455, 460, 464, 469, 473, 478, 482, 487, 491, 496, 525, 530, 534, 539, 543, 548, 552, 557, 561, 566, 570, 575, 579, 584, 588, 593, 597, 602, 606, 611, 615, 620, 624, 629, 648, 653, 657, 662, 666, 671, 675, 680, 684, 689, 693, 698, 702, 707, 711, 716, 720, 725, 729, 734, 738, 743, 747, 752, 781, 786, 790, 795, 799, 804, 808, 813, 817, 822, 826, 831, 835, 840, 844, 849, 853, 858, 862, 867, 871, 876, 880, 885, 904, 909, 913, 918, 922, 927, 931, 936, 940, 945, 949, 954, 958, 963, 967, 972, 976, 981, 985, 990, 994, 999, 1003, 1008			
2	-1010, -1005, -1001, -996, -992, - 987, -983, -978, -974, -969, -965, -960, -956, -951, -947, -942, -938, -933, -929, -924, -920, -915, -911, -906, -887, -882, -878, -873, -869, -864, -860, -855, -851, -846, -842, -837, -833, -828, -824, -819, -815, -810, -806, -801, -797, -792, -788,	-998, -980, - 962, -944, - 926, -908, - 875, -857, - 839, -821, - 803, -785, - 742, -724, - 706, -688, -	-902, - 893, -769, -765, - 762, -760, -646, - 641, -636, -523, - 519, -515,	-779, -267, 378, 890, - 896, -384, 259, 771, - 774, -262, 383, 895, - 891, -379, 264, 776

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-783, -754, -749, -745, -740, -736, -731, -727, -722, -718, -713, -709, -704, -700, -695, -691, -686, -682, -677, -673, -668, -664, -659, -655, -650, -631, -626, -622, -617, -613, -608, -604, -599, -595, -590, -586, -581, -577, -572, -568, -563, -559, -554, -550, -545, -541, -536, -532, -527, -498, -493, -489, -484, -480, -475, -471, -466, -462, -457, -453, -448, -444, -439, -435, -430, -426, -421, -417, -412, -408, -403, -399, -394, -375, -370, -366, -361, -357, -352, -348, -343, -339, -334, -330, -325, -321, -316, -312, -307, -303, -298, -294, -289, -285, -280, -276, -271, -242, -237, -233, -228, -224, -219, -215, -210, -206, -201, -197, -192, -188, -183, -179, -174, -170, -165, -161, -156, -152, -147, -143, -138, -119, -114, -110, -105, -101, -96, -92, -87, -83, -78, -74, -69, - 65, -60, -56, -51, -47, -42, -38, - 33, -29, -24, -20, -15, 14, 19, 23, 28, 32, 37, 41, 46, 50, 55, 59, 64, 68, 73, 77, 82, 86, 91, 95, 100, 104, 109, 113, 118, 137, 142, 146, 151, 155, 160, 164, 169, 173, 178, 182, 187, 191, 196, 200, 205, 209, 214, 218, 223, 227, 232, 236, 241, 270, 275, 279, 284, 288, 293, 297, 302, 306, 311, 315, 320, 324, 329, 333, 338,	670, -652, - 619, -601, - 583, -565, - 547, -529, 26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	-506, - 502, -388, -255, - 253, -248, -134, - 129, 122, 128, 131, 133, 245, 250, 262, 501, 505, 509, 518, 522, 640, 645, 757, 762	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	342, 347, 351, 356, 360, 365, 369, 374, 393, 398, 402, 407, 411, 416, 420, 425, 429, 434, 438, 443, 447, 452, 456, 461, 465, 470, 474, 479, 483, 488, 492, 497, 526, 531, 535, 540, 544, 549, 553, 558, 562, 567, 571, 576, 580, 585, 589, 594, 598, 603, 607, 612, 616, 621, 625, 630, 649, 654, 658, 663, 667, 672, 676, 681, 685, 690, 694, 699, 703, 708, 712, 717, 721, 726, 730, 735, 739, 744, 748, 753, 782, 787, 791, 796, 800, 805, 809, 814, 818, 823, 827, 832, 836, 841, 845, 850, 854, 859, 863, 868, 872, 877, 881, 886, 905, 910, 914, 919, 923, 928, 932, 937, 941, 946, 950, 955, 959, 964, 968, 973, 977, 982, 986, 991, 995, 1000, 1004, 1009			
3	–1009, –1004, –1000, –995, –991, – 986, –982, –977, –973, –968, –964, –959, –955, –950, –946, –941, –937, –932, –928, –923, –919, –914, –910, –905, –886, –881, –877, –872, –868, –863, –859, –854, –850, –845, –841, –836, –832, –827, –823, –818, –814, –809, –805, –800, –796, –791, –787, –782, –753, –748, –744, –739, –735, –730, –726, –721, –717, –712, –708, –703, –699, –694, –690, –685, –681, –676, –672, –667, –663, –658, –654, –649, –630, –625, –621, –616, –612,	–495, –477, – 459, –441, – 423, –405, – 372, –354, – 336, –318, – 300, –282, – 239, –221, – 203, –185, – 167, –149, – 116, –98, – 80, –62, –44, –26, 529, 547, 565,	–901, – 899, –768, –764, – 759, –757, –645, – 640, –635, –522, – 518, –509, –505, – 501, –391, –264, – 258, –252, –247, –	–778, –266, 379, 891, – 895, –383, 260, 772, – 773, –261, 384, 896, – 890, –378, 265, 777

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-607, -603, -598, -594, -589, -585, -580, -576, -571, -567, -562, -558, -553, -549, -544, -540, -535, -531, -526, -497, -492, -488, -483, -479, -474, -470, -465, -461, -456, -452, -447, -443, -438, -434, -429, -425, -420, -416, -411, -407, -402, -398, -393, -374, -369, -365, -360, -356, -351, -347, -342, -338, -333, -329, -324, -320, -315, -311, -306, -302, -297, -293, -288, -284, -279, -275, -270, -241, -236, -232, -227, -223, -218, -214, -209, -205, -200, -196, -191, -187, -182, -178, -173, -169, -164, -160, -155, -151, -146, -142, -137, -118, -113, -109, -104, -100, -95, -91, -86, -82, -77, -73, -68, - 64, -59, -55, -50, -46, -41, -37, - 32, -28, -23, -19, -14, 15, 20, 24, 29, 33, 38, 42, 47, 51, 56, 60, 65, 69, 74, 78, 83, 87, 92, 96, 101, 105, 110, 114, 119, 138, 143, 147, 152, 156, 161, 165, 170, 174, 179, 183, 188, 192, 197, 201, 206, 210, 215, 219, 224, 228, 233, 237, 242, 271, 276, 280, 285, 289, 294, 298, 303, 307, 312, 316, 321, 325, 330, 334, 339, 343, 348, 352, 357, 361, 366, 370, 375, 394, 399, 403, 408, 412, 417, 421, 426, 430, 435, 439, 444, 448, 453, 457, 462, 466, 471, 475, 480, 484, 489, 493, 498, 527, 532, 536,	583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	133, -131, -128, 129, 134, 246, 251, 502, 506, 515, 519, 641, 646, 758, 760, 763, 893	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	541, 545, 550, 554, 559, 563, 568, 572, 577, 581, 586, 590, 595, 599, 604, 608, 613, 617, 622, 626, 631, 650, 655, 659, 664, 668, 673, 677, 682, 686, 691, 695, 700, 704, 709, 713, 718, 722, 727, 731, 736, 740, 745, 749, 754, 783, 788, 792, 797, 801, 806, 810, 815, 819, 824, 828, 833, 837, 842, 846, 851, 855, 860, 864, 869, 873, 878, 882, 887, 906, 911, 915, 920, 924, 929, 933, 938, 942, 947, 951, 956, 960, 965, 969, 974, 978, 983, 987, 992, 996, 1001, 1005, 1010			
4	–1008, –1003, –999, –994, –990, – 985, –981, –976, –972, –967, –963, –958, –954, –949, –945, –940, –936, –931, –927, –922, –918, –913, –909, –904, –885, –880, –876, –871, –867, –862, –858, –853, –849, –844, –840, –835, –831, –826, –822, –817, –813, –808, –804, –799, –795, –790, –786, –781, –752, –747, –743, –738, –734, –729, –725, –720, –716, –711, –707, –702, –698, –693, –689, –684, –680, –675, –671, –666, –662, –657, –653, –648, –629, –624, –620, –615, –611, –606, –602, –597, –593, –588, –584, –579, –575, –570, –566, –561, –557, –552, –548, –543, –539, –534, –530, –525, –496, –491, –487, –482, –478, –473, –469, –464, –460, –455, –451,	–486, –468, – 450, –432, – 414, –396, – 363, –345, – 327, –309, – 291, –273, – 230, –212, – 194, –176, – 158, –140, – 107, –89, – 71, –53, –35, –17, 538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794,	–900, – 898, –767, –763, – 758, –756, –644, – 639, –634, –521, – 517, –508, –504, – 500, –390, –381, – 257, –251, –250, – 246, –132, –127, 130, 135, 247, 252, 503, 507, 516,	–777, –265, 380, 892, – 894, –382, 261, 773, – 772, –260, 385, 897, – 889, –377, 266, 778

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-446, -442, -437, -433, -428, -424, -419, -415, -410, -406, -401, -397, -392, -373, -368, -364, -359, -355, -350, -346, -341, -337, -332, -328, -323, -319, -314, -310, -305, -301, -296, -292, -287, -283, -278, -274, -269, -240, -235, -231, -226, -222, -217, -213, -208, -204, -199, -195, -190, -186, -181, -177, -172, -168, -163, -159, -154, -150, -145, -141, -136, -117, -112, -108, -103, -99, - 94, -90, -85, -81, -76, -72, -67, - 63, -58, -54, -49, -45, -40, -36, - 31, -27, -22, -18, -13, 16, 21, 25, 30, 34, 39, 43, 48, 52, 57, 61, 66, 70, 75, 79, 84, 88, 93, 97, 102, 106, 111, 115, 120, 139, 144, 148, 153, 157, 162, 166, 171, 175, 180, 184, 189, 193, 198, 202, 207, 211, 216, 220, 225, 229, 234, 238, 243, 272, 277, 281, 286, 290, 295, 299, 304, 308, 313, 317, 322, 326, 331, 335, 340, 344, 349, 353, 358, 362, 367, 371, 376, 395, 400, 404, 409, 413, 418, 422, 427, 431, 436, 440, 445, 449, 454, 458, 463, 467, 472, 476, 481, 485, 490, 494, 499, 528, 533, 537, 542, 546, 551, 555, 560, 564, 569, 573, 578, 582, 587, 591, 596, 600, 605, 609, 614, 618, 623, 627, 632, 651, 656, 660, 665, 669, 674, 678, 683, 687, 692, 696, 701, 705, 710,	812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007	520, 642, 643, 647, 759, 764, 774	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	714, 719, 723, 728, 732, 737, 741, 746, 750, 755, 784, 789, 793, 798, 802, 807, 811, 816, 820, 825, 829, 834, 838, 843, 847, 852, 856, 861, 865, 870, 874, 879, 883, 888, 907, 912, 916, 921, 925, 930, 934, 939, 943, 948, 952, 957, 961, 966, 970, 975, 979, 984, 988, 993, 997, 1002, 1006, 1011			

[00320] For the first part of data subcarriers (384 data subcarriers) in the 484-tone DRU, as shown in Table 34, the 384 data subcarriers include 192 high-frequency subcarriers (whose subcarrier indices are positive values) and 192 low-frequency subcarriers (whose subcarrier indices are negative values). If every 24 of the 384 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 19 and 29.

[00321] In other words, for the 24 data subcarriers in the same group, an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in odd-numbered locations is 9, and an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in even-numbered locations is 9. An absolute value of an index difference between a data subcarrier in an even-numbered location and a previous adjacent data subcarrier is 5. Correspondingly, an absolute value of an index difference between a data subcarrier in an odd-numbered location and a previous adjacent data subcarrier is 4. In some embodiments, the 24 data subcarriers in the same group may be considered to include two sequences, for example, an odd-numbered location sequence and an even-numbered location sequence. An absolute value of an index difference between adjacent data subcarriers in each sequence is 9. For example, indices of the first 24 data subcarriers of the first part of data subcarriers of the 484-tone DRU whose identifier is 1 include $-1011, -1006, -1002, -997, -993, -988, -984, -979, -975, -970, -966, -961, -957, -952, -948, -943, -939, -934, -930, -925, -921, -916, -912$, and -907 , and may be represented as a combination of two sequences $[-1011: 9: -912]$ and $[-1006: 9: -907]$.

[00322] In other words, it is assumed that indices of 384 data subcarriers (the first part) included in each 484-tone DRU are sequentially arranged in a frequency direction and then divided into 16 groups, and each group includes 24 data subcarriers. Absolute values of index differences between 24 data subcarriers in a same group are alternately 5 and 4.

[00323] As shown in Table 34, there is a fixed offset between indices of 384 data subcarriers (the first part) included in two 484-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 384 data subcarriers in a 484-tone DRU whose identifier is i ($i = 1, 2$, or 3) all plus 1, to obtain indices of 384 data subcarriers in a 484-tone DRU whose identifier is $i + 1$.

[00324] The second part of data subcarriers (48 data subcarriers) in the 484-tone DRU includes 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the second part (48 data subcarriers) are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 48 data subcarriers may be considered as eight groups, including four low-frequency groups and four high-frequency groups. An index of each data subcarrier in a low-frequency group is a negative value, and an index of each data subcarrier in a high-frequency group is a positive value. Absolute values of index differences between adjacent data subcarriers in a same group are 18, absolute values of index differences between data subcarriers in two adjacent low-frequency groups or two adjacent high-frequency groups are sequentially 33, 43, and 33, and absolute values of index differences between data subcarriers in a high-frequency group and a low-frequency group (an absolute value of a difference between a minimum index of all data subcarriers in a high-frequency group and a maximum index of all data subcarriers in a low-frequency group) are 555.

[00325] In addition, indices of 48 data subcarriers in the second part of the 484-tone DRU whose identifier is i ($i = 1$ or 3) all plus 9, to obtain indices of 48 data subcarriers in the second part of the 484-tone DRU whose identifier is $i + 1$. Indices of 48 data subcarriers in the second part of the 484-tone DRU whose identifier is 2 all plus 503, to obtain indices of 48 data subcarriers in the second part of the 484-tone DRU whose identifier is 3.

[00326] In addition to the 384 data subcarriers in the first part column and the 48 data subcarriers in the second part column of the foregoing table, each 484-tone DRU further includes 36 data subcarriers (the third part) and 16 pilot subcarriers. In some embodiments, 36 data subcarriers and 16 pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 34 shows an example, so

that subcarriers included in the 484-tone DRU can be fully discrete.

[00327] As shown in Table 34, each 484-tone DRU includes 16 pilot subcarriers, including eight high-frequency subcarriers and eight low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

5 **[00328]** As shown in Table 31, a 484-tone DRU whose identifier is i ($i = 1$ to 4) may be considered as a combination of a 242-tone DRU whose identifier is i and a 242-tone DRU whose identifier is $i + 4$. In this way, subcarriers in the 484-tone DRU can be fully discrete. For example, data subcarriers in a 484-tone DRU whose identifier is 1 are a combination of data subcarriers in a 242-tone DRU whose identifier is 1 and data subcarriers in a 242-tone DRU whose identifier is
10 5 in Table 31. 16 pilot subcarriers in the 484-tone DRU whose identifier is 1 are a combination of eight pilot subcarriers in the 242-tone DRU whose identifier is 1 and eight pilot subcarriers in the 242-tone DRU whose identifier is 5 in Table 31. Correspondingly, Table 34 may also be simplified and represented as the following Table 35 based on Table 31.

Table 35

Identifier of a 484-tone DRU	Identifier of a 242-tone DRU
1	1, 5
2	2, 6
3	3, 7
4	4, 8

15 **[00329]** In addition, in this embodiment of this disclosure, the identifier of the 484-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 484-tone DRU. For example, an identifier of a 484-tone DRU having a lowest-frequency index -1011 is 1.

[00330] According to the design of the 484-tone DRU shown in Table 34 or Table 35 in this
20 embodiment of this disclosure, compared with the continuous 484-tone RU in the 160 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 2.6.

[00331] In this embodiment of this disclosure, an association between a 242-tone DRU and a 484-tone DRU in 160 MHz is described by using Table 35. It may be understood that the foregoing
25 described manner of determining a 484-tone DRU based on a 242-tone DRU is merely an example, and subcarriers in the 484-tone DRU can be fully discrete. In another embodiment, the 484-tone DRU may alternatively be determined in another manner. This is not limited in this disclosure. Details are not described again.

[00332] In addition, with reference to the description of the 242-tone DRU in Table 32 or Table

33, the 484-tone DRU may alternatively be determined based on a 26-tone DRU or based on a 26-tone DRU and a 106-tone DRU (or a 52-tone DRU). For brevity, details are not described herein again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -1011 , correspondingly the lowest-frequency index of the data subcarrier included in the 484-tone DRU also adaptively changes to another value.

[00333] Tone plans of 26-tone DRUs, 52-tone DRUs, 106-tone DRUs, 242-tone DRUs, and 484-tone DRUs in 160 MHz are separately described above with reference to Table 26 to Table 35. An index -1011 is used as a lowest-frequency index of a data subcarrier.

[00334] The foregoing content describes in detail subcarriers (data subcarriers and pilot subcarriers) separately included in different DRUs in the 160 MHz bandwidth. For a characteristic followed by a tone plan of the DRUs in the 160 MHz bandwidth and related description, refer to corresponding embodiments of the 40 MHz bandwidth. Details are not described herein again.

[00335] In some embodiments, data subcarriers included in the 26-tone DRU in 160 MHz may be obtained by shifting leftward by n_{11} , shifting rightward by n_{12} , shifting leftward by n_{21} , shifting rightward by n_{22} , shifting leftward by n_{31} , and shifting rightward by n_{32} based on Table 12. Alternatively, if $n_{11} = n_{12} = 128$, and $n_{21} = n_{22} = 256$, data subcarriers included in the 26-tone DRU in 160 MHz may be obtained by shifting leftward by n_{31} and/or shifting rightward by n_{32} based on the 26-tone DRU in 80 MHz (Table 16). In an example of Table 26, $n_{31} = n_{32} = 512$.

However, n_{31} and n_{32} may alternatively be other values, and are not listed herein again.

[00336] Correspondingly, Table 26 may also be simplified and represented as the following Table 36, where numbers in brackets $\{\}$ are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12, and may be understood as being obtained by shifting leftward/rightward by 512 based on Table 16.

Table 36

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$\{1\} - 640, \{1\} - 896$	$-780, -647$
2	$\{2\} - 640, \{2\} - 896$	$-779, -646$
3	$\{3\} - 640, \{3\} - 896$	$-778, -645$
4	$\{4\} - 640, \{4\} - 896$	$-777, -644$
5	$\{5\} - 640, \{5\} - 896$	$-776, -643$
6	$\{6\} - 640, \{6\} - 896$	$-775, -642$
7	$\{7\} - 640, \{7\} - 896$	$-774, -641$

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
8	{8} – 640, {8} – 896	–773, –640
9	{9} – 640, {9} – 896	–772, –639
10	{10} – 640, {10} – 896	–771, –638
11	{11} – 640, {11} – 896	–896, –765
12	{12} – 640, {12} – 896	–895, –764
13	{13} – 640, {13} – 896	–894, –763
14	{14} – 640, {14} – 896	–893, –762
15	{15} – 640, {15} – 896	–892, –761
16	{16} – 640, {16} – 896	–891, –760
17	{17} – 640, {17} – 896	–890, –759
18	{18} – 640, {18} – 896	–889, –758
19	{1} – 128, {1} – 384	–268, –135
20	{2} – 128, {2} – 384	–267, –134
21	{3} – 128, {3} – 384	–266, –133
22	{4} – 128, {4} – 384	–265, –132
23	{5} – 128, {5} – 384	–264, –131
24	{6} – 128, {6} – 384	–263, –130
25	{7} – 128, {7} – 384	–262, –129
26	{8} – 128, {8} – 384	–261, –128
27	{9} – 128, {9} – 384	–260, –127
28	{10} – 128, {10} – 384	–259, –126
29	{11} – 128, {11} – 384	–384, –253
30	{12} – 128, {12} – 384	–383, –252
31	{13} – 128, {13} – 384	–382, –251
32	{14} – 128, {14} – 384	–381, –250
33	{15} – 128, {15} – 384	–380, –249
34	{16} – 128, {16} – 384	–379, –248
35	{17} – 128, {17} – 384	–378, –247
36	{18} – 128, {18} – 384	–377, –246
37	{1} + 128, {1} + 384	244, 377
38	{2} + 128, {2} + 384	245, 378
39	{3} + 128, {3} + 384	246, 379
40	{4} + 128, {4} + 384	247, 380

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
41	{5} + 128, {5} + 384	248, 381
42	{6} + 128, {6} + 384	249, 382
43	{7} + 128, {7} + 384	250, 383
44	{8} + 128, {8} + 384	251, 384
45	{9} + 128, {9} + 384	252, 385
46	{10} + 128, {10} + 384	253, 386
47	{11} + 128, {11} + 384	128, 259
48	{12} + 128, {12} + 384	129, 260
49	{13} + 128, {13} + 384	130, 261
50	{14} + 128, {14} + 384	131, 262
51	{15} + 128, {15} + 384	132, 263
52	{16} + 128, {16} + 384	133, 264
53	{17} + 128, {17} + 384	134, 265
54	{18} + 128, {18} + 384	135, 266
55	{1} + 640, {1} + 896	756, 889
56	{2} + 640, {2} + 896	757, 890
57	{3} + 640, {3} + 896	758, 891
58	{4} + 640, {4} + 896	759, 892
59	{5} + 640, {5} + 896	760, 893
60	{6} + 640, {6} + 896	761, 894
61	{7} + 640, {7} + 896	762, 895
62	{8} + 640, {8} + 896	763, 896
63	{9} + 640, {9} + 896	764, 897
64	{10} + 640, {10} + 896	765, 898
65	{11} + 640, {11} + 896	640, 771
66	{12} + 640, {12} + 896	641, 772
67	{13} + 640, {13} + 896	642, 773
68	{14} + 640, {14} + 896	643, 774
69	{15} + 640, {15} + 896	644, 775
70	{16} + 640, {16} + 896	645, 776
71	{17} + 640, {17} + 896	646, 777
72	{18} + 640, {18} + 896	647, 778

[00337] It may be understood that, for the 52-tone DRU, the 106-tone DRU, the 242-tone DRU,

and the 484-tone DRU in 160 MHz, with reference to the foregoing Table 28, Table 30, Table 32, and Table 35, indices of data subcarriers (or the first part) included in the 52-tone DRU, the 106-tone DRU, the 242-tone DRU, and the 484-tone DRU may also be represented as variations based on Table 12. For brevity, the examples are not elaborated herein.

5 **[00338]** In addition, it may be understood that, although an embodiment of obtaining DRUs of various sizes in 160 MHz based on Table 12 is described, this disclosure is not limited thereto. For example, an index of a subcarrier included in each DRU may be determined without considering the grouping in Table 12. For example, an index of a subcarrier included in each DRU may be determined based on another grouping form. This is not limited in this disclosure.

10 **[00339]** For a 320 MHz bandwidth:

[00340] The 320 MHz bandwidth includes 4096 subcarriers in total, and the subcarrier index range is [−2048, 2047]. The 320 MHz bandwidth may include 144 26-tone RUs.

[00341] In a tone plan solution of a DRU, the 320 MHz bandwidth includes 144 26-tone DRUs, and each 26-tone DRU includes 24 data subcarriers and two pilot subcarriers. For example, Table 15 37 shows an example of 144 26-tone DRUs corresponding to the 320 MHz bandwidth, and shows indices of 24 data subcarriers and indices of two pilot subcarriers included in each DRU, and a lowest-frequency index of a data subcarrier in a 26-tone DRU whose identifier is 1 is −2035.

Table 37

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	−2035, −2017, −1999, −1981, −1963, −1945, −1912, −1894, −1876, −1858, −1840, −1822, −1779, −1761, −1743, −1725, −1707, −1689, −1656, −1638, −1620, −1602, −1584, −1566	−1804, −1671
2	−2034, −2016, −1998, −1980, −1962, −1944, −1911, −1893, −1875, −1857, −1839, −1821, −1778, −1760, −1742, −1724, −1706, −1688, −1655, −1637, −1619, −1601, −1583, −1565	−1803, −1670
3	−2033, −2015, −1997, −1979, −1961, −1943, −1910, −1892, −1874, −1856, −1838, −1820, −1777, −1759, −1741, −1723, −1705, −1687, −1654, −1636, −1618, −1600, −1582, −1564	−1802, −1669
4	−2032, −2014, −1996, −1978, −1960, −1942, −1909, −1891, −1873, −1855, −1837, −1819, −1776, −1758, −1740, −1722, −1704, −1686, −	−1801, −1668

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1653, –1635, –1617, –1599, –1581, –1563	
5	–2031, –2013, –1995, –1977, –1959, –1941, –1908, –1890, –1872, –1854, –1836, –1818, –1775, –1757, –1739, –1721, –1703, –1685, –1652, –1634, –1616, –1598, –1580, –1562	–1800, –1667
6	–2030, –2012, –1994, –1976, –1958, –1940, –1907, –1889, –1871, –1853, –1835, –1817, –1774, –1756, –1738, –1720, –1702, –1684, –1651, –1633, –1615, –1597, –1579, –1561	–1799, –1666
7	–2029, –2011, –1993, –1975, –1957, –1939, –1906, –1888, –1870, –1852, –1834, –1816, –1773, –1755, –1737, –1719, –1701, –1683, –1650, –1632, –1614, –1596, –1578, –1560	–1798, –1665
8	–2028, –2010, –1992, –1974, –1956, –1938, –1905, –1887, –1869, –1851, –1833, –1815, –1772, –1754, –1736, –1718, –1700, –1682, –1649, –1631, –1613, –1595, –1577, –1559	–1797, –1664
9	–2027, –2009, –1991, –1973, –1955, –1937, –1904, –1886, –1868, –1850, –1832, –1814, –1771, –1753, –1735, –1717, –1699, –1681, –1648, –1630, –1612, –1594, –1576, –1558	–1796, –1663
10	–2026, –2008, –1990, –1972, –1954, –1936, –1903, –1885, –1867, –1849, –1831, –1813, –1770, –1752, –1734, –1716, –1698, –1680, –1647, –1629, –1611, –1593, –1575, –1557	–1795, –1662
11	–2025, –2007, –1989, –1971, –1953, –1935, –1902, –1884, –1866, –1848, –1830, –1812, –1769, –1751, –1733, –1715, –1697, –1679, –1646, –1628, –1610, –1592, –1574, –1556	–1920, –1789
12	–2024, –2006, –1988, –1970, –1952, –1934, –1901, –1883, –1865, –1847, –1829, –1811, –1768, –1750, –1732, –1714, –1696, –1678, –1645, –1627, –1609, –1591, –1573, –1555	–1919, –1788
13	–2023, –2005, –1987, –1969, –1951, –1933, –1900, –1882, –1864, –1846, –1828, –1810, –1767, –1749, –1731, –1713, –1695, –1677, –1644, –1626, –1608, –1590, –1572, –1554	–1918, –1787
14	–2022, –2004, –1986, –1968, –1950, –1932, –1899, –1881, –1863, –1845, –1827, –1809, –1766, –1748, –1730, –1712, –1694, –1676, –	–1917, –1786

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1643, –1625, –1607, –1589, –1571, –1553	
15	–2021, –2003, –1985, –1967, –1949, –1931, –1898, –1880, –1862, –1844, –1826, –1808, –1765, –1747, –1729, –1711, –1693, –1675, –1642, –1624, –1606, –1588, –1570, –1552	–1916, –1785
16	–2020, –2002, –1984, –1966, –1948, –1930, –1897, –1879, –1861, –1843, –1825, –1807, –1764, –1746, –1728, –1710, –1692, –1674, –1641, –1623, –1605, –1587, –1569, –1551	–1915, –1784
17	–2019, –2001, –1983, –1965, –1947, –1929, –1896, –1878, –1860, –1842, –1824, –1806, –1763, –1745, –1727, –1709, –1691, –1673, –1640, –1622, –1604, –1586, –1568, –1550	–1914, –1783
18	–2018, –2000, –1982, –1964, –1946, –1928, –1895, –1877, –1859, –1841, –1823, –1805, –1762, –1744, –1726, –1708, –1690, –1672, –1639, –1621, –1603, –1585, –1567, –1549	–1913, –1782
19	–1523, –1505, –1487, –1469, –1451, –1433, –1400, –1382, –1364, –1346, –1328, –1310, –1267, –1249, –1231, –1213, –1195, –1177, –1144, –1126, –1108, –1090, –1072, –1054	–1292, –1159
20	–1522, –1504, –1486, –1468, –1450, –1432, –1399, –1381, –1363, –1345, –1327, –1309, –1266, –1248, –1230, –1212, –1194, –1176, –1143, –1125, –1107, –1089, –1071, –1053	–1291, –1158
21	–1521, –1503, –1485, –1467, –1449, –1431, –1398, –1380, –1362, –1344, –1326, –1308, –1265, –1247, –1229, –1211, –1193, –1175, –1142, –1124, –1106, –1088, –1070, –1052	–1290, –1157
22	–1520, –1502, –1484, –1466, –1448, –1430, –1397, –1379, –1361, –1343, –1325, –1307, –1264, –1246, –1228, –1210, –1192, –1174, –1141, –1123, –1105, –1087, –1069, –1051	–1289, –1156
23	–1519, –1501, –1483, –1465, –1447, –1429, –1396, –1378, –1360, –1342, –1324, –1306, –1263, –1245, –1227, –1209, –1191, –1173, –1140, –1122, –1104, –1086, –1068, –1050	–1288, –1155
24	–1518, –1500, –1482, –1464, –1446, –1428, –1395, –1377, –1359, –1341, –1323, –1305, –1262, –1244, –1226, –1208, –1190, –1172, –	–1287, –1154

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1139, –1121, –1103, –1085, –1067, –1049	
25	–1517, –1499, –1481, –1463, –1445, –1427, –1394, –1376, –1358, –1340, –1322, –1304, –1261, –1243, –1225, –1207, –1189, –1171, –1138, –1120, –1102, –1084, –1066, –1048	–1286, –1153
26	–1516, –1498, –1480, –1462, –1444, –1426, –1393, –1375, –1357, –1339, –1321, –1303, –1260, –1242, –1224, –1206, –1188, –1170, –1137, –1119, –1101, –1083, –1065, –1047	–1285, –1152
27	–1515, –1497, –1479, –1461, –1443, –1425, –1392, –1374, –1356, –1338, –1320, –1302, –1259, –1241, –1223, –1205, –1187, –1169, –1136, –1118, –1100, –1082, –1064, –1046	–1284, –1151
28	–1514, –1496, –1478, –1460, –1442, –1424, –1391, –1373, –1355, –1337, –1319, –1301, –1258, –1240, –1222, –1204, –1186, –1168, –1135, –1117, –1099, –1081, –1063, –1045	–1283, –1150
29	–1513, –1495, –1477, –1459, –1441, –1423, –1390, –1372, –1354, –1336, –1318, –1300, –1257, –1239, –1221, –1203, –1185, –1167, –1134, –1116, –1098, –1080, –1062, –1044	–1408, –1277
30	–1512, –1494, –1476, –1458, –1440, –1422, –1389, –1371, –1353, –1335, –1317, –1299, –1256, –1238, –1220, –1202, –1184, –1166, –1133, –1115, –1097, –1079, –1061, –1043	–1407, –1276
31	–1511, –1493, –1475, –1457, –1439, –1421, –1388, –1370, –1352, –1334, –1316, –1298, –1255, –1237, –1219, –1201, –1183, –1165, –1132, –1114, –1096, –1078, –1060, –1042	–1406, –1275
32	–1510, –1492, –1474, –1456, –1438, –1420, –1387, –1369, –1351, –1333, –1315, –1297, –1254, –1236, –1218, –1200, –1182, –1164, –1131, –1113, –1095, –1077, –1059, –1041	–1405, –1274
33	–1509, –1491, –1473, –1455, –1437, –1419, –1386, –1368, –1350, –1332, –1314, –1296, –1253, –1235, –1217, –1199, –1181, –1163, –1130, –1112, –1094, –1076, –1058, –1040	–1404, –1273
34	–1508, –1490, –1472, –1454, –1436, –1418, –1385, –1367, –1349, –1331, –1313, –1295, –1252, –1234, –1216, –1198, –1180, –1162, –	–1403, –1272

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1129, –1111, –1093, –1075, –1057, –1039	
35	–1507, –1489, –1471, –1453, –1435, –1417, –1384, –1366, –1348, –1330, –1312, –1294, –1251, –1233, –1215, –1197, –1179, –1161, –1128, –1110, –1092, –1074, –1056, –1038	–1402, –1271
36	–1506, –1488, –1470, –1452, –1434, –1416, –1383, –1365, –1347, –1329, –1311, –1293, –1250, –1232, –1214, –1196, –1178, –1160, –1127, –1109, –1091, –1073, –1055, –1037	–1401, –1270
37	–1011, –993, –975, –957, –939, –921, –888, –870, –852, –834, –816, –798, –755, –737, –719, –701, –683, –665, –632, –614, –596, –578, –560, –542	–780, –647
38	–1010, –992, –974, –956, –938, –920, –887, –869, –851, –833, –815, –797, –754, –736, –718, –700, –682, –664, –631, –613, –595, –577, –559, –541	–779, –646
39	–1009, –991, –973, –955, –937, –919, –886, –868, –850, –832, –814, –796, –753, –735, –717, –699, –681, –663, –630, –612, –594, –576, –558, –540	–778, –645
40	–1008, –990, –972, –954, –936, –918, –885, –867, –849, –831, –813, –795, –752, –734, –716, –698, –680, –662, –629, –611, –593, –575, –557, –539	–777, –644
41	–1007, –989, –971, –953, –935, –917, –884, –866, –848, –830, –812, –794, –751, –733, –715, –697, –679, –661, –628, –610, –592, –574, –556, –538	–776, –643
42	–1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537	–775, –642
43	–1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, –810, –792, –749, –731, –713, –695, –677, –659, –626, –608, –590, –572, –554, –536	–774, –641
44	–1004, –986, –968, –950, –932, –914, –881, –863, –845, –827, –809, –791, –748, –730, –712, –694, –676, –658, –625, –607, –589, –571, –	–773, –640

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	553, –535	
45	–1003, –985, –967, –949, –931, –913, –880, –862, –844, –826, –808, –790, –747, –729, –711, –693, –675, –657, –624, –606, –588, –570, –552, –534	–772, –639
46	–1002, –984, –966, –948, –930, –912, –879, –861, –843, –825, –807, –789, –746, –728, –710, –692, –674, –656, –623, –605, –587, –569, –551, –533	–771, –638
47	–1001, –983, –965, –947, –929, –911, –878, –860, –842, –824, –806, –788, –745, –727, –709, –691, –673, –655, –622, –604, –586, –568, –550, –532	–896, –765
48	–1000, –982, –964, –946, –928, –910, –877, –859, –841, –823, –805, –787, –744, –726, –708, –690, –672, –654, –621, –603, –585, –567, –549, –531	–895, –764
49	–999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530	–894, –763
50	–998, –980, –962, –944, –926, –908, –875, –857, –839, –821, –803, –785, –742, –724, –706, –688, –670, –652, –619, –601, –583, –565, –547, –529	–893, –762
51	–997, –979, –961, –943, –925, –907, –874, –856, –838, –820, –802, –784, –741, –723, –705, –687, –669, –651, –618, –600, –582, –564, –546, –528	–892, –761
52	–996, –978, –960, –942, –924, –906, –873, –855, –837, –819, –801, –783, –740, –722, –704, –686, –668, –650, –617, –599, –581, –563, –545, –527	–891, –760
53	–995, –977, –959, –941, –923, –905, –872, –854, –836, –818, –800, –782, –739, –721, –703, –685, –667, –649, –616, –598, –580, –562, –544, –526	–890, –759
54	–994, –976, –958, –940, –922, –904, –871, –853, –835, –817, –799, –781, –738, –720, –702, –684, –666, –648, –615, –597, –579, –561, –	–889, –758

Identifier of a 26- tone DRU	Index of a data subcarrier	Index of a pilot subcarrie r
	543, –525	
55	–499, –481, –463, –445, –427, –409, –376, –358, –340, –322, –304, –286, –243, –225, –207, –189, –171, –153, –120, –102, –84, –66, –48, –30	–268, –135
56	–498, –480, –462, –444, –426, –408, –375, –357, –339, –321, –303, –285, –242, –224, –206, –188, –170, –152, –119, –101, –83, –65, –47, –29	–267, –134
57	–497, –479, –461, –443, –425, –407, –374, –356, –338, –320, –302, –284, –241, –223, –205, –187, –169, –151, –118, –100, –82, –64, –46, –28	–266, –133
58	–496, –478, –460, –442, –424, –406, –373, –355, –337, –319, –301, –283, –240, –222, –204, –186, –168, –150, –117, –99, –81, –63, –45, –27	–265, –132
59	–495, –477, –459, –441, –423, –405, –372, –354, –336, –318, –300, –282, –239, –221, –203, –185, –167, –149, –116, –98, –80, –62, –44, –26	–264, –131
60	–494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25	–263, –130
61	–493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24	–262, –129
62	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23	–261, –128
63	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22	–260, –127
64	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –	–259, –126

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	21	
65	−489, −471, −453, −435, −417, −399, −366, −348, −330, −312, −294, −276, −233, −215, −197, −179, −161, −143, −110, −92, −74, −56, −38, −20	−384, −253
66	−488, −470, −452, −434, −416, −398, −365, −347, −329, −311, −293, −275, −232, −214, −196, −178, −160, −142, −109, −91, −73, −55, −37, −19	−383, −252
67	−487, −469, −451, −433, −415, −397, −364, −346, −328, −310, −292, −274, −231, −213, −195, −177, −159, −141, −108, −90, −72, −54, −36, −18	−382, −251
68	−486, −468, −450, −432, −414, −396, −363, −345, −327, −309, −291, −273, −230, −212, −194, −176, −158, −140, −107, −89, −71, −53, −35, −17	−381, −250
69	−485, −467, −449, −431, −413, −395, −362, −344, −326, −308, −290, −272, −229, −211, −193, −175, −157, −139, −106, −88, −70, −52, −34, −16	−380, −249
70	−484, −466, −448, −430, −412, −394, −361, −343, −325, −307, −289, −271, −228, −210, −192, −174, −156, −138, −105, −87, −69, −51, −33, −15	−379, −248
71	−483, −465, −447, −429, −411, −393, −360, −342, −324, −306, −288, −270, −227, −209, −191, −173, −155, −137, −104, −86, −68, −50, −32, −14	−378, −247
72	−482, −464, −446, −428, −410, −392, −359, −341, −323, −305, −287, −269, −226, −208, −190, −172, −154, −136, −103, −85, −67, −49, −31, −13	−377, −246
73	13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482	244, 377
74	14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	245, 378
75	15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307,	246, 379

Identifier of a 26- tone DRU	Index of a data subcarrier	Index of a pilot subcarrie r
	325, 343, 361, 394, 412, 430, 448, 466, 484	
76	16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	247, 380
77	17, 35, 53, 71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	248, 381
78	18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	249, 382
79	19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	250, 383
80	20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	251, 384
81	21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	252, 385
82	22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	253, 386
83	23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	128, 259
84	24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	129, 260
85	25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494	130, 261
86	26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	131, 262
87	27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	132, 263
88	28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	133, 264
89	29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	134, 265
90	30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322,	135, 266

Identifier of a 26- tone DRU	Index of a data subcarrier	Index of a pilot subcarrie r
	340, 358, 376, 409, 427, 445, 463, 481, 499	
91	525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994	756, 889
92	526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	757, 890
93	527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996	758, 891
94	528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997	759, 892
95	529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	760, 893
96	530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999	761, 894
97	531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000	762, 895
98	532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001	763, 896
99	533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002	764, 897
100	534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003	765, 898
101	535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	640, 771
102	536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005	641, 772
103	537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006	642, 773
104	538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007	643, 774
105	539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813,	644, 775

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	831, 849, 867, 885, 918, 936, 954, 972, 990, 1008	
106	540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009	645, 776
107	541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	646, 777
108	542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011	647, 778
109	1037, 1055, 1073, 1091, 1109, 1127, 1160, 1178, 1196, 1214, 1232, 1250, 1293, 1311, 1329, 1347, 1365, 1383, 1416, 1434, 1452, 1470, 1488, 1506	1268, 1401
110	1038, 1056, 1074, 1092, 1110, 1128, 1161, 1179, 1197, 1215, 1233, 1251, 1294, 1312, 1330, 1348, 1366, 1384, 1417, 1435, 1453, 1471, 1489, 1507	1269, 1402
111	1039, 1057, 1075, 1093, 1111, 1129, 1162, 1180, 1198, 1216, 1234, 1252, 1295, 1313, 1331, 1349, 1367, 1385, 1418, 1436, 1454, 1472, 1490, 1508	1270, 1403
112	1040, 1058, 1076, 1094, 1112, 1130, 1163, 1181, 1199, 1217, 1235, 1253, 1296, 1314, 1332, 1350, 1368, 1386, 1419, 1437, 1455, 1473, 1491, 1509	1271, 1404
113	1041, 1059, 1077, 1095, 1113, 1131, 1164, 1182, 1200, 1218, 1236, 1254, 1297, 1315, 1333, 1351, 1369, 1387, 1420, 1438, 1456, 1474, 1492, 1510	1272, 1405
114	1042, 1060, 1078, 1096, 1114, 1132, 1165, 1183, 1201, 1219, 1237, 1255, 1298, 1316, 1334, 1352, 1370, 1388, 1421, 1439, 1457, 1475, 1493, 1511	1273, 1406
115	1043, 1061, 1079, 1097, 1115, 1133, 1166, 1184, 1202, 1220, 1238, 1256, 1299, 1317, 1335, 1353, 1371, 1389, 1422, 1440, 1458, 1476, 1494, 1512	1274, 1407
116	1044, 1062, 1080, 1098, 1116, 1134, 1167, 1185, 1203, 1221, 1239, 1257, 1300, 1318, 1336, 1354, 1372, 1390, 1423, 1441, 1459, 1477,	1275, 1408

Identifier of a 26- tone DRU	Index of a data subcarrier	Index of a pilot subcarrie r
	1495, 1513	
117	1045, 1063, 1081, 1099, 1117, 1135, 1168, 1186, 1204, 1222, 1240, 1258, 1301, 1319, 1337, 1355, 1373, 1391, 1424, 1442, 1460, 1478, 1496, 1514	1276, 1409
118	1046, 1064, 1082, 1100, 1118, 1136, 1169, 1187, 1205, 1223, 1241, 1259, 1302, 1320, 1338, 1356, 1374, 1392, 1425, 1443, 1461, 1479, 1497, 1515	1277, 1410
119	1047, 1065, 1083, 1101, 1119, 1137, 1170, 1188, 1206, 1224, 1242, 1260, 1303, 1321, 1339, 1357, 1375, 1393, 1426, 1444, 1462, 1480, 1498, 1516	1152, 1283
120	1048, 1066, 1084, 1102, 1120, 1138, 1171, 1189, 1207, 1225, 1243, 1261, 1304, 1322, 1340, 1358, 1376, 1394, 1427, 1445, 1463, 1481, 1499, 1517	1153, 1284
121	1049, 1067, 1085, 1103, 1121, 1139, 1172, 1190, 1208, 1226, 1244, 1262, 1305, 1323, 1341, 1359, 1377, 1395, 1428, 1446, 1464, 1482, 1500, 1518	1154, 1285
122	1050, 1068, 1086, 1104, 1122, 1140, 1173, 1191, 1209, 1227, 1245, 1263, 1306, 1324, 1342, 1360, 1378, 1396, 1429, 1447, 1465, 1483, 1501, 1519	1155, 1286
123	1051, 1069, 1087, 1105, 1123, 1141, 1174, 1192, 1210, 1228, 1246, 1264, 1307, 1325, 1343, 1361, 1379, 1397, 1430, 1448, 1466, 1484, 1502, 1520	1156, 1287
124	1052, 1070, 1088, 1106, 1124, 1142, 1175, 1193, 1211, 1229, 1247, 1265, 1308, 1326, 1344, 1362, 1380, 1398, 1431, 1449, 1467, 1485, 1503, 1521	1157, 1288
125	1053, 1071, 1089, 1107, 1125, 1143, 1176, 1194, 1212, 1230, 1248, 1266, 1309, 1327, 1345, 1363, 1381, 1399, 1432, 1450, 1468, 1486, 1504, 1522	1158, 1289
126	1054, 1072, 1090, 1108, 1126, 1144, 1177, 1195, 1213, 1231, 1249, 1267, 1310, 1328, 1346, 1364, 1382, 1400, 1433, 1451, 1469, 1487,	1159, 1290

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1505, 1523	
127	1549, 1567, 1585, 1603, 1621, 1639, 1672, 1690, 1708, 1726, 1744, 1762, 1805, 1823, 1841, 1859, 1877, 1895, 1928, 1946, 1964, 1982, 2000, 2018	1780, 1913
128	1550, 1568, 1586, 1604, 1622, 1640, 1673, 1691, 1709, 1727, 1745, 1763, 1806, 1824, 1842, 1860, 1878, 1896, 1929, 1947, 1965, 1983, 2001, 2019	1781, 1914
129	1551, 1569, 1587, 1605, 1623, 1641, 1674, 1692, 1710, 1728, 1746, 1764, 1807, 1825, 1843, 1861, 1879, 1897, 1930, 1948, 1966, 1984, 2002, 2020	1782, 1915
130	1552, 1570, 1588, 1606, 1624, 1642, 1675, 1693, 1711, 1729, 1747, 1765, 1808, 1826, 1844, 1862, 1880, 1898, 1931, 1949, 1967, 1985, 2003, 2021	1783, 1916
131	1553, 1571, 1589, 1607, 1625, 1643, 1676, 1694, 1712, 1730, 1748, 1766, 1809, 1827, 1845, 1863, 1881, 1899, 1932, 1950, 1968, 1986, 2004, 2022	1784, 1917
132	1554, 1572, 1590, 1608, 1626, 1644, 1677, 1695, 1713, 1731, 1749, 1767, 1810, 1828, 1846, 1864, 1882, 1900, 1933, 1951, 1969, 1987, 2005, 2023	1785, 1918
133	1555, 1573, 1591, 1609, 1627, 1645, 1678, 1696, 1714, 1732, 1750, 1768, 1811, 1829, 1847, 1865, 1883, 1901, 1934, 1952, 1970, 1988, 2006, 2024	1786, 1919
134	1556, 1574, 1592, 1610, 1628, 1646, 1679, 1697, 1715, 1733, 1751, 1769, 1812, 1830, 1848, 1866, 1884, 1902, 1935, 1953, 1971, 1989, 2007, 2025	1787, 1920
135	1557, 1575, 1593, 1611, 1629, 1647, 1680, 1698, 1716, 1734, 1752, 1770, 1813, 1831, 1849, 1867, 1885, 1903, 1936, 1954, 1972, 1990, 2008, 2026	1788, 1921
136	1558, 1576, 1594, 1612, 1630, 1648, 1681, 1699, 1717, 1735, 1753, 1771, 1814, 1832, 1850, 1868, 1886, 1904, 1937, 1955, 1973, 1991, 2009, 2027	1789, 1922

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	2009, 2027	
137	1559, 1577, 1595, 1613, 1631, 1649, 1682, 1700, 1718, 1736, 1754, 1772, 1815, 1833, 1851, 1869, 1887, 1905, 1938, 1956, 1974, 1992, 2010, 2028	1664, 1795
138	1560, 1578, 1596, 1614, 1632, 1650, 1683, 1701, 1719, 1737, 1755, 1773, 1816, 1834, 1852, 1870, 1888, 1906, 1939, 1957, 1975, 1993, 2011, 2029	1665, 1796
139	1561, 1579, 1597, 1615, 1633, 1651, 1684, 1702, 1720, 1738, 1756, 1774, 1817, 1835, 1853, 1871, 1889, 1907, 1940, 1958, 1976, 1994, 2012, 2030	1666, 1797
140	1562, 1580, 1598, 1616, 1634, 1652, 1685, 1703, 1721, 1739, 1757, 1775, 1818, 1836, 1854, 1872, 1890, 1908, 1941, 1959, 1977, 1995, 2013, 2031	1667, 1798
141	1563, 1581, 1599, 1617, 1635, 1653, 1686, 1704, 1722, 1740, 1758, 1776, 1819, 1837, 1855, 1873, 1891, 1909, 1942, 1960, 1978, 1996, 2014, 2032	1668, 1799
142	1564, 1582, 1600, 1618, 1636, 1654, 1687, 1705, 1723, 1741, 1759, 1777, 1820, 1838, 1856, 1874, 1892, 1910, 1943, 1961, 1979, 1997, 2015, 2033	1669, 1800
143	1565, 1583, 1601, 1619, 1637, 1655, 1688, 1706, 1724, 1742, 1760, 1778, 1821, 1839, 1857, 1875, 1893, 1911, 1944, 1962, 1980, 1998, 2016, 2034	1670, 1801
144	1566, 1584, 1602, 1620, 1638, 1656, 1689, 1707, 1725, 1743, 1761, 1779, 1822, 1840, 1858, 1876, 1894, 1912, 1945, 1963, 1981, 1999, 2017, 2035	1671, 1802

[00342] As shown in Table 37, the 144 26-tone DRUs corresponding to the 320 MHz bandwidth include 72 high-frequency 26-tone DRUs and 72 low-frequency 26-tone DRUs, where subcarrier indices of 26 subcarriers in a high-frequency 26-tone DRU are all positive values, and subcarrier indices of 26 subcarriers in a low-frequency 26-tone DRU are all negative values.

[00343] Each 26-tone DRU includes 24 data subcarriers. If every six data subcarriers of the 24

data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33.

5 **[00344]** In other words, it is assumed that indices of 24 data subcarriers included in each 26-tone DRU are sequentially arranged in a frequency direction and then divided into four groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

10 **[00345]** In addition, in every 18 26-tone DRUs, there is a fixed offset between indices of data subcarriers included in two 26-tone DRUs having adjacent identifiers, and the fixed offset is 1. Specifically, indices of 24 data subcarriers in a 26-tone DRU whose identifier is i ($i = 1$ to 17, 19 to 35, 37 to 53, 55 to 71, 73 to 89, 91 to 107, 109 to 125, or 127 to 143) all plus 1, to obtain indices of 24 data subcarriers in a 26-tone DRU whose identifier is $i + 1$. In addition, there is an offset 495
15 between 18 different 26-tone DRUs, that is, between a 26-tone DRU whose identifier is $18 \times n$ ($n = 1, 2, 3, 4, 5, 6, \text{ or } 7$) and a 26-tone DRU whose identifier is $18 \times n + 1$.

[00346] In Table 37, the identifier of the 26-tone DRU may be based on an index of a lowest-frequency subcarrier included in the 26-tone DRU. In other words, an identifier of a 26-tone DRU having a data subcarrier with a minimum value index is 1. As shown in Table 37, in all data
20 subcarriers in the "index of a data subcarrier" column, a minimum value index is -2035 . Therefore, an identifier of a 26-tone DRU in which the subcarrier is located is 1. In addition, a minimum value index other than that of the 26-tone DRU whose identifier is 1 is -2034 . Therefore, the identifier of the 26-tone DRU in which the subcarrier is located is 2.

[00347] It may be understood that although the lowest-frequency index shown in Table 37 is -2035 , the value is merely an example. For example, the value may be any integer from -2042 to -2030 .
25

[00348] As shown in Table 37, each 26-tone DRU further includes two pilot subcarriers. For 26-tone DRUs whose identifiers are 1 to 10, 19 to 28, 37 to 46, 55 to 64, 73 to 82, 91 to 100, 109 to 118, or 127 to 136, an absolute value of an index difference between two pilot subcarriers in a same 26-tone DRU is 133. For 26-tone DRUs whose identifiers are 11 to 18, 29 to 36, 47 to 54, 65 to 72, 83 to 90, 101 to 108, 119 to 126, or 137 to 144, an absolute value of an index difference
30 between two pilot subcarriers in a same 26-tone DRU is 131.

[00349] As shown in Table 37, indices of two pilot subcarriers in a 26-tone DRU whose identifier is i ($i = 1$ to 9, 11 to 17, 19 to 27, 29 to 35, 37 to 45, 47 to 53, 55 to 63, 65 to 71, 73 to 81, 83 to 89, 91 to 99, 101 to 107, 109 to 117, 119 to 125, 127 to 135, or 137 to 143) all plus 1, to
35

obtain indices of two pilot subcarriers in a 26-tone DRU whose identifier is $i + 1$, that is, a fixed offset is 1.

[00350] In this embodiment of this disclosure, for the 320 MHz bandwidth, a manner of determining two pilot subcarriers in a 26-tone DRU is similar to the foregoing manner of determining the two pilot subcarriers in the 26-tone DRU for the 40 MHz bandwidth. The pilot subcarriers shown in Table 37 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity. Details are not described herein again.

[00351] It may be understood that the pilot subcarriers shown in Table 37 are merely examples, and other pilot subcarriers may alternatively be used. For example, spacings between two pilot subcarriers in different 26-tone DRUs may be unequal to each other.

[00352] In this way, for the 320 MHz bandwidth, through the design of the 26-tone DRU shown in Table 37, compared with the continuous 26-tone RU in the 320 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00353] The foregoing describes a tone plan solution of the 26-tone DRU in the 320 MHz bandwidth with reference to Table 37. The solution is merely an example. A person skilled in the art may obtain another solution on this basis. For example, the lowest-frequency index is no longer -2035 but another value. For example, an index of a pilot subcarrier is determined by using another solution. In addition, the tone plan of other DRUs described below in this disclosure may also be similarly varied, and these variations are not described below for each DRU.

[00354] In a tone plan solution of a DRU, the 320 MHz bandwidth includes 64 52-tone DRUs, and each 52-tone DRU includes 48 data subcarriers and four pilot subcarriers. For example, Table 38 shows an example of 64 52-tone DRUs corresponding to the 320 MHz bandwidth, and shows indices of 48 data subcarriers and indices of four pilot subcarriers included in each 52-tone DRU, and a lowest-frequency index of a data subcarrier in a 52-tone DRU whose identifier is 1 is -2035 .

Table 38

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	$-2035, -2017, -1999, -1981, -1963, -1945, -1912, -1894, -1876, -1858, -1840, -1822, -1779, -1761, -1743, -1725, -1707, -1689, -1656, -1638, -1620, -1602, -1584, -1566, 13, 31, 49,$	$-1804, -1671, 244, 377$

Identifier of a 52- tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482	
2	–2034, –2016, –1998, –1980, –1962, –1944, –1911, –1893, –1875, –1857, –1839, –1821, –1778, –1760, –1742, –1724, –1706, – 1688, –1655, –1637, –1619, –1601, –1583, –1565, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483	–1803, – 1670, 245, 378
3	–2033, –2015, –1997, –1979, –1961, –1943, –1910, –1892, – 1874, –1856, –1838, –1820, –1777, –1759, –1741, –1723, –1705, –1687, –1654, –1636, –1618, –1600, –1582, –1564, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484	–1802, – 1669, 246, 379
4	–2032, –2014, –1996, –1978, –1960, –1942, –1909, –1891, – 1873, –1855, –1837, –1819, –1776, –1758, –1740, –1722, –1704, –1686, –1653, –1635, –1617, –1599, –1581, –1563, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485	–1801, – 1668, 247, 380
5	–2030, –2012, –1994, –1976, –1958, –1940, –1907, –1889, – 1871, –1853, –1835, –1817, –1774, –1756, –1738, –1720, –1702, –1684, –1651, –1633, –1615, –1597, –1579, –1561, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487	–1799, – 1666, 249, 382
6	–2029, –2011, –1993, –1975, –1957, –1939, –1906, –1888, –1870, –1852, –1834, –1816, –1773, –1755, –1737, –1719, –1701, – 1683, –1650, –1632, –1614, –1596, –1578, –1560, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488	–1798, – 1665, 250, 383
7	–2028, –2010, –1992, –1974, –1956, –1938, –1905, –1887, – 1869, –1851, –1833, –1815, –1772, –1754, –1736, –1718, –1700, –1682, –1649, –1631, –1613, –1595, –1577, –1559, 20, 38, 56,	–1797, – 1664, 251, 384

Identifier of a 52- tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489	
8	–2027, –2009, –1991, –1973, –1955, –1937, –1904, –1886, – 1868, –1850, –1832, –1814, –1771, –1753, –1735, –1717, –1699, –1681, –1648, –1630, –1612, –1594, –1576, –1558, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490	–1796, – 1663, 252, 385
9	–2026, –2008, –1990, –1972, –1954, –1936, –1903, –1885, – 1867, –1849, –1831, –1813, –1770, –1752, –1734, –1716, –1698, –1680, –1647, –1629, –1611, –1593, –1575, –1557, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491	–1795, – 1662, 253, 386
10	–2025, –2007, –1989, –1971, –1953, –1935, –1902, –1884, – 1866, –1848, –1830, –1812, –1769, –1751, –1733, –1715, –1697, –1679, –1646, –1628, –1610, –1592, –1574, –1556, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492	–1920, – 1789, 128, 259
11	–2024, –2006, –1988, –1970, –1952, –1934, –1901, –1883, – 1865, –1847, –1829, –1811, –1768, –1750, –1732, –1714, –1696, –1678, –1645, –1627, –1609, –1591, –1573, –1555, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493	–1919, – 1788, 129, 260
12	–2023, –2005, –1987, –1969, –1951, –1933, –1900, –1882, – 1864, –1846, –1828, –1810, –1767, –1749, –1731, –1713, –1695, –1677, –1644, –1626, –1608, –1590, –1572, –1554, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494	–1918, – 1787, 130, 261
13	–2021, –2003, –1985, –1967, –1949, –1931, –1898, –1880, – 1862, –1844, –1826, –1808, –1765, –1747, –1729, –1711, –1693, –1675, –1642, –1624, –1606, –1588, –1570, –1552, 27, 45, 63,	–1916, – 1785, 132, 263

Identifier of a 52- tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496	
14	–2020, –2002, –1984, –1966, –1948, –1930, –1897, –1879, – 1861, –1843, –1825, –1807, –1764, –1746, –1728, –1710, –1692, –1674, –1641, –1623, –1605, –1587, –1569, –1551, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497	–1915, – 1784, 133, 264
15	–2019, –2001, –1983, –1965, –1947, –1929, –1896, –1878, – 1860, –1842, –1824, –1806, –1763, –1745, –1727, –1709, –1691, –1673, –1640, –1622, –1604, –1586, –1568, –1550, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498	–1914, – 1783, 134, 265
16	–2018, –2000, –1982, –1964, –1946, –1928, –1895, –1877, – 1859, –1841, –1823, –1805, –1762, –1744, –1726, –1708, –1690, –1672, –1639, –1621, –1603, –1585, –1567, –1549, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499	–1913, – 1782, 135, 266
17	–1523, –1505, –1487, –1469, –1451, –1433, –1400, –1382, – 1364, –1346, –1328, –1310, –1267, –1249, –1231, –1213, –1195, –1177, –1144, –1126, –1108, –1090, –1072, –1054, 525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994	–1292, – 1159, 756, 889
18	–1522, –1504, –1486, –1468, –1450, –1432, –1399, –1381, – 1363, –1345, –1327, –1309, –1266, –1248, –1230, –1212, –1194, –1176, –1143, –1125, –1107, –1089, –1071, –1053, 526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995	–1291, – 1158, 757, 890
19	–1521, –1503, –1485, –1467, –1449, –1431, –1398, –1380, – 1362, –1344, –1326, –1308, –1265, –1247, –1229, –1211, –1193, –1175, –1142, –1124, –1106, –1088, –1070, –1052, 527, 545, 563,	–1290, – 1157, 758, 891

Identifier of a 52- tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996	
20	–1520, –1502, –1484, –1466, –1448, –1430, –1397, –1379, – 1361, –1343, –1325, –1307, –1264, –1246, –1228, –1210, –1192, –1174, –1141, –1123, –1105, –1087, –1069, –1051, 528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997	–1289, – 1156, 759, 892
21	–1518, –1500, –1482, –1464, –1446, –1428, –1395, –1377, – 1359, –1341, –1323, –1305, –1262, –1244, –1226, –1208, –1190, –1172, –1139, –1121, –1103, –1085, –1067, –1049, 530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999	–1287, – 1154, 761, 894
22	–1517, –1499, –1481, –1463, –1445, –1427, –1394, –1376, – 1358, –1340, –1322, –1304, –1261, –1243, –1225, –1207, –1189, –1171, –1138, –1120, –1102, –1084, –1066, –1048, 531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000	–1286, – 1153, 762, 895
23	–1516, –1498, –1480, –1462, –1444, –1426, –1393, –1375, – 1357, –1339, –1321, –1303, –1260, –1242, –1224, –1206, –1188, –1170, –1137, –1119, –1101, –1083, –1065, –1047, 532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001	–1285, – 1152, 763, 896
24	–1515, –1497, –1479, –1461, –1443, –1425, –1392, –1374, – 1356, –1338, –1320, –1302, –1259, –1241, –1223, –1205, –1187, –1169, –1136, –1118, –1100, –1082, –1064, –1046, 533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002	–1284, – 1151, 764, 897
25	–1514, –1496, –1478, –1460, –1442, –1424, –1391, –1373, – 1355, –1337, –1319, –1301, –1258, –1240, –1222, –1204, –1186, –1168, –1135, –1117, –1099, –1081, –1063, –1045, 534, 552, 570,	–1283, – 1150, 765, 898

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003	
26	–1513, –1495, –1477, –1459, –1441, –1423, –1390, –1372, –1354, –1336, –1318, –1300, –1257, –1239, –1221, –1203, –1185, –1167, –1134, –1116, –1098, –1080, –1062, –1044, 535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004	–1408, –1277, 640, 771
27	–1512, –1494, –1476, –1458, –1440, –1422, –1389, –1371, –1353, –1335, –1317, –1299, –1256, –1238, –1220, –1202, –1184, –1166, –1133, –1115, –1097, –1079, –1061, –1043, 536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005	–1407, –1276, 641, 772
28	–1511, –1493, –1475, –1457, –1439, –1421, –1388, –1370, –1352, –1334, –1316, –1298, –1255, –1237, –1219, –1201, –1183, –1165, –1132, –1114, –1096, –1078, –1060, –1042, 537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006	–1406, –1275, 642, 773
29	–1509, –1491, –1473, –1455, –1437, –1419, –1386, –1368, –1350, –1332, –1314, –1296, –1253, –1235, –1217, –1199, –1181, –1163, –1130, –1112, –1094, –1076, –1058, –1040, 539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008	–1404, –1273, 644, 775
30	–1508, –1490, –1472, –1454, –1436, –1418, –1385, –1367, –1349, –1331, –1313, –1295, –1252, –1234, –1216, –1198, –1180, –1162, –1129, –1111, –1093, –1075, –1057, –1039, 540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009	–1403, –1272, 645, 776
31	–1507, –1489, –1471, –1453, –1435, –1417, –1384, –1366, –1348, –1330, –1312, –1294, –1251, –1233, –1215, –1197, –1179, –1161, –1128, –1110, –1092, –1074, –1056, –1038, 541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	–1402, –1271, 646, 777

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010	
32	–1506, –1488, –1470, –1452, –1434, –1416, –1383, –1365, –1347, –1329, –1311, –1293, –1250, –1232, –1214, –1196, –1178, –1160, –1127, –1109, –1091, –1073, –1055, –1037, 542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011	–1401, –1270, 647, 778
33	–1011, –993, –975, –957, –939, –921, –888, –870, –852, –834, –816, –798, –755, –737, –719, –701, –683, –665, –632, –614, –596, –578, –560, –542, 1037, 1055, 1073, 1091, 1109, 1127, 1160, 1178, 1196, 1214, 1232, 1250, 1293, 1311, 1329, 1347, 1365, 1383, 1416, 1434, 1452, 1470, 1488, 1506	–780, –647, 1268, 1401
34	–1010, –992, –974, –956, –938, –920, –887, –869, –851, –833, –815, –797, –754, –736, –718, –700, –682, –664, –631, –613, –595, –577, –559, –541, 1038, 1056, 1074, 1092, 1110, 1128, 1161, 1179, 1197, 1215, 1233, 1251, 1294, 1312, 1330, 1348, 1366, 1384, 1417, 1435, 1453, 1471, 1489, 1507	–779, –646, 1269, 1402
35	–1009, –991, –973, –955, –937, –919, –886, –868, –850, –832, –814, –796, –753, –735, –717, –699, –681, –663, –630, –612, –594, –576, –558, –540, 1039, 1057, 1075, 1093, 1111, 1129, 1162, 1180, 1198, 1216, 1234, 1252, 1295, 1313, 1331, 1349, 1367, 1385, 1418, 1436, 1454, 1472, 1490, 1508	–778, –645, 1270, 1403
36	–1008, –990, –972, –954, –936, –918, –885, –867, –849, –831, –813, –795, –752, –734, –716, –698, –680, –662, –629, –611, –593, –575, –557, –539, 1040, 1058, 1076, 1094, 1112, 1130, 1163, 1181, 1199, 1217, 1235, 1253, 1296, 1314, 1332, 1350, 1368, 1386, 1419, 1437, 1455, 1473, 1491, 1509	–777, –644, 1271, 1404
37	–1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537, 1042, 1060, 1078, 1096, 1114, 1132, 1165,	–775, –642, 1273, 1406

Identifier of a 52- tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1183, 1201, 1219, 1237, 1255, 1298, 1316, 1334, 1352, 1370, 1388, 1421, 1439, 1457, 1475, 1493, 1511	
38	–1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, – 810, –792, –749, –731, –713, –695, –677, –659, –626, –608, – 590, –572, –554, –536, 1043, 1061, 1079, 1097, 1115, 1133, 1166, 1184, 1202, 1220, 1238, 1256, 1299, 1317, 1335, 1353, 1371, 1389, 1422, 1440, 1458, 1476, 1494, 1512	–774, –641, 1274, 1407
39	–1004, –986, –968, –950, –932, –914, –881, –863, –845, –827, – 809, –791, –748, –730, –712, –694, –676, –658, –625, –607, – 589, –571, –553, –535, 1044, 1062, 1080, 1098, 1116, 1134, 1167, 1185, 1203, 1221, 1239, 1257, 1300, 1318, 1336, 1354, 1372, 1390, 1423, 1441, 1459, 1477, 1495, 1513	–773, –640, 1275, 1408
40	–1003, –985, –967, –949, –931, –913, –880, –862, –844, –826, – 808, –790, –747, –729, –711, –693, –675, –657, –624, –606, –588, –570, –552, –534, 1045, 1063, 1081, 1099, 1117, 1135, 1168, 1186, 1204, 1222, 1240, 1258, 1301, 1319, 1337, 1355, 1373, 1391, 1424, 1442, 1460, 1478, 1496, 1514	–772, –639, 1276, 1409
41	–1002, –984, –966, –948, –930, –912, –879, –861, –843, –825, – 807, –789, –746, –728, –710, –692, –674, –656, –623, –605, – 587, –569, –551, –533, 1046, 1064, 1082, 1100, 1118, 1136, 1169, 1187, 1205, 1223, 1241, 1259, 1302, 1320, 1338, 1356, 1374, 1392, 1425, 1443, 1461, 1479, 1497, 1515	–771, –638, 1277, 1410
42	–1001, –983, –965, –947, –929, –911, –878, –860, –842, –824, – 806, –788, –745, –727, –709, –691, –673, –655, –622, –604, – 586, –568, –550, –532, 1047, 1065, 1083, 1101, 1119, 1137, 1170, 1188, 1206, 1224, 1242, 1260, 1303, 1321, 1339, 1357, 1375, 1393, 1426, 1444, 1462, 1480, 1498, 1516	–896, –765, 1152, 1283
43	–1000, –982, –964, –946, –928, –910, –877, –859, –841, –823, – 805, –787, –744, –726, –708, –690, –672, –654, –621, –603, – 585, –567, –549, –531, 1048, 1066, 1084, 1102, 1120, 1138, 1171,	–895, –764, 1153, 1284

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1189, 1207, 1225, 1243, 1261, 1304, 1322, 1340, 1358, 1376, 1394, 1427, 1445, 1463, 1481, 1499, 1517	
44	–999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530, 1049, 1067, 1085, 1103, 1121, 1139, 1172, 1190, 1208, 1226, 1244, 1262, 1305, 1323, 1341, 1359, 1377, 1395, 1428, 1446, 1464, 1482, 1500, 1518	–894, –763, 1154, 1285
45	–997, –979, –961, –943, –925, –907, –874, –856, –838, –820, –802, –784, –741, –723, –705, –687, –669, –651, –618, –600, –582, –564, –546, –528, 1051, 1069, 1087, 1105, 1123, 1141, 1174, 1192, 1210, 1228, 1246, 1264, 1307, 1325, 1343, 1361, 1379, 1397, 1430, 1448, 1466, 1484, 1502, 1520	–892, –761, 1156, 1287
46	–996, –978, –960, –942, –924, –906, –873, –855, –837, –819, –801, –783, –740, –722, –704, –686, –668, –650, –617, –599, –581, –563, –545, –527, 1052, 1070, 1088, 1106, 1124, 1142, 1175, 1193, 1211, 1229, 1247, 1265, 1308, 1326, 1344, 1362, 1380, 1398, 1431, 1449, 1467, 1485, 1503, 1521	–891, –760, 1157, 1288
47	–995, –977, –959, –941, –923, –905, –872, –854, –836, –818, –800, –782, –739, –721, –703, –685, –667, –649, –616, –598, –580, –562, –544, –526, 1053, 1071, 1089, 1107, 1125, 1143, 1176, 1194, 1212, 1230, 1248, 1266, 1309, 1327, 1345, 1363, 1381, 1399, 1432, 1450, 1468, 1486, 1504, 1522	–890, –759, 1158, 1289
48	–994, –976, –958, –940, –922, –904, –871, –853, –835, –817, –799, –781, –738, –720, –702, –684, –666, –648, –615, –597, –579, –561, –543, –525, 1054, 1072, 1090, 1108, 1126, 1144, 1177, 1195, 1213, 1231, 1249, 1267, 1310, 1328, 1346, 1364, 1382, 1400, 1433, 1451, 1469, 1487, 1505, 1523	–889, –758, 1159, 1290
49	–499, –481, –463, –445, –427, –409, –376, –358, –340, –322, –304, –286, –243, –225, –207, –189, –171, –153, –120, –102, –84, –66, –48, –30, 1549, 1567, 1585, 1603, 1621, 1639, 1672, 1690,	–268, –135, 1780, 1913

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1708, 1726, 1744, 1762, 1805, 1823, 1841, 1859, 1877, 1895, 1928, 1946, 1964, 1982, 2000, 2018	
50	–498, –480, –462, –444, –426, –408, –375, –357, –339, –321, –303, –285, –242, –224, –206, –188, –170, –152, –119, –101, –83, –65, –47, –29, 1550, 1568, 1586, 1604, 1622, 1640, 1673, 1691, 1709, 1727, 1745, 1763, 1806, 1824, 1842, 1860, 1878, 1896, 1929, 1947, 1965, 1983, 2001, 2019	–267, –134, 1781, 1914
51	–497, –479, –461, –443, –425, –407, –374, –356, –338, –320, –302, –284, –241, –223, –205, –187, –169, –151, –118, –100, –82, –64, –46, –28, 1551, 1569, 1587, 1605, 1623, 1641, 1674, 1692, 1710, 1728, 1746, 1764, 1807, 1825, 1843, 1861, 1879, 1897, 1930, 1948, 1966, 1984, 2002, 2020	–266, –133, 1782, 1915
52	–496, –478, –460, –442, –424, –406, –373, –355, –337, –319, –301, –283, –240, –222, –204, –186, –168, –150, –117, –99, –81, –63, –45, –27, 1552, 1570, 1588, 1606, 1624, 1642, 1675, 1693, 1711, 1729, 1747, 1765, 1808, 1826, 1844, 1862, 1880, 1898, 1931, 1949, 1967, 1985, 2003, 2021	–265, –132, 1783, 1916
53	–494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 1554, 1572, 1590, 1608, 1626, 1644, 1677, 1695, 1713, 1731, 1749, 1767, 1810, 1828, 1846, 1864, 1882, 1900, 1933, 1951, 1969, 1987, 2005, 2023	–263, –130, 1785, 1918
54	–493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 1555, 1573, 1591, 1609, 1627, 1645, 1678, 1696, 1714, 1732, 1750, 1768, 1811, 1829, 1847, 1865, 1883, 1901, 1934, 1952, 1970, 1988, 2006, 2024	–262, –129, 1786, 1919
55	–492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23, 1556, 1574, 1592, 1610, 1628, 1646, 1679, 1697,	–261, –128, 1787, 1920

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1715, 1733, 1751, 1769, 1812, 1830, 1848, 1866, 1884, 1902, 1935, 1953, 1971, 1989, 2007, 2025	
56	–491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22, 1557, 1575, 1593, 1611, 1629, 1647, 1680, 1698, 1716, 1734, 1752, 1770, 1813, 1831, 1849, 1867, 1885, 1903, 1936, 1954, 1972, 1990, 2008, 2026	–260, –127, 1788, 1921
57	–490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21, 1558, 1576, 1594, 1612, 1630, 1648, 1681, 1699, 1717, 1735, 1753, 1771, 1814, 1832, 1850, 1868, 1886, 1904, 1937, 1955, 1973, 1991, 2009, 2027	–259, –126, 1789, 1922
58	–489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20, 1559, 1577, 1595, 1613, 1631, 1649, 1682, 1700, 1718, 1736, 1754, 1772, 1815, 1833, 1851, 1869, 1887, 1905, 1938, 1956, 1974, 1992, 2010, 2028	–384, –253, 1664, 1795
59	–488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19, 1560, 1578, 1596, 1614, 1632, 1650, 1683, 1701, 1719, 1737, 1755, 1773, 1816, 1834, 1852, 1870, 1888, 1906, 1939, 1957, 1975, 1993, 2011, 2029	–383, –252, 1665, 1796
60	–487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 1561, 1579, 1597, 1615, 1633, 1651, 1684, 1702, 1720, 1738, 1756, 1774, 1817, 1835, 1853, 1871, 1889, 1907, 1940, 1958, 1976, 1994, 2012, 2030	–382, –251, 1666, 1797
61	–485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 1563, 1581, 1599, 1617, 1635, 1653, 1686, 1704,	–380, –249, 1668, 1799

Identifier of a 52-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
	1722, 1740, 1758, 1776, 1819, 1837, 1855, 1873, 1891, 1909, 1942, 1960, 1978, 1996, 2014, 2032	
62	–484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 1564, 1582, 1600, 1618, 1636, 1654, 1687, 1705, 1723, 1741, 1759, 1777, 1820, 1838, 1856, 1874, 1892, 1910, 1943, 1961, 1979, 1997, 2015, 2033	–379, –248, 1669, 1800
63	–483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 1565, 1583, 1601, 1619, 1637, 1655, 1688, 1706, 1724, 1742, 1760, 1778, 1821, 1839, 1857, 1875, 1893, 1911, 1944, 1962, 1980, 1998, 2016, 2034	–378, –247, 1670, 1801
64	–482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13, 1566, 1584, 1602, 1620, 1638, 1656, 1689, 1707, 1725, 1743, 1761, 1779, 1822, 1840, 1858, 1876, 1894, 1912, 1945, 1963, 1981, 1999, 2017, 2035	–377, –246, 1671, 1802

[00355] As shown in Table 38, each 52-tone DRU includes 48 data subcarriers, including 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 48 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 48 data subcarriers may be considered as eight groups, including four low-frequency groups and four high-frequency groups. An index of each data subcarrier in a low-frequency group is a negative value, and an index of each data subcarrier in a high-frequency group is a positive value. Absolute values of index differences between adjacent data subcarriers in a same group are all 18, absolute values of index differences between data subcarriers in two adjacent low-frequency groups or two adjacent high-frequency groups are sequentially 33, 43, and 33, and absolute values of index differences between data subcarriers in a high-frequency group and a low-frequency group (an absolute value of a difference between a minimum index of all data subcarriers in a high-frequency group and a maximum index

of all data subcarriers in a low-frequency group) are 1579.

[00356] In other words, it is assumed that indices of 48 data subcarriers included in each 52-tone DRU are sequentially arranged in a frequency direction and then divided into eight groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00357] As shown in Table 38, for identifiers 1 to 4, 5 to 12, 13 to 16, 17 to 20, 21 to 28, 29 to 32, 33 to 36, 37 to 44, 45 to 48, 49 to 52, 53 to 60, or 61 to 64, there is a fixed offset between indices of data subcarriers included in two 52-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 48 data subcarriers in a 52-tone DRU whose identifier is i ($i = 1$ to 3, 5 to 11, 13 to 15, 17 to 19, 21 to 27, 29 to 31, 33 to 35, 37 to 43, 45 to 47, 49 to 51, 53 to 59, or 61 to 63) all plus 1, to obtain indices of 48 data subcarriers in a 52-tone DRU whose identifier is $i + 1$. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 4 and an index of a data subcarrier included in a 52-tone DRU whose identifier is 5 is 2. Similarly, an offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 12 (20, 28, 36, 44, 52, or 60) and an index of a data subcarrier included in a 52-tone DRU whose identifier is 13 (21, 29, 37, 45, 53, or 61) is 2. An offset between an index of a data subcarrier included in a 52-tone DRU whose identifier is 16 (32 or 48) and an index of a data subcarrier included in a 52-tone DRU whose identifier is 17 (33 or 49) is 495.

[00358] As shown in Table 38, each 52-tone DRU includes four pilot subcarriers, including two high-frequency subcarriers and two low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00359] As shown in Table 37, the 52-tone DRU may be considered as being obtained based on a 26-tone DRU, as shown in Table 39. For example, 48 data subcarriers in a 52-tone DRU whose identifier is 1 are a combination of 24 data subcarriers in a 26-tone DRU whose identifier is 1 and 24 data subcarriers in a 26-tone DRU whose identifier is 73 in Table 37. Four pilot subcarriers in the 52-tone DRU whose identifier is 1 are a combination of two pilot subcarriers in the 26-tone DRU whose identifier is 1 and two pilot subcarriers in the 26-tone DRU whose identifier is 73 in Table 37.

Table 39

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
1	1, 73
2	2, 74

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
3	3, 75
4	4, 76
5	6, 78
6	7, 79
7	8, 80
8	9, 81
9	10, 82
10	11, 83
11	12, 84
12	13, 85
13	15, 87
14	16, 88
15	17, 89
16	18, 90
17	19, 91
18	20, 92
19	21, 93
20	22, 94
21	24, 96
22	25, 97
23	26, 98
24	27, 99
25	28, 100
26	29, 101
27	30, 102
28	31, 103
29	33, 105
30	34, 106
31	35, 107
32	36, 108
33	37, 109
34	38, 110
35	39, 111

Identifier of a 52-tone DRU	Identifier of a 26-tone DRU
36	40, 112
37	42, 114
38	43, 115
39	44, 116
40	45, 117
41	46, 118
42	47, 119
43	48, 120
44	49, 121
45	51, 123
46	52, 124
47	53, 125
48	54, 126
49	55, 127
50	56, 128
51	57, 129
52	58, 130
53	60, 132
54	61, 133
55	62, 134
56	63, 135
57	64, 136
58	65, 137
59	66, 138
60	67, 139
61	69, 141
62	70, 142
63	71, 143
64	72, 144

[00360] In addition, in this embodiment of this disclosure, the identifier of the 52-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 52-tone DRU. For example, an identifier of a 52-tone DRU having a lowest-frequency index –2035 is 1.

5 **[00361]** According to the design of the 52-tone DRU shown in Table 38 or Table 39 in this

embodiment of this disclosure, compared with the continuous 52-tone RU in the 320 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00362] In this embodiment of this disclosure, an association between a 52-tone DRU and a 26-tone DRU in 320 MHz is described by using Table 39. It may be understood that the foregoing described manner of determining a 52-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 52-tone DRU can be fully discrete. In another embodiment, a 52-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of two 26-tone DRUs whose identifiers are 1 and 2 is determined as the 52-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that, considering the association between the 52-tone DRU and the 26-tone DRU, if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -2035, correspondingly the lowest-frequency index of the data subcarrier included in the 52-tone DRU also adaptively changes to another value.

[00363] In a tone plan solution of a DRU, the 320 MHz bandwidth includes 32 106-tone DRUs, and each 106-tone DRU includes 102 data subcarriers and four pilot subcarriers. For example, Table 40 shows an example of 32 106-tone DRUs corresponding to the 320 MHz bandwidth, and shows 102 data subcarriers and four pilot subcarriers included in each 106-tone DRU. The 102 data subcarriers may be considered as two parts. A first part of data subcarriers includes 96 data subcarriers, a second part of data subcarriers includes six data subcarriers, and a lowest-frequency index of a data subcarrier in a 106-tone DRU whose identifier is 1 is -2035. It should be understood that, although the data subcarriers are divided into the first part and the second part in Table 40 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 106-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in two parts, and do not need to be distinguished. In other words, the first part and the second part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 106-tone DRU.

Table 40

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
1	-2035, -2017, -1999, -1981, -1963, -1945, -	-1671, -	-1804, -780,

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1912, –1894, –1876, –1858, –1840, –1822, – 1779, –1761, –1743, –1725, –1707, –1689, – 1656, –1638, –1620, –1602, –1584, –1566, – 1011, –993, –975, –957, –939, –921, –888, –870, –852, –834, –816, –798, –755, –737, –719, –701, –683, –665, –632, –614, –596, –578, –560, –542, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482, 1037, 1055, 1073, 1091, 1109, 1127, 1160, 1178, 1196, 1214, 1232, 1250, 1293, 1311, 1329, 1347, 1365, 1383, 1416, 1434, 1452, 1470, 1488, 1506	1548, –647, 244, 500, 1268	377, 1401
2	–2034, –2016, –1998, –1980, –1962, –1944, – 1911, –1893, –1875, –1857, –1839, –1821, – 1778, –1760, –1742, –1724, –1706, –1688, – 1655, –1637, –1619, –1601, –1583, –1565, – 1010, –992, –974, –956, –938, –920, –887, –869, –851, –833, –815, –797, –754, –736, –718, –700, –682, –664, –631, –613, –595, –577, –559, –541, 14, 32, 50, 68, 86, 104, 137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483, 1038, 1056, 1074, 1092, 1110, 1128, 1161, 1179, 1197, 1215, 1233, 1251, 1294, 1312, 1330, 1348, 1366, 1384, 1417, 1435, 1453, 1471, 1489, 1507	–1670, – 1547, –646, 245, 501, 1269	–1803, –779, 378, 1402
3	–2033, –2015, –1997, –1979, –1961, –1943, – 1910, –1892, –1874, –1856, –1838, –1820, – 1777, –1759, –1741, –1723, –1705, –1687, – 1654, –1636, –1618, –1600, –1582, –1564, – 1009, –991, –973, –955, –937, –919, –886, –868, –850, –832, –814, –796, –753, –735, –717, –699, –681, –663, –630, –612, –594, –576, –558, –540,	–1669, – 1546, –645, 246, 502, 1270	–1802, –778, 379, 1403

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484, 1039, 1057, 1075, 1093, 1111, 1129, 1162, 1180, 1198, 1216, 1234, 1252, 1295, 1313, 1331, 1349, 1367, 1385, 1418, 1436, 1454, 1472, 1490, 1508		
4	–2032, –2014, –1996, –1978, –1960, –1942, – 1909, –1891, –1873, –1855, –1837, –1819, – 1776, –1758, –1740, –1722, –1704, –1686, – 1653, –1635, –1617, –1599, –1581, –1563, – 1008, –990, –972, –954, –936, –918, –885, –867, –849, –831, –813, –795, –752, –734, –716, –698, –680, –662, –629, –611, –593, –575, –557, –539, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485, 1040, 1058, 1076, 1094, 1112, 1130, 1163, 1181, 1199, 1217, 1235, 1253, 1296, 1314, 1332, 1350, 1368, 1386, 1419, 1437, 1455, 1473, 1491, 1509	–1668, – 1545, –644, 247, 503, 1271	–1801, –777, 380, 1404
5	–2030, –2012, –1994, –1976, –1958, –1940, – 1907, –1889, –1871, –1853, –1835, –1817, – 1774, –1756, –1738, –1720, –1702, –1684, – 1651, –1633, –1615, –1597, –1579, –1561, – 1006, –988, –970, –952, –934, –916, –883, –865, –847, –829, –811, –793, –750, –732, –714, –696, –678, –660, –627, –609, –591, –573, –555, –537, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487, 1042, 1060, 1078, 1096, 1114, 1132, 1165, 1183, 1201, 1219, 1237, 1255, 1298, 1316, 1334, 1352, 1370, 1388, 1421, 1439, 1457, 1475, 1493, 1511	–1666, – 1544, –642, 249, 504, 1273	–1799, –775, 382, 1406

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
6	–2029, –2011, –1993, –1975, –1957, –1939, – 1906, –1888, –1870, –1852, –1834, –1816, – 1773, –1755, –1737, –1719, –1701, –1683, – 1650, –1632, –1614, –1596, –1578, –1560, – 1005, –987, –969, –951, –933, –915, –882, –864, –846, –828, –810, –792, –749, –731, –713, –695, –677, –659, –626, –608, –590, –572, –554, –536, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488, 1043, 1061, 1079, 1097, 1115, 1133, 1166, 1184, 1202, 1220, 1238, 1256, 1299, 1317, 1335, 1353, 1371, 1389, 1422, 1440, 1458, 1476, 1494, 1512	–1665, – 1543, –641, 250, 505, 1274	–1798, –774, 383, 1407
7	–2028, –2010, –1992, –1974, –1956, –1938, – 1905, –1887, –1869, –1851, –1833, –1815, – 1772, –1754, –1736, –1718, –1700, –1682, – 1649, –1631, –1613, –1595, –1577, –1559, – 1004, –986, –968, –950, –932, –914, –881, –863, –845, –827, –809, –791, –748, –730, –712, –694, –676, –658, –625, –607, –589, –571, –553, –535, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489, 1044, 1062, 1080, 1098, 1116, 1134, 1167, 1185, 1203, 1221, 1239, 1257, 1300, 1318, 1336, 1354, 1372, 1390, 1423, 1441, 1459, 1477, 1495, 1513	–1664, – 1542, –640, 251, 506, 1275	–1797, –773, 384, 1408
8	–2027, –2009, –1991, –1973, –1955, –1937, – 1904, –1886, –1868, –1850, –1832, –1814, – 1771, –1753, –1735, –1717, –1699, –1681, – 1648, –1630, –1612, –1594, –1576, –1558, – 1003, –985, –967, –949, –931, –913, –880, –862, –844, –826, –808, –790, –747, –729, –711, –693,	–1663, – 1541, –639, 252, 507, 1276	–1796, –772, 385, 1409

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	-675, -657, -624, -606, -588, -570, -552, -534, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490, 1045, 1063, 1081, 1099, 1117, 1135, 1168, 1186, 1204, 1222, 1240, 1258, 1301, 1319, 1337, 1355, 1373, 1391, 1424, 1442, 1460, 1478, 1496, 1514		
9	-2026, -2008, -1990, -1972, -1954, -1936, - 1903, -1885, -1867, -1849, -1831, -1813, - 1770, -1752, -1734, -1716, -1698, -1680, - 1647, -1629, -1611, -1593, -1575, -1557, - 1002, -984, -966, -948, -930, -912, -879, -861, -843, -825, -807, -789, -746, -728, -710, -692, -674, -656, -623, -605, -587, -569, -551, -533, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491, 1046, 1064, 1082, 1100, 1118, 1136, 1169, 1187, 1205, 1223, 1241, 1259, 1302, 1320, 1338, 1356, 1374, 1392, 1425, 1443, 1461, 1479, 1497, 1515	-1662, - 1540, -638, 253, 508, 1277	-1795, -771, 386, 1410
10	-2025, -2007, -1989, -1971, -1953, -1935, - 1902, -1884, -1866, -1848, -1830, -1812, - 1769, -1751, -1733, -1715, -1697, -1679, - 1646, -1628, -1610, -1592, -1574, -1556, - 1001, -983, -965, -947, -929, -911, -878, -860, -842, -824, -806, -788, -745, -727, -709, -691, -673, -655, -622, -604, -586, -568, -550, -532, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492, 1047, 1065, 1083, 1101, 1119, 1137, 1170, 1188, 1206, 1224, 1242, 1260, 1303, 1321, 1339, 1357, 1375, 1393, 1426, 1444, 1462,	-1789, - 1539, -765, 128, 509, 1152	-1920, -896, 259, 1283

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1480, 1498, 1516		
11	–2024, –2006, –1988, –1970, –1952, –1934, – 1901, –1883, –1865, –1847, –1829, –1811, – 1768, –1750, –1732, –1714, –1696, –1678, – 1645, –1627, –1609, –1591, –1573, –1555, – 1000, –982, –964, –946, –928, –910, –877, –859, –841, –823, –805, –787, –744, –726, –708, –690, –672, –654, –621, –603, –585, –567, –549, –531, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493, 1048, 1066, 1084, 1102, 1120, 1138, 1171, 1189, 1207, 1225, 1243, 1261, 1304, 1322, 1340, 1358, 1376, 1394, 1427, 1445, 1463, 1481, 1499, 1517	–1788, – 1533, –764, 129, 515, 1153	–1919, –895, 260, 1284
12	–2023, –2005, –1987, –1969, –1951, –1933, – 1900, –1882, –1864, –1846, –1828, –1810, – 1767, –1749, –1731, –1713, –1695, –1677, – 1644, –1626, –1608, –1590, –1572, –1554, –999, –981, –963, –945, –927, –909, –876, –858, –840, –822, –804, –786, –743, –725, –707, –689, –671, –653, –620, –602, –584, –566, –548, –530, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494, 1049, 1067, 1085, 1103, 1121, 1139, 1172, 1190, 1208, 1226, 1244, 1262, 1305, 1323, 1341, 1359, 1377, 1395, 1428, 1446, 1464, 1482, 1500, 1518	–1787, – 1532, –763, 130, 516, 1154	–1918, –894, 261, 1285
13	–2021, –2003, –1985, –1967, –1949, –1931, – 1898, –1880, –1862, –1844, –1826, –1808, – 1765, –1747, –1729, –1711, –1693, –1675, – 1642, –1624, –1606, –1588, –1570, –1552, –997, –979, –961, –943, –925, –907, –874, –856, –838,	–1785, – 1531, –761, 132, 517, 1156	–1916, –892, 263, 1287

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	-820, -802, -784, -741, -723, -705, -687, -669, -651, -618, -600, -582, -564, -546, -528, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496, 1051, 1069, 1087, 1105, 1123, 1141, 1174, 1192, 1210, 1228, 1246, 1264, 1307, 1325, 1343, 1361, 1379, 1397, 1430, 1448, 1466, 1484, 1502, 1520		
14	-2020, -2002, -1984, -1966, -1948, -1930, - 1897, -1879, -1861, -1843, -1825, -1807, - 1764, -1746, -1728, -1710, -1692, -1674, - 1641, -1623, -1605, -1587, -1569, -1551, -996, -978, -960, -942, -924, -906, -873, -855, -837, -819, -801, -783, -740, -722, -704, -686, -668, -650, -617, -599, -581, -563, -545, -527, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497, 1052, 1070, 1088, 1106, 1124, 1142, 1175, 1193, 1211, 1229, 1247, 1265, 1308, 1326, 1344, 1362, 1380, 1398, 1431, 1449, 1467, 1485, 1503, 1521	-1784, - 1530, -760, 133, 518, 1157	-1915, -891, 264, 1288
15	-2019, -2001, -1983, -1965, -1947, -1929, - 1896, -1878, -1860, -1842, -1824, -1806, - 1763, -1745, -1727, -1709, -1691, -1673, - 1640, -1622, -1604, -1586, -1568, -1550, -995, -977, -959, -941, -923, -905, -872, -854, -836, -818, -800, -782, -739, -721, -703, -685, -667, -649, -616, -598, -580, -562, -544, -526, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444, 462, 480, 498, 1053, 1071, 1089, 1107, 1125, 1143, 1176, 1194, 1212, 1230, 1248, 1266, 1309,	-1783, - 1529, -759, 134, 519, 1158	-1914, -890, 265, 1289

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1327, 1345, 1363, 1381, 1399, 1432, 1450, 1468, 1486, 1504, 1522		
16	–2018, –2000, –1982, –1964, –1946, –1928, – 1895, –1877, –1859, –1841, –1823, –1805, – 1762, –1744, –1726, –1708, –1690, –1672, – 1639, –1621, –1603, –1585, –1567, –1549, –994, –976, –958, –940, –922, –904, –871, –853, –835, –817, –799, –781, –738, –720, –702, –684, –666, –648, –615, –597, –579, –561, –543, –525, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499, 1054, 1072, 1090, 1108, 1126, 1144, 1177, 1195, 1213, 1231, 1249, 1267, 1310, 1328, 1346, 1364, 1382, 1400, 1433, 1451, 1469, 1487, 1505, 1523	–1782, – 1528, –758, 135, 520, 1159	–1913, –889, 266, 1290
17	–1523, –1505, –1487, –1469, –1451, –1433, – 1400, –1382, –1364, –1346, –1328, –1310, – 1267, –1249, –1231, –1213, –1195, –1177, – 1144, –1126, –1108, –1090, –1072, –1054, –499, –481, –463, –445, –427, –409, –376, –358, –340, –322, –304, –286, –243, –225, –207, –189, –171, –153, –120, –102, –84, –66, –48, –30, 525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994, 1549, 1567, 1585, 1603, 1621, 1639, 1672, 1690, 1708, 1726, 1744, 1762, 1805, 1823, 1841, 1859, 1877, 1895, 1928, 1946, 1964, 1982, 2000, 2018	–1159, –524, –135, 756, 1524, 1780	–1292, –268, 889, 1913
18	–1522, –1504, –1486, –1468, –1450, –1432, – 1399, –1381, –1363, –1345, –1327, –1309, – 1266, –1248, –1230, –1212, –1194, –1176, – 1143, –1125, –1107, –1089, –1071, –1053, –498,	–1158, –523, –134, 757, 1525, 1781	–1291, –267, 890, 1914

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	-480, -462, -444, -426, -408, -375, -357, -339, -321, -303, -285, -242, -224, -206, -188, -170, -152, -119, -101, -83, -65, -47, -29, 526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995, 1550, 1568, 1586, 1604, 1622, 1640, 1673, 1691, 1709, 1727, 1745, 1763, 1806, 1824, 1842, 1860, 1878, 1896, 1929, 1947, 1965, 1983, 2001, 2019		
19	-1521, -1503, -1485, -1467, -1449, -1431, - 1398, -1380, -1362, -1344, -1326, -1308, - 1265, -1247, -1229, -1211, -1193, -1175, - 1142, -1124, -1106, -1088, -1070, -1052, -497, -479, -461, -443, -425, -407, -374, -356, -338, -320, -302, -284, -241, -223, -205, -187, -169, -151, -118, -100, -82, -64, -46, -28, 527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996, 1551, 1569, 1587, 1605, 1623, 1641, 1674, 1692, 1710, 1728, 1746, 1764, 1807, 1825, 1843, 1861, 1879, 1897, 1930, 1948, 1966, 1984, 2002, 2020	-1157, -522, -133, 758, 1526, 1782	-1290, -266, 891, 1915
20	-1520, -1502, -1484, -1466, -1448, -1430, - 1397, -1379, -1361, -1343, -1325, -1307, - 1264, -1246, -1228, -1210, -1192, -1174, - 1141, -1123, -1105, -1087, -1069, -1051, -496, -478, -460, -442, -424, -406, -373, -355, -337, -319, -301, -283, -240, -222, -204, -186, -168, -150, -117, -99, -81, -63, -45, -27, 528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997, 1552, 1570, 1588, 1606, 1624, 1642,	-1156, -521, -132, 759, 1527, 1783	-1289, -265, 892, 1916

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1675, 1693, 1711, 1729, 1747, 1765, 1808, 1826, 1844, 1862, 1880, 1898, 1931, 1949, 1967, 1985, 2003, 2021		
21	–1518, –1500, –1482, –1464, –1446, –1428, – 1395, –1377, –1359, –1341, –1323, –1305, – 1262, –1244, –1226, –1208, –1190, –1172, – 1139, –1121, –1103, –1085, –1067, –1049, –494, –476, –458, –440, –422, –404, –371, –353, –335, –317, –299, –281, –238, –220, –202, –184, –166, –148, –115, –97, –79, –61, –43, –25, 530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999, 1554, 1572, 1590, 1608, 1626, 1644, 1677, 1695, 1713, 1731, 1749, 1767, 1810, 1828, 1846, 1864, 1882, 1900, 1933, 1951, 1969, 1987, 2005, 2023	–1154, –520, –130, 761, 1528, 1785	–1287, –263, 894, 1918
22	–1517, –1499, –1481, –1463, –1445, –1427, – 1394, –1376, –1358, –1340, –1322, –1304, – 1261, –1243, –1225, –1207, –1189, –1171, – 1138, –1120, –1102, –1084, –1066, –1048, –493, –475, –457, –439, –421, –403, –370, –352, –334, –316, –298, –280, –237, –219, –201, –183, –165, –147, –114, –96, –78, –60, –42, –24, 531, 549, 567, 585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000, 1555, 1573, 1591, 1609, 1627, 1645, 1678, 1696, 1714, 1732, 1750, 1768, 1811, 1829, 1847, 1865, 1883, 1901, 1934, 1952, 1970, 1988, 2006, 2024	–1153, –519, –129, 762, 1529, 1786	–1286, –262, 895, 1919
23	–1516, –1498, –1480, –1462, –1444, –1426, – 1393, –1375, –1357, –1339, –1321, –1303, – 1260, –1242, –1224, –1206, –1188, –1170, –	–1152, –518, –128, 763, 1530, 1787	–1285, –261, 896, 1920

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1137, –1119, –1101, –1083, –1065, –1047, –492, –474, –456, –438, –420, –402, –369, –351, –333, –315, –297, –279, –236, –218, –200, –182, –164, –146, –113, –95, –77, –59, –41, –23, 532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001, 1556, 1574, 1592, 1610, 1628, 1646, 1679, 1697, 1715, 1733, 1751, 1769, 1812, 1830, 1848, 1866, 1884, 1902, 1935, 1953, 1971, 1989, 2007, 2025		
24	–1515, –1497, –1479, –1461, –1443, –1425, –1392, –1374, –1356, –1338, –1320, –1302, –1259, –1241, –1223, –1205, –1187, –1169, –1136, –1118, –1100, –1082, –1064, –1046, –491, –473, –455, –437, –419, –401, –368, –350, –332, –314, –296, –278, –235, –217, –199, –181, –163, –145, –112, –94, –76, –58, –40, –22, 533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002, 1557, 1575, 1593, 1611, 1629, 1647, 1680, 1698, 1716, 1734, 1752, 1770, 1813, 1831, 1849, 1867, 1885, 1903, 1936, 1954, 1972, 1990, 2008, 2026	–1151, –517, –127, 764, 1531, 1788	–1284, –260, 897, 1921
25	–1514, –1496, –1478, –1460, –1442, –1424, –1391, –1373, –1355, –1337, –1319, –1301, –1258, –1240, –1222, –1204, –1186, –1168, –1135, –1117, –1099, –1081, –1063, –1045, –490, –472, –454, –436, –418, –400, –367, –349, –331, –313, –295, –277, –234, –216, –198, –180, –162, –144, –111, –93, –75, –57, –39, –21, 534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967,	–1150, –516, –126, 765, 1532, 1789	–1283, –259, 898, 1922

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	985, 1003, 1558, 1576, 1594, 1612, 1630, 1648, 1681, 1699, 1717, 1735, 1753, 1771, 1814, 1832, 1850, 1868, 1886, 1904, 1937, 1955, 1973, 1991, 2009, 2027		
26	–1513, –1495, –1477, –1459, –1441, –1423, – 1390, –1372, –1354, –1336, –1318, –1300, – 1257, –1239, –1221, –1203, –1185, –1167, – 1134, –1116, –1098, –1080, –1062, –1044, –489, –471, –453, –435, –417, –399, –366, –348, –330, –312, –294, –276, –233, –215, –197, –179, –161, –143, –110, –92, –74, –56, –38, –20, 535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986, 1004, 1559, 1577, 1595, 1613, 1631, 1649, 1682, 1700, 1718, 1736, 1754, 1772, 1815, 1833, 1851, 1869, 1887, 1905, 1938, 1956, 1974, 1992, 2010, 2028	–1277, –515, –253, 640, 1533, 1664	–1408, –384, 771, 1795
27	–1512, –1494, –1476, –1458, –1440, –1422, – 1389, –1371, –1353, –1335, –1317, –1299, – 1256, –1238, –1220, –1202, –1184, –1166, – 1133, –1115, –1097, –1079, –1061, –1043, –488, –470, –452, –434, –416, –398, –365, –347, –329, –311, –293, –275, –232, –214, –196, –178, –160, –142, –109, –91, –73, –55, –37, –19, 536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005, 1560, 1578, 1596, 1614, 1632, 1650, 1683, 1701, 1719, 1737, 1755, 1773, 1816, 1834, 1852, 1870, 1888, 1906, 1939, 1957, 1975, 1993, 2011, 2029	–1276, –509, –252, 641, 1539, 1665	–1407, –383, 772, 1796
28	–1511, –1493, –1475, –1457, –1439, –1421, – 1388, –1370, –1352, –1334, –1316, –1298, –	–1275, –508, –251, 642,	–1406, –382, 773, 1797

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	1255, –1237, –1219, –1201, –1183, –1165, – 1132, –1114, –1096, –1078, –1060, –1042, –487, –469, –451, –433, –415, –397, –364, –346, –328, –310, –292, –274, –231, –213, –195, –177, –159, –141, –108, –90, –72, –54, –36, –18, 537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006, 1561, 1579, 1597, 1615, 1633, 1651, 1684, 1702, 1720, 1738, 1756, 1774, 1817, 1835, 1853, 1871, 1889, 1907, 1940, 1958, 1976, 1994, 2012, 2030	1540, 1666	
29	–1509, –1491, –1473, –1455, –1437, –1419, – 1386, –1368, –1350, –1332, –1314, –1296, – 1253, –1235, –1217, –1199, –1181, –1163, – 1130, –1112, –1094, –1076, –1058, –1040, –485, –467, –449, –431, –413, –395, –362, –344, –326, –308, –290, –272, –229, –211, –193, –175, –157, –139, –106, –88, –70, –52, –34, –16, 539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008, 1563, 1581, 1599, 1617, 1635, 1653, 1686, 1704, 1722, 1740, 1758, 1776, 1819, 1837, 1855, 1873, 1891, 1909, 1942, 1960, 1978, 1996, 2014, 2032	–1273, –507, –249, 644, 1541, 1668	–1404, –380, 775, 1799
30	–1508, –1490, –1472, –1454, –1436, –1418, – 1385, –1367, –1349, –1331, –1313, –1295, – 1252, –1234, –1216, –1198, –1180, –1162, – 1129, –1111, –1093, –1075, –1057, –1039, –484, –466, –448, –430, –412, –394, –361, –343, –325, –307, –289, –271, –228, –210, –192, –174, –156, –138, –105, –87, –69, –51, –33, –15, 540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753,	–1272, –506, –248, 645, 1542, 1669	–1403, –379, 776, 1800

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part	Second part	
	796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009, 1564, 1582, 1600, 1618, 1636, 1654, 1687, 1705, 1723, 1741, 1759, 1777, 1820, 1838, 1856, 1874, 1892, 1910, 1943, 1961, 1979, 1997, 2015, 2033		
31	–1507, –1489, –1471, –1453, –1435, –1417, – 1384, –1366, –1348, –1330, –1312, –1294, – 1251, –1233, –1215, –1197, –1179, –1161, – 1128, –1110, –1092, –1074, –1056, –1038, –483, –465, –447, –429, –411, –393, –360, –342, –324, –306, –288, –270, –227, –209, –191, –173, –155, –137, –104, –86, –68, –50, –32, –14, 541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010, 1565, 1583, 1601, 1619, 1637, 1655, 1688, 1706, 1724, 1742, 1760, 1778, 1821, 1839, 1857, 1875, 1893, 1911, 1944, 1962, 1980, 1998, 2016, 2034	–1271, –505, –247, 646, 1543, 1670	–1402, –378, 777, 1801
32	–1506, –1488, –1470, –1452, –1434, –1416, – 1383, –1365, –1347, –1329, –1311, –1293, – 1250, –1232, –1214, –1196, –1178, –1160, – 1127, –1109, –1091, –1073, –1055, –1037, –482, –464, –446, –428, –410, –392, –359, –341, –323, –305, –287, –269, –226, –208, –190, –172, –154, –136, –103, –85, –67, –49, –31, –13, 542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011, 1566, 1584, 1602, 1620, 1638, 1656, 1689, 1707, 1725, 1743, 1761, 1779, 1822, 1840, 1858, 1876, 1894, 1912, 1945, 1963, 1981, 1999, 2017, 2035	–1270, –504, –246, 647, 1544, 1671	–1401, –377, 778, 1802

[00364] As shown in Table 40, each 106-tone DRU includes 102 data subcarriers, and some of the 102 data subcarriers (namely, the first part in Table 40: 96 data subcarriers) include 48 high-frequency subcarriers (whose subcarrier indices are positive values) and 48 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 96 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 96 data subcarriers may be considered as 16 groups. Absolute values of index differences between adjacent data subcarriers in a same group are 18. In addition, absolute values of index differences between data subcarriers of two adjacent groups are sequentially 33, 43, 33, 555, and the like. In other words, in an ascending order of frequencies, an absolute value of an index difference between data subcarriers in an even-numbered group and a previous adjacent odd-numbered group is equal to 33. An absolute value of an index difference between data subcarriers in a $(4i + 1)^{\text{th}}$ group ($i = 1, 2, \text{ or } 3$) and a previous $(4i)^{\text{th}}$ group is equal to 555. An absolute value of an index difference between data subcarriers in a $(4i - 1)^{\text{th}}$ group ($i = 1, 2, 3, \text{ or } 4$) and a previous $(4i - 2)^{\text{th}}$ group is equal to 43.

[00365] In other words, if indices of 96 data subcarriers of 102 data subcarriers included in each 106-tone DRU are sequentially arranged in a frequency direction and then divided into 16 groups, and each group includes six data subcarriers. Six data subcarriers in a same group are equally spaced. Specifically, a quantity of subcarriers between every two adjacent data subcarriers in a same group is 17.

[00366] In Table 40, for identifiers 1 to 4, 5 to 12, 13 to 16, 17 to 20, 21 to 28, or 29 to 32, there is a fixed offset between indices of 96 data subcarriers (the first part) included in two 106-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 96 data subcarriers in a 106-tone DRU whose identifier is i ($i = 1 \text{ to } 3, 5 \text{ to } 11, 13 \text{ to } 15, 17 \text{ to } 19, 21 \text{ to } 27, \text{ or } 29 \text{ to } 31$) all plus 1, to obtain indices of 96 data subcarriers in a 106-tone DRU whose identifier is $i + 1$. An offset between indices of 96 data subcarriers (the first part) in the 106-tone DRU whose identifier is 4 and indices of 96 data subcarriers in the 106-tone DRU whose identifier is 5 is 2. Similarly, an offset between indices of 96 data subcarriers (the first part) in a 106-tone DRU whose identifier is 12 (20 or 28) and indices of 96 data subcarriers in a 106-tone DRU whose identifier is 13 (21 or 29) is 2. In addition, an offset between indices of 96 data subcarriers (the first part) in the 106-tone DRU whose identifier is 16 and indices of 96 data subcarriers in the 106-tone DRU whose identifier is 17 is 495.

[00367] In addition to the 96 data subcarriers in the first part column, each 106-tone DRU further includes six data subcarriers and four pilot subcarriers. In some embodiments, six data subcarriers and four pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, and data

subcarriers in the first part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 40 shows an example, so that subcarriers included in the 106-tone DRU can be fully discrete.

[00368] Similar to the 106-tone DRU in the 80 MHz bandwidth or the 160 MHz bandwidth, the first part of data subcarriers may be considered as being obtained based on a 26-tone DRU or a 52-tone DRU. For brevity, as shown in Table 41, indices of the first part of data subcarriers included in the 106-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 37.

Table 41

Identifier of a 106-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part	
1	1, 37, 73, 109	−1671, −1548, −647, 244, 500, 1268	−1804, −780, 377, 1401
2	2, 38, 74, 110	−1670, −1547, −646, 245, 501, 1269	−1803, −779, 378, 1402
3	3, 39, 75, 111	−1669, −1546, −645, 246, 502, 1270	−1802, −778, 379, 1403
4	4, 40, 76, 112	−1668, −1545, −644, 247, 503, 1271	−1801, −777, 380, 1404
5	6, 42, 78, 114	−1666, −1544, −642, 249, 504, 1273	−1799, −775, 382, 1406
6	7, 43, 79, 115	−1665, −1543, −641, 250, 505, 1274	−1798, −774, 383, 1407
7	8, 44, 80, 116	−1664, −1542, −640, 251, 506, 1275	−1797, −773, 384, 1408
8	9, 45, 81, 117	−1663, −1541, −639, 252, 507, 1276	−1796, −772, 385, 1409
9	10, 46, 82, 118	−1662, −1540, −638, 253, 508, 1277	−1795, −771, 386, 1410
10	11, 47, 83, 119	−1789, −1539, −765, 128, 509, 1152	−1920, −896, 259, 1283

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26- tone DRU)	Second part	
11	12, 48, 84, 120	−1788, −1533, −764, 129, 515, 1153	−1919, −895, 260, 1284
12	13, 49, 85, 121	−1787, −1532, −763, 130, 516, 1154	−1918, −894, 261, 1285
13	15, 51, 87, 123	−1785, −1531, −761, 132, 517, 1156	−1916, −892, 263, 1287
14	16, 52, 88, 124	−1784, −1530, −760, 133, 518, 1157	−1915, −891, 264, 1288
15	17, 53, 89, 125	−1783, −1529, −759, 134, 519, 1158	−1914, −890, 265, 1289
16	18, 54, 90, 126	−1782, −1528, −758, 135, 520, 1159	−1913, −889, 266, 1290
17	19, 55, 91, 127	−1159, −524, −135, 756, 1524, 1780	−1292, −268, 889, 1913
18	20, 56, 92, 128	−1158, −523, −134, 757, 1525, 1781	−1291, −267, 890, 1914
19	21, 57, 93, 129	−1157, −522, −133, 758, 1526, 1782	−1290, −266, 891, 1915
20	22, 58, 94, 130	−1156, −521, −132, 759, 1527, 1783	−1289, −265, 892, 1916
21	24, 60, 96, 132	−1154, −520, −130, 761, 1528, 1785	−1287, −263, 894, 1918
22	25, 61, 97, 133	−1153, −519, −129, 762, 1529, 1786	−1286, −262, 895, 1919
23	26, 62, 98, 134	−1152, −518, −128, 763, 1530, 1787	−1285, −261, 896, 1920
24	27, 63, 99, 135	−1151, −517, −127, 764, 1531, 1788	−1284, −260, 897, 1921
25	28, 64, 100, 136	−1150, −516, −126, 765, 1532, 1789	−1283, −259, 898, 1922

Identifier of a 106- tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 26- tone DRU)	Second part	
26	29, 65, 101, 137	−1277, −515, −253, 640, 1533, 1664	−1408, −384, 771, 1795
27	30, 66, 102, 138	−1276, −509, −252, 641, 1539, 1665	−1407, −383, 772, 1796
28	31, 67, 103, 139	−1275, −508, −251, 642, 1540, 1666	−1406, −382, 773, 1797
29	33, 69, 105, 141	−1273, −507, −249, 644, 1541, 1668	−1404, −380, 775, 1799
30	34, 70, 106, 142	−1272, −506, −248, 645, 1542, 1669	−1403, −379, 776, 1800
31	35, 71, 107, 143	−1271, −505, −247, 646, 1543, 1670	−1402, −378, 777, 1801
32	36, 72, 108, 144	−1270, −504, −246, 647, 1544, 1671	−1401, −377, 778, 1802

[00369] In Table 41, the "first part" column means that the first part of (96) data subcarriers in the 106-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs shown in Table 37. For example, a 106-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers in the 102 data subcarriers included in the 106-tone DRU include all data subcarriers in four 26-tone DRUs whose identifiers are 1, 37, 73, and 109 shown in Table 37.

[00370] For example, the four pilot subcarriers included in the 106-tone DRU may be a part of a set of eight pilot subcarriers included in the corresponding four 26-tone DRUs. In addition, the other six data subcarriers included in the 106-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, and the pilot subcarriers, and the data subcarriers may be fully discrete, as shown in the "second part" column of Table 40 or Table 41.

[00371] In addition, in this embodiment of this disclosure, the identifier of the 106-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 106-tone DRU. For example, an identifier of a 106-tone DRU having a lowest-frequency index −2035 is 1.

[00372] According to the design of the 106-tone DRU shown in Table 40 in this embodiment of this disclosure, compared with the continuous 106-tone RU in the 320 MHz obtained based on

the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 13.

[00373] In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 106-tone DRU in 320 MHz is described by using Table 41. It may be understood that the foregoing described manner of determining a 106-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 106-tone DRU can be fully discrete. In another embodiment, a 106-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. For example, a combination of four 26-tone DRUs whose identifiers are 1 to 4 is determined as the first part of data subcarriers of the 106-tone DRU whose identifier is 1. This is not limited in this disclosure. Details are not described again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -2035, correspondingly the lowest-frequency index of the data subcarrier included in the 106-tone DRU also adaptively changes to another value.

[00374] In a tone plan solution of a DRU, the 320 MHz bandwidth includes 16 242-tone DRUs, and each 242-tone DRU includes 234 data subcarriers and eight pilot subcarriers. For example, Table 42 shows an example of 16 242-tone DRUs corresponding to the 320 MHz bandwidth, and shows indices of 234 data subcarriers and indices of eight pilot subcarriers included in each 242-tone DRU. The 234 data subcarriers may be considered as three parts. A first part of data subcarriers includes 192 data subcarriers, a second part of data subcarriers includes 24 data subcarriers, a third part of data subcarriers includes 18 data subcarriers, and a lowest-frequency index of a data subcarrier in a 242-tone DRU whose identifier is 1 is -2035. It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part in Table 42 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 242-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 242-tone DRU.

Table 42

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	-2035, -2017, -1999, -1981, - 1963, -1945, -1912, -1894, - 1876, -1858, -1840, -1822, - 1779, -1761, -1743, -1725, - 1707, -1689, -1656, -1638, - 1620, -1602, -1584, -1566, - 1523, -1505, -1487, -1469, - 1451, -1433, -1400, -1382, - 1364, -1346, -1328, -1310, - 1267, -1249, -1231, -1213, - 1195, -1177, -1144, -1126, - 1108, -1090, -1072, -1054, - 1011, -993, -975, -957, -939, - 921, -888, -870, -852, -834, - 816, -798, -755, -737, -719, - 701, -683, -665, -632, -614, - 596, -578, -560, -542, -499, - 481, -463, -445, -427, -409, - 376, -358, -340, -322, -304, - 286, -243, -225, -207, -189, - 171, -153, -120, -102, -84, -66, - 48, -30, 13, 31, 49, 67, 85, 103, 136, 154, 172, 190, 208, 226, 269, 287, 305, 323, 341, 359, 392, 410, 428, 446, 464, 482, 525, 543, 561, 579, 597, 615, 648, 666, 684, 702, 720, 738, 781, 799, 817, 835, 853, 871, 904, 922, 940, 958, 976, 994, 1037, 1055, 1073, 1091, 1109,	-2031, - 2013, -1995, -1977, - 1959, -1941, -1908, - 1890, -1872, -1854, - 1836, -1818, -1775, - 1757, -1739, -1721, - 1703, -1685, -1652, - 1634, -1616, -1598, - 1580, -1562	-1671, - 1548, -647, 244, 500, 1268, -1159, -524, -135, 756, 1524, 1780, -1527, -1415, - 1036, -637, - 1800, -1667	-1804, -780, 377, 1401, - 1292, -268, 889, 1913

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1127, 1160, 1178, 1196, 1214, 1232, 1250, 1293, 1311, 1329, 1347, 1365, 1383, 1416, 1434, 1452, 1470, 1488, 1506, 1549, 1567, 1585, 1603, 1621, 1639, 1672, 1690, 1708, 1726, 1744, 1762, 1805, 1823, 1841, 1859, 1877, 1895, 1928, 1946, 1964, 1982, 2000, 2018			
2	–2034, –2016, –1998, –1980, – 1962, –1944, –1911, –1893, – 1875, –1857, –1839, –1821, – 1778, –1760, –1742, –1724, – 1706, –1688, –1655, –1637, – 1619, –1601, –1583, –1565, – 1522, –1504, –1486, –1468, – 1450, –1432, –1399, –1381, – 1363, –1345, –1327, –1309, – 1266, –1248, –1230, –1212, – 1194, –1176, –1143, –1125, – 1107, –1089, –1071, –1053, – 1010, –992, –974, –956, –938, – 920, –887, –869, –851, –833, – 815, –797, –754, –736, –718, – 700, –682, –664, –631, –613, – 595, –577, –559, –541, –498, – 480, –462, –444, –426, –408, – 375, –357, –339, –321, –303, – 285, –242, –224, –206, –188, – 170, –152, –119, –101, –83, –65, – 47, –29, 14, 32, 50, 68, 86, 104,	–2022, – 2004, –1986, –1968, – 1950, –1932, –1899, – 1881, –1863, –1845, – 1827, –1809, –1766, – 1748, –1730, –1712, – 1694, –1676, –1643, – 1625, –1607, –1589, – 1571, –1553	–1670, – 1547, –646, 245, 501, 1269, –1158, –523, –134, 757, 1525, 1781, –1526, –1414, – 1012, –636, – 1917, –1786	–1803, –779, 378, 1402, – 1291, –267, 890, 1914

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	137, 155, 173, 191, 209, 227, 270, 288, 306, 324, 342, 360, 393, 411, 429, 447, 465, 483, 526, 544, 562, 580, 598, 616, 649, 667, 685, 703, 721, 739, 782, 800, 818, 836, 854, 872, 905, 923, 941, 959, 977, 995, 1038, 1056, 1074, 1092, 1110, 1128, 1161, 1179, 1197, 1215, 1233, 1251, 1294, 1312, 1330, 1348, 1366, 1384, 1417, 1435, 1453, 1471, 1489, 1507, 1550, 1568, 1586, 1604, 1622, 1640, 1673, 1691, 1709, 1727, 1745, 1763, 1806, 1824, 1842, 1860, 1878, 1896, 1929, 1947, 1965, 1983, 2001, 2019			
3	–2033, –2015, –1997, –1979, – 1961, –1943, –1910, –1892, – 1874, –1856, –1838, –1820, – 1777, –1759, –1741, –1723, – 1705, –1687, –1654, –1636, – 1618, –1600, –1582, –1564, – 1521, –1503, –1485, –1467, – 1449, –1431, –1398, –1380, – 1362, –1344, –1326, –1308, – 1265, –1247, –1229, –1211, – 1193, –1175, –1142, –1124, – 1106, –1088, –1070, –1052, – 1009, –991, –973, –955, –937, – 919, –886, –868, –850, –832, – 814, –796, –753, –735, –717, –	–1519, – 1501, –1483, –1465, – 1447, –1429, –1396, – 1378, –1360, –1342, – 1324, –1306, –1263, – 1245, –1227, –1209, – 1191, –1173, –1140, – 1122, –1104, –1086, –	–1669, – 1546, –645, 246, 502, 1270, –1157, –522, –133, 758, 1526, 1782, –1781, –1413, –903, –635, –1288, –1155	–1802, –778, 379, 1403, – 1290, –266, 891, 1915

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	699, –681, –663, –630, –612, – 594, –576, –558, –540, –497, – 479, –461, –443, –425, –407, – 374, –356, –338, –320, –302, – 284, –241, –223, –205, –187, – 169, –151, –118, –100, –82, –64, – 46, –28, 15, 33, 51, 69, 87, 105, 138, 156, 174, 192, 210, 228, 271, 289, 307, 325, 343, 361, 394, 412, 430, 448, 466, 484, 527, 545, 563, 581, 599, 617, 650, 668, 686, 704, 722, 740, 783, 801, 819, 837, 855, 873, 906, 924, 942, 960, 978, 996, 1039, 1057, 1075, 1093, 1111, 1129, 1162, 1180, 1198, 1216, 1234, 1252, 1295, 1313, 1331, 1349, 1367, 1385, 1418, 1436, 1454, 1472, 1490, 1508, 1551, 1569, 1587, 1605, 1623, 1641, 1674, 1692, 1710, 1728, 1746, 1764, 1807, 1825, 1843, 1861, 1879, 1897, 1930, 1948, 1966, 1984, 2002, 2020	1068, –1050		
4	–2032, –2014, –1996, –1978, – 1960, –1942, –1909, –1891, – 1873, –1855, –1837, –1819, – 1776, –1758, –1740, –1722, – 1704, –1686, –1653, –1635, – 1617, –1599, –1581, –1563, – 1520, –1502, –1484, –1466, – 1448, –1430, –1397, –1379, –	–1510, – 1492, –1474, –1456, – 1438, –1420, –1387, – 1369, –1351, –1333, – 1315, –1297,	–1668, – 1545, –644, 247, 503, 1271, –1156, –521, –132, 759, 1527, 1783, –1780, –1412, –902,	–1801, –777, 380, 1404, – 1289, –265, 892, 1916

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1361, –1343, –1325, –1307, – 1264, –1246, –1228, –1210, – 1192, –1174, –1141, –1123, – 1105, –1087, –1069, –1051, – 1008, –990, –972, –954, –936, – 918, –885, –867, –849, –831, – 813, –795, –752, –734, –716, – 698, –680, –662, –629, –611, – 593, –575, –557, –539, –496, – 478, –460, –442, –424, –406, – 373, –355, –337, –319, –301, – 283, –240, –222, –204, –186, – 168, –150, –117, –99, –81, –63, – 45, –27, 16, 34, 52, 70, 88, 106, 139, 157, 175, 193, 211, 229, 272, 290, 308, 326, 344, 362, 395, 413, 431, 449, 467, 485, 528, 546, 564, 582, 600, 618, 651, 669, 687, 705, 723, 741, 784, 802, 820, 838, 856, 874, 907, 925, 943, 961, 979, 997, 1040, 1058, 1076, 1094, 1112, 1130, 1163, 1181, 1199, 1217, 1235, 1253, 1296, 1314, 1332, 1350, 1368, 1386, 1419, 1437, 1455, 1473, 1491, 1509, 1552, 1570, 1588, 1606, 1624, 1642, 1675, 1693, 1711, 1729, 1747, 1765, 1808, 1826, 1844, 1862, 1880, 1898, 1931, 1949, 1967, 1985, 2003, 2021	–1254, – 1236, –1218, –1200, – 1182, –1164, –1131, – 1113, –1095, –1077, – 1059, –1041	–634, –1405, –1274	
5	–2030, –2012, –1994, –1976, –	–1007, –989,	–1666, –	–1799, –775,

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1958, –1940, –1907, –1889, – 1871, –1853, –1835, –1817, – 1774, –1756, –1738, –1720, – 1702, –1684, –1651, –1633, – 1615, –1597, –1579, –1561, – 1518, –1500, –1482, –1464, – 1446, –1428, –1395, –1377, – 1359, –1341, –1323, –1305, – 1262, –1244, –1226, –1208, – 1190, –1172, –1139, –1121, – 1103, –1085, –1067, –1049, – 1006, –988, –970, –952, –934, – 916, –883, –865, –847, –829, – 811, –793, –750, –732, –714, – 696, –678, –660, –627, –609, – 591, –573, –555, –537, –494, – 476, –458, –440, –422, –404, – 371, –353, –335, –317, –299, – 281, –238, –220, –202, –184, – 166, –148, –115, –97, –79, –61, – 43, –25, 18, 36, 54, 72, 90, 108, 141, 159, 177, 195, 213, 231, 274, 292, 310, 328, 346, 364, 397, 415, 433, 451, 469, 487, 530, 548, 566, 584, 602, 620, 653, 671, 689, 707, 725, 743, 786, 804, 822, 840, 858, 876, 909, 927, 945, 963, 981, 999, 1042, 1060, 1078, 1096, 1114, 1132, 1165, 1183, 1201, 1219, 1237, 1255, 1298, 1316, 1334, 1352, 1370, 1388, 1421, 1439,	–971, –953, – 935, –917, – 884, –866, – 848, –830, – 812, –794, – 751, –733, – 715, –697, – 679, –661, – 628, –610, – 592, –574, – 556, –538	1544, –642, 249, 504, 1273, –1154, –520, –130, 761, 1528, 1785, –1792, –1411, –901, –503, –776, – 643	382, 1406, – 1287, –263, 894, 1918

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1457, 1475, 1493, 1511, 1554, 1572, 1590, 1608, 1626, 1644, 1677, 1695, 1713, 1731, 1749, 1767, 1810, 1828, 1846, 1864, 1882, 1900, 1933, 1951, 1969, 1987, 2005, 2023			
6	–2029, –2011, –1993, –1975, – 1957, –1939, –1906, –1888, – 1870, –1852, –1834, –1816, – 1773, –1755, –1737, –1719, – 1701, –1683, –1650, –1632, – 1614, –1596, –1578, –1560, – 1517, –1499, –1481, –1463, – 1445, –1427, –1394, –1376, – 1358, –1340, –1322, –1304, – 1261, –1243, –1225, –1207, – 1189, –1171, –1138, –1120, – 1102, –1084, –1066, –1048, – 1005, –987, –969, –951, –933, – 915, –882, –864, –846, –828, – 810, –792, –749, –731, –713, – 695, –677, –659, –626, –608, – 590, –572, –554, –536, –493, – 475, –457, –439, –421, –403, – 370, –352, –334, –316, –298, – 280, –237, –219, –201, –183, – 165, –147, –114, –96, –78, –60, – 42, –24, 19, 37, 55, 73, 91, 109, 142, 160, 178, 196, 214, 232, 275, 293, 311, 329, 347, 365, 398, 416, 434, 452, 470, 488, 531, 549, 567,	–998, –980, – 962, –944, – 926, –908, – 875, –857, – 839, –821, – 803, –785, – 742, –724, – 706, –688, – 670, –652, – 619, –601, – 583, –565, – 547, –529	–1665, – 1543, –641, 250, 505, 1274, –1153, –519, –129, 762, 1529, 1786, –1791, –1410, –900, –502, –893, – 762	–1798, –774, 383, 1407, – 1286, –262, 895, 1919

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	585, 603, 621, 654, 672, 690, 708, 726, 744, 787, 805, 823, 841, 859, 877, 910, 928, 946, 964, 982, 1000, 1043, 1061, 1079, 1097, 1115, 1133, 1166, 1184, 1202, 1220, 1238, 1256, 1299, 1317, 1335, 1353, 1371, 1389, 1422, 1440, 1458, 1476, 1494, 1512, 1555, 1573, 1591, 1609, 1627, 1645, 1678, 1696, 1714, 1732, 1750, 1768, 1811, 1829, 1847, 1865, 1883, 1901, 1934, 1952, 1970, 1988, 2006, 2024			
7	–2028, –2010, –1992, –1974, – 1956, –1938, –1905, –1887, – 1869, –1851, –1833, –1815, – 1772, –1754, –1736, –1718, – 1700, –1682, –1649, –1631, – 1613, –1595, –1577, –1559, – 1516, –1498, –1480, –1462, – 1444, –1426, –1393, –1375, – 1357, –1339, –1321, –1303, – 1260, –1242, –1224, –1206, – 1188, –1170, –1137, –1119, –1101, –1083, –1065, –1047, –1004, – 986, –968, –950, –932, –914, – 881, –863, –845, –827, –809, – 791, –748, –730, –712, –694, – 676, –658, –625, –607, –589, – 571, –553, –535, –492, –474, – 456, –438, –420, –402, –369, –	–495, –477, – 459, –441, – 423, –405, – 372, –354, – 336, –318, – 300, –282, – 239, –221, – 203, –185, – 167, –149, – 116, –98, – 80, –62, –44, –26	–1664, – 1542, –640, 251, 506, 1275, –1152, –518, –128, 763, 1530, 1787, –1790, –1409, –899, –12, –264, – 131	–1797, –773, 384, 1408, – 1285, –261, 896, 1920

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	351, –333, –315, –297, –279, – 236, –218, –200, –182, –164, – 146, –113, –95, –77, –59, –41, – 23, 20, 38, 56, 74, 92, 110, 143, 161, 179, 197, 215, 233, 276, 294, 312, 330, 348, 366, 399, 417, 435, 453, 471, 489, 532, 550, 568, 586, 604, 622, 655, 673, 691, 709, 727, 745, 788, 806, 824, 842, 860, 878, 911, 929, 947, 965, 983, 1001, 1044, 1062, 1080, 1098, 1116, 1134, 1167, 1185, 1203, 1221, 1239, 1257, 1300, 1318, 1336, 1354, 1372, 1390, 1423, 1441, 1459, 1477, 1495, 1513, 1556, 1574, 1592, 1610, 1628, 1646, 1679, 1697, 1715, 1733, 1751, 1769, 1812, 1830, 1848, 1866, 1884, 1902, 1935, 1953, 1971, 1989, 2007, 2025			
8	–2027, –2009, –1991, –1973, – 1955, –1937, –1904, –1886, – 1868, –1850, –1832, –1814, – 1771, –1753, –1735, –1717, – 1699, –1681, –1648, –1630, – 1612, –1594, –1576, –1558, – 1515, –1497, –1479, –1461, – 1443, –1425, –1392, –1374, – 1356, –1338, –1320, –1302, – 1259, –1241, –1223, –1205, – 1187, –1169, –1136, –1118, –1100,	–486, –468, – 450, –432, – 414, –396, – 363, –345, – 327, –309, – 291, –273, – 230, –212, – 194, –176, – 158, –140, – 107, –89, – 71, –53, –35,	–1663, – 1541, –639, 252, 507, 1276, –1151, –517, –127, 764, 1531, 1788, –1927, –1282, –898, 12, –381, – 250	–1796, –772, 385, 1409, – 1284, –260, 897, 1921

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	–1082, –1064, –1046, –1003, – 985, –967, –949, –931, –913, – 880, –862, –844, –826, –808, – 790, –747, –729, –711, –693, – 675, –657, –624, –606, –588, – 570, –552, –534, –491, –473, – 455, –437, –419, –401, –368, – 350, –332, –314, –296, –278, – 235, –217, –199, –181, –163, – 145, –112, –94, –76, –58, –40, – 22, 21, 39, 57, 75, 93, 111, 144, 162, 180, 198, 216, 234, 277, 295, 313, 331, 349, 367, 400, 418, 436, 454, 472, 490, 533, 551, 569, 587, 605, 623, 656, 674, 692, 710, 728, 746, 789, 807, 825, 843, 861, 879, 912, 930, 948, 966, 984, 1002, 1045, 1063, 1081, 1099, 1117, 1135, 1168, 1186, 1204, 1222, 1240, 1258, 1301, 1319, 1337, 1355, 1373, 1391, 1424, 1442, 1460, 1478, 1496, 1514, 1557, 1575, 1593, 1611, 1629, 1647, 1680, 1698, 1716, 1734, 1752, 1770, 1813, 1831, 1849, 1867, 1885, 1903, 1936, 1954, 1972, 1990, 2008, 2026	–17		
9	–2026, –2008, –1990, –1972, – 1954, –1936, –1903, –1885, – 1867, –1849, –1831, –1813, – 1770, –1752, –1734, –1716, –	17, 35, 53, 71, 89, 107, 140, 158, 176, 194,	–1662, – 1540, –638, 253, 508, 1277, –1150,	–1795, –771, 386, 1410, – 1283, –259, 898, 1922

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1698, –1680, –1647, –1629, – 1611, –1593, –1575, –1557, – 1514, –1496, –1478, –1460, – 1442, –1424, –1391, –1373, – 1355, –1337, –1319, –1301, – 1258, –1240, –1222, –1204, – 1186, –1168, –1135, –1117, – 1099, –1081, –1063, –1045, – 1002, –984, –966, –948, –930, – 912, –879, –861, –843, –825, – 807, –789, –746, –728, –710, – 692, –674, –656, –623, –605, – 587, –569, –551, –533, –490, – 472, –454, –436, –418, –400, – 367, –349, –331, –313, –295, – 277, –234, –216, –198, –180, – 162, –144, –111, –93, –75, –57, – 39, –21, 22, 40, 58, 76, 94, 112, 145, 163, 181, 199, 217, 235, 278, 296, 314, 332, 350, 368, 401, 419, 437, 455, 473, 491, 534, 552, 570, 588, 606, 624, 657, 675, 693, 711, 729, 747, 790, 808, 826, 844, 862, 880, 913, 931, 949, 967, 985, 1003, 1046, 1064, 1082, 1100, 1118, 1136, 1169, 1187, 1205, 1223, 1241, 1259, 1302, 1320, 1338, 1356, 1374, 1392, 1425, 1443, 1461, 1479, 1497, 1515, 1558, 1576, 1594, 1612, 1630, 1648, 1681, 1699, 1717, 1735,	212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486	–516, –126, 765, 1532, 1789, –1926, –1281, –897, 521, 248, 381	

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1753, 1771, 1814, 1832, 1850, 1868, 1886, 1904, 1937, 1955, 1973, 1991, 2009, 2027			
10	–2025, –2007, –1989, –1971, – 1953, –1935, –1902, –1884, – 1866, –1848, –1830, –1812, – 1769, –1751, –1733, –1715, – 1697, –1679, –1646, –1628, – 1610, –1592, –1574, –1556, – 1513, –1495, –1477, –1459, – 1441, –1423, –1390, –1372, – 1354, –1336, –1318, –1300, – 1257, –1239, –1221, –1203, – 1185, –1167, –1134, –1116, – 1098, –1080, –1062, –1044, – 1001, –983, –965, –947, –929, – 911, –878, –860, –842, –824, – 806, –788, –745, –727, –709, – 691, –673, –655, –622, –604, – 586, –568, –550, –532, –489, – 471, –453, –435, –417, –399, – 366, –348, –330, –312, –294, – 276, –233, –215, –197, –179, – 161, –143, –110, –92, –74, –56, – 38, –20, 23, 41, 59, 77, 95, 113, 146, 164, 182, 200, 218, 236, 279, 297, 315, 333, 351, 369, 402, 420, 438, 456, 474, 492, 535, 553, 571, 589, 607, 625, 658, 676, 694, 712, 730, 748, 791, 809, 827, 845, 863, 881, 914, 932, 950, 968, 986,	26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	–1789, – 1539, –765, 128, 509, 1152, –1277, –515, –253, 640, 1533, 1664, –1925, –1280, –770, 522, 131, 262	–1920, –896, 259, 1283, – 1408, –384, 771, 1795

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1004, 1047, 1065, 1083, 1101, 1119, 1137, 1170, 1188, 1206, 1224, 1242, 1260, 1303, 1321, 1339, 1357, 1375, 1393, 1426, 1444, 1462, 1480, 1498, 1516, 1559, 1577, 1595, 1613, 1631, 1649, 1682, 1700, 1718, 1736, 1754, 1772, 1815, 1833, 1851, 1869, 1887, 1905, 1938, 1956, 1974, 1992, 2010, 2028			
11	–2024, –2006, –1988, –1970, – 1952, –1934, –1901, –1883, – 1865, –1847, –1829, –1811, – 1768, –1750, –1732, –1714, – 1696, –1678, –1645, –1627, – 1609, –1591, –1573, –1555, – 1512, –1494, –1476, –1458, – 1440, –1422, –1389, –1371, – 1353, –1335, –1317, –1299, – 1256, –1238, –1220, –1202, – 1184, –1166, –1133, –1115, – 1097, –1079, –1061, –1043, – 1000, –982, –964, –946, –928, – 910, –877, –859, –841, –823, – 805, –787, –744, –726, –708, – 690, –672, –654, –621, –603, – 585, –567, –549, –531, –488, – 470, –452, –434, –416, –398, – 365, –347, –329, –311, –293, – 275, –232, –214, –196, –178, – 160, –142, –109, –91, –73, –55, –	529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	–1788, – 1533, –764, 129, 515, 1153, –1276, –509, –252, 641, 1539, 1665, –1924, –1279, –769, 1145, 760, 893	–1919, –895, 260, 1284, – 1407, –383, 772, 1796

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	37, –19, 24, 42, 60, 78, 96, 114, 147, 165, 183, 201, 219, 237, 280, 298, 316, 334, 352, 370, 403, 421, 439, 457, 475, 493, 536, 554, 572, 590, 608, 626, 659, 677, 695, 713, 731, 749, 792, 810, 828, 846, 864, 882, 915, 933, 951, 969, 987, 1005, 1048, 1066, 1084, 1102, 1120, 1138, 1171, 1189, 1207, 1225, 1243, 1261, 1304, 1322, 1340, 1358, 1376, 1394, 1427, 1445, 1463, 1481, 1499, 1517, 1560, 1578, 1596, 1614, 1632, 1650, 1683, 1701, 1719, 1737, 1755, 1773, 1816, 1834, 1852, 1870, 1888, 1906, 1939, 1957, 1975, 1993, 2011, 2029			
12	–2023, –2005, –1987, –1969, – 1951, –1933, –1900, –1882, – 1864, –1846, –1828, –1810, – 1767, –1749, –1731, –1713, – 1695, –1677, –1644, –1626, – 1608, –1590, –1572, –1554, – 1511, –1493, –1475, –1457, – 1439, –1421, –1388, –1370, – 1352, –1334, –1316, –1298, – 1255, –1237, –1219, –1201, – 1183, –1165, –1132, –1114, – 1096, –1078, –1060, –1042, –999, –981, –963, –945, –927, –909, – 876, –858, –840, –822, –804, –	538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007	–1787, – 1532, –763, 130, 516, 1154, –1275, –508, –251, 642, 1540, 1666, –1923, –1278, –768, 1146, 643, 774	–1918, –894, 261, 1285, – 1406, –382, 773, 1797

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	786, –743, –725, –707, –689, – 671, –653, –620, –602, –584, – 566, –548, –530, –487, –469, – 451, –433, –415, –397, –364, – 346, –328, –310, –292, –274, – 231, –213, –195, –177, –159, – 141, –108, –90, –72, –54, –36, – 18, 25, 43, 61, 79, 97, 115, 148, 166, 184, 202, 220, 238, 281, 299, 317, 335, 353, 371, 404, 422, 440, 458, 476, 494, 537, 555, 573, 591, 609, 627, 660, 678, 696, 714, 732, 750, 793, 811, 829, 847, 865, 883, 916, 934, 952, 970, 988, 1006, 1049, 1067, 1085, 1103, 1121, 1139, 1172, 1190, 1208, 1226, 1244, 1262, 1305, 1323, 1341, 1359, 1377, 1395, 1428, 1446, 1464, 1482, 1500, 1518, 1561, 1579, 1597, 1615, 1633, 1651, 1684, 1702, 1720, 1738, 1756, 1774, 1817, 1835, 1853, 1871, 1889, 1907, 1940, 1958, 1976, 1994, 2012, 2030			
13	–2021, –2003, –1985, –1967, – 1949, –1931, –1898, –1880, – 1862, –1844, –1826, –1808, – 1765, –1747, –1729, –1711, – 1693, –1675, –1642, –1624, – 1606, –1588, –1570, –1552, – 1509, –1491, –1473, –1455, –	1041, 1059, 1077, 1095, 1113, 1131, 1164, 1182, 1200, 1218, 1236, 1254, 1297, 1315,	–1785, – 1531, –761, 132, 517, 1156, –1273, –507, –249, 644, 1541, 1668, –1922,	–1916, –892, 263, 1287, – 1404, –380, 775, 1799

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1437, –1419, –1386, –1368, – 1350, –1332, –1314, –1296, – 1253, –1235, –1217, –1199, – 1181, –1163, –1130, –1112, – 1094, –1076, –1058, –1040, –997, –979, –961, –943, –925, –907, – 874, –856, –838, –820, –802, – 784, –741, –723, –705, –687, – 669, –651, –618, –600, –582, – 564, –546, –528, –485, –467, – 449, –431, –413, –395, –362, – 344, –326, –308, –290, –272, – 229, –211, –193, –175, –157, – 139, –106, –88, –70, –52, –34, – 16, 27, 45, 63, 81, 99, 117, 150, 168, 186, 204, 222, 240, 283, 301, 319, 337, 355, 373, 406, 424, 442, 460, 478, 496, 539, 557, 575, 593, 611, 629, 662, 680, 698, 716, 734, 752, 795, 813, 831, 849, 867, 885, 918, 936, 954, 972, 990, 1008, 1051, 1069, 1087, 1105, 1123, 1141, 1174, 1192, 1210, 1228, 1246, 1264, 1307, 1325, 1343, 1361, 1379, 1397, 1430, 1448, 1466, 1484, 1502, 1520, 1563, 1581, 1599, 1617, 1635, 1653, 1686, 1704, 1722, 1740, 1758, 1776, 1819, 1837, 1855, 1873, 1891, 1909, 1942, 1960, 1978, 1996, 2014, 2032	1333, 1351, 1369, 1387, 1420, 1438, 1456, 1474, 1492, 1510	–1269, –767, 1411, 1272, 1405	

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
14	–2020, –2002, –1984, –1966, – 1948, –1930, –1897, –1879, – 1861, –1843, –1825, –1807, – 1764, –1746, –1728, –1710, – 1692, –1674, –1641, –1623, – 1605, –1587, –1569, –1551, – 1508, –1490, –1472, –1454, – 1436, –1418, –1385, –1367, – 1349, –1331, –1313, –1295, – 1252, –1234, –1216, –1198, – 1180, –1162, –1129, –1111, –1093, –1075, –1057, –1039, –996, –978, –960, –942, –924, –906, –873, – 855, –837, –819, –801, –783, – 740, –722, –704, –686, –668, – 650, –617, –599, –581, –563, – 545, –527, –484, –466, –448, – 430, –412, –394, –361, –343, – 325, –307, –289, –271, –228, – 210, –192, –174, –156, –138, – 105, –87, –69, –51, –33, –15, 28, 46, 64, 82, 100, 118, 151, 169, 187, 205, 223, 241, 284, 302, 320, 338, 356, 374, 407, 425, 443, 461, 479, 497, 540, 558, 576, 594, 612, 630, 663, 681, 699, 717, 735, 753, 796, 814, 832, 850, 868, 886, 919, 937, 955, 973, 991, 1009, 1052, 1070, 1088, 1106, 1124, 1142, 1175, 1193, 1211, 1229, 1247, 1265, 1308, 1326, 1344, 1362,	1050, 1068, 1086, 1104, 1122, 1140, 1173, 1191, 1209, 1227, 1245, 1263, 1306, 1324, 1342, 1360, 1378, 1396, 1429, 1447, 1465, 1483, 1501, 1519	–1784, – 1530, –760, 133, 518, 1157, –1272, –506, –248, 645, 1542, 1669, –1921, –1268, –766, 1412, 1155, 1286	–1915, –891, 264, 1288, – 1403, –379, 776, 1800

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1380, 1398, 1431, 1449, 1467, 1485, 1503, 1521, 1564, 1582, 1600, 1618, 1636, 1654, 1687, 1705, 1723, 1741, 1759, 1777, 1820, 1838, 1856, 1874, 1892, 1910, 1943, 1961, 1979, 1997, 2015, 2033			
15	–2019, –2001, –1983, –1965, – 1947, –1929, –1896, –1878, – 1860, –1842, –1824, –1806, – 1763, –1745, –1727, –1709, – 1691, –1673, –1640, –1622, – 1604, –1586, –1568, –1550, – 1507, –1489, –1471, –1453, – 1435, –1417, –1384, –1366, – 1348, –1330, –1312, –1294, – 1251, –1233, –1215, –1197, – 1179, –1161, –1128, –1110, – 1092, –1074, –1056, –1038, –995, –977, –959, –941, –923, –905, – 872, –854, –836, –818, –800, – 782, –739, –721, –703, –685, – 667, –649, –616, –598, –580, – 562, –544, –526, –483, –465, – 447, –429, –411, –393, –360, – 342, –324, –306, –288, –270, – 227, –209, –191, –173, –155, – 137, –104, –86, –68, –50, –32, – 14, 29, 47, 65, 83, 101, 119, 152, 170, 188, 206, 224, 242, 285, 303, 321, 339, 357, 375, 408, 426, 444,	1553, 1571, 1589, 1607, 1625, 1643, 1676, 1694, 1712, 1730, 1748, 1766, 1809, 1827, 1845, 1863, 1881, 1899, 1932, 1950, 1968, 1986, 2004, 2022	–1783, – 1529, –759, 134, 519, 1158, –1271, –505, –247, 646, 1543, 1670, –1794, –1149, –757, 1413, 1784, 1917	–1914, –890, 265, 1289, – 1402, –378, 777, 1801

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	462, 480, 498, 541, 559, 577, 595, 613, 631, 664, 682, 700, 718, 736, 754, 797, 815, 833, 851, 869, 887, 920, 938, 956, 974, 992, 1010, 1053, 1071, 1089, 1107, 1125, 1143, 1176, 1194, 1212, 1230, 1248, 1266, 1309, 1327, 1345, 1363, 1381, 1399, 1432, 1450, 1468, 1486, 1504, 1522, 1565, 1583, 1601, 1619, 1637, 1655, 1688, 1706, 1724, 1742, 1760, 1778, 1821, 1839, 1857, 1875, 1893, 1911, 1944, 1962, 1980, 1998, 2016, 2034			
16	–2018, –2000, –1982, –1964, – 1946, –1928, –1895, –1877, – 1859, –1841, –1823, –1805, – 1762, –1744, –1726, –1708, – 1690, –1672, –1639, –1621, – 1603, –1585, –1567, –1549, – 1506, –1488, –1470, –1452, – 1434, –1416, –1383, –1365, – 1347, –1329, –1311, –1293, – 1250, –1232, –1214, –1196, – 1178, –1160, –1127, –1109, – 1091, –1073, –1055, –1037, –994, –976, –958, –940, –922, –904, – 871, –853, –835, –817, –799, – 781, –738, –720, –702, –684, – 666, –648, –615, –597, –579, – 561, –543, –525, –482, –464, –	1562, 1580, 1598, 1616, 1634, 1652, 1685, 1703, 1721, 1739, 1757, 1775, 1818, 1836, 1854, 1872, 1890, 1908, 1941, 1959, 1977, 1995, 2013, 2031	–1782, – 1528, –758, 135, 520, 1159, –1270, –504, –246, 647, 1544, 1671, –1793, –1148, –756, 1414, 1667, 1798	–1913, –889, 266, 1290, – 1401, –377, 778, 1802

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	446, –428, –410, –392, –359, – 341, –323, –305, –287, –269, – 226, –208, –190, –172, –154, – 136, –103, –85, –67, –49, –31, – 13, 30, 48, 66, 84, 102, 120, 153, 171, 189, 207, 225, 243, 286, 304, 322, 340, 358, 376, 409, 427, 445, 463, 481, 499, 542, 560, 578, 596, 614, 632, 665, 683, 701, 719, 737, 755, 798, 816, 834, 852, 870, 888, 921, 939, 957, 975, 993, 1011, 1054, 1072, 1090, 1108, 1126, 1144, 1177, 1195, 1213, 1231, 1249, 1267, 1310, 1328, 1346, 1364, 1382, 1400, 1433, 1451, 1469, 1487, 1505, 1523, 1566, 1584, 1602, 1620, 1638, 1656, 1689, 1707, 1725, 1743, 1761, 1779, 1822, 1840, 1858, 1876, 1894, 1912, 1945, 1963, 1981, 1999, 2017, 2035			

[00375] As shown in Table 42, a first part of (192) data subcarriers in each 242-tone DRU include 96 high-frequency subcarriers (whose subcarrier indices are positive values) and 96 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the 192 data subcarriers (the first part) are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are 18, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 33 and 43.

[00376] In Table 42, for identifiers 1 to 4, 5 to 12, or 13 to 16, there is a fixed offset between indices of 192 data subcarriers (the first part) included in two 242-tone DRUs having adjacent

identifiers, and the fixed offset is 1. For example, indices of 192 data subcarriers in a 242-tone DRU whose identifier is i ($i = 1$ to 3, 5 to 11, or 13 to 15) all plus 1, to obtain indices of 192 data subcarriers in a 242-tone DRU whose identifier is $i + 1$. An offset between indices of 192 data subcarriers (the first part) in a 242-tone DRU whose identifier is 4 and indices of 192 data subcarriers in a 242-tone DRU whose identifier is 5 is 2. Similarly, an offset between indices of 192 data subcarriers (the first part) in a 242-tone DRU whose identifier is 12 and indices of 192 data subcarriers in a 242-tone DRU whose identifier is 13 is 2.

[00377] As shown in Table 42, 234 data subcarriers of each 242-tone DRU further include a second part of data subcarriers (24 data subcarriers). If every six data subcarriers may be considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are all 18, and absolute values of index differences between data subcarriers in two adjacent groups are sequentially 33, 43, and 33. In addition, indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is i ($i = 1, 3, 5, 7, \dots$, or 15) all plus 9, to obtain indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is $i + 1$. Indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is i ($i = 2, 4, 6, \dots$, or 14) all plus 503, to obtain indices of 24 data subcarriers in a second part of a 242-tone DRU whose identifier is $i + 1$.

[00378] In addition to the 192 data subcarriers in the first part column and the 24 data subcarriers in the second part column, each 242-tone DRU further includes 18 data subcarriers (the third part) and eight pilot subcarriers. In some embodiments, 18 data subcarriers and eight pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 42 shows an example, so that subcarriers included in the 242-tone DRU can be fully discrete.

[00379] Similar to the 242-tone DRU in the 80 MHz bandwidth or the 160 MHz bandwidth, the first part of data subcarriers may be obtained based on a 26-tone DRU or a 52-tone DRU, and the second part of data subcarriers may be obtained based on a 26-tone DRU. For brevity, as shown in Table 43, indices of the first part of data subcarriers included in the 242-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 37, and indices of the second part of data subcarriers included in the 242-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 37.

Table 43

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26- tone DRU)	Third part	
1	1, 37, 73, 109, 19, 55, 91, 127	5	–1671, –1548, –647, 244, 500, 1268, – 1159, –524, –135, 756, 1524, 1780, – 1527, –1415, –1036, –637, –1800, – 1667	–1804, – 780, 377, 1401, – 1292, –268, 889, 1913
2	2, 38, 74, 110, 20, 56, 92, 128	14	–1670, –1547, –646, 245, 501, 1269, – 1158, –523, –134, 757, 1525, 1781, – 1526, –1414, –1012, –636, –1917, – 1786	–1803, – 779, 378, 1402, – 1291, –267, 890, 1914
3	3, 39, 75, 111, 21, 57, 93, 129	23	–1669, –1546, –645, 246, 502, 1270, – 1157, –522, –133, 758, 1526, 1782, – 1781, –1413, –903, –635, –1288, – 1155	–1802, – 778, 379, 1403, – 1290, –266, 891, 1915
4	4, 40, 76, 112, 22, 58, 94, 130	32	–1668, –1545, –644, 247, 503, 1271, – 1156, –521, –132, 759, 1527, 1783, – 1780, –1412, –902, –634, –1405, – 1274	–1801, – 777, 380, 1404, – 1289, –265, 892, 1916
5	6, 42, 78, 114, 24, 60, 96, 132	41	–1666, –1544, –642, 249, 504, 1273, – 1154, –520, –130, 761, 1528, 1785, – 1792, –1411, –901, –503, –776, –643	–1799, – 775, 382, 1406, – 1287, –263, 894, 1918
6	7, 43, 79, 115,	50	–1665, –1543, –641, 250, 505, 1274, –	–1798, –

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26- tone DRU)	Third part	
	25, 61, 97, 133		1153, –519, –129, 762, 1529, 1786, – 1791, –1410, –900, –502, –893, –762	774, 383, 1407, – 1286, –262, 895, 1919
7	8, 44, 80, 116, 26, 62, 98, 134	59	–1664, –1542, –640, 251, 506, 1275, – 1152, –518, –128, 763, 1530, 1787, – 1790, –1409, –899, –12, –264, –131	–1797, – 773, 384, 1408, – 1285, –261, 896, 1920
8	9, 45, 81, 117, 27, 63, 99, 135	68	–1663, –1541, –639, 252, 507, 1276, – 1151, –517, –127, 764, 1531, 1788, – 1927, –1282, –898, 12, –381, –250	–1796, – 772, 385, 1409, – 1284, –260, 897, 1921
9	10, 46, 82, 118, 28, 64, 100, 136	77	–1662, –1540, –638, 253, 508, 1277, – 1150, –516, –126, 765, 1532, 1789, – 1926, –1281, –897, 521, 248, 381	–1795, – 771, 386, 1410, – 1283, –259, 898, 1922
10	11, 47, 83, 119, 29, 65, 101, 137	86	–1789, –1539, –765, 128, 509, 1152, – 1277, –515, –253, 640, 1533, 1664, – 1925, –1280, –770, 522, 131, 262	–1920, – 896, 259, 1283, – 1408, –384, 771, 1795
11	12, 48, 84, 120, 30, 66, 102, 138	95	–1788, –1533, –764, 129, 515, 1153, – 1276, –509, –252, 641, 1539, 1665, – 1924, –1279, –769, 1145, 760, 893	–1919, – 895, 260, 1284, –

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26- tone DRU)	Third part	
				1407, –383, 772, 1796
12	13, 49, 85, 121, 31, 67, 103, 139	104	–1787, –1532, –763, 130, 516, 1154, – 1275, –508, –251, 642, 1540, 1666, – 1923, –1278, –768, 1146, 643, 774	–1918, – 894, 261, 1285, – 1406, –382, 773, 1797
13	15, 51, 87, 123, 33, 69, 105, 141	113	–1785, –1531, –761, 132, 517, 1156, – 1273, –507, –249, 644, 1541, 1668, – 1922, –1269, –767, 1411, 1272, 1405	–1916, – 892, 263, 1287, – 1404, –380, 775, 1799
14	16, 52, 88, 124, 34, 70, 106, 142	122	–1784, –1530, –760, 133, 518, 1157, – 1272, –506, –248, 645, 1542, 1669, – 1921, –1268, –766, 1412, 1155, 1286	–1915, – 891, 264, 1288, – 1403, –379, 776, 1800
15	17, 53, 89, 125, 35, 71, 107, 143	131	–1783, –1529, –759, 134, 519, 1158, – 1271, –505, –247, 646, 1543, 1670, – 1794, –1149, –757, 1413, 1784, 1917	–1914, – 890, 265, 1289, – 1402, –378, 777, 1801
16	18, 54, 90, 126, 36, 72, 108, 144	140	–1782, –1528, –758, 135, 520, 1159, – 1270, –504, –246, 647, 1544, 1671, – 1793, –1148, –756, 1414, 1667, 1798	–1913, – 889, 266, 1290, – 1401, –377, 778, 1802

[00380] In Table 43, the "first part" column means that the first part of (192) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The first part of 192 data subcarriers included in the 242-tone DRU include all data subcarriers in eight 26-tone DRUs whose identifiers are 1, 37, 73, 109, 19, 55, 91, and 127 shown in Table 37. Similarly, the "second part" column means that the second part of (24) data subcarriers in the 242-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The second part of 24 data subcarriers included in the 242-tone DRU includes data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 37.

[00381] For example, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 18 pilot subcarriers included in the corresponding nine 26-tone DRUs (the first part and the second part). Alternatively, in some embodiments, the eight pilot subcarriers included in the 242-tone DRU may be a part of a set of 16 pilot subcarriers included in the eight 26-tone DRUs in the corresponding first part. In addition, the other 18 data subcarriers included in the 242-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, the data subcarriers in the second part column, and the pilot subcarriers, and the data subcarriers may be fully discrete.

[00382] As shown in Table 42 or Table 43, each 242-tone DRU includes eight pilot subcarriers, and any two pilot subcarriers in a same DRU are not adjacent. The pilot subcarriers shown in Table 42 or Table 43 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity.

[00383] In addition, in this embodiment of this disclosure, the identifier of the 242-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 242-tone DRU. For example, an identifier of a 242-tone DRU having a lowest-frequency index -2035 is 1.

[00384] In addition, it should be noted that the 242-tone DRU in 320 MHz described with reference to Table 42 or Table 43 is merely an example. For example, 234 data subcarriers in the 242-tone DRU may alternatively be divided into three parts in another manner, for example, a first part, a second part, and a third part shown in Table 44 below. In Table 44, the "first part" column means that a first part of data subcarriers (204) in the 242-tone DRU include a combination of data subcarriers in corresponding 106-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The first part of (204) data subcarriers included in the 242-tone DRU include all data subcarriers of 106-tone DRUs whose identifiers are 1 and 17 shown in Table 40. In Table 44, the "second part" column means that the second part of (24) data subcarriers in the 242-tone

DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 242-tone DRU whose identifier is 1 is used as an example. The second part of (24) data subcarriers included in the 242-tone DRU include data subcarriers in a 26-tone DRU whose identifier is 5 shown in Table 37.

5

Table 44

Identifier of a 242-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 17	5	–1671, –1548, –647, 244, 500, 1268, –1159, –524, –135, 756, 1524, 1780, –1527, –1415, –1036, –637, –1800, –1667	–1804, –780, 377, 1401, –1292, –268, 889, 1913
2	2, 18	14	–1670, –1547, –646, 245, 501, 1269, –1158, –523, –134, 757, 1525, 1781, –1526, –1414, –1012, –636, –1917, –1786	–1803, –779, 378, 1402, –1291, –267, 890, 1914
3	3, 19	23	–1669, –1546, –645, 246, 502, 1270, –1157, –522, –133, 758, 1526, 1782, –1781, –1413, –903, –635, –1288, –1155	–1802, –778, 379, 1403, –1290, –266, 891, 1915
4	4, 20	32	–1668, –1545, –644, 247, 503, 1271, –1156, –521, –132, 759, 1527, 1783, –1780, –1412, –902, –634, –1405, –	–1801, –777, 380, 1404, –1289, –265, 892, 1916

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			1274	
5	5, 21	41	–1666, –1544, –642, 249, 504, 1273, –1154, –520, –130, 761, 1528, 1785, –1792, –1411, – 901, –503, –776, –643	–1799, –775, 382, 1406, –1287, –263, 894, 1918
6	6, 22	50	–1665, –1543, –641, 250, 505, 1274, –1153, –519, –129, 762, 1529, 1786, –1791, –1410, – 900, –502, –893, –762	–1798, –774, 383, 1407, –1286, –262, 895, 1919
7	7, 23	59	–1664, –1542, –640, 251, 506, 1275, –1152, –518, –128, 763, 1530, 1787, –1790, –1409, – 899, –12, –264, –131	–1797, –773, 384, 1408, –1285, –261, 896, 1920
8	8, 24	68	–1663, –1541, –639, 252, 507, 1276, –1151, –517, –127, 764, 1531, 1788, –1927, –1282, – 898, 12, –381, –250	–1796, –772, 385, 1409, –1284, –260, 897, 1921
9	9, 25	77	–1662, –1540, –638, 253, 508, 1277, –1150, –516, –126, 765, 1532, 1789, –1926, –1281, – 897, 521, 248, 381	–1795, –771, 386, 1410, –1283, –259, 898, 1922
10	10, 26	86	–1789, –1539, –765, 128, 509, 1152, –1277, –515, –253, 640, 1533,	–1920, –896, 259, 1283, –1408, –384, 771, 1795

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			1664, –1925, –1280, – 770, 522, 131, 262	
11	11, 27	95	–1788, –1533, –764, 129, 515, 1153, –1276, –509, –252, 641, 1539, 1665, –1924, –1279, – 769, 1145, 760, 893	–1919, –895, 260, 1284, –1407, –383, 772, 1796
12	12, 28	104	–1787, –1532, –763, 130, 516, 1154, –1275, –508, –251, 642, 1540, 1666, –1923, –1278, – 768, 1146, 643, 774	–1918, –894, 261, 1285, –1406, –382, 773, 1797
13	13, 29	113	–1785, –1531, –761, 132, 517, 1156, –1273, –507, –249, 644, 1541, 1668, –1922, –1269, – 767, 1411, 1272, 1405	–1916, –892, 263, 1287, –1404, –380, 775, 1799
14	14, 30	122	–1784, –1530, –760, 133, 518, 1157, –1272, –506, –248, 645, 1542, 1669, –1921, –1268, – 766, 1412, 1155, 1286	–1915, –891, 264, 1288, –1403, –379, 776, 1800
15	15, 31	131	–1783, –1529, –759, 134, 519, 1158, –1271, –505, –247, 646, 1543, 1670, –1794, –1149, – 757, 1413, 1784, 1917	–1914, –890, 265, 1289, –1402, –378, 777, 1801
16	16, 32	140	–1782, –1528, –758, 135, 520, 1159, –1270,	–1913, –889, 266, 1290, –1401, –377,

Identifier of a 242- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 106-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			−504, −246, 647, 1544, 1671, −1793, −1148, − 756, 1414, 1667, 1798	778, 1802

[00385] In this way, for the 320 MHz bandwidth, through the design of the 242-tone DRU shown in Table 42 to Table 44, compared with the continuous 242-tone RU in the 320 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 6.5.

[00386] In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 242-tone DRU in 320 MHz is described by using Table 43. It may be understood that the foregoing described manner of determining a 242-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 242-tone DRU can be fully discrete.

In another embodiment, a 242-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. This is not limited in this disclosure. Details are not described again.

[00387] In this embodiment of this disclosure, an association between a 106-tone DRU and a 26-tone DRU in 320 MHz is described by using Table 44. It may be understood that the foregoing described manner of determining a 242-tone DRU based on a 106-tone DRU and a 26-tone DRU is merely an example, and subcarriers in the 242-tone DRU can be fully discrete. In another embodiment, the 242-tone DRU may alternatively be determined in another manner. This is not limited in this disclosure. Details are not described again.

[00388] In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than −2035, correspondingly the lowest-frequency index of the data subcarrier included in the 242-tone DRU also adaptively changes to another value.

[00389] In a tone plan solution of a DRU, the 320 MHz bandwidth includes eight 484-tone DRUs, and each 484-tone DRU includes 468 data subcarriers and 16 pilot subcarriers. For example, Table 45 shows an example of eight 484-tone DRUs corresponding to the 320 MHz bandwidth, and shows 468 data subcarriers and 16 pilot subcarriers included in each 484-tone DRU. The 468 data subcarriers may be divided into three parts. A first part includes 384 data subcarriers, a second part includes 48 data subcarriers, a third part includes 36 data subcarriers, and a lowest-frequency

index of a data subcarrier in a 484-tone DRU whose identifier is 1 is –2035. It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part in Table 45 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 484-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 484-tone DRU.

Table 45

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	–2035, –2026, –2017, –2008, – 1999, –1990, –1981, –1972, –1963, –1954, –1945, –1936, –1912, – 1903, –1894, –1885, –1876, –1867, –1858, –1849, –1840, –1831, – 1822, –1813, –1779, –1770, –1761, –1752, –1743, –1734, –1725, – 1716, –1707, –1698, –1689, –1680, –1656, –1647, –1638, –1629, – 1620, –1611, –1602, –1593, –1584, –1575, –1566, –1557, –1523, – 1514, –1505, –1496, –1487, –1478, –1469, –1460, –1451, –1442, – 1433, –1424, –1400, –1391, –1382, –1373, –1364, –1355, –1346, – 1337, –1328, –1319, –1310, –1301, –1267, –1258, –1249, –1240, – 1231, –1222, –1213, –1204, –1195, –1186, –1177, –1168, –1144, – 1135, –1126, –1117, –1108, –1099,	–2031, – 2013, –1995, –1977, – 1959, –1941, –1908, – 1890, –1872, –1854, – 1836, –1818, –1775, – 1757, –1739, –1721, – 1703, –1685, –1652, – 1634, –1616, –1598, – 1580, –1562, 17, 35, 53, 71, 89, 107, 140, 158, 176, 194,	–1671, – 1548, –647, 244, 500, 1268, –1159, –524, –135, 756, 1524, 1780, –1527, –1415, – 1036, –637, – 1800, –1667, –1662, – 1540, –638, 253, 508, 1277, –1150, –516, –126, 765, 1532, 1789, –1926, –1281, –897, 521, 248, 381	–1804, – 780, 377, 1401, – 1292, –268, 889, 1913, – 1795, –771, 386, 1410, – 1283, –259, 898, 1922

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	–1090, –1081, –1072, –1063, – 1054, –1045, –1011, –1002, –993, –984, –975, –966, –957, –948, – 939, –930, –921, –912, –888, –879, –870, –861, –852, –843, –834, – 825, –816, –807, –798, –789, –755, –746, –737, –728, –719, –710, – 701, –692, –683, –674, –665, –656, –632, –623, –614, –605, –596, – 587, –578, –569, –560, –551, –542, –533, –499, –490, –481, –472, – 463, –454, –445, –436, –427, –418, –409, –400, –376, –367, –358, – 349, –340, –331, –322, –313, –304, –295, –286, –277, –243, –234, – 225, –216, –207, –198, –189, –180, –171, –162, –153, –144, –120, – 111, –102, –93, –84, –75, –66, –57, –48, –39, –30, –21, 13, 22, 31, 40, 49, 58, 67, 76, 85, 94, 103, 112, 136, 145, 154, 163, 172, 181, 190, 199, 208, 217, 226, 235, 269, 278, 287, 296, 305, 314, 323, 332, 341, 350, 359, 368, 392, 401, 410, 419, 428, 437, 446, 455, 464, 473, 482, 491, 525, 534, 543, 552, 561, 570, 579, 588, 597, 606, 615, 624, 648, 657, 666, 675, 684, 693, 702, 711, 720, 729, 738, 747, 781, 790, 799, 808, 817, 826, 835, 844, 853, 862, 871, 880, 904, 913, 922, 931, 940,	212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486		

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	949, 958, 967, 976, 985, 994, 1003, 1037, 1046, 1055, 1064, 1073, 1082, 1091, 1100, 1109, 1118, 1127, 1136, 1160, 1169, 1178, 1187, 1196, 1205, 1214, 1223, 1232, 1241, 1250, 1259, 1293, 1302, 1311, 1320, 1329, 1338, 1347, 1356, 1365, 1374, 1383, 1392, 1416, 1425, 1434, 1443, 1452, 1461, 1470, 1479, 1488, 1497, 1506, 1515, 1549, 1558, 1567, 1576, 1585, 1594, 1603, 1612, 1621, 1630, 1639, 1648, 1672, 1681, 1690, 1699, 1708, 1717, 1726, 1735, 1744, 1753, 1762, 1771, 1805, 1814, 1823, 1832, 1841, 1850, 1859, 1868, 1877, 1886, 1895, 1904, 1928, 1937, 1946, 1955, 1964, 1973, 1982, 1991, 2000, 2009, 2018, 2027			
2	–2034, –2025, –2016, –2007, – 1998, –1989, –1980, –1971, –1962, –1953, –1944, –1935, –1911, – 1902, –1893, –1884, –1875, –1866, –1857, –1848, –1839, –1830, – 1821, –1812, –1778, –1769, –1760, –1751, –1742, –1733, –1724, – 1715, –1706, –1697, –1688, –1679, –1655, –1646, –1637, –1628, – 1619, –1610, –1601, –1592, –1583,	–2022, – 2004, –1986, –1968, – 1950, –1932, –1899, – 1881, –1863, –1845, – 1827, –1809, –1766, – 1748, –1730,	–1670, – 1547, –646, 245, 501, 1269, –1158, –523, –134, 757, 1525, 1781, –1526, –1414, – 1012, –636, – 1917, –1786,	–1803, – 779, 378, 1402, – 1291, –267, 890, 1914, – 1920, –896, 259, 1283, – 1408, –384, 771, 1795

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	–1574, –1565, –1556, –1522, – 1513, –1504, –1495, –1486, –1477, –1468, –1459, –1450, –1441, – 1432, –1423, –1399, –1390, –1381, –1372, –1363, –1354, –1345, – 1336, –1327, –1318, –1309, –1300, –1266, –1257, –1248, –1239, – 1230, –1221, –1212, –1203, –1194, –1185, –1176, –1167, –1143, – 1134, –1125, –1116, –1107, –1098, –1089, –1080, –1071, –1062, – 1053, –1044, –1010, –1001, –992, –983, –974, –965, –956, –947, – 938, –929, –920, –911, –887, –878, –869, –860, –851, –842, –833, – 824, –815, –806, –797, –788, –754, –745, –736, –727, –718, –709, – 700, –691, –682, –673, –664, –655, –631, –622, –613, –604, –595, – 586, –577, –568, –559, –550, –541, –532, –498, –489, –480, –471, – 462, –453, –444, –435, –426, –417, –408, –399, –375, –366, –357, – 348, –339, –330, –321, –312, –303, –294, –285, –276, –242, –233, – 224, –215, –206, –197, –188, –179, –170, –161, –152, –143, –119, – 110, –101, –92, –83, –74, –65, –56, –47, –38, –29, –20, 14, 23, 32, 41, 50, 59, 68, 77, 86, 95, 104, 113, 137, 146, 155, 164, 173, 182, 191,	–1712, – 1694, –1676, –1643, – 1625, –1607, –1589, – 1571, –1553, 26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495	–1789, – 1539, –765, 128, 509, 1152, –1277, –515, –253, 640, 1533, 1664, –1925, –1280, –770, 522, 131, 262	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	200, 209, 218, 227, 236, 270, 279, 288, 297, 306, 315, 324, 333, 342, 351, 360, 369, 393, 402, 411, 420, 429, 438, 447, 456, 465, 474, 483, 492, 526, 535, 544, 553, 562, 571, 580, 589, 598, 607, 616, 625, 649, 658, 667, 676, 685, 694, 703, 712, 721, 730, 739, 748, 782, 791, 800, 809, 818, 827, 836, 845, 854, 863, 872, 881, 905, 914, 923, 932, 941, 950, 959, 968, 977, 986, 995, 1004, 1038, 1047, 1056, 1065, 1074, 1083, 1092, 1101, 1110, 1119, 1128, 1137, 1161, 1170, 1179, 1188, 1197, 1206, 1215, 1224, 1233, 1242, 1251, 1260, 1294, 1303, 1312, 1321, 1330, 1339, 1348, 1357, 1366, 1375, 1384, 1393, 1417, 1426, 1435, 1444, 1453, 1462, 1471, 1480, 1489, 1498, 1507, 1516, 1550, 1559, 1568, 1577, 1586, 1595, 1604, 1613, 1622, 1631, 1640, 1649, 1673, 1682, 1691, 1700, 1709, 1718, 1727, 1736, 1745, 1754, 1763, 1772, 1806, 1815, 1824, 1833, 1842, 1851, 1860, 1869, 1878, 1887, 1896, 1905, 1929, 1938, 1947, 1956, 1965, 1974, 1983, 1992, 2001, 2010, 2019, 2028			

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
3	–2033, –2024, –2015, –2006, – 1997, –1988, –1979, –1970, –1961, –1952, –1943, –1934, –1910, – 1901, –1892, –1883, –1874, –1865, –1856, –1847, –1838, –1829, – 1820, –1811, –1777, –1768, –1759, –1750, –1741, –1732, –1723, – 1714, –1705, –1696, –1687, –1678, –1654, –1645, –1636, –1627, – 1618, –1609, –1600, –1591, –1582, –1573, –1564, –1555, –1521, – 1512, –1503, –1494, –1485, –1476, –1467, –1458, –1449, –1440, – 1431, –1422, –1398, –1389, –1380, –1371, –1362, –1353, –1344, – 1335, –1326, –1317, –1308, –1299, –1265, –1256, –1247, –1238, – 1229, –1220, –1211, –1202, –1193, –1184, –1175, –1166, –1142, – 1133, –1124, –1115, –1106, –1097, –1088, –1079, –1070, –1061, – 1052, –1043, –1009, –1000, –991, –982, –973, –964, –955, –946, – 937, –928, –919, –910, –886, –877, –868, –859, –850, –841, –832, – 823, –814, –805, –796, –787, –753, –744, –735, –726, –717, –708, – 699, –690, –681, –672, –663, –654, –630, –621, –612, –603, –594, – 585, –576, –567, –558, –549, –540, –531, –497, –488, –479, –470, –	–1519, – 1501, –1483, –1465, – 1447, –1429, –1396, – 1378, –1360, –1342, – 1324, –1306, –1263, – 1245, –1227, –1209, – 1191, –1173, –1140, – 1122, –1104, –1086, – 1068, –1050, 529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998	–1669, – 1546, –645, 246, 502, 1270, –1157, –522, –133, 758, 1526, 1782, –1781, –1413, –903, –635, –1288, –1155, – 1788, –1533, –764, 129, 515, 1153, – 1276, –509, – 252, 641, 1539, 1665, – 1924, –1279, –769, 1145, 760, 893	–1802, – 778, 379, 1403, – 1290, –266, 891, 1915, – 1919, –895, 260, 1284, – 1407, –383, 772, 1796

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	461, –452, –443, –434, –425, –416, –407, –398, –374, –365, –356, – 347, –338, –329, –320, –311, –302, –293, –284, –275, –241, –232, – 223, –214, –205, –196, –187, –178, –169, –160, –151, –142, –118, – 109, –100, –91, –82, –73, –64, –55, –46, –37, –28, –19, 15, 24, 33, 42, 51, 60, 69, 78, 87, 96, 105, 114, 138, 147, 156, 165, 174, 183, 192, 201, 210, 219, 228, 237, 271, 280, 289, 298, 307, 316, 325, 334, 343, 352, 361, 370, 394, 403, 412, 421, 430, 439, 448, 457, 466, 475, 484, 493, 527, 536, 545, 554, 563, 572, 581, 590, 599, 608, 617, 626, 650, 659, 668, 677, 686, 695, 704, 713, 722, 731, 740, 749, 783, 792, 801, 810, 819, 828, 837, 846, 855, 864, 873, 882, 906, 915, 924, 933, 942, 951, 960, 969, 978, 987, 996, 1005, 1039, 1048, 1057, 1066, 1075, 1084, 1093, 1102, 1111, 1120, 1129, 1138, 1162, 1171, 1180, 1189, 1198, 1207, 1216, 1225, 1234, 1243, 1252, 1261, 1295, 1304, 1313, 1322, 1331, 1340, 1349, 1358, 1367, 1376, 1385, 1394, 1418, 1427, 1436, 1445, 1454, 1463, 1472, 1481, 1490, 1499, 1508, 1517, 1551, 1560,			

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1569, 1578, 1587, 1596, 1605, 1614, 1623, 1632, 1641, 1650, 1674, 1683, 1692, 1701, 1710, 1719, 1728, 1737, 1746, 1755, 1764, 1773, 1807, 1816, 1825, 1834, 1843, 1852, 1861, 1870, 1879, 1888, 1897, 1906, 1930, 1939, 1948, 1957, 1966, 1975, 1984, 1993, 2002, 2011, 2020, 2029			
4	–2032, –2023, –2014, –2005, – 1996, –1987, –1978, –1969, –1960, –1951, –1942, –1933, –1909, – 1900, –1891, –1882, –1873, –1864, –1855, –1846, –1837, –1828, – 1819, –1810, –1776, –1767, –1758, –1749, –1740, –1731, –1722, – 1713, –1704, –1695, –1686, –1677, –1653, –1644, –1635, –1626, – 1617, –1608, –1599, –1590, –1581, –1572, –1563, –1554, –1520, – 1511, –1502, –1493, –1484, –1475, –1466, –1457, –1448, –1439, – 1430, –1421, –1397, –1388, –1379, –1370, –1361, –1352, –1343, – 1334, –1325, –1316, –1307, –1298, –1264, –1255, –1246, –1237, – 1228, –1219, –1210, –1201, –1192, –1183, –1174, –1165, –1141, – 1132, –1123, –1114, –1105, –1096, –1087, –1078, –1069, –1060, –	–1510, – 1492, –1474, –1456, – 1438, –1420, –1387, – 1369, –1351, –1333, – 1315, –1297, –1254, – 1236, –1218, –1200, – 1182, –1164, –1131, – 1113, –1095, –1077, – 1059, –1041, 538, 556, 574, 592, 610, 628, 661, 679, 697, 715,	–1668, – 1545, –644, 247, 503, 1271, –1156, –521, –132, 759, 1527, 1783, –1780, –1412, –902, –634, –1405, –1274, – 1787, –1532, –763, 130, 516, 1154, – 1275, –508, – 251, 642, 1540, 1666, – 1923, –1278, –768, 1146, 643, 774	–1801, – 777, 380, 1404, – 1289, –265, 892, 1916, – 1918, –894, 261, 1285, – 1406, –382, 773, 1797

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1051, –1042, –1008, –999, –990, – 981, –972, –963, –954, –945, –936, –927, –918, –909, –885, –876, – 867, –858, –849, –840, –831, –822, –813, –804, –795, –786, –752, – 743, –734, –725, –716, –707, –698, –689, –680, –671, –662, –653, – 629, –620, –611, –602, –593, –584, –575, –566, –557, –548, –539, – 530, –496, –487, –478, –469, –460, –451, –442, –433, –424, –415, – 406, –397, –373, –364, –355, –346, –337, –328, –319, –310, –301, – 292, –283, –274, –240, –231, –222, –213, –204, –195, –186, –177, – 168, –159, –150, –141, –117, –108, –99, –90, –81, –72, –63, –54, –45, –36, –27, –18, 16, 25, 34, 43, 52, 61, 70, 79, 88, 97, 106, 115, 139, 148, 157, 166, 175, 184, 193, 202, 211, 220, 229, 238, 272, 281, 290, 299, 308, 317, 326, 335, 344, 353, 362, 371, 395, 404, 413, 422, 431, 440, 449, 458, 467, 476, 485, 494, 528, 537, 546, 555, 564, 573, 582, 591, 600, 609, 618, 627, 651, 660, 669, 678, 687, 696, 705, 714, 723, 732, 741, 750, 784, 793, 802, 811, 820, 829, 838, 847, 856, 865, 874, 883, 907, 916, 925, 934, 943, 952, 961, 970, 979, 988, 997, 1006,	733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007		

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1040, 1049, 1058, 1067, 1076, 1085, 1094, 1103, 1112, 1121, 1130, 1139, 1163, 1172, 1181, 1190, 1199, 1208, 1217, 1226, 1235, 1244, 1253, 1262, 1296, 1305, 1314, 1323, 1332, 1341, 1350, 1359, 1368, 1377, 1386, 1395, 1419, 1428, 1437, 1446, 1455, 1464, 1473, 1482, 1491, 1500, 1509, 1518, 1552, 1561, 1570, 1579, 1588, 1597, 1606, 1615, 1624, 1633, 1642, 1651, 1675, 1684, 1693, 1702, 1711, 1720, 1729, 1738, 1747, 1756, 1765, 1774, 1808, 1817, 1826, 1835, 1844, 1853, 1862, 1871, 1880, 1889, 1898, 1907, 1931, 1940, 1949, 1958, 1967, 1976, 1985, 1994, 2003, 2012, 2021, 2030			
5	–2030, –2021, –2012, –2003, – 1994, –1985, –1976, –1967, –1958, –1949, –1940, –1931, –1907, – 1898, –1889, –1880, –1871, –1862, –1853, –1844, –1835, –1826, – 1817, –1808, –1774, –1765, –1756, –1747, –1738, –1729, –1720, – 1711, –1702, –1693, –1684, –1675, –1651, –1642, –1633, –1624, – 1615, –1606, –1597, –1588, –1579, –1570, –1561, –1552, –1518, –	–1007, –989, –971, –953, – 935, –917, – 884, –866, – 848, –830, – 812, –794, – 751, –733, – 715, –697, – 679, –661, – 628, –610, – 592, –574, –	–1666, – 1544, –642, 249, 504, 1273, –1154, –520, –130, 761, 1528, 1785, –1792, –1411, –901, –503, –776, – 643, –1785, – 1531, –761,	–1799, – 775, 382, 1406, – 1287, –263, 894, 1918, – 1916, –892, 263, 1287, – 1404, –380, 775, 1799

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1509, –1500, –1491, –1482, –1473, –1464, –1455, –1446, –1437, –1428, –1419, –1395, –1386, –1377, –1368, –1359, –1350, –1341, –1332, –1323, –1314, –1305, –1296, –1262, –1253, –1244, –1235, –1226, –1217, –1208, –1199, –1190, –1181, –1172, –1163, –1139, –1130, –1121, –1112, –1103, –1094, –1085, –1076, –1067, –1058, –1049, –1040, –1006, –997, –988, –979, –970, –961, –952, –943, –934, –925, –916, –907, –883, –874, –865, –856, –847, –838, –829, –820, –811, –802, –793, –784, –750, –741, –732, –723, –714, –705, –696, –687, –678, –669, –660, –651, –627, –618, –609, –600, –591, –582, –573, –564, –555, –546, –537, –528, –494, –485, –476, –467, –458, –449, –440, –431, –422, –413, –404, –395, –371, –362, –353, –344, –335, –326, –317, –308, –299, –290, –281, –272, –238, –229, –220, –211, –202, –193, –184, –175, –166, –157, –148, –139, –115, –106, –97, –88, –79, –70, –61, –52, –43, –34, –25, –16, 18, 27, 36, 45, 54, 63, 72, 81, 90, 99, 108, 117, 141, 150, 159, 168, 177, 186, 195, 204, 213, 222, 231, 240, 274, 283, 292,	556, –538, 1041, 1059, 1077, 1095, 1113, 1131, 1164, 1182, 1200, 1218, 1236, 1254, 1297, 1315, 1333, 1351, 1369, 1387, 1420, 1438, 1456, 1474, 1492, 1510	132, 517, 1156, –1273, –507, –249, 644, 1541, 1668, –1922, –1269, –767, 1411, 1272, 1405	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	301, 310, 319, 328, 337, 346, 355, 364, 373, 397, 406, 415, 424, 433, 442, 451, 460, 469, 478, 487, 496, 530, 539, 548, 557, 566, 575, 584, 593, 602, 611, 620, 629, 653, 662, 671, 680, 689, 698, 707, 716, 725, 734, 743, 752, 786, 795, 804, 813, 822, 831, 840, 849, 858, 867, 876, 885, 909, 918, 927, 936, 945, 954, 963, 972, 981, 990, 999, 1008, 1042, 1051, 1060, 1069, 1078, 1087, 1096, 1105, 1114, 1123, 1132, 1141, 1165, 1174, 1183, 1192, 1201, 1210, 1219, 1228, 1237, 1246, 1255, 1264, 1298, 1307, 1316, 1325, 1334, 1343, 1352, 1361, 1370, 1379, 1388, 1397, 1421, 1430, 1439, 1448, 1457, 1466, 1475, 1484, 1493, 1502, 1511, 1520, 1554, 1563, 1572, 1581, 1590, 1599, 1608, 1617, 1626, 1635, 1644, 1653, 1677, 1686, 1695, 1704, 1713, 1722, 1731, 1740, 1749, 1758, 1767, 1776, 1810, 1819, 1828, 1837, 1846, 1855, 1864, 1873, 1882, 1891, 1900, 1909, 1933, 1942, 1951, 1960, 1969, 1978, 1987, 1996, 2005, 2014, 2023, 2032			
6	–2029, –2020, –2011, –2002, –	–998, –980, –	–1665, –	–1798, –

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1993, –1984, –1975, –1966, –1957, –1948, –1939, –1930, –1906, – 1897, –1888, –1879, –1870, –1861, –1852, –1843, –1834, –1825, – 1816, –1807, –1773, –1764, –1755, –1746, –1737, –1728, –1719, – 1710, –1701, –1692, –1683, –1674, –1650, –1641, –1632, –1623, – 1614, –1605, –1596, –1587, –1578, –1569, –1560, –1551, –1517, – 1508, –1499, –1490, –1481, –1472, –1463, –1454, –1445, –1436, – 1427, –1418, –1394, –1385, –1376, –1367, –1358, –1349, –1340, – 1331, –1322, –1313, –1304, –1295, –1261, –1252, –1243, –1234, – 1225, –1216, –1207, –1198, –1189, –1180, –1171, –1162, –1138, – 1129, –1120, –1111, –1102, –1093, –1084, –1075, –1066, –1057, – 1048, –1039, –1005, –996, –987, – 978, –969, –960, –951, –942, –933, –924, –915, –906, –882, –873, – 864, –855, –846, –837, –828, –819, –810, –801, –792, –783, –749, – 740, –731, –722, –713, –704, –695, –686, –677, –668, –659, –650, – 626, –617, –608, –599, –590, –581, –572, –563, –554, –545, –536, – 527, –493, –484, –475, –466, –457, –448, –439, –430, –421, –412, –	962, –944, – 926, –908, – 875, –857, – 839, –821, – 803, –785, – 742, –724, – 706, –688, – 670, –652, – 619, –601, – 583, –565, – 547, –529, 1050, 1068, 1086, 1104, 1122, 1140, 1173, 1191, 1209, 1227, 1245, 1263, 1306, 1324, 1342, 1360, 1378, 1396, 1429, 1447, 1465, 1483, 1501, 1519	1543, –641, 250, 505, 1274, –1153, –519, –129, 762, 1529, 1786, –1791, –1410, –900, –502, –893, – 762, –1784, – 1530, –760, 133, 518, 1157, –1272, –506, –248, 645, 1542, 1669, –1921, –1268, –766, 1412, 1155, 1286	774, 383, 1407, – 1286, –262, 895, 1919, – 1915, –891, 264, 1288, – 1403, –379, 776, 1800

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	403, –394, –370, –361, –352, –343, –334, –325, –316, –307, –298, – 289, –280, –271, –237, –228, –219, –210, –201, –192, –183, –174, – 165, –156, –147, –138, –114, –105, –96, –87, –78, –69, –60, –51, –42, –33, –24, –15, 19, 28, 37, 46, 55, 64, 73, 82, 91, 100, 109, 118, 142, 151, 160, 169, 178, 187, 196, 205, 214, 223, 232, 241, 275, 284, 293, 302, 311, 320, 329, 338, 347, 356, 365, 374, 398, 407, 416, 425, 434, 443, 452, 461, 470, 479, 488, 497, 531, 540, 549, 558, 567, 576, 585, 594, 603, 612, 621, 630, 654, 663, 672, 681, 690, 699, 708, 717, 726, 735, 744, 753, 787, 796, 805, 814, 823, 832, 841, 850, 859, 868, 877, 886, 910, 919, 928, 937, 946, 955, 964, 973, 982, 991, 1000, 1009, 1043, 1052, 1061, 1070, 1079, 1088, 1097, 1106, 1115, 1124, 1133, 1142, 1166, 1175, 1184, 1193, 1202, 1211, 1220, 1229, 1238, 1247, 1256, 1265, 1299, 1308, 1317, 1326, 1335, 1344, 1353, 1362, 1371, 1380, 1389, 1398, 1422, 1431, 1440, 1449, 1458, 1467, 1476, 1485, 1494, 1503, 1512, 1521, 1555, 1564, 1573, 1582, 1591, 1600, 1609,			

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1618, 1627, 1636, 1645, 1654, 1678, 1687, 1696, 1705, 1714, 1723, 1732, 1741, 1750, 1759, 1768, 1777, 1811, 1820, 1829, 1838, 1847, 1856, 1865, 1874, 1883, 1892, 1901, 1910, 1934, 1943, 1952, 1961, 1970, 1979, 1988, 1997, 2006, 2015, 2024, 2033			
7	-2028, -2019, -2010, -2001, - 1992, -1983, -1974, -1965, -1956, -1947, -1938, -1929, -1905, - 1896, -1887, -1878, -1869, -1860, -1851, -1842, -1833, -1824, - 1815, -1806, -1772, -1763, -1754, -1745, -1736, -1727, -1718, - 1709, -1700, -1691, -1682, -1673, -1649, -1640, -1631, -1622, - 1613, -1604, -1595, -1586, -1577, -1568, -1559, -1550, -1516, - 1507, -1498, -1489, -1480, -1471, -1462, -1453, -1444, -1435, - 1426, -1417, -1393, -1384, -1375, -1366, -1357, -1348, -1339, - 1330, -1321, -1312, -1303, -1294, -1260, -1251, -1242, -1233, - 1224, -1215, -1206, -1197, -1188, -1179, -1170, -1161, -1137, - 1128, -1119, -1110, -1101, -1092, -1083, -1074, -1065, -1056, - 1047, -1038, -1004, -995, -986, -	-495, -477, - 459, -441, - 423, -405, - 372, -354, - 336, -318, - 300, -282, - 239, -221, - 203, -185, - 167, -149, - 116, -98, - 80, -62, -44, -26, 1553, 1571, 1589, 1607, 1625, 1643, 1676, 1694, 1712, 1730, 1748, 1766, 1809, 1827, 1845, 1863, 1881, 1899, 1932, 1950, 1968,	-1664, - 1542, -640, 251, 506, 1275, -1152, -518, -128, 763, 1530, 1787, -1790, -1409, -899, -12, -264, - 131, -1783, - 1529, -759, 134, 519, 1158, -1271, -505, -247, 646, 1543, 1670, -1794, -1149, -757, 1413, 1784, 1917	-1797, - 773, 384, 1408, - 1285, -261, 896, 1920, - 1914, -890, 265, 1289, - 1402, -378, 777, 1801

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	977, –968, –959, –950, –941, –932, –923, –914, –905, –881, –872, –863, –854, –845, –836, –827, –818, –809, –800, –791, –782, –748, –739, –730, –721, –712, –703, –694, –685, –676, –667, –658, –649, –625, –616, –607, –598, –589, –580, –571, –562, –553, –544, –535, –526, –492, –483, –474, –465, –456, –447, –438, –429, –420, –411, –402, –393, –369, –360, –351, –342, –333, –324, –315, –306, –297, –288, –279, –270, –236, –227, –218, –209, –200, –191, –182, –173, –164, –155, –146, –137, –113, –104, –95, –86, –77, –68, –59, –50, –41, –32, –23, –14, 20, 29, 38, 47, 56, 65, 74, 83, 92, 101, 110, 119, 143, 152, 161, 170, 179, 188, 197, 206, 215, 224, 233, 242, 276, 285, 294, 303, 312, 321, 330, 339, 348, 357, 366, 375, 399, 408, 417, 426, 435, 444, 453, 462, 471, 480, 489, 498, 532, 541, 550, 559, 568, 577, 586, 595, 604, 613, 622, 631, 655, 664, 673, 682, 691, 700, 709, 718, 727, 736, 745, 754, 788, 797, 806, 815, 824, 833, 842, 851, 860, 869, 878, 887, 911, 920, 929, 938, 947, 956, 965, 974, 983, 992, 1001, 1010, 1044, 1053, 1062, 1071, 1080,	1986, 2004, 2022		

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1089, 1098, 1107, 1116, 1125, 1134, 1143, 1167, 1176, 1185, 1194, 1203, 1212, 1221, 1230, 1239, 1248, 1257, 1266, 1300, 1309, 1318, 1327, 1336, 1345, 1354, 1363, 1372, 1381, 1390, 1399, 1423, 1432, 1441, 1450, 1459, 1468, 1477, 1486, 1495, 1504, 1513, 1522, 1556, 1565, 1574, 1583, 1592, 1601, 1610, 1619, 1628, 1637, 1646, 1655, 1679, 1688, 1697, 1706, 1715, 1724, 1733, 1742, 1751, 1760, 1769, 1778, 1812, 1821, 1830, 1839, 1848, 1857, 1866, 1875, 1884, 1893, 1902, 1911, 1935, 1944, 1953, 1962, 1971, 1980, 1989, 1998, 2007, 2016, 2025, 2034			
8	–2027, –2018, –2009, –2000, – 1991, –1982, –1973, –1964, –1955, –1946, –1937, –1928, –1904, – 1895, –1886, –1877, –1868, –1859, –1850, –1841, –1832, –1823, – 1814, –1805, –1771, –1762, –1753, –1744, –1735, –1726, –1717, – 1708, –1699, –1690, –1681, –1672, –1648, –1639, –1630, –1621, – 1612, –1603, –1594, –1585, –1576, –1567, –1558, –1549, –1515, – 1506, –1497, –1488, –1479, –1470,	–486, –468, – 450, –432, – 414, –396, – 363, –345, – 327, –309, – 291, –273, – 230, –212, – 194, –176, – 158, –140, – 107, –89, – 71, –53, –35, –17, 1562,	–1663, – 1541, –639, 252, 507, 1276, –1151, –517, –127, 764, 1531, 1788, –1927, –1282, –898, 12, –381, – 250, –1782, – 1528, –758, 135, 520,	–1796, – 772, 385, 1409, – 1284, –260, 897, 1921, – 1913, –889, 266, 1290, – 1401, –377, 778, 1802

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	–1461, –1452, –1443, –1434, – 1425, –1416, –1392, –1383, –1374, –1365, –1356, –1347, –1338, – 1329, –1320, –1311, –1302, –1293, –1259, –1250, –1241, –1232, – 1223, –1214, –1205, –1196, –1187, –1178, –1169, –1160, –1136, – 1127, –1118, –1109, –1100, –1091, –1082, –1073, –1064, –1055, – 1046, –1037, –1003, –994, –985, – 976, –967, –958, –949, –940, –931, –922, –913, –904, –880, –871, – 862, –853, –844, –835, –826, –817, –808, –799, –790, –781, –747, – 738, –729, –720, –711, –702, –693, –684, –675, –666, –657, –648, – 624, –615, –606, –597, –588, –579, –570, –561, –552, –543, –534, – 525, –491, –482, –473, –464, –455, –446, –437, –428, –419, –410, – 401, –392, –368, –359, –350, –341, –332, –323, –314, –305, –296, – 287, –278, –269, –235, –226, –217, –208, –199, –190, –181, –172, – 163, –154, –145, –136, –112, –103, –94, –85, –76, –67, –58, –49, –40, –31, –22, –13, 21, 30, 39, 48, 57, 66, 75, 84, 93, 102, 111, 120, 144, 153, 162, 171, 180, 189, 198, 207, 216, 225, 234, 243, 277, 286, 295, 304, 313, 322, 331, 340, 349, 358,	1580, 1598, 1616, 1634, 1652, 1685, 1703, 1721, 1739, 1757, 1775, 1818, 1836, 1854, 1872, 1890, 1908, 1941, 1959, 1977, 1995, 2013, 2031	1159, –1270, –504, –246, 647, 1544, 1671, –1793, –1148, –756, 1414, 1667, 1798	

Identifier of a 484- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	367, 376, 400, 409, 418, 427, 436, 445, 454, 463, 472, 481, 490, 499, 533, 542, 551, 560, 569, 578, 587, 596, 605, 614, 623, 632, 656, 665, 674, 683, 692, 701, 710, 719, 728, 737, 746, 755, 789, 798, 807, 816, 825, 834, 843, 852, 861, 870, 879, 888, 912, 921, 930, 939, 948, 957, 966, 975, 984, 993, 1002, 1011, 1045, 1054, 1063, 1072, 1081, 1090, 1099, 1108, 1117, 1126, 1135, 1144, 1168, 1177, 1186, 1195, 1204, 1213, 1222, 1231, 1240, 1249, 1258, 1267, 1301, 1310, 1319, 1328, 1337, 1346, 1355, 1364, 1373, 1382, 1391, 1400, 1424, 1433, 1442, 1451, 1460, 1469, 1478, 1487, 1496, 1505, 1514, 1523, 1557, 1566, 1575, 1584, 1593, 1602, 1611, 1620, 1629, 1638, 1647, 1656, 1680, 1689, 1698, 1707, 1716, 1725, 1734, 1743, 1752, 1761, 1770, 1779, 1813, 1822, 1831, 1840, 1849, 1858, 1867, 1876, 1885, 1894, 1903, 1912, 1936, 1945, 1954, 1963, 1972, 1981, 1990, 1999, 2008, 2017, 2026, 2035			

[00390] For the first part of data subcarriers (384 data subcarriers) in the 484-tone DRU, as

shown in Table 45, the 384 data subcarriers include 192 high-frequency subcarriers (whose subcarrier indices are positive values) and 192 low-frequency subcarriers (whose subcarrier indices are negative values). If every 12 of the 384 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are 9, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 24 and 34.

[00391] As shown in Table 45, for identifiers 1 to 4, or 5 to 8, there is a fixed offset between indices of 384 data subcarriers (the first part) included in two 484-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 384 data subcarriers in a 484-tone DRU whose identifier is i ($i = 1$ to 3, or 5 to 7) all plus 1, to obtain indices of 384 data subcarriers in a 484-tone DRU whose identifier is $i + 1$. An offset between indices of 384 data subcarriers (the first part) in a 484-tone DRU whose identifier is 4 and indices of 384 data subcarriers in a 484-tone DRU whose identifier is 5 is 2.

[00392] The second part of data subcarriers (48 data subcarriers) in the 484-tone DRU includes 24 high-frequency subcarriers (whose subcarrier indices are positive values) and 24 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the second part (48 data subcarriers) are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 48 data subcarriers may be considered as eight groups, including four low-frequency groups and four high-frequency groups. An index of each data subcarrier in a low-frequency group is a negative value, and an index of each data subcarrier in a high-frequency group is a positive value. Absolute values of index differences between adjacent data subcarriers in a same group are 18, absolute values of index differences between data subcarriers in two adjacent low-frequency groups or two adjacent high-frequency groups are sequentially 33, 43, and 33, and absolute values of index differences between data subcarriers in a high-frequency group and a low-frequency group (an absolute value of a difference between a minimum index of all data subcarriers in a high-frequency group and a maximum index of all data subcarriers in a low-frequency group) are 1579.

[00393] In addition, indices of 48 data subcarriers in a second part of a 484-tone DRU whose identifier is i ($i = 1, 3, 5$, or 7) all plus 9, to obtain indices of 48 data subcarriers in a second part of a 484-tone DRU whose identifier is $i + 1$. Indices of 48 data subcarriers in a second part of a 484-tone DRU whose identifier is i ($i = 2, 4$, or 6) all plus 503, to obtain indices of 48 data subcarriers in a second part of a 484-tone DRU whose identifier is $i + 1$.

[00394] In addition to the 384 data subcarriers in the first part column and the 48 data subcarriers in the second part column of the foregoing table, each 484-tone DRU further includes

36 data subcarriers (the third part) and 16 pilot subcarriers. In some embodiments, 36 data subcarriers and 16 pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 45 shows an example, so that subcarriers included in the 484-tone DRU can be fully discrete.

[00395] As shown in Table 45, each 484-tone DRU includes 16 pilot subcarriers, including eight high-frequency subcarriers and eight low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00396] As shown in Table 42, a 484-tone DRU whose identifier is i ($i = 1$ to 8) may be considered as a combination of a 242-tone DRU whose identifier is i and a 242-tone DRU whose identifier is $i + 8$. In this way, subcarriers in the 484-tone DRU can be fully discrete. For example, data subcarriers in a 484-tone DRU whose identifier is 1 are a combination of data subcarriers in a 242-tone DRU whose identifier is 1 and data subcarriers in a 242-tone DRU whose identifier is 9 in Table 42. 16 pilot subcarriers in the 484-tone DRU whose identifier is 1 are a combination of eight pilot subcarriers in the 242-tone DRU whose identifier is 1 and eight pilot subcarriers in the 242-tone DRU whose identifier is 9 in Table 42. Correspondingly, Table 45 may also be simplified and represented as the following Table 46 based on Table 42.

Table 46

Identifier of a 484-tone DRU	Identifier of a 242-tone DRU
1	1, 9
2	2, 10
3	3, 11
4	4, 12
5	5, 13
6	6, 14
7	7, 15
8	8, 16

[00397] In addition, in this embodiment of this disclosure, the identifier of the 484-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 484-tone DRU. For example, an identifier of a 484-tone DRU having a lowest-frequency index -2035 is 1.

[00398] According to the design of the 484-tone DRU shown in Table 45 or Table 46 in this embodiment of this disclosure, compared with the continuous 484-tone RU in the 320 MHz

obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 4.33.

[00399] In this embodiment of this disclosure, an association between a 242-tone DRU and a 484-tone DRU in 320 MHz is described by using Table 46. It may be understood that the foregoing described manner of determining a 484-tone DRU based on a 242-tone DRU is merely an example, and subcarriers in the 484-tone DRU can be fully discrete. In another embodiment, the 484-tone DRU may alternatively be determined in another manner. This is not limited in this disclosure. Details are not described again.

[00400] In addition, with reference to the description of the 242-tone DRU in Table 43 or Table 44, it may be understood that the 484-tone DRU may alternatively be determined based on a 26-tone DRU or based on a 26-tone DRU and a 106-tone DRU (or a 52-tone DRU). For brevity, details are not described in this disclosure again. In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -2035, correspondingly the lowest-frequency index of the data subcarrier included in the 484-tone DRU also adaptively changes to another value.

[00401] In a tone plan solution of a DRU, the 320 MHz bandwidth includes four 996-tone DRUs, and each 996-tone DRU includes 980 data subcarriers and 16 pilot subcarriers. For example, Table 47 shows an example of four 996-tone DRUs corresponding to the 320 MHz bandwidth, and shows 980 data subcarriers and 16 pilot subcarriers included in each 996-tone DRU. The 980 data subcarriers may be considered as three parts. A first part of data subcarriers includes 768 data subcarriers, a second part of data subcarriers includes 96 data subcarriers, a third part of data subcarriers includes 132 data subcarriers, and a lowest-frequency index of a data subcarrier in a 996-tone DRU whose identifier is 1 is -2035. It should be understood that, although the data subcarriers are divided into the first part, the second part, and the third part in Table 47 and are separately listed, in this embodiment of this disclosure, the data subcarriers are presented as a plurality of parts only for ease of description, and are not actually used as division of data subcarriers included in each 996-tone DRU. During actual application, the data subcarriers include a combination of data subcarriers in three parts, and do not need to be distinguished. In other words, the first part, the second part, and the third part do not need to be distinguished, but are considered as a whole, namely, a data subcarrier index included in each 996-tone DRU.

Table 47

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
1	-2035, -2030, -2026, -2021, -2017, -2012, -2008, -2003, -1999, -1994, -1990, -1985, -1981, -1976, -1972, -1967, -1963, -1958, -1954, -1949, -1945, -1940, -1936, -1931, -1912, -1907, -1903, -1898, -1894, -1889, -1885, -1880, -1876, -1871, -1867, -1862, -1858, -1853, -1849, -1844, -1840, -1835, -1831, -1826, -1822, -1817, -1813, -1808, -1779, -1774, -1770, -1765, -1761, -1756, -1752, -1747, -1743, -1738, -1734, -1729, -1725, -1720, -1716, -1711, -1707, -1702, -1698, -1693, -1689, -1684, -1680, -1675, -1656, -1651, -1647, -1642, -1638, -1633, -1629, -1624, -1620, -1615, -1611, -1606, -1602, -1597, -1593, -1588, -1584, -1579, -1575, -1570, -1566, -1561, -1557, -1552, -1523, -1518, -1514, -1509, -1505, -1500, -1496, -1491, -1487, -1482, -1478, -1473, -1469, -1464, -1460, -1455, -1451, -1446, -1442, -1437, -1433, -1428, -1424, -1419, -1400, -1395, -1391, -1386, -1382, -1377, -1373, -1368, -1364, -1359, -1355, -1350, -1346, -1341, -1337, -1332, -1328, -1323, -1319, -1314, -1310, -1305, -1301, -1296, -1267,	-2031, - 2013, -1995, -1977, - 1959, -1941, -1908, - 1890, -1872, -1854, - 1836, -1818, -1775, - 1757, -1739, -1721, - 1703, -1685, -1652, - 1634, -1616, -1598, - 1580, -1562, -1007, -989, -971, -953, -935, -917, -884, -866, -848, -830, -812, -794, -751, -733, -715, -697, -679, -661, -628, -610, -592, -574, -556, -538, 17, 35, 53,	-1926, -1922, -1800, -1799, -1795, -1792, -1785, -1671, -1667, -1666, -1662, -1658, -1548, -1544, -1540, -1531, -1527, -1415, -1411, -1287, -1283, -1281, -1273, -1269, -1159, -1154, -1150, -1147, -1036, -901, - 897, -776, - 775, -771, - 767, -761, - 647, -643, - 642, -638, - 637, -524, - 520, -516, - 507, -503, - 501, -389, - 385, -263, - 259, -255, - 249, -135, - 130, -126, - 125, -121,	-1916, - 1804, - 1404 - 1292, - 892, - 780, - 380, - 268, 263, 377, 775, 889, 1287, 1401, 1799, 1913

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-1262, -1258, -1253, -1249, -1244, -1240, -1235, -1231, -1226, -1222, -1217, -1213, -1208, -1204, -1199, -1195, -1190, -1186, -1181, -1177, -1172, -1168, -1163, -1144, -1139, -1135, -1130, -1126, -1121, -1117, -1112, -1108, -1103, -1099, -1094, -1090, -1085, -1081, -1076, -1072, -1067, -1063, -1058, -1054, -1049, -1045, -1040, -1011, -1006, -1002, -997, -993, -988, -984, -979, -975, -970, -966, -961, -957, -952, -948, -943, -939, -934, -930, -925, -921, -916, -912, -907, -888, -883, -879, -874, -870, -865, -861, -856, -852, -847, -843, -838, -834, -829, -825, -820, -816, -811, -807, -802, -798, -793, -789, -784, -755, -750, -746, -741, -737, -732, -728, -723, -719, -714, -710, -705, -701, -696, -692, -687, -683, -678, -674, -669, -665, -660, -656, -651, -632, -627, -623, -618, -614, -609, -605, -600, -596, -591, -587, -582, -578, -573, -569, -564, -560, -555, -551, -546, -542, -537, -533, -528, -499, -494, -490, -485, -481, -476, -472, -467, -463, -458, -454, -449, -445, -440, -436, -431, -427, -422, -418, -413, -409, -404, -400, -395, -376, -371, -367, -362, -358, -353, -349, -344, -340, -	71, 89, 107, 140, 158, 176, 194, 212, 230, 273, 291, 309, 327, 345, 363, 396, 414, 432, 450, 468, 486, 1041, 1059, 1077, 1095, 1113, 1131, 1164, 1182, 1200, 1218, 1236, 1254, 1297, 1315, 1333, 1351, 1369, 1387, 1420, 1438, 1456, 1474, 1492, 1510	124, 132, 244, 248, 249, 253, 254, 258, 381, 382, 386, 388, 500, 504, 508, 517, 521, 523, 635, 639, 644, 756, 761, 765, 769, 894, 898, 899, 903, 1148, 1156, 1268, 1272, 1273, 1277, 1278, 1282, 1405, 1406, 1410, 1411, 1524, 1528, 1532, 1541, 1545, 1657, 1661, 1668, 1780, 1785, 1789, 1791, 1803, 1918, 1922, 1925, 2036	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	335, –331, –326, –322, –317, –313, –308, –304, –299, –295, –290, –286, –281, –277, –272, –243, –238, –234, –229, –225, –220, –216, –211, –207, –202, –198, –193, –189, –184, –180, –175, –171, –166, –162, –157, –153, –148, –144, –139, –120, –115, –111, –106, –102, –97, –93, –88, –84, –79, –75, –70, –66, –61, –57, –52, –48, –43, –39, –34, –30, –25, –21, –16, 13, 18, 22, 27, 31, 36, 40, 45, 49, 54, 58, 63, 67, 72, 76, 81, 85, 90, 94, 99, 103, 108, 112, 117, 136, 141, 145, 150, 154, 159, 163, 168, 172, 177, 181, 186, 190, 195, 199, 204, 208, 213, 217, 222, 226, 231, 235, 240, 269, 274, 278, 283, 287, 292, 296, 301, 305, 310, 314, 319, 323, 328, 332, 337, 341, 346, 350, 355, 359, 364, 368, 373, 392, 397, 401, 406, 410, 415, 419, 424, 428, 433, 437, 442, 446, 451, 455, 460, 464, 469, 473, 478, 482, 487, 491, 496, 525, 530, 534, 539, 543, 548, 552, 557, 561, 566, 570, 575, 579, 584, 588, 593, 597, 602, 606, 611, 615, 620, 624, 629, 648, 653, 657, 662, 666, 671, 675, 680, 684, 689, 693, 698, 702, 707, 711, 716, 720, 725, 729, 734, 738, 743, 747, 752, 781, 786, 790, 795, 799, 804, 808, 813, 817, 822,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	826, 831, 835, 840, 844, 849, 853, 858, 862, 867, 871, 876, 880, 885, 904, 909, 913, 918, 922, 927, 931, 936, 940, 945, 949, 954, 958, 963, 967, 972, 976, 981, 985, 990, 994, 999, 1003, 1008, 1037, 1042, 1046, 1051, 1055, 1060, 1064, 1069, 1073, 1078, 1082, 1087, 1091, 1096, 1100, 1105, 1109, 1114, 1118, 1123, 1127, 1132, 1136, 1141, 1160, 1165, 1169, 1174, 1178, 1183, 1187, 1192, 1196, 1201, 1205, 1210, 1214, 1219, 1223, 1228, 1232, 1237, 1241, 1246, 1250, 1255, 1259, 1264, 1293, 1298, 1302, 1307, 1311, 1316, 1320, 1325, 1329, 1334, 1338, 1343, 1347, 1352, 1356, 1361, 1365, 1370, 1374, 1379, 1383, 1388, 1392, 1397, 1416, 1421, 1425, 1430, 1434, 1439, 1443, 1448, 1452, 1457, 1461, 1466, 1470, 1475, 1479, 1484, 1488, 1493, 1497, 1502, 1506, 1511, 1515, 1520, 1549, 1554, 1558, 1563, 1567, 1572, 1576, 1581, 1585, 1590, 1594, 1599, 1603, 1608, 1612, 1617, 1621, 1626, 1630, 1635, 1639, 1644, 1648, 1653, 1672, 1677, 1681, 1686, 1690, 1695, 1699, 1704, 1708, 1713, 1717, 1722, 1726, 1731, 1735, 1740, 1744, 1749, 1753, 1758, 1762, 1767, 1771, 1776, 1805, 1810, 1814, 1819, 1823, 1828, 1832, 1837, 1841,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1846, 1850, 1855, 1859, 1864, 1868, 1873, 1877, 1882, 1886, 1891, 1895, 1900, 1904, 1909, 1928, 1933, 1937, 1942, 1946, 1951, 1955, 1960, 1964, 1969, 1973, 1978, 1982, 1987, 1991, 1996, 2000, 2005, 2009, 2014, 2018, 2023, 2027, 2032			
2	-2034, -2029, -2025, -2020, -2016, -2011, -2007, -2002, -1998, -1993, -1989, -1984, -1980, -1975, -1971, -1966, -1962, -1957, -1953, -1948, -1944, -1939, -1935, -1930, -1911, -1906, -1902, -1897, -1893, -1888, -1884, -1879, -1875, -1870, -1866, -1861, -1857, -1852, -1848, -1843, -1839, -1834, -1830, -1825, -1821, -1816, -1812, -1807, -1778, -1773, -1769, -1764, -1760, -1755, -1751, -1746, -1742, -1737, -1733, -1728, -1724, -1719, -1715, -1710, -1706, -1701, -1697, -1692, -1688, -1683, -1679, -1674, -1655, -1650, -1646, -1641, -1637, -1632, -1628, -1623, -1619, -1614, -1610, -1605, -1601, -1596, -1592, -1587, -1583, -1578, -1574, -1569, -1565, -1560, -1556, -1551, -1522, -1517, -1513, -1508, -1504, -1499, -1495, -1490, -1486, -1481, -1477, -1472, -1468, -1463, -1459, -1454, -1450, -1445, -1441, -1436, -1432, -1427, -1423, -1418,	-2022, -2004, -1986, -1968, -1950, -1932, -1899, -1881, -1863, -1845, -1827, -1809, -1766, -1748, -1730, -1712, -1694, -1676, -1643, -1625, -1607, -1589, -1571, -1553, -998, -980, -962, -944, -926, -908, -875, -857, -839, -821, -803, -785, -742, -724, -706, -688,	-1925, -1921, -1917, -1915, -1798, -1791, -1789, -1786, -1784, -1670, -1665, -1661, -1657, -1547, -1543, -1539, -1530, -1526, -1414, -1410, -1403, -1286, -1280, -1277, -1272, -1268, -1158, -1153, -1146, -1012, -900, -893, -891, -774, -770, -766, -765, -762, -760, -646, -641, -636, -523, -519, -515, -506, -502, -500, -	-1920, -1803, -1408, -1291, -896, -779, -384, -267, -259, 378, 771, 890, 1283, 1402, 1795, 1914

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-1399, -1394, -1390, -1385, -1381, -1376, -1372, -1367, -1363, -1358, -1354, -1349, -1345, -1340, -1336, -1331, -1327, -1322, -1318, -1313, -1309, -1304, -1300, -1295, -1266, -1261, -1257, -1252, -1248, -1243, -1239, -1234, -1230, -1225, -1221, -1216, -1212, -1207, -1203, -1198, -1194, -1189, -1185, -1180, -1176, - 1171, -1167, -1162, -1143, -1138, - 1134, -1129, -1125, -1120, -1116, - 1111, -1107, -1102, -1098, -1093, - 1089, -1084, -1080, -1075, -1071, - 1066, -1062, -1057, -1053, -1048, - 1044, -1039, -1010, -1005, -1001, - 996, -992, -987, -983, -978, -974, - 969, -965, -960, -956, -951, -947, - 942, -938, -933, -929, -924, -920, - 915, -911, -906, -887, -882, -878, - 873, -869, -864, -860, -855, -851, - 846, -842, -837, -833, -828, -824, - 819, -815, -810, -806, -801, -797, - 792, -788, -783, -754, -749, -745, - 740, -736, -731, -727, -722, -718, - 713, -709, -704, -700, -695, -691, - 686, -682, -677, -673, -668, -664, - 659, -655, -650, -631, -626, -622, - 617, -613, -608, -604, -599, -595, - 590, -586, -581, -577, -572, -568, - 563, -559, -554, -550, -545, -541, - 536, -532, -527, -498, -493, -489, -	-670, -652, -619, -601, -583, -565, -547, -529, 26, 44, 62, 80, 98, 116, 149, 167, 185, 203, 221, 239, 282, 300, 318, 336, 354, 372, 405, 423, 441, 459, 477, 495, 1050, 1068, 1086, 1104, 1122, 1140, 1173, 1191, 1209, 1227, 1245, 1263, 1306, 1324, 1342, 1360, 1378, 1396, 1429, 1447, 1465, 1483, 1501, 1519	388, -379, - 262, -258, - 254, -253, - 248, -134, - 129, -124, 121, 125, 128, 131, 133, 245, 250, 255, 262, 264, 267, 383, 389, 501, 505, 509, 518, 522, 524, 636, 640, 645, 757, 762, 766, 770, 776, 895, 900, 1012, 1149, 1152, 1155, 1157, 1269, 1274, 1279, 1286, 1288, 1291, 1407, 1412, 1525, 1529, 1533, 1542, 1546, 1658, 1662, 1664, 1669, 1781, 1786, 1792, 1800, 1804, 1919, 1926	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	484, –480, –475, –471, –466, –462, – 457, –453, –448, –444, –439, –435, – 430, –426, –421, –417, –412, –408, – 403, –399, –394, –375, –370, –366, – 361, –357, –352, –348, –343, –339, – 334, –330, –325, –321, –316, –312, – 307, –303, –298, –294, –289, –285, – 280, –276, –271, –242, –237, –233, – 228, –224, –219, –215, –210, –206, – 201, –197, –192, –188, –183, –179, – 174, –170, –165, –161, –156, –152, – 147, –143, –138, –119, –114, –110, – 105, –101, –96, –92, –87, –83, –78, – 74, –69, –65, –60, –56, –51, –47, –42, –38, –33, –29, –24, –20, –15, 14, 19, 23, 28, 32, 37, 41, 46, 50, 55, 59, 64, 68, 73, 77, 82, 86, 91, 95, 100, 104, 109, 113, 118, 137, 142, 146, 151, 155, 160, 164, 169, 173, 178, 182, 187, 191, 196, 200, 205, 209, 214, 218, 223, 227, 232, 236, 241, 270, 275, 279, 284, 288, 293, 297, 302, 306, 311, 315, 320, 324, 329, 333, 338, 342, 347, 351, 356, 360, 365, 369, 374, 393, 398, 402, 407, 411, 416, 420, 425, 429, 434, 438, 443, 447, 452, 456, 461, 465, 470, 474, 479, 483, 488, 492, 497, 526, 531, 535, 540, 544, 549, 553, 558, 562, 567, 571, 576, 580, 585, 589, 594, 598, 603, 607, 612, 616, 621, 625,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	630, 649, 654, 658, 663, 667, 672, 676, 681, 685, 690, 694, 699, 703, 708, 712, 717, 721, 726, 730, 735, 739, 744, 748, 753, 782, 787, 791, 796, 800, 805, 809, 814, 818, 823, 827, 832, 836, 841, 845, 850, 854, 859, 863, 868, 872, 877, 881, 886, 905, 910, 914, 919, 923, 928, 932, 937, 941, 946, 950, 955, 959, 964, 968, 973, 977, 982, 986, 991, 995, 1000, 1004, 1009, 1038, 1043, 1047, 1052, 1056, 1061, 1065, 1070, 1074, 1079, 1083, 1088, 1092, 1097, 1101, 1106, 1110, 1115, 1119, 1124, 1128, 1133, 1137, 1142, 1161, 1166, 1170, 1175, 1179, 1184, 1188, 1193, 1197, 1202, 1206, 1211, 1215, 1220, 1224, 1229, 1233, 1238, 1242, 1247, 1251, 1256, 1260, 1265, 1294, 1299, 1303, 1308, 1312, 1317, 1321, 1326, 1330, 1335, 1339, 1344, 1348, 1353, 1357, 1362, 1366, 1371, 1375, 1380, 1384, 1389, 1393, 1398, 1417, 1422, 1426, 1431, 1435, 1440, 1444, 1449, 1453, 1458, 1462, 1467, 1471, 1476, 1480, 1485, 1489, 1494, 1498, 1503, 1507, 1512, 1516, 1521, 1550, 1555, 1559, 1564, 1568, 1573, 1577, 1582, 1586, 1591, 1595, 1600, 1604, 1609, 1613, 1618, 1622, 1627, 1631, 1636, 1640, 1645, 1649, 1654, 1673, 1678, 1682,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1687, 1691, 1696, 1700, 1705, 1709, 1714, 1718, 1723, 1727, 1732, 1736, 1741, 1745, 1750, 1754, 1759, 1763, 1768, 1772, 1777, 1806, 1811, 1815, 1820, 1824, 1829, 1833, 1838, 1842, 1847, 1851, 1856, 1860, 1865, 1869, 1874, 1878, 1883, 1887, 1892, 1896, 1901, 1905, 1910, 1929, 1934, 1938, 1943, 1947, 1952, 1956, 1961, 1965, 1970, 1974, 1979, 1983, 1988, 1992, 1997, 2001, 2006, 2010, 2015, 2019, 2024, 2028, 2033			
3	-2033, -2028, -2024, -2019, -2015, -2010, -2006, -2001, -1997, -1992, -1988, -1983, -1979, -1974, -1970, -1965, -1961, -1956, -1952, -1947, -1943, -1938, -1934, -1929, -1910, -1905, -1901, -1896, -1892, -1887, -1883, -1878, -1874, -1869, -1865, -1860, -1856, -1851, -1847, -1842, -1838, -1833, -1829, -1824, -1820, -1815, -1811, -1806, -1777, -1772, -1768, -1763, -1759, -1754, -1750, -1745, -1741, -1736, -1732, -1727, -1723, -1718, -1714, -1709, -1705, -1700, -1696, -1691, -1687, -1682, -1678, -1673, -1654, -1649, -1645, -1640, -1636, -1631, -1627, -1622, -1618, -1613, -1609, -1604, -1600, -1595, -1591, -1586, -1582, -1577, -1573, -1568, -1564, -1559, -1555,	-1519, -1501, -1483, -1465, -1447, -1429, -1396, -1378, -1360, -1342, -1324, -1306, -1263, -1245, -1227, -1209, -1191, -1173, -1140, -1122, -1104, -1086, -1068, -1050, -495, -477, -459, -441, -423, -405,	-1924, -1914, -1797, -1794, -1790, -1788, -1783, -1781, -1669, -1664, -1660, -1546, -1542, -1533, -1529, -1525, -1413, -1409, -1402, -1288, -1285, -1279, -1276, -1271, -1157, -1155, -1152, -1149, -1145, -903, -899, -890, -773, -769, -764, -759, -757, -645, -	-1919, -1802, -1407, -1290, -895, -778, -383, -266, 260, 379, 772, 891, 1284, 1403, 1796, 1915

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-1550, -1521, -1516, -1512, -1507, -1503, -1498, -1494, -1489, -1485, -1480, -1476, -1471, -1467, -1462, -1458, -1453, -1449, -1444, -1440, -1435, -1431, -1426, -1422, -1417, -1398, -1393, -1389, -1384, -1380, -1375, -1371, -1366, -1362, -1357, -1353, -1348, -1344, -1339, -1335, -1330, -1326, -1321, -1317, -1312, -1308, -1303, -1299, -1294, -1265, -1260, -1256, -1251, -1247, -1242, -1238, -1233, -1229, -1224, -1220, -1215, -1211, -1206, -1202, -1197, -1193, -1188, -1184, -1179, -1175, - 1170, -1166, -1161, -1142, -1137, - 1133, -1128, -1124, -1119, -1115, - 1110, -1106, -1101, -1097, -1092, - 1088, -1083, -1079, -1074, -1070, - 1065, -1061, -1056, -1052, -1047, - 1043, -1038, -1009, -1004, -1000, - 995, -991, -986, -982, -977, -973, - 968, -964, -959, -955, -950, -946, - 941, -937, -932, -928, -923, -919, - 914, -910, -905, -886, -881, -877, - 872, -868, -863, -859, -854, -850, - 845, -841, -836, -832, -827, -823, - 818, -814, -809, -805, -800, -796, - 791, -787, -782, -753, -748, -744, - 739, -735, -730, -726, -721, -717, - 712, -708, -703, -699, -694, -690, - 685, -681, -676, -672, -667, -663, -	-372, -354, -336, -318, -300, -282, -239, -221, -203, -185, -167, -149, -116, -98, - 80, -62, -44, -26, 529, 547, 565, 583, 601, 619, 652, 670, 688, 706, 724, 742, 785, 803, 821, 839, 857, 875, 908, 926, 944, 962, 980, 998, 1553, 1571, 1589, 1607, 1625, 1643, 1676, 1694, 1712, 1730, 1748, 1766, 1809, 1827, 1845, 1863, 1881, 1899, 1932, 1950, 1968,	640, -635, - 522, -518, - 509, -505, - 391, -387, - 378, -264, - 261, -257, - 252, -247, - 245, -133, - 131, -128, - 123, -12, 122, 126, 129, 134, 246, 251, 256, 265, 268, 384, 390, 502, 506, 515, 519, 633, 637, 641, 646, 758, 760, 763, 767, 777, 779, 893, 896, 901, 1036, 1145, 1150, 1153, 1158, 1270, 1275, 1280, 1289, 1292, 1408, 1413, 1526, 1530, 1539, 1543, 1547, 1659, 1663, 1665, 1670, 1782, 1784, 1787,	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	658, –654, –649, –630, –625, –621, – 616, –612, –607, –603, –598, –594, – 589, –585, –580, –576, –571, –567, – 562, –558, –553, –549, –544, –540, – 535, –531, –526, –497, –492, –488, – 483, –479, –474, –470, –465, –461, – 456, –452, –447, –443, –438, –434, – 429, –425, –420, –416, –411, –407, – 402, –398, –393, –374, –369, –365, – 360, –356, –351, –347, –342, –338, – 333, –329, –324, –320, –315, –311, – 306, –302, –297, –293, –288, –284, – 279, –275, –270, –241, –236, –232, – 227, –223, –218, –214, –209, –205, – 200, –196, –191, –187, –182, –178, – 173, –169, –164, –160, –155, –151, – 146, –142, –137, –118, –113, –109, – 104, –100, –95, –91, –86, –82, –77, – 73, –68, –64, –59, –55, –50, –46, –41, –37, –32, –28, –23, –19, –14, 15, 20, 24, 29, 33, 38, 42, 47, 51, 56, 60, 65, 69, 74, 78, 83, 87, 92, 96, 101, 105, 110, 114, 119, 138, 143, 147, 152, 156, 161, 165, 170, 174, 179, 183, 188, 192, 197, 201, 206, 210, 215, 219, 224, 228, 233, 237, 242, 271, 276, 280, 285, 289, 294, 298, 303, 307, 312, 316, 321, 325, 330, 334, 339, 343, 348, 352, 357, 361, 366, 370, 375, 394, 399, 403, 408, 412, 417, 421, 426, 430, 435, 439, 444,	1986, 2004, 2022	1793, 1801, 1917, 1920, 1923, 1927	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	448, 453, 457, 462, 466, 471, 475, 480, 484, 489, 493, 498, 527, 532, 536, 541, 545, 550, 554, 559, 563, 568, 572, 577, 581, 586, 590, 595, 599, 604, 608, 613, 617, 622, 626, 631, 650, 655, 659, 664, 668, 673, 677, 682, 686, 691, 695, 700, 704, 709, 713, 718, 722, 727, 731, 736, 740, 745, 749, 754, 783, 788, 792, 797, 801, 806, 810, 815, 819, 824, 828, 833, 837, 842, 846, 851, 855, 860, 864, 869, 873, 878, 882, 887, 906, 911, 915, 920, 924, 929, 933, 938, 942, 947, 951, 956, 960, 965, 969, 974, 978, 983, 987, 992, 996, 1001, 1005, 1010, 1039, 1044, 1048, 1053, 1057, 1062, 1066, 1071, 1075, 1080, 1084, 1089, 1093, 1098, 1102, 1107, 1111, 1116, 1120, 1125, 1129, 1134, 1138, 1143, 1162, 1167, 1171, 1176, 1180, 1185, 1189, 1194, 1198, 1203, 1207, 1212, 1216, 1221, 1225, 1230, 1234, 1239, 1243, 1248, 1252, 1257, 1261, 1266, 1295, 1300, 1304, 1309, 1313, 1318, 1322, 1327, 1331, 1336, 1340, 1345, 1349, 1354, 1358, 1363, 1367, 1372, 1376, 1381, 1385, 1390, 1394, 1399, 1418, 1423, 1427, 1432, 1436, 1441, 1445, 1450, 1454, 1459, 1463, 1468, 1472, 1477, 1481, 1486, 1490, 1495, 1499, 1504, 1508,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1513, 1517, 1522, 1551, 1556, 1560, 1565, 1569, 1574, 1578, 1583, 1587, 1592, 1596, 1601, 1605, 1610, 1614, 1619, 1623, 1628, 1632, 1637, 1641, 1646, 1650, 1655, 1674, 1679, 1683, 1688, 1692, 1697, 1701, 1706, 1710, 1715, 1719, 1724, 1728, 1733, 1737, 1742, 1746, 1751, 1755, 1760, 1764, 1769, 1773, 1778, 1807, 1812, 1816, 1821, 1825, 1830, 1834, 1839, 1843, 1848, 1852, 1857, 1861, 1866, 1870, 1875, 1879, 1884, 1888, 1893, 1897, 1902, 1906, 1911, 1930, 1935, 1939, 1944, 1948, 1953, 1957, 1962, 1966, 1971, 1975, 1980, 1984, 1989, 1993, 1998, 2002, 2007, 2011, 2016, 2020, 2025, 2029, 2034			
4	-2032, -2027, -2023, -2018, -2014, -2009, -2005, -2000, -1996, -1991, -1987, -1982, -1978, -1973, -1969, -1964, -1960, -1955, -1951, -1946, -1942, -1937, -1933, -1928, -1909, -1904, -1900, -1895, -1891, -1886, -1882, -1877, -1873, -1868, -1864, -1859, -1855, -1850, -1846, -1841, -1837, -1832, -1828, -1823, -1819, -1814, -1810, -1805, -1776, -1771, -1767, -1762, -1758, -1753, -1749, -1744, -1740, -1735, -1731, -1726, -1722, -1717, -1713, -1708, -1704, -1699, -1695, -1690, -1686, -1681,	-1510, -1492, -1474, -1456, -1438, -1420, -1387, -1369, -1351, -1333, -1315, -1297, -1254, -1236, -1218, -1200, -1182, -1164, -1131, -1113, -1095,	-2036, -1927, -1923, -1913, -1796, -1793, -1787, -1782, -1780, -1668, -1663, -1659, -1545, -1541, -1532, -1528, -1524, -1412, -1405, -1401, -1284, -1282, -1278, -1275, -1274, -1270, -1156, -1151,	-1918, -1801, -1406, -1289, -894, -777, -382, 265, 261, 380, 773, 892, 1285, 1404, 1797, 1916

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	-1677, -1672, -1653, -1648, -1644, -1639, -1635, -1630, -1626, -1621, -1617, -1612, -1608, -1603, -1599, -1594, -1590, -1585, -1581, -1576, -1572, -1567, -1563, -1558, -1554, -1549, -1520, -1515, -1511, -1506, -1502, -1497, -1493, -1488, -1484, -1479, -1475, -1470, -1466, -1461, -1457, -1452, -1448, -1443, -1439, -1434, -1430, -1425, -1421, -1416, -1397, -1392, -1388, -1383, -1379, -1374, -1370, -1365, -1361, -1356, -1352, -1347, -1343, -1338, -1334, -1329, -1325, -1320, -1316, -1311, -1307, -1302, -1298, -1293, -1264, -1259, -1255, -1250, -1246, -1241, -1237, -1232, -1228, -1223, -1219, -1214, -1210, -1205, -1201, -1196, -1192, -1187, -1183, -1178, -1174, - 1169, -1165, -1160, -1141, -1136, - 1132, -1127, -1123, -1118, -1114, - 1109, -1105, -1100, -1096, -1091, - 1087, -1082, -1078, -1073, -1069, - 1064, -1060, -1055, -1051, -1046, - 1042, -1037, -1008, -1003, -999, - 994, -990, -985, -981, -976, -972, - 967, -963, -958, -954, -949, -945, - 940, -936, -931, -927, -922, -918, - 913, -909, -904, -885, -880, -876, - 871, -867, -862, -858, -853, -849, - 844, -840, -835, -831, -826, -822, -	-1077, - 1059, -1041, -486, -468, -450, -432, -414, -396, -363, -345, -327, -309, -291, -273, -230, -212, -194, -176, -158, -140, -107, -89, - 71, -53, -35, -17, 538, 556, 574, 592, 610, 628, 661, 679, 697, 715, 733, 751, 794, 812, 830, 848, 866, 884, 917, 935, 953, 971, 989, 1007, 1562, 1580, 1598, 1616, 1634, 1652, 1685, 1703, 1721, 1739, 1757,	-1148, -902, - 898, -889, - 772, -768, - 763, -758, - 756, -644, - 639, -634, - 633, -521, - 517, -508, - 504, -390, - 386, -381, - 377, -260, - 256, -251, - 250, -246, - 244, -132, - 127, -122, 12, 123, 127, 130, 135, 247, 252, 257, 266, 385, 387, 391, 503, 507, 516, 520, 634, 638, 642, 643, 647, 759, 764, 768, 774, 778, 780, 897, 902, 1146, 1147, 1151, 1154, 1159, 1271, 1276, 1281, 1290, 1409, 1414, 1415, 1527,	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	817, –813, –808, –804, –799, –795, –790, –786, –781, –752, –747, –743, –738, –734, –729, –725, –720, –716, –711, –707, –702, –698, –693, –689, –684, –680, –675, –671, –666, –662, –657, –653, –648, –629, –624, –620, –615, –611, –606, –602, –597, –593, –588, –584, –579, –575, –570, –566, –561, –557, –552, –548, –543, –539, –534, –530, –525, –496, –491, –487, –482, –478, –473, –469, –464, –460, –455, –451, –446, –442, –437, –433, –428, –424, –419, –415, –410, –406, –401, –397, –392, –373, –368, –364, –359, –355, –350, –346, –341, –337, –332, –328, –323, –319, –314, –310, –305, –301, –296, –292, –287, –283, –278, –274, –269, –240, –235, –231, –226, –222, –217, –213, –208, –204, –199, –195, –190, –186, –181, –177, –172, –168, –163, –159, –154, –150, –145, –141, –136, –117, –112, –108, –103, –99, –94, –90, –85, –81, –76, –72, –67, –63, –58, –54, –49, –45, –40, –36, –31, –27, –22, –18, –13, 16, 21, 25, 30, 34, 39, 43, 48, 52, 57, 61, 66, 70, 75, 79, 84, 88, 93, 97, 102, 106, 111, 115, 120, 139, 144, 148, 153, 157, 162, 166, 171, 175, 180, 184, 189, 193, 198, 202, 207, 211, 216, 220, 225, 229, 234, 238, 243, 272,	1775, 1818, 1836, 1854, 1872, 1890, 1908, 1941, 1959, 1977, 1995, 2013, 2031	1531, 1540, 1544, 1548, 1660, 1666, 1667, 1671, 1783, 1788, 1790, 1794, 1798, 1802, 1921, 1924	

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	277, 281, 286, 290, 295, 299, 304, 308, 313, 317, 322, 326, 331, 335, 340, 344, 349, 353, 358, 362, 367, 371, 376, 395, 400, 404, 409, 413, 418, 422, 427, 431, 436, 440, 445, 449, 454, 458, 463, 467, 472, 476, 481, 485, 490, 494, 499, 528, 533, 537, 542, 546, 551, 555, 560, 564, 569, 573, 578, 582, 587, 591, 596, 600, 605, 609, 614, 618, 623, 627, 632, 651, 656, 660, 665, 669, 674, 678, 683, 687, 692, 696, 701, 705, 710, 714, 719, 723, 728, 732, 737, 741, 746, 750, 755, 784, 789, 793, 798, 802, 807, 811, 816, 820, 825, 829, 834, 838, 843, 847, 852, 856, 861, 865, 870, 874, 879, 883, 888, 907, 912, 916, 921, 925, 930, 934, 939, 943, 948, 952, 957, 961, 966, 970, 975, 979, 984, 988, 993, 997, 1002, 1006, 1011, 1040, 1045, 1049, 1054, 1058, 1063, 1067, 1072, 1076, 1081, 1085, 1090, 1094, 1099, 1103, 1108, 1112, 1117, 1121, 1126, 1130, 1135, 1139, 1144, 1163, 1168, 1172, 1177, 1181, 1186, 1190, 1195, 1199, 1204, 1208, 1213, 1217, 1222, 1226, 1231, 1235, 1240, 1244, 1249, 1253, 1258, 1262, 1267, 1296, 1301, 1305, 1310, 1314, 1319, 1323, 1328, 1332, 1337, 1341, 1346, 1350, 1355, 1359,			

Identifier of a 996-tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part	Second part	Third part	
	1364, 1368, 1373, 1377, 1382, 1386, 1391, 1395, 1400, 1419, 1424, 1428, 1433, 1437, 1442, 1446, 1451, 1455, 1460, 1464, 1469, 1473, 1478, 1482, 1487, 1491, 1496, 1500, 1505, 1509, 1514, 1518, 1523, 1552, 1557, 1561, 1566, 1570, 1575, 1579, 1584, 1588, 1593, 1597, 1602, 1606, 1611, 1615, 1620, 1624, 1629, 1633, 1638, 1642, 1647, 1651, 1656, 1675, 1680, 1684, 1689, 1693, 1698, 1702, 1707, 1711, 1716, 1720, 1725, 1729, 1734, 1738, 1743, 1747, 1752, 1756, 1761, 1765, 1770, 1774, 1779, 1808, 1813, 1817, 1822, 1826, 1831, 1835, 1840, 1844, 1849, 1853, 1858, 1862, 1867, 1871, 1876, 1880, 1885, 1889, 1894, 1898, 1903, 1907, 1912, 1931, 1936, 1940, 1945, 1949, 1954, 1958, 1963, 1967, 1972, 1976, 1981, 1985, 1990, 1994, 1999, 2003, 2008, 2012, 2017, 2021, 2026, 2030, 2035			

[00402] For the first part of data subcarriers (768 data subcarriers) in the 996-tone DRU, as shown in Table 47, the 384 data subcarriers include 192 high-frequency subcarriers (whose subcarrier indices are positive values) and 192 low-frequency subcarriers (whose subcarrier indices are negative values). If every 24 of the 384 data subcarriers are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), absolute values of index differences between adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between data subcarriers in two adjacent groups are alternately 19 and 29.

[00403] In other words, for the 24 data subcarriers in the same group, an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in odd-numbered locations is 9, and an absolute value of an index difference between adjacent subcarriers of 12 data subcarriers in even-numbered locations is 9. An absolute value of an index difference between a data subcarrier in an even-numbered location and a previous adjacent data subcarrier is 5. Correspondingly, an absolute value of an index difference between a data subcarrier in an odd-numbered location and a previous adjacent data subcarrier is 4. In some embodiments, the 24 data subcarriers in the same group may be considered to include two sequences, for example, an odd-numbered location sequence and an even-numbered location sequence. An absolute value of an index difference between adjacent data subcarriers in each sequence is 9. For example, indices of the first 24 data subcarriers of the first part of data subcarriers of the 996-tone DRU whose identifier is 1 include -2035, -2030, -2026, -2021, -2017, -2012, -2008, -2003, -1999, -1994, -1990, -1985, -1981, -1976, -1972, -1967, -1963, -1958, -1954, -1949, -1945, -1940, -1936, and -1931, and may be represented as a combination of two sequences [-2035: 9: -1936] and [-2030: 9: -1931].

[00404] In other words, it is assumed that indices of 768 data subcarriers (the first part) included in each 996-tone DRU are sequentially arranged in a frequency direction and then divided into 32 groups, and each group includes 24 data subcarriers. Absolute values of index differences between 24 data subcarriers in a same group are alternately 5 and 4.

[00405] As shown in Table 47, there is a fixed offset between indices of 768 data subcarriers (the first part) included in two 996-tone DRUs having adjacent identifiers, and the fixed offset is 1. For example, indices of 768 data subcarriers in a 996-tone DRU whose identifier is i ($i = 1, 2$, or 3) all plus 1, to obtain indices of 768 data subcarriers in a 996-tone DRU whose identifier is $i + 1$.

[00406] The second part of data subcarriers (96 data subcarriers) in the 996-tone DRU includes 48 high-frequency subcarriers (whose subcarrier indices are positive values) and 48 low-frequency subcarriers (whose subcarrier indices are negative values). If every six data subcarriers of the second part (96 data subcarriers) are considered as one group in a frequency direction (for example, from low to high) (or understood as an ascending order of indices), the 96 data subcarriers may be considered as 16 groups. An absolute value of an index difference between adjacent data subcarriers in a same group is 18. In addition, absolute values of index differences between data subcarriers of two adjacent groups are sequentially 33, 43, 33, 55, and the like. In other words, in an ascending order of frequencies, an absolute value of an index difference between data subcarriers in an even-numbered group and a previous adjacent odd-numbered group is equal to 33. An absolute value of an index difference between data subcarriers in a $(4i + 1)^{\text{th}}$ group ($i = 1$,

2, or 3) and a previous $(4i)^{\text{th}}$ group is equal to 555. An absolute value of an index difference between data subcarriers in a $(4i - 1)^{\text{th}}$ group ($i = 1, 2, 3$, or 4) and a previous $(4i - 2)^{\text{th}}$ group is equal to 43.

[00407] In addition, indices of 96 data subcarriers in the second part of the 996-tone DRU whose identifier is i ($i = 1$ or 3) all plus 9, to obtain indices of 96 data subcarriers in the second part of the 996-tone DRU whose identifier is $i + 1$. Indices of 96 data subcarriers in the second part of the 996-tone DRU whose identifier is 2 all plus 503, to obtain indices of 96 data subcarriers in the second part of the 996-tone DRU whose identifier is 3.

[00408] In addition to the 768 data subcarriers in the first part column and the 96 data subcarriers in the second part column of the foregoing table, each 996-tone DRU further includes 132 data subcarriers (the third part) and 16 pilot subcarriers. In some embodiments, 132 data subcarriers and 16 pilot subcarriers may be separately selected from remaining subcarriers of all subcarriers of the entire bandwidth other than guard subcarriers, DC subcarriers, data subcarriers in the first part column, and data subcarriers in the second part column. A specific selection manner is not limited in this embodiment of this disclosure. For example, Table 47 shows an example, so that subcarriers included in the 996-tone DRU can be fully discrete.

[00409] As shown in Table 47, each 996-tone DRU includes 16 pilot subcarriers, including eight high-frequency subcarriers and eight low-frequency subcarriers. In this way, pilot subcarriers included in a same DRU can be fully discrete, thereby implementing frequency domain diversity.

[00410] Similar to the 242-tone DRU and the 484-tone DRU, the first part of data subcarriers of the 996-tone DRU may be considered as being obtained based on a 26-tone DRU or a 52-tone DRU, and the second part of data subcarriers of the 996-tone DRU may be considered as being obtained based on a 26-tone DRU. For brevity, as shown in Table 48, indices of the first part of data subcarriers included in the 996-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 37, and indices of the second part of data subcarriers included in the 996-tone DRU may be simplified and shown by using identifiers of 26-tone DRUs in Table 37.

Table 48

Identifier of a 996- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
1	1, 37, 73,	5, 41, 73,	−1926, −1922, −1800, −1799, −	−1916, −

Identifier of a 996- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
	109, 6, 42, 78, 114, 10, 46, 82, 118, 15, 51, 87, 123, 19, 55, 91, 127, 24, 60, 96, 132, 28, 64, 100, 136, 33, 69, 105, 141	113	1795, -1792, -1785, -1671, -1667, -1666, -1662, -1658, -1548, - 1544, -1540, -1531, -1527, -1415, -1411, -1287, -1283, -1281, - 1273, -1269, -1159, -1154, -1150, -1147, -1036, -901, -897, -776, - 775, -771, -767, -761, -647, -643, -642, -638, -637, -524, -520, - 516, -507, -503, -501, -389, -385, -263, -259, -255, -249, -135, - 130, -126, -125, -121, 124, 132, 244, 248, 249, 253, 254, 258, 381, 382, 386, 388, 500, 504, 508, 517, 521, 523, 635, 639, 644, 756, 761, 765, 769, 894, 898, 899, 903, 1148, 1156, 1268, 1272, 1273, 1277, 1278, 1282, 1405, 1406, 1410, 1411, 1524, 1528, 1532, 1541, 1545, 1657, 1661, 1668, 1780, 1785, 1789, 1791, 1803, 1918, 1922, 1925, 2036	1804, -1404 -1292, -892, -780, -380, -268, 263, 377, 775, 889, 1287, 1401, 1799, 1913
2	2, 38, 74, 110, 7, 43, 79, 115, 11, 47, 83, 119, 16, 52, 88, 124, 20, 56, 92, 128, 25, 61, 97, 133, 29, 65, 101, 137, 34,	14, 50, 86, 122	-1925, -1921, -1917, -1915, - 1798, -1791, -1789, -1786, -1784, -1670, -1665, -1661, -1657, - 1547, -1543, -1539, -1530, -1526, -1414, -1410, -1403, -1286, - 1280, -1277, -1272, -1268, -1158, -1153, -1146, -1012, -900, -893, - 891, -774, -770, -766, -765, -762, -760, -646, -641, -636, -523, -	-1920, - 1803, -1408, -1291, -896, -779, -384, -267, 259, 378, 771, 890, 1283, 1402, 1795, 1914

Identifier of a 996- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
	70, 106, 142		519, –515, –506, –502, –500, –388, –379, –262, –258, –254, –253, – 248, –134, –129, –124, 121, 125, 128, 131, 133, 245, 250, 255, 262, 264, 267, 383, 389, 501, 505, 509, 518, 522, 524, 636, 640, 645, 757, 762, 766, 770, 776, 895, 900, 1012, 1149, 1152, 1155, 1157, 1269, 1274, 1279, 1286, 1288, 1291, 1407, 1412, 1525, 1529, 1533, 1542, 1546, 1658, 1662, 1664, 1669, 1781, 1786, 1792, 1800, 1804, 1919, 1926	
3	3, 39, 75, 111, 8, 44, 80, 116, 12, 48, 84, 120, 17, 53, 89, 125, 21, 57, 93, 129, 26, 62, 98, 134, 30, 66, 102, 138, 35, 71, 107, 143	23, 59, 95, 131	–1924, –1914, –1797, –1794, – 1790, –1788, –1783, –1781, –1669, –1664, –1660, –1546, –1542, – 1533, –1529, –1525, –1413, –1409, –1402, –1288, –1285, –1279, – 1276, –1271, –1157, –1155, –1152, –1149, –1145, –903, –899, –890, – 773, –769, –764, –759, –757, –645, –640, –635, –522, –518, –509, – 505, –391, –387, –378, –264, –261, –257, –252, –247, –245, –133, – 131, –128, –123, –12, 122, 126, 129, 134, 246, 251, 256, 265, 268, 384, 390, 502, 506, 515, 519, 633, 637, 641, 646, 758, 760, 763, 767, 777, 779, 893, 896, 901, 1036, 1145, 1150, 1153, 1158, 1270,	–1919, – 1802, –1407, –1290, –895, –778, –383, –266, 260, 379, 772, 891, 1284, 1403, 1796, 1915

Identifier of a 996- tone DRU	Index of a data subcarrier			Index of a pilot subcarrier
	First part (identifier of a 26-tone DRU)	Second part (identifier of a 26-tone DRU)	Third part	
			1275, 1280, 1289, 1292, 1408, 1413, 1526, 1530, 1539, 1543, 1547, 1659, 1663, 1665, 1670, 1782, 1784, 1787, 1793, 1801, 1917, 1920, 1923, 1927	
4	4, 40, 76, 112, 9, 45, 81, 117, 13, 49, 85, 121, 18, 54, 90, 126, 22, 58, 94, 130, 27, 63, 99, 135, 31, 67, 103, 139, 36, 72, 108, 144	32, 68, 104, 140	–2036, –1927, –1923, –1913, – 1796, –1793, –1787, –1782, –1780, –1668, –1663, –1659, –1545, – 1541, –1532, –1528, –1524, –1412, –1405, –1401, –1284, –1282, – 1278, –1275, –1274, –1270, –1156, –1151, –1148, –902, –898, –889, – 772, –768, –763, –758, –756, –644, –639, –634, –633, –521, –517, – 508, –504, –390, –386, –381, –377, –260, –256, –251, –250, –246, – 244, –132, –127, –122, 12, 123, 127, 130, 135, 247, 252, 257, 266, 385, 387, 391, 503, 507, 516, 520, 634, 638, 642, 643, 647, 759, 764, 768, 774, 778, 780, 897, 902, 1146, 1147, 1151, 1154, 1159, 1271, 1276, 1281, 1290, 1409, 1414, 1415, 1527, 1531, 1540, 1544, 1548, 1660, 1666, 1667, 1671, 1783, 1788, 1790, 1794, 1798, 1802, 1921, 1924	–1918, – 1801, –1406, –1289, –894, –777, –382, –265, 261, 380, 773, 892, 1285, 1404, 1797, 1916

[00411] In Table 48, the "first part" column means that the first part of (768) data subcarriers in the 996-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For

example, a 996-tone DRU whose identifier is 1 is used as an example. The first part of 768 data subcarriers included in the 996-tone DRU include all data subcarriers in 32 26-tone DRUs whose identifiers are 1, 37, 73, 109, 6, 42, 78, 114, 10, 46, 82, 118, 13, 49, 85, 121, 19, 55, 91, 127, 24, 60, 96, 132, 28, 64, 100, 136, 33, 69, 105, and 141 shown in Table 37. Similarly, the "second part" column means that the second part of (96) data subcarriers in the 996-tone DRU include a combination of data subcarriers in corresponding 26-tone DRUs. For example, a 996-tone DRU whose identifier is 1 is used as an example. 96 data subcarriers in the second part included in the 996-tone DRU include all data subcarriers in four 26-tone DRUs whose identifiers are 5, 41, 73, and 113 shown in Table 37.

[00412] For example, the 16 pilot subcarriers included in the 996-tone DRU may be a part of a set of 72 pilot subcarriers included in the corresponding 36 26-tone DRUs. Alternatively, in some embodiments, the 16 pilot subcarriers included in the 996-tone DRU may be a part of a set of 64 pilot subcarriers included in the 32 26-tone DRUs in the corresponding first part. In addition, the other 132 data subcarriers (the third part) included in the 996-tone DRU may be selected from remaining subcarriers of all the subcarriers of the entire bandwidth other than the guard subcarriers, the DC subcarriers, the data subcarriers in the first part column, the data subcarriers in the second part column, and the pilot subcarriers, and the data subcarriers may be fully discrete.

[00413] As shown in Table 47 or Table 48, each 996-tone DRU includes 16 pilot subcarriers, and any two pilot subcarriers in a same DRU are not adjacent. The pilot subcarriers shown in Table 47 or Table 48 implement full discretization of pilot subcarriers in a same DRU, thereby implementing frequency domain diversity.

[00414] In addition, in this embodiment of this disclosure, the identifier of the 996-tone DRU may be based on a lowest-frequency index of a data subcarrier included in each 996-tone DRU. For example, an identifier of a 996-tone DRU having a lowest-frequency index -2035 is 1.

[00415] In addition, it should be noted that the 996-tone DRU in 320 MHz described with reference to Table 47 or Table 48 is merely an example. For example, 980 data subcarriers in the 996-tone DRU may alternatively be divided into a first part and a second part shown in Table 49 below in another manner. In Table 49, the "first part" column means that a first part of data subcarriers (936) in the 996-tone DRU include a combination of data subcarriers in corresponding 484-tone DRUs. For example, a 996-tone DRU whose identifier is 1 is used as an example. The first part of (936) data subcarriers included in the 996-tone DRU include all data subcarriers of 484-tone DRUs whose identifiers are 1 and 5 shown in Table 45.

Table 49

Identifier of a 996-tone DRU	Index of a data subcarrier		Index of a pilot subcarrier
	First part (identifier of a 484-tone DRU)	Second part	
1	1, 5	–1799, –1795, –1658, –1287, –1283, –1147, –775, –771, –501, –389, –385, –263, –259, –255, –125, –121, 124, 254, 258, 382, 386, 388, 523, 635, 639, 769, 894, 898, 899, 903, 1148, 1278, 1282, 1406, 1410, 1545, 1657, 1661, 1791, 1803, 1918, 1922, 1925, 2036	–1916, –1804, –1404 –1292, –892, –780, –380, –268, 263, 377, 775, 889, 1287, 1401, 1799, 1913
2	2, 6	–1915, –1798, –1661, –1657, –1403, –1286, –1146, –891, –774, –500, –388, –379, –262, –258, –254, –124, 121, 125, 255, 264, 267, 383, 389, 524, 636, 766, 770, 776, 895, 900, 1012, 1149, 1279, 1288, 1291, 1407, 1546, 1658, 1662, 1792, 1800, 1804, 1919, 1926	–1920, –1803, –1408, –1291, –896, –779, –384, –267, 259, 378, 771, 890, 1283, 1402, 1795, 1914
3	3, 7	–1914, –1797, –1660, –1525, –1402, –1285, –1145, –890, –773, –391, –387, –378, –261, –257, –245, –123, 122, 126, 256, 265, 268, 384, 390, 633, 637, 767, 777, 779, 896, 901, 1036, 1150, 1280, 1289, 1292, 1408, 1547, 1659, 1663, 1793, 1801, 1920, 1923, 1927	–1919, –1802, –1407, –1290, –895, –778, –383, –266, 260, 379, 772, 891, 1284, 1403, 1796, 1915
4	4, 8	–2036, –1913, –1796, –1659, –1524, –1401, –1284, –889, –772, –633, –390, –386, –377, –260, –256, –244, –122, 123, 127, 257, 266, 385, 387, 391, 634, 638, 768, 778, 780, 897, 902, 1147, 1151, 1281, 1290, 1409, 1415, 1548, 1660, 1790, 1794, 1802, 1921, 1924	–1918, –1801, –1406, –1289, –894, –777, –382, –265, 261, 380, 773, 892, 1285, 1404, 1797, 1916

[00416] In this way, for the 320 MHz bandwidth, through the design of the 996-tone DRU

shown in Table 47 to Table 49, compared with the continuous 996-tone RU in the 320 MHz obtained based on the 80 MHz in FIG. 3, at a same power spectral density, this embodiment of this disclosure can implement a maximum power amplification multiple, specifically, 2.6.

[00417] In this embodiment of this disclosure, an association between a 26-tone DRU (indirectly a 52-tone DRU) and a 996-tone DRU in 320 MHz is described by using Table 48. It may be understood that the foregoing described manner of determining a 996-tone DRU based on a 26-tone DRU is merely an example, and subcarriers in the 996-tone DRU can be fully discrete. In another embodiment, a 996-tone DRU may alternatively be determined in another manner based on a 26-tone DRU. This is not limited in this disclosure. Details are not described again.

[00418] In this embodiment of this disclosure, an association between a 484-tone DRU and a 996-tone DRU in 320 MHz is described by using Table 49. It may be understood that the foregoing described manner of determining a 996-tone DRU based on a 484-tone DRU is merely an example, and subcarriers in the 996-tone DRU can be fully discrete. In another embodiment, the 996-tone DRU may alternatively be determined in another manner. This is not limited in this disclosure. Details are not described again.

[00419] In addition, it may be understood that if the lowest-frequency index of the data subcarrier included in the 26-tone DRU is another value other than -2035 , correspondingly the lowest-frequency index of the data subcarrier included in the 996-tone DRU also adaptively changes to another value.

[00420] Tone plans of 26-tone DRUs, 52-tone DRUs, 106-tone DRUs, 242-tone DRUs, 484-tone DRUs, and 996-tone DRUs in 320 MHz are separately described above with reference to Table 37 to Table 49. An index -2035 is used as a lowest-frequency index of a data subcarrier.

[00421] The foregoing content describes in detail subcarriers (data subcarriers and pilot subcarriers) separately included in different DRUs in the 320 MHz bandwidth. Further, for a characteristic followed by a tone plan of the DRUs in the 320 MHz bandwidth and related description, refer to descriptions of the 40 MHz bandwidth. Details are not described again.

[00422] In some embodiments, data subcarriers included in the 26-tone DRU in 320 MHz may be obtained by shifting leftward by n_{11} , shifting rightward by n_{12} , shifting leftward by n_{21} , shifting rightward by n_{22} , shifting leftward by n_{31} , shifting rightward by n_{32} , shifting leftward by n_{41} , and shifting rightward by n_{42} based on Table 12. Alternatively, if $n_{11} = n_{12} = 128$, $n_{21} = n_{22} = 256$, and $n_{31} = n_{32} = 512$, data subcarriers included in the 26-tone DRU in 320 MHz may be obtained by shifting leftward by n_{41} and/or shifting rightward by n_{42} based on the 26-tone DRU in 160 MHz (Table 26). In an example of Table 37, $n_{41} = n_{42} = 1024$. However, n_{41} and n_{42} may alternatively be other values, and are not listed herein again.

[00423] Correspondingly, Table 37 may also be simplified and represented as the following

Table 50, where numbers in brackets {} are group numbers shown in Table 12, and include a combination of indices of subcarriers in the group numbers shown in Table 12, and may be understood as being obtained by shifting leftward/rightward by 512 based on Table 26.

Table 50

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
1	{1} – 1664, {1} – 1920	–1804, –1671
2	{2} – 1664, {2} – 1920	–1803, –1670
3	{3} – 1664, {3} – 1920	–1802, –1669
4	{4} – 1664, {4} – 1920	–1801, –1668
5	{5} – 1664, {5} – 1920	–1800, –1667
6	{6} – 1664, {6} – 1920	–1799, –1666
7	{7} – 1664, {7} – 1920	–1798, –1665
8	{8} – 1664, {8} – 1920	–1797, –1664
9	{9} – 1664, {9} – 1920	–1796, –1663
10	{10} – 1664, {10} – 1920	–1795, –1662
11	{11} – 1664, {11} – 1920	–1920, –1789
12	{12} – 1664, {12} – 1920	–1919, –1788
13	{13} – 1664, {13} – 1920	–1918, –1787
14	{14} – 1664, {14} – 1920	–1917, –1786
15	{15} – 1664, {15} – 1920	–1916, –1785
16	{16} – 1664, {16} – 1920	–1915, –1784
17	{17} – 1664, {17} – 1920	–1914, –1783
18	{18} – 1664, {18} – 1920	–1913, –1782
19	{1} – 1408, {1} – 1152	–1292, –1159
20	{2} – 1408, {2} – 1152	–1291, –1158
21	{3} – 1408, {3} – 1152	–1290, –1157
22	{4} – 1408, {4} – 1152	–1289, –1156
23	{5} – 1408, {5} – 1152	–1288, –1155
24	{6} – 1408, {6} – 1152	–1287, –1154
25	{7} – 1408, {7} – 1152	–1286, –1153
26	{8} – 1408, {8} – 1152	–1285, –1152
27	{9} – 1408, {9} – 1152	–1284, –1151
28	{10} – 1408, {10} – 1152	–1283, –1150

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
29	{11} – 1408, {11} – 1152	–1408, –1277
30	{12} – 1408, {12} – 1152	–1407, –1276
31	{13} – 1408, {13} – 1152	–1406, –1275
32	{14} – 1408, {14} – 1152	–1405, –1274
33	{15} – 1408, {15} – 1152	–1404, –1273
34	{16} – 1408, {16} – 1152	–1403, –1272
35	{17} – 1408, {17} – 1152	–1402, –1271
36	{18} – 1408, {18} – 1152	–1401, –1270
37	{1} – 640, {1} – 896	–780, –647
38	{2} – 640, {2} – 896	–779, –646
39	{3} – 640, {3} – 896	–778, –645
40	{4} – 640, {4} – 896	–777, –644
41	{5} – 640, {5} – 896	–776, –643
42	{6} – 640, {6} – 896	–775, –642
43	{7} – 640, {7} – 896	–774, –641
44	{8} – 640, {8} – 896	–773, –640
45	{9} – 640, {9} – 896	–772, –639
46	{10} – 640, {10} – 896	–771, –638
47	{11} – 640, {11} – 896	–896, –765
48	{12} – 640, {12} – 896	–895, –764
49	{13} – 640, {13} – 896	–894, –763
50	{14} – 640, {14} – 896	–893, –762
51	{15} – 640, {15} – 896	–892, –761
52	{16} – 640, {16} – 896	–891, –760
53	{17} – 640, {17} – 896	–890, –759
54	{18} – 640, {18} – 896	–889, –758
55	{1} – 384, {1} – 128	–268, –135
56	{2} – 384, {2} – 128	–267, –134
57	{3} – 384, {3} – 128	–266, –133
58	{4} – 384, {4} – 128	–265, –132
59	{5} – 384, {5} – 128	–264, –131
60	{6} – 384, {6} – 128	–263, –130
61	{7} – 384, {7} – 128	–262, –129

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
62	{8} – 384, {8} – 128	–261, –128
63	{9} – 384, {9} – 128	–260, –127
64	{10} – 384, {10} – 128	–259, –126
65	{11} – 384, {11} – 128	–384, –253
66	{12} – 384, {12} – 128	–383, –252
67	{13} – 384, {13} – 128	–382, –251
68	{14} – 384, {14} – 128	–381, –250
69	{15} – 384, {15} – 128	–380, –249
70	{16} – 384, {16} – 128	–379, –248
71	{17} – 384, {17} – 128	–378, –247
72	{18} – 384, {18} – 128	–377, –246
73	{1} + 128, {1} + 384	244, 377
74	{2} + 128, {2} + 384	245, 378
75	{3} + 128, {3} + 384	246, 379
76	{4} + 128, {4} + 384	247, 380
77	{5} + 128, {5} + 384	248, 381
78	{6} + 128, {6} + 384	249, 382
79	{7} + 128, {7} + 384	250, 383
80	{8} + 128, {8} + 384	251, 384
81	{9} + 128, {9} + 384	252, 385
82	{10} + 128, {10} + 384	253, 386
83	{11} + 128, {11} + 384	128, 259
84	{12} + 128, {12} + 384	129, 260
85	{13} + 128, {13} + 384	130, 261
86	{14} + 128, {14} + 384	131, 262
87	{15} + 128, {15} + 384	132, 263
88	{16} + 128, {16} + 384	133, 264
89	{17} + 128, {17} + 384	134, 265
90	{18} + 128, {18} + 384	135, 266
91	{1} + 640, {1} + 896	756, 889
92	{2} + 640, {2} + 896	757, 890
93	{3} + 640, {3} + 896	758, 891
94	{4} + 640, {4} + 896	759, 892

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
95	{5} + 640, {5} + 896	760, 893
96	{6} + 640, {6} + 896	761, 894
97	{7} + 640, {7} + 896	762, 895
98	{8} + 640, {8} + 896	763, 896
99	{9} + 640, {9} + 896	764, 897
100	{10} + 640, {10} + 896	765, 898
101	{11} + 640, {11} + 896	640, 771
102	{12} + 640, {12} + 896	641, 772
103	{13} + 640, {13} + 896	642, 773
104	{14} + 640, {14} + 896	643, 774
105	{15} + 640, {15} + 896	644, 775
106	{16} + 640, {16} + 896	645, 776
107	{17} + 640, {17} + 896	646, 777
108	{18} + 640, {18} + 896	647, 778
109	{1} + 1408, {1} + 1152	1268, 1401
110	{2} + 1408, {2} + 1152	1269, 1402
111	{3} + 1408, {3} + 1152	1270, 1403
112	{4} + 1408, {4} + 1152	1271, 1404
113	{5} + 1408, {5} + 1152	1272, 1405
114	{6} + 1408, {6} + 1152	1273, 1406
115	{7} + 1408, {7} + 1152	1274, 1407
116	{8} + 1408, {8} + 1152	1275, 1408
117	{9} + 1408, {9} + 1152	1276, 1409
118	{10} + 1408, {10} + 1152	1277, 1410
119	{11} + 1408, {11} + 1152	1152, 1283
120	{12} + 1408, {12} + 1152	1153, 1284
121	{13} + 1408, {13} + 1152	1154, 1285
122	{14} + 1408, {14} + 1152	1155, 1286
123	{15} + 1408, {15} + 1152	1156, 1287
124	{16} + 1408, {16} + 1152	1157, 1288
125	{17} + 1408, {17} + 1152	1158, 1289
126	{18} + 1408, {18} + 1152	1159, 1290
127	{1} + 1664, {1} + 1920	1780, 1913

Identifier of a 26-tone DRU	Index of a data subcarrier	Index of a pilot subcarrier
128	{2} + 1664, {2} + 1920	1781, 1914
129	{3} + 1664, {3} + 1920	1782, 1915
130	{4} + 1664, {4} + 1920	1783, 1916
131	{5} + 1664, {5} + 1920	1784, 1917
132	{6} + 1664, {6} + 1920	1785, 1918
133	{7} + 1664, {7} + 1920	1786, 1919
134	{8} + 1664, {8} + 1920	1787, 1920
135	{9} + 1664, {9} + 1920	1788, 1921
136	{10} + 1664, {10} + 1920	1789, 1922
137	{11} + 1664, {11} + 1920	1664, 1795
138	{12} + 1664, {12} + 1920	1665, 1796
139	{13} + 1664, {13} + 1920	1666, 1797
140	{14} + 1664, {14} + 1920	1667, 1798
141	{15} + 1664, {15} + 1920	1668, 1799
142	{16} + 1664, {16} + 1920	1669, 1800
143	{17} + 1664, {17} + 1920	1670, 1801
144	{18} + 1664, {18} + 1920	1671, 1802

[00424] It may be understood that, for the 52-tone DRU, the 106-tone DRU, the 242-tone DRU, the 484-tone DRU, and the 996-tone DRU in 320 MHz, with reference to the foregoing Table 39, Table 41, Table 43, Table 46, and Table 48, indices of data subcarriers (or the first part) included in the 52-tone DRU, the 106-tone DRU, the 242-tone DRU, the 484-tone DRU, and the 996-tone DRU may also be represented as variations based on Table 12. For brevity, the examples are not elaborated herein.

[00425] In addition, it may be understood that, although an embodiment of obtaining DRUs of various sizes in 320 MHz based on Table 12 is described, this disclosure is not limited thereto. For example, an index of a subcarrier included in each DRU may be determined without considering the grouping in Table 12. For example, an index of a subcarrier included in each DRU may be determined based on another grouping form. This is not limited in this disclosure.

[00426] In this embodiment of this disclosure, for each bandwidth, how subcarriers included in DRUs of different sizes are distributed is described. As described above, indices of subcarriers included in the DRUs are shown in the tables. In this manner, subcarriers included in a DRU can be fully discrete, and pilot subcarriers included in the DRU can also be fully discrete pairwise, thereby implementing frequency domain diversity. In addition, compared with an RU with

continuous subcarriers, the solution in this embodiment of this disclosure can implement a maximum power amplification multiple at a same power spectral density, thereby improving transmission efficiency.

[00427] It should be further understood that the descriptions of the foregoing content focus on emphasizing a difference between embodiments, and for the same or similar content of embodiments, refer to each other. For simplicity, details are not further described herein.

[00428] FIG. 8 is a schematic block diagram of a communication apparatus 800 according to an embodiment of this disclosure. The apparatus 800 may be implemented in a first device, or may be implemented as a chip or a chip system in a first device. The scope of this disclosure is not limited in this aspect.

[00429] As shown in FIG. 8, the apparatus 800 includes a receiving unit 810, a determining unit 820, and a sending unit 830. The determining unit 820 may alternatively be implemented as a processing unit. This is not limited in this disclosure. The receiving unit 810 is configured to receive a trigger-based frame from a second device, where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the communication apparatus. The determining unit 820 is configured to determine one or more distributed resource blocks based on the distributed resource unit indication information, where each of the one or more distributed resource blocks includes $N1$ data subcarriers and $N2$ pilot subcarriers, an absolute value of an index difference between every two data subcarriers of $N3$ data subcarriers in the $N1$ data subcarriers is greater than or equal to 4, $N1$, $N2$, and $N3$ are all positive integers, and $N2 < N3 \leq N1$. The sending unit 830 is configured to send a response to the trigger-based frame to the second device on the one or more distributed resource blocks.

[00430] In some embodiments, the sending unit 830 may be configured to send a TB PPDU.

[00431] FIG. 9 is another schematic block diagram of a communication apparatus 900 according to an embodiment of this disclosure. The apparatus 900 may be implemented in a second device, or may be implemented as a chip or a chip system in a second device. The scope of this disclosure is not limited in this aspect.

[00432] As shown in FIG. 9, the apparatus 900 may include a sending unit 910 and a receiving unit 920. The sending unit 910 is configured to send a trigger-based frame to a first device, where the trigger-based frame includes distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device. The receiving unit 920 is configured to receive a response to the trigger-based frame from the first device on one or more distributed resource blocks, where the one or more distributed resource blocks are determined based on the distributed resource unit

indication information, each of the one or more distributed resource blocks includes N1 data subcarriers and N2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N3 data subcarriers in the N1 data subcarriers is greater than or equal to 4, N1, N2, and N3 are all positive integers, and $N2 < N3 \leq N1$.

5 **[00433]** In some embodiments, the receiving unit 920 may be configured to receive a TB PPDU. In some embodiments, the sending unit 910 may be configured to send the trigger-based frame to the first device and at least one device other than the first device.

10 **[00434]** In some embodiments of this disclosure, the one or more distributed resource blocks may be determined from a predetermined quantity of distributed resource blocks, where the predetermined quantity of distributed resource blocks is predefined or preconfigured. In some embodiments, a specific value of the predetermined quantity is related to a bandwidth and a size of the distributed resource block.

15 **[00435]** If an operating bandwidth of the first device is 40 MHz, the predetermined quantity of distributed resource blocks includes 18 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 5 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 6 in the description of embodiments above. Details are not described herein again. The
20 predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 8 in the description of embodiments above. Details are not described herein again.

25 **[00436]** If an operating bandwidth of the first device is 80 MHz, the predetermined quantity of distributed resource blocks includes 36 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 16 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table
30 17 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 19 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed
35 resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included

in each DRU242 satisfies Table 21 in the description of embodiments above. Details are not described herein again.

[00437] If an operating bandwidth of the first device is 160 MHz, the predetermined quantity of distributed resource blocks includes 72 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 26 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 32 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 27 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 29 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included in each DRU242 satisfies Table 31 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU484 whose subcarrier quantity is 484, where an index of a subcarrier included in each DRU484 satisfies Table 34 in the description of embodiments above. Details are not described herein again.

[00438] If an operating bandwidth of the first device is 320 MHz, the predetermined quantity of distributed resource blocks includes 144 distributed resource blocks DRU26 whose subcarrier quantity is 26, where an index of a subcarrier included in each DRU26 satisfies Table 37 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 64 distributed resource blocks DRU52 whose subcarrier quantity is 52, where an index of a subcarrier included in each DRU52 satisfies Table 38 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 32 distributed resource blocks DRU106 whose subcarrier quantity is 106, where an index of a subcarrier included in each DRU106 satisfies Table 40 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes 16 distributed resource blocks DRU242 whose subcarrier quantity is 242, where an index of a subcarrier included in each DRU242 satisfies Table 42 in the description of embodiments above. Details are not described herein again. The predetermined quantity of distributed resource blocks includes eight distributed resource blocks DRU484 whose subcarrier quantity is 484, where an index of a subcarrier included in each DRU484 satisfies Table 45 in the description of embodiments above.

Details are not described herein again. The predetermined quantity of distributed resource blocks includes four distributed resource blocks DRU996 whose subcarrier quantity is 996, where an index of a subcarrier included in each DRU996 satisfies Table 47 in the description of embodiments above. Details are not described herein again.

5 **[00439]** It should be noted that the apparatus 800 in FIG. 8 can be configured to implement the processes of the first device in the foregoing method embodiments. For brevity, details are not described herein again. The apparatus 900 in FIG. 9 can be configured to implement the processes of the second device in the foregoing method embodiments. For brevity, details are not described herein again.

10 **[00440]** FIG. 10 is a schematic block diagram of an example device 1000 according to an embodiment of this disclosure. The device 1000 may be configured to implement the first device and the second device in the foregoing embodiments, for example, may be configured to implement the AP 60 and the STA 62. As shown in the figure, the device 1000 includes one or more processors 1010, one or more memories 1020 coupled to the processor 1010, and a
15 communication module 1040 coupled to the processor 1010.

[00441] The communication module 1040 may be configured to perform bidirectional communication. The communication module 1040 may have at least one communication interface for communication. The communication interface may include any interface necessary for communicating with another device.

20 **[00442]** The processor 1010 may be of any type suitable for a local technology network, and may include but is not limited to at least one of the following: one or more of a general-purpose computer, a dedicated computer, a microcontroller, a digital signal processor (Digital Signal Processor, DSP), or a controller-based multi-core controller architecture. The device 1000 may have a plurality of processors, such as application-specific integrated circuit chips, which in time
25 belong to a clock synchronized with a main processor.

[00443] The memory 1020 may include one or more nonvolatile memories and one or more volatile memories. An example of the nonvolatile memory includes but is not limited to at least one of the following: a read-only memory (Read-Only Memory, ROM) 1024, an erasable programmable read-only memory (Erasable Programmable Read Only Memory, EPROM), a flash
30 memory, a hard disk, a compact disc (Compact Disc, CD), a digital versatile disc (Digital Versatile Disc, DVD), or another magnetic storage and/or optical storage. An example of the volatile memory includes but is not limited to at least one of the following: a random access memory (RAM) 1022, or another volatile memory that does not last for power-off duration.

[00444] A computer program 1030 includes computer-executable instructions executed by the
35 associated processor 1010. The program 1030 may be stored in the ROM 1024. The processor

1010 may perform any suitable action and processing by loading the program 1030 into the RAM 1022.

[00445] Embodiments of this disclosure may be implemented by using the program 1030, so that the device 1000 may perform any process described with reference to FIG. 7. Embodiments of this disclosure may alternatively be implemented by using hardware or a combination of software and hardware.

[00446] In some embodiments, the program 1030 may be tangibly included in a computer-readable medium, and the computer-readable medium may be included in the device 1000 (for example, in the memory 1020) or another storage device that can be accessed by the device 1000.

The program 1030 may be loaded from the computer-readable medium into the RAM 1022 for execution. The computer-readable medium may include any type of tangible nonvolatile memory, such as a ROM, an EPROM, a flash memory, a hard disk, a CD, or a DVD.

[00447] In some embodiments, the communication module 1040 in the device 1000 may be implemented as a transmitter and a receiver (or a transceiver), and may be configured to send/receive system information, such as a management frame or an acknowledgment frame. In addition, the device 1000 may further include one or more of a scheduler, a controller, and a radio frequency/an antenna. Details are not described in this disclosure again.

[00448] In another implementation, the radio frequency/antenna may be disposed independent of the processor that performs baseband processing. For example, in a distributed scenario, the radio frequency/antenna may be separately disposed independent of the device 1000.

[00449] For example, the device 1000 in FIG. 10 may be implemented as the first device or the second device, or may be implemented as a chip or a chip system in the first device, or may be implemented as a chip or a chip system in the second device. This is not limited in this embodiment of this disclosure.

[00450] For example, the device 1000 in FIG. 10 may be implemented as the AP 60 or the STA 62, or may be implemented as a chip or a chip system in the AP 60, or may be implemented as a chip or a chip system in the STA 62. This is not limited in this embodiment of this disclosure.

[00451] An embodiment of this disclosure further provides a chip. The chip may include an input interface, an output interface, and a processing circuit. In this embodiment of this disclosure, the input interface and the output interface may complete the foregoing signaling or data interaction, and the processing circuit may complete generation and processing of signaling or data information.

[00452] An embodiment of this disclosure further provides a chip system. The chip system includes a processor, configured to support a first device or a second device in implementing a function in any one of the foregoing embodiments. In a possible design, the chip system may

further include a memory. The memory is configured to store necessary program instructions and data. When the processor runs the program instructions, a device on which the chip system is installed is enabled to perform the method in any one of the foregoing embodiments. The chip system may include a chip, or may include a chip and another discrete component.

5 **[00453]** An embodiment of this disclosure further provides a processor, configured to be coupled to a memory. The memory stores instructions. When the processor runs the instructions, the processor is enabled to perform the method and functions related to the first device or the second device in any one of the foregoing embodiments.

10 **[00454]** An embodiment of this application further provides a computer program product including instructions. When the computer program product runs on a computer, the computer is enabled to perform the method and functions related to the first device or the second device in any one of the foregoing embodiments.

15 **[00455]** An embodiment of this disclosure further provides a computer-readable storage medium. The computer-readable storage medium stores computer instructions. When a processor runs the instructions, the processor is enabled to perform the method and functions related to the first device or the second device in any one of the foregoing embodiments.

[00456] An embodiment of this disclosure further provides a wireless communication system. The system includes a first device and a second device. In some examples, the system may include an AP 60 and a STA 62.

20 **[00457]** Generally, various embodiments of this disclosure may be implemented by hardware or a dedicated circuit, software, logic, or any combination thereof. Some aspects may be implemented by hardware, and other aspects may be implemented by firmware or software, and may be performed by a controller, a microprocessor, or another computing device. Although aspects of embodiments of this disclosure are shown and illustrated as block diagrams, flowcharts, 25 or other diagrams, it should be understood that the blocks, apparatuses, systems, technologies, or methods described in this specification may be implemented as, for example, non-limiting examples, hardware, software, firmware, dedicated circuits, logic, general-purpose hardware, controllers, other computing devices, or a combination thereof.

30 **[00458]** This disclosure further provides at least one computer program product tangibly stored on a non-transitory computer-readable storage medium. The computer program product includes computer-executable instructions, such as instructions included in a program module. The instructions are executed in a device on a target real or virtual processor to perform the processes/methods described above. Generally, the program module includes a routine, a program, a library, an object, a class, a component, a data structure, and the like that execute a particular 35 task or implement a particular abstract data type. In various embodiments, functions of program

modules may be combined or a function of a program module may be split as needed. Machine-executable instructions for the program module may be executed locally or within a distributed device. In the distributed device, the program modules may be located in local and remote storage media.

5 **[00459]** Computer program code used to implement the methods disclosed in this disclosure may be written in one or more programming languages. The computer program code may be provided for a processor of a general-purpose computer, a dedicated computer, or another programmable data processing apparatus, so that when the program code is executed by the computer or the another programmable data processing apparatus, functions/operations specified
10 in the flowcharts and/or block diagrams are implemented. The program code may be executed all on a computer, partially on a computer, as an independent software package, partially on a computer and partially on a remote computer, or all on a remote computer or server.

15 **[00460]** In a context of this disclosure, the computer program code or related data may be carried by any appropriate carrier, so that a device, an apparatus, or a processor can perform various processing and operations described above. Examples of the carrier include a signal, a computer-readable medium, and the like. For example, the signal may include propagating signals in electrical, optical, radio, sound, or other forms, such as carrier waves and infrared signals.

20 **[00461]** The computer-readable medium may be any tangible medium that includes or stores a program used for or related to an instruction execution system, apparatus, or device. The computer-readable medium may be a computer-readable signal medium or a computer-readable storage medium. The computer-readable medium may include but is not limited to an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, or device, or any suitable combination thereof. More detailed examples of the computer-readable storage medium include an electrical connection with one or more wires, a portable computer disk, a hard disk, a random
25 access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or flash memory), an optical storage device, a magnetic storage device, or any suitable combination thereof.

30 **[00462]** In addition, although the operations of the methods disclosed in this disclosure are described in a particular order in the accompanying drawings, this does not require or imply that these operations need to be performed in the particular order or that all of the shown operations need to be performed to achieve a desired result. Instead, execution orders of the steps depicted in the flowcharts may change. Addition or optionally, some steps may be omitted, a plurality of steps may be combined into one step for execution, and/or one step may be decomposed into a plurality of steps for execution. It should further be noted that features and functions of two or more
35 apparatuses according to this disclosure may be specified in one apparatus. On the contrary,

features and functions of one apparatus described above may be further divided into a plurality of apparatuses for materialization.

[00463] The implementations of this disclosure are described above. The foregoing descriptions are examples, are not exhaustive, and are not limited to the disclosed implementations. Many
5 modifications and variations are apparent to a person of ordinary skill in the art without departing from the scope and spirit of the described implementations. Selection of terms used in this specification is intended to well explain implementation principles, actual application, or improvements to technologies in the market, or to enable another person of ordinary skill in the art to understand the implementations disclosed in this specification.

CLAIMS

What is claimed is:

1. An information transmission method, comprising:

receiving, by a first device, a trigger-based frame from a second device, wherein the trigger-based frame comprises distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device;

determining, by the first device, one or more distributed resource blocks based on the distributed resource unit indication information, wherein each of the one or more distributed resource blocks comprises $N1$ data subcarriers and $N2$ pilot subcarriers, an absolute value of an index difference between every two data subcarriers of $N3$ data subcarriers in the $N1$ data subcarriers is greater than or equal to 4, $N1$, $N2$, and $N3$ are all positive integers, and $N2 < N3 \leq N1$; and

sending, by the first device, a response to the trigger-based frame to the second device on the one or more distributed resource blocks.

2. An information transmission method, comprising:

sending, by a second device, a trigger-based frame to a first device, wherein the trigger-based frame comprises distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; and

receiving, by the second device, a response to the trigger-based frame from the first device on one or more distributed resource blocks, wherein the one or more distributed resource blocks are determined based on the distributed resource unit indication information, each of the one or more distributed resource blocks comprises $N1$ data subcarriers and $N2$ pilot subcarriers, an absolute value of an index difference between every two data subcarriers of $N3$ data subcarriers in the $N1$ data subcarriers is greater than or equal to 4, $N1$, $N2$, and $N3$ are all positive integers, and $N2 < N3 \leq N1$.

3. The method according to claim 1 or 2, wherein when a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, $N1 = 24$, $N2 = 2$, and $N3 = 24$, or when a bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N1 = 48$, $N2 = 4$, and $N3 = 48$, or when a bandwidth is 160 MHz or 320 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$, or when a bandwidth is 320 MHz, $N1 = 234$, $N2 = 8$, and $N3 = 192$, the $N3$ data subcarriers satisfy: if the $N3$ data subcarriers are divided into $N3/6$ groups in ascending order of indices, every six data subcarriers form one group, and an absolute value of an index difference between two adjacent data subcarriers in a same group is 18.

4. The method according to claim 1 or 2, wherein when a bandwidth is 40 MHz, $N_1 = 48$, $N_2 = 4$, and $N_3 = 48$, or when a bandwidth is 80 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 160 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, or when a bandwidth is 320 MHz, $N_1 = 468$, $N_2 = 16$, and $N_3 = 384$, the N_3 data subcarriers satisfy: if the N_3 data subcarriers are divided into $N_3/12$ groups in ascending order of indices, every 12 data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 9, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 24 and 34.

5. The method according to claim 1 or 2, wherein when a bandwidth is 40 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 80 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, or when a bandwidth is 160 MHz, $N_1 = 468$, $N_2 = 16$, and $N_3 = 384$, or when a bandwidth is 320 MHz, $N_1 = 980$, $N_2 = 16$, and $N_3 = 768$, the N_3 data subcarriers satisfy: if the N_3 data subcarriers are divided into $N_3/24$ groups in ascending order of indices, every 24 data subcarriers form one group, absolute values of index differences between two adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 19 and 29.

6. The method according to any one of claims 1 to 5, wherein when the bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N_1 = 234$, $N_2 = 8$, $N_3 = 192$, and $N_4 = 24$, or when the bandwidth is 160 MHz or 320 MHz, $N_1 = 468$, $N_2 = 16$, $N_3 = 384$, and $N_4 = 48$, or when the bandwidth is 320 MHz, $N_1 = 980$, $N_2 = 16$, $N_3 = 768$, and $N_4 = 96$, N_4 data subcarriers of remaining data subcarriers other than the N_3 data subcarriers in the N_1 data subcarriers satisfy: if the N_4 data subcarriers are divided into $N_4/6$ groups in ascending order of indices, every six data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 18, N_4 is a positive integer, $N_4 < N_3$, and $N_3 + N_4 < N_1$.

7. The method according to any one of claims 1 to 6, wherein a lowest-frequency index of a data subcarrier at a lowest frequency in the N_3 data subcarriers satisfies:

when the bandwidth is 40 MHz, the lowest-frequency index is $-a-128$;

when the bandwidth is 80 MHz, the lowest-frequency index is $-a-128-256$;

when the bandwidth is 160 MHz, the lowest-frequency index is $-a-128-256-512$; or

when the bandwidth is 320 MHz, the lowest-frequency index is $-a-128-256-512-1024$; and a is any positive integer from 110 to 122.

8. The method according to any one of claims 1 to 7, wherein an absolute value of an index difference between every two pilot subcarriers of the N_2 pilot subcarriers is greater than 1.

9. A communication apparatus, comprising:

a receiving unit, configured to receive a trigger-based frame from a second device, wherein

the trigger-based frame comprises distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the communication apparatus;

a determining unit, configured to determine one or more distributed resource blocks based on the distributed resource unit indication information, wherein each of the one or more distributed resource blocks comprises N_1 data subcarriers and N_2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N_3 data subcarriers in the N_1 data subcarriers is greater than or equal to 4, N_1 , N_2 , and N_3 are all positive integers, and $N_2 < N_3 \leq N_1$; and

a sending unit, configured to send a response to the trigger-based frame to the second device on the one or more distributed resource blocks.

10. A communication apparatus, comprising:

a sending unit, configured to send a trigger-based frame to a first device, wherein the trigger-based frame comprises distributed resource unit indication information, and the distributed resource unit indication information indicates information about a distributed resource unit allocated to the first device; and

a receiving unit, configured to receive a response to the trigger-based frame from the first device on one or more distributed resource blocks, wherein the one or more distributed resource blocks are determined based on the distributed resource unit indication information, each of the one or more distributed resource blocks comprises N_1 data subcarriers and N_2 pilot subcarriers, an absolute value of an index difference between every two data subcarriers of N_3 data subcarriers in the N_1 data subcarriers is greater than or equal to 4, N_1 , N_2 , and N_3 are all positive integers, and $N_2 < N_3 \leq N_1$.

11. The apparatus according to claim 9 or 10, wherein when a bandwidth is 40 MHz, 80 MHz, 160 MHz, or 320 MHz, $N_1 = 24$, $N_2 = 2$, and $N_3 = 24$, or when a bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N_1 = 48$, $N_2 = 4$, and $N_3 = 48$, or when a bandwidth is 160 MHz or 320 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 320 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, the N_3 data subcarriers satisfy: if the N_3 data subcarriers are divided into $N_3/6$ groups in ascending order of indices, every six data subcarriers form one group, and an absolute value of an index difference between two adjacent data subcarriers in a same group is 18.

12. The apparatus according to claim 9 or 10, wherein when a bandwidth is 40 MHz, $N_1 = 48$, $N_2 = 4$, and $N_3 = 48$, or when a bandwidth is 80 MHz, $N_1 = 102$, $N_2 = 4$, and $N_3 = 96$, or when a bandwidth is 160 MHz, $N_1 = 234$, $N_2 = 8$, and $N_3 = 192$, or when a bandwidth is 320 MHz, $N_1 = 468$, $N_2 = 16$, and $N_3 = 384$, the N_3 data subcarriers satisfy: if the N_3 data subcarriers are divided into $N_3/12$ groups in ascending order of indices, every 12 data subcarriers form one

group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 9, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 24 and 34.

13. The apparatus according to claim 9 or 10, wherein when a bandwidth is 40 MHz, $N1 = 102$, $N2 = 4$, and $N3 = 96$, or when a bandwidth is 80 MHz, $N1 = 234$, $N2 = 8$, and $N3 = 192$, or when a bandwidth is 160 MHz, $N1 = 468$, $N2 = 16$, and $N3 = 384$, or when a bandwidth is 320 MHz, $N1 = 980$, $N2 = 16$, and $N3 = 768$, the $N3$ data subcarriers satisfy: if the $N3$ data subcarriers are divided into $N3/24$ groups in ascending order of indices, every 24 data subcarriers form one group, absolute values of index differences between two adjacent data subcarriers in a same group are alternately 5 and 4, and absolute values of index differences between two most adjacent data subcarriers in two adjacent groups are alternately 19 and 29.

14. The apparatus according to any one of claims 9 to 13, wherein when the bandwidth is 80 MHz, 160 MHz, or 320 MHz, $N1 = 234$, $N2 = 8$, $N3 = 192$, and $N4 = 24$, or when the bandwidth is 160 MHz or 320 MHz, $N1 = 468$, $N2 = 16$, $N3 = 384$, and $N4 = 48$, or when the bandwidth is 320 MHz, $N1 = 980$, $N2 = 16$, $N3 = 768$, and $N4 = 96$, $N4$ data subcarriers of remaining data subcarriers other than the $N3$ data subcarriers in the $N1$ data subcarriers satisfy: if the $N4$ data subcarriers are divided into $N4/6$ groups in ascending order of indices, every six data subcarriers form one group, an absolute value of an index difference between two adjacent data subcarriers in a same group is 18, $N4$ is a positive integer, $N4 < N3$, and $N3 + N4 < N1$.

15. The apparatus according to any one of claims 9 to 14, wherein a lowest-frequency index of a data subcarrier at a lowest frequency in the $N3$ data subcarriers satisfies:

when the bandwidth is 40 MHz, the lowest-frequency index is $-a-128$;

when the bandwidth is 80 MHz, the lowest-frequency index is $-a-128-256$;

when the bandwidth is 160 MHz, the lowest-frequency index is $-a-128-256-512$; or

when the bandwidth is 320 MHz, the lowest-frequency index is $-a-128-256-512-1024$; and

a is any positive integer from 110 to 122.

16. The method according to any one of claims 9 to 15, wherein an absolute value of an index difference between every two pilot subcarriers of the $N2$ pilot subcarriers is greater than 1.

17. A computer-readable storage medium, wherein the computer-readable storage medium stores a computer program, and when the computer program is executed by a processor, the method according to any one of claims 1 to 8 is implemented.

18. A chip, comprising a processing circuit and a communication interface, wherein the processing circuit is configured to perform the method according to any one of claims 1 to 8.

19. A computer program product, comprising a computer program, wherein when the computer program is executed by a processor, the method according to any one of claims 1 to 8 is

implemented.

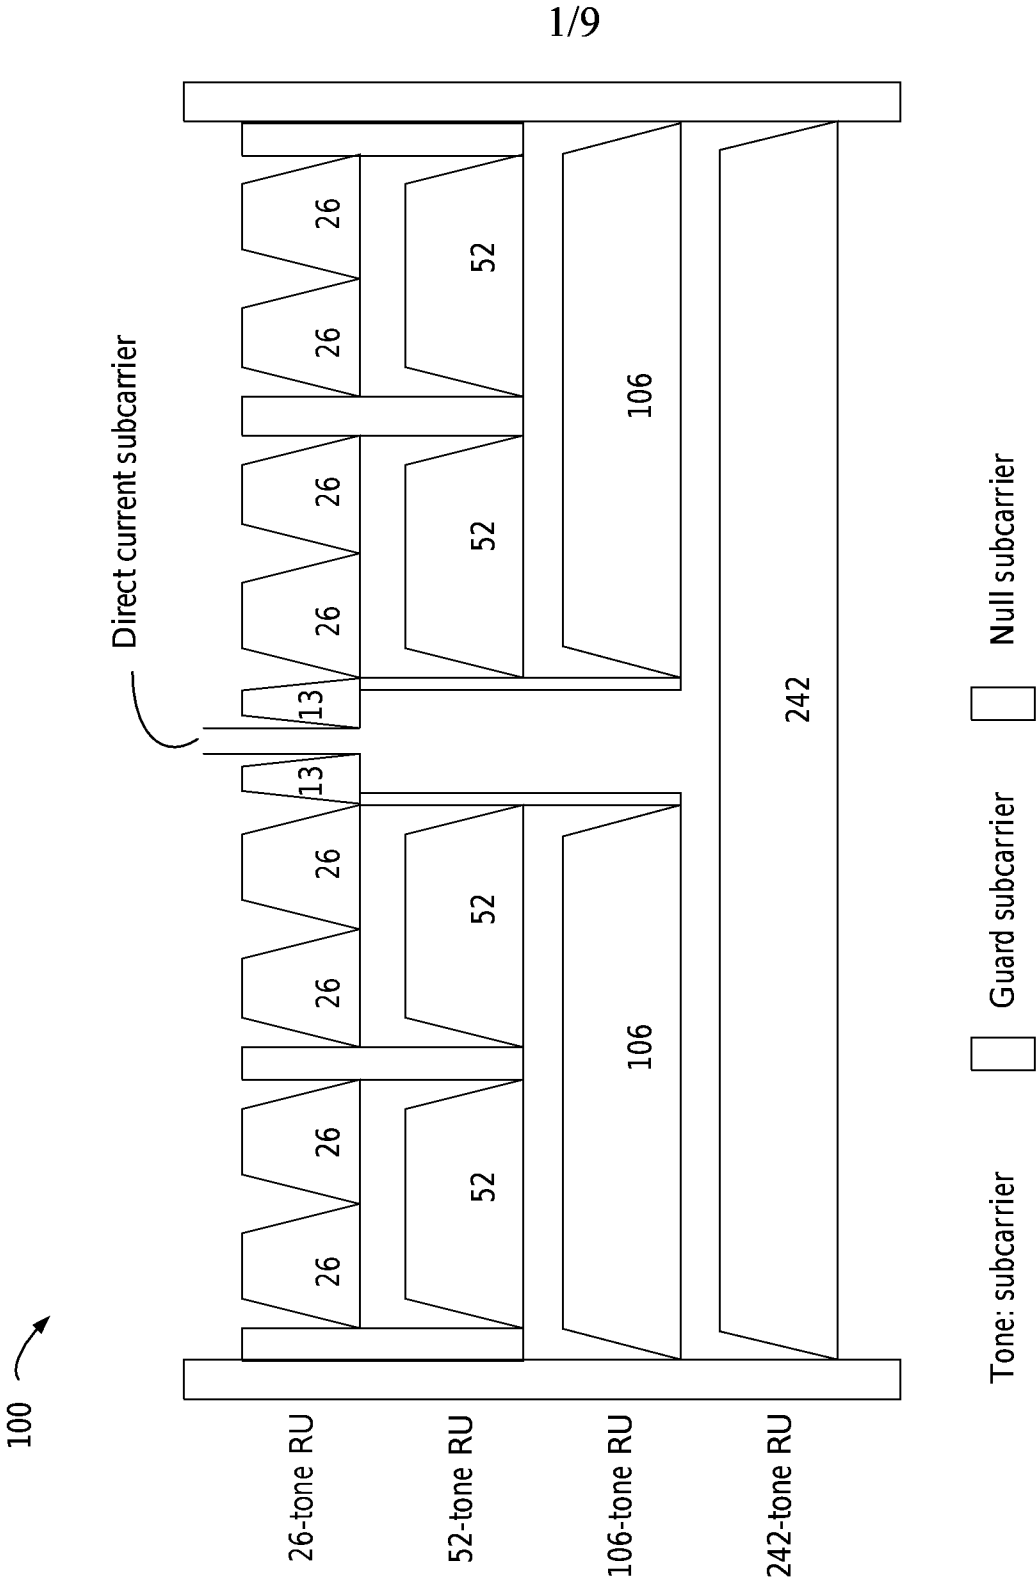


FIG. 1

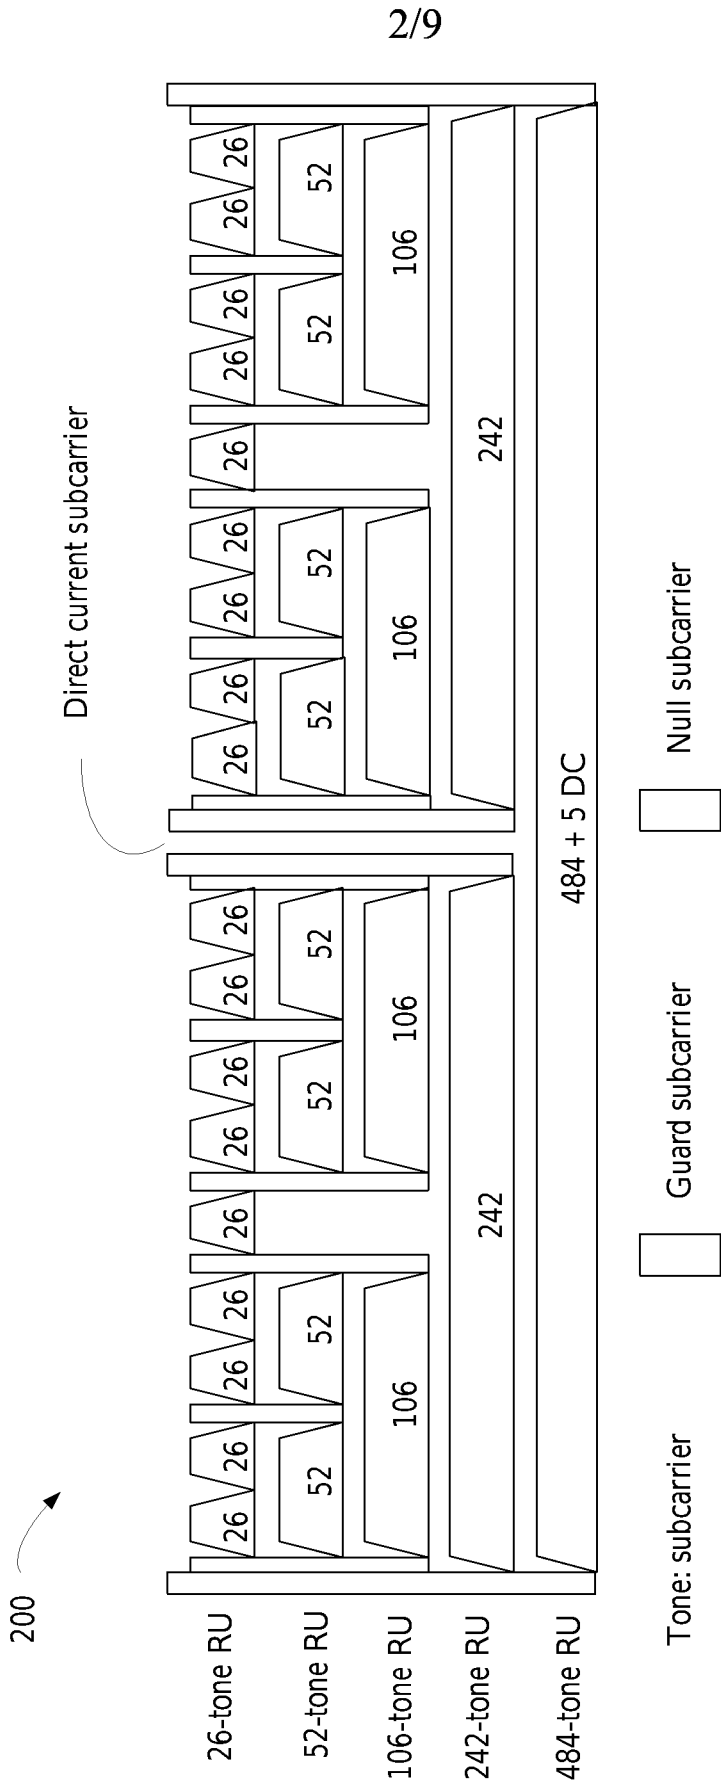


FIG. 2

300

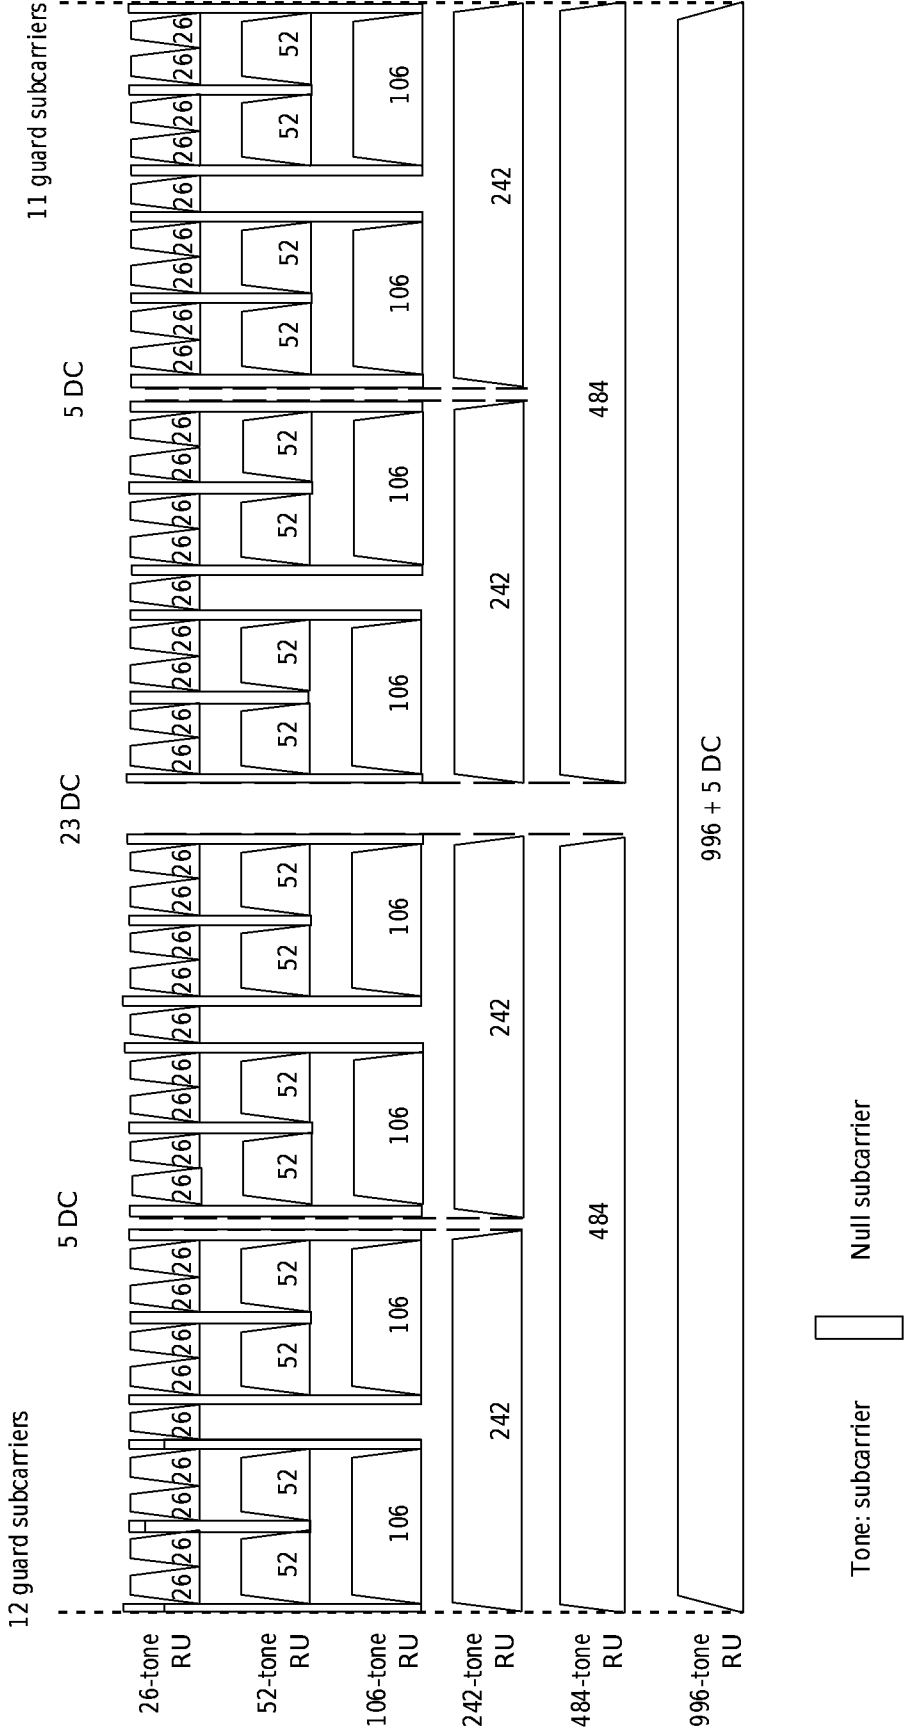


FIG. 3

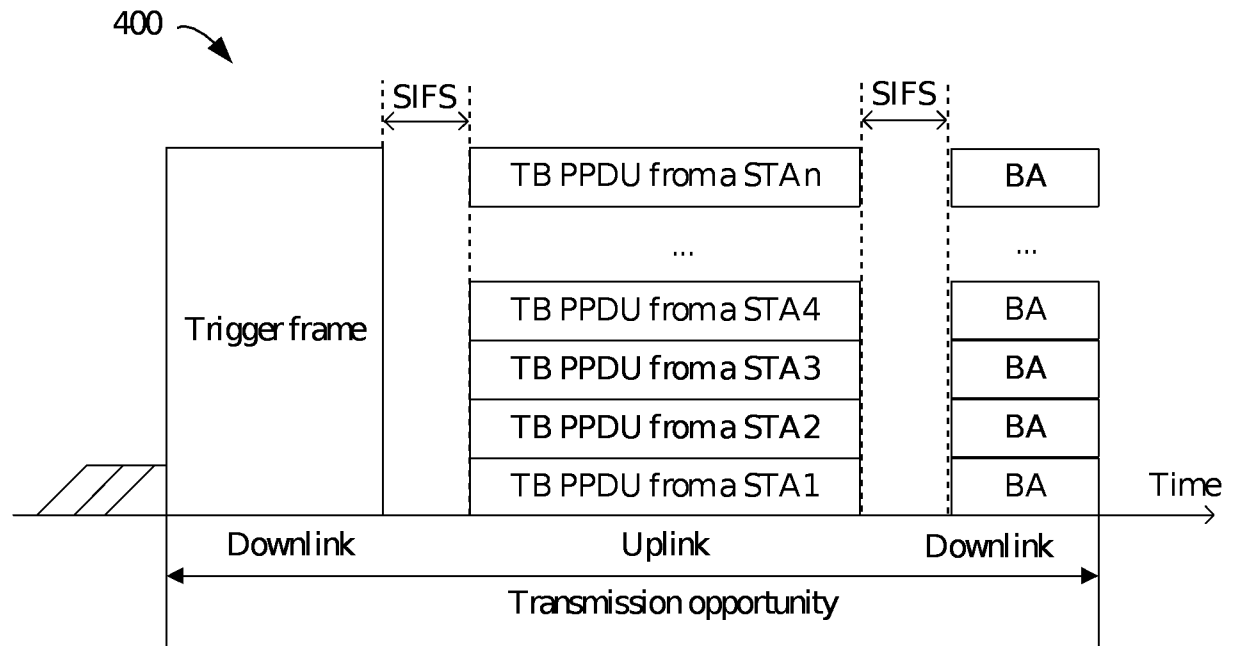


FIG. 4

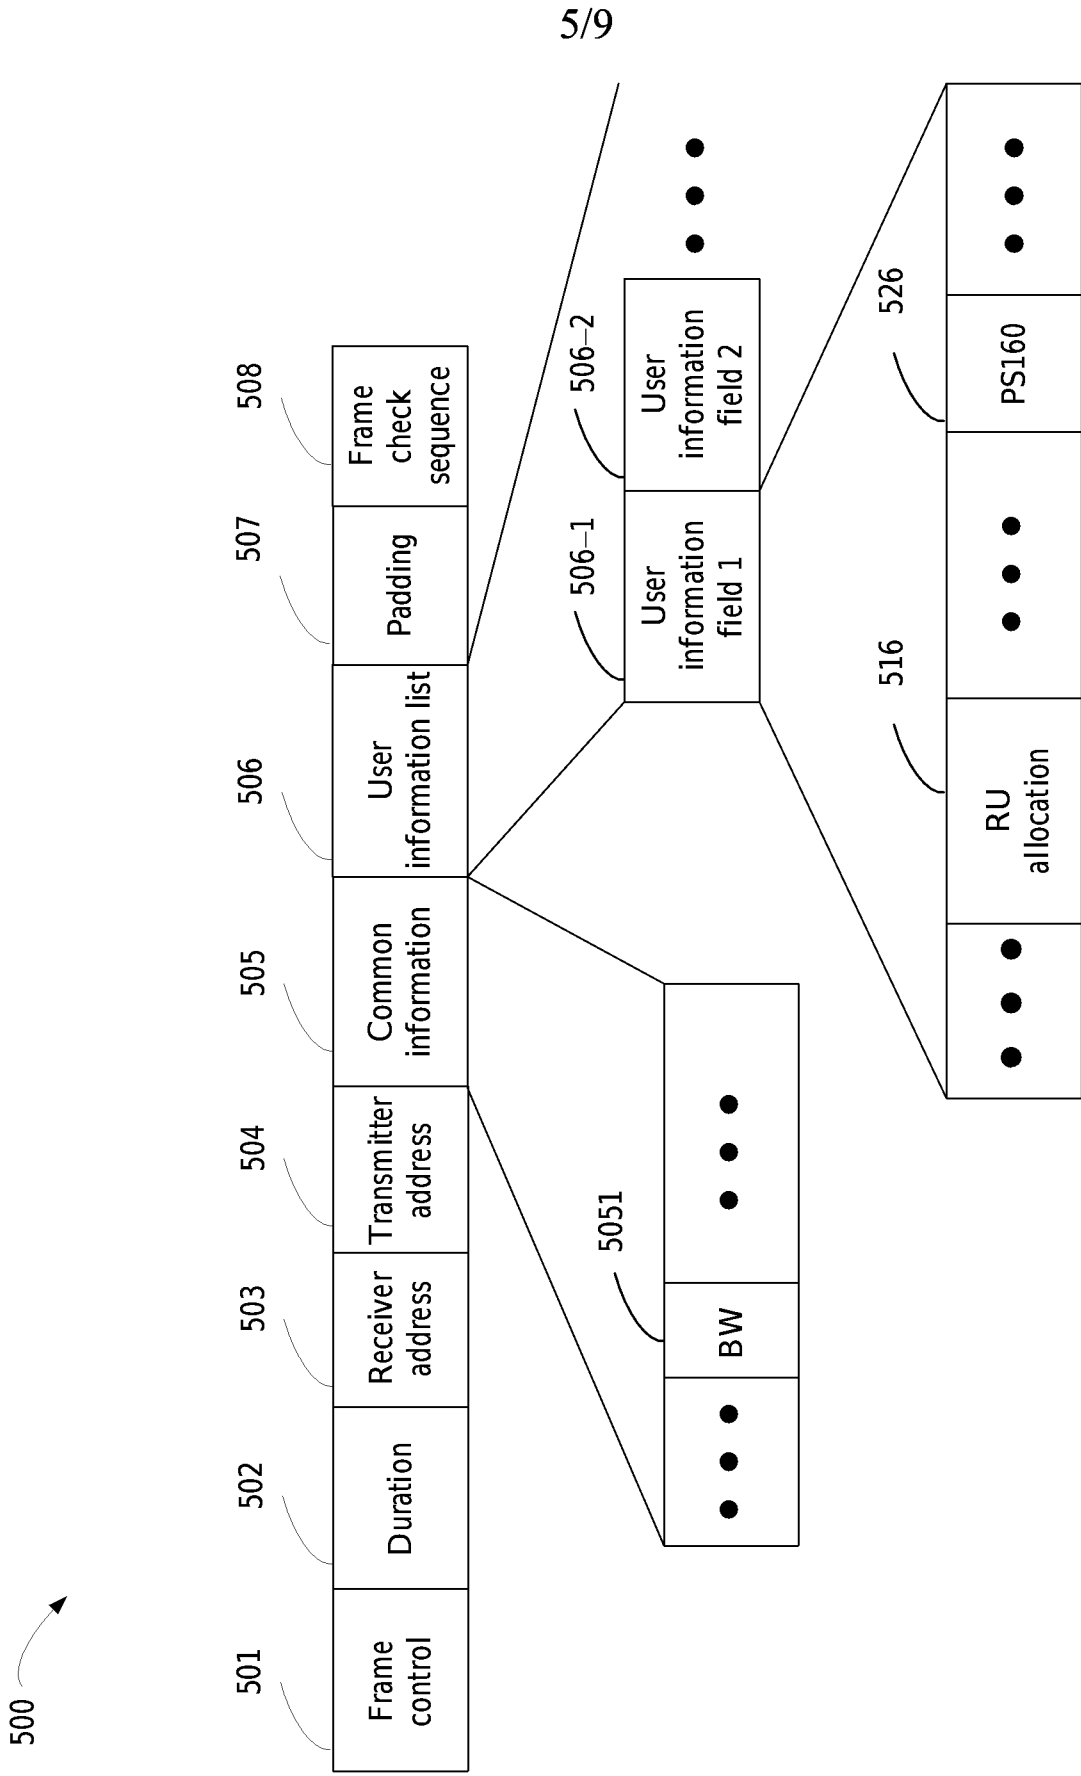


FIG. 5

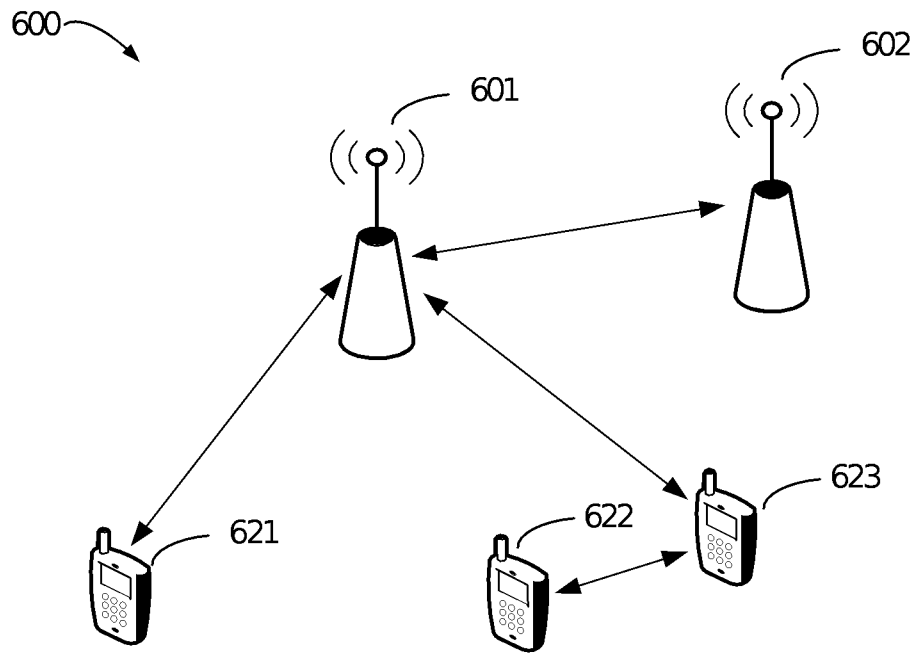


FIG. 6

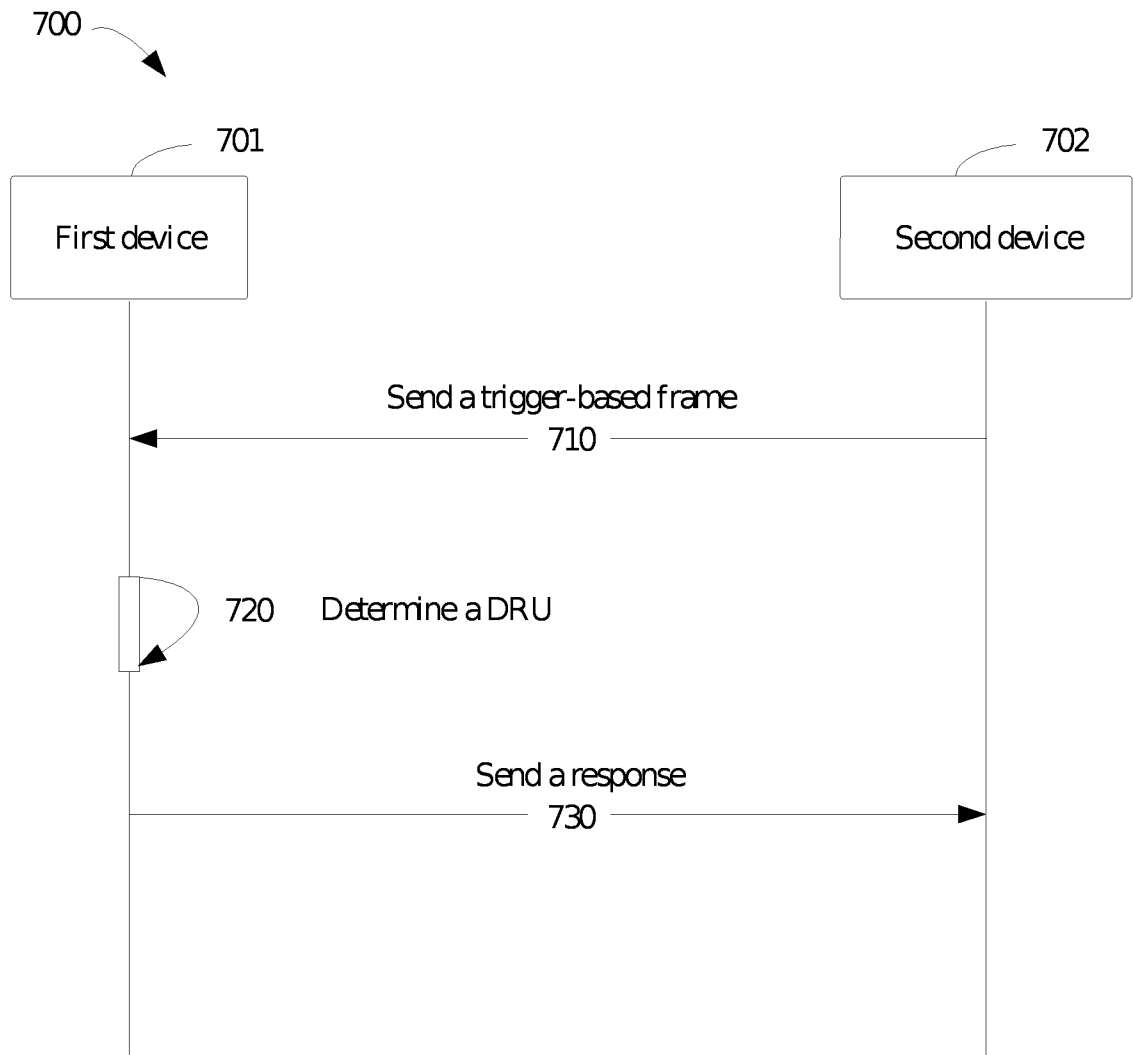


FIG. 7

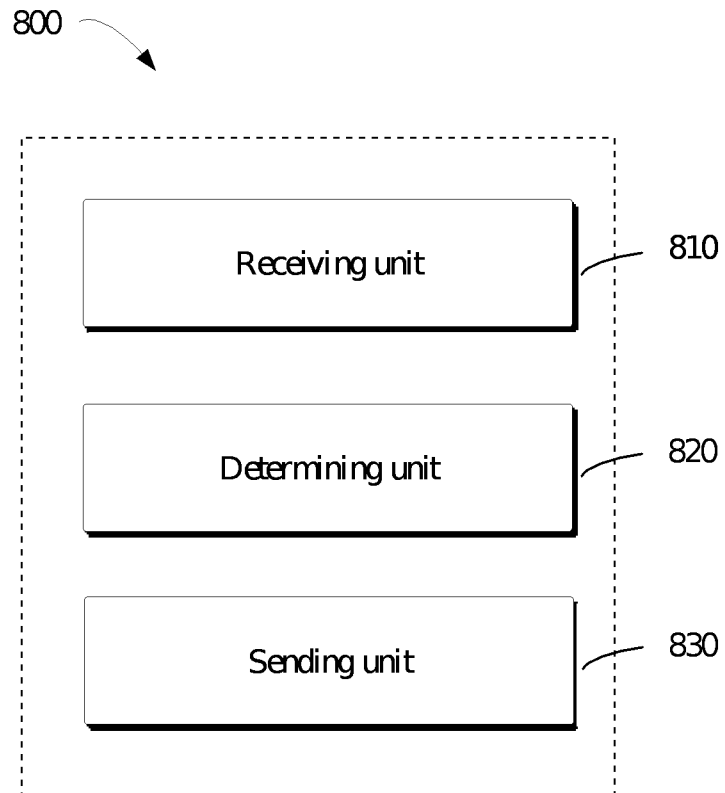


FIG. 8

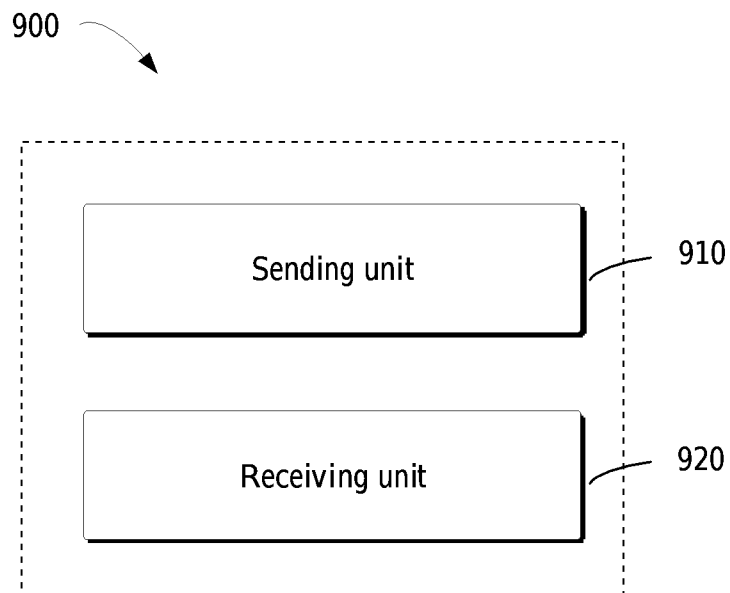


FIG. 9

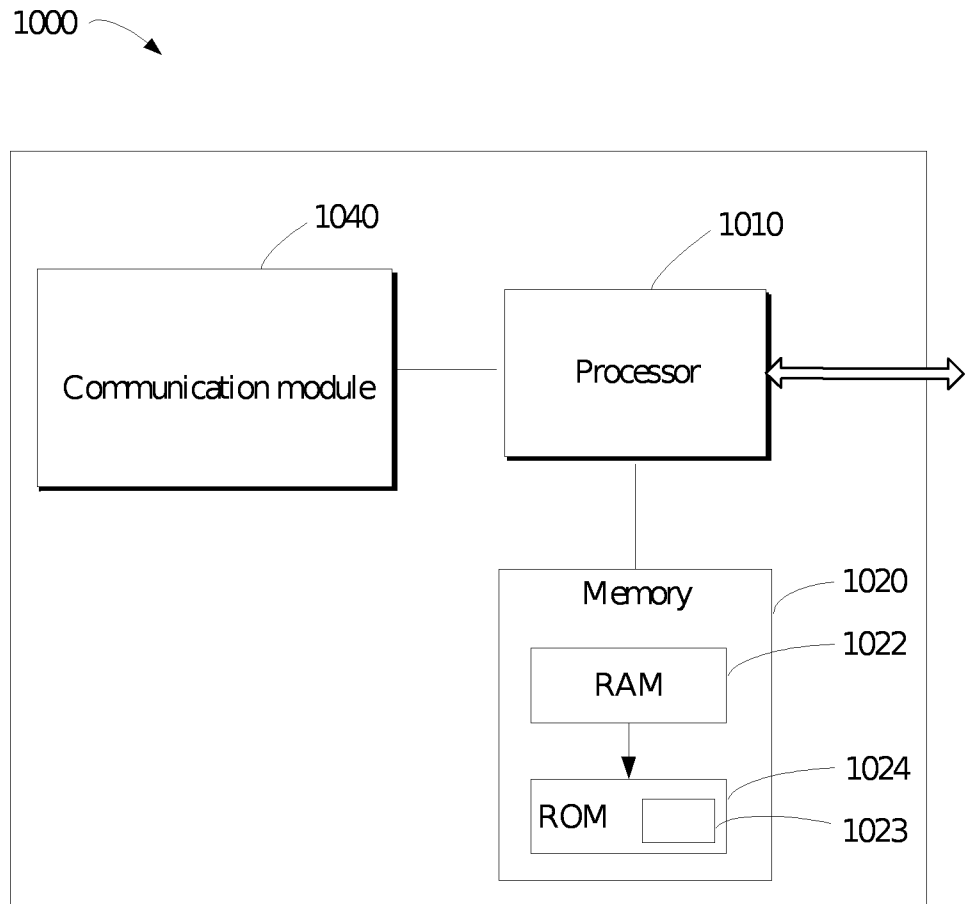


FIG. 10

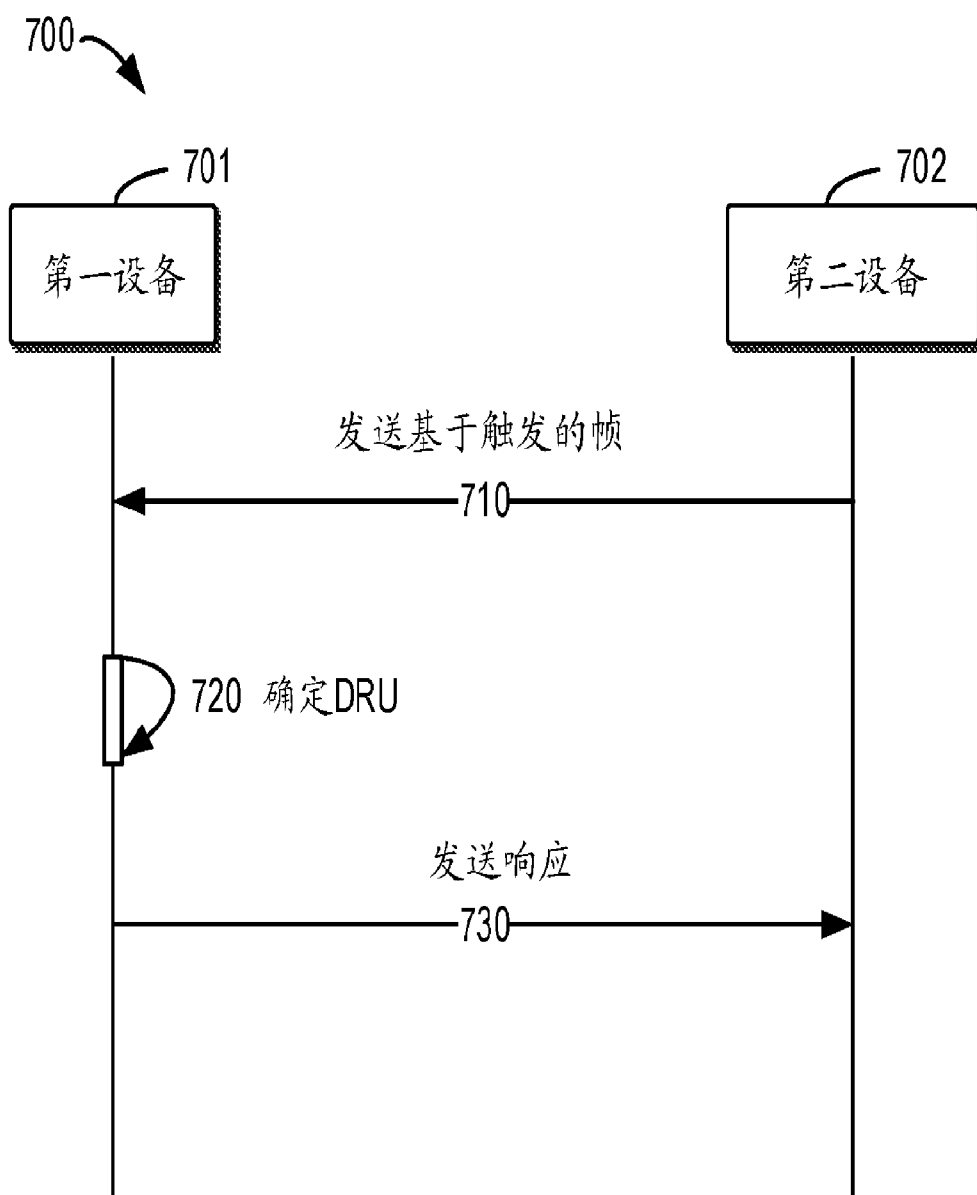


图 7

- 701 First device
- 702 Second device
- 710 Send a trigger-based frame
- 720 Determine a DRU
- 730 Send a response