


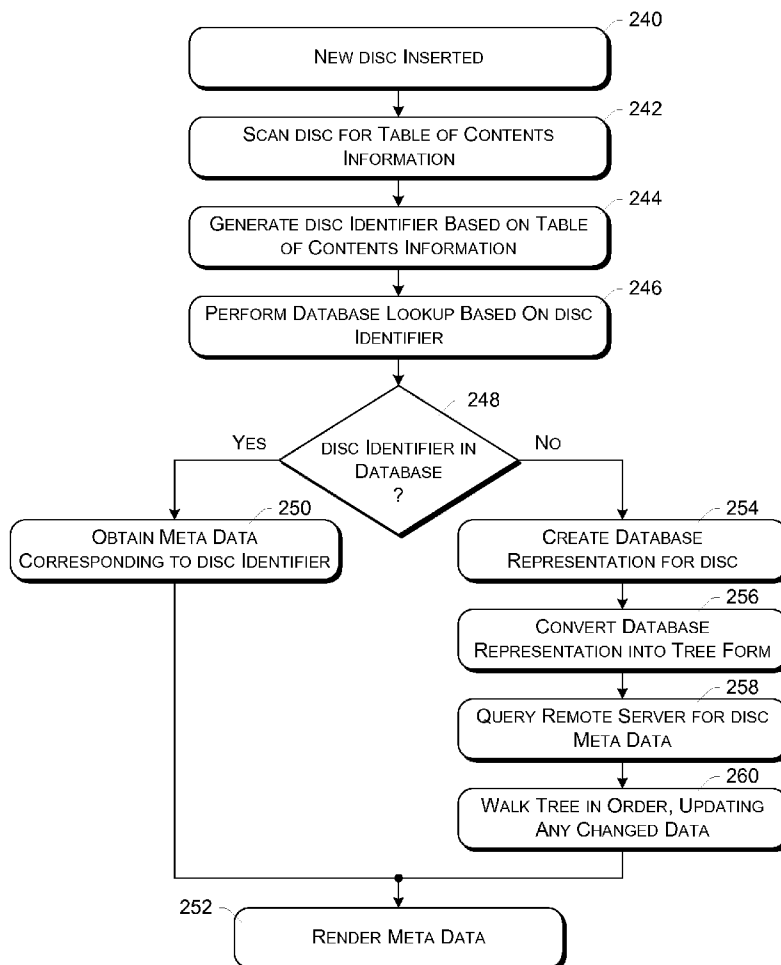

US 20070156773A1

(19) **United States**(12) **Patent Application Publication**
Debique et al.(10) **Pub. No.: US 2007/0156773 A1**(43) **Pub. Date: Jul. 5, 2007**(54) **META DATA MANAGEMENT FOR MEDIA
CONTENT OBJECTS****Publication Classification**(75) Inventors: **Kirt A. Debique**, Seattle, WA (US);
David E. Stewart, Kirkland, WA (US);
Gabriel S. DeBacker, Carnation, WA
(US); **Nosakhare D. Omoigui**,
Redmond, WA (US)(51) **Int. Cl.**
G06F 17/30 (2006.01)
(52) **U.S. Cl.** **707/200**(57) **ABSTRACT**Correspondence Address:
MICROSOFT CORPORATION
ONE MICROSOFT WAY
REDMOND, WA 98052-6399 (US)(73) Assignee: **Microsoft Corporation**, Redmond, WA(21) Appl. No.: **11/683,082**(22) Filed: **Mar. 7, 2007****Related U.S. Application Data**(63) Continuation of application No. 09/820,088, filed on
Mar. 27, 2001, now Pat. No. 7,191,190.

Meta data associated with multiple pieces of content (e.g., songs, movies, other audio/video clips, etc.) stored on multiple pieces of media (e.g., CDs, DVDs, etc.) is maintained in a meta data store. The meta data store also includes meta data associated with other pieces of content stored elsewhere, such as songs stored in files on a local hard drive that have been ripped from a CD or DVD. These other pieces of content are associated with the content on the pieces of media, such as being ripped versions of the same song tracks. This association is maintained in the meta data store, so that whenever a change is made to meta data for one piece of content (e.g., for a track on a CD), then the meta data for the associated piece(s) is also changed (e.g., the ripped version stored in a file on the hard drive).



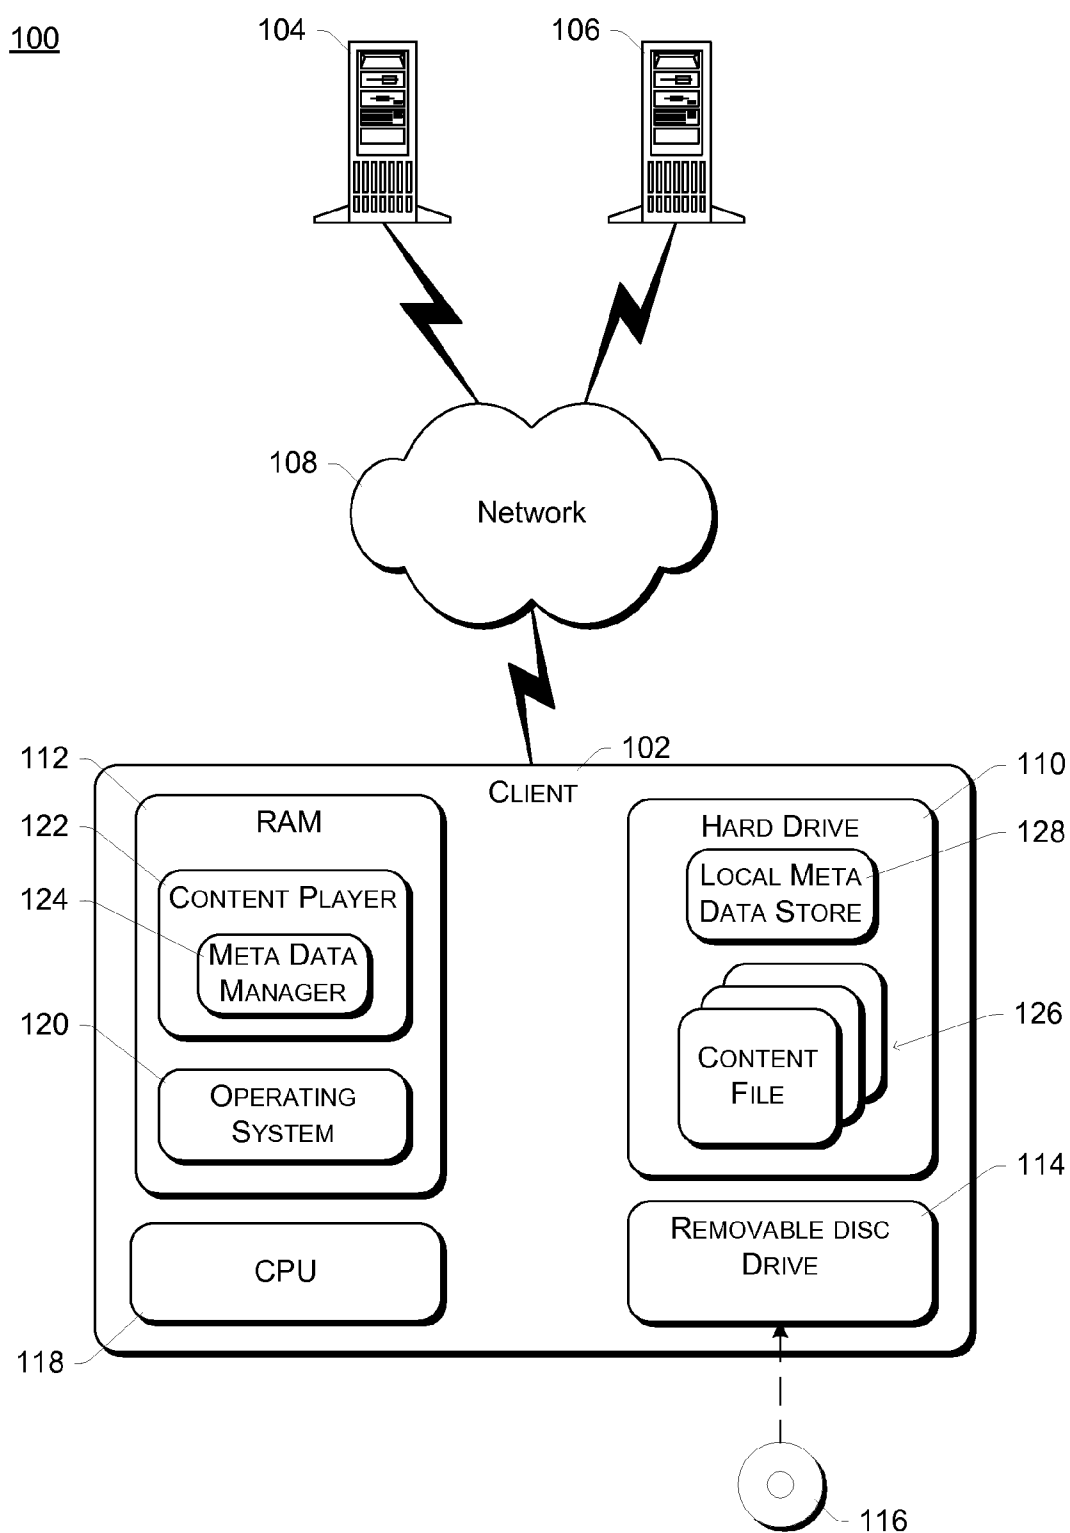


Fig. 1

148

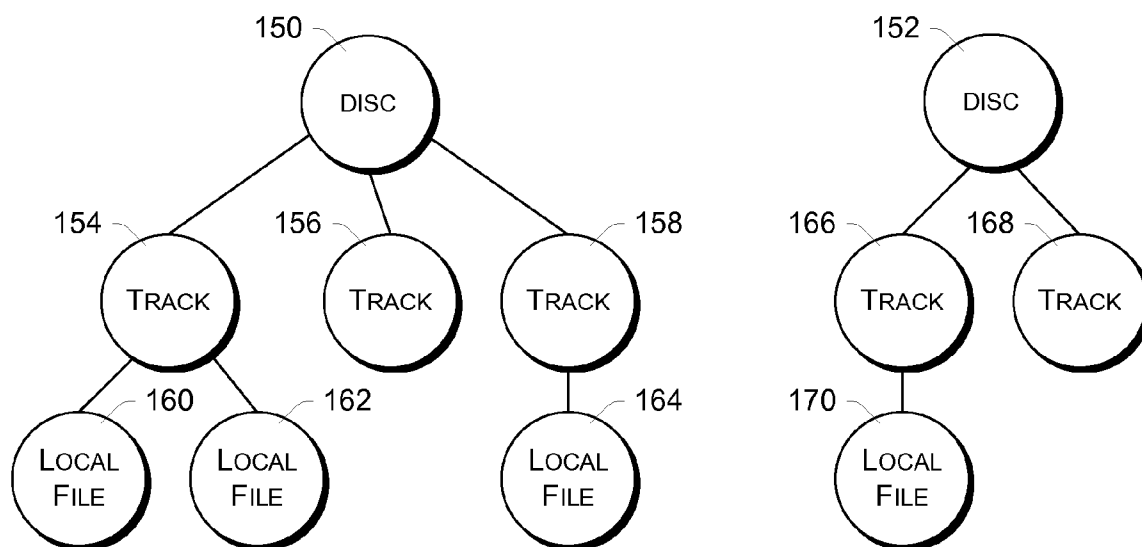


Fig. 2

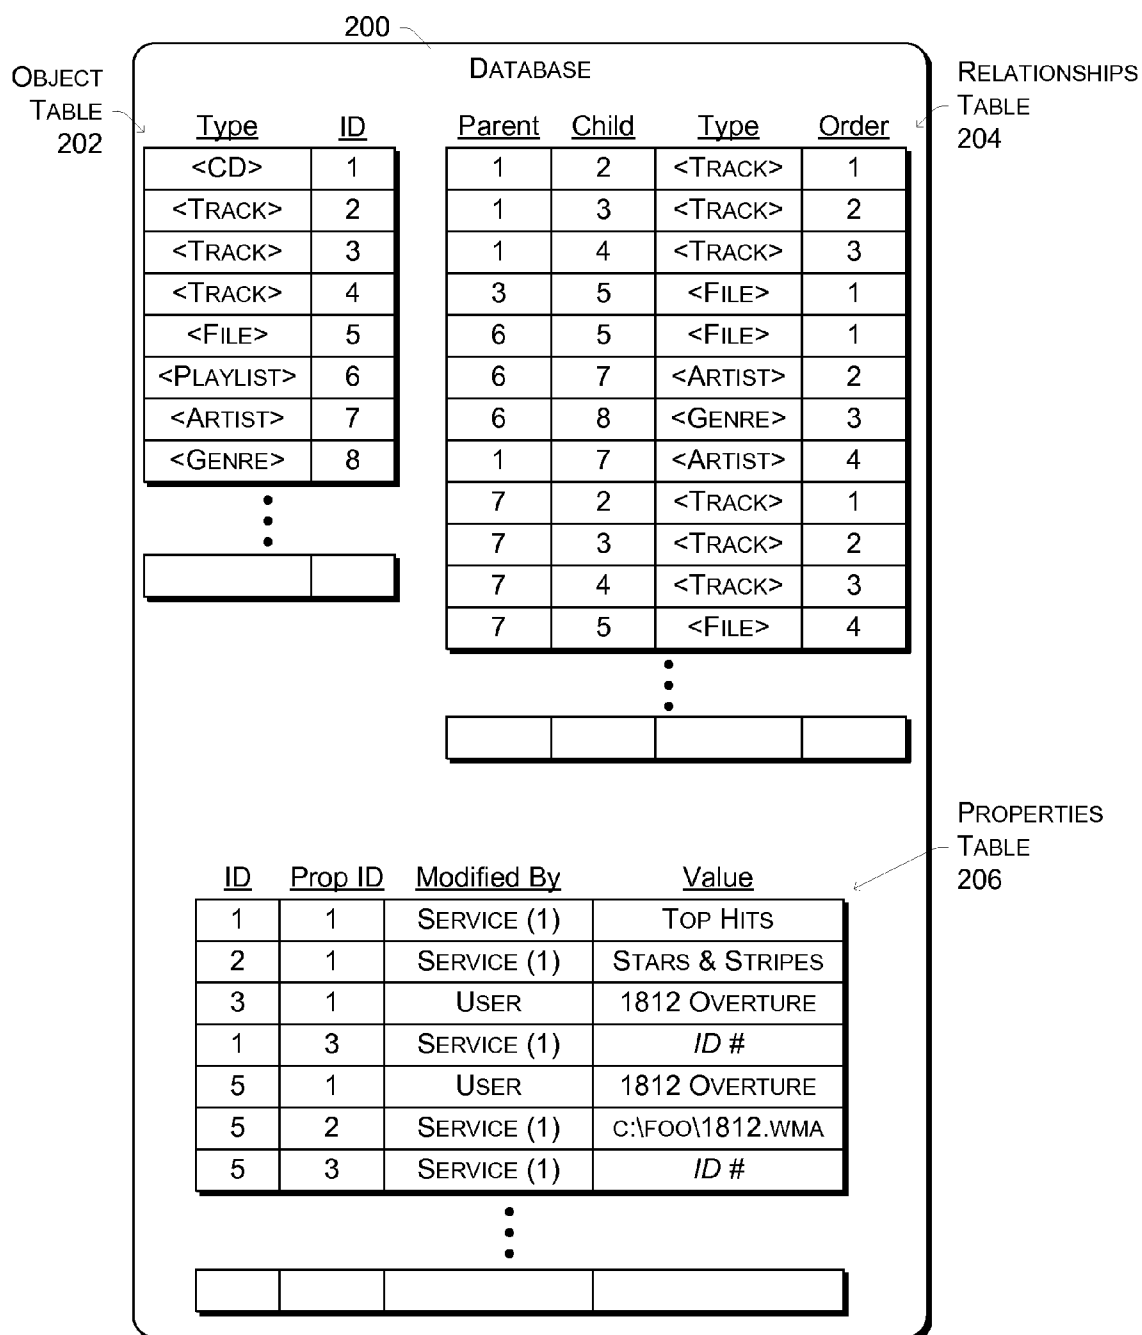


Fig. 3

220

```
<?xml version="1.0" encoding="UTF-8" ?>
- <OMI xmlns:sql="urn:schemas-microsoft-com:xml-sql">
  <name>Billboard Top Hits: 1983</name>
  <author>Various Artists</author>
  <releasedate>1992</releasedate>
  <genre>ROCK</genre>
  <style>Pop/Rock</style>
  <rating>8</rating>
  <copyright />
  <label>Rhino</label>
  <parent>AMG</parent>
+ <track>
- <track>
  <name>Africa</name>
  <author>Toto</author>
</track>
- <track>
  <name>Stray Cat Strut</name>
  <author>Stray Cats</author>
</track>
  .
  .
  .
</OMI>
```

Fig. 4

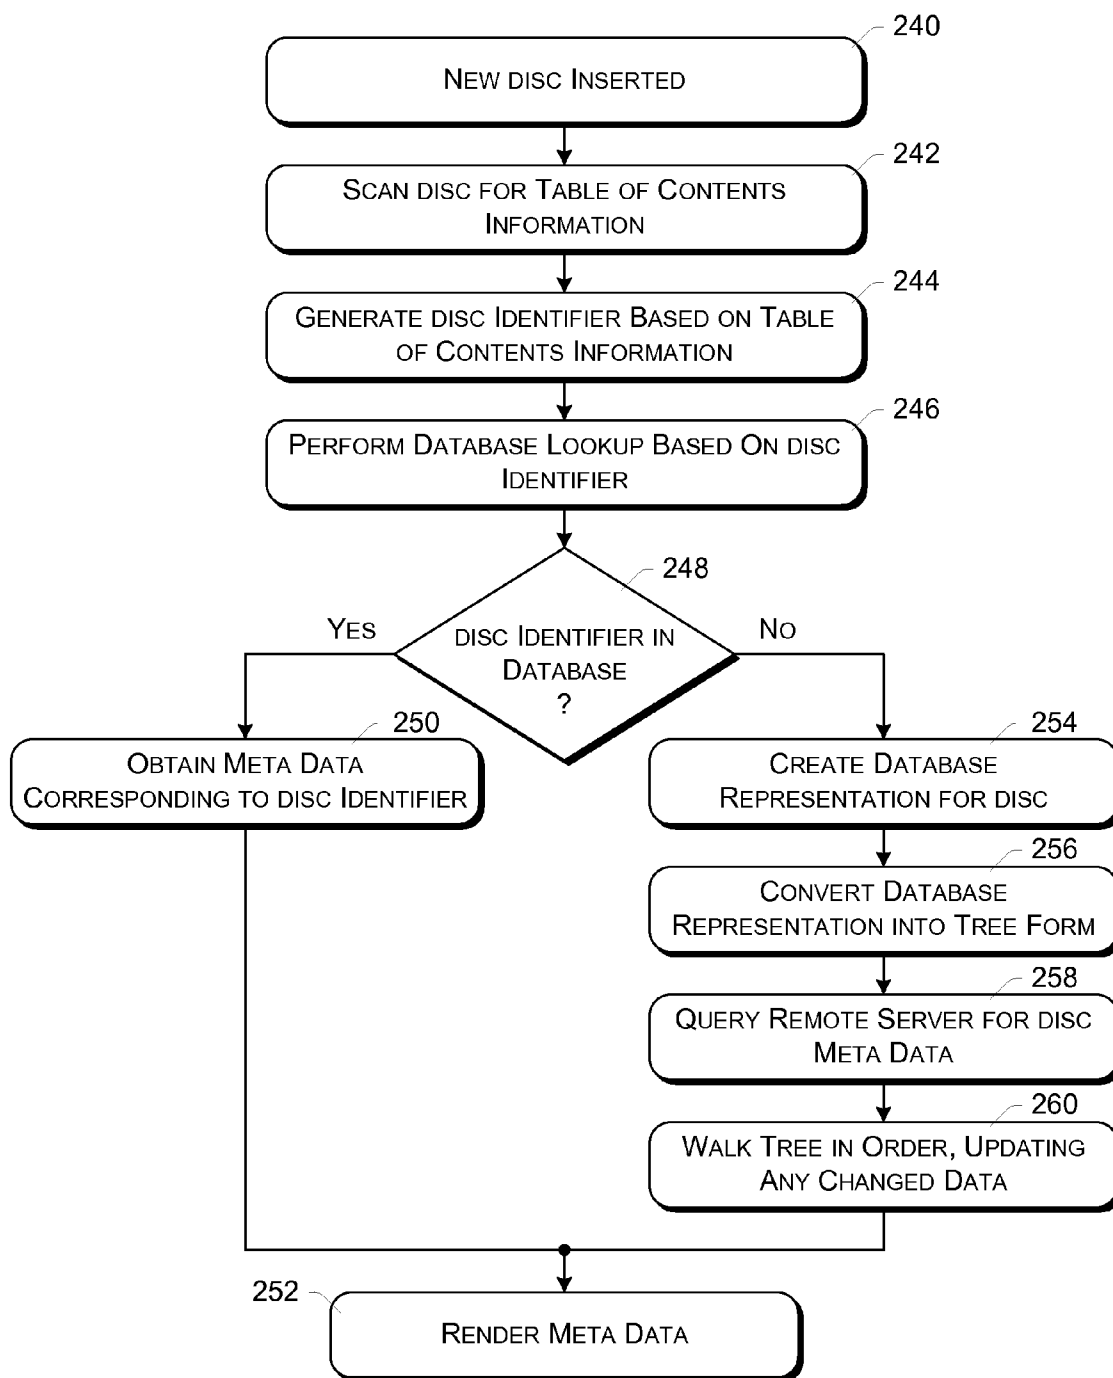


Fig. 5

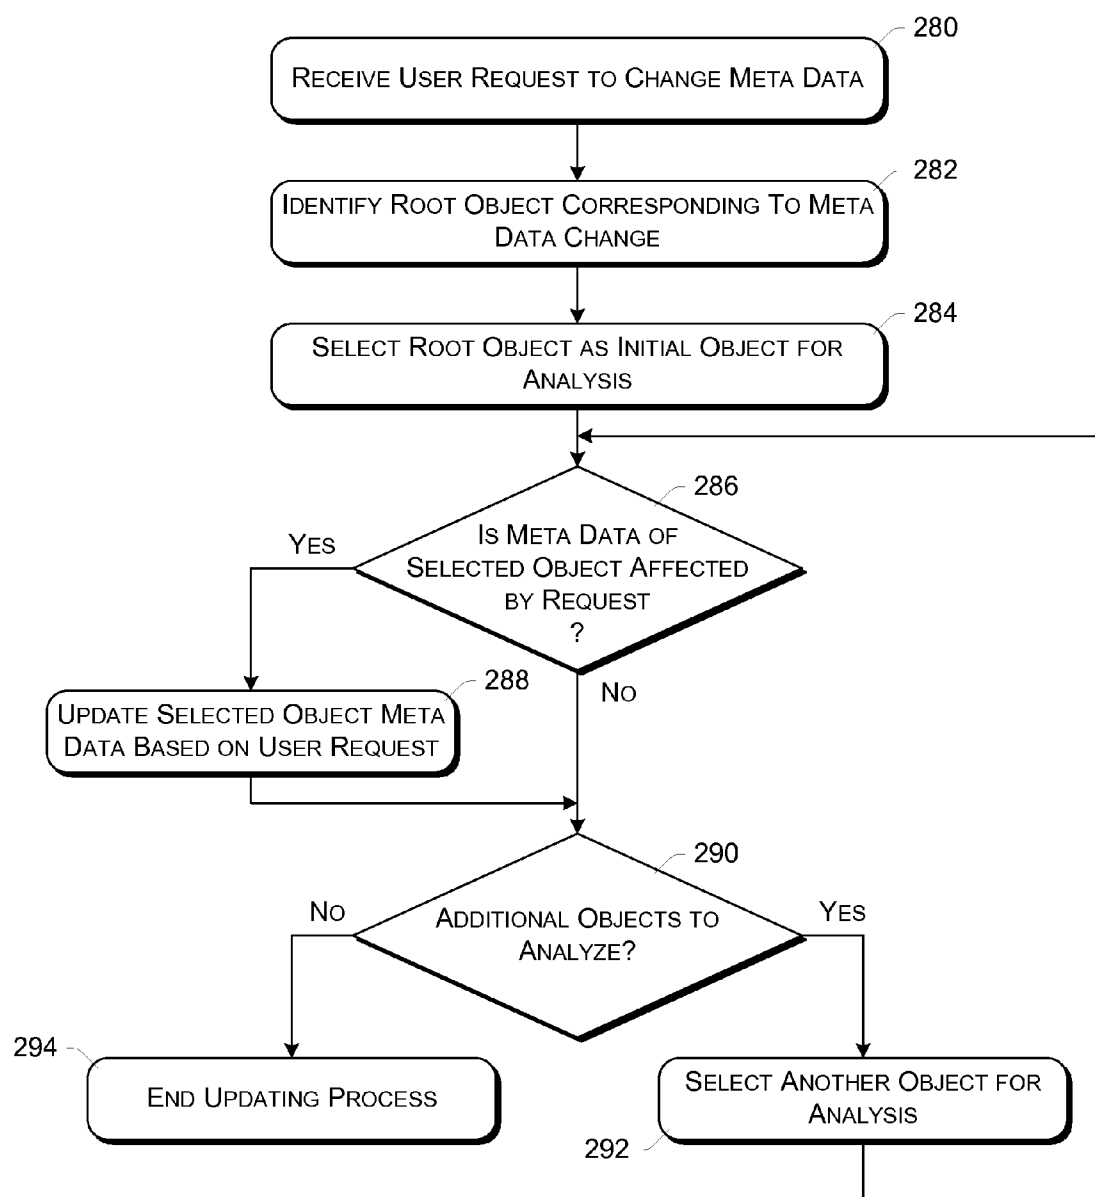
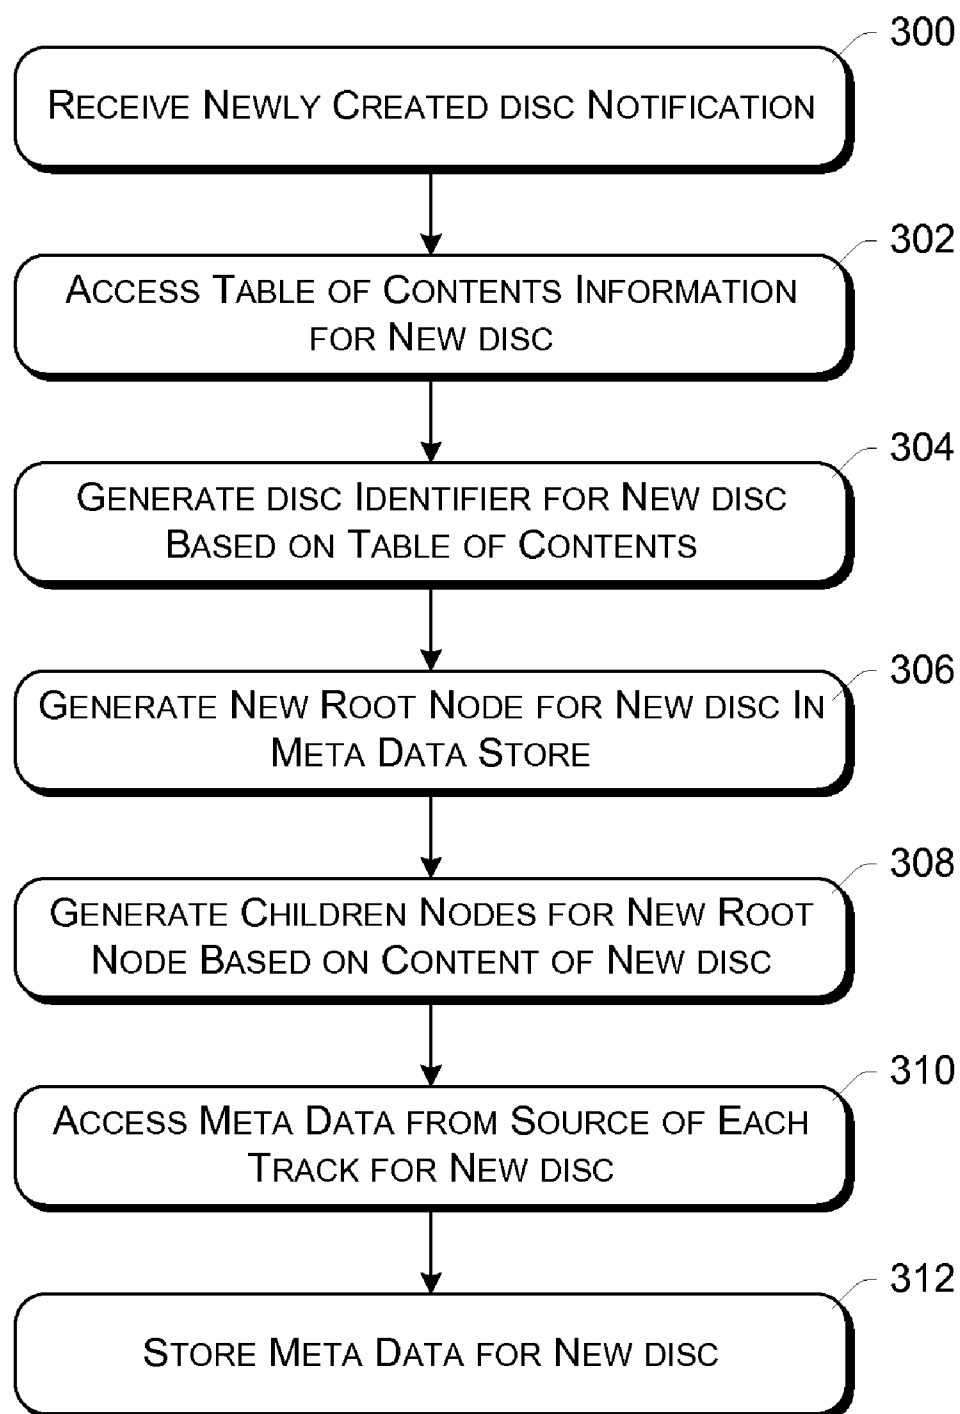


Fig. 6

*Fig. 7*

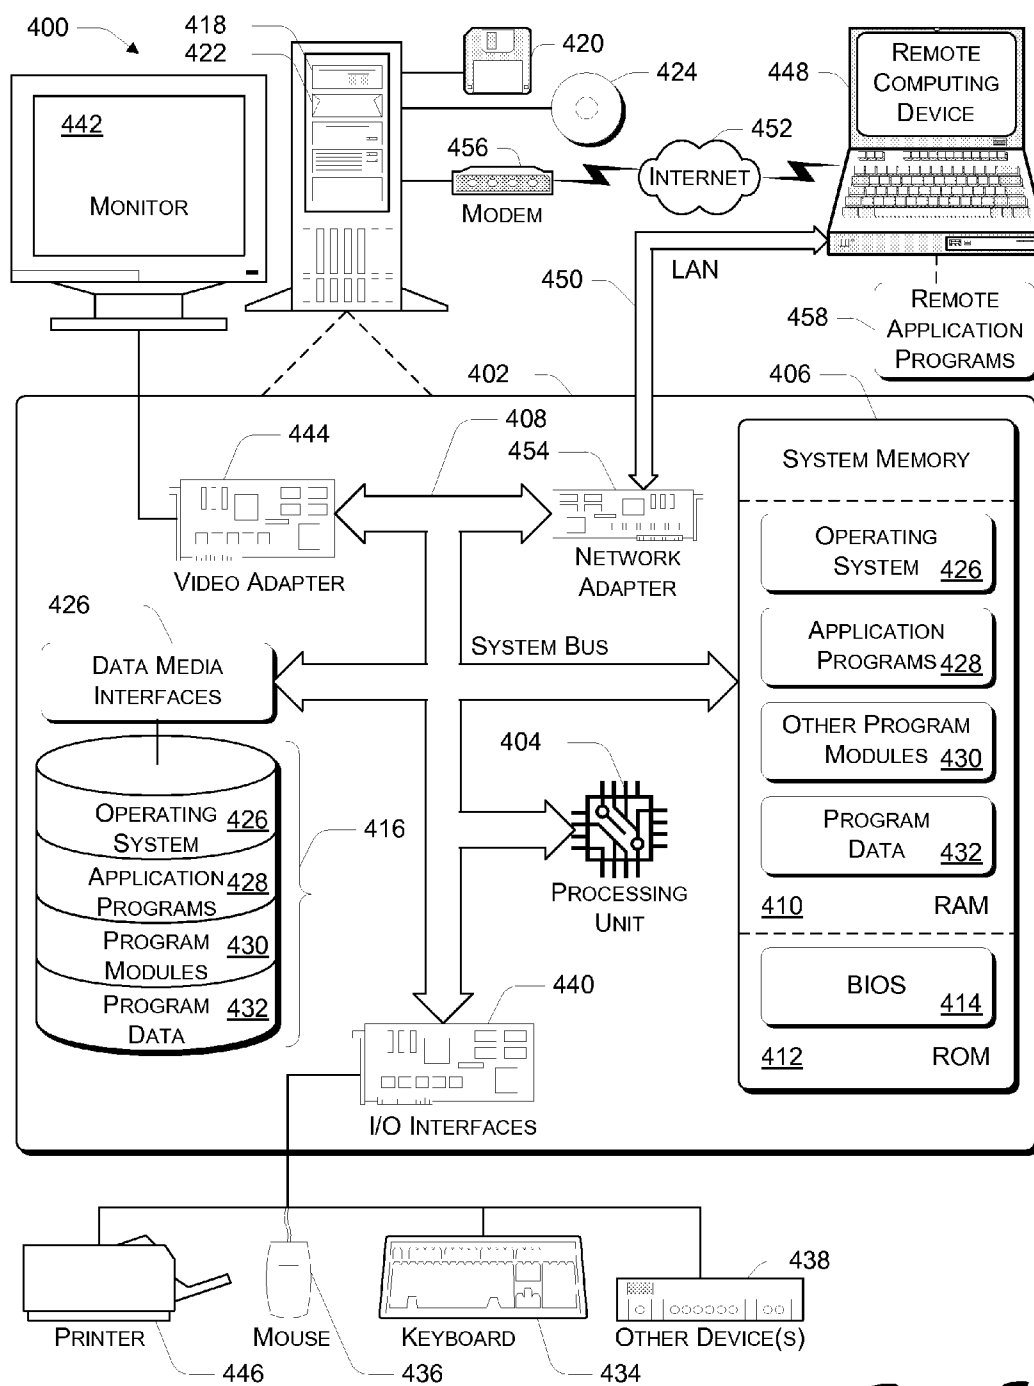


Fig. 8

META DATA MANAGEMENT FOR MEDIA CONTENT OBJECTS

RELATED APPLICATION

[0001] This application is a continuation of and claims priority to U.S. patent application Ser. No. 09/820,088, filed on Mar. 27, 2001, the disclosure of which is incorporated by reference herein.

TECHNICAL FIELD

[0002] This invention relates to data structures and data management, and more particularly to meta data management for media content objects.

BACKGROUND

[0003] Computers are becoming increasingly more powerful while at the same time becoming less costly. This has resulted in the promulgation of computers into many homes and business throughout the world. Along with this increase in computing performance and popularity has also come an increase in the number of areas in which computers are used. Where once computers were used primarily for productivity-based applications (e.g., databases, word processing, spreadsheets, and so forth), a wide range of entertainment applications have become increasingly popular.

[0004] One such entertainment application is that of media content playback, such as audio (e.g., songs) and audio/video (e.g., movies) playback. For example, computers are often equipped with a CDROM drive that allows the computer to read an audio CD and play the songs on the CD via one or more speakers coupled to the computer. An additional feature that such an entertainment application may provide is the ability to obtain information about a CD (e.g., track names and artist name(s)). This information is commonly referred to as "meta data" corresponding to the CD. The application accesses a database of meta data (e.g., from a remote server) to identify information about the CD (e.g., track names and artist name(s)), and then displays this information to the user.

[0005] In addition to playing back media content directly from the source CD, some applications also allow songs to be copied from the source CD and stored as separate files on a local hard drive of the computer, such as in an MP3 or WMA format. This process is commonly referred to as "ripping". These locally stored files can then be played back at a subsequent time directly from the local hard drive without the presence of the source CD in the CDROM drive.

[0006] One current problem with these systems, however, is that meta data is typically associated with only one source (e.g., the source CD). Thus, if the user plays back a song directly from a CD, then the meta data corresponding to that CD is displayed to the user. Similarly, if the user rips that same song to a file on the local hard drive and plays that song back from the file on the hard drive, then the meta data corresponding to that file is displayed to the user. However, any changes made (e.g., by the user) to the meta data corresponding to the CD are displayed to the user only when the song is played back directly from the CD, and any changes made to the meta data corresponding to the file are displayed to the user only when the song is played back from the file. Thus, multiple different sets of meta data are created

(one for each source) for each song, requiring any changes to the meta data for a song to be made to each of the multiple sets. This creates an inconsistent and unfriendly user experience.

[0007] The invention addresses these problems and provides solutions to improve meta data management for media content objects.

SUMMARY

[0008] Improved meta data management for media content objects is described herein.

[0009] According to one aspect of the improved meta data management, meta data associated with multiple pieces of content (e.g., songs, movies, other audio/video clips, etc.) stored on multiple pieces of media (e.g., CDs, DVDs, etc.) is maintained in a meta data store. The meta data store also includes meta data associated with other pieces of content stored elsewhere, such as songs stored in files on a local hard drive that have been ripped from a CD or DVD. These other pieces of content are associated with the content on the pieces of media, such as being ripped versions of the same song tracks. This association is maintained in the meta data store, so that whenever a change is made to meta data for one piece of content (e.g., for a track on a CD), then the meta data for the associated piece(s) is also changed (e.g., the ripped version stored in a file on the hard drive).

[0010] According to another aspect of the improved meta data management, meta data is organized using a disc-centric tree structure, with a disc object being a root object in the tree and multiple children objects (e.g., corresponding to tracks, files, play lists, and so forth) spawning from the disc object. These children can also have their own children object (e.g., file objects). Meta data is maintained for all of these objects, and any changes to the meta data can be readily propagated through the tree to other objects corresponding to the same disc object (the root object).

[0011] According to another aspect of the improved meta data management, meta data is maintained for both generally available media and user-created media. Meta data for generally available media (e.g., commercially available CDs or DVDs) can be obtained from a remote server. For user-created media, the computer creating the media has access to the meta data associated with the content of the new media (e.g., songs copied from another CD for which meta data is already available). The computer generates a disc identifier for the user-created media and, for each piece of content on the new media, copies the meta data for that content from the meta data associated with the source of the content (e.g., for a song copied from a CD, the meta data associated with that song corresponding to that CD).

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings. The same numbers are used throughout the figures to reference like components and/or features.

[0013] FIG. 1 is a block diagram illustrating an exemplary network environment.

[0014] FIG. 2 illustrates an exemplary tree structure of media content objects associated with particular media.

[0015] FIG. 3 illustrates an exemplary database that implements the tree structure of FIG. 2.

[0016] FIG. 4 illustrates an exemplary return of meta data from a meta data server.

[0017] FIG. 5 is a flowchart illustrating an exemplary process for rendering media content meta data.

[0018] FIG. 6 is a flowchart illustrating an exemplary process for updating media content meta data.

[0019] FIG. 7 is a flowchart illustrating an exemplary process for generating meta data for new media.

[0020] FIG. 8 illustrates a general exemplary computer environment which can be used to implement the improved meta data management.

DETAILED DESCRIPTION

[0021] FIG. 1 is a block diagram illustrating an exemplary network environment 100. Environment 100 includes a client computer 102, remote server computers 104 and 106, and a network 108. Network 108 represents any of a wide variety of conventional data communications networks. Network 108 may include public portions (e.g., the Internet) as well as private portions (e.g., an internal corporate Local Area Network (LAN) or a home network), as well as combinations of public and private portions. Network 108 may be implemented using any one or more of a wide variety of conventional communications media including both wired and wireless media. Any of a wide variety of communications protocols can be used to communicate data via network 108, including both public and proprietary protocols. Examples of such protocols include TCP/IP, IPX/SPX, NetBEUI, etc.

[0022] Computers 102, 104, and 106 represent any of a wide range of computing devices, and each device may be the same or different. By way of example, devices 102-106 may be desktop computers, multiple-processor file servers or workstations, laptop computers, handheld or pocket computers, personal digital assistants (PDAs), cellular phones, Internet appliances, consumer electronics devices, gaming consoles, and so forth.

[0023] Client computer 102 includes a local hard drive 110, a system memory (Random Access Memory (RAM)) 112, a disc drive 114 for removable media 116, and a central processing unit (CPU) 118. CPU 118 executes an operating system 120, which manages operation of client computer 102 and provides support for input/output operations (e.g., user inputs, audio and/or video input and playback, data communications with other computers via network 108, and so forth). CPU 118 also executes a content player application 122 from memory 112. Content player application 122 provides a user interface allowing a user of computer 102 to select various pieces of media content (also referred to as simply "content") for playback. Content player application 122 also communicates audio data to speakers of computer 102 (optionally via operating system 120) for playing to the user, as well as communicates video data to a display device of computer 102 for playback of video data. Additionally, content player application 122 may also present (e.g., display) to the user meta data corresponding to content being played. This meta data is information describing different aspects or characteristics of the content being played, and/or

information related to the content being played. A meta data manager component 124 of content player application 122 manages the storage and modification of meta data, as discussed in more detail below. Although illustrated as separate components, content player 122 and operating system 120 may alternatively be incorporated into the same component (e.g., content player 122 may be one of multiple modules of operating system 120).

[0024] Content player application 122 can play pieces of content directly from media 116 inserted into disc drive 114. A piece of content as used herein refers to a segment of data that can be played (e.g., to a user on a computer). The exact nature of a piece of content on media 116 is dependent on the type of media as well as the type of content. For example, for an audio CD, each track of audio data (typically a single song) would be a piece of data. For a movie DVD, the entire movie may be one piece of content, a set of outtakes another piece of content, and a movie preview a third piece of content.

[0025] Media 116 can be any of a wide variety of conventional media. As used herein, media 116 is discussed primarily with reference to being a compact disc (CD) or digital versatile disc (DVD), including CDs and DVDs that are read only, rewriteable, or recordable. Alternatively other types of media can be used, such as other types of optical discs, magnetic disks, magnetic tapes, solid state storage devices, and so forth. It is to be appreciated that the nature of drive 114 also varies based on the type of media 116 being used (e.g., an optical disc drive, a magnetic tape drive, and so forth).

[0026] Additionally, client 102 may access other media in a manner analogous to accessing media 116. For example, media 116 may be inserted into a disc drive of another computer (or CD "jukebox") and accessed by client 102 via network 108. By way of another example, an Internet radio station may make tracks of data, analogous to tracks of data on a CD, accessible to client 102.

[0027] In addition to being used as a direct source for content playback, media 116 may be used as the source for content that is stored as one or more files on hard drive 110. Content player application 122 can manage the copying (ripping) of content from media 116 to a file 126 of hard drive 110, or alternatively another component such as operating system 120 or a component on another computer (not shown) may manage the copying. Each of these ripped files is another version of the corresponding piece of content from media 116. Each of the content files 126 typically stores a single piece of content, and may use any of a wide variety of public and/or proprietary formats, such as MPEG Audio Layer 3 (MP3), Windows Media audio file (WMA), and so forth.

[0028] During operation, meta data manager 124 maintains a record (explicitly or implicitly) of different media pieces 116, such as different CDs, that are inserted into disk drive 114. When coupled to network 108, meta data manager 124 communicates with server 104 and/or 106 to retrieve meta data corresponding to the different media 116 that has been inserted into disc drive 114. Meta data manager 124 stores this received meta data locally (e.g., as local meta data store 128 on hard drive 110) for subsequent use by content player application 122.

[0029] Content player application 122, including meta data manager 124, provides an enhanced content playback

experience by presenting, to the user, meta data corresponding to various pieces of content. The meta data can be displayed while the content is being played, as well as at other times (e.g., allowing the user to look back through content that he or she has previously played). Meta data manager **124** obtains (from server **104** and/or **106**) meta data for each piece of content (e.g., each song) on a particular piece of media (e.g., each CD) that has been inserted into disc drive **114**. This meta data is obtained even though the user may not have actually played the corresponding content—the mere insertion of the media is sufficient. In the illustrated example meta data manager **124** obtains only the meta data for pieces of media it is aware of (e.g., those that have been inserted into disc drive **114**). Alternatively, other meta data may also be obtained and stored in local meta data store **128**. For example, a user may identify a preferred artist and all meta data available for all of that artist's CDs may be obtained and stored in local meta data store **128**.

[0030] Meta data manager **124** associates meta data with the particular pieces of removable media **116** and further associates all pieces of content (e.g., songs, movies, and so forth) that are on or originate from particular media **116** with that particular media **116**. Thus, meta data for a particular song from a particular disc is associated with that song, regardless of whether it is played to the user directly from media **116** or from one of content files **126** that was ripped from media **116**.

[0031] In the illustrated example, the meta data is stored at servers **104** and **106** and is available from a “disc-centric” point of view. This “disc-centric” point of view organizes meta data on a per-disc basis, with tracks on that disc and files ripped from those tracks corresponding to the particular disc. A disc identifier is used for tracking the meta data for the disc. In the case of CDs, CDs typically store songs as different tracks on the CD, and each track is made up of multiple “frames” of audio data. In one implementation, each frame of audio data is $\frac{1}{5}$ s of a second. Typical audio CDs store table of contents (TOC) information, which refers to: the total number of tracks on the disc, the starting frame offset of each track, and the total number of frames on the disc. The disc identifier is generated by summing together this table of contents information (the total number of tracks on the disc, the starting frame offset of each track, and the total number of frames on the disc). It should be noted that generating a disc identifier in this fashion does not guarantee that each disc identifier is unique. However, it does provide an almost-unique value (that is, it is possible for two different CDs to have the same disc identifier, but highly unlikely).

[0032] Alternatively, the disc identifier may be generated in different manners for CDs, as well as different manners for different types of media. For example, a disc identifier for a DVD may be generated based on a CRC 64 (64-bit Cyclical Redundancy Checking) of portions of the DVD. In one implementation, these portions are the first parts (e.g., 64 Kb) of the video_ts.ifo and the vts_01_0.ifo on a DVD disc.

[0033] When meta data manager **124** desires meta data for a particular disc, manager **124** communicates the disc identifier to one of servers **104** and **106**. The receiving server **104** or **106** uses the disc identifier as an index into the meta data stored at the server. If the disc identifier matches a disc

identifier at the server, then the meta data associated with that matching server is returned to meta data manager **124**.

[0034] Servers **104** and **106** can store public and/or private meta data. Public meta data refers to data that is generally available to the public as a whole (although possibly subject to licensing fees or other restrictions). Private meta data refers to data that is intended for only a particular one or more users. For example, a user may generate his or her own meta data and communicate it to a server as private meta data. Subsequent accesses to the server by the user (the identity of which can be verified in any of a variety of conventional manners, such as a user name and password) allow this meta data to be received. By storing such private meta data on a server, a user can generate his or her own data and have that data “follow” him or her to different locations. For example, a user may generate private meta data from his or her home computer and store it on a remote server. The user can then access that server from another location (e.g., his or her portable audio device, an Auto PC, and so forth) and have that previously generated private data available at the other location. Thus, if the user generates special meta data for a CD on his or her home computer, when the user inserts the CD into his or her Auto PC, the same special meta data can be retrieved from the server and rendered by the Auto PC.

[0035] Content player **122** maintains a tree-structure of objects associated with particular media **116**. In the illustrated examples, this tree-structure is a “disc-centric” structure placing a disc identifier as the root node and then one or more levels of children depending from the root node.

[0036] FIG. 2 illustrates an exemplary tree structure **148** of media content objects associated with particular media. Each object in tree structure **148** can have meta data associated with it. Two root node objects **150** and **152** are illustrated, each corresponding to a particular optical disc. Root object **150** has three children objects **154**, **156**, and **158**, each of which is one track on the disc corresponding to object **150**. Additionally, track object **154** has two children **160** and **162**, each of which is a file that has been ripped to a local hard drive, and each of which is a ripped version of the track corresponding to track object **154**. Furthermore, track object **158** has one child **164**, which is a file that is stored on the local hard drive and is a ripped version of the track corresponding to track object **158**. The track corresponding to track object **156** has not been ripped to any files on the local hard drive, and thus track object **156** does not have any children.

[0037] Similarly, two track objects **166** and **168** are child objects from root disc object **152**. Track object **166** has a file child object **170**, while track object **168** has no children.

[0038] The tree structure of FIG. 2 allows meta data manager **124** to readily propagate meta data, as well as changes to meta data, through the various objects associated with a particular disc (or other media). For example, if a user desired to correct a typographical error that occurred in the name of a song corresponding to track **154**, given the relationships identified in FIG. 2 the association of ripped file objects **160** and **162** to track object **154** can be readily identified, and the correction also made in the name of the song corresponding to each of the ripped file objects **160** and **162**.

[0039] The discussions herein refer primarily to a disc-centric point of view as illustrated in FIG. 2. Alternatively,

the database may be structured from other view points. For example, rather than the disc object as a root node there may be an “anthology” object as the root node, with each of the disc objects **150** and **152** being children of the anthology object. An anthology may include, for example, a set of multiple CDs corresponding to the same artist, genre, time period, etc. In this situation, any meta data changes can be propagated across multiple CDs (e.g., a performance date for the anthology may be changed and this change propagated to each CD in that anthology). By way of additional examples, other points of view may have artist names as root nodes, genres as root nodes, and so forth.

[0040] Additionally, it should be noted that even though a disc-centric point of view is used, an object can be a child of objects that are (or lead to) two different root node objects. For example, as discussed in more detail below, a new CD may be created by a user that includes tracks from another source CD. In this situation, the track objects can be linked to parent root node objects that are the root nodes for both the new CD as well as the source CD.

[0041] The tree structure of FIG. 2 can be implemented using any of a wide variety of data structures.

[0042] FIG. 3 illustrates an exemplary database **200** that implements the tree structure of FIG. 2. Database **200** is illustrated including an object table **202**, a relationships table **204**, and a properties table **206**. Object table **202** identifies multiple objects in database **200**, relationships table **204** maintains a mapping of objects to each other in a specific order, and properties table **206** maintains a set of properties (meta data) for objects in database **200**. FIG. 3 illustrates database **200** populated with example data for purposes of explanation.

[0043] Object table **202** identifies the objects that are in database **200**. As used herein, an object refers to an entity that can have “children” (that is, one or more other related objects) and properties associated with it. For example, an object may be a disc, a track on a disc, a file ripped from a track on a disc, a play list identifying multiple tracks and/or files, an artist (corresponding to a disc, a track, a file, etc.), a genre (corresponding to a disc, a track, a file, etc.), and so forth. In the illustrated example of FIG. 3, several different objects are identified.

[0044] Object table **202** includes two fields: a type field and an ID field. For each entry in object table **202**, the type field identifies what type of object is described in the entry and the ID field identifies a unique identifier (unique within database **200**) of the object. In one implementation, the type field includes a globally unique ID that corresponds to the type of object described in the entry. The ID for an object is used to identify the object in the relationships table **204** and properties table **206**. The ID for each object can be assigned in any of a wide variety of manners, and in the illustrated example each object is assigned an ID that is the order the object is entered into object table **202** relative to the other objects in the table. In the illustrated example of FIG. 3, a CD is assigned the ID of “1”, three CD tracks are assigned the ID’s of “2”, “3”, and “4”, respectively, a file is assigned the ID of “5”, and so forth.

[0045] Additional fields may also optionally be included in object table **202**. For example, a “description” field may be added allowing information describing the entry to be

included (e.g., a brief description of what object the globally unique ID refers to, such as “compact disc”).

[0046] Relationships table **204** identifies relationships between different objects in database **200**. Each entry in relationships table **204** identifies a parent/child relationship between two objects identified in object table **202**. Relationships table **204** includes four fields: a parent field, a child field, a type field, and an order field. The parent field identifies one of the objects in object table **202** by its ID, while the child field identifies another of the objects in object table **202** by its ID. The parent and child fields identify a parent/child relationship between these two identified IDs. For example, the first entry in relationships table **204** indicates that the object with an ID of 2 is a child of the object with an ID of 1. Thus, in conjunction with object table **202**, this first entry indicates that the track with an ID of 2 is a child of the CD with an ID of 1 (in other words, the track with an ID of 2 is a track on the CD with an ID of 1).

[0047] The type field in relationships table **204** indicates what type of object the object referenced in the child field of the entry is. For example, the first entry indicates that the object with an ID of 2 is a track object. This is a duplicate of the information stored in object table **202**, and is included to increase efficiency in accessing database **200**. For example, to identify all of the tracks with the same parent, a search can be performed based on the parent and type fields of relationships table **204**. Alternatively, the type field may not be included in relationships table **204**.

[0048] The order field in relationships table **204** identifies the order in which each entry for each parent object is added to relationships table **204**. The first relationship entered in table **204** for a particular parent object has an order of “1”, the second has an order of “2”, and so forth.

[0049] Additional fields may also optionally be included in relationships table **204**. For example, an additional type field may be included that indicates what type of object the object referenced in the parent field of the entry is. By way of another example, a User ID field may be included that identifies which user inserted the CD that resulted in the relationship for that entry. The User ID field may be used, for example, to allow meta data for multiple different users to be stored in the same database **200**, but also allow a particular user to access only the meta data that corresponds to discs he or she inserts into the disc drive.

[0050] Properties table **206** stores meta data for the objects identified in object table **202**. Properties table **206** includes four fields: an ID field, a property (prop) ID field, a “modified by” field, and a value field. For each entry, the ID field identifies one of the objects in object table **202** by its ID. The property ID field for the entry identifies a particular property that the entry corresponds to. Multiple pieces of meta data can be associated with an object (e.g., the title of a CD, the artist of a CD, a performance date, and so forth). Multiple property ID values are established that uniquely identify the different possible pieces of meta data, and for each entry the property ID field includes one of those ID values.

[0051] The “modified by” field identifies the source of the meta data for the entry. The modified by field may indicate a particular service that is the source of the meta data (e.g., one of servers **104** or **106** of FIG. 1), or alternatively that the user is the source of the meta data. The value field identifies

the meta data for the entry. Any of a variety of meta data can be stored in the value field, and optionally may be modified by the user. For example, properties table **206** indicates that the object having an ID of 3 (which is a CD track) has a user-set value of “1812 Overture”.

[0052] Although illustrated as a single field, the value field may optionally be multiple data-dependent fields (e.g., a numeric value field, a text value field, a date value field, and a binary value field).

[0053] The meta data illustrated in database **200** can be received from a remote server, such as server **104** or **106** of FIG. 1. This meta data can be returned to the client computer implementing database **200** in any of a wide variety of formats. FIG. 4 illustrates an exemplary return of meta data from a meta data server. The meta data **220** illustrated in FIG. 4 is returned in an extensible markup language (xml) format. Alternatively, other public and/or proprietary formats can be used. As illustrated, meta data **220** indicates that the name of the disc is “Billboard Top Hits: 1983”, the author is “Various Artists”, the release date for the disc is “1992”, the genre of the disc is “rock”, the style of the disc is “Pop/Rock”, and the rating of the disc is “8”. Additionally, there is no copyright information in meta data **200** for the disc, indicating that the remote server does not have the copyright meta data for the disc. Additionally, the tracks of the disc are identified in meta data **220** in order, so the first track on the disc has the name “Africa” and the author “Toto”, the second track on the disc has the name “Stray Cat Strut” and the author “Stray Cats”, and so forth.

[0054] Returning to FIG. 3, the various tables in database **200** allow changes to the meta data in the database to be automatically propagated to other related objects. For example, assume that the meta data received from a server **104** or **106** of FIG. 1 for the object having an ID of 3 (a CD track) indicates that the title is “Tchaikovsky: 1812 Overture”. Further assume that the user changes the title for that track to be simply “1812 Overture”. The meta data manager then checks relationships table **204**, which indicates that the object having an ID of 3 has a child with an ID of 5 (a file, as indicated in object table **202**). The meta data manager thus also changes the title data, in properties table **206**, for the object having an ID of 5 to be the new title. Thus, regardless of whether the user subsequently selects playback of Tchaikovsky’s 1812 Overture from the CD or the file, the meta data stored in database **200** indicates that the title is simply “1812 Overture”.

[0055] Additional fields may also optionally be included in properties table **206**. For example, a type field may be included (analogous to the type field in relationships table **204**) that identifies what type of object the object referenced in the ID field is. By way of another example, properties for particular objects may be organized into different property sets, such as pre-defined properties and user-defined properties. In this situation, an additional field may be included in properties table **206** that identifies which property set the entry refers to.

[0056] In addition to tables **202**, **204**, and **206**, one or more additional tables may optionally be included in database **200**. In one implementation, these additional tables include a property set types table, a property types table, a users table, and an object values table. Each entry in the property set types table identifies a globally unique ID for a property

set, a corresponding ID for that property set, and a description of that property set. Each entry in the property types table identifies one of the property set ID’s from the property set types table, a number associated with the property ID, a data type associated with the property (e.g., a numeric value, a text value, a date value, or a binary value), and a description of the property. Each entry in the users table identifies a user ID and corresponding user name of the computer on which database **200** is implemented. Each entry in the object values table identifies an object ID from object table **202**, an instance number of the object in the object values table, and optionally an identification of the user that created the object (e.g., a sequential ID based on the user’s login name).

[0057] Exemplary objects and properties are illustrated in FIG. 3, although a wide range of objects and associated properties may be included in database **200**. The following tables illustrate an exemplary set of objects and the properties that may be associated with those objects in accordance with certain implementations. Additionally, the attached Appendix identifies a set of interfaces and functions that can be used in accordance with certain implementations to create, manage, and modify different schemes (e.g., different databases **200** of FIG. 3), and objects within those schemes.

[0058] Object Types

Object Name	Description
Genre	The genre or category of the content.
CDGenre	The genre or category of a CD.
CDArtist	The artist of a CD.
CDAAlbum	A CD album.
Artist	The artist of content.
UserCollection	A user-defined collection of content.
Album	An album.
AlbumTrack	A track of an album.
AlbumPlaylist	A play list for an album.
Playlist	A play list of content.
PlaylistFromAlbum	A play list of ripped tracks associated with an album.
Track	A track of content on media.
Batch	A list of disc(s) for which meta data has not been downloaded yet (allowing for batch processing of downloads when network connection is made).
Link	A URL reference and friendly name about an object. For example, “More about Sting” would be a friendly name and the URL reference would be “http://...sting.com”.
Picture	An image corresponding to content.
ChildListEntry	A list of the children tracks in a play list.
DVD	A DVD.
DVDTitle	The title of a DVD.
DVDChapter	A chapter of a DVD.
Factoid	One or more facts or comments associated with an album or content. Different factoids may be tied to different frames or other segments of the album or content.

[0059] Genre Object

Property Name	Description
Name	The name of the genre.
NumMediaChildren	The total number of children of the object that are media content.

-continued

Property Name	Description
NumAudioMediaChildren	The total number of children of the object that are audio media content.
NumVideoMediaChildren	The total number of children of the object that are video media content.

[0060] CDGenre Object

Property Name	Description
Name	The name of the genre or category of a CD.

[0061] CDArtist Object

Property Name	Description
Name	The name of an artist of a CD.
Role	The role of an artist of a CD (e.g., lead singer, backup singer, keyboard, etc.).

[0062] CDAlbum Object

Property Name	Description
Title	The title of the CD.
Copyright	Copyright information for the CD.
Label	The recording company label that produces the CD.
ReleaseDate	The date of release of the CD.
Rating	A rating for the CD.
RatingOrg	An organization that rated the CD.
CDID	A hashed value of the disc identifier, allowing for faster lookups.
TOC	The disc identifier (based on the table of contents information) for the CD.
LastPlayed	The last time a track of the CD was played on the computer.
Artist	The artist of the CD.
Genre	The genre or category of the CD.
NumMediaChildren	The total number of children of the object that are media content.
NumAudioMediaChildren	The total number of children of the object that are audio media content.
NumVideoMediaChildren	The total number of children of the object that are video media content.

[0063] Artist Object

Property Name	Description
Name	The name of an artist of a CD.
Role	The role of an artist of a CD (e.g., lead singer, backup singer, keyboard, etc.).
NumMediaChildren	The total number of children of the object that are media content.
NumAudioMediaChildren	The total number of children of the object that are audio media content.
NumVideoMediaChildren	The total number of children of the

-continued

Property Name	Description
	object that are video media content.

[0064] UserCollection Object

Property Name	Description
Name	The name of the user-defined collection of content.

[0065] Album Object

Property Name	Description
Title	The title of the album.
Copyright	Copyright information for the album.
Label	The recording company label that produces the album.
ReleaseDate	The date of release of the album.
Rating	A rating for the album.
RatingOrg	An organization that rated the album.
CDID	A hashed value of the disc identifier for the album, allowing for faster lookups.
TOC	The disc identifier (based on the table of contents information) for the album.
LastPlayed	The last time content from the album was played on the computer.
Artist	The artist of the album.
Genre	The genre or category of the album.
NumMediaChildren	The total number of children of the object that are media content.
NumAudioMediaChildren	The total number of children of the object that are audio media content.
NumVideoMediaChildren	The total number of children of the object that are video media content.

[0066] Album Track Object

Property Name	Description
Title	The title of a track of the album.
Lyrics	The lyrics for the content of the track.
LengthInMilliseconds	The length of the track (in milliseconds).
LastPlayed	The last time the track was played on the computer.
Album	The name of the album the track is on.
Artist	The artist of the track.
Genre	The genre or category of the track.
OriginalIndex	The original position of the track on the album it came from.
RipFilename	The name of a file ripped from the track.
Enabled	Whether the track is marked as "playable" on the album. Non-enabled tracks appear "grayed out" in the user interface and are skipped over rather than played when the album is played.
TOC	The disc identifier (based on the table of contents information) of the original CD the track was on.
PlayCount	The number of times the track has been played on the computer.

-continued

Property Name	Description
LastEditedBy	An identification of the last entity (either the name of the meta data provider or "user") to edit any property associated with the object.
Provider	The name of the original meta data provider.
Composer	The composer of the album.
CoverArtSmall	A small graphic of the album's cover art.
CoverArtLarge	A larger graphic of the album's cover art.

[0067] AlbumPlaylist Object

Property Name	Description
Name	The name of the album play list.
Copyright	Copyright information for the album.
Label	The recording company label that produces the album.
ReleaseDate	The date of release of the album.
Rating	A rating for the album.
Style	The style of the content in the play list.
CDID	A hashed value of the disc identifier, allowing for faster lookups.
TOC	The disc identifier (based on the table of contents information) for the album.
LastPlayed	The last time a track in the play list was played on the computer.
Artist	The artist of the album.
Genre	The genre or category of the album.
Parent	The parent of the object.
LastPlaylistEntryID	The ID of the last entry in the play list.
LastEditedBy	The user that last edited the play list.
Composer	The composer of the album.
TotalDuration	The total play time of the content on the play list.
BuyNow	Information on how to purchase the album.
MoreInfo	A URL to a web page with more information about the object.

[0068] PlaylistProperties Object

Property Name	Description
Name	The name of the play list.
NumMediaChildren	The total number of children of the object that are media content.
NumAudioMediaChildren	The total number of children of the object that are audio media content.
NumVideoMediaChildren	The total number of children of the object that are video media content.
LastPlaylistEntryID	The ID of the last entry in the play list.
Attributes	A set of one or more flags that specify different play list attributes, such as a "deleted" indicating the play list is marked for deletion.
CreationTime	The time the play list was created.
LastModifiedTime	The last time the play list was modified.
TotalDuration	The total playtime of content on the play list.
Author	The author of the play list.
Genre	The genre or category of content on the play list.
Copyright	Copyright information for the content on the play list.

[0069] PlaylistFromAlbum Object

Property Name	Description
Name	The name of the play list.

[0070] Track Object

Property Name	Description
Filename	The filename of the track on the hard drive.
Title	The title of the track.
Subtitle	Subtitle information for the track.
Copyright	Copyright information for the track.
FileType	Type of file (e.g., MP3 or WMA).
Time	The time the file was created.
Date	The date the file was created.
Language	The language the content of the track is in.
MediaType	The type of media the track is on.
PartInSet	Indicates which part of a set the track is on (e.g., which disc of a multiple-disc set).
EncodedBy	Name of the person who ripped the track.
Publisher	The publisher of the media the track is on.
TrackNumber	The number of the track on the media.
RecordingDates	The recording date(s) of the track.
NetRadioStation	The name of an Internet-accessible radio station where the track is received from.
NetRadioOwner	The owner of an Internet-accessible radio station where the track is received from.
Year	Year of original recording of the track.
BeatsPerMinute	The number of beats per minute in the content of the track.
MusicalKey	The musical key the content of the track is in.
LengthInMilliseconds	The length of the track (in milliseconds).
Album	The album the track is on.
OriginalAlbum	Name of album the track first appeared on.
OriginalFilename	First filename of the track (same as the Filename if it has not been renamed since created).
OriginalReleaseYear	The year the track was original released in.
FileOwner	Name of person with rights to this file.
Size	The size (e.g., in frames) of the track on the media.
ISRC	The International Standard Recording Code.
Software	Name of the software that ripped the track.
Rating	A rating for the track.
Comment	Comments regarding the track.
CDID	A hashed value of the disc identifier, allowing for faster lookups.
TOC	The disc identifier (based on the table of contents information) for the media storing the track.
Genre	The genre or category of the track.
Ripped	Whether the track has been ripped to a file.
OriginalIndex	The position on the album that the track appeared on.
LastEditedBy	An identification of the last entity (either the name of the meta data provider or "user") to edit any property associated with the object.
MediaTypeId	An identifier of the media type the track is on.
Attributes	A set of one or more flags that specify different play list attributes, such as a "deleted" indicating the play list is marked for deletion.
PlayCount	The number of times the track has been played.
Bitrate	The encoding rate of the file.
Protected	Flag indicating whether digital rights management (DRM) is used on the file.

-continued

Property Name	Description
CreationTime	The time the file was first added to the database.
LastModifiedTime	The last time any attribute of the track was changed in the database.
Composer	The composer of the track.
CoverArtSmall	A small graphic of the cover art of the media including the track.
CoverArtLarge	A larger graphic of the cover art of the media including the track.
TrackedFilename	An identifier of the file in the file system of the operating system using the database, allowing the file to be searched if it is not accessible by filename.
Lyrics	The lyrics for the content of the track.

[0071] Batch Object

Property Name	Description
CDID	A hashed value of a disc identifier, allowing for faster lookups.
NumTracks	A number of tracks on the disc.
TOC	A disc identifier.

[0072] Link Object

Property Name	Description
Name	Friendly display name of a link.
URL	URL of the linked content.

[0073] Picture Object

Property Name	Description
Caption	A text description for a picture.
URL	A uniform resource locator of where the picture is located.
TrackedLink	An identifier of the picture in the file system of the operating system using the database, allowing the file to be searched if it is not accessible by filename.
Thumbnail	A thumbnail image for the picture.

[0074] CustomData Object

Property Name	Description
Name	The name of the object.
NumericValue	A numerical value for the object.
TextValue	A text value for the object.
DateValue	A date value for the object.
BinaryValue	A binary value for the object.
UnicodeTextValue	A unicode text value for the object.

[0075] ChildListEntry Object

Property Name	Description
ObjectType	GUID of the object type for the object.
ObjectInstanceID	Actual ID of the object.
ListPosition	Position of the media object in the play list.
ListInstanceID	Instance ID of the media object in the play list object.

[0076] DVD Object

Property Name	Description
Title	The title of the DVD.
Genre	The genre or category of the content on the DVD.
Director	The director of the content on the DVD.
ReleasedBy	The entity that released the DVD.
ProducedBy	The producer of the content on the DVD.
Studio	The studio that owns the content on the DVD.
Duration	The total playback time of the content on the DVD (or a portion of the content, such as a movie).
Rating	The rating of the content on the DVD.
RatingOrg	The organization that gave the rating for the content.
Copyright	Copyright information for the content on the DVD.
Comment	Comments regarding the DVD.
ReleaseDate	The release date of the DVD.
URL	Locator (URL) of the DVD for rendering.
ID	DVD identifier generated from a CRC 64 of portions of the DVD content.
LeadPerformers	The names of the lead performers in the content on the DVD.
BuyNow	Information on how to purchase the DVD.
MoreInfo	A URL to a web page with more information about the DVD.
CoverArtSmall	A small graphic of the cover art of the DVD.
CoverArtLarge	A larger graphic of the cover art of the DVD.
MPAARating	A rating assigned by the Motion Picture Association of America (MPAA) to the content of the DVD.

[0077] DVDTITLE Object

Property Name	Description
Name	The name of the title (the primary content) of a DVD.
Genre	The genre or category of the title.
Director	The director of the title.
ReleasedBy	The entity that released the title.
ProducedBy	The producer of the title.
Studio	The studio that owns the title.
Duration	The total playback time of the title.
Rating	The rating of the title.
RatingOrg	The organization that gave the title the rating.
Copyright	Copyright information for the title.
Comment	Comments regarding the title.
ReleaseDate	The release date of the title.
LeadPerformers	The names of the lead performers in the title.
MPAARating	A rating assigned by the Motion Picture Association of America (MPAA) to the title.
ID	DVD identifier generated from a CRC 64 of portions of the DVD content.

[0078] DVDChapter Object

Property Name	Description
Name	The name of a chapter on a DVD.
Genre	The genre or category of the chapter.
Director	The director of the chapter.
ReleasedBy	The entity that released the chapter.
ProducedBy	The producer of the chapter.
Studio	The studio that owns the chapter.
Duration	The total playback time of the chapter.
Rating	The rating of the chapter.
RatingOrg	The organization that gave the chapter the rating.
Copyright	Copyright information for the chapter.
Comment	Comments regarding the chapter.
ReleaseDate	The release date of the chapter.
LeadPerformers	The names of the lead performers in the chapter.
MPAA Rating	A rating assigned by the Motion Picture Association of America (MPAA) to the chapter.
ID	DVD identifier generated from a CRC 64 of portions of the DVD content.

[0079] Factoid Object

Property Name	Description
Fact	The content (e.g., fact or comment) of the factoid.

[0080] FIG. 5 is a flowchart illustrating an exemplary process for rendering media content meta data. The process of FIG. 5 is carried out by meta data manager 124 of FIG. 1, and may be implemented in software. The process of FIG. 5 is discussed with reference to a CD, although other types of media may alternatively be used.

[0081] Initially, a disc is inserted to the computer (act 240). The disc is then scanned for its table of contents information (act 242) and a disc identifier generated based on the table of contents information (act 244).

[0082] A database lookup is then performed based on the disc identifier (act 246), to determine whether the disc identifier exists in the database. In the example of FIG. 3, this can be accomplished by checking the value for each entry in properties table 206 that has a property ID for a disc identifier. If any of the values are the same as the generated disc identifier, then the disc identifier already exists in the database; otherwise, the disc identifier does not already exist in the database. The result of this lookup is then used to determine the appropriate course of action (act 248).

[0083] If the disc identifier is in the database, then the meta data corresponding to the disc identifier is obtained from the database (act 250) and rendered, or otherwise made available, to the user (act 252). Returning to act 248, if the disc identifier is not in the database, then a database representation is created for the disc (act 254). This database representation includes the data that will be placed in the tree structure (e.g., the disc identifier and an indication of each track on the disc). The database representation is then converted into tree form (act 256), with the disc identifier as the root node and a child node for each track on the disc. The unknown meta data for each node object is initially identified as “unknown” (some meta data, such as disc identifier, is known and can be stored in the database). A remote server

is then queried for the disc meta data (act 258). In the illustrated example, this querying is performed by communicating the disc identifier to a remote server(s), which in turn accesses the meta data it stores for any meta data corresponding to the disc identifier, and returns that meta data to the requesting computer. Processing then continues with walking the tree in order, updating any changed meta data (act 260) to replace the values of “unknown” with the values received from the server, and rendering the meta data (act 252).

[0084] It should be noted that the remote server may not always be accessible. For example, the client 102 of FIG. 1 may not always be coupled to network 108 (e.g., the Internet), and thus not be able to access servers 104 and 106. In these situations, meta data manager 124 keeps the values of “unknown” for the unknown meta data and then accesses server 104 or 106 when the client is coupled to network 108. At this point, the meta data is obtained from servers 104 and/or 106, and the local meta data store updated appropriately. In one implementation, meta data manager 124 maintains a separate record (e.g., in a separate file) of disc identifiers for CDs that were added to the database when servers 104 and 106 were not accessible to client 102. Thus, meta data manager 124 can readily ascertain which meta data it needs from servers 104 and 106. Alternatively, no such separate record may be maintained, and the database may be searched to identify “unknown” values and determine, based on the tree structure, which disc identifiers correspond to the needed meta data.

[0085] FIG. 6 is a flowchart illustrating an exemplary process for updating media content meta data. The process of FIG. 6 is carried out by meta data manager 124 of FIG. 1, and may be implemented in software.

[0086] Initially, a user request to change the meta data is received (act 280), which includes an indication of the change the user would like to make (for example, what new data the user would like to add). The root object corresponding to the meta data change is then identified (act 282), and selected as the initial object for analysis (act 284). A determination is then made as to whether the selected object is affected by the request (act 286). An object is affected by the request if the object has meta data associated with it that corresponds to the user’s request. For example, the root disc object may have been affected if the user requests to change the artist name of a CD, but not if the user requests to change the title of a track on the CD.

[0087] If the selected object is affected by the request, then the meta data associated with the selected object is updated based on the request (act 288). In one implementation, this updating comprises overwriting previous meta data with the meta data received as part of the user request. A check is then made as to whether any additional objects are to be analyzed (act 290). In one implementation, file manager 124 analyzes every object in the tree to determine whether it is affected by the request. If there are one or more additional objects to analyze, then one of the additional objects is selected (act 292) and the process returns to act 286. However, if there are no more objects to analyze, then the updating process ends (act 294).

[0088] The following example illustrates the process of updating media content data of FIG. 6. Assume that a user changes the title for a song (track) on a CD that is repre-

sented by track object **154** of FIG. 2. Meta data manager **124** begins with disc object **150** and does not change any meta data associated with disc object **150**. However, track object **154** is affected by the user's requested change, so the title meta data associated with track object **154** is changed to identify the new title. Similarly, each of local file objects **160** and **162** are affected by the user's requested change, so the title meta data associated with each of file objects **160** and **162** are changed to identify the new title.

[0089] FIG. 7 is a flowchart illustrating an exemplary process for generating meta data for new media. The process of FIG. 7 is carried out by meta data manager **124** of FIG. 1, and may be implemented in software. The process of FIG. 7 is discussed with reference to a CD, although other types of media may alternatively be used.

[0090] Many commonly-available computer systems allow a user to generate his or her own media having whatever content he or she desires. For example, a device commonly referred to as a CDROM burner allows a user to create his or her own CDs with audio tracks of his or her choosing. This created CD can then be played in virtually any conventional CD drive. However, because the CD is a user-created CD, even though it may be created based on tracks from other publicly available CDs, its table of contents and thus its disc identifier will be different, and remote servers will not have meta data for the CD.

[0091] Meta data manager **124** solves this problem by communicating with the module that is managing the creation of the new CD (e.g., content player **122**). The module managing creation of the new CD knows the identity of the tracks being stored on the new CD. Meta data manager **124** uses this track identification information to access the local meta data store and create new meta data. This process is illustrated in FIG. 7.

[0092] Initially, a notification of a newly created disc is received (act **300**). The module managing creation of the new disc notifies meta data manager **124** that the new disc is being created. Once the new disc is created, meta data manager **124** accesses the table of contents information for the new disc (act **302**). A disc identifier is then generated based on the table of contents information (act **304**), analogous to act **244** of FIG. 5.

[0093] A new root node is then created for the new disc in the local meta data store (act **306**). New children nodes are also created (act **308**) based on the contents of the disc. For each child (track) node, the manager **124** accesses the meta data for the track stored in the database form the source of that track (act **310**). In this situation, the source of the track refers to the track (or file) that the user identifies as being a track that should be stored on the new CD. This meta data is then stored for the new disc (act **312**).

[0094] It should be noted that, when creating a new CD, the tracks stored on the new CD may optionally be associated with the source. In one implementation, this is accomplished by identifying each track on the new CD as a child of the original file or track. For example, if a user creates a new CD by copying a track from a previous CD X, then a new CD root node and track node for the new track are created as discussed above. Furthermore, the track for the new CD is identified in the database as a child of the track on CD X, so any subsequent changes to the meta data for that track on CD X are propagated to the meta data for the new track.

[0095] FIG. 8 illustrates a more general exemplary computer environment **400**, which can be used to implement the improved meta data management described herein. The computer environment **400** is only one example of a computing environment and is not intended to suggest any limitation as to the scope of use or functionality of the computer and network architectures. Neither should the computer environment **400** be interpreted as having any dependency or requirement relating to any one or combination of components illustrated in the exemplary computer environment **400**.

[0096] Computer environment **400** includes a general-purpose computing device in the form of a computer **402**. Computer **402** can be, for example, any of computing devices **102**, **104**, or **106** of FIG. 1. The components of computer **402** can include, but are not limited to, one or more processors or processing units **404**, a system memory **406**, and a system bus **408** that couples various system components including the processor **404** to the system memory **406**.

[0097] The system bus **408** represents one or more of any of several types of bus structures, including a memory bus or memory controller, a peripheral bus, an accelerated graphics port, and a processor or local bus using any of a variety of bus architectures. By way of example, such architectures can include an Industry Standard Architecture (ISA) bus, a Micro Channel Architecture (MCA) bus, an Enhanced ISA (EISA) bus, a Video Electronics Standards Association (VESA) local bus, and a Peripheral Component Interconnects (PCI) bus also known as a Mezzanine bus.

[0098] Computer **402** typically includes a variety of computer readable media. Such media can be any available media that is accessible by computer **402** and includes both volatile and non-volatile media, removable and non-removable media.

[0099] The system memory **406** includes computer readable media in the form of volatile memory, such as random access memory (RAM) **410**, and/or non-volatile memory, such as read only memory (ROM) **412**. A basic input/output system (BIOS) **414**, containing the basic routines that help to transfer information between elements within computer **402**, such as during start-up, is stored in ROM **412**. RAM **410** typically contains data and/or program modules that are immediately accessible to and/or presently operated on by the processing unit **404**.

[0100] Computer **402** may also include other removable/non-removable, volatile/non-volatile computer storage media. By way of example, FIG. 8 illustrates a hard disk drive **416** for reading from and writing to a non-removable, non-volatile magnetic media (not shown), a magnetic disk drive **418** for reading from and writing to a removable, non-volatile magnetic disk **420** (e.g., a "floppy disk"), and an optical disc drive **422** for reading from and/or writing to a removable, non-volatile optical disc **424** such as a CD-ROM, DVD-ROM, or other optical media. The hard disk drive **416**, magnetic disk drive **418**, and optical disc drive **422** are each connected to the system bus **408** by one or more data media interfaces **426**. Alternatively, the hard disk drive **416**, magnetic disk drive **418**, and optical disc drive **422** can be connected to the system bus **408** by one or more interfaces (not shown).

[0101] The various drives and their associated computer-readable media provide non-volatile storage of computer

readable instructions, data structures, program modules, and other data for computer 402. Although the example illustrates a hard disk 416, a removable magnetic disk 420, and a removable optical disc 424, it is to be appreciated that other types of computer readable media which can store data that is accessible by a computer, such as magnetic cassettes or other magnetic storage devices, flash memory cards, CD-ROM, digital versatile discs (DVD) or other optical storage, random access memories (RAM), read only memories (ROM), electrically erasable programmable read-only memory (EEPROM), and the like, can also be utilized to implement the exemplary computing system and environment.

[0102] Any number of program modules can be stored on the hard disk 416, magnetic disk 420, optical disc 424, ROM 412, and/or RAM 410, including by way of example, an operating system 426, one or more application programs 428, other program modules 430, and program data 432. Each of such operating system 426, one or more application programs 428, other program modules 430, and program data 432 (or some combination thereof) may implement all or part of the resident components that support the distributed file system.

[0103] A user can enter commands and information into computer 402 via input devices such as a keyboard 434 and a pointing device 436 (e.g., a "mouse"). Other input devices 438 (not shown specifically) may include a microphone, joystick, game pad, satellite dish, serial port, scanner, and/or the like. These and other input devices are connected to the processing unit 404 via input/output interfaces 440 that are coupled to the system bus 408, but may be connected by other interface and bus structures, such as a parallel port, game port, or a universal serial bus (USB).

[0104] A monitor 442 or other type of display device can also be connected to the system bus 408 via an interface, such as a video adapter 444. In addition to the monitor 442, other output peripheral devices can include components such as speakers (not shown) and a printer 446 which can be connected to computer 402 via the input/output interfaces 440.

[0105] Computer 402 can operate in a networked environment using logical connections to one or more remote computers, such as a remote computing device 448. By way of example, the remote computing device 448 can be a personal computer, portable computer, a server, a router, a network computer, a peer device or other common network node, and the like. The remote computing device 448 is illustrated as a portable computer that can include many or all of the elements and features described herein relative to computer 402.

[0106] Logical connections between computer 402 and the remote computer 448 are depicted as a local area network (LAN) 450 and a general wide area network (WAN) 452. Such networking environments are commonplace in offices, enterprise-wide computer networks, intranets, and the Internet.

[0107] When implemented in a LAN networking environment, the computer 402 is connected to a local network 450 via a network interface or adapter 454. When implemented in a WAN networking environment, the computer 402 typically includes a modem 456 or other means for estab-

lishing communications over the wide network 452. The modem 456, which can be internal or external to computer 402, can be connected to the system bus 408 via the input/output interfaces 440 or other appropriate mechanisms. It is to be appreciated that the illustrated network connections are exemplary and that other means of establishing communication link(s) between the computers 402 and 448 can be employed.

[0108] In a networked environment, such as that illustrated with computing environment 400, program modules depicted relative to the computer 402, or portions thereof, may be stored in a remote memory storage device. By way of example, remote application programs 458 reside on a memory device of remote computer 448. For purposes of illustration, application programs and other executable program components such as the operating system are illustrated herein as discrete blocks, although it is recognized that such programs and components reside at various times in different storage components of the computing device 402, and are executed by the data processor(s) of the computer.

[0109] Computer 402 typically includes at least some form of computer readable media. Computer readable media can be any available media that can be accessed by computer 402. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. Computer storage media includes volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile discs (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other media which can be used to store the desired information and which can be accessed by computer 402. Communication media typically embodies computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. Combinations of any of the above should also be included within the scope of computer readable media.

[0110] The invention has been described herein in part in the general context of computer-executable instructions, such as program modules, executed by one or more computers or other devices. Generally, program modules include routines, programs, objects, components, data structures, etc. that perform particular tasks or implement particular abstract data types. Typically the functionality of the program modules may be combined or distributed as desired in various embodiments.

[0111] For purposes of illustration, programs and other executable program components such as the operating system are illustrated herein as discrete blocks, although it is

recognized that such programs and components reside at various times in different storage components of the computer, and are executed by the data processor(s) of the computer.

[0112] Alternatively, the invention may be implemented in hardware or a combination of hardware, software, and/or firmware. For example, one or more application specific integrated circuits (ASICs) could be designed or programmed to carry out the invention.

CONCLUSION

[0113] Although the description above uses language that is specific to structural features and/or methodological acts, it is to be understood that the invention defined in the appended claims is not limited to the specific features or acts described. Rather, the specific features and acts are disclosed as exemplary forms of implementing the invention.

1. A method comprising:

maintaining meta data associated with a plurality of pieces of content stored on a plurality of pieces of media;

maintaining meta data associated with another plurality of pieces of content, wherein each of the other plurality of pieces of content is a ripped version of a respective one of the plurality of pieces of content in the corresponding one of the plurality of pieces of content; and

altering the meta data associated with one of the other plurality of pieces of content in response to the meta data associated with the corresponding one of the plurality of pieces of content being altered.

2. A method as recited in claim 1, wherein each of the plurality of pieces of content is a track of a compact disc (CD).

3. A method as recited in claim 1, wherein each of the other plurality of pieces of content is stored on a local hard drive.

4. A method as recited in claim 1, further comprising:

maintaining a set of disc identifiers;

for each disc identifier, maintaining a set of children objects, wherein each of the children objects corresponds to one of the plurality of pieces of content; and

for each of one or more of the individual children objects, maintaining a set of additional objects, wherein each additional object corresponds to one of the other plurality of pieces of content.

5. One or more computer-readable memories containing a computer program that is executable by a processor to perform acts of:

maintaining meta data associated with a plurality of pieces of content stored on a plurality of pieces of media;

maintaining meta data associated with another plurality of pieces of content, wherein each of the other plurality of pieces of content is a ripped version of a respective one of the plurality of pieces of content in the corresponding one of the plurality of pieces of content; and

altering the meta data associated with one of the other plurality of pieces of content in response to the meta

data associated with the corresponding one of the plurality of pieces of content being altered.

6. One or more computer-readable storage media having stored thereon a plurality of instructions that, when executed by one or more processors of a computer, causes the one or more processors to perform the following acts:

receiving an identification of a change to be made to meta data corresponding to a particular piece of content on a particular piece of media;

changing, based on the identification, meta data corresponding to the particular piece of content;

identifying one or more other pieces of content associated with the particular piece of content, wherein the other pieces of content are ripped versions of the particular piece of content; and

changing, based on the identification, meta data corresponding to the one or more other pieces of content.

7. One or more computer-readable storage media as recited in claim 6, wherein the particular piece of content on the particular piece of media comprises a particular song on a particular compact disc (CD).

8. One or more computer-readable storage media as recited in claim 6, wherein the identification includes new meta data and wherein changing the meta data corresponding to the particular piece of content comprises overwriting any previous meta data corresponding to the particular piece of content with the new meta data.

9. One or more computer-readable storage media as recited in claim 6, wherein the particular piece of content comprises an audio track and wherein the other pieces of content comprise different versions of the audio track.

10. One or more computer-readable storage media as recited in claim 6, wherein original meta data associated with the particular piece of content comprises meta data received from a remote server, and wherein the change to be made to the meta data corresponding to the particular piece of content comprises new meta data received from a user.

11. One or more computer-readable storage media as recited in claim 6, wherein the plurality of instructions further causes the one or more processors to perform the following acts:

maintaining an indication of a source of the change to the meta data corresponding to the particular piece of content;

maintaining an indication of a source of the change to the meta data corresponding to each of the one or more other pieces of content;

receiving an identification of another change to be made to meta data corresponding to the particular piece of content;

checking whether the source of the change to the meta data corresponding to the particular piece of content was a user;

changing, based on the identification of the other change, meta data corresponding to the particular piece of content if the source of the change to the meta data corresponding to the particular piece of content was the user;

checking whether the source of the change to the meta data corresponding to the one or more other pieces of contents was the user; and

changing, based on the identification of the other change, meta data corresponding to the one or more other

pieces of content if the source of the change to the meta data corresponding to the one or more other pieces of contents was the user.

* * * * *