



(51) **International Patent Classification:**
G06Q 30/06 (2012.01) G06Q 20/38 (2012.01)

(21) **International Application Number:**
PCT/US20 18/032621

(22) **International Filing Date:**
15 May 2018 (15.05.2018)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
17176422.8 16 June 2017 (16.06.2017) EP

(71) **Applicant: MASTERCARD INTERNATIONAL INCORPORATED** [US/US]; 2000 Purchase Street, Purchase, NY 10577 (US).

(72) **Inventors: TUTTE, Ramson;** 16 The Green Moyglare Hall, Kildare, W23 W0V6 (IE). **LONE, Ishfaq;** 1, Sheils Court Main Street, Rathcoole, Dublin 24 (IE). **MORA, Marcia;** 108 The Jade, The Grange Brewery Road, Stillorgan, Dublin 18 (IE).

(74) **Agent: DOBBYN, Colm J.;** Mastercard International Incorporated, 2000 Purchase Street, Purchase, NY 10577 (US).

(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) **Title:** A SERVER FOR PROCESSING A TAB FOR A CUSTOMER AT A MERCHANT PREMISES

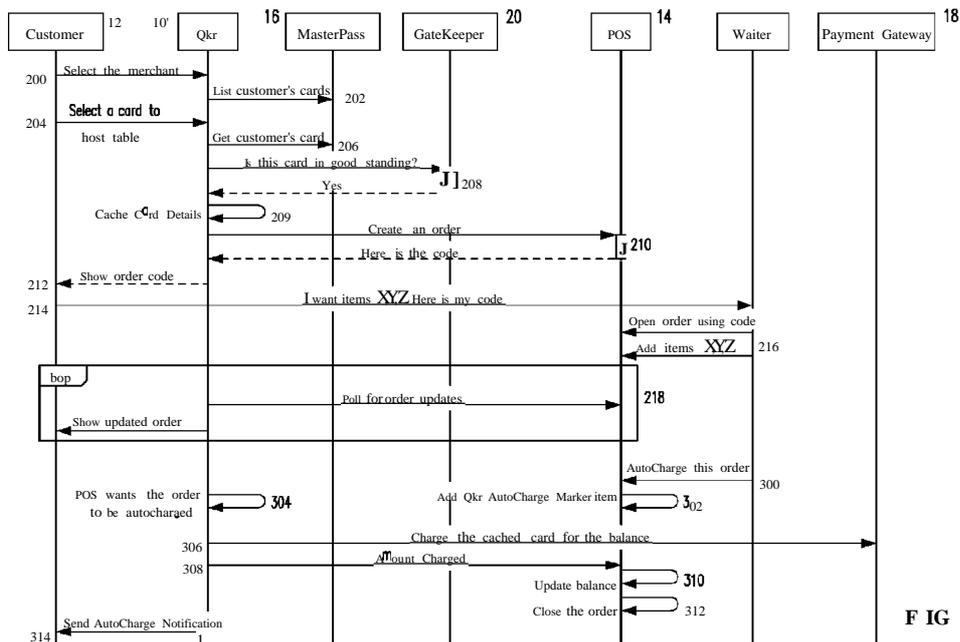


FIG. 3

(57) **Abstract:** A server (10) for processing a tab for a customer at a merchant premises, is configured to: provide a list of candidate merchant premises to a customer mobile device (12); and receive (200) from the customer mobile device, a signal indicating a user selection of one of the candidate merchant premises on the list. The server receives (202-206) payment card details for the customer mobile device; obtain (210) a specific code for a tab at the selected merchant premises; and send (212) to the customer mobile device the specific code. The server receives (216) a signal from a Point of Sale, POS, terminal (14) of the selected merchant premises, indicating entry of the specific code into the PoS terminal; and based on the specific code, associates the customer mobile device with an open tab maintained by the POS terminal, the open tab comprising a respective identifier and an amount for at least one purchase of the customer at the selected merchant premises. The server receives (218) from the POS terminal the at least one identifier and amount for



WO 2018/231407 A1

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

each purchase of the open tab; and responsive to one of the received identifiers comprising a specific identifier and a specific amount indicating that a user of the POS terminal wishes to close the tab, the server requests (306) payment of at least a portion of a balance of the open tab from a payment gateway (18) using the payment card details.

A SERVER FOR PROCESSING A TAB FOR A CUSTOMER AT A
MERCHANT PREMISES

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of, and priority to, European Patent
5 Application No. 17176422.8 filed on June 16, 2017. The entire disclosure of the
above application is incorporated herein by reference.

FIELD

The present invention relates to a server for processing a tab for a
customer at a merchant premises.

10 BACKGROUND

US9477995, Quick Check Ltd providers of MyCheck, discloses a pay-
at-table (PAT) system allowing a customer to perform self-checkout at a real-world
non-virtual store or restaurant or other business establishment that the customer is
visiting. The customer pre-defines an electronic payment method. The customer visits
15 the business establishment, and the system generates a unique user-specific code that
is a function of the time, the location, and the specific customer. The code is displayed
on the mobile device of the customer, which is then shown to an employee of the
business establishment, who then enters the unique code into a Point of Sale (POS)
terminal; thereby generating an association between an ongoing open tab of the
20 customer, and the mobile device of the customer. The customer is able to perform
self-checkout of the open tab, without requiring action on behalf of the business
establishment.

Referring to Figure 1, Qkr is a PAT system from Mastercard and is
implemented in with an application server 10 which interacts with an application
25 installed on a customer device 12 as well as a POS terminal in a merchant premises.
The customer device 12 is typically a smartphone or similar device running an
application downloaded from an app store such as are provided to users of Apple iOS
or Android devices.

Again, when the customer wishes to order, they open the application
30 on their device 12 and select the merchant or specific merchant premises from a
menu, for example, as shown in Figure 4. Typically, the menu of available merchants

is provided from the server 10 to the customer device 12 application as a function of the location of the customer device 12 to limit the number of choices for the customer and to make them relevant. Once the customer selects the merchant premises, they are provided with a specific code, for example, a 4 digit code such as shown in Figure 6, which they provide to a waiter when they enter the merchant premises. The waiter now enters the code into an application running on a Point of Sale (POS) device 14 in the merchant premises. The information can be entered directly by the waiter on a central POS device 14 in the merchant premises; or the waiter may be equipped with a mobile device which communicates with a central POS device 14 in the merchant premises. Nonetheless, once the waiter associates the user's code with a tab for a table in the premises in the POS application, the POS 14 can now notify the Qkr server 10 of any orders for the table entered by the waiter through the POS application and keep a running total of the customer's orders. The Qkr server 10 can provide this information to the customer device 12 so that the application can display the customer's orders and running total for the customer.

Using a PAT application such as Qkr, the customer can close out their order whenever they wish - even after leaving the merchant premises. One way to do so is for the user to select a payment card whose details can be retrieved by the Qkr server 10 from the customer's electronic wallet, in this case, Masterpass from Mastercard. The payment card details can comprise a 16- or 19- digit Primary Account Number (PAN), expiry date and Card Verification Code (CVC) for a customer payment card; or alternatively a Virtual Card Number (VCN) for example, for a limited use card; or a payment token can be provided.

In any case, the payment details can be provided by the Qkr server 10 to a payment gateway 18 such as provided by Mastercard, Stripe etc. If the payment is accepted, the Qkr server 10 can close off the tab and provide a receipt for payment to the customer device 12.

It will be appreciated that in such scenarios, as in real-world scenarios where a customer only proffers their card after availing of a service, customers at times may not make a payment. While this may be motivated by fraudulent reasons as in real-world scenarios, this may also happen because customers expect a PAT system to automatically charge them, as other applications for example taxi applications may do.

It is of course desirable for merchants to be able to charge customers in such a scenario, but one particular problem which needs to be overcome is that the application server 10 needs to inter-operate with a number of different forms of POS and POS application.

5 From the perspective of the server 10, POS systems generally fall into three categories:

Category A: The POS 14 makes calls to the server 10. The POS 14 never accepts calls from the server 10 or any 3rd parties

10 Category B: The POS 14 receives calls from the server 10. The POS 14 never makes calls to the server 10 or any 3rd parties.

Category C: The POS 14 makes calls to the server 10 and at times receives calls from the server 10.

Although, having to do so for a variety of different POS systems such as those provided by Comtrex Systems, it is possible to re-engineer POS systems of
15 category A and C so that they can make a call to the server 10 to close off a tab where the customer has left the premises without paying. Note that in this case, the server 10 might then have to secure the customer's selection of a payment card and authorisation to complete the transaction and this could involve significant re-working of the reconciliation systems for any given POS system with which the server 10 is to
20 inter-operate while waiting for this selection/authorisation - especially if customers were reluctant to provide this.

This would still not solve the problem for POS systems in category B such as those provided by Micros Systems Inc. (now known as Oracle Hospitality).

It is an object of the present invention to mitigate these problems.

25 SUMMARY

According to one aspect of the present invention, there is provided a server for processing a tab for a customer at a merchant premises according to claim
1.

30 In a second aspect there is provided a server for processing a tab for a customer at a merchant premises according to claim 3.

In a third aspect there is provided a POS terminal according to claim
11.

In a fourth aspect there is provided a POS terminal according to claim 12.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram illustrating the components involved in a payment processing system according to an embodiment of the invention;

Figure 2 is a diagram illustrating a first method flow performed in the system of Figure 1;

Figure 3 is a flow diagram illustrating a second method flow performed in the system of Figure 1; and

Figures 4 to 7 are screen grabs of a customer device application employed within the methods of Figures 2 and 3.

DESCRIPTION OF THE EMBODIMENTS

Referring now to Figure 2, in an embodiment of the present invention, a customer using a PAT application on device 12 selects a merchant from a menu of possible merchants, such as shown in Figure 4, as in existing implementations of the Qkr application, step 200.

However, as part of this process, the application now prompts the user to indicate if they are willing to be billed automatically in the event that they do not initiate payment from their device 12. If the customer agrees, the Qkr server 10' obtains the user's payment card details. This could be performed manually with the user entering card details, but in the present application, this is performed by the Qkr server 10' first requesting a list of customer's cards from an electronic wallet for example, of the type provided by Masterpass from Mastercard, step 202.

The Masterpass server 16 returns a list of cards to the Qkr server 10' which in turn presents these to the user for selection, step 204. Once a card has been selected by the user, the Qkr server 10' then requests the details for the card from the Masterpass server 16, step 206. As before, the payment card details can comprise a 16- or 19- digit Primary Account Number (PAN), expiry date and Card Verification Code (CVC) for a customer payment card; or alternatively a Virtual Card Number (VCN) for example, for a limited use card; or a payment token can be provided.

The Qkr server 10' can now check if the card details are valid by sending a request to a gatekeeper server 20 for example of the type provided by Mastercard or Kount, step 208. Gatekeeper servers are designed to prevent credit card fraud by enabling a merchant to check whether or not a card is valid. They essentially
5 comprise a rules based engine for identifying fraudulent or potentially invalid payment card use and/or databases which can store lists of lost, blocked or stolen payment cards. These rules can include rules for analysing whether a payment card of a particular type, even though valid, can be accepted by a given merchant.

In any case, if the gatekeeper server 20 indicates the selected payment
10 card is valid, the process can continue with the Qkr server having cached the payment card details (not shown in Figure 2, step 209 in Figure 3). Otherwise, the user needs to return to step 202/204 to select another card.

Note that while validating a payment card in advance of providing a service represents a reversal of the normal manner in which real-world payments are
15 performed, it does not in itself solve the problem identified above where payment is not initiated by a user of the customer device 12.

In addition to or as an alternative to card validation using the gatekeeper server 20, it is also possible at this stage for the Qkr server 10' to pre-authorise an amount to be charged to the payment card with a payment gateway - so
20 improving the chances of a successful payment in due course.

In any case, the procedure can now continue as before with the Qkr server 10' signalling to the POS 14 that an order is to be created. A code is then generated and this is shared between the POS 14 and Qkr server 10', step 210. Note that the code can be generated either on the POS 14 or the Qkr server 10'. The code
25 can comprise a 4 digit code as described above, but it will also be seen that codes of any length, alpha-numeric codes or codes such as Quick Response (QR) codes to be displayed on the customer device 12 and which can be scanned by a scanner of the POS device 14 (or a client of the POS device 14) can be employed.

In the example of Figure 2, the POS 14 is of a category B type where it
30 is polled/interrupted by the Qkr server 10'. However, it will be seen that these steps can equally be performed by the POS 14 polling/interrupting the Qkr server 10'.

The Qkr server 10' now provides the code to the customer device 12, step 212 and when the user is in the merchant premises and engages a waiter/server,

they can now communicate the code along with their order (items X,Y,Z) to the waiter, by showing them a screen display such as illustrated in Figure 6, step 214.

The waiter can now either using a hand-held device in communication with the POS 14 or directly using the POS 14 enter the code, and the order, step 216.

5 Again in this case, because a Category B POS 14 is being employed, the Qkr server 10' continually polls/interrupts the POS 14 for order updates and provides to respective customer devices details of any updates received from the POS 14 where these can be displayed for the customer. In some implementations this polling functionality can be performed by a dedicated server which notifies the core
10 Qkr server 10' when it detects any changes to an order at a POS 14.

At any time, the customer can decide they wish to pay their bill - either partly or fully - by selecting a payment option on the customer device application, step 222.

In response to receiving the payment request, the Qkr server 10', with
15 the payment card details obtained previously at step 206, can connect to a payment gateway 18 to request payment for the amount selected by the user, step 224.

If the payment is authorised, the Qkr server 10' can notify the POS 14, step 226, and the paid amount can be deducted by the POS 14 from the order total, step 228. If the order balance is now zero, the waiter can close off the order, step 230.

20 As indicated, steps 222-230 can be repeated until and order balance is zero.

Although not mentioned above, where the customer is starting a tab, another option available for within the customer device PAT application is to join a table, see Figure 5.

25 In this case, steps 200-209 can be as before, however, instead of a new code being generated, the customer joining a table can enter the code provided to the original customer who established the order as described for steps 210-212.

This means that loop 220 can be performed not alone repeatedly by a given customers, but by a number of different customers until an order balance is
30 zero.

In any case, once an order balance is zero, the Qkr server 10' can provide a receipt to the customer device(s) 12 associated with the order, step 232.

Turning now to Figure 3, which illustrates process flow in the event that a customer decides not to initiate a payment or not to pay fully for an order.

In this case, steps 200-218 are as before and are not described further.

Now, when a waiter sees that a customer has left the premises without paying (fully) for their order, the waiter can initiate automatic charging of the order, step 300.

5 In the present application automatic charging need not be implemented with dedicated functionality, as this would require different implementation for each type of POS.

10 Instead (or possibly as well as), the application is based on the observation that POS systems are generally based on providing a user interface displaying menu items for selection by a waiter, each item having an associated charge, so that when a menu item is selected for a given table, it is added to the order for the table.

15 In embodiments of the present invention, a menu item labelled "Automatic Charge" or equivalent is made available to a waiter (or manager) for any given table within the POS application UI. The menu item is associated with a special identifier, for example, "QkrAutoCharge" and with a specific amount, in this example, "0.00" - as this has no effect on the amount of the bill. It will be appreciated nonetheless that the specific amount can be a null value or indeed any value that does not have an effect on the amount of the bill, for example, an amount so large that it
20 would not be treated as valid.

 When such a UI menu item is selected and added to the order, step 302, regardless of the category of POS 14 being employed, it will be picked up by the Qkr Server 10' either in response to polling/interrupting a category B type POS 14 or in response to a category A or C type POS actively indicating the order update to the
25 Qkr Server 10'.

 Now when the Qkr Server 10' identifies an order item containing the special identifier "QkrAutoCharge" with the specific amount 0.00, step 304, the Qkr server 10' can attempt to charge the card selected by the original customer at step 204 for the balance remaining on the order using gateway 18, step 306.

30 If the payment is authorised by the gateway 18, the Qkr server 10' can notify the POS 14 that the payment has been made, step 308, and the amount can be used to update the balance for the order, step 310.

If the balance is zero, the order can be closed, step 312 and an autocharge notification can be provided to the customer device(s) associated with the order as before, step 314.

5 Note that the flows of Figures 2 and 3 can occur during processing a given tab where a customer or customers only part pay a balance on a tab. Thus, if the flow of Figure 2 stops with an outstanding balance on a tab after one or more customers have only part paid a tab, then the card for the customer who originally created the tab (rather than just joining a table) can be auto-charged for the balance of the tab, by performing steps 300-314.

10 Note that this approach means that steps 202-209 need not be performed in advance for customers who join a table. However, if they are, this means that if automatic charging, step 306, is not successful using the payment details for the original customer, it would be possible for the Qkr Server 10' to continue by attempting to secure payment using the details/authorisation cached for each customer
15 joining a table.

It will be appreciated that while the above method protects merchants from customers who do not pay for goods/services, it may also be necessary to control and/or monitor merchants' use of automatic charging. Thus, the Qkr Server 10' can monitor the use of automatic charging by merchants and if for example, more than a
20 threshold number of automatic charging requests are made by a merchant in a given period, they may be denied use of the facility. Similarly if an automatic charge request is made by a merchant too long after an order had been initiated, step 210, they may be denied use of the facility.

It will be seen that one advantage of the above described approach is
25 that it can be implemented on all categories of POS device listed above, without requiring any re-engineering of the underlying POS software. Nonetheless, the solution is particularly beneficial for Category B type POS systems, where the POS 14 cannot proactively inform the Qkr Server 10' when to automatically charge for an order.

30 The use of menu items with special (reserved) identifiers and a specific charge also has other applications in a PAT environment.

For example, groups of customers may decide to order food and/or drinks in rounds.

In this case, after receiving an order for items X,Y,Z and entering the order at the POS 14, step 216, a waiter can select a "Round" menu item. In response to such a selection an item such as "QkrRound=0.00" can be added to an order.

5 It will be seen that this functionality could also be built into other aspects of the POS application and for example, if a waiter selects an "Order" button from a POS application user interface, UI, this could cause a "QkrRound=0.00" item to be added to an order.

10 Now when such an order item is subsequently picked up by the Qkr Server 10', it enables the server to group items for a given round together and provide the order items in a grouped format for display on customer device(s) 12 associated with the order, for example, as shown in Figure 7.

Now at step 222, a user can select items grouped by round for payment and pay the sub-total accordingly at steps 224-230. Of course these items could also be automatically charged as before, if otherwise not paid for.

15 It will be appreciated that as well as for the automatic charging and round designation functions disclosed above, other special identifiers along with specific amounts can be used for extending the functionality of the POS terminal 14 and QKR server 10' as required and without needing to re-engineer POS functionality.

20 It will be seen that the above described functionality for automatic charging and round designation can be implemented on POS systems whether or not they have already been specifically engineered to implement automatic charging, such as those provided by Comtrex Systems.

25 Finally, it will be seen that as well as being performed by an independent Qkr server 10' providing a single portal to various premises operated by different independent merchants, the functionality can also be incorporated within a dedicated PAT application for a specific merchant. In this case, the functionality for the server 10' could be made available by an independent provider of the server 10' to a separate specific merchant server which in turn communicates with connected POS
30 terminals by exposing the required API's to the specific merchant server, so avoiding the need for the merchant to re-implement the Qkr server functionality independently. As such, the expression "server" is used in this specification to mean both a single server and groups of servers provided by one or more parties to provide the functionality described.

CLAIMS:

1. A server (10') for processing a tab for a customer at a merchant premises, the server being configured to:
- 5 provide a list of candidate merchant premises to a customer mobile device (12);
- receive (200) from the customer mobile device, a signal indicating a user selection of one of the candidate merchant premises on said list;
- 10 receive (202-206) payment card details for the customer mobile device;
- obtain (210) a specific code for a tab at the selected merchant premises;
- send (212) to the customer mobile device said specific code;
- 15 receive (216) a signal from a Point of Sale, POS, terminal (14) of said selected merchant premises, indicating entry of said specific code into said PoS terminal;
- based on the specific code, associate said customer mobile device with an open tab maintained by said POS terminal, said open tab comprising a respective identifier and an amount for at least one purchase of said customer at said selected
- 20 merchant premises;
- receive (218) from said POS terminal said at least one identifier and amount for each purchase of said open tab;
- responsive to one of said received identifiers comprising a specific identifier and a specific amount indicating that a user of said POS terminal wishes to
- 25 close said tab, request (306) payment of at least a portion of a balance of said open tab from a payment gateway (18) using said payment card details; and
- responsive to receiving notification of said payment, notify (308) said POS terminal of said payment.
- 30 2. A server according to claim 1 which is responsive to at least one of said received identifiers comprising a specific identifier and a specific amount indicating that at least one previous identifier and amount relate to a round of purchases, to group said at least one previous identifier into a round and provide an indication to said customer mobile device;

receive a request for payment of at least one round of purchases from a customer mobile device;

request (306) payment corresponding to said at least one round of purchases from a payment gateway (18) using payment card details for said

5 requesting customer mobile device; and

responsive to receiving notification of said payment, notify (308) said POS terminal of said payment.

3. A server (10') for processing a tab for a customer at a merchant
10 premises, the server being configured to:

provide a list of candidate merchant premises to a customer mobile device (12);

receive (200) from the customer mobile device, a signal indicating a user selection of one of the candidate merchant premises on said list;

15 obtain (210) a specific code for a tab at the selected merchant premises;

send (212) to the customer mobile device said specific code;

receive (216) a signal from a Point of Sale, POS, terminal (14) of said selected merchant premises, indicating entry of said specific code into said PoS

20 terminal;

based on the specific code, associate said customer mobile device with an open tab maintained by said POS terminal, said open tab comprising a respective identifier and an amount for at least one purchase of said customer at said selected merchant premises;

25 receive (218) from said POS terminal said at least one identifier and amount for each purchase of said open tab;

responsive to at least one of said received identifiers comprising a specific identifier and a specific amount indicating that at least one previous identifier and amount relate to a round of purchases, group said at least one previous identifier
30 into a round and provide an indication to said customer mobile device;

receive (222) a request for payment of at least one round of purchases from a requesting customer mobile device;

request (224, 306) payment corresponding to said at least one round of purchases from a payment gateway (18) using payment card details for said requesting customer mobile device; and

5 responsive to receiving notification of said payment, notify (226, 308) said POS terminal of said payment.

4. A server according to claim 3 configured to:
receive from a second customer mobile device a specific code
corresponding to an open tab at a merchant premises;
10 based on the specific code received from the second customer mobile device, associate said second customer mobile device with the open tab maintained by said POS terminal.

5. A server according to claim 4 wherein said requesting customer
15 mobile device is said second customer mobile device.

6. A server according to claim 3 configured to receive (202-206)
payment card details for the customer mobile device prior to sending (212) to the
customer mobile device said specific code.
20

7. A server according to claims 1, 2 or 6 further comprising one or
more of: checking the validity of said payment card details with a 3rd party service; or
pre-authorising a payment amount for said payment card, prior to sending to the
customer mobile device said specific code.
25

8. A server according to any one of claims 1 to 7 wherein said
specific amount is one of: a zero amount; a null value; or an invalid amount which
does not affect a balance for said open tab.

9. A server according to any one of claims 1 to 8 configured to
receive a geo-spatial location of a customer mobile device (12) from said customer
mobile device (12) and to provide said list of candidate merchant premises based on
their proximity to said geo-spatial location.
30

10. A server according to any one of claims 1 to 9, wherein the specific code comprises one of a numerical code; an alpha-numeric code or a Quick Response (QR) code.

5 11. A Point of Sale, POS, terminal (14) for a merchant premises comprising a point of sale application arranged to communicate with a server (10') for processing a tab for a customer at said merchant premises, the POS application being configured to:

10 open (216) a tab for a customer including receiving a specific code for a tab;

add at least one purchase of said customer at said merchant premises to said open tab, each purchase comprising a respective identifier and an amount;

15 responsive to said user of said POS terminal selecting an option that the user of said POS terminal wishes to close said tab, add (302) to said tab a specific identifier and a specific amount indicating that said user of said POS terminal wishes to close said tab;

send (218) to said server (10') said at least one identifier and amount for each purchase of said open tab;

20 receive (308) from said server (10') an indication of payment of at least a portion of said tab; and

update (310) a balance of said tab according to said payment.

25 12. A Point of Sale, POS, terminal (14) for a merchant premises comprising a point of sale application arranged to communicate with a server (10') for processing a tab for a customer at said merchant premises, the POS application being configured to:

open (216) a tab for a customer including receiving a specific code for a tab;

30 add at least one purchase of said customer at said merchant premises to said open tab, each purchase comprising a respective identifier and an amount;

responsive to said user of said POS terminal selecting an option to group at least one previous purchase into a round, add to said tab a specific identifier and a specific amount indicating that said at least one previous purchase relate to a round;

send (218) to said server (10') said at least one identifier and amount for each purchase of said open tab;

receive from said server (10') an indication of payment of at least one round of purchases; and

5 update a balance of said tab according to said payment.

13. A POS terminal according to claim 11 or 12 wherein said terminal is arranged to send said identifiers and amounts to said server (10') either: in response to a request from said server; or in response to said open tab being updated
10 at said POS terminal.

14. A method for processing a tab for a customer at a merchant premises comprising:

15 providing a list of candidate merchant premises to a customer mobile device (12);

receiving (200) from the customer mobile device, a signal indicating a user selection of one of the candidate merchant premises on said list;

receiving (202-206) payment card details for the customer mobile device;

20 obtaining (210) a specific code for a tab at the selected merchant premises;

sending (212) to the customer mobile device said specific code;

25 receiving (216) a signal from a Point of Sale, POS, terminal (14) of said selected merchant premises, indicating entry of said specific code into said PoS terminal;

based on the specific code, associating said customer mobile device with an open tab maintained by said POS terminal, said open tab comprising a respective identifier and an amount for at least one purchase of said customer at said selected merchant premises;

30 receiving (218) from said POS terminal said at least one identifier and amount for each purchase of said open tab;

responsive to one of said received identifiers comprising a specific identifier and a specific amount indicating that a user of said POS terminal wishes to

close said tab, requesting (306) payment of at least a portion of a balance of said open tab from a payment gateway (18) using said payment card details; and
 responsive to receiving notification of said payment, notifying (308) said POS terminal of said payment.

5

15. A method for processing a tab for a customer at a merchant premises, the server being configured to:

providing a list of candidate merchant premises to a customer mobile device (12);

10

receiving (200) from the customer mobile device, a signal indicating a user selection of one of the candidate merchant premises on said list;

obtaining (210) a specific code for a tab at the selected merchant premises;

sending (212) to the customer mobile device said specific code;

15

receiving (216) a signal from a Point of Sale, POS, terminal (14) of said selected merchant premises, indicating entry of said specific code into said PoS terminal;

based on the specific code, associating said customer mobile device with an open tab maintained by said POS terminal, said open tab comprising a

20

respective identifier and an amount for at least one purchase of said customer at said selected merchant premises;

receiving (218) from said POS terminal said at least one identifier and amount for each purchase of said open tab;

responsive to at least one of said received identifiers comprising a

25

specific identifier and a specific amount indicating that at least one previous identifier and amount relate to a round of purchases, grouping said at least one previous identifier into a round and provide an indication to said customer mobile device;

receiving (222) a request for payment of at least one round of purchases from a requesting customer mobile device;

30

requesting (224, 306) payment corresponding to said at least one round of purchases from a payment gateway (18) using payment card details for said requesting customer mobile device; and

responsive to receiving notification of said payment, notifying (226, 308) said POS terminal of said payment.

16. A method operable in a Point of Sale, POS, terminal (14) for a merchant premises comprising a point of sale application arranged to communicate with a server (10') for processing a tab for a customer at said merchant premises, the method comprising:

5 opening (216) a tab for a customer including receiving a specific code for a tab;

adding at least one purchase of said customer at said merchant premises to said open tab, each purchase comprising a respective identifier and an amount;

10 responsive to said user of said POS terminal selecting an option that the user of said POS terminal wishes to close said tab, adding (302) to said tab a specific identifier and a specific amount indicating that said user of said POS terminal wishes to close said tab;

15 sending (218) to said server (10') said at least one identifier and amount for each purchase of said open tab;

receiving (308) from said server (10') an indication of payment of at least a portion of said tab; and

updating (310) a balance of said tab according to said payment.

20 17. A method operable in a Point of Sale, POS, terminal (14) for a merchant premises comprising a point of sale application arranged to communicate with a server (10') for processing a tab for a customer at said merchant premises, the method comprising:

25 opening (216) a tab for a customer including receiving a specific code for a tab;

adding at least one purchase of said customer at said merchant premises to said open tab, each purchase comprising a respective identifier and an amount;

30 responsive to said user of said POS terminal selecting an option to group at least one previous purchase into a round, adding to said tab a specific identifier and a specific amount indicating that said at least one previous purchase relate to a round;

sending (218) to said server (10') said at least one identifier and amount for each purchase of said open tab;

receiving from said server (10') an indication of payment of at least one round of purchases; and
updating a balance of said tab according to said payment.

- 5 18. A computer program product comprising a computer readable medium on which instructions are stored which, when executed on a computer system, are configured for performing the steps of any one of claims 14 to 17.

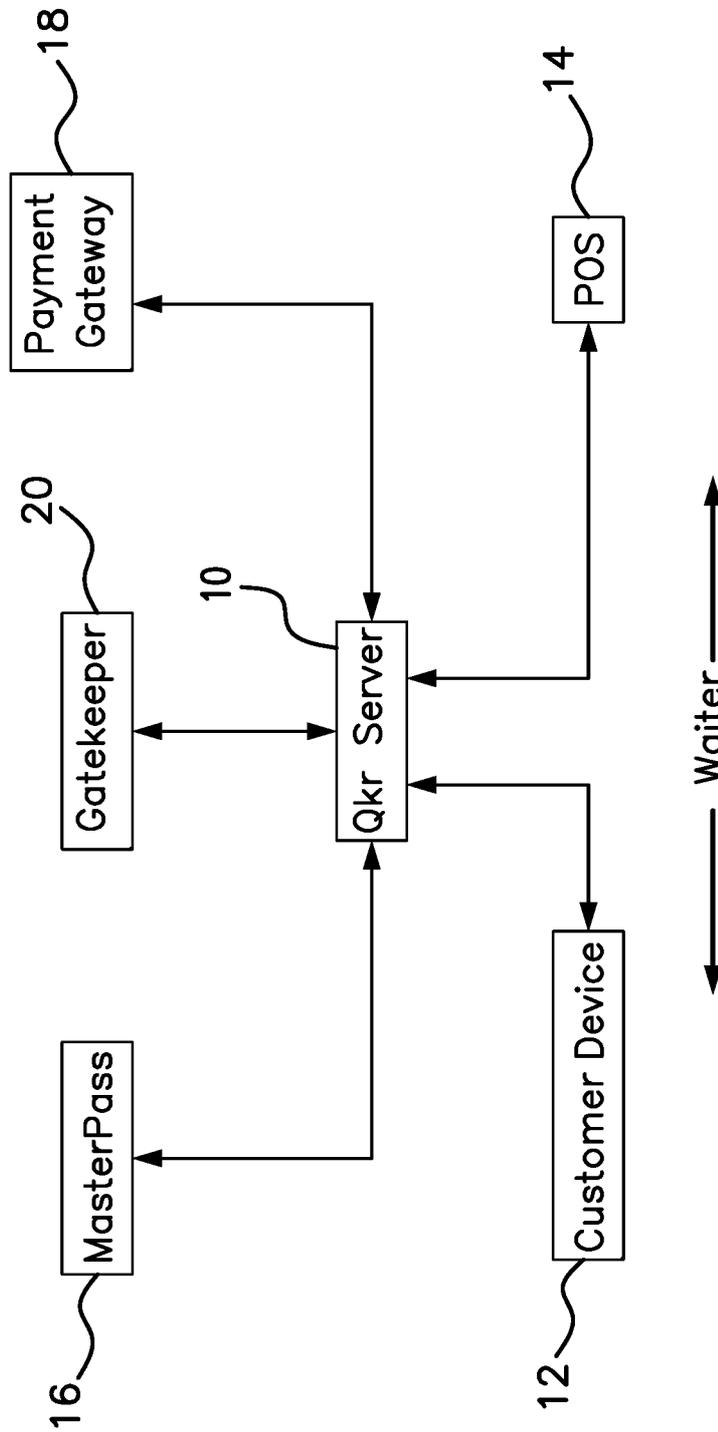


FIG. 1

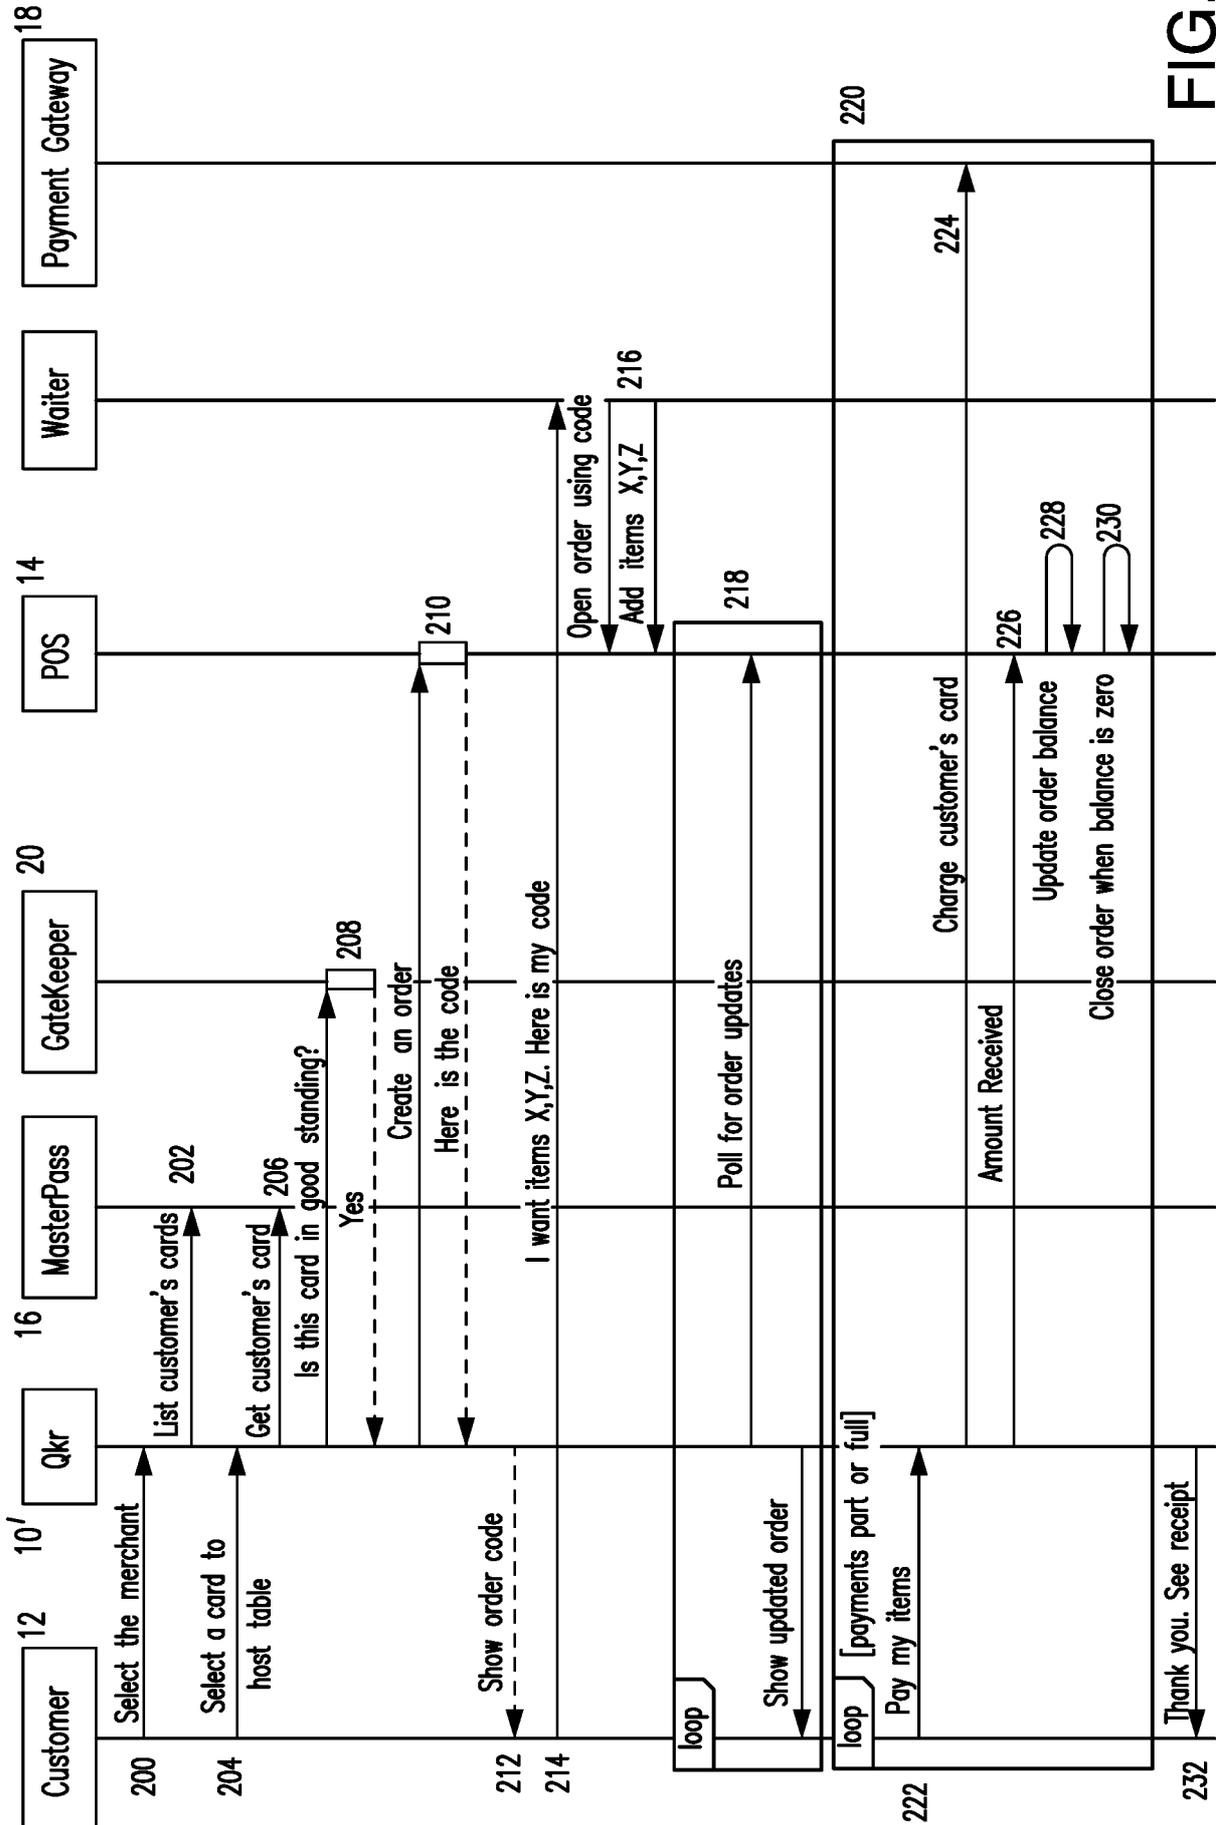


FIG. 2

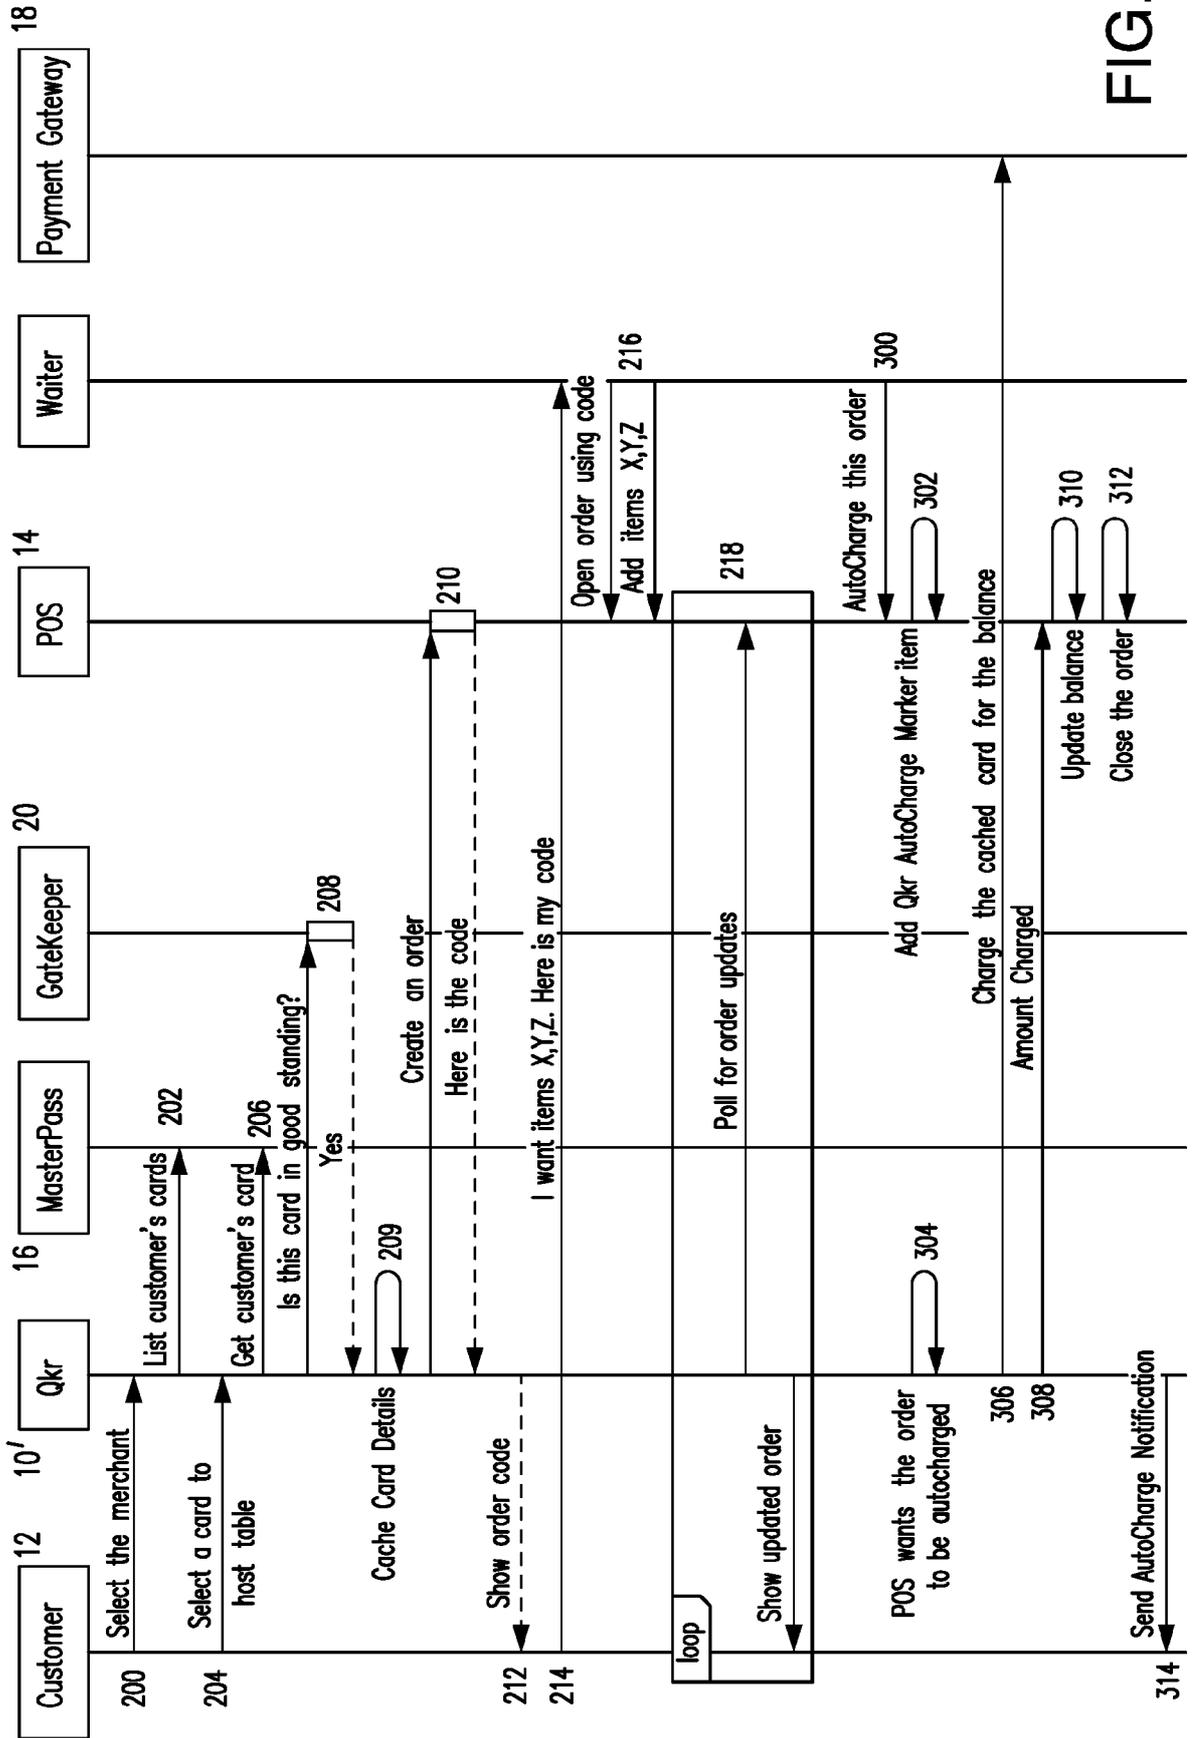


FIG. 3

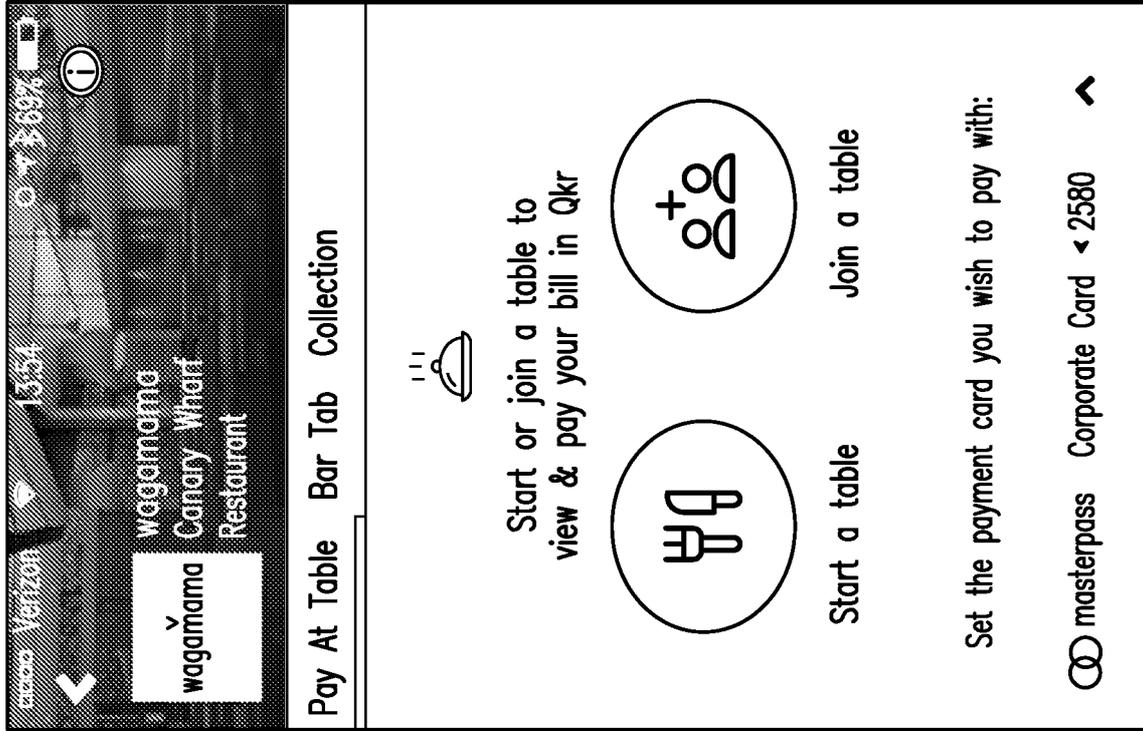


FIG. 5

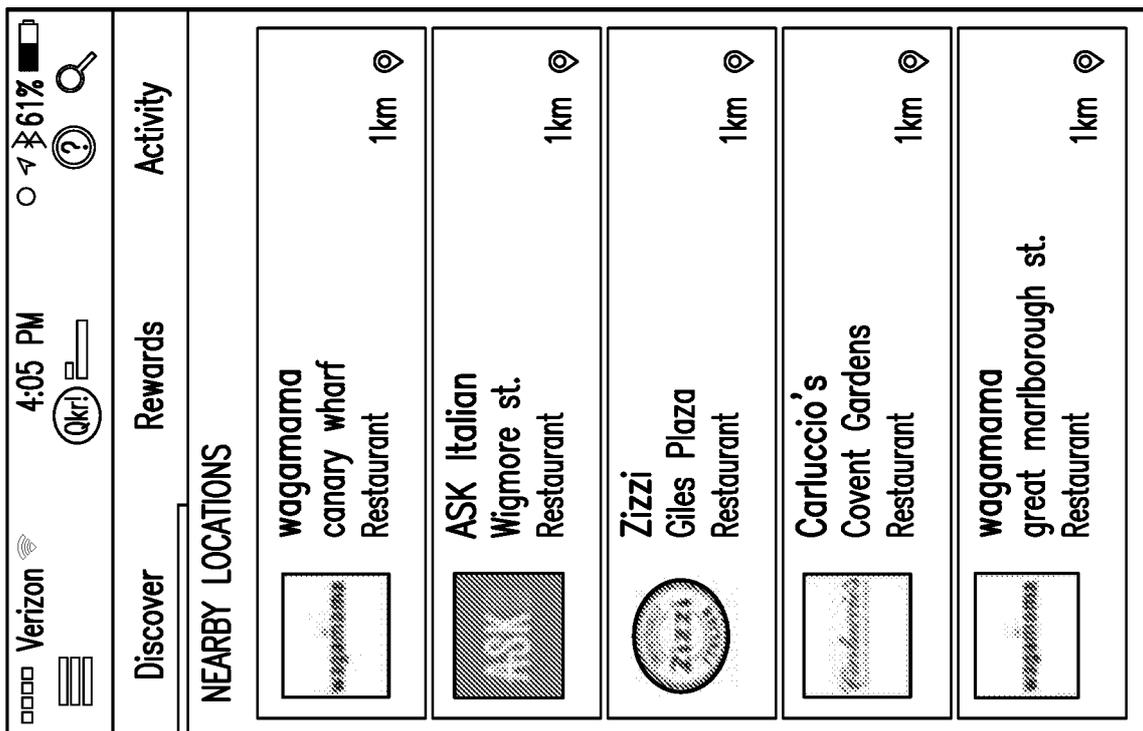


FIG. 4

INTERNATIONAL SEARCH REPORT

| |
|---------------------------------------------------|
| International application No PCT/US2018/032621 |
|---------------------------------------------------|

A. CLASSIFICATION OF SUBJECT MATTER
 INV. G06Q30/06 G06Q20/38
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED
 Minimum documentation searched (classification system followed by classification symbols)
 G06Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal , INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| X | us 2014/244409 AI (NATHANEL TAL ZVI [US] ET AL) 28 August 2014 (2014-08-28) abstract paragraph [0017] paragraph [0020] - paragraph [0032] paragraph [0036] - paragraph [0048] paragraph [0055] paragraph [0060] paragraph [0068] - paragraph [0074] paragraph [0090] paragraph [0116] paragraph [0132] paragraph [0139] ----- - / - - | 1-18 |

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

| | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "A" document defining the general state of the art which is not considered to be of particular relevance | "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention |
| "E" earlier application or patent but published on or after the international filing date | "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone |
| "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) | "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art |
| "O" document referring to an oral disclosure, use, exhibition or other means | "&" document member of the same patent family |
| "P" document published prior to the international filing date but later than the priority date claimed | |

| | |
|-------------------------------------------------------------------------------|----------------------------------------------------------------------|
| Date of the actual completion of the international search 20 June 2018 | Date of mailing of the international search report 29/06/2018 |
|-------------------------------------------------------------------------------|----------------------------------------------------------------------|

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016 | Authorized officer Mol tenbrey, Mi chael |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/032621

| C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT | | |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
| A | wo 2013/029095 AI (TOUCH NETWORKS PTY LTD [AU]; VAN JASON ANDREW [AU]; CLEEVE ADRIAN XAVI) 7 March 2013 (2013-03-07) abstract page 1, line 19 - line 23 page 6, line 33 - page 12, line 24 ----- | 1-18 |
| A | us 2009/063312 AI (HURST DOUGLAS J [US]) 5 March 2009 (2009-03-05) abstract paragraph [0005] - paragraph [0007] paragraph [0028] paragraph [0032] - paragraph [0036] paragraph [0044] - paragraph [0052] paragraph [0054] - paragraph [0059] ----- | 1-18 |

INTERNATIONAL SEARCH REPORT

Information on patent family members

| |
|---------------------------------------------------|
| International application No PCT/US2018/032621 |
|---------------------------------------------------|

| Patent document cited in search report | AI | Publication date | Patent family member(s) | Publication date |
|----------------------------------------|----|------------------|-------------------------|------------------|
| US 2014244409 | AI | 28-08-2014 | NONE | |
| | | | | |
| wo 2013029095 | AI | 07-03-2013 | AU 2012304258 AI | 20-03-2014 |
| | | | SG 11201400356U A | 29-05-2014 |
| | | | US 2014195363 AI | 10-07-2014 |
| | | | wo 2013029095 AI | 07-03-2013 |
| | | | | |
| US 2009063312 | AI | 05-03-2009 | US 2009063312 AI | 05-03-2009 |
| | | | US 2012028612 AI | 02-02-2012 |
| | | | US 2012030044 AI | 02-02-2012 |
| | | | | |