



(86) Date de dépôt PCT/PCT Filing Date: 1998/02/02

(87) Date publication PCT/PCT Publication Date: 1998/08/06

(45) Date de délivrance/Issue Date: 2009/04/14

(85) Entrée phase nationale/National Entry: 1999/07/27

(86) N° demande PCT/PCT Application No.: US 1998/001999

(87) N° publication PCT/PCT Publication No.: 1998/033782

(30) Priorités/Priorities: 1997/02/05 (US60/037,385);
1997/03/24 (GB9706046.1); 1997/04/08 (US60/042,807);
1997/05/07 (GB9709348.8)

(51) Cl.Int./Int.Cl. *C07D 265/18* (2006.01)

(72) Inventeurs/Inventors:

CLARKE, WILLIAM, US;
CROCKER, LOUIS S., US;
KUKURA, JOSEPH L., II, US;
THOMPSON, ANDREW S., US;
YOUNG, STEVEN D., US;
STELMACH, CHRISTINE, US


(73) Propriétaire/Owner:

MERCK & CO., INC., US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : PROCEDE DE CRISTALLISATION D'UN INHIBITEUR DE TRANSCRIPTASE INVERSE UTILISANT UN ANTISOLVANT

(54) Title: PROCESS FOR THE CRYSTALLIZATION OF A REVERSE TRANSCRIPTASE INHIBITOR USING AN ANTI-SOLVENT

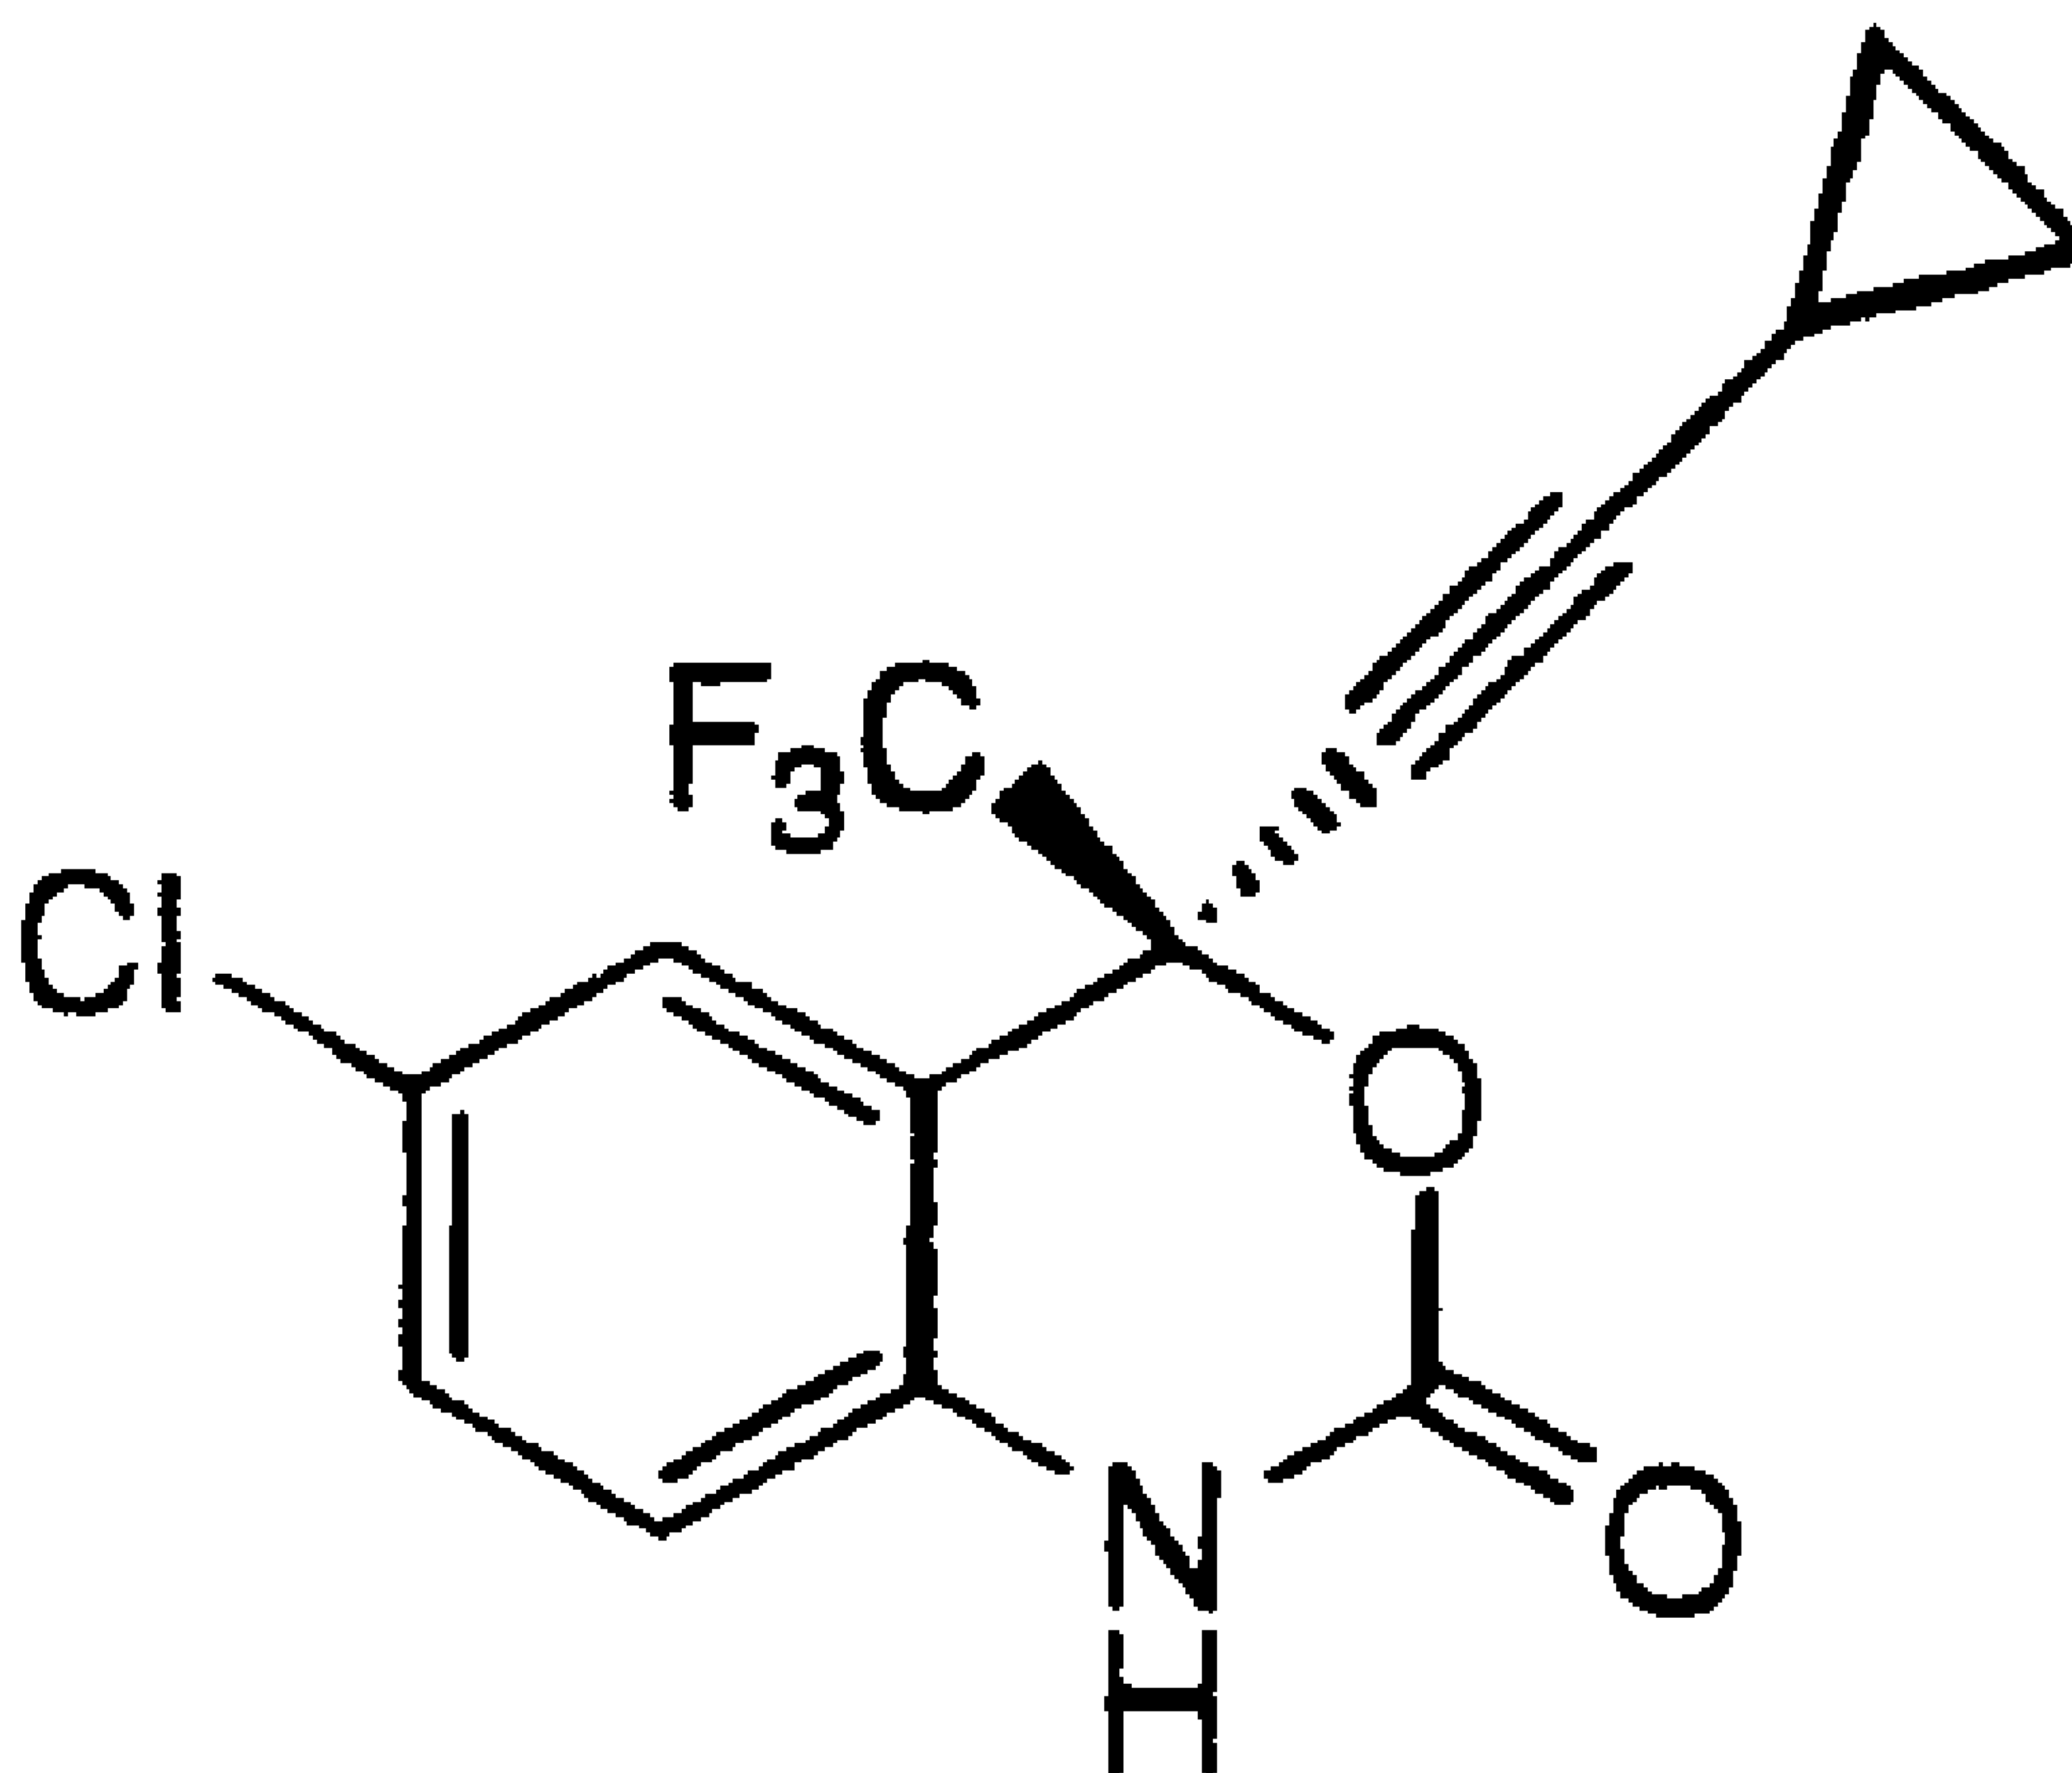

(57) Abrégé/Abstract:


The instant invention describes a method for crystallizing (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one (see above formula) from a solvent and anti-solvent solvent system and producing the crystalline product. The

(57) **Abrégé(suite)/Abstract(continued):**

desired final crystal form, Form I, can be produced when using methanol or ethanol. Form II is isolated from 2-propanol and can be converted to the desired crystal form at low drying temperatures, such as between about a temperature of 40°C and 50°C.

Abstract

The instant invention describes a method for crystallizing (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one

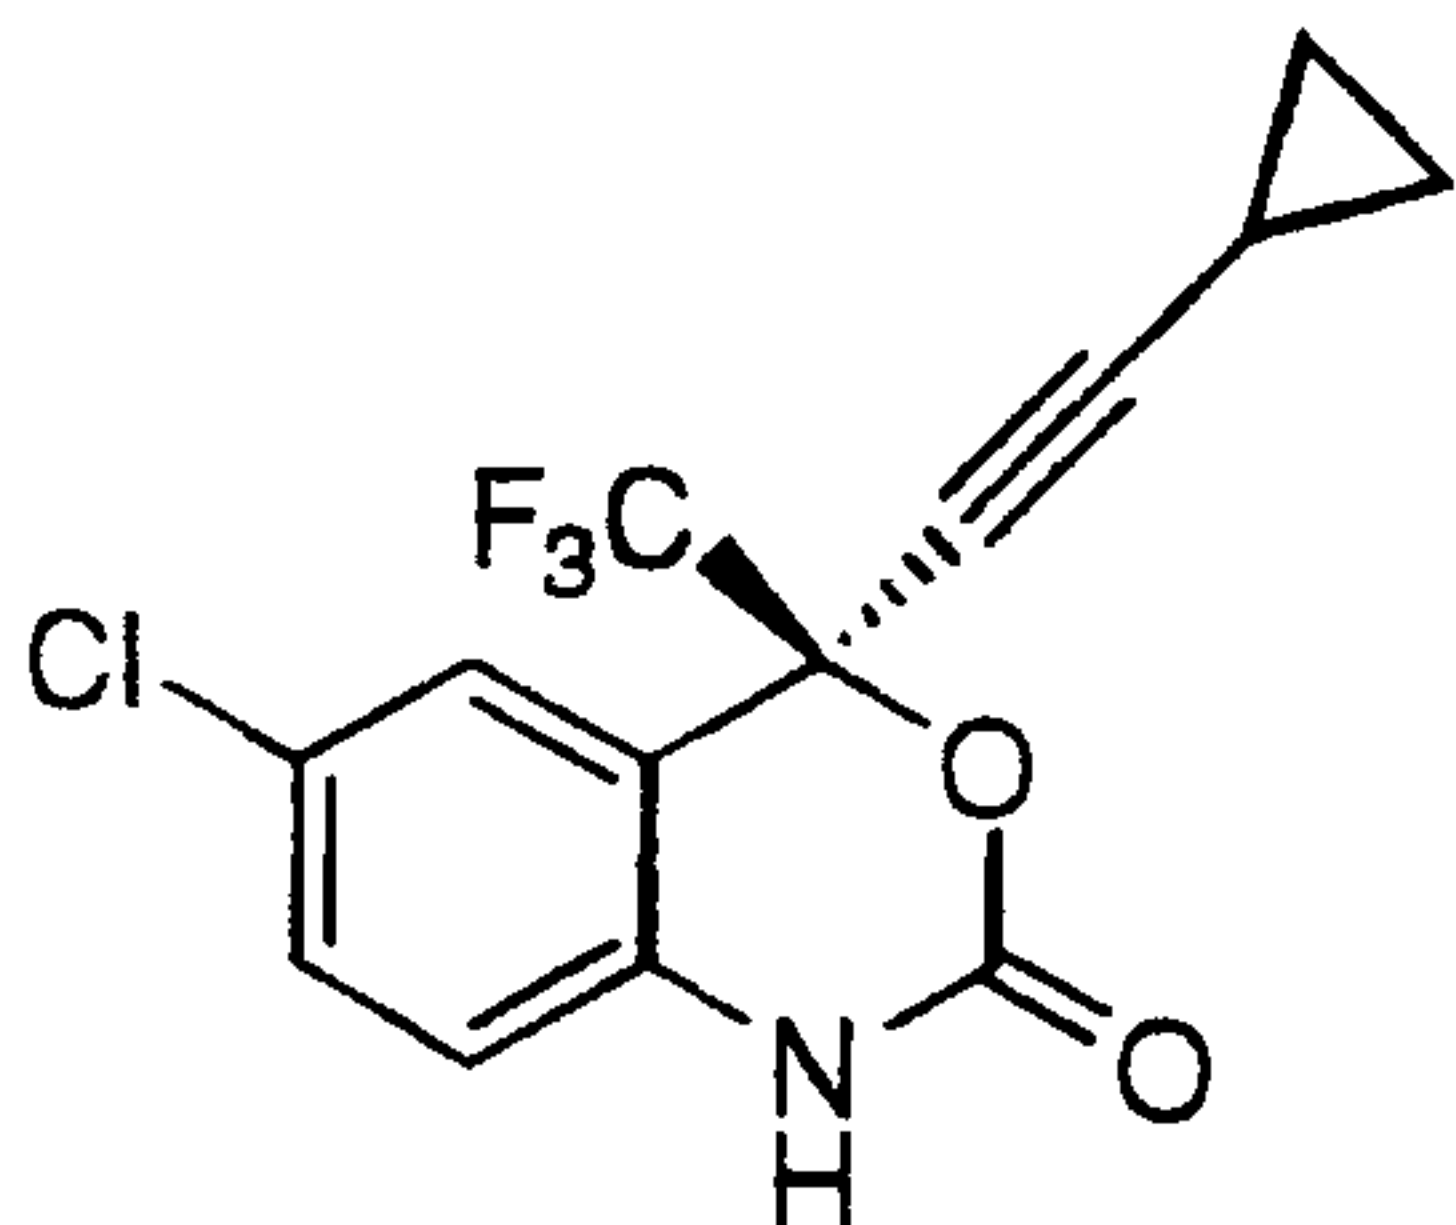

from a solvent and anti-solvent solvent system and producing the crystalline product. The desired final crystal form, Form I, can be produced when using methanol or ethanol. Form II is isolated from 2-propanol and can be converted to the desired crystal form at low drying temperatures, such as between about a temperature of 40°C and 50°C.

- 1 -

TITLE OF THE INVENTIONPROCESS FOR THE CRYSTALLIZATION OF A REVERSE
TRANSCRIPTASE INHIBITOR USING AN ANTI-SOLVENT5 BACKGROUND OF THE INVENTION

The synthesis of the reverse transcriptase inhibitor (RTI),
(-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-
3,1-benzoxazin-2-one, also known as DMP-266 has been described in
US Patent 5,519,021 issued on May 21, 1996 and the corresponding
10 PCT International Patent Application WO 95/20389, which published on
August 3, 1995. Additionally, the asymmetric synthesis of an
enantiomeric benzoxazinone by a highly enantioselective acetylide
addition and cyclization sequence has been described by Thompson, et
al., Tetrahedron Letters 1995, 36, 937-940, as well as the PCT
15 publication, WO 96/37457, which published on November 28, 1996.


The compound was previously crystallized from a heptane-
tetrahydrofuran (THF) solvent system. The crystallization procedure
required the use of high temperatures (about 90°C) to dissolve the final
product. Crystals formed by nucleation during the cooling process.
20 The crystals which were produced were Form II and are converted to
the desired Form I while drying under vacuum at 90°C. This
crystallization provided minimal purification and produced material
with inconsistent physical properties. The final product slurry was
extremely difficult to mix and handle due to its high viscosity and
25 heterogeneous nature.

The instant invention describes a method for crystallizing
(-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-
3,1-benzoxazin-2-one from a solvent and anti-solvent solvent system and
producing the crystalline product. The desired final crystal form, Form
30 I, can be produced when using methanol or ethanol. Form II is isolated
from 2-propanol and can be converted to the desired crystal form at low
drying temperatures, as low as 40°C.

- 2 -

SUMMARY OF THE INVENTION

A process for the crystallization of a compound of the structural formula

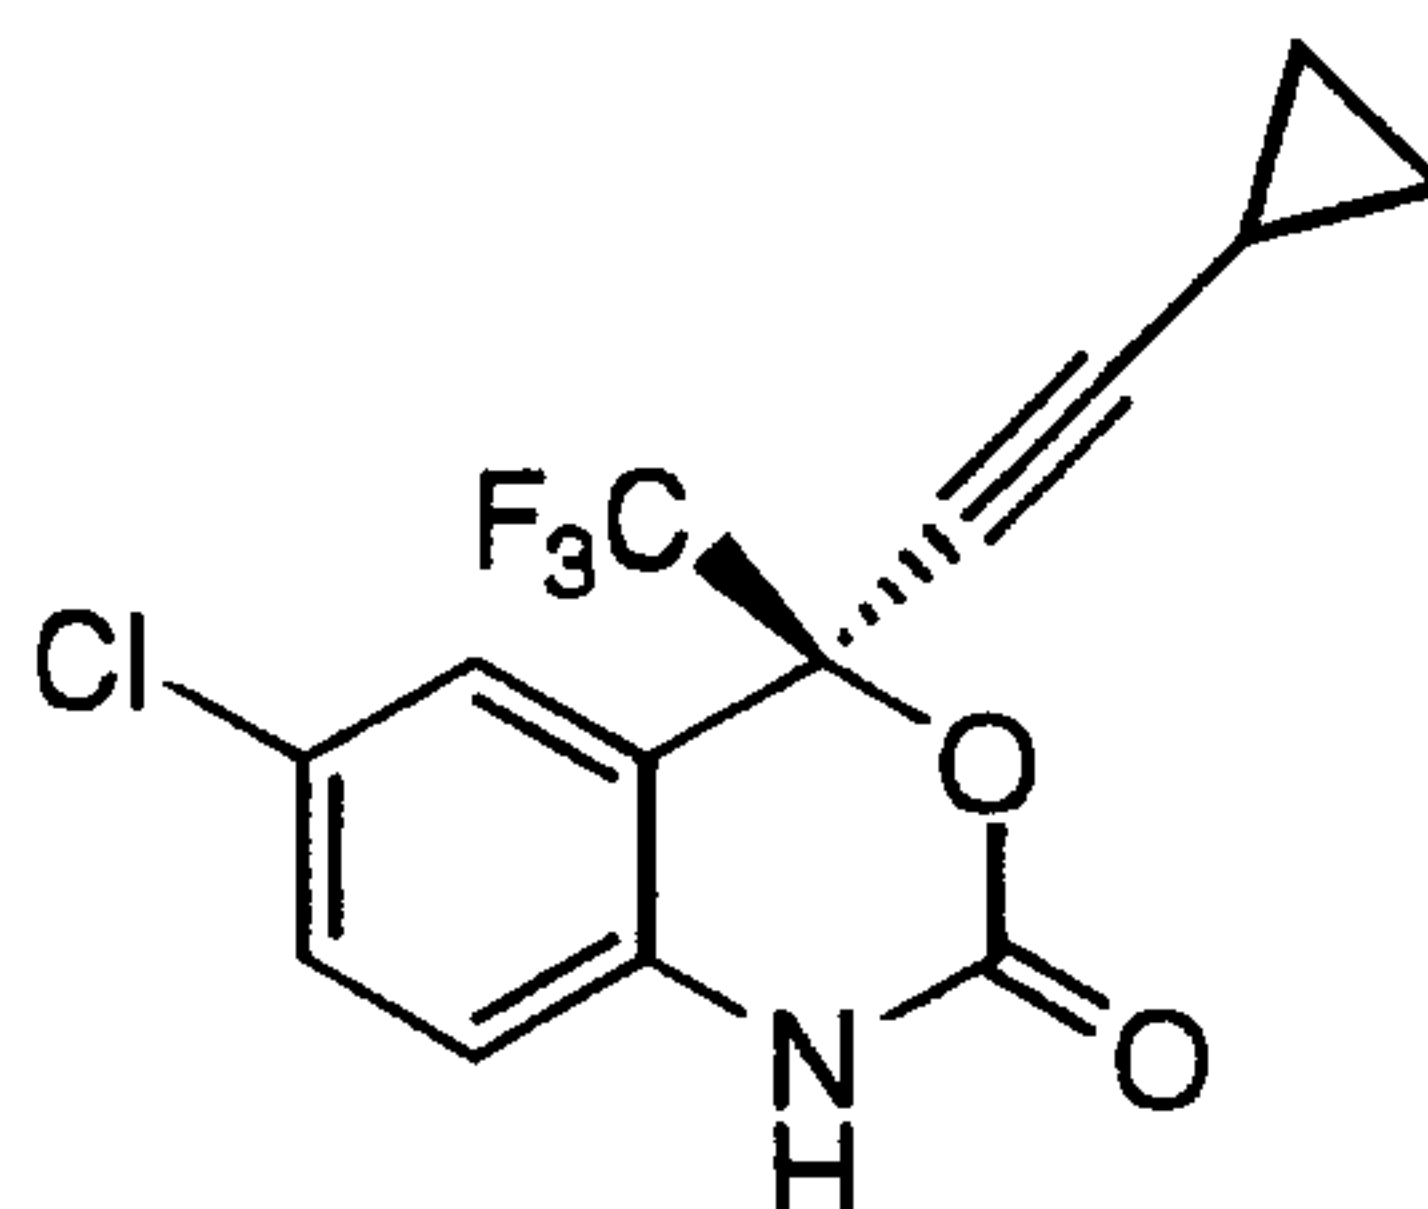

- 5 comprising the use of a solvent to effect the dissolution of the compound followed by the addition of an anti-solvent to initiate the crystallization.

BRIEF DESCRIPTION OF THE FIGURES

Figure 1.

- 10 Flowsheet of the controlled anti-solvent addition crystallization method.

Figure 2.

Flowsheet of the heel crystallization method.

- 15 Figure 3.

X-ray powder diffraction pattern for Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one.

- 20 Figure 4.

X-ray powder diffraction pattern for Form II of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one.

- 25 Figure 5.

X-ray powder diffraction pattern for Form III of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one.

- 3 -

Figure 6.

DSC curve for Form III of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one.

5


Figure 7.

TG analysis for Form III of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one.

10


DETAILED DESCRIPTION OF THE INVENTION

A process for the crystallization of a compound of the structural formula

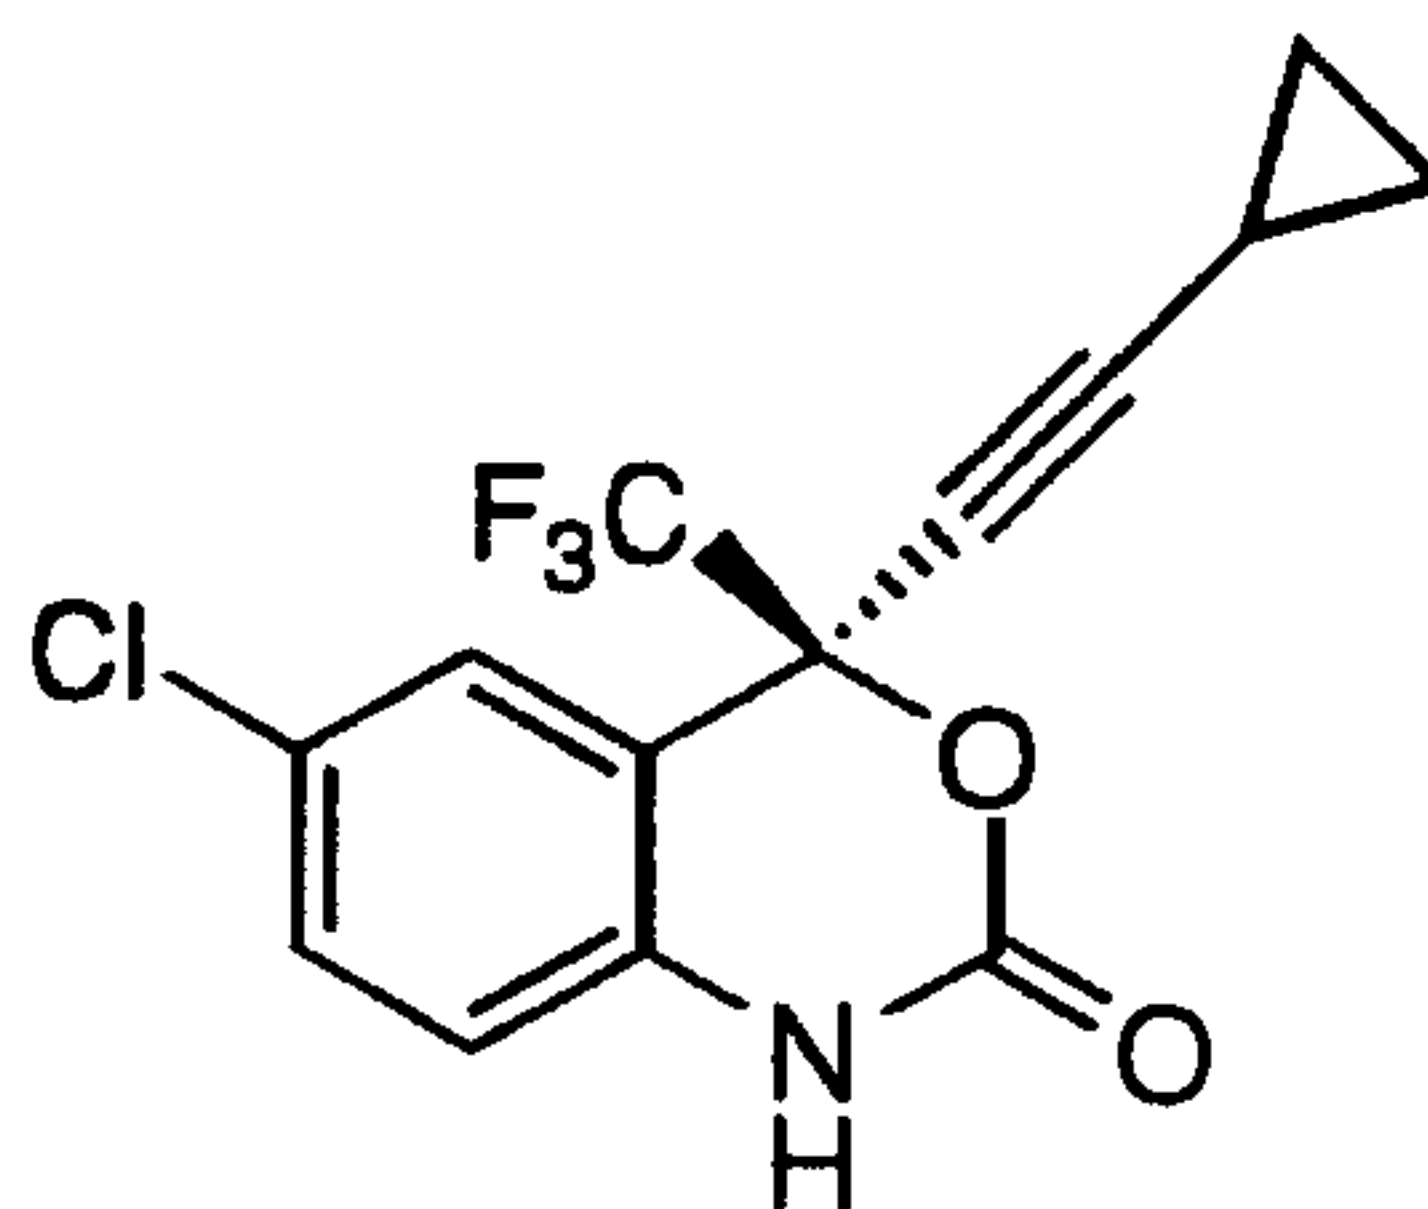

15 comprising the use of a solvent to effect the dissolution of the compound followed by the addition of an anti-solvent to initiate crystallization.

A process for the crystallization of a compound of the structural formula

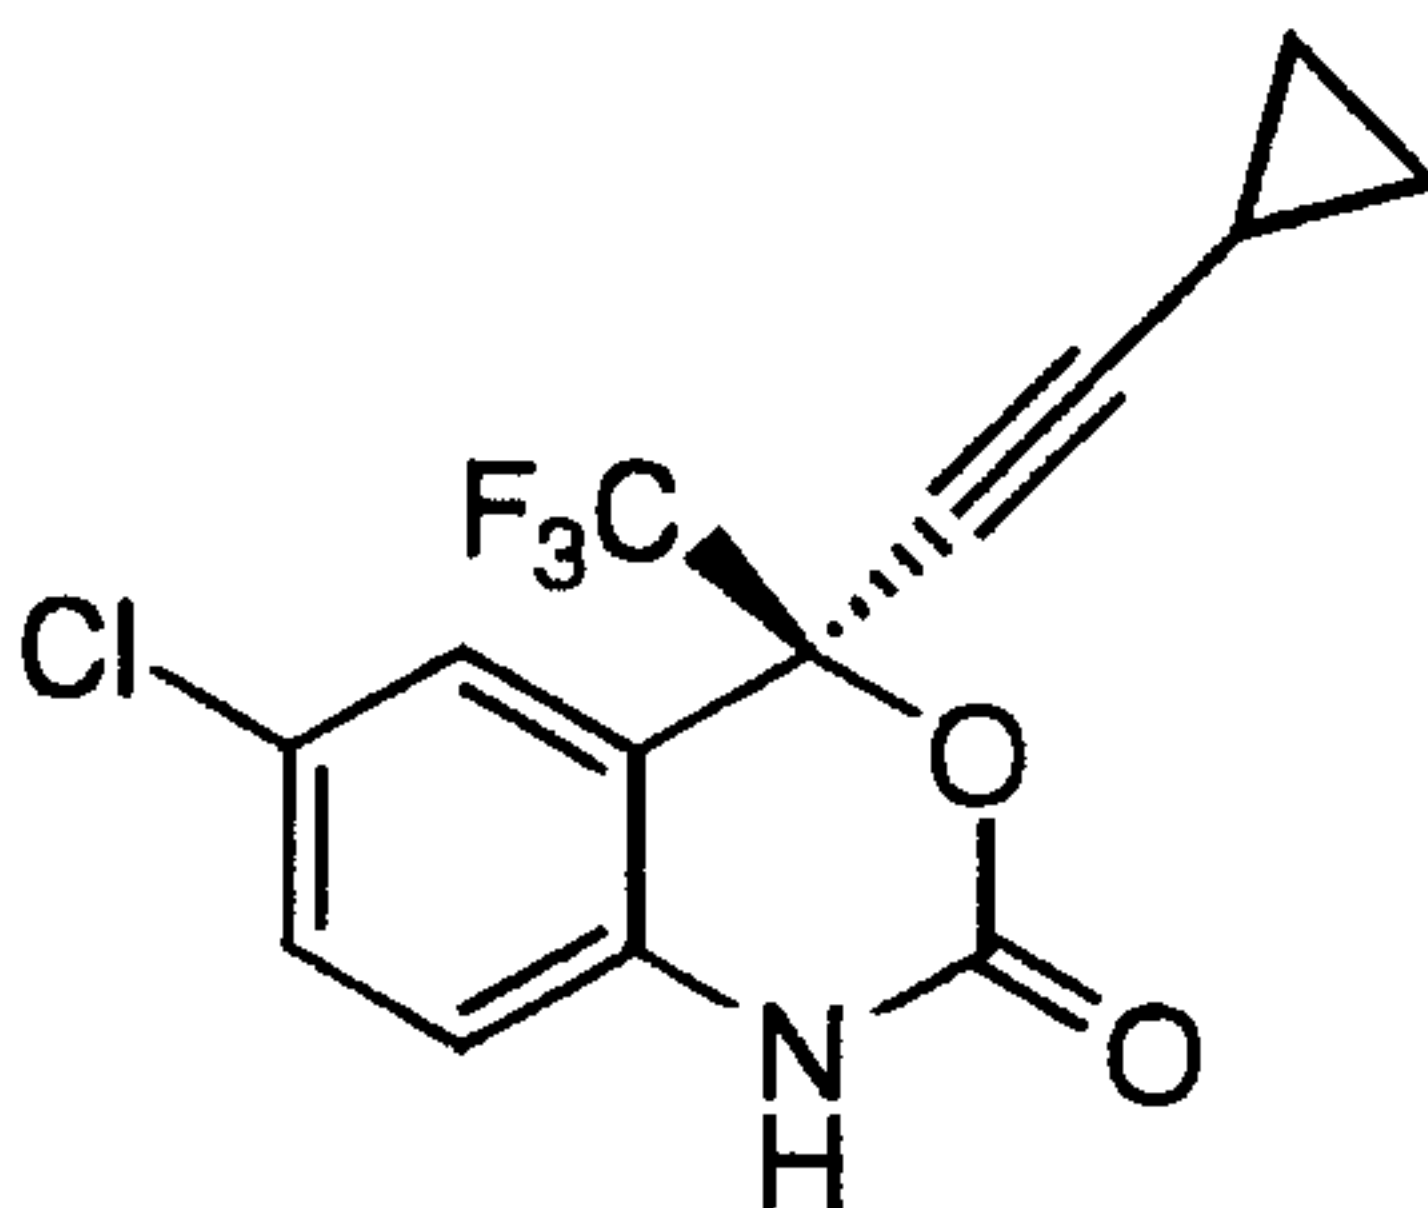

20

comprising the steps of:

- 4 -

- (1) dissolving the compound in a solvent in a ratio of about 3.0 ml to about 10.0 ml of solvent to 1 gram of the compound;
- (2) filtering the solution of the compound to remove any particulate matter;
- 5 (3) adding the anti-solvent to the stirring solution at room temperature over a period of about 30 minutes to about an hour to reach the saturation point of the solution containing the compound;
- 10 (4) adding to the solution a solid seed charge of the compound in the amount of about 2 to about 10 percent by weight to form a slurry;
- (5) milling the slurry to reduce the thickness of the slurry;
- (6) adding the remaining water to reach the desired solvent composition of about 30% to about 50% and milling the slurry as needed during the addition;
- 15 (7) slowly cooling the slurry to about 5°C to about 20°C;
- (8) aging for about 2 to about 16 hours until the supernatant concentration reaches equilibrium;
- 20 (9) milling the slurry, as needed, to reduce the thickness of the slurry;
- (10) filtering the milled slurry to isolate a wet cake of the crystalline compound;
- (11) washing the wetcake once with about 1 to about 2 bed volumes of the final crystallization solvent composition and then twice with water using about 5-10 ml water per gram of compound; and
- 25 (12) drying the washed wetcake at about 40°C to about 90°C under vacuum for about 1 hour to about 3 days, or until the loss on dryness is less than 0.5 weight percent.

30 The controlled anti-solvent crystallization process as recited above wherein the solvent is defined as alcohol, wherein alcohol is a straight or branched chain (C₁-C₆)-alkanol. A preferred embodiment of the solvents useful in the controlled anti-solvent crystallization

- 5 -

process is (C₁-C₆)-alkanol, such as, methanol, ethanol, and 2-propanol. The preferred alcohol is 2-propanol.

The preferred alcohol is 2-propanol for reasons relating to obtaining consistent crystal forms. Although methanol and ethanol solvent systems have been shown to be capable of producing the desired Form I crystal structure, a slight contamination of Form III crystals in a crystallization slurry in these systems can convert the entire slurry to containing exclusively Form III crystals, which are relatively difficult to convert to the desired Form I structure. Any known crystal structure of this compound placed in an about 25 % to 35 % (v/v) 2-propanol - water solvent system has been shown to quickly convert to the Form II crystal structure, which can readily convert to the desired Form I crystal structure during drying.

The anti-solvent as recited above is defined as a solvent in which the compound has limited solubility. In the instant process, the preferred anti-solvent is water.


The temperature of the solution during the anti-solvent addition (Step 3) was about 20°C to about 25°C. The temperature of the slurry being about 5°C to about 20°C, and preferably at about 10°C.

The temperature used during the drying of the washed wetcake (Step 12) is about 40°C to about 90°C, and preferably about 40°C to about 60°C.

The solvent system (solvent plus anti-solvent) used ranged from about 30% to about 50% solvent volume to anti-solvent volume (v/v) ratio. The total volume of the solvent system ranging from about 12 to about 20 ml of the solvent system per gram of the compound. The solvent volume to anti-solvent volume ratio for selected solvent systems is as follows: 1) an ethanol-water solvent system is about 30% to about 40% ethanol to water v/v ratio; 2) a methanol-water solvent system is about 40% to about 50% methanol to water v/v ratio; and 3) an 2-propanol-water solvent system is about 25% to about 35% 2-propanol to water v/v ratio. The preferred solvent system is 2-propanol-water used in about a 30% volume to volume ratio and a total solvent system volume of about 15 ml per gram of the compound.

- 6 -

A process for the crystallization of a compound of the structural formula

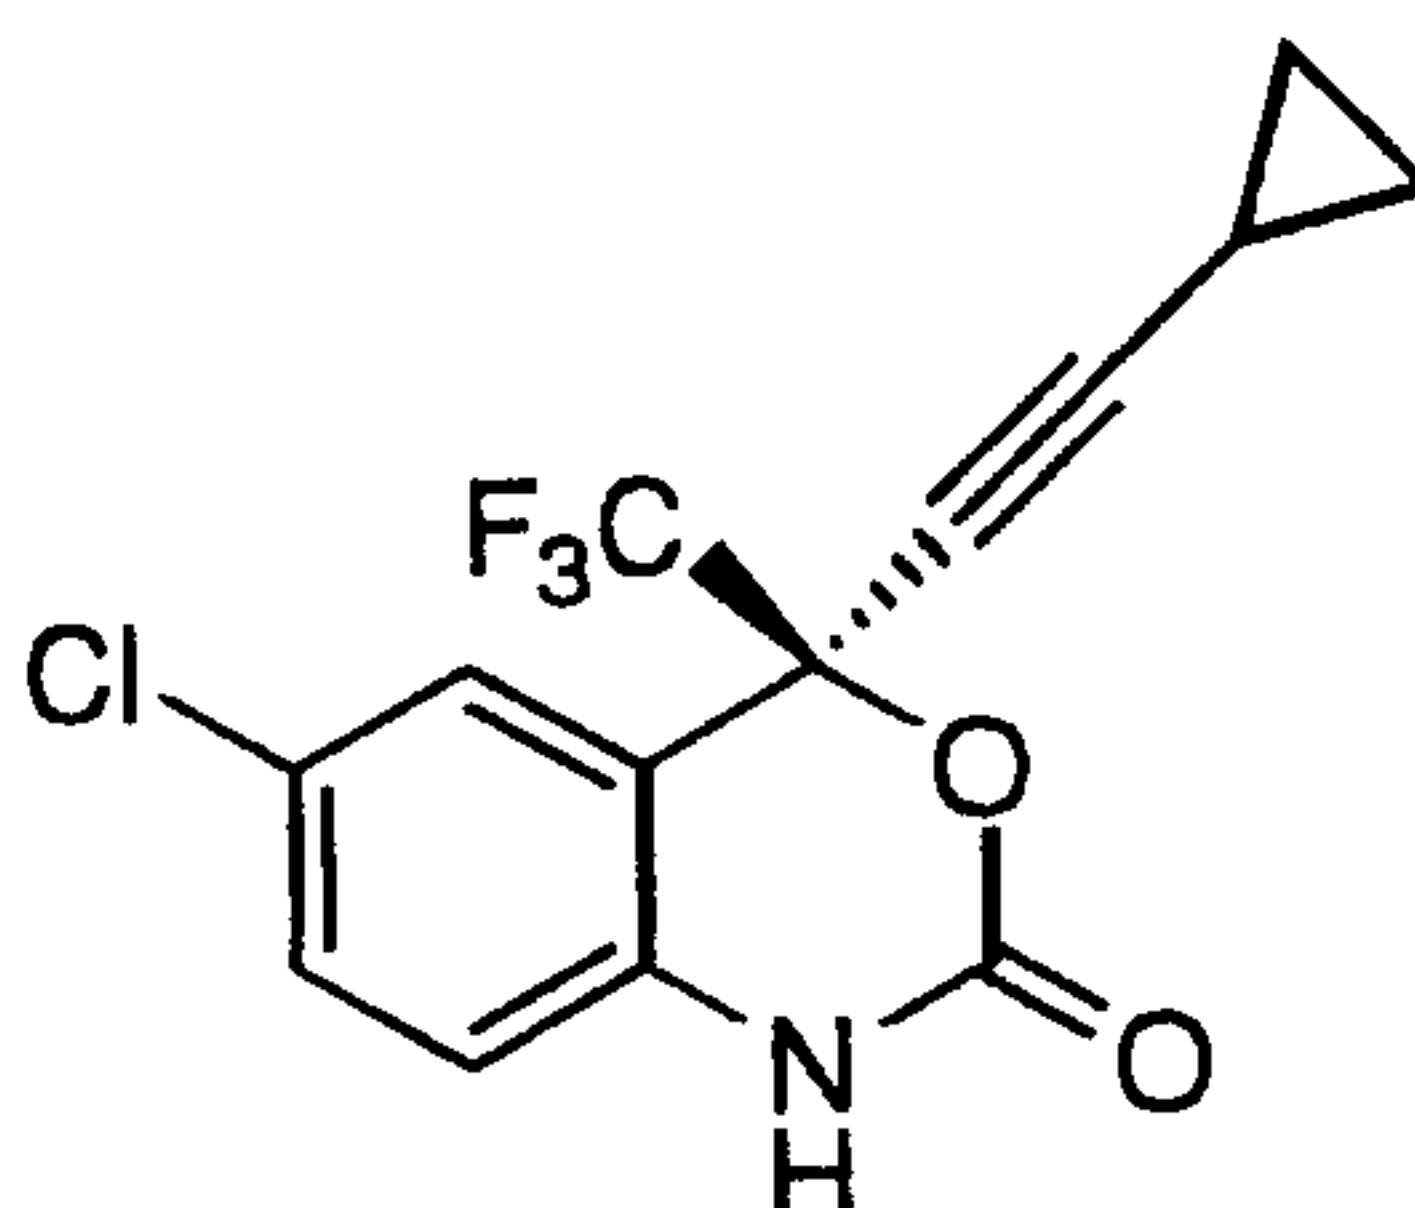

comprising the steps of:

- 5 (1) mixing about 10% to about 20% by weight of the final amount of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one in the desired v/v ratio of solvent to anti-solvent at about 20°C to form the heel or retaining a final slurry from a previous batch;
- 10 (2) adding the solution of solvent and (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one, and anti-solvent to the heel simultaneously at constant rates over about 6 hours maintaining the v/v ratio of solvent to anti-solvent;
- 15 (3) milling the slurry during the addition to reduce the thickness of the slurry;
- (4) cooling the slurry to about 10°C over about 3 hours and aging slurry until the supernatant concentration reaches equilibrium;
- 20 (5) filtering the milled slurry to isolate a wet cake of the crystalline compound;
- (6) washing the wetcake once with about 1 to about 2 bed volumes of the final crystallization solvent composition and then twice with water using about 5 ml to about 10 ml
- 25 water per gram of compound; and

- 7 -

- (7) drying the washed wetcake at about 40°C to about 90°C under vacuum for about 1 hour to about 3 days, or until the loss on dryness is less than 0.5 weight percent.

The heel crystallization process as recited above wherein the solvent is defined as acetonitrile, dimethyl acetamide, dimethyl formamide or alcohol. A preferred embodiment of the solvents useful in the controlled anti-solvent crystallization process is alcohol, wherein alcohol is defined as (C₁-C₆)-alkanol, such as, methanol, ethanol, and 2-propanol. The preferred alcohol is 2-propanol.

The anti-solvent as recited above is defined as a solvent in which the compound has limited solubility. In the heel crystallization process the preferred anti-solvent is water.

The process as recited above wherein the temperature of the solution during the anti-solvent addition is about 5°C to about 20°C.

The temperature used during the drying of the washed wetcake is about 40°C to about 90°C, and preferably about 40°C to about 60°C.

The solvent system (solvent plus anti-solvent) used ranges from about 30% to about 50% solvent volume to anti-solvent volume (v/v) ratio. The total volume of the solvent system ranging from about 12 to about 20 ml of the solvent system per gram of the compound. The solvent to anti-solvent volume to volume ratio for selected solvent systems is as follows: 1) an ethanol-water solvent system is about 30% to about 40% ethanol to water v/v ratio; 2) a methanol-water solvent system is about 40% to about 50% methanol to water v/v ratio; and 3) an 2-propanol-water solvent system is about 25% to about 35% 2-propanol to water v/v ratio. The preferred solvent system is 2-propanol-water used in about a 30% volume to volume ratio and a total solvent system volume of about 15 ml per gram of the compound.

Figures 3, 4 and 5 are the X-ray powder diffraction (XRPD) patterns for Forms I, II and III, respectively. These XRPD patterns were recorded using an automated X-ray diffractometer APD 3720 with copper K alpha radiation. The crystal forms I and II of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-

- 8 -

benzoxazin-2-one which are characterized by the noted X-ray powder diffraction patterns have the following key diffraction peaks (2Θ) with intensities ($I/I_{\max}$, %) of 10 or greater:

Form I	Form II	Form III
6.0800	3.6375	7.2150
6.3900	6.3325	10.9675
10.3950	11.0725	13.7275
10.9875	12.7750	14.5325
12.2850	13.3275	16.7275
13.1900	14.2925	19.0675
14.1700	16.1200	19.6550
15.1925	16.8975	20.8250
16.9000	18.5025	21.7450
18.4375	19.1975	22.2825
19.2275	19.6025	22.8475
20.0925	20.6650	23.1750
21.2100	21.3250	23.8850
22.3600	22.6150	24.4900
23.0725	23.1775	24.9075
24.8900	24.4075	25.8200
25.9500	24.9650	27.0325
26.3575	26.0100	27.6050
27.2550	26.8550	29.2975
28.1150	27.6400	30.2600
28.5850	28.3675	30.7300
29.1325	29.1725	31.3125
29.5625	29.6325	33.3975
30.6850	30.5650	38.4325
32.3725	31.8950	39.2100
38.3125	33.8225	

- 9 -

Additionally, these crystal forms are characterized by peaks with varying D-spacings. Form I is characterized by peaks with D-spacings of: 14.5, 8.5, 8.0, 7.2, 6.7, 6.2, 5.2, 4.6, 4.4, 4.2, and 3.6 angstroms. Form II is characterized by peaks with D-spacings of: 24.3, 13.9, 8.0, 6.9, 6.6, 5.5, 4.6, 4.5, 4.3, 4.2, 3.9, 3.6, 3.4, 3.3, and 3.2 angstroms. Form III is characterized by peaks with D-spacings of: 12.2, 8.1, 6.4, 6.1, 4.7, 4.3, 4.1, 4.0, 3.9, 3.8, 3.7, 3.6, 3.3, 3.2, and 3.0 angstroms.

Thermogravimetric analysis results of Form III (Figure 7) indicated there was no significant weight loss observed from 43°C to about 137°C. This result is indicative of an anhydrous or unsolvated crystal form.

The differential scanning calorimetry (DSC) results obtained for Form III show an endotherm with an extrapolated onset temperature of 117°C, a peak temperature of 118°C, and an enthalpy of 34 J/g, this is followed by an exotherm with a peak temperature of 120°C and an enthalpy of 23J/g. A second endotherm with an extrapolated onset temperature of 138°C, a peak temperature of 139°C, and an enthalpy of 55 J/g is also observed. The first endotherm is associated with the melting of Form III, which subsequently crystallizes to Form I during the exothermic event. The second endothermic event is associated with the melting of Form I.

A process for isolating (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one, the final product from solutions containing an organic solvent and water has been developed. In this process water serves as an anti-solvent to produce a solid product from material dissolved in organic solvent. The final solvent composition is chosen to balance yield loss, purification, and slurry handling properties.

For methanol solvent systems about 40% to about 50% volume to volume (v/v) solvent to anti-solvent (water) has been present in the final slurry. Ethanol solvent systems have contained about 30% to about 40% v/v solvent to anti-solvent, and 2-propanol solvent systems have used about 25% to about 35% (v/v) solvent to anti-solvent. The

- 10 -

total amount of liquid (alcohol and water) ranges from 12 - 20 ml/(g solid). The crystallizations are typically performed between 20 - 25°C, and some slurries have been cooled to 5 - 10°C before being filtered. Following the filtration, the wetcake is washed with approximately one
5 bed volume (the approximate volume of the wetcake) of the final crystallization solvent composition. The wetcake is then washed with at least 2 bed volumes of deionized (DI) water.

The rate at which the product is precipitated is controlled by either slowly adding the water to a saturated system following a seed
10 charge (anti-solvent addition) or simultaneously adding the product in alcohol and water at controlled rates to an existing product slurry (heel crystallization).

For the anti-solvent process (Figure 1), enough water is first added to the organic solvent solution containing the product over
15 0.5 - 2 hours to saturate the system in final product. A solid charge of final product is then added to the system as seed (2 - 10 % of the initial amount of product). The seed should be Form I (the crystal form associated with dry final product) for ethanol and methanol systems, and Form II seed (the crystal form generated from a THF/heptane
20 crystallization) is used for 2-propanol systems. The resultant slurry is aged for 0.5 - 2 hours to establish a seed bed. The remaining water is then added over 2 - 4 hours in a controlled manner. The slurry is then aged for 2 - 20 hours and cooled to the desired final temperature during the age, allowing the supernatant to reach equilibrium.

25 For the heel process (Figure 2), a slurry at the desired final solvent composition is mixed while adding the product dissolved in alcohol and water at controlled relative rates to maintain a constant solvent ratio. The slurry (the crystalline compound in the final desired solvent system) is often 10-20% of the product from a prior run. The
30 total charge is typically performed over 4 - 6 hours at 20 - 25°C. The slurry is then aged for several hours at the desired final temperature before being filtered to allow the supernatant to reach equilibrium. Following the filtration, the wetcake is washed with approximately one bed volume of a clean alcohol/water mixture matching the final

- 11 -

crystallization conditions. The wetcake is then washed with at least 2 bed volumes of DI water.

Further control of the crystal size and slurry viscosity is achieved by using a wet-mill on slurries with excessively long particles and/or extremely thick consistencies. The product typically forms rod shaped crystals which grow much faster in the axial direction than the radial direction. It is understood that the reference to 'thickness' will refer to the crystal size and consistency of the slurry. The mill has been shown to reduce the length of the long crystals and produce a thin slurry from a thick slurry which contains many agglomerates of crystals. On the laboratory scale, the entire slurry can be milled batch-wise when desired. At larger scales, the wet-mill can be used on a recycle loop circulating around the crystallization vessel. An in-line particle size measurement and viscosity measurements could be coordinated to control the mill. Varying the temperature of the slurry through a range of 5°C to 50°C cycles has also been shown to be a useful way of modifying the crystal size and shape.

The solvents useful in this method include alcohol, acetonitrile (heel process only), dimethyl formamide (heel process only), and dimethyl acetamide (heel process only). The preferred solvent is an alcohol selected from methanol, ethanol or 2-propanol.

This crystallization process is advantageous over the prior method. The instant method allows one to isolate a crystalline product with consistent physical properties namely the ability to produce the desired crystal form of the product or convert to Form I with mild drying conditions (heating to about 40 to 60°C). The alcohol-water crystallizations have also been shown to reject some impurities carried forward from the chemical synthesis. The final product slurry is less viscous and more homogenous with the instant process and is thus easier to mix and handle.

The following examples are meant to be illustrative of the present invention. These examples are presented to exemplify the invention and are not to be construed as limiting the scope of the invention.

- 12 -

EXAMPLE 1

Controlled Anti-Solvent Addition Crystallization Process

5 400 g of DMP-266 starting material is dissolved in 2.400 L
of ethanol. See Figure 1. The solution is filtered to remove extraneous
matter. 2.088 L of deionized (DI) water is added to the solution over
30 to 60 minutes. 20 g of DMP-266 seed is added to the solution. The
seed bed is aged for 1 hour. The use of Intermig* agitators is preferred
10 to mix the slurry. If required (by the presence of extremely long
crystals or a thick slurry), the slurry is wet-milled for 15 - 60 seconds.
1.512 L of DI water is added to the slurry over 4 to 6 hours. If
required (by the presence of extremely long crystals or a thick slurry),
the slurry is wet-milled for 15 to about 60 seconds during the addition.
15 The slurry is aged for 1 to 3 hours before being cooled to 10°C over 3
hours. The slurry is aged for 2 to 16 hours until the product
concentration in the supernatant remains constant. The slurry is filtered
to isolate a crystalline wet cake. The wet cake is washed with 1 to 2 bed
volumes of 40 % ethanol in water and then twice with 2 L of DI water
20 each. The washed wet cake is dried under vacuum at 50°C.

EXAMPLE 2

Semi-Continuous Heel Crystallization Process

25 400 g of DMP-266 starting material is dissolved in 2.400 L
of ethanol. See Figure 2. A heel slurry is produced by mixing 20 g of
DMP-266 in 0.3 L of 40 % (v/v) ethanol in water. The dissolved batch
and 3.6 L of DI water are simultaneously charged to the heel slurry at
constant rates over 6 hours to maintain a constant solvent composition in
30 the crystallizer. Use of Intermig agitators during the crystallization is
preferred. During this addition the slurry is wet-milled when the
crystal lengths become excessively long or the slurry becomes too thick.
The slurry is cooled to about 10°C over 3 hours. The slurry is aged for
2 to 16 hours until the product concentration in the supernatant remains
35 constant. The slurry is filtered to isolate a crystalline wet cake. The

* Trade-mark

- 13 -

wet cake is washed with 1 to 2 bed volumes of 40 % ethanol in water and then twice with 2 L of DI water each. The washed wet cake is dried under vacuum at 50°C.

5

EXAMPLES 3-8

Following the crystallization procedures described in Examples 1 and 2 above using the solvents noted in the table below in the amounts recited DMP-266 can be crystallized.

10

Ex #: Solvent	ml solvent per g. DMP-266*	ml H ₂ O per g. DMP-266*	Anti-solvent Process	Heel Process
EX. 3: Acetonitrile	3.6 - 8.0	7.2 - 14	—	X
EX. 4: Dimethyl acetamide	3.6 - 8.0	7.2 - 14	—	X
EX. 5: Dimethyl formamide	3.6 - 8.0	7.2 - 14	—	X
EX. 6: Ethanol	3.6 - 8.0	7.2 - 14	X	X
EX. 7: Methanol	4.8 - 10	5.4 - 12	X	X
EX. 8: 2-Propanol	3.0 - 7.0	7.8 - 15	X	X

* The sum of the amounts of solvent and water should be at least 12 ml/g. The currently preferred concentration is 15 ml/g.

— method did not work.

15

X method worked.

EXAMPLE 9

Crystallization of DMP-266 from 30% 2-Propanol in Water using a ratio of 15 ml solvent per gram DMP-266 Using Controlled Anti-Solvent Addition on a 400 g Scale

400 g. of DMP-266 starting material is dissolved in 1.8 L of 2-propanol. The solution is filtered to remove extraneous matter. 1.95 L of deionized (DI) water is added to the solution over 30 to 60 minutes. 10 g. to 20 g. of DMP-266 seed (Form II wetcake) is added to the solution. The seed bed is aged for 1 hour. The use of Intermig

- 14 -

agitators is preferred to mix the slurry. If required (by the presence of extremely long crystals or a thick slurry), the slurry is wet-milled for 15 - 60 seconds. 2.25 L of DI water is added to the slurry over 4 to 6 hours. If required (by the presence of extremely long crystals or a
5 thick slurry), the slurry is wet-milled for 15 - 60 seconds during the addition. The slurry is aged for 2 to 16 hours until the product concentration in the supernatant remains constant. The slurry is filtered to isolate a crystalline wet cake. The wet cake is washed with 1 to 2 bed volumes of 30 % 2-propanol in water and then twice with 1 bed volume
10 of DI water each. The washed wet cake is dried under vacuum at 50 °C.

EXAMPLE 10

Crystallization of DMP-266 from 30% 2-Propanol in Water using a
15 ratio of 15 ml solvent per gram DMP-266 Using a Semi-Continuous Process on a 400 g Scale

400 g. of DMP-266 starting material is dissolved in 1.8 L of 2-propanol. A heel slurry is produced by mixing 20 g. of Form II
20 DMP-266 in 0.3 L of 30 % (v/v) 2-propanol in water or retaining part of a slurry from a previous crystallization in the crystallizer. The dissolved batch and 4.2 L of DI water are simultaneously charged to the heel slurry at constant rates over 6 hours to maintain a constant solvent composition in the crystallizer. Use of Intermig agitators during the
25 crystallization is preferred. During this addition the slurry is wet-milled when the crystal lengths become excessively long or the slurry becomes too thick. The slurry is aged for 2 to 16 hours until the product concentration in the supernatant remains constant. The slurry is filtered to isolate a crystalline wet cake. The wet cake is washed with 1
30 to 2 bed volumes of 30 % 2-propanol in water and then twice with 1 bed volume of DI water each. The washed wet cake is dried under vacuum at 50 °C.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OF PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one which is characterized by an X-ray powder diffraction pattern comprising the following 2 θ peaks with intensities (I/I_{max}, %) of 10 or greater:

6.0800	6.3900
10.3950	10.9875
12.2850	13.1900
14.1700	15.1925
16.9000	18.4375
19.2275	20.0925
21.2100	22.3600
23.0725	24.8900
25.9500	26.3575
27.2550	28.1150
28.5850	29.1325
29.5625	30.6850
32.3725	38.3125

2. Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one characterized by having crystallographic D-spacings of 14.5, 8.5, 8.0, 7.2, 6.7, 6.2, 5.2, 4.6, 4.4, 4.2 and 3.6 Angstroms.
3. Form I according to Claim 2, having no detectable peaks for Form II or Form III in its X-ray powder diffraction pattern.
4. A process for preparing the crystalline Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one compound as recited in any one of Claims 1 to 3, which comprises:
- (1) dissolving the compound in a solvent of C₁-C₆ alcohol in a ratio of about 3.0 ml to about 10.0 ml of solvent to 1 gram of the compound;

- (2) filtering the solution of the compound to remove any particulate matter;
- (3) adding anti-solvent to the stirring solution at room temperature over a period of about 30 minutes to about an hour to reach the saturation point of the solution containing the compound;
- (4) adding to the solution a solid seed charge of Form I of the compound in the amount of about 2 to about 10 percent by weight to form a slurry;
- (5) milling the slurry to reduce the thickness of the slurry;
- (6) adding the remaining anti-solvent and milling the slurry as needed during the addition;
- (7) slowly cooling the slurry to about 5°C to about 20°C;
- (8) aging for about 2 to about 16 hours until the supernatant concentration reaches equilibrium;
- (9) milling the slurry, as needed, to reduce the thickness of the slurry;
- (10) filtering the milled slurry to isolate a wet cake of the Form I crystalline compound;
- (11) washing the wetcake once with about 1 to about 2 bed volumes of the final crystallization solvent composition and then twice with water using about 5-10 ml water per gram of compound; and
- (12) drying the washed wetcake at about 40°C to about 90°C under vacuum for about 1 hour to about 3 days, or until the loss on dryness is less than 0.5 weight percent to obtain the Form I crystalline compound.

5. The process as recited in Claim 4 wherein the anti-solvent is defined as

water.

6. The process as recited in Claim 4 wherein the temperature during the anti-solvent addition (Step 3) is about 20°C to about 25°C.
7. The process as recited in Claim 4 wherein the temperature used during the drying of the washed wetcake (Step 12) is about 40°C to about 60°C.
8. The process as recited in Claim 5 wherein the solvent volume to anti-solvent volume ratio used (Step 6) is about 30% to about 50%.
9. The process as recited in Claim 8, wherein the solvent is selected from methanol, ethanol and 2-propanol.
10. The process as recited in Claim 5 wherein the C₁-C₆ alcohol is methanol.
11. The process as recited in Claim 5 wherein the C₁-C₆ alcohol is ethanol.
12. The process as recited in Claim 5 wherein the C₁-C₆ alcohol is 2-propanol.
13. The process as recited in Claim 11 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about a 30% to about a 40% ethanol to water solvent to anti-solvent volume to volume ratio.
14. The process as recited in Claim 10 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about 40% to about 50% methanol to water solvent to anti-solvent volume to volume ratio.
15. The process as recited in Claim 12 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about 25% to about 35% 2-propanol to water solvent to anti-solvent volume to volume ratio.

16. The process as recited in Claim 15 wherein the total solvent system volume per gram of compound is about 15 ml/gm of about 30% 2-propanol to water solvent to anti-solvent volume to volume ratio.

17. A process for obtaining the crystalline Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one as recited in any one of Claims 1 to 3, which comprises:

- (1) mixing about 10% to about 20% by weight of a final amount of Form I (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one with solvent and anti-solvent to about 20°C to form a Form I heel, wherein the solvent is selected from acetonitrile, dimethyl acetamide, dimethyl formamide, and alcohol;
- (2) adding a solution of solvent and (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one, and adding anti-solvent to the heel simultaneously at constant rates over about 6 hours maintaining the v/v ratio of solvent to anti-solvent;
- (3) milling the slurry during the addition to reduce the thickness of the slurry;
- (4) cooling the slurry to about 10°C over about 3 hours and aging the slurry until the supernatant concentration reaches equilibrium;
- (5) filtering the milled slurry to isolate a wetcake of the Form I crystalline compound;
- (6) washing the wetcake once with about 1 to about 2 bed volumes of the final crystallization solvent composition and then twice with water using about 5 ml to about 10 ml water per gram of compound; and

- (7) drying the washed wetcake at about 40°C to about 90°C under vacuum for about 1 hour to about 3 days, or until the loss on dryness is less than 0.5 weight percent to obtain the Form I crystalline compound.
18. The process as recited in Claim 17 wherein the anti-solvent is defined as water.
19. The process as recited in Claim 18 wherein the alcohol solvent is defined as C₁-C₆ alcohol.
20. The process as recited in Claim 17 wherein the temperature of the solution during the compound-solvent solution/anti-solvent addition (Step 2) is about 5°C to about 20°C.
21. The process as recited in Claim 17 wherein the temperature used during the drying of the washed wetcake (Step 7) is about 40°C to about 60°C.
22. The process as recited in Claim 19 wherein the alcohol to anti-solvent volume to volume ratio used (Step 2) is about 30% to about 50%.
23. The process as recited in Claim 22, wherein the solvent is selected from methanol, ethanol and 2-propanol.
24. The process as recited in Claim 19 wherein the C₁-C₆ alcohol is methanol.
25. The process as recited in Claim 19 wherein the C₁-C₆ alcohol is ethanol.
26. The process as recited in Claim 19 wherein the C₁-C₆ alcohol is 2-propanol.
27. The process as recited in Claim 25 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about a 30% to about a 40% ethanol to water solvent to anti-solvent volume to volume ratio.

28. The process as recited in Claim 24 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about 40% to about 50% methanol to water solvent to anti-solvent volume to volume ratio.

29. The process as recited in Claim 26 wherein the total solvent system volume per gram of compound is about 12 ml/gm to about 20 ml/gm of about 25% to about 35% 2-propanol to water solvent to anti-solvent volume to volume ratio.

30. The process as recited in Claim 29 wherein the total solvent system volume per gram of compound is about 15 ml/gm of about 30% 2-propanol to water solvent to anti-solvent volume to volume ratio.

31. A process for obtaining crystalline Form I of (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one as recited in any one of claims 1 to 3, which comprises:

dissolving (-)-6-chloro-4-cyclopropylethynyl-4-trifluoromethyl-1,4-dihydro-2H-3,1-benzoxazin-2-one in 2-propanol;

adding water to obtain a 25% to 35% 2-propanol to water solvent to anti-solvent volume to volume ratio to initiate crystallization of crystalline Form II;

isolating the crystalline Form II; and

converting Form II to Form I by drying.

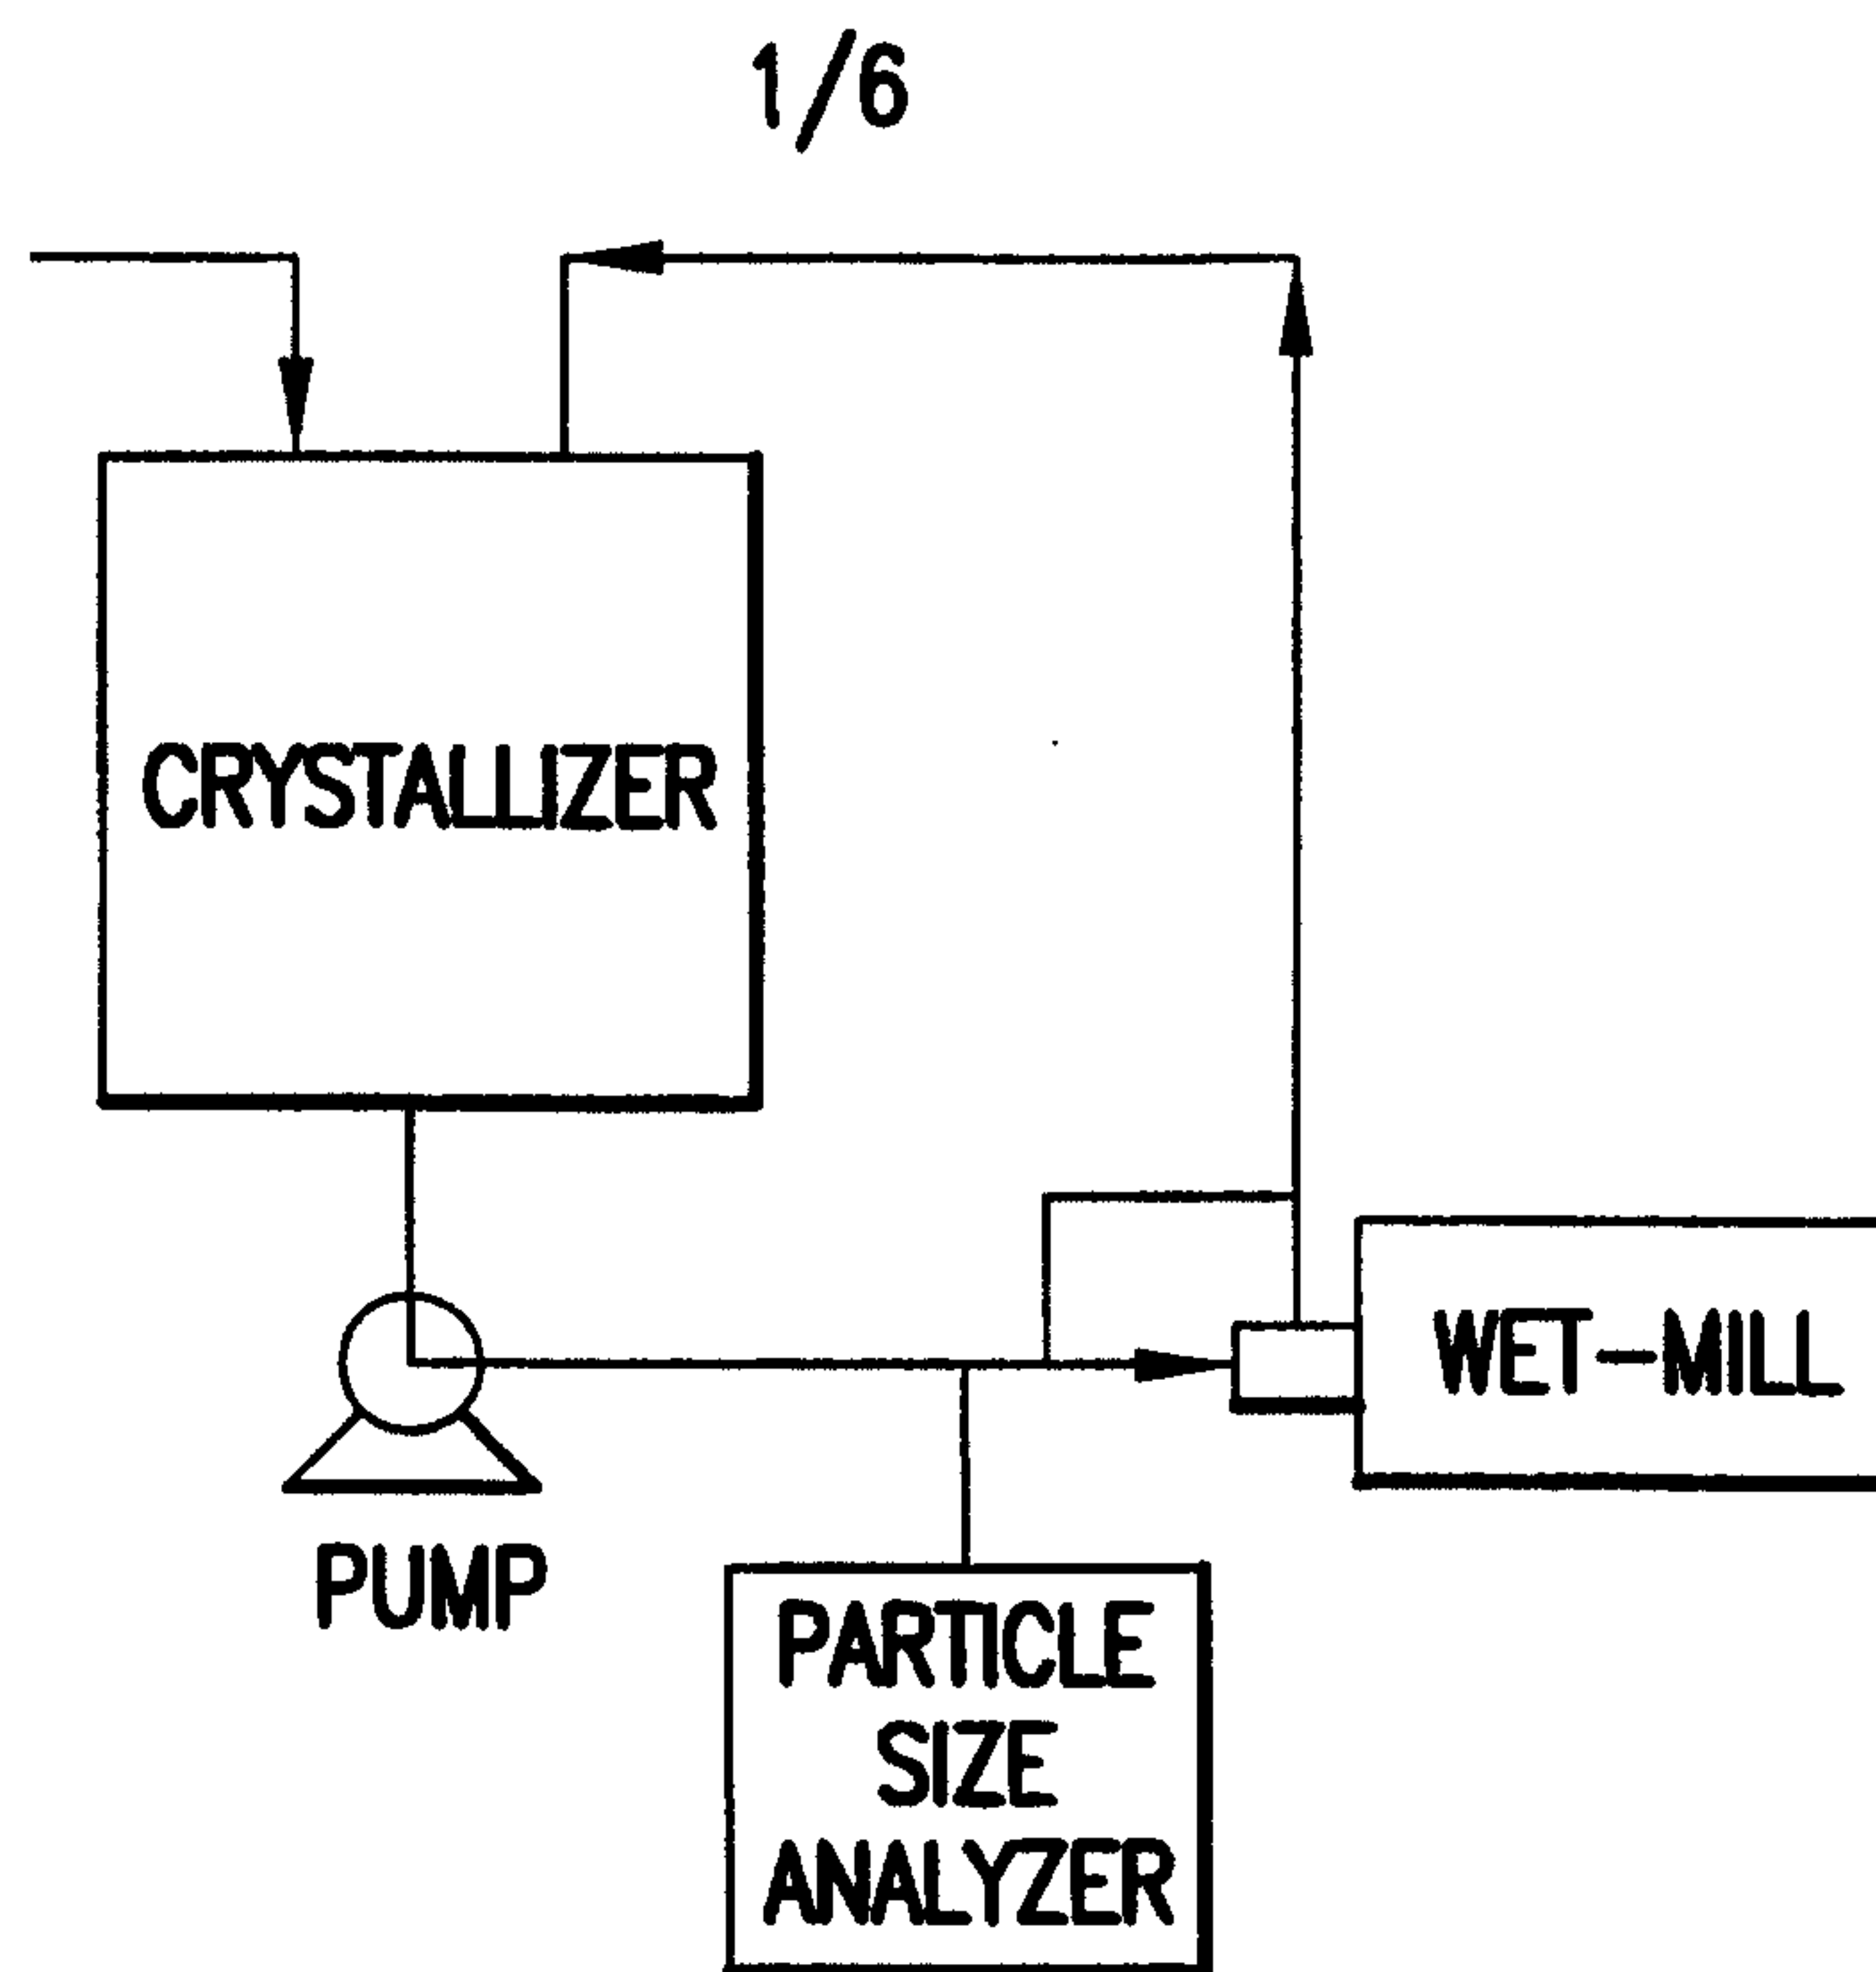


FIG.1

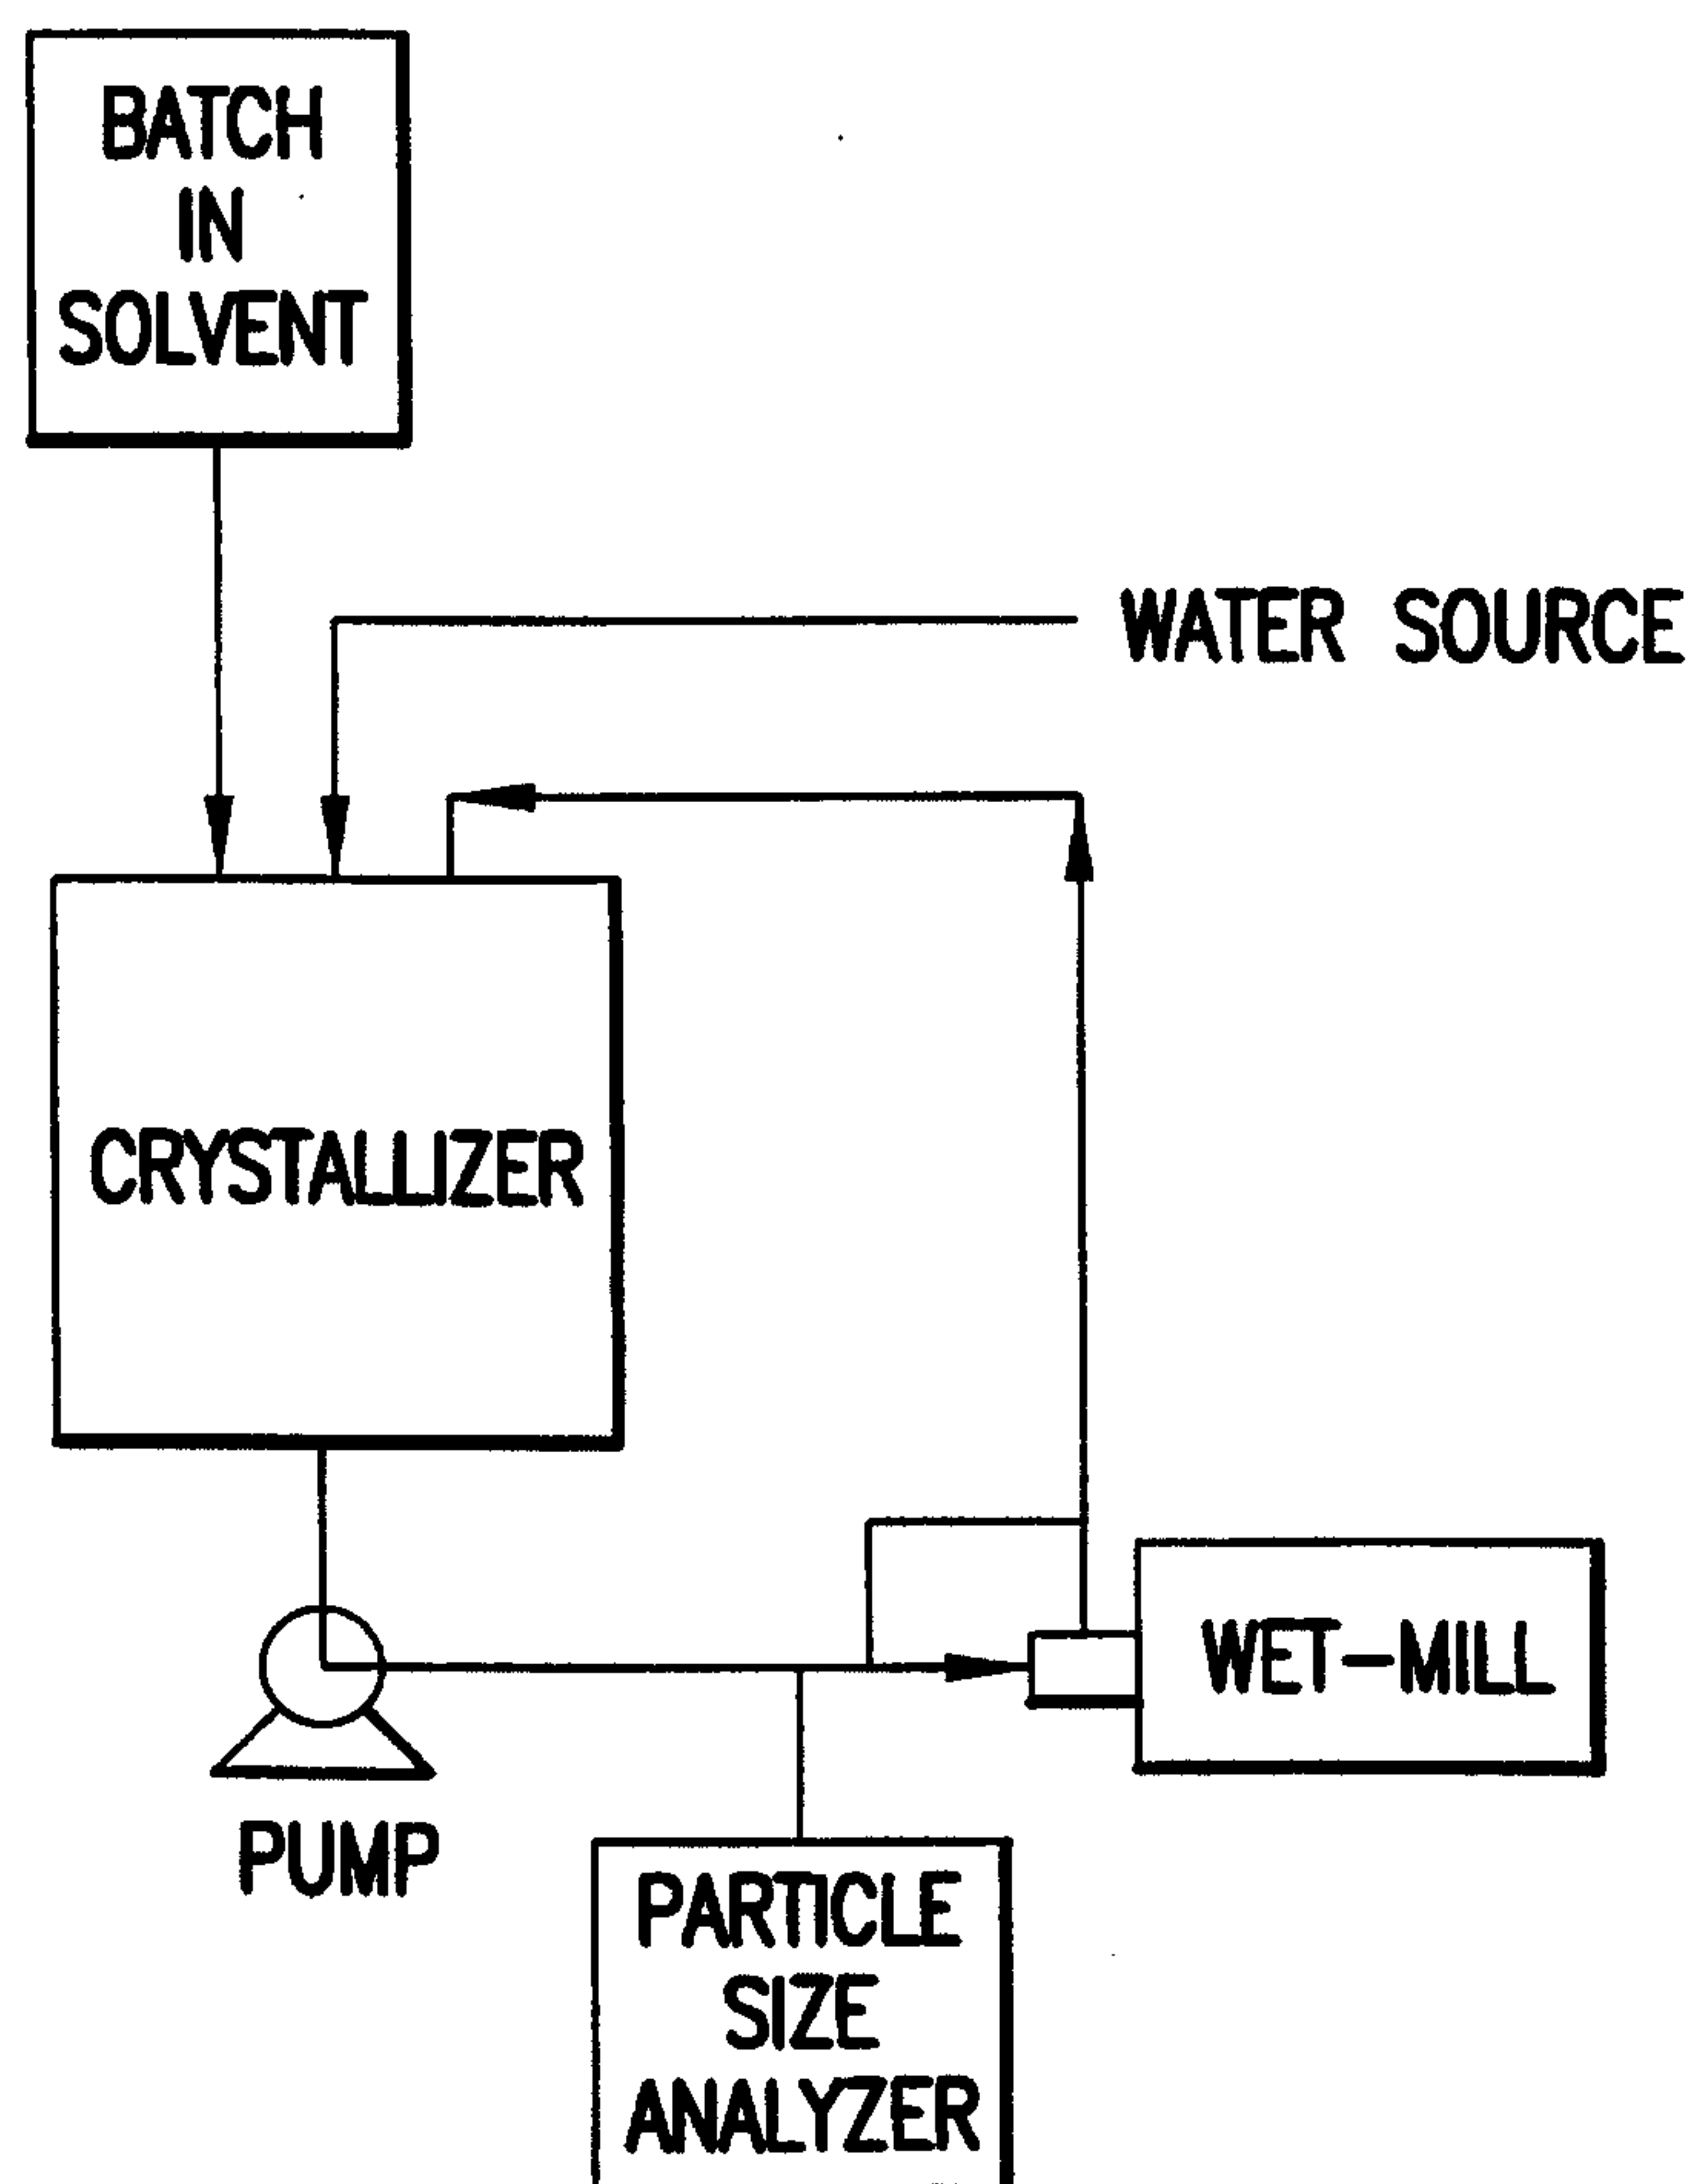


FIG.2

2/6

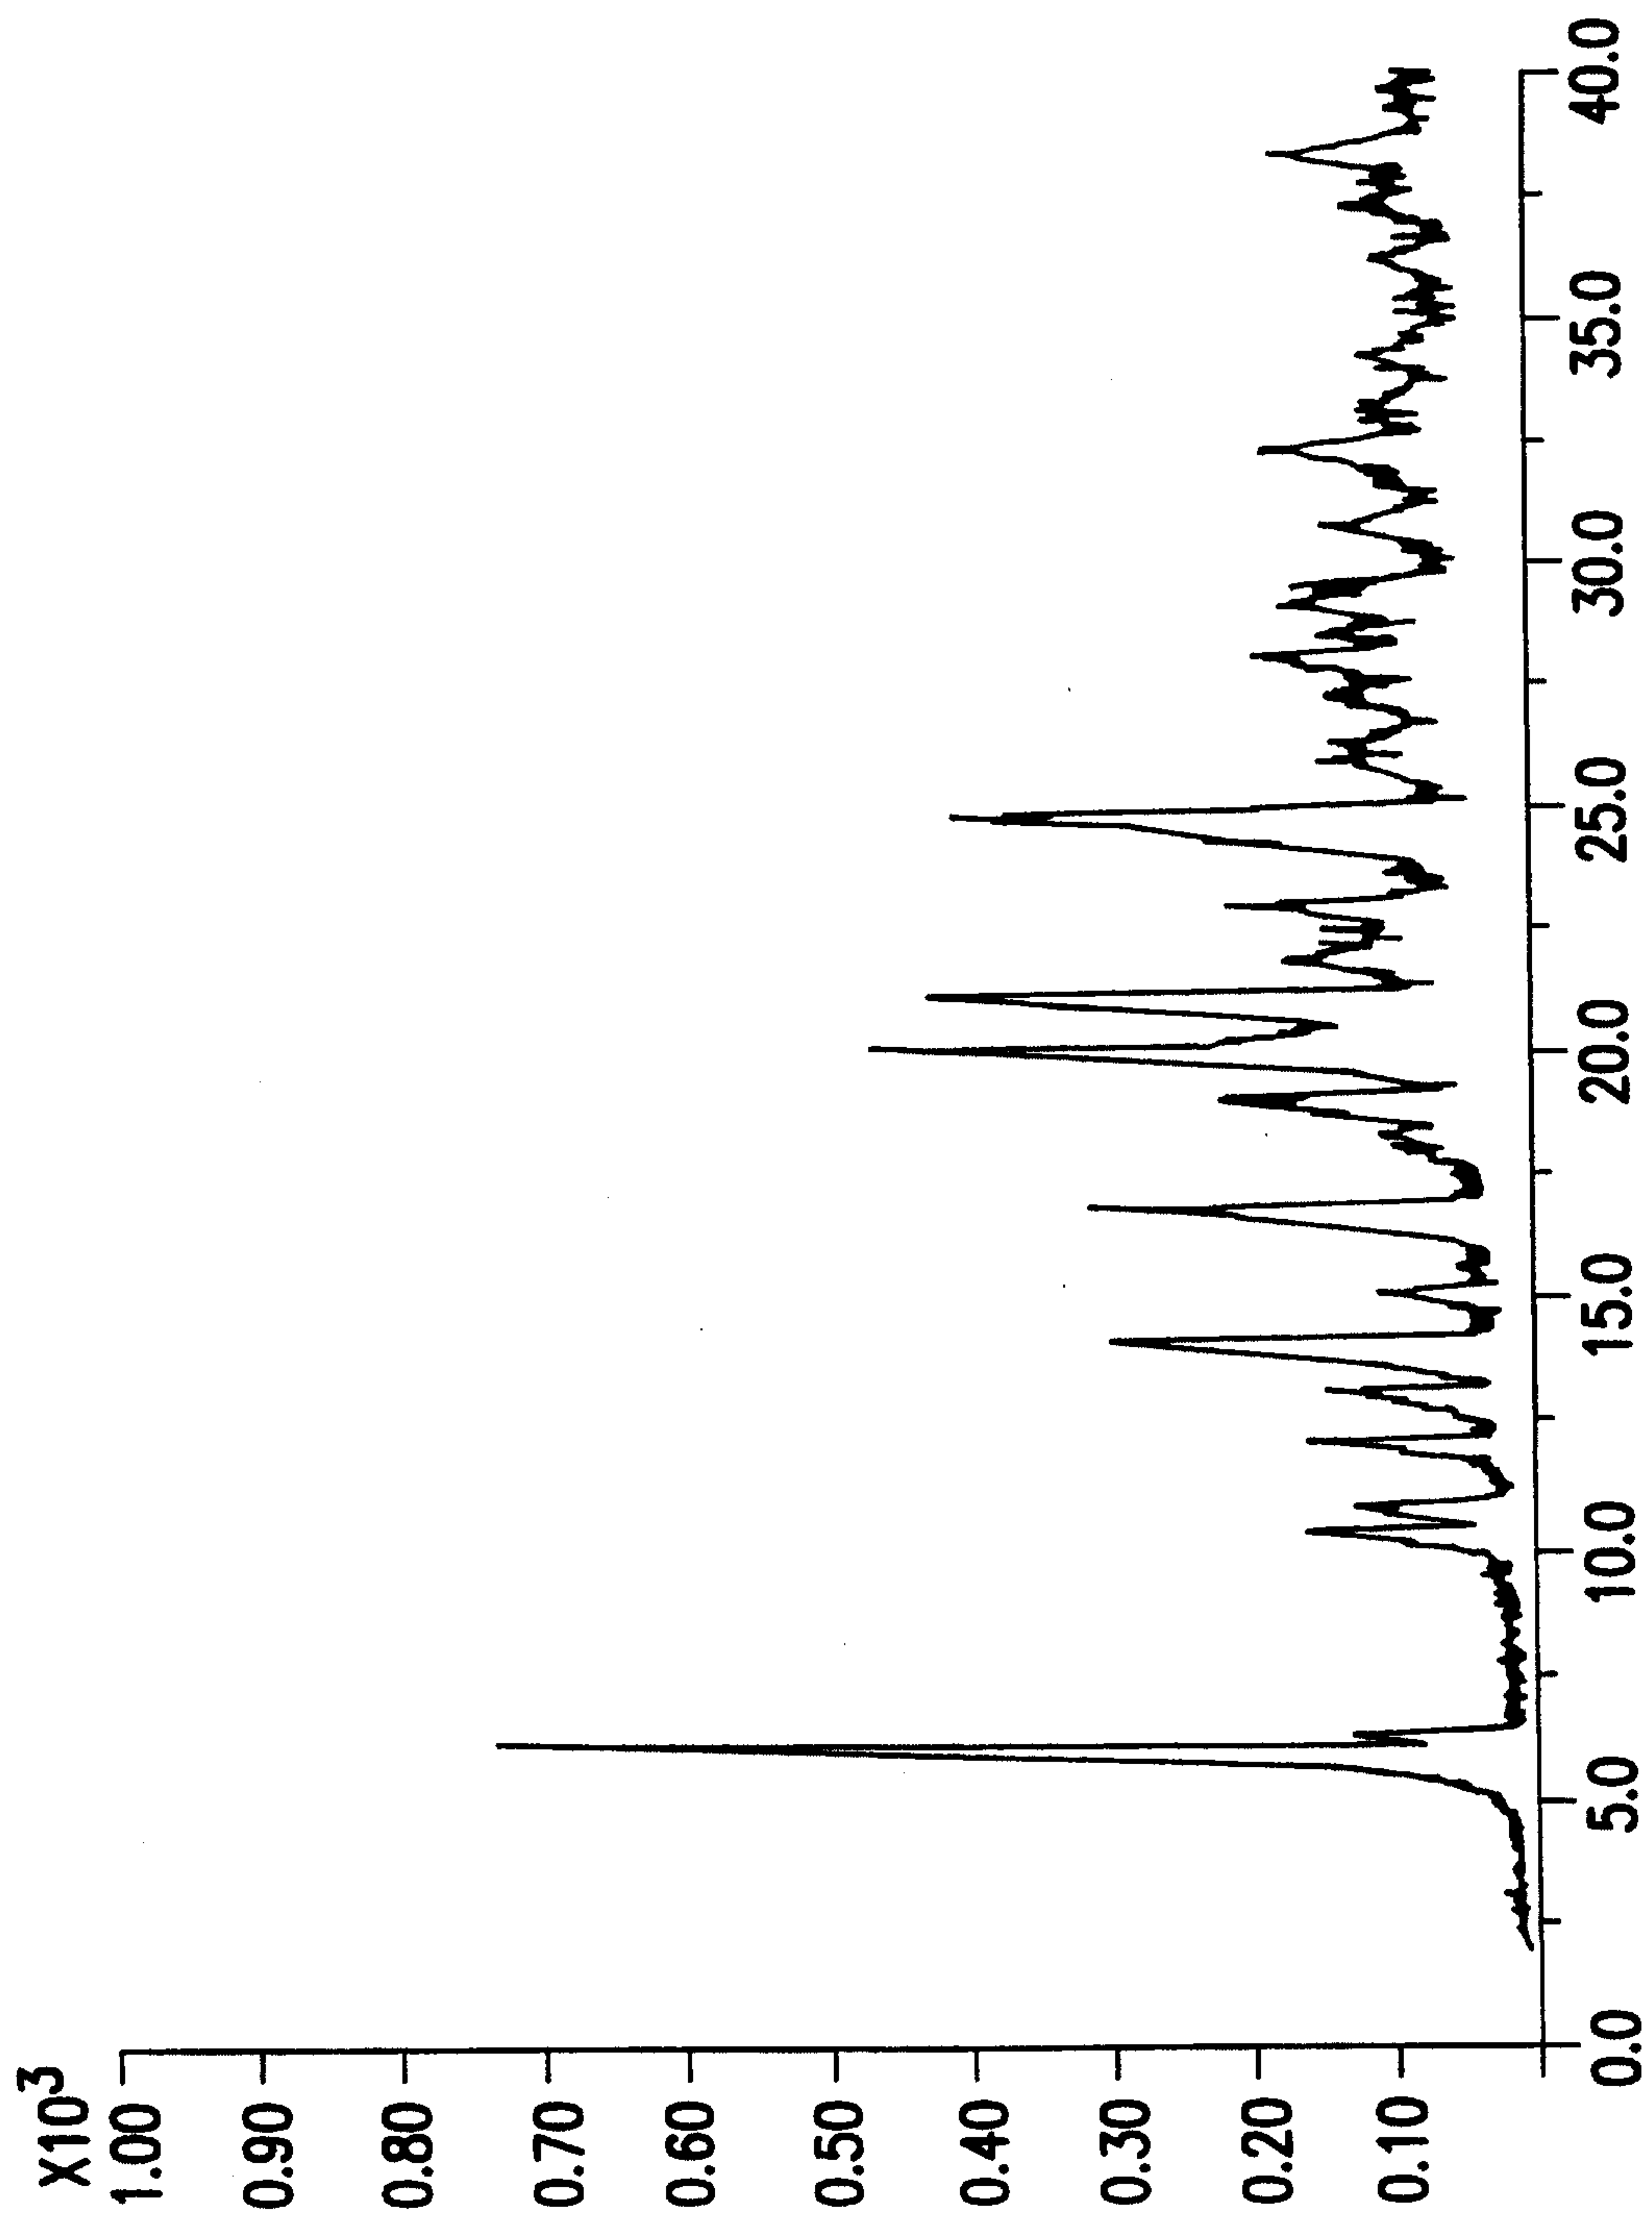


FIG.3

3/6

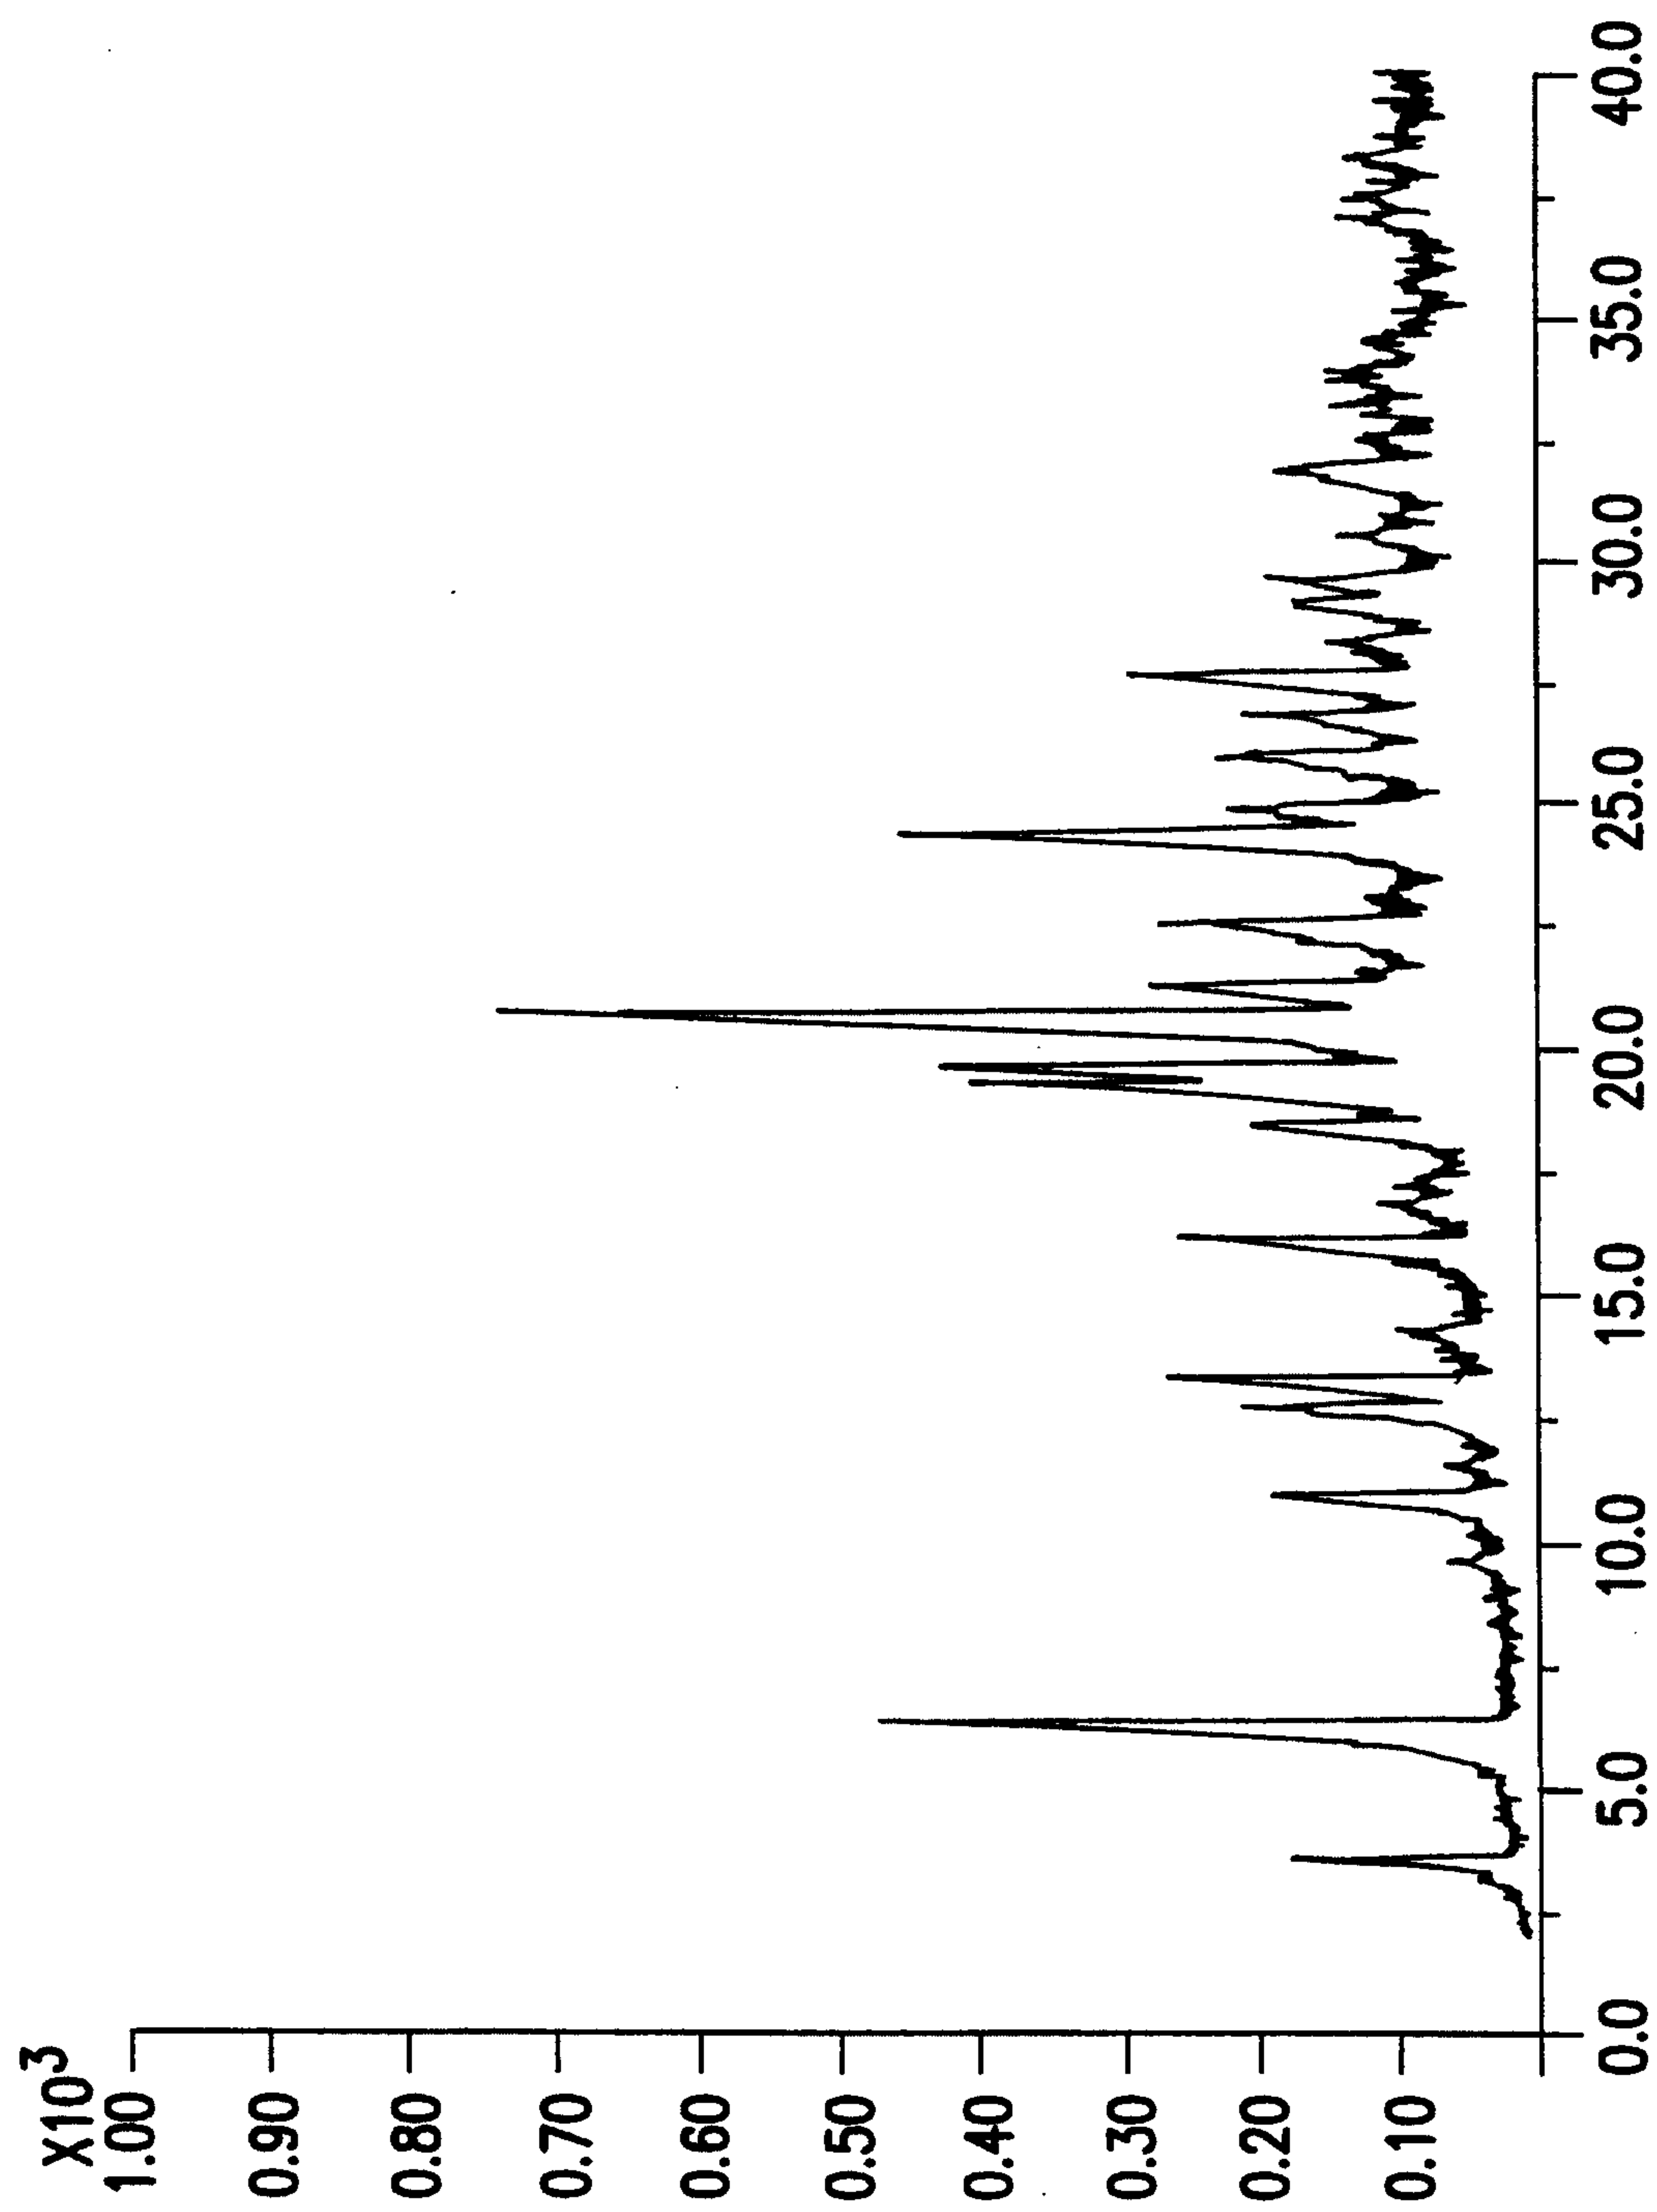


FIG.4

4/6

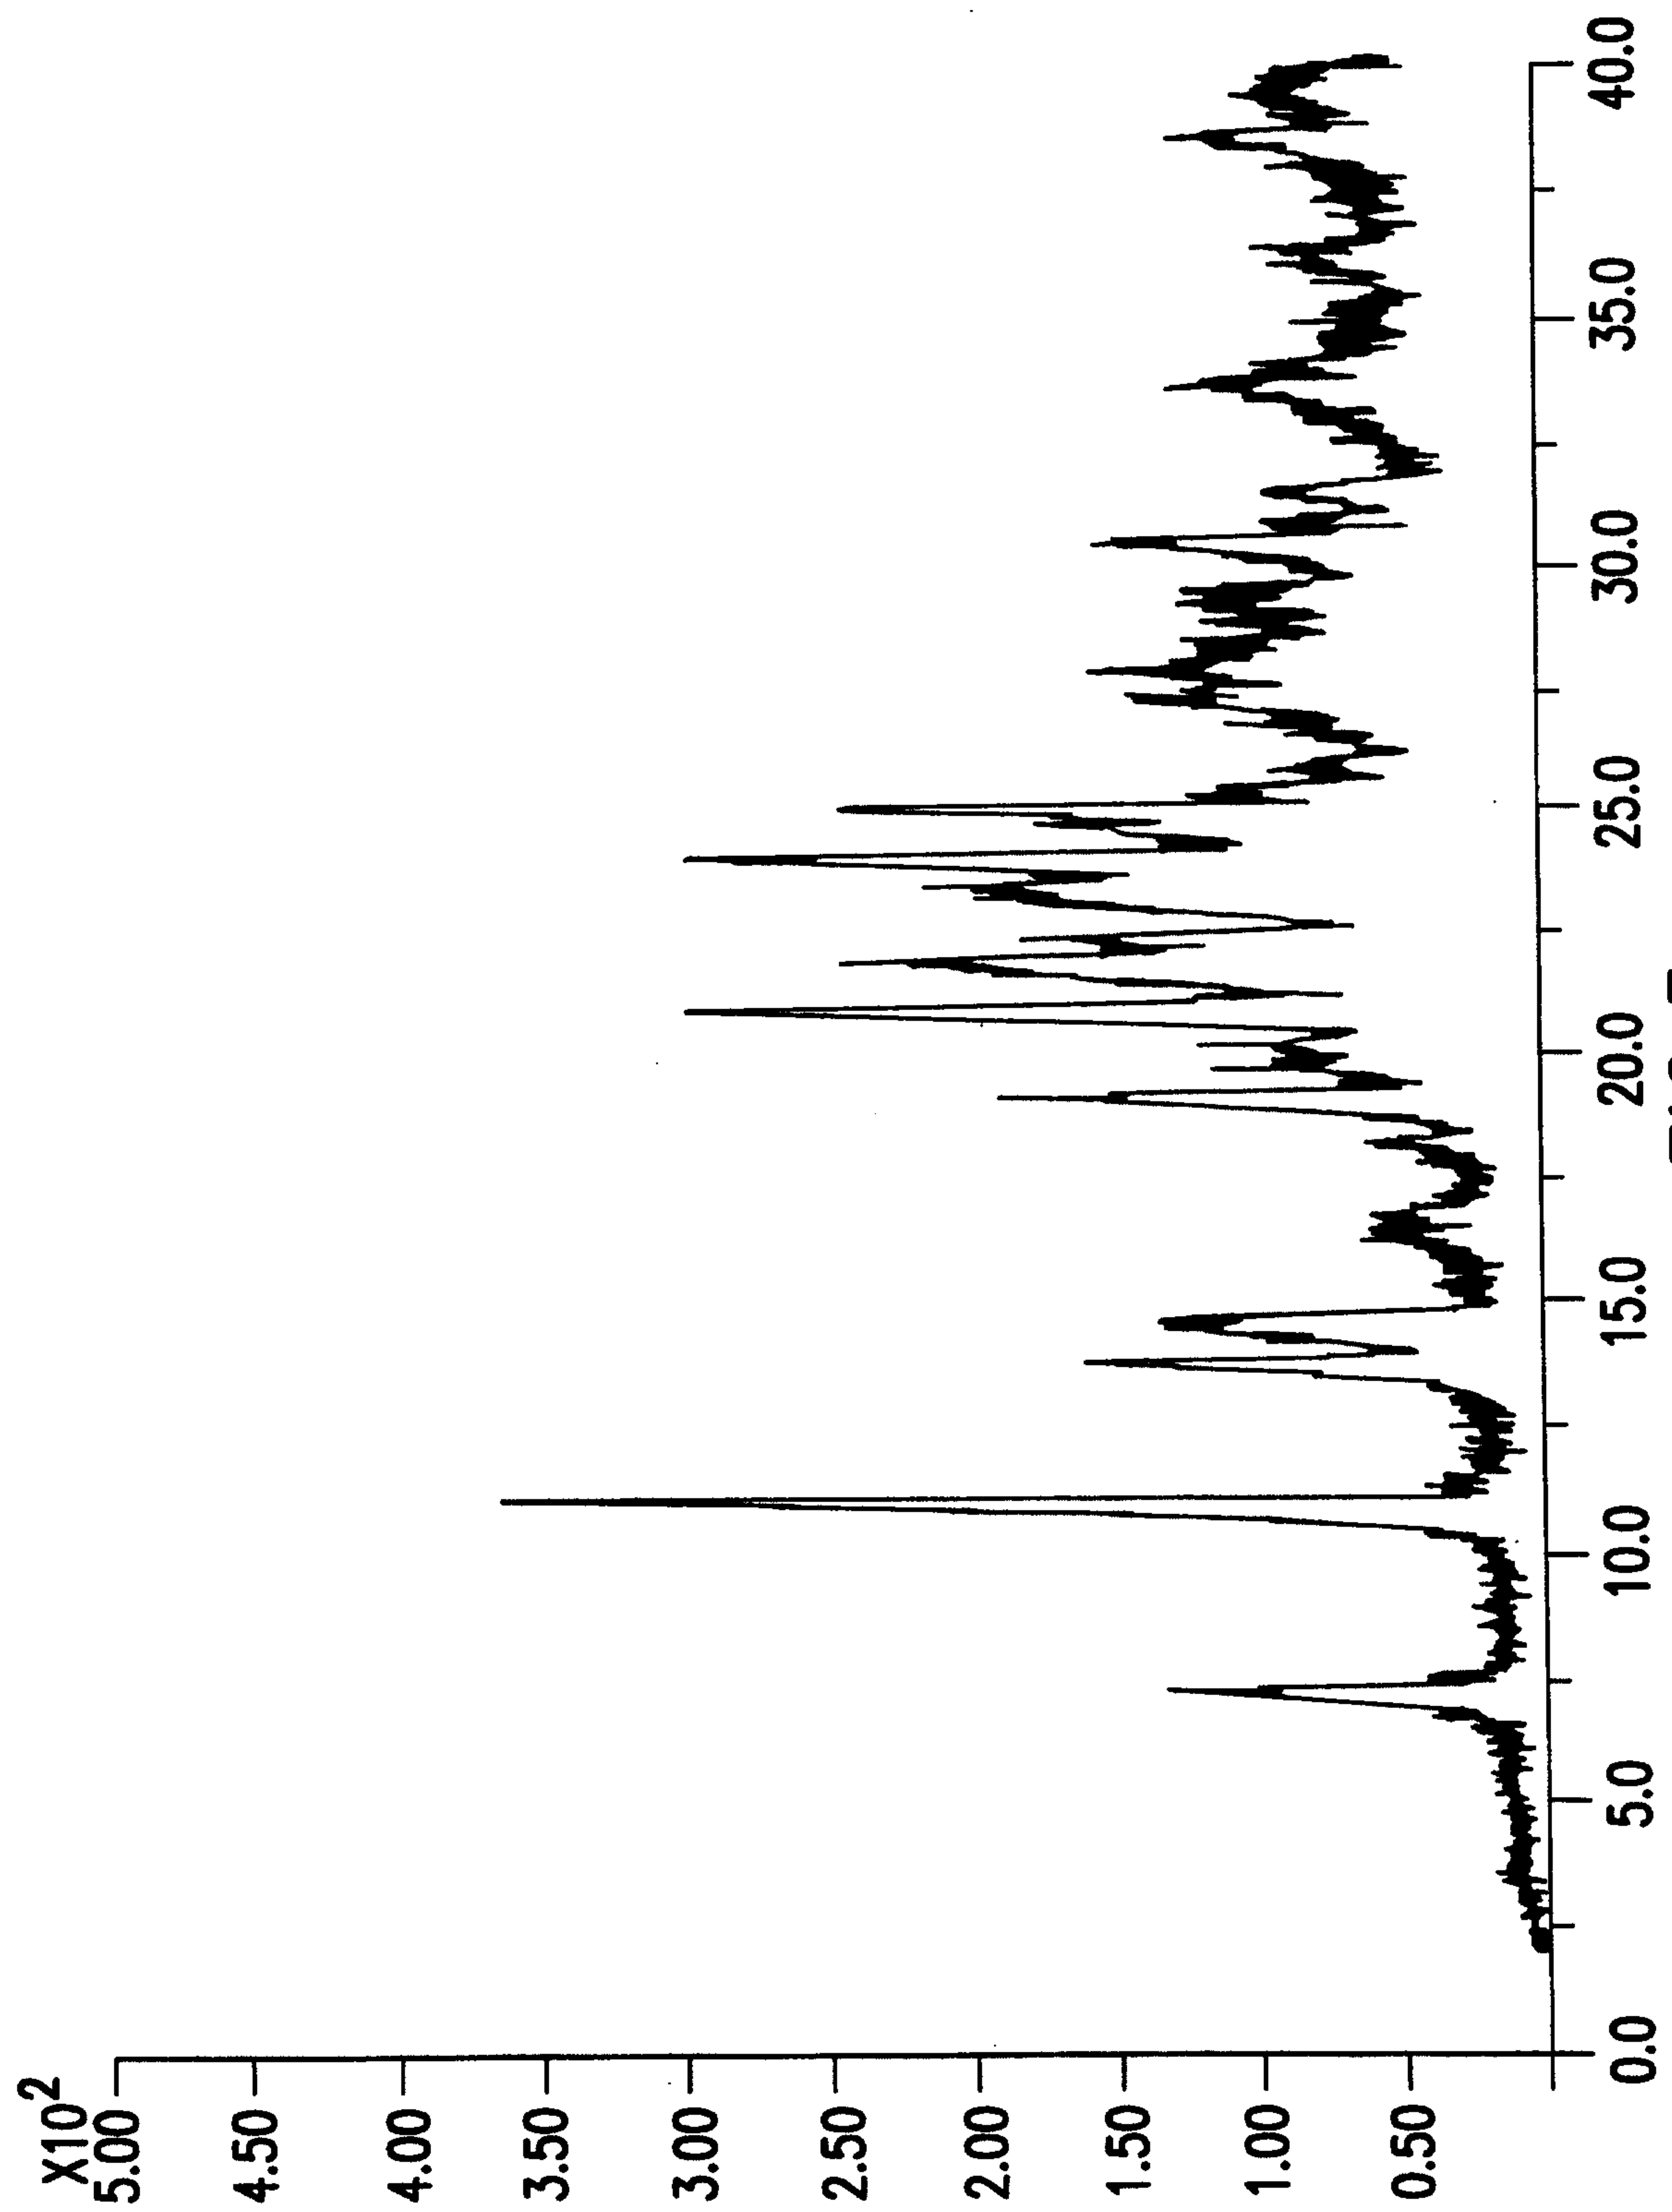


FIG.5

5/6

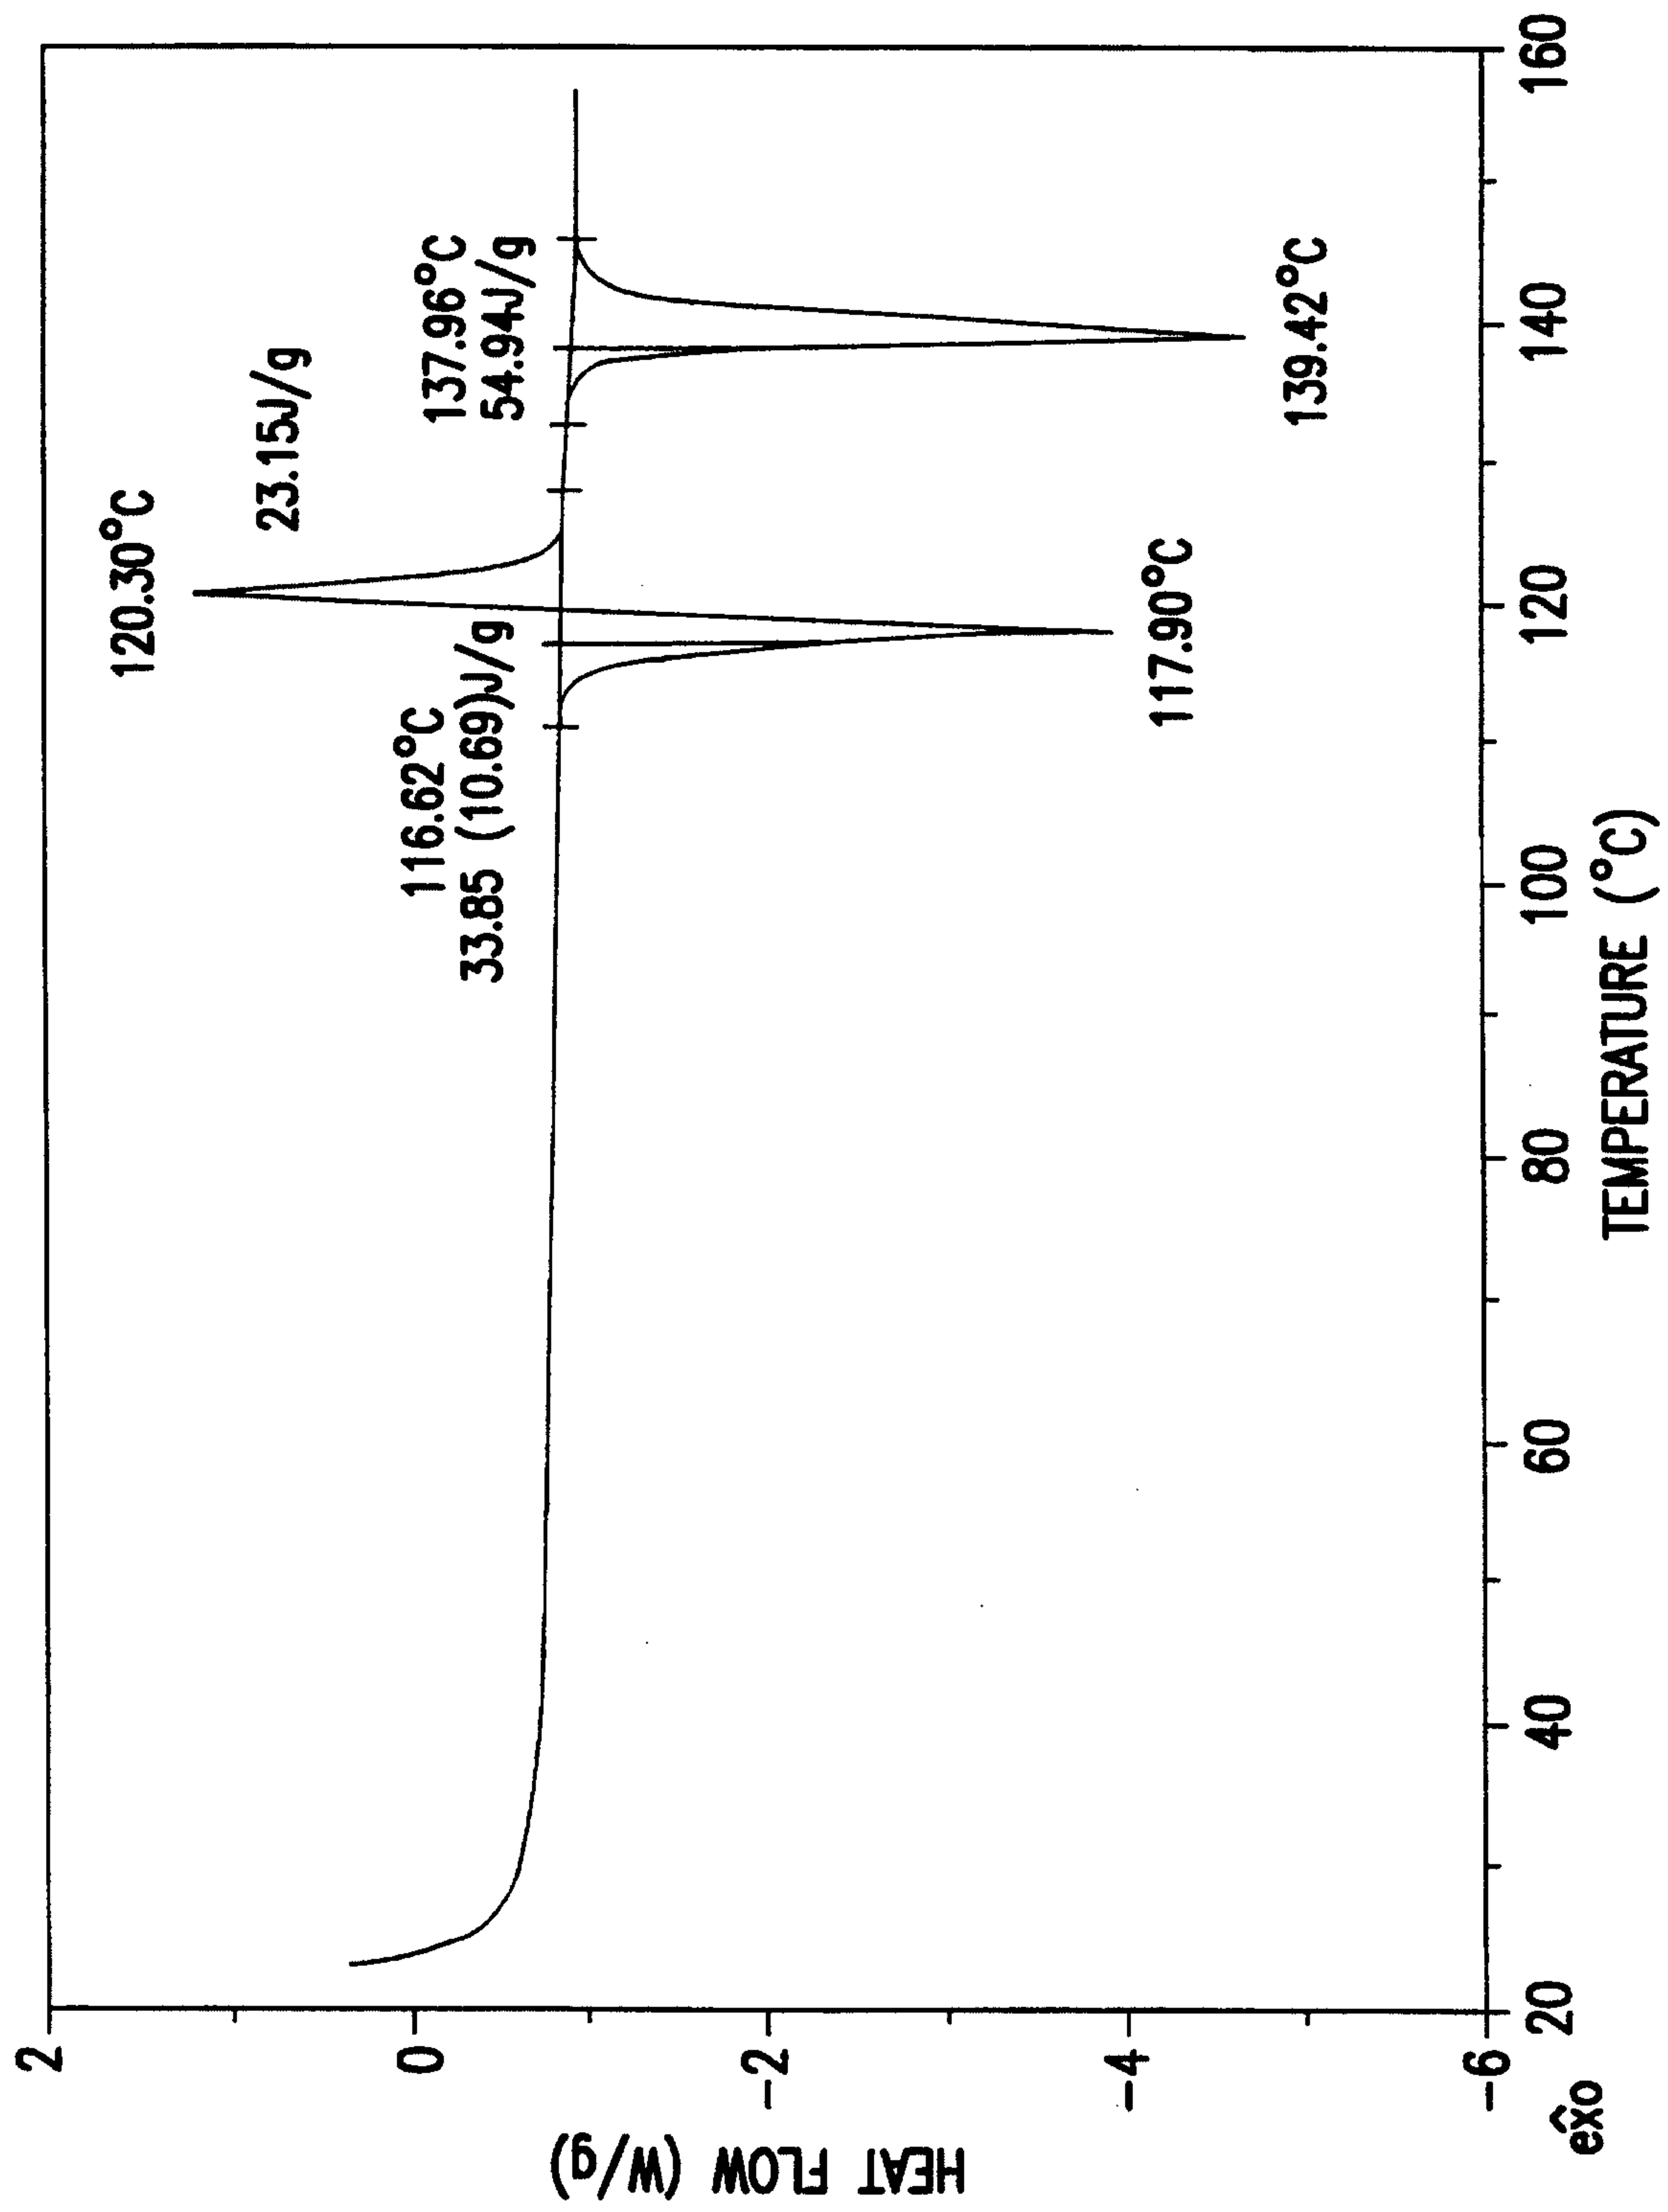


FIG. 6

6/6

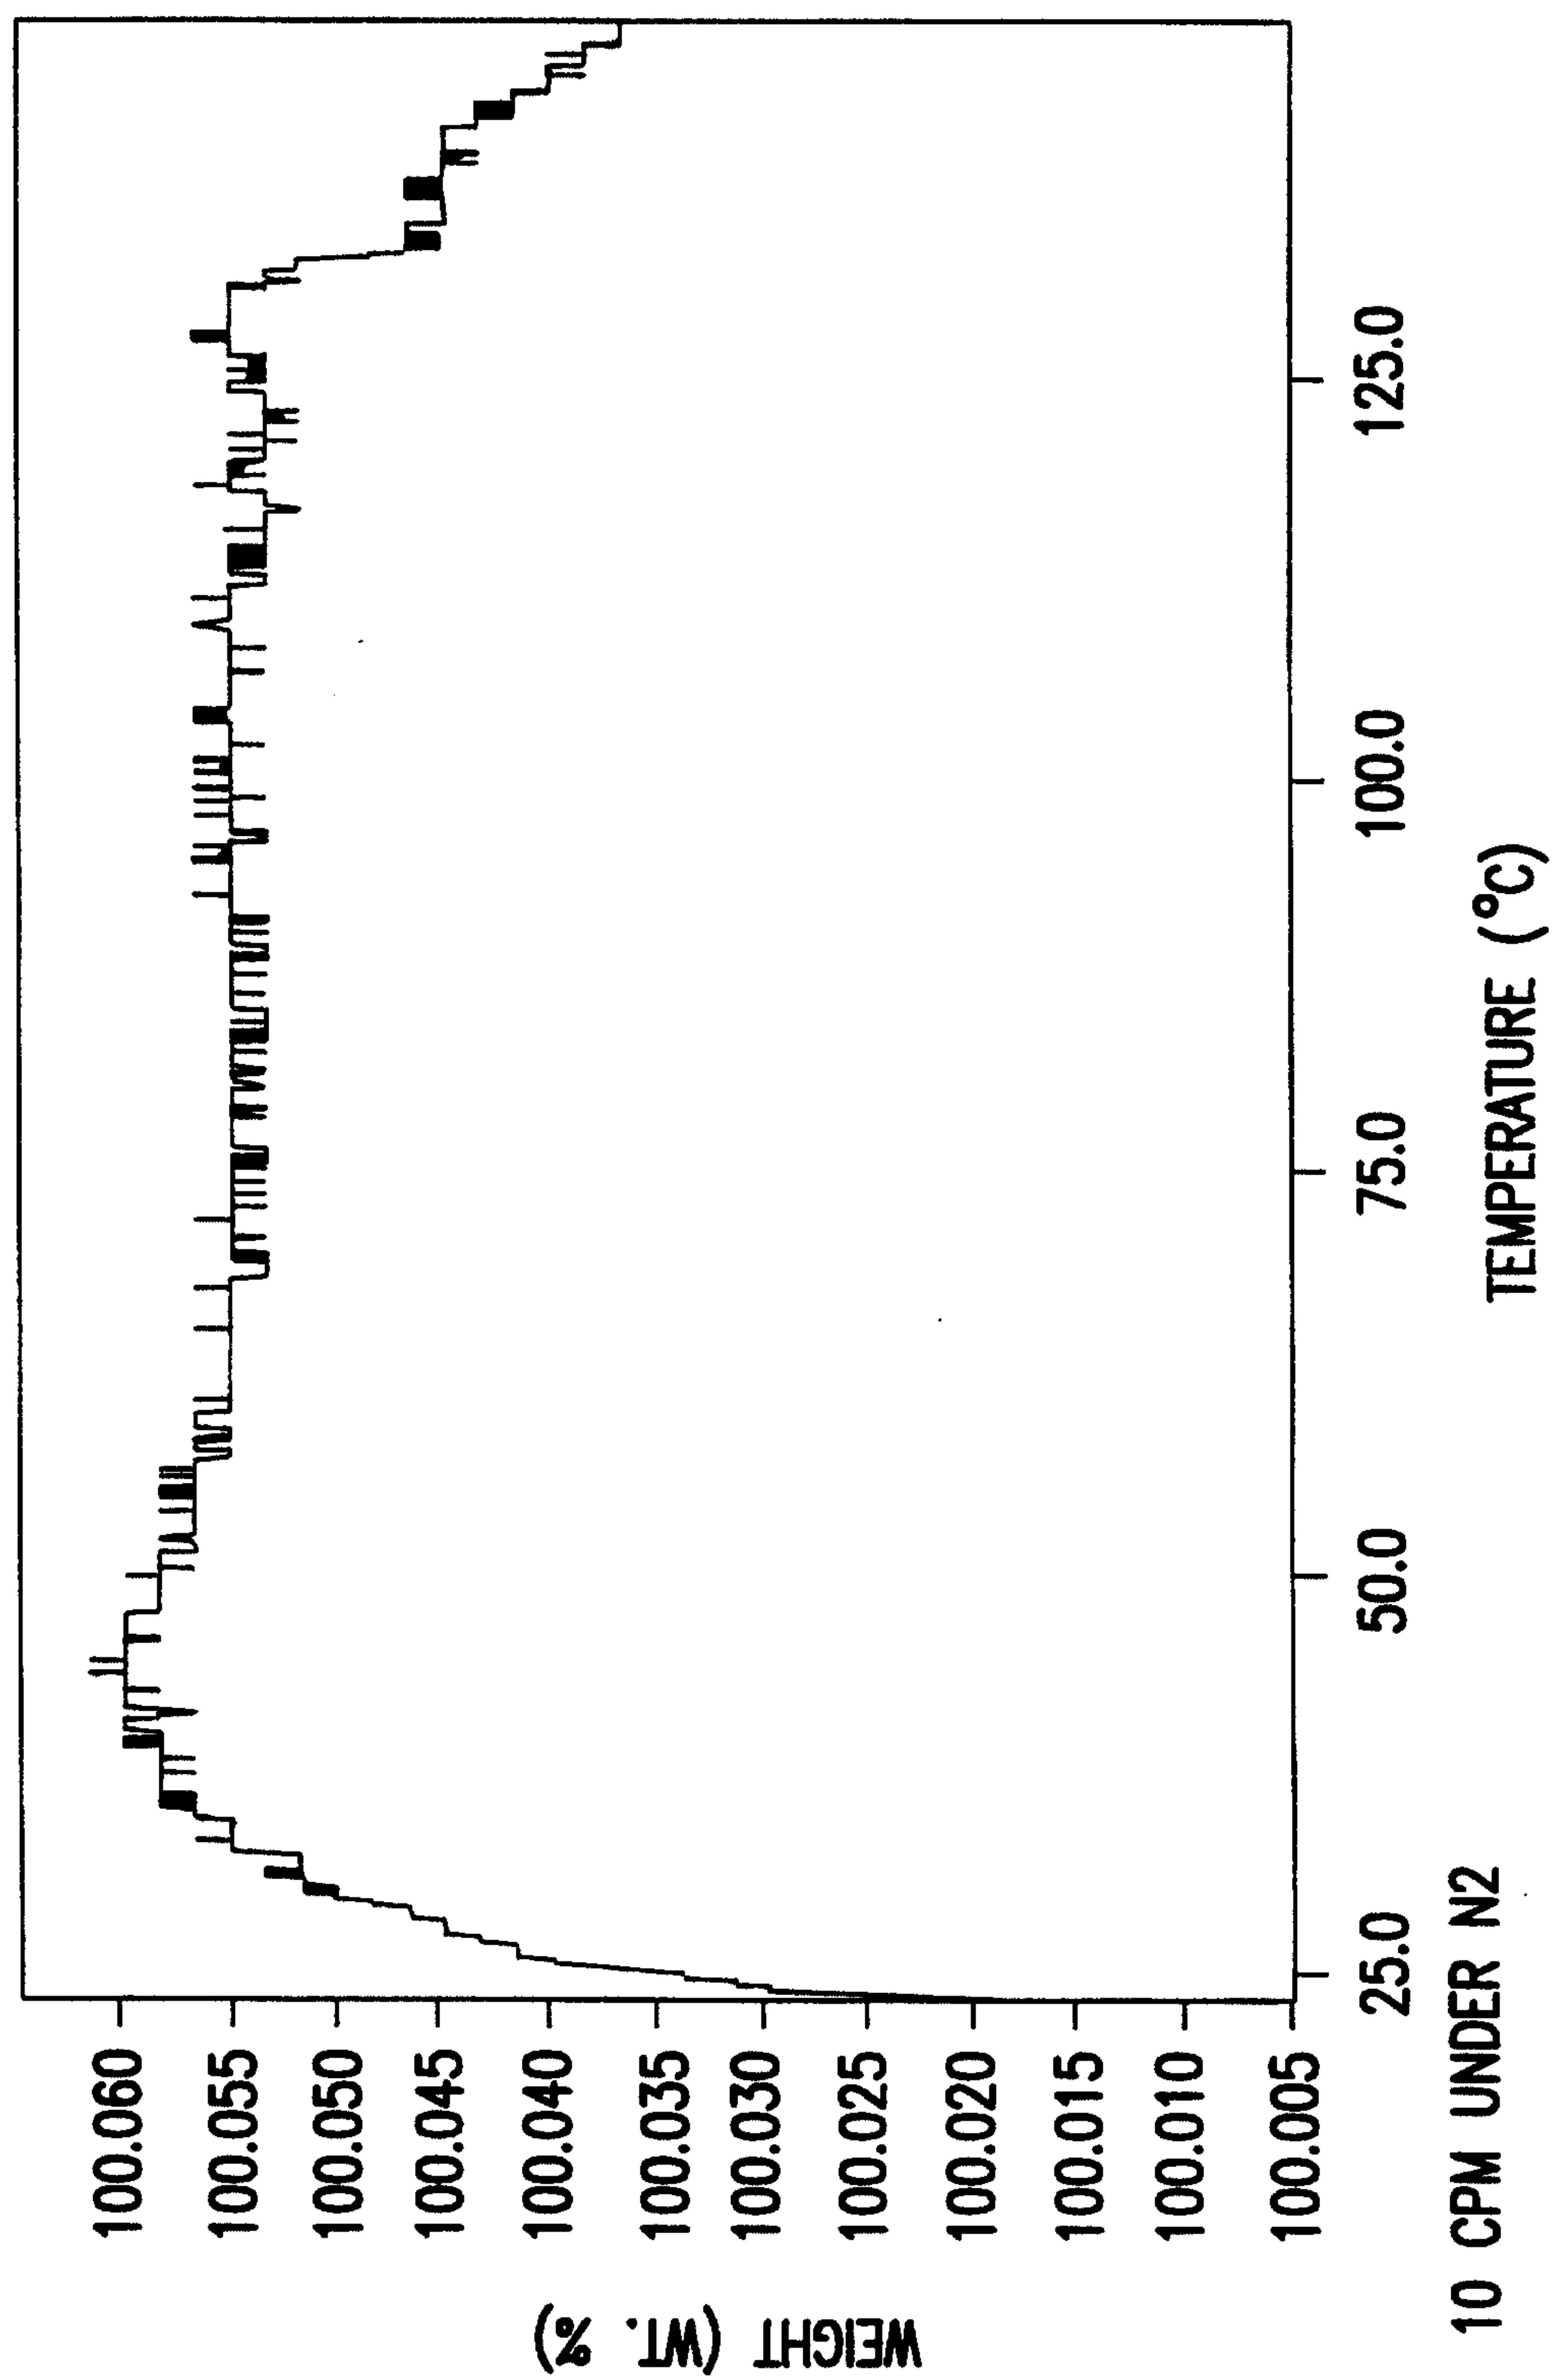


FIG. 7

