

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number
WO 2005/034906 A1

(51) International Patent Classification⁷: **A61K 7/48**, 7/00

(21) International Application Number:
PCT/US2004/032916

(22) International Filing Date: 6 October 2004 (06.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/681,803 7 October 2003 (07.10.2003) US

(71) Applicant (for all designated States except US): **CABOT CORPORATION** [US/US]; Two Seaport Lane, Suite 1300, Boston, MA 02210-2019 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KOSBACH, Laurent, P.** [FR/FR]; 3, Avenue des Pavillons, F-92700 Colombes (FR). **SIMS, Elizabeth, S.** [US/US]; 5 Hawthorne Lane, Bedford, MA 01730 (US).

(74) Agent: **LANDO, Michelle, B.**; Cabot Corporation, 157 Concord Road, Billerica, MA 01821-7001 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SOFT-FOCUS COSMETIC COMPOSITION COMPRISING FUMED ALUMINA

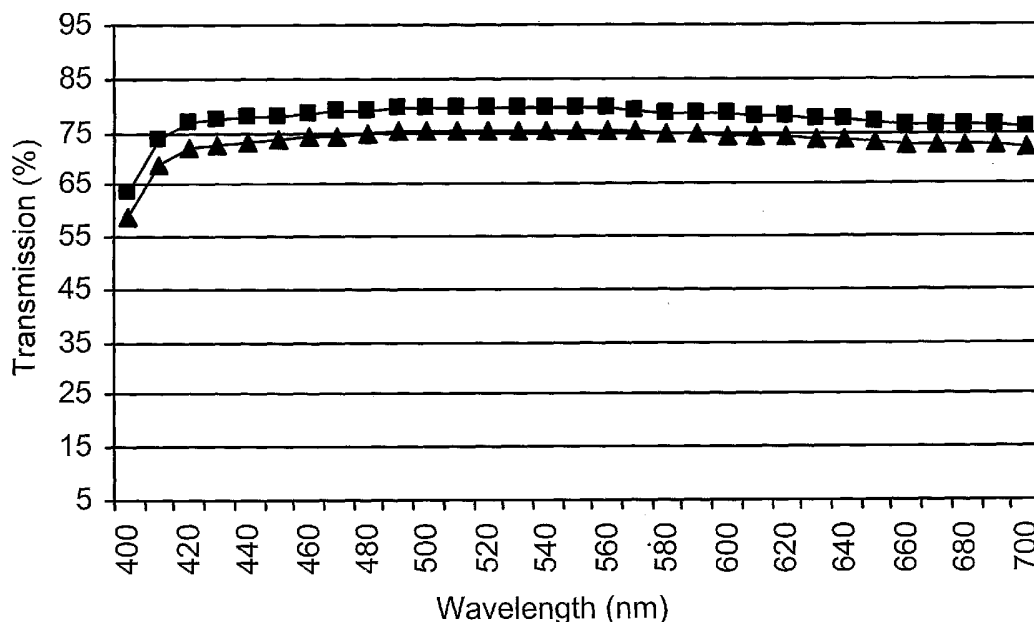

(57) Abstract: A soft-focus cosmetic composition comprising about 3 wt.% or more fumed alumina particles, a method of enhancing the soft-focus effect of a cosmetic composition comprising combining the cosmetic composition with about 3 wt.% or more fumed alumina particles, and a method for disguising skin imperfections, which method comprises applying a cosmetic composition to the skin, wherein the cosmetic composition comprises about 3 wt.% or more fumed alumina particles.

WO 2005/034906 A1

SOFT-FOCUS COSMETIC COMPOSITION
COMPRISING FUMED ALUMINA

FIELD OF THE INVENTION

[0001] This invention pertains to cosmetic compositions and methods for enhancing the soft-focus effect of cosmetic compositions and for disguising skin imperfections using soft-focus cosmetic compositions.

BACKGROUND OF THE INVENTION

[0002] In an aging population, the demand for cosmetic products that hide the effects of aging has significantly increased. Wrinkles and fine lines, the primary signs of aging, cause the skin tone to look uneven by trapping light in the crevices formed by the wrinkles. The trapped light is absorbed and causes the appearance of dark spots. Unfortunately, many foundations and make-ups currently available on the market actually accentuate fine lines and wrinkles due to migration of the pigments into the wrinkle crevices. Other make-up compositions effectively cover up the imperfections, but create an unnatural, caked-on appearance.

[0003] A more recent approach to covering up the signs of aging involves the use of light-diffusing particles, which hide skin imperfections while projecting the natural skin tone. This approach has come to be known as the "soft-focus" effect. The criteria for a light-diffusing particle, which if met would provide the optimum diffusion or soft-focus effect, are outlined in Emmert, "Quantification of the Soft-Focus Effect," *Cosmetics and Toiletries*, 111,57-61 (1996). The criteria are as follows: (1) the diffusive particle needs to have minimal light absorption, (2) the diffusive particle needs to have high total light transmission to provide a natural appearance, (3) most of the light transmission needs to be diffuse, so that the light reflected from the skin appears to be evenly distributed, (4) the specular reflection must be minimal so as to minimize luster that would increase the appearance of wrinkles, and (5) the scattered reflection component of the total reflection needs to be high in order to have an even light distribution over the area independent of underlying wrinkles (Emmert, *supra*, at p.58).

[0004] Cosmetic compositions have employed various light-diffusing particles for the purpose of achieving a soft-focus effect. Such particles include boron nitride particles, nylon particles, flake-like or plate-like alumina particles coated with a polymer or other materials, and spherical silica particles. However, there continues to be a need for additional methods and compositions for achieving a soft-focus effect in cosmetics. The present invention provides such a method and composition. These and other advantages of

the invention, as well as additional inventive features, will be apparent from the description of the invention provided herein.

BRIEF SUMMARY OF THE INVENTION

[0005] The invention provides a soft-focus cosmetic composition comprising about 3 wt.% or more fumed alumina particles. The invention also provides a method of enhancing the soft-focus effect of a cosmetic composition comprising combining the cosmetic composition with about 3 wt.% or more fumed alumina particles. A method for disguising skin imperfections also is provided herein, which method comprises applying a cosmetic composition to the skin, wherein the cosmetic composition comprises about 3 wt.% or more fumed alumina particles.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] **Figure 1** is a graph of the percent transmission of light through a control sample of polymer without any light-diffusing particles at wavelengths of light ranging from 400-700 nm. The square (■) data points represent total transmission measurements, and the triangular data points (▲) represent specular transmission measurements.

[0007] **Figure 2** is a graph of the percent reflection of light from a control sample of polymer without any light-diffusing particles at wavelengths of light ranging from 400-700 nm. The diamond (◆) data points represent total reflectance measurements, and the square data points (■) represent scattered reflectance measurements.

[0008] **Figure 3** is a graph of the percent transmission of light through a sample of polymer containing titanium dioxide particles at wavelengths of light ranging from 400-700 nm. The square (■) data points represent total transmission measurements, and the triangular data points (▲) represent specular transmission measurements.

[0009] **Figure 4** is a graph of the percent reflection of light from a control sample of polymer containing titanium dioxide particles at wavelengths of light ranging from 400-700 nm. The diamond (◆) data points represent total reflectance measurements, and the square data points (■) represent scattered reflectance measurements.

[0010] **Figure 5** is a graph of the percent transmission of light through a sample of polymer containing boron nitride particles at wavelengths of light ranging from 400-700 nm. The square (■) data points represent total transmission measurements, and the triangular data points (▲) represent specular transmission measurements.

[0011] **Figure 6** is a graph of the percent reflection of light from a control sample of polymer containing boron nitride particles at wavelengths of light ranging from 400-700 nm. The diamond (◆) data points represent total reflectance measurements, and the square data points (■) represent scattered reflectance measurements.

[0012] **Figure 7** is a graph of the percent transmission of light through a sample of polymer containing nylon 12 particles at wavelengths of light ranging from 400-700 nm. The square (■) data points represent total transmission measurements, and the triangular data points (▲) represent specular transmission measurements.

[0013] **Figure 8** is a graph of the percent reflection of light from a control sample of polymer containing nylon 12 particles at wavelengths of light ranging from 400-700 nm. The diamond (◆) data points represent total reflectance measurements, and the square data points (■) represent scattered reflectance measurements.

[0014] **Figure 9** is a graph of the percent transmission of light through a sample of polymer containing fumed alumina particles at wavelengths of light ranging from 400-700 nm. The square (■) data points represent total transmission measurements, and the triangular data points (▲) represent specular transmission measurements.

[0015] **Figure 10** is a graph of the percent reflection of light from a control sample of polymer containing fumed alumina particles at wavelengths of light ranging from 400-700 nm. The diamond (◆) data points represent total reflectance measurements, and the square data points (■) represent scattered reflectance measurements.

DETAILED DESCRIPTION OF THE INVENTION

[0016] The invention provides a soft-focus cosmetic composition comprising about 3 wt.% or more fumed alumina particles. The term “fumed alumina” is used herein to refer to a form of alumina that is comprised of substantially spherical primary particles that are fused or aggregated into larger, irregularly shaped aggregate particles. The aggregate bonds between the smaller primary particles are strong; thus, substantial force is required to break the aggregate particles into smaller particles. As a result, the aggregate particles do not typically break down when the particles are dispersed in a carrier. The aggregate particles are usually associated with one another to form even larger agglomerate particles, which are held together by weaker bonds (*e.g.*, hydrogen bonding). Agglomerated particles, thus, can break down into aggregate particles upon dispersion depending upon the amount of dispersion energy used. The fumed alumina particles are substantially different in form, appearance, and physical and/or chemical characteristics from other forms of alumina, such as plate-like or flake-like alumina. While these forms of alumina may form loosely associated agglomerate particles, they are not comprised of aggregate particles, nor are the primary particles spherical in shape.

[0017] As used herein, the term “fumed alumina” encompasses pyrogenic alumina. Fumed alumina can be produced by known methods, such as by fuming processes and other pyrogenic and flame-type processes known in the art, and is commercially available (*e.g.*, SpectraAl™, manufactured by Cabot Corporation). Fumed alumina used in conjunction

with the soft-focus cosmetic composition of the invention typically has a BET surface area of about 35 m²/g or more, such as about 40 m²/g or more, preferably about 45 m²/g or more (*e.g.*, about 50 m²/g or more). The maximum surface area of fumed alumina used in conjunction with the soft-focus cosmetic composition of the invention typically is about 200 m²/g or less, and preferably about 150 m²/g or less, such as about 100 m²/g or less (*e.g.*, about 75 m²/g or less), or even about 65 m²/g or less (*e.g.*, about 60 m²/g or less).

[0018] The primary particles of fumed alumina typically comprise crystalline and amorphous alumina. The degree of crystallinity, as well as the relative amount of the various different types of crystalline phases of alumina present, will depend, at least in part, upon the method by which the fumed alumina is produced. Preferred fumed alumina particles comprise a combined δ^* -phase and θ -phase crystalline alumina content of about 30% or more, more preferably about 40% or more (*e.g.*, about 45% or more), or even about 55% or more (*e.g.*, about 60% or more). The crystalline content of fumed alumina can be determined by any suitable method known in the art, such as by X-ray diffraction.

[0019] The soft-focus cosmetic composition of the invention comprises about 3 wt.% or more fumed alumina particles. While this amount of fumed alumina particles is believed to be sufficient to produce some degree of soft-focus effect in a cosmetic composition, preferred formulations according to the invention comprise more than 3 wt.% fumed alumina particles, such as about 5 wt.% or more fumed alumina particles (*e.g.*, about 10 wt.% or more fumed alumina particles), or about 15 wt.% or more fumed alumina particles (*e.g.*, about 20 wt.% or more fumed alumina particles), or even about 30 wt.% or more fumed alumina particles. Of course, the soft-focus composition of the invention can comprise other known cosmetically acceptable additives, as discussed below. Thus, in most formulations, the soft-focus cosmetic composition of the present invention will typically comprise about 95 wt.% or less fumed alumina particles (*e.g.*, about 3-95 wt.% fumed alumina particles), such as about 85 wt.% or less fumed alumina particles (*e.g.*, about 5-85 wt.% fumed alumina particles), or about 75 wt.% or less fumed alumina particles (*e.g.*, about 15-75 wt.% fumed alumina particles). It is to be understood that all percent compositions referred to herein pertain to the percent by weight of the dry cosmetic composition unless specifically stated otherwise. Thus, in the case of wet formulations (*e.g.*, liquids, emulsions, lotions, creams, etc.), the percent compositions referred to herein pertain to the weight percent of the composition after drying by a suitable method.

[0020] The fumed alumina particles used in conjunction with the invention can have any suitable particle size. Particle size, as used herein, refers to the spherical diameter of the particle, which is the diameter of the smallest sphere that could encompass the particle.

[0021] Typically, fumed alumina particles that are useful in conjunction with the invention will have an average aggregate particle size (by number) of about 50 nm or more,

such as about 75 nm or more (*e.g.*, about 100 nm or more), or even about 125 nm or more (*e.g.*, 140 nm or more). The fumed alumina particles typically have an average aggregate particle size (by number) of about 300 nm or less, for example, about 200 nm or less, or even about 175 nm or less (*e.g.*, about 160 nm or less). For some applications, it may be preferable to use fumed alumina particles that have a narrow aggregate particle size distribution. For instance, it is sometimes preferred to use fumed alumina particles with a particle size distribution such that about 70% or more, or even about 80% or more (*e.g.*, about 95 wt.% or more) of the fumed alumina particles have an aggregate particle size of 300 nm or less, such as 200 nm or less (*e.g.*, 175 nm or less). Similarly, it is sometimes preferred to use a particle size distribution wherein about 70% or more, or even about 80% or more (*e.g.*, about 95 wt.% or more) of the fumed alumina particles have an aggregate particle size of about 50 nm or more, such as about 75 nm or more (*e.g.*, about 100 nm or more), or even about 125 nm or more (*e.g.*, 140 nm or more).

[0022] The fumed alumina aggregate particles can be present in the cosmetic composition of the invention as larger, agglomerated particles. The cosmetic composition of the invention preferably comprises agglomerate particles of fumed alumina having an average agglomerate particle size of about 5 μm or more, such as about 10 μm or more, or even about 15 μm or more. Particles that are too large can produce an undesirable texture in the cosmetic composition. Thus, it is preferable that the agglomerate fumed alumina particles have a maximum average particle size of about 30 μm or less, such as about 25 μm or less, or even about 20 μm or less. For some applications, it may be preferable to use fumed alumina particles that have a narrow agglomerate particle size distribution. For instance, the cosmetic composition of the invention can comprise fumed alumina particles with a particle size distribution such that about 70% or more, or even about 80% or more (*e.g.*, about 95 wt.% or more) of the fumed alumina particles have an agglomerate particle size of 5 μm or more, such as 10 μm or more, or even 15 μm or more. Similarly, the cosmetic composition of the invention can comprise fumed alumina particles with a particle size distribution such that about 70% or more, or even about 80% or more (*e.g.*, about 95 wt.% or more) of the fumed alumina particles have an agglomerate particle size of 30 μm or less, such as 25 μm or less, or even 20 μm or less. Of course, the cosmetic composition of the invention can comprise a mixture of aggregate and agglomerate particles.

[0023] The fumed alumina particles used in conjunction with the invention can be treated or untreated. Possible treatments include hydrophobicizing treatments (*e.g.*, hydrophobic fumed alumina), as well as treatments to alter the surface charge characteristics (*e.g.*, cationic or anionic treatments).

[0024] The invention contemplates the use of other light diffusing particles in combination with the fumed alumina particles. Useful light diffusing particles include

boron nitride particles, nylon particles (*e.g.*, nylon 12 particles), fumed silica particles, spherical silica particles, and other various light-diffusing agents.

[0025] The soft-focus cosmetic composition of the invention can be formulated as any type of skin treatment or makeup product. Skin treatment product formulations of the invention include lip products, acne treatments, moisturizers, anti-aging products, lifting treatments, cellulite treatments, and eye treatments. Makeup product formulations of the invention include, but are not limited to, foundations, blushes, pressed or loose powders, concealers, bronzers, eyeshadows, eyeliners, lipsticks, and lip glosses. The products of the invention can take any form which is typical of cosmetic products, for example, hot pour formulations, water-in-oil emulsions, oil-in-water emulsions, gels, sticks, sprays, anhydrous formulations, and pressed or loose powders. There is no limitation on the type of vehicle that can be employed. In particular, the preferred identity of the vehicle will be largely controlled by the type of product into which the components are to be incorporated. For a liquid foundation, for example, a water-in-oil emulsion is preferred for aesthetic reasons, and although the oil portion of the vehicle can be any which is typically used for this purpose, such as, for example, a volatile or non-volatile silicone oil. Preferably, the soft-focus cosmetic composition of the invention is a powder foundation.

[0026] The soft-focus cosmetic composition of the invention also can comprise any other cosmetically and/or dermatologically acceptable ingredients. Pigments, such as interference pigments, inorganic pigments, and organic pigments can be used to adjust the color shade of the composition. Useful interference pigments are available commercially from a wide variety of suppliers. Examples of preferable interference pigments are Flonac MS-30C, which is mica treated with titania and iron oxide (yellow), and MU-10C, which is mica treated with titania (white). Interference pigments of different colors or types can be combined to blend an appropriate shade or intensity of color to match the natural skin tone. Examples of useful inorganic pigments include iron oxides (yellow, red, umber, brown, or black), ferric ammonium ferrocyanide (blue), manganese violet, ultramarine blue, chrome oxide (green), talc, lecithin modified talc, zeolite, kaolin, lecithin modified kaolin, titanium dioxide (white), zinc oxide, and mixtures thereof. In addition to providing color to match the color of the skin, titanium dioxide, zinc oxide, and iron oxide function as particulate inorganic sunscreens. Organic pigments can include natural colorants and synthetic monomeric and polymeric colorants. Exemplary are phthalocyanine blue and green pigments, diarylide yellow and orange pigments, and azo-type red and yellow pigments such as toluidine red, litho red, naphthol, red and brown pigments. Also useful are lakes, which are pigments, formed by the precipitation and absorption of organic dyes on an insoluble base, such as alumina, barium, or calcium hydrates. Water soluble colorants (such as FD&C Blue #1), oil soluble colorants (such as D&C Green #6), and stains (such as

bromo dyes and fluorescein dyes) also can be employed. The amount and type of any non-diffusing pigment used will vary depending upon the nature of the final product and the desired intensity of color; generally, however, the amount of non-diffusing pigment will be about 1-10 wt.%, and preferably about 1-5 wt.%, by weight of the total composition. In addition, microfine particulate pigments can be used at somewhat higher levels than those of normal particle size without significantly increasing the level of opacity of the composition.

[0027] The formulation also can comprise other components that may be chosen depending on the carrier and/or the intended use of the formulation. Additional components include, but are not limited to, water soluble sunscreens (such as Eusolex 232), oil soluble sunscreens (such as octyl methoxycinnamate), and organic sunscreens (such as camphor derivatives, cinnamates, salicylates, benzophenones, triazines, PABA derivatives, diphenylacrylate derivatives, and dibenzoylmethane derivatives), antioxidants (such as BHT), chelating agents (such as disodium EDTA), emulsion stabilizers (such as carbomer), preservatives (such as methyl paraben), fragrances (such as pinene), flavoring agents (such as sorbitol), humectants (such as glycerine), waterproofing agents (such as PVP/Eicosene copolymer), water soluble film-formers (such as hydroxypropyl methylcellulose), oil-soluble film formers (such as hydrogenated C-9 Resin), moisturizing agents such as cholesterol, cationic polymers (such as Polyquaternium 10), anionic polymers (such as xanthan gum), pigment wetting agents (such as Arlacel™ P100 or Emerest™ 2452), vitamins (such as tocopherol), and the like.

[0028] The compositions also can comprise one or more active components. Examples of useful active components include, but are not limited to, those that improve or eradicate age spots, keratoses, and wrinkles, analgesics, anesthetics, anti-acne agents, antibacterials, antiyeast agents, antifungal agents, antiviral agents, antidandruff agents, antidermatitis agents, antipruritic agents, antiemetics, antimotion sickness agents, anti-inflammatory agents, antihyperkeratolytic agents, anti-dry skin agents, antiperspirants, antipsoriatic agents, antiseborrheic agents, hair conditioners and hair treatment agents, antiaging agents, antiwrinkle agents, antiasthmatic agents and bronchodilators, sunscreen agents, antihistamine agents, skin lightening agents, depigmenting agents, wound-healing agents, vitamins, corticosteroids, tanning agents, sunscreens, and hormones. More specific examples of useful active components include retinoids such as retinol, and esters, acids, and aldehydes thereof; ascorbic acid, and esters and metal salts thereof; tocopherol and esters and amide derivatives thereof; shark cartilage; milk proteins; alpha- or beta-hydroxy acids; DHEA and derivatives thereof; topical cardiovascular agents; and other various active ingredients including clotrimazole, ketoconazole, miconazole, griseofulvin, hydroxyzine, diphenhydramine, pramoxine, lidocaine, procaine, mepivacaine, monobenzone,

erythromycin, tetracycline, clindamycin, meclocyline, hydroquinone, minocycline, naproxen, ibuprofen, theophylline, cromolyn, albuterol, hydrocortisone, hydrocortisone 21-acetate, hydrocortisone 17-valerate, hydrocortisone 17-butyrate, betamethasone valerate, betamethasone dipropionate, triaminolone acetonide, fluocinonide, clobetasol, propionate, benzoyl peroxide, crotamiton, propranolol, and promethazine. The soft-focus cosmetic composition of the invention also can comprise a mixture of two or more of any of the above components.

[0029] The invention also provides a method of enhancing the soft-focus effect of a cosmetic composition (*i.e.*, a method of preparing the soft-focus cosmetic composition of the invention) comprising combining a cosmetic composition with about 3 wt.% or more fumed alumina particles. There is no limitation on the type of cosmetic composition that can be used in accordance with this aspect of the invention. However, it is preferred that the cosmetic composition used is translucent as applied. The cosmetic composition can be combined with the fumed alumina particles in accordance with the invention by any method suitable for dispersing the fumed alumina particles in the cosmetic composition, such as by mixing or stirring. The fumed alumina particles and other components of the soft-focus cosmetic composition are as previously discussed. The discussion with respect to the features of the soft-focus cosmetic composition of the invention is applicable to the method of enhancing the soft-focus effect of a cosmetic composition.

[0030] As mentioned, the soft-focus cosmetic composition of the invention is useful for reducing or eliminating imperfections of the skin, such as wrinkles, blemishes, pores, scars, and the like. In this regard, the invention provides a method of disguising skin imperfections comprising applying a cosmetic composition to the skin, wherein the cosmetic composition comprises about 3 wt.% or more fumed alumina particles (*i.e.*, a method of using the soft-focus cosmetic composition of the invention by applying it to the skin). The application of the cosmetic composition comprising about 3 wt.% or more fumed alumina particles to the skin causes the visible effect of the skin imperfections to be reduced or eliminated by scattering the light reflected from the skin to the observer. The fumed alumina particles used in conjunction with this method, as well as the other components of the soft-focus cosmetic composition, are as previously discussed. The discussion with respect to the features of the soft-focus cosmetic composition of the invention is applicable to the method of disguising skin imperfections.

[0031] The following examples further illustrate the invention but, of course, should not be construed as in any way limiting its scope.

EXAMPLE 1

[0032] This example demonstrates the effectiveness of fumed alumina as a light-diffusing, soft-focus additive in cosmetic formulations, and compares the performance of fumed alumina to other light-diffusing particles.

[0033] Four types of particles were tested for light-diffusing properties: titanium dioxide (Chroma-Philic™ marketed by Shield Manufacturing Company), boron nitride (Tres BN™ PUHP1109 marketed by Saint Gobain Corporation), nylon 12 (Orgosol™ 2002 UP-NAT-COS marketed by Lipo Chemicals, Inc.), and fumed alumina (SpectraAl™ manufactured by Cabot Corporation). In order to evaluate the light-diffusing properties of the particles, each type of particle was incorporated into a separate thin polymer film. The films were made by dispersing 3 wt.% of the particles in 32 wt.% isopropanol, 32 wt.% de-ionized water, and 33 wt.% Polyderm™ PE-PA polyurethane (30% aqueous) (Alzo Inc.) with light agitation. The particle dispersions were then applied to glass slides using a 50 µm bird applicator. The resulting air-dried films were estimated to be 5 µm thick with the light-diffusing particles constituting approximately 23 wt.% of the dry film. The refractive index of the polymer (1.54) falls within the range of common cosmetic vehicles (1.33-1.6). A control was prepared using the same isopropanol/polymer composition without any light-diffusing particles. Table 1 provides a list of the samples tested, along with the refractive index and particle size of the particles included in each sample.

Table 1

Sample	Particle Type	Refractive Index	Particle Size Range
A (control)	No particle	N/A	N/A
B (comparative)	Titanium Dioxide	2.50	5-14 µm
C (comparative)	Boron Nitride	1.74	6-15 µm
D (comparative)	Nylon 12	1.53	5-15 µm
E (invention)	Fumed Alumina	1.71	10-30 µm*

*Agglomerate particle size range; average aggregate particle size of 150 nm.

[0034] The optical properties of each sample were measured using a HunterLab UltraScan® XE. The UltraScan® XE is a dual beam xenon flash spectrophotometer with a wavelength range from 360 to 750 nm. The sensor uses an integrating sphere to measure reflected or transmitted light. The sphere contains a specular exclusion port allowing measurements that exclude the specular components. The following four types of measurements were taken for each type of particle evaluated: total transmission, specular transmission, total reflectance, and scattered reflectance. The measurements were taken

over a range of wavelengths from 400-700 nm, as illustrated by **Figures 1-10**. An average value for each category was calculated. The results are provided in Table 2.

Table 2

Sample	Ave. Total Transmission (%)	Ave. Specular Transmission (%)	Ave. Total Reflectance (%)	Ave. Scattered Reflectance (%)
A (control)	78	73	12	5
B (comparative)	61	26	30	25
C (comparative)	74	44	15	12
D (comparative)	84	33	12	10
E (invention)	83	38	12	10

[0035] Control sample A (formulation with no polymer) had an average total transmission of 78%, with a specular (*i.e.*, direct) transmission component equal to 94% of the average total transmission (**Figure 1**). The high percentage of specular transmission is indicative of a film that is essentially transparent. The reflectance measurements for the control show a low percentage of scattered reflectance relative to the total reflectance (42% of the average total reflectance), which signifies a glossy film (**Figure 2**).

[0036] The transmission measurements of comparative sample B (titanium dioxide) (**Figure 3**) demonstrate a total average transmission of only 61% with a relatively low specular transmission (42% of the average total transmission). This indicates good light diffusion ($\% \text{ diffusion} = \% \text{ total transmission} - \% \text{ specular transmission}$), but low overall transmission resulting in a high level of opacity. Sample B also exhibited high overall reflectance, 83% of which is present as scattered reflectance (**Figure 4**). The high overall reflectance in conjunction with a high percentage of scattered reflection produces a white film appearance that is characteristic of compositions comprising titanium dioxide. These results indicate that titanium dioxide is not well suited for use as a soft-focus particle.

[0037] Comparative sample C (boron nitride) demonstrated significantly higher transparency (74% average total transmission) than sample B, making the film less opaque, but at the expense of higher specular transmission (59% of the average total transmission) and consequent loss of diffusion (**Figure 5**). Also, the total reflectance is much lower for sample C, with a large portion of the total reflectance being scattered (**Figure 6**). This indicates that boron nitride can be used to make a film with much lower degree of whiteness, minimizing the caked-on appearance, but with less light-diffusing ability. Accordingly, its usefulness as a soft-focus particle is somewhat limited.

[0038] Comparative sample D (nylon 12) exhibited a high level of total transmission (84%) with a low percentage of specular transmission (40% of the average total transmission) (Figure 7). Accordingly, sample D demonstrated a high degree of diffusion. Sample D also exhibited a total reflectance of < 15% with a high contribution from the scattered reflection component (83% of the average total reflectance) (Figure 8). The optical characteristics of nylon 12 demonstrate its ability to provide a film that minimizes a white, opaque appearance, while retaining good light-diffusing properties.

[0039] Invention sample E (fumed alumina) also demonstrated a very high total transmission (85%), a small specular transmission component (46% of the total transmission), and low overall reflectance with a high percentage of the total (83% of the total reflectance) being scattered reflection (Figures 9 and 10). Thus, fumed alumina meets or exceeds all the behaviors required to provide excellent soft-focus effects.

EXAMPLE 2

[0040] This example illustrates the preparation of a soft-focus, oil-free, anti-acne formulation comprising fumed alumina, in accordance with the invention.

[0041] The anti-acne formulation was prepared from four sub-compositions, identified herein as Parts A-D. Table 3 identifies the components of each of Parts A-D, along with the function and relative amount of each component in the final composition.

[0042] The components of Part A were combined and milled until the pigments were thoroughly dispersed. Separately, the first two components of Part B (caprylic/capric triglyceride and methylparaben) were combined with mixing, and were heated to dissolve the methylparaben. After the methylparaben was dissolved, the third component of Part B (fumed alumina) was added with continued mixing and heating to 80-85 °C. Parts A and B were subsequently combined with mixing, while maintaining the temperature of the mixture at 80-85 °C. The Part C components (benzoyl peroxide and dipropylene glycol dibenzoate) were separately combined with mixing, and Part C was heated to 80-85 °C. Mixing was continued until the peroxide component of Part C was dissolved, after which time Part C was added to Parts A and B. By combining the benzoyl peroxide with dipropylene glycol dibenzoate to provide Part C prior to combining the benzoyl peroxide with the other parts of the formulation, it was possible to incorporate the benzoyl peroxide into the formulation as a solution, thereby circumventing the need to obtain a fine, impalpable benzoyl peroxide powder. Suitable compounds other than dipropylene glycol (e.g., aromatic esters) can be used for the same purpose. The components of Part D were added to Parts A, B, and C, and mixing was continued at 80-85 °C until the waxes melted and the batch was uniform, at which point the mixture was poured into suitable molds or into lip balm tubes. The mixture

was allowed to cool and solidify, thereby providing the soft-focus, oil-free, anti-acne formulation.

Table 3

	Component	Function	Amount (wt.%)
Part A	Caprylic/Capric Triglyceride	Emollient	10.0
	Titanium Dioxide	Pigment	3.0
	Iron Oxide Color Pigment Blend*	Pigment	0.5
Part B	Caprylic/Capric Triglyceride	Emollient	32.8
	Methylparaben	Preservative	0.2
	Fumed Alumina	Light Diffuser/ Suspending Agent	10.0
Part C	Dipropylene Glycol Dibenzoate	Solvent	25.0
	Benzoyl Peroxide	Anti-acne	2.5
Part D	Hydrogenated Safflower Seed Oil	Structure agent	6.0
	Copernicia Cerifera(Carnauba) Wax	Structure agent	2.0
	Euphorbia Cerifera (Candelilla) Wax	Structure agent	8.0

**Pigment Blend comprises Yellow Iron Oxide (66.7 wt.%), Red Iron Oxide (25.0 wt.%), and Black/Brown Iron Oxide (50/50 ratio) (8.3 wt.%)

EXAMPLE 3

[0043] This example illustrates the preparation of a soft-focus, moisturizing, and wrinkle-softening face lotion comprising fumed alumina, in accordance with the invention.

[0044] The face lotion was prepared from three sub-compositions, referred to herein as Parts A-C. Table 4 identifies the components of each of Parts A-C, along with the function and relative amount of each component in the final composition.

[0045] All of the components of Part A, except for the hydroxymethylcellulose, were combined and mixed. After mixing began, the hydroxymethylcellulose was sprinkled into the mixture in such a manner as to avoid clumping. Mixing was continued and the mixture was heated to 75-80 °C. Separately, the Part B components were mixed and heated to 80-85 °C. Parts A and B were combined with continued mixing, and the mixture was cooled to 40-45 °C. With continued mixing, the Part C components were added to the mixture. Mixing was continued until the mixture was uniform, after which time the mixture was

cooled (with continued mixing) to the desired fill temperature to provide the soft-focus, moisturizing, and wrinkle-softening face lotion.

Table 4

	Component	Function	Amount (wt.%)
Part A	Water	Solvent	71.2
	Glycerin	Humectant	4.0
	Panthenol	Humectant	0.4
	Phytantriol	Humectant	0.1
	Hydroxypropyl Methylcellulose	Thickener	0.2
	Disodium EDTA	Chelator	0.1
Part B	Cetearyl Alcohol/Behentrimonium Methosulfate*	Emulsifier	4.0
	Glyceryl Stearate/PEG-100 Stearate**	Emulsifier	1.0
	Ethylhexyl Isononanoate	Emollient	8.0
	Polyisobutene	Emollient	2.0
	Tocopheryl Acetate	Antioxidant	0.1
Part C	Fumed alumina	Light Diffuser/ Suspending Agent	10.0
	PHENOACT†	Preservative	1.0
	Herbalesse #116778††	Fragrance	0.2

*INCROQUAT BEHENYL TMS (Croda, Inc., Edison, NJ)

**ARLACEL® 165 (Uniqema Co., New Castle, DE)

†PHENOACT (Alzo International Inc., Sayerville, NJ) contains phenoxyethanol (76%), methylparaben (9%), propylparaben (5%), butylparaben (5%), and ethylparaben (5%).

††HERBALESSE by Aromatic Fragrances and Flavors, Inc. (Marietta, GA)

EXAMPLE 4

[0046] This example illustrates the preparation of a soft-focus, oil-free, acne cover make-up cream comprising fumed alumina, in accordance with the invention.

[0047] The make-up cream was prepared from three sub-compositions, referred to herein as Parts A-C. Table 5 identifies the components of each of Parts A-C, along with the function and relative amount of each component in the final composition.

Table 5

	Component	Function	Amount (wt.%)
Part A	Water	Solvent	71.2
	Cetearyl Alcohol/Behentrimonium Methosulfate*	Emulsifier	4.0
Part B	Dipropylene Glycol Dibenzoate	Solvent	10.0
	Benzoyl Peroxide	Anti-acne	2.5
Part C	Fumed Alumina	Light Diffuser/ Suspending Agent	10.0
	Titanium Dioxide	Pigment	2.0
	Color Pigment Blend**	Pigment	0.3

*INCROQUAT BEHENYL TMS (manufactured by Croda, Inc., Edison, NJ)

**Pigment Blend comprises Yellow Iron Oxide (66.7 wt.%), Red Iron Oxide (25.0 wt.%), and Black/Brown Iron Oxide (50/50 ratio) (8.3 wt.%)

[0048] The components of Part A were combined with mixing, and the mixture was heated to 80-85 °C. Separately, the components of Part B were combined with mixing and were heated to 80-85 °C. After the peroxide component of Part B dissolved, Part B was added to Part A with continued mixing, while maintaining the temperature of the mixture at 80-85 °C. As in Example 2, by combining the benzoyl peroxide with dipropylene glycol dibenzoate to provide Part B instead of directly combining the benzoyl peroxide with the other parts of the formulation, it was possible to incorporate the benzoyl peroxide into the formulation as a solution, thereby circumventing the need to obtain a fine, impalpable benzoyl peroxide powder. Suitable compounds other than dipropylene glycol (e.g., aromatic esters) can be used for the same purpose. Separately, the Part C components were combined and dispersed in a hammer mill. Part C was milled until the mixture was uniform, and was then added to Parts A and B. Mixing was continued until the mixture of Parts A, B, and C was uniform. The mixture was then cooled, with continued mixing, to the desired fill temperature to provide the soft-focus, oil-free, acne cover make-up cream.

[0049] All references, including publications, patent applications, and patents, cited herein are hereby incorporated by reference to the same extent as if each reference were individually and specifically indicated to be incorporated by reference and were set forth in its entirety herein.

[0050] The use of the terms “a” and “an” and “the” and similar referents in the context of describing the invention (especially in the context of the following claims) are to be construed to cover both the singular and the plural, unless otherwise indicated herein or clearly contradicted by context. The terms “comprising,” “having,” “including,” and “containing” are to be construed as open-ended terms (i.e., meaning “including, but not limited to,”) unless otherwise noted. Recitation of ranges of values herein are merely intended to serve as a shorthand method of referring individually to each separate value falling within the range, unless otherwise indicated herein, and each separate value is incorporated into the specification as if it were individually recited herein. All methods described herein can be performed in any suitable order unless otherwise indicated herein or otherwise clearly contradicted by context. The use of any and all examples, or exemplary language (e.g., “such as”) provided herein, is intended merely to better illuminate the invention and does not pose a limitation on the scope of the invention unless otherwise claimed. No language in the specification should be construed as indicating any non-claimed element as essential to the practice of the invention.

[0051] Preferred embodiments of this invention are described herein, including the best mode known to the inventors for carrying out the invention. Variations of those preferred embodiments may become apparent to those of ordinary skill in the art upon reading the foregoing description. The inventors expect skilled artisans to employ such variations as appropriate, and the inventors intend for the invention to be practiced otherwise than as specifically described herein. Accordingly, this invention includes all modifications and equivalents of the subject matter recited in the claims appended hereto as permitted by applicable law. Moreover, any combination of the above-described elements in all possible variations thereof is encompassed by the invention unless otherwise indicated herein or otherwise clearly contradicted by context.

WHAT IS CLAIMED IS:

1. A soft-focus cosmetic composition comprising about 3 wt.% or more fumed alumina particles.
2. The soft-focus cosmetic composition of claim 1, wherein the cosmetic composition comprises about 5 wt.% or more fumed alumina particles.
3. The soft-focus cosmetic composition of claim 2, wherein the cosmetic composition comprises about 15 wt.% or more fumed alumina particles.
4. The soft-focus cosmetic composition of claim 3, wherein the cosmetic composition comprises about 30 wt.% or more fumed alumina particles.
5. The soft-focus cosmetic composition of claim 1, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 50 nm or more.
6. The soft-focus cosmetic composition of claim 5, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 300 nm or less.
7. The soft-focus cosmetic composition of claim 6, wherein about 70 wt.% or more of the fumed alumina particles have an aggregate particle size of 300 nm or less.
8. The soft-focus cosmetic composition of claim 1, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 5 μm or more.
9. The soft-focus cosmetic composition of claim 8, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 30 μm or less.
10. The soft-focus cosmetic composition of claim 8, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 5 μm or more.
11. The soft-focus cosmetic composition of claim 9, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 30 μm or less.

12. The soft-focus cosmetic composition of claim 1, wherein the fumed alumina particles comprise a combined δ^* -phase and θ -phase crystalline alumina content of about 30% or more.

13. The soft-focus cosmetic composition of claim 1 further comprising an anti-acne agent.

14. A method of enhancing the soft-focus effect of a cosmetic composition comprising combining the cosmetic composition with about 3 wt.% or more fumed alumina particles.

15. The method of claim 14, wherein the cosmetic composition comprises about 5 wt.% or more fumed alumina particles.

16. The method of claim 15, wherein the cosmetic composition comprises about 15 wt.% or more fumed alumina particles.

17. The method of claim 16, wherein the cosmetic composition comprises about 30 wt.% or more fumed alumina particles.

18. The method of claim 14, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 50 nm or more.

19. The method of claim 18, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 300 nm or less.

20. The method of claim 19, wherein about 70 wt.% or more of the fumed alumina particles have an aggregate particle size of 300 nm or less.

21. The method of claim 14, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 5 μm or more.

22. The method of claim 21, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 30 μm or less.

23. The method of claim 21, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 5 μm or more.
24. The method of claim 22, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 30 μm or less.
25. The method of claim 14, wherein the fumed alumina particles comprise a combined δ^* -phase and θ -phase crystalline alumina content of about 30% or more.
26. The method of claim 14, wherein the cosmetic composition further comprises an anti-acne agent.
27. A method for disguising skin imperfections comprising applying a cosmetic composition to the skin, wherein the cosmetic composition comprises about 3 wt.% or more fumed alumina particles.
28. The method of claim 27, wherein the cosmetic composition comprises about 5 wt.% or more fumed alumina particles.
29. The method of claim 28, wherein the cosmetic composition comprises about 15 wt.% or more fumed alumina particles.
30. The method of claim 29, wherein the cosmetic composition comprises about 30 wt.% or more fumed alumina particles.
31. The method of claim 27, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 50 nm or more.
32. The method of claim 31, wherein the fumed alumina particles have an average aggregate particle size (by number) of about 300 nm or less.
33. The method of claim 32, wherein about 70 wt.% or more of the fumed alumina particles have an aggregate particle size of 300 nm or less.

34. The method of claim 27, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 5 μm or more.

35. The method of claim 34, wherein the fumed alumina particles have an average agglomerate particle size (by number) of about 30 μm or less.


36. The method of claim 34, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 5 μm or more.

37. The method of claim 35, wherein about 70 wt.% or more of the fumed alumina particles have an agglomerate particle size of 30 μm or less.

38. The method of claim 27, wherein the fumed alumina particles comprise a combined δ^* -phase and θ -phase crystalline alumina content of about 30% or more.


39. The method of claim 27, wherein the cosmetic composition further comprises an anti-acne agent.

Figure 1

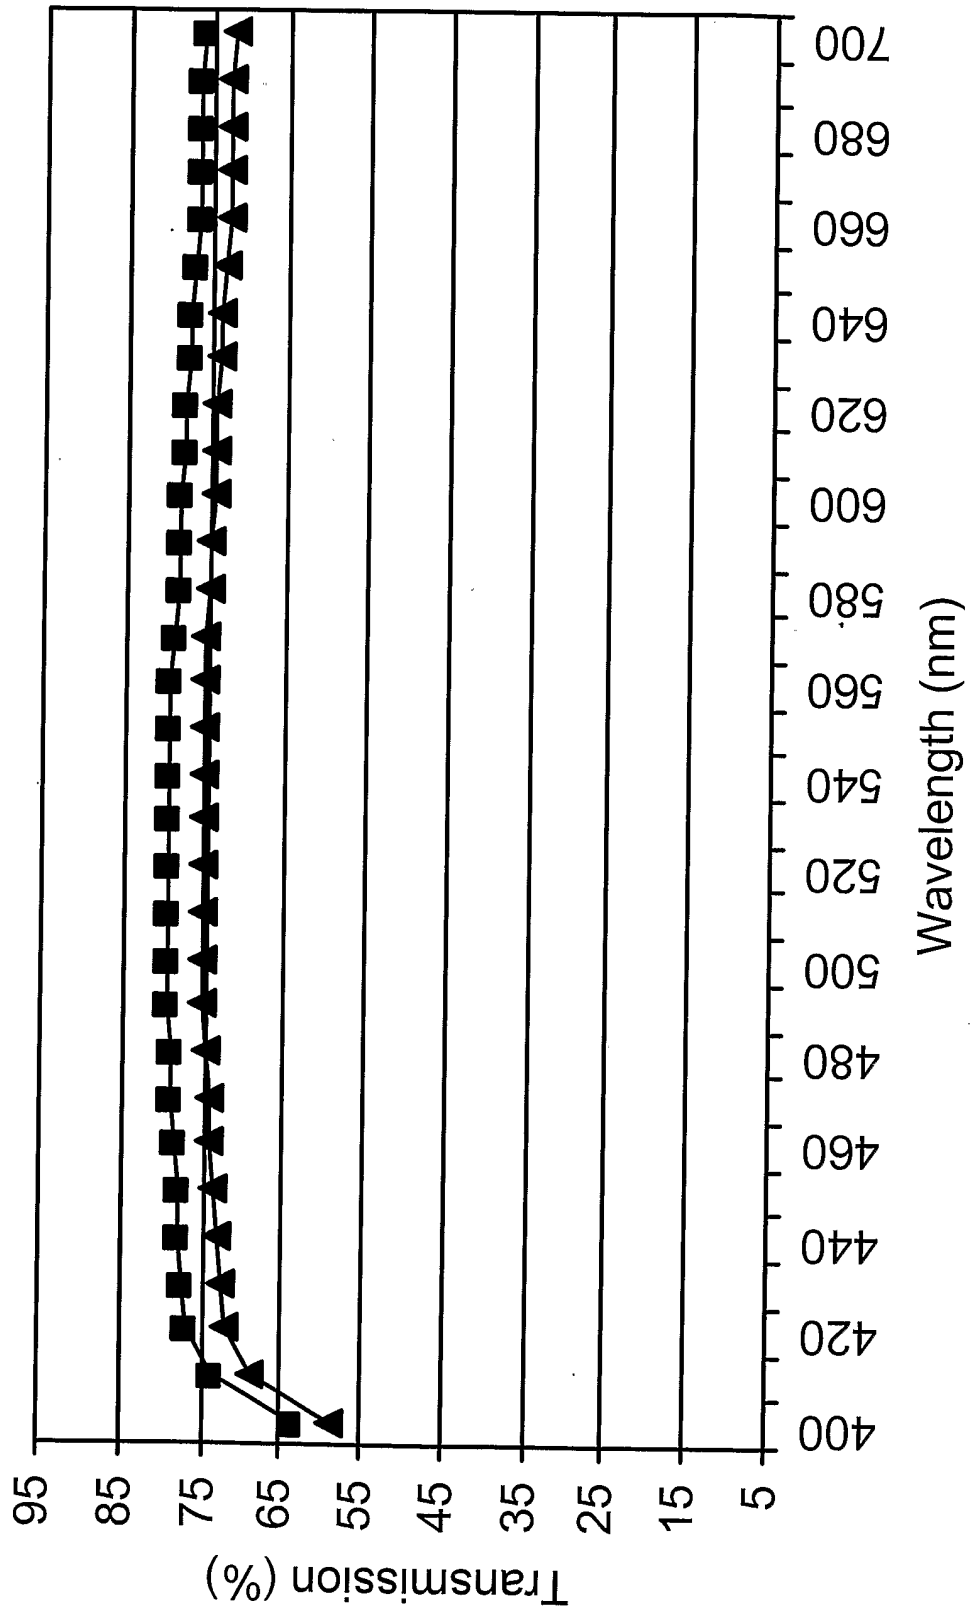


2/10

Figure 2

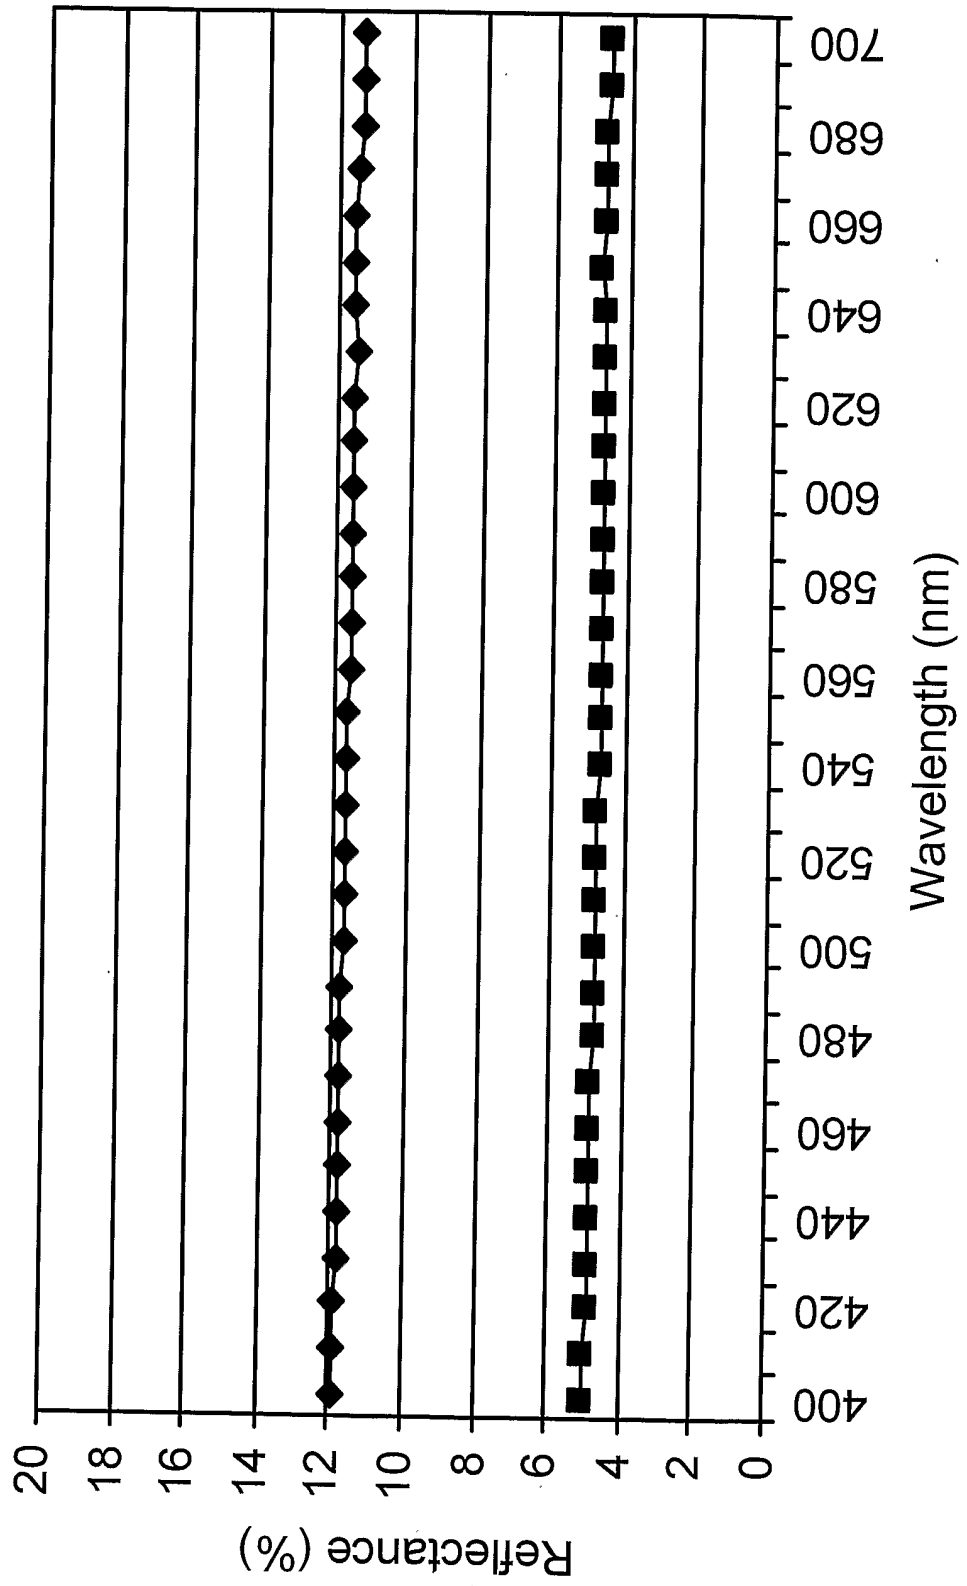

3/10

Figure 3

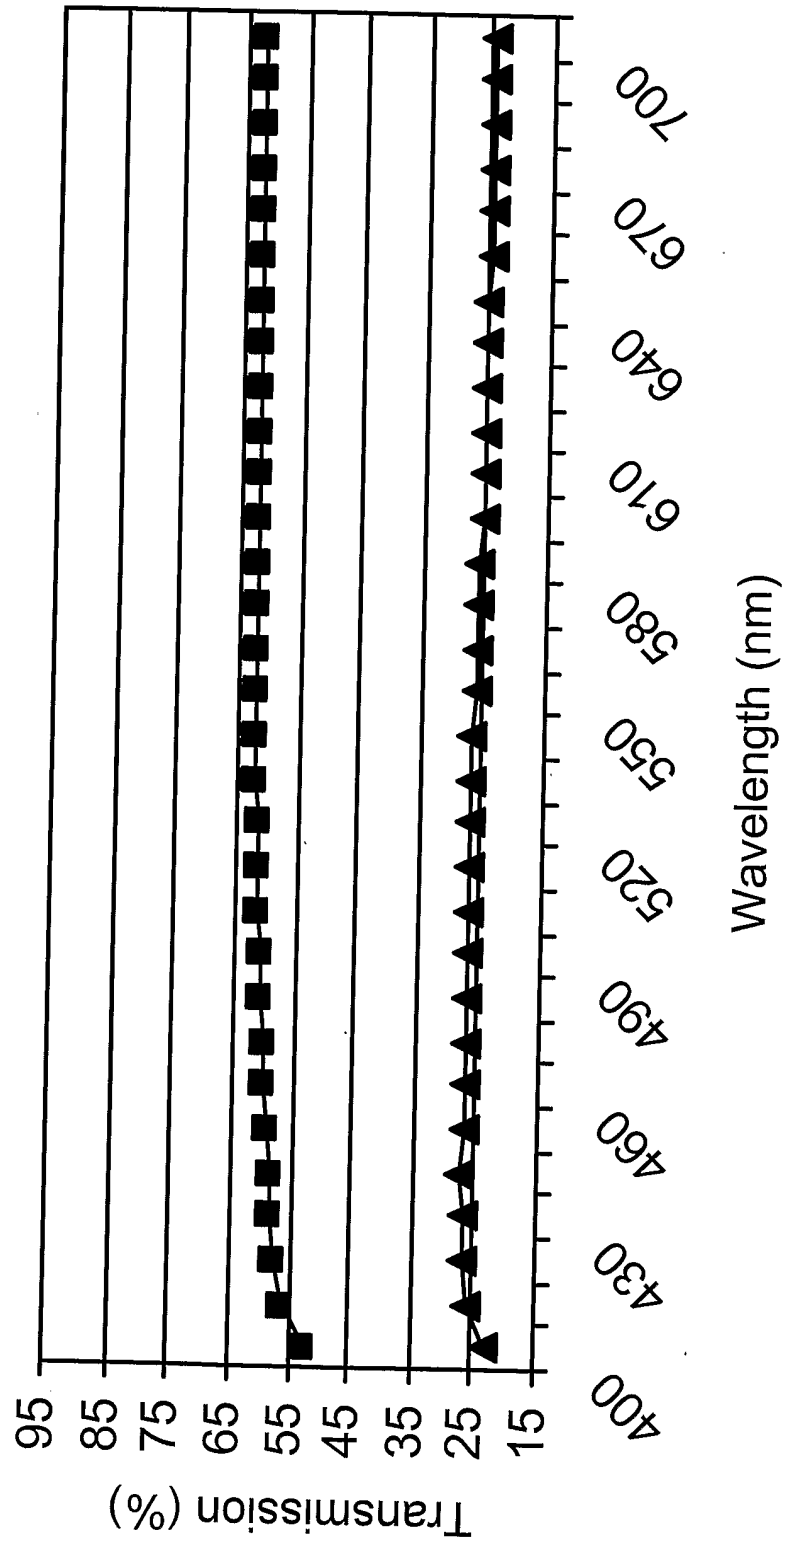

4/10

Figure 4



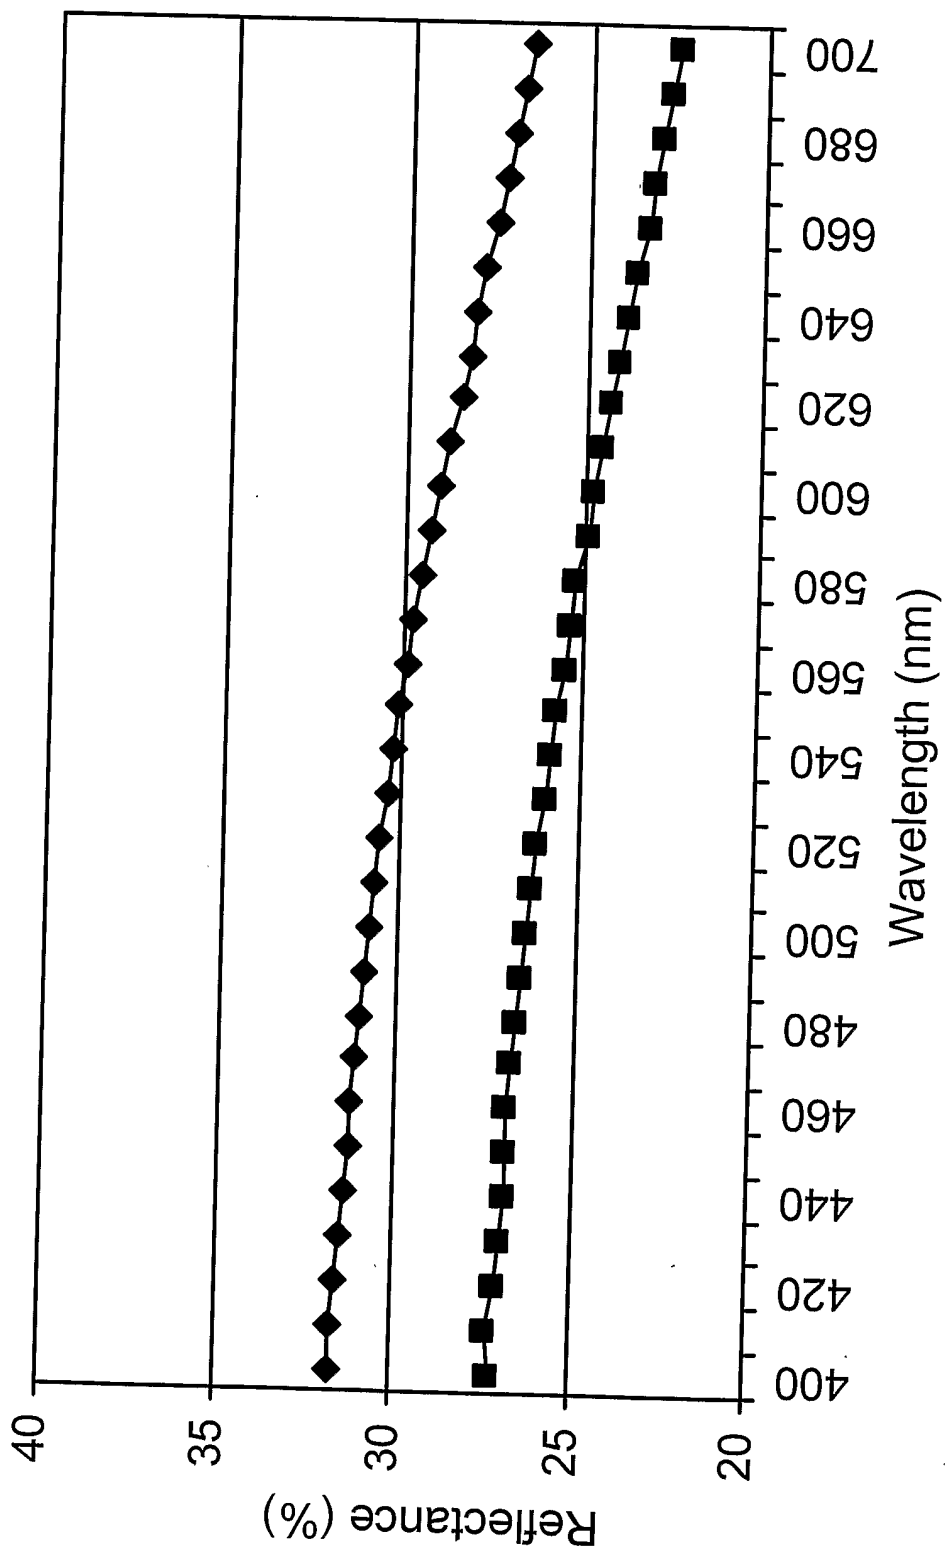


Figure 5

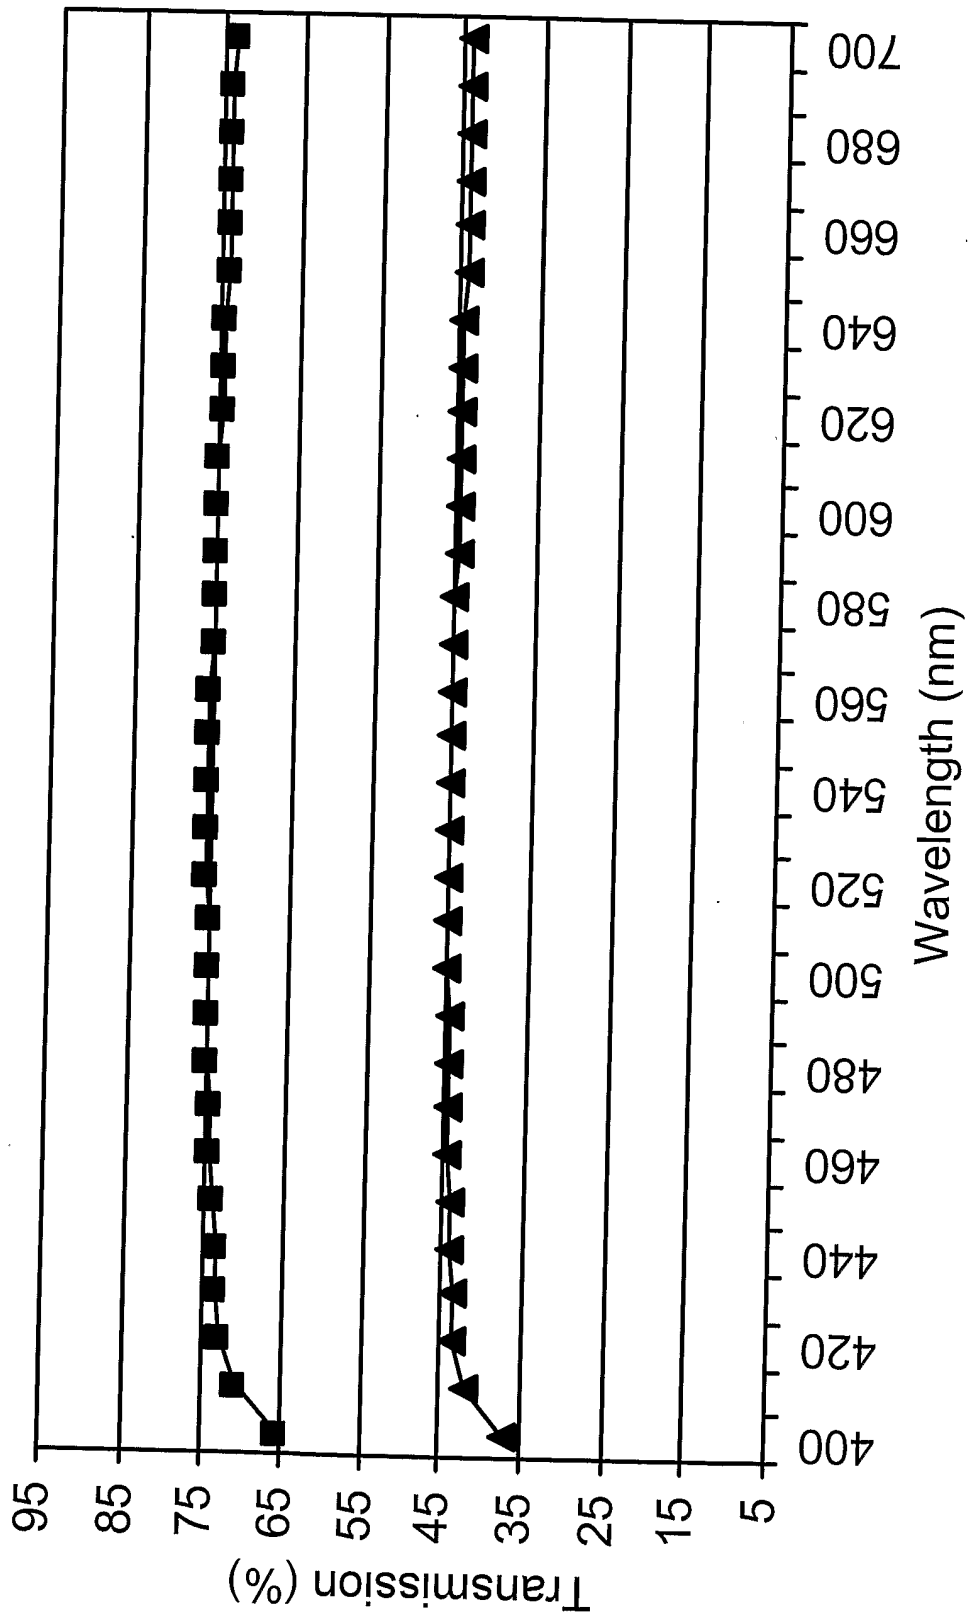

6/10

Figure 6

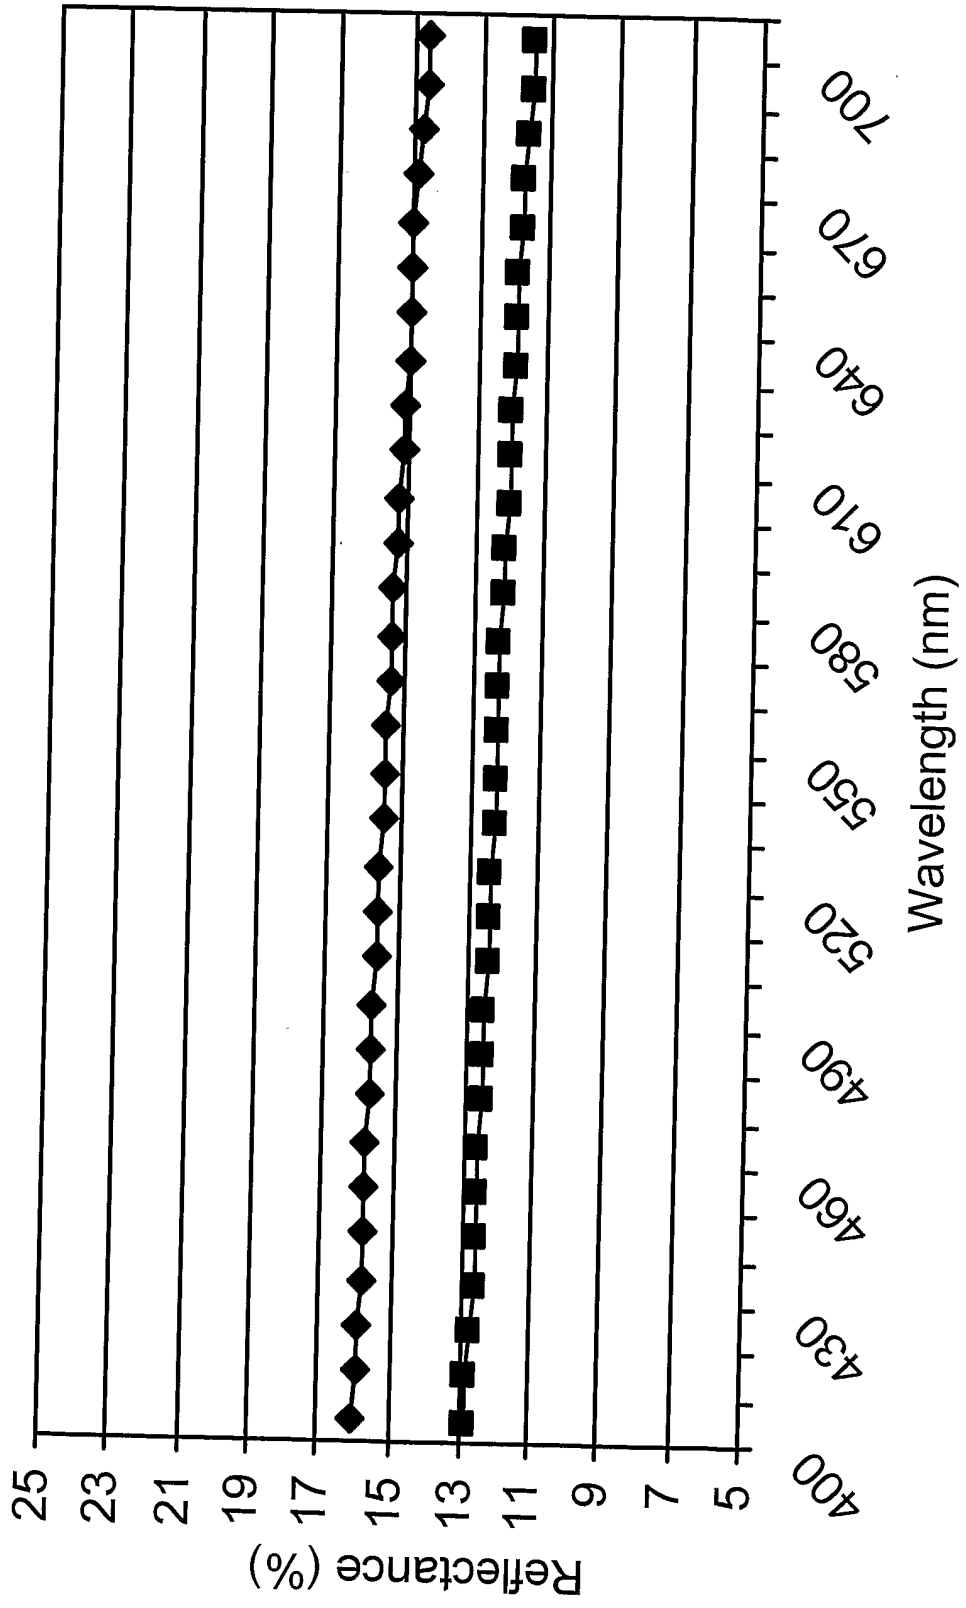

7/10

Figure 7

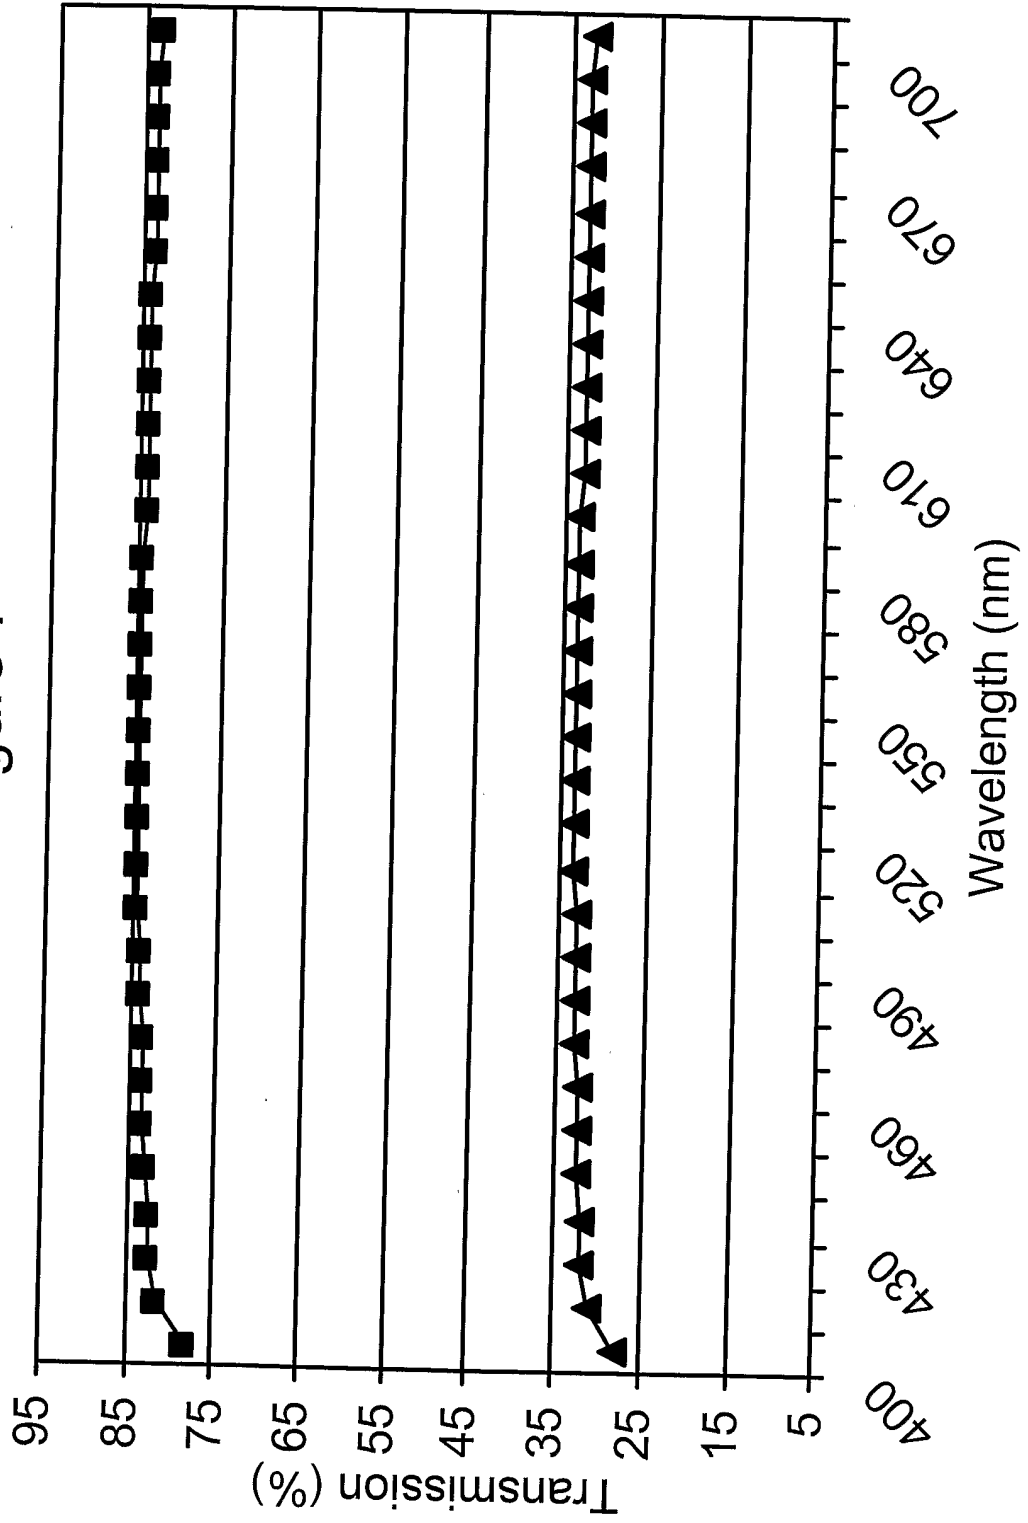


Figure 8



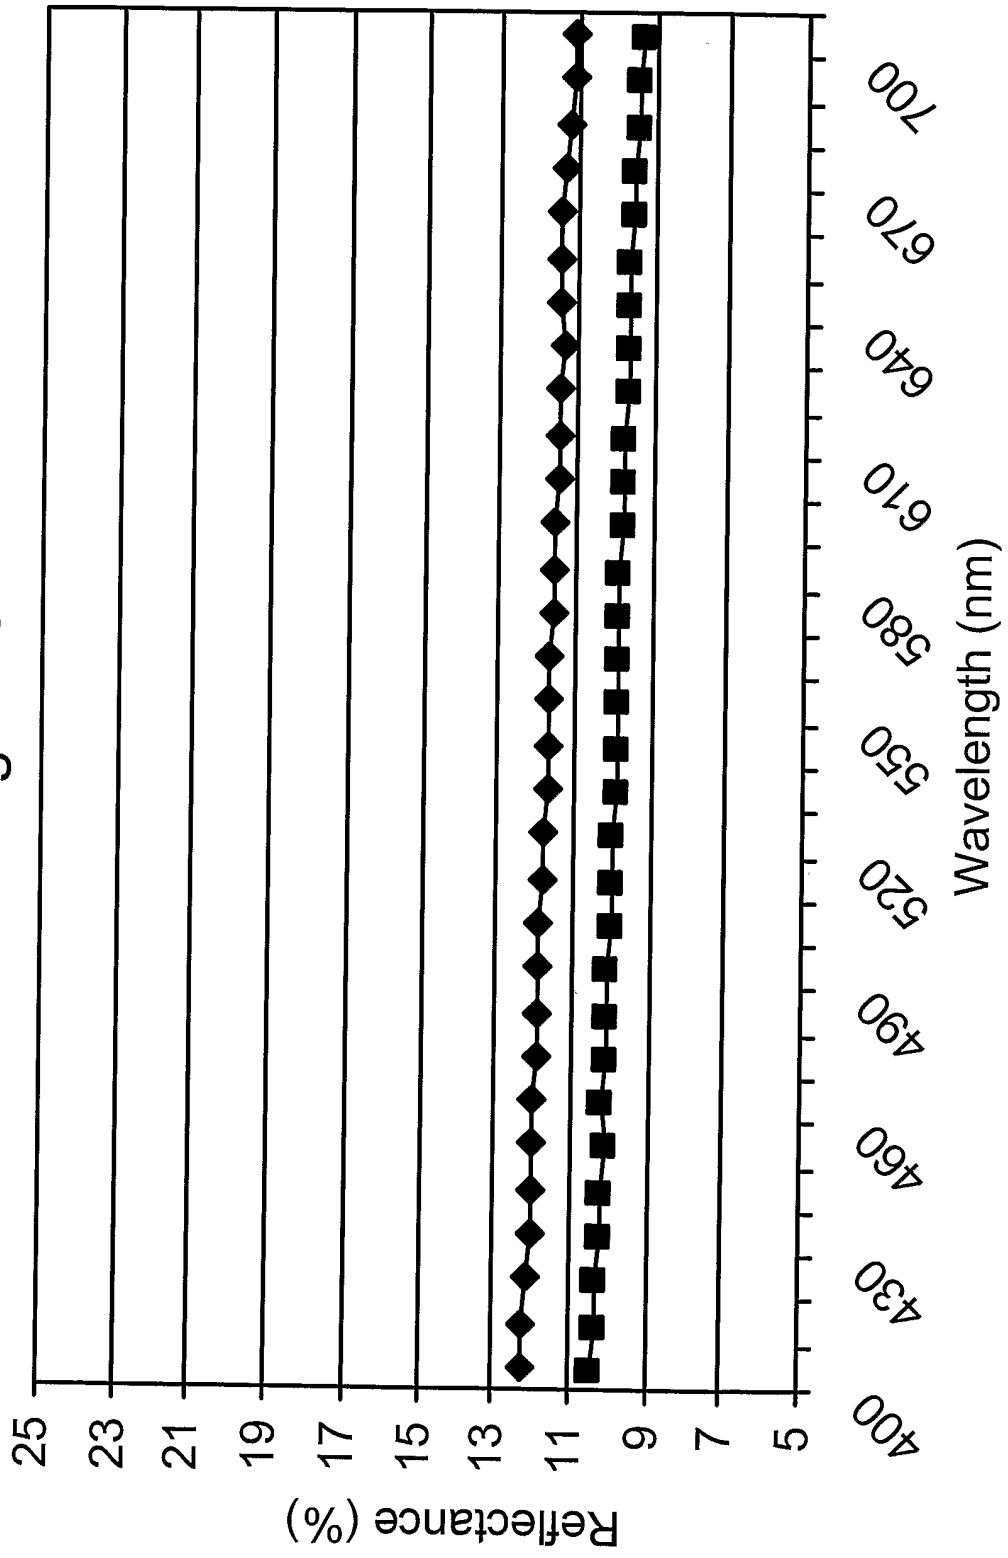


Figure 9

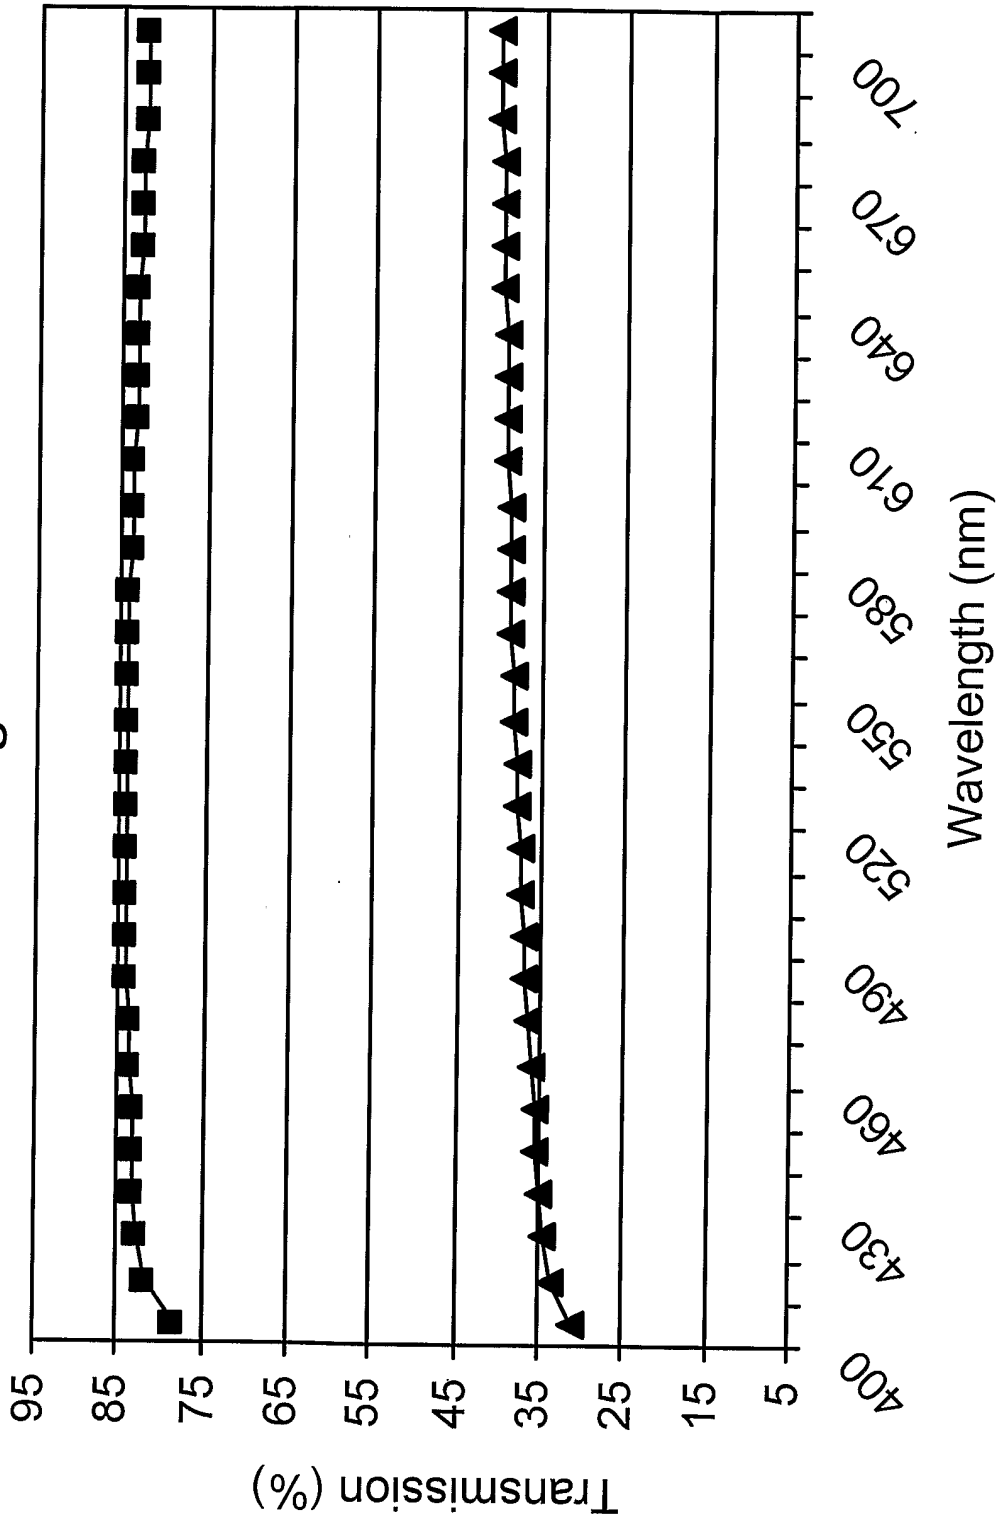

10/10

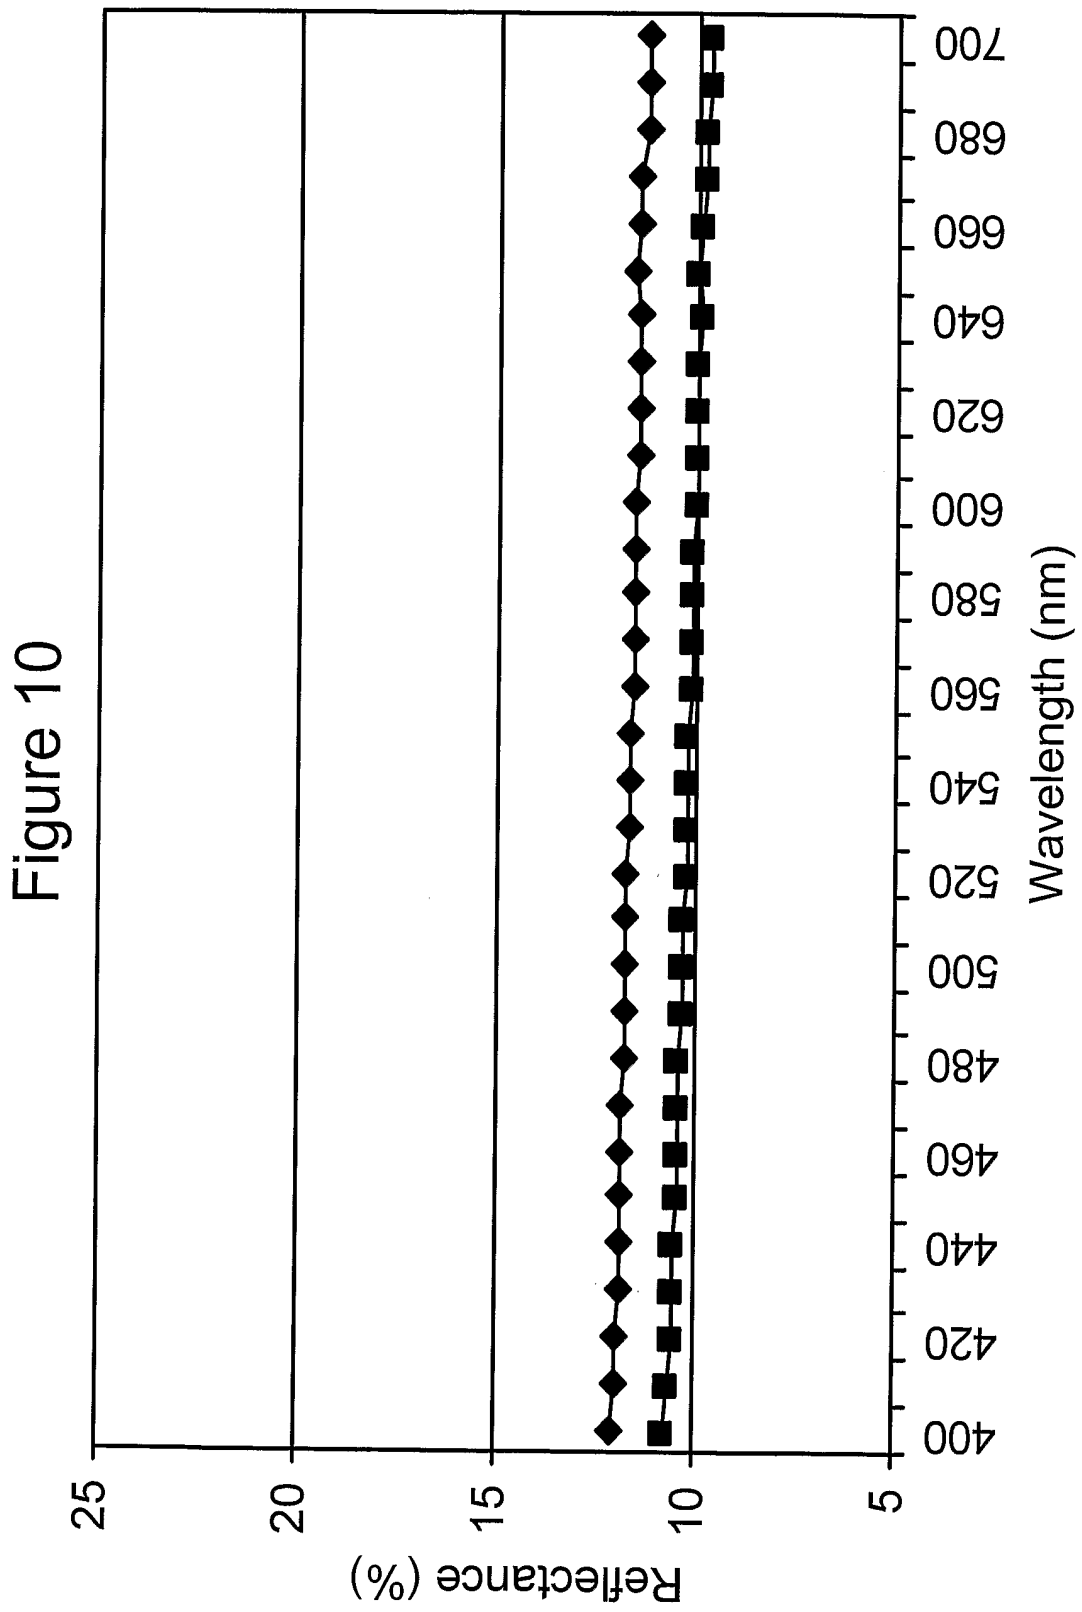

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/032916

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 A61K7/48 A61K7/00				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61K				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, BIOSIS				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 3 981 988 A (NEWMAN PETER JOHN ET AL) 21 September 1976 (1976-09-21) column 1, line 23 - line 49 table 1 claims 1-3	1-12		
X	EP 1 083 151 A (DEGUSSA) 14 March 2001 (2001-03-14) paragraph '0008! examples claims 1,5	1-4		
----- -/--				
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> <ul style="list-style-type: none"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			<ul style="list-style-type: none"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed 	<ul style="list-style-type: none"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
<ul style="list-style-type: none"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed 	<ul style="list-style-type: none"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family 			
Date of the actual completion of the international search <p style="text-align: center; font-size: 1.2em;">18 January 2005</p>	Date of mailing of the international search report <p style="text-align: center; font-size: 1.2em;">25/01/2005</p>			
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center; font-size: 1.2em;">Paloniemi Legland, R</p>			

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US2004/032916

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 329 483 A (MERCK PATENT GMBH) 23 July 2003 (2003-07-23) paragraphs '0003!', '0005!', '0007!', '0014!', '0024!', '0031! claims 1,4	1-4, 14-17, 27-30
Y	-----	13, 26, 39
Y	EP 1 152 748 A (ALLERGAN SALES INC) 14 November 2001 (2001-11-14) claims	13, 26, 39
A	WO 02/056846 A (COLOR ACCESS INC) 25 July 2002 (2002-07-25) the whole document	1-39
A	EMMERT R: "Quantification of the soft focus effect" COSMETICS & TOILETRIES, WHEATON, IL, US, vol. 111, no. 7, July 1996 (1996-07), pages 57-61, XP009029669 ISSN: 0361-4387 cited in the application	

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2004/032916

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3981988	A	21-09-1976	GB 1442396 A	14-07-1976
			AT 335620 B	25-03-1977
			AT 290874 A	15-07-1976
			AU 6770874 A	16-10-1975
			CA 1021266 A1	22-11-1977
			DE 2417069 A1	31-10-1974
			FR 2225147 A1	08-11-1974
			IN 139782 A1	31-07-1976
			IT 1020573 B	30-12-1977
			JP 915078 C	21-07-1978
			JP 50040759 A	14-04-1975
			JP 52043896 B	02-11-1977
			NO 142604 B	09-06-1980
			SE 412164 B	25-02-1980
			ZA 7402232 A	26-11-1975
			EP 1083151	A
AT 212320 T	15-02-2002			
BR 0004058 A	17-04-2001			
CA 2317692 A1	10-03-2001			
CN 1287974 A	21-03-2001			
DE 50000102 D1	14-03-2002			
DK 1083151 T3	06-05-2002			
EP 1083151 A1	14-03-2001			
ES 2170743 T3	16-08-2002			
JP 3529712 B2	24-05-2004			
JP 2001146419 A	29-05-2001			
NO 20004483 A	12-03-2001			
PL 342441 A1	12-03-2001			
US 6680109 B1	20-01-2004			
EP 1329483	A	23-07-2003	JP 2003212721 A	30-07-2003
			CN 1459279 A	03-12-2003
			EP 1329483 A2	23-07-2003
			US 2003147819 A1	07-08-2003
EP 1152748	A	14-11-2001	US 6262117 B1	17-07-2001
			AT 247947 T	15-09-2003
			AU 758594 B2	27-03-2003
			AU 4001200 A	04-09-2000
			CA 2362343 A1	24-08-2000
			DE 60004786 D1	02-10-2003
			DE 60004786 T2	19-08-2004
			EP 1152748 A1	14-11-2001
			JP 2002537240 T	05-11-2002
			ES 2204552 T3	01-05-2004
			WO 0048567 A1	24-08-2000
WO 02056846	A	25-07-2002	US 2002141957 A1	03-10-2002
			CA 2433337 A1	25-07-2002
			EP 1365730 A1	03-12-2003
			JP 2004526694 T	02-09-2004
			WO 02056846 A1	25-07-2002