

(51) International Patent Classification:
G06Q 20/00 (2006.01)(21) International Application Number:
PCT/US2010/032583(22) International Filing Date:
27 April 2010 (27.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/173,371 28 April 2009 (28.04.2009) US
12/720,627 9 March 2010 (09.03.2010) US(71) Applicant (for all designated States except US): **VISA INTERNATIONAL SERVICE ASSOCIATION** [US/US]; P.O. Box 8999, M3-2B, San Francisco, California 94128-8999 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HAMMAD, Ayman** [US/US]; 6981 Corte Mercado, Pleasanton, California 94566 (US). **CARLSON, Mark** [US/US]; 153 Miramontes Avenue, Half Moon Bay, California 94019 (US).(74) Agents: **GHAZANFARI, Faryar** et al.; Townsend and Townsend and Crew LLP, Two Embarcadero Center, 8th Floor, San Francisco, California 94111-3834 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: ALERT ARCHITECTURE

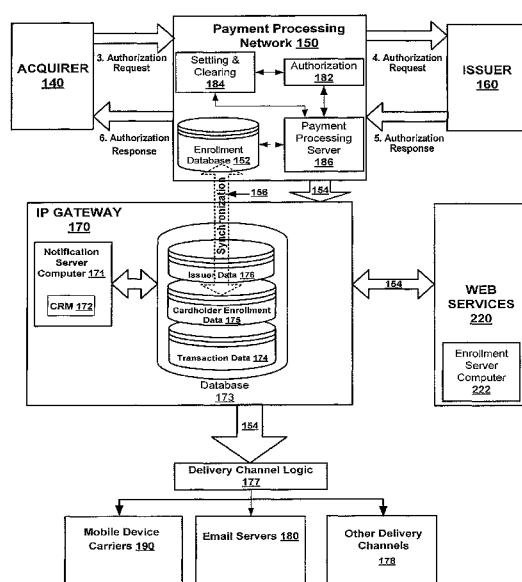


Fig. 2

(57) Abstract: Systems, architecture of the systems, and methods for generating alert message are disclosed. A user enrolls in an alert messaging service. Information that the user provides during an enrollment process are sent into a database, the user performs a transaction using a portable consumer device. Transaction data are sent to a computer apparatus. The computer apparatus accesses the database containing alert customization data. An alert message is generated based on the transaction data and the alert customization data. The alert message is sent to a user device. The systems, resources and processes responsible for performing the transaction and providing the alert messages are separated so that the transaction processing and alert generation are performed in parallel by systems in communication with each other. Utilizing such method prevents the transaction processing system from being overloaded with additional processes, while maintains a desired level of efficiency, security and reliability of the payment processing system.

ALERT ARCHITECTURE

CROSS-REFERENCES TO RELATED APPLICATIONS

[0001] The present application claims benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application No. 61/173,371, entitled "Alerts Based System and Method," filed April 28, 2009, the entire disclosure of which is incorporated herein by reference for all purposes.

BACKGROUND

[0002] A Payment Processing Network (PPN) that performs transaction processing, may be used for a variety of information-based services one of which is alert messages that enhance the user payment experience. Alert messages can be derived from the inherent information in each transaction and other customization settings. Alert messages provide a means of notifying a user about recent transactions and/or account activities in a tailored format. Such alerts may be in the form of messages tailored based on various metrics. These metrics may specify the type of the information user wants to see such as recent transactions, account balance, transaction amounts over specified pre-set limits, and/or format of the alerts which may specify the language, amount of detail and the type of user devices used to receive the messages, among others.

[0003] Providing services such as the alert messages, requires an appropriate amount of resources and processing power. Using the existing resources of a Payment Processing Network to allow for additional processes, results in some concerns and may not be a feasible approach. Various parts of a Payment Processing Network are designed to withstand catastrophic conditions, and to be secure, efficient and reliable. The addition of other processes, that are not integral part of the payment processing, may impair one or more of such characteristics. For example, modifying the existing resources to allow for processing the alert messages may overload the system and may negatively affect the efficiency. Also, various aspects of the alert generation may be related to exchange of data between third party resources which may negatively affect security.

[0004] Embodiments of the invention address these and other problems, individually and collectively.

BRIEF SUMMARY

[0005] Embodiments of the invention disclosed herein include systems, technical architecture of the systems, and methods for generating alert messages. The alert message system can be implemented using one or more computer apparatus and databases. In embodiments of the invention, processes and resources of a payment processing system are separated from the processes and resources used to generate and deliver the alert messages.

[0006] One embodiment of the invention is directed to a system and method for performing an electronic payment transaction with a portable consumer device and receiving an alert message generated by one or more computer apparatus and databases which are operationally separated from the resources of the payment processing network. A user uses his portable consumer device to perform an electronic payment transaction, and transaction data associated with a payment transaction are received at a first computer apparatus in the payment processing network. A database in the payment processing network is accessed to determine if the transaction is associated with an account enrolled in the alert service. If the account is enrolled in the alert service, the transaction data are sent to a second computer apparatus separated from the resources of the payment processing network. The second computer apparatus accesses a database comprising alert customization data. The second computer apparatus then generates an alert message using the transaction data and the alert customization data. The generated alert message is then sent to a user device.

[0007] Another embodiment of the invention is directed to a method for sending the transaction data from the payment processing network to an IP (Internet Protocol) Gateway for alert message generation, and delivery based on an enrollment record of the account associated with the transaction that is stored in a database accessible by the payment processing network.

[0008] These and other embodiments of the invention are described in further detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 shows an alert messaging system, according to an embodiment of the invention.

[0010] FIG. 2 shows the architecture of a subset of the alert messaging system, according to an embodiment of the invention.

[0011] FIG. 3a illustrates the enrollment process in the alert messaging system, according to an embodiment of the invention.

[0012] FIG. 3b illustrates the enrollment process in the alert messaging system, according to an embodiment of the invention.

[0013] FIG. 4 shows a flowchart illustrating the steps involved in the enrollment processes shown in FIG. 3a and FIG. 3b, according to embodiments of the invention.

[0014] FIG. 5 shows a flowchart illustrating the steps involved in performing an electronic payment transaction and providing one or more alert associated with the payment transaction, according to embodiments of the invention.

[0015] FIG. 6 shows a system according to an embodiment of the invention.

DETAILED DESCRIPTION

[0016] Embodiments of the invention are directed to systems, architectures of the systems, and methods for providing alert messages to users when performing electronic payment transactions, without burdening the resources of a Payment Processing Network (PPN).

[0017] In certain embodiments, alert messages can be based on information being processed through the payment processing network which may include a processing system such as an IP system (Integrated Payments system). The integrated payments system can be a financial processing switch, can accept inputs (transaction requests) from acquirers and can forward the authorization request message to the institution that issued the card/account (i.e., the issuer). The issuer can then respond with an approval or can decline the transaction, and the response message can be switched back to the originating acquirer (and to the originating

merchant). The integrated payments system can be built to withstand catastrophic conditions using redundancy of platforms and physical locations.

[0018] To increase security and reliability, other services such as alerts can be performed by separate systems in communication with the payment processing network and the integrated payments system. In certain embodiments, a second system outside of integrated payments can be created to manage the alerts. This can be a second database(s), servers, and connectivity systems used specifically for entities and services outside of traditional transaction processing. This second system may be referred to as the IP (Internet Protocol) Gateway, and may include its own server(s), database(s), and interfaces to many different endpoints for the purposes of sending alert messages. In some embodiments, a payment processing network can comprise both the integrated payments system and the IP Gateway. Thus, the system(s) and processes (collectively referred to as “alert engine” or “rule engine”) used for providing alert messages may comprise the IP Gateway alone or in combination with all or portions of the integrated payments system or other suitable systems. Segmenting the databases and systems can provide a number of benefits which will be described in detail.

[0019] In certain implementations, moving alert processing to the IP Gateway (and thus outside of the payment processing network and integrated payments system) can reduce the workload on the payment processing network and the integrated payments system and allows them to focus on other specified tasks (such as processing transaction requests). The IP Gateway can process the alert related tasks of trigger processing, message creation, connectivity to alert end points like email, SMS Text operators, voice response systems, and other web interfaces. The IP Gateway may be configured to send messages using one or more message interfaces that can connect to various delivery channels. This can allow for limited or no impact to payment processing network and integrated payments system transaction processing, resulting in fast transactions. Furthermore, it may be possible to shut down the peripheral service (IP Gateway) without impacting the core systems (integrated payments system and other transaction processing), to prevent any impact on transaction processing. In certain implementations, outside entities may connect to the IP Gateway, to access the database(s) therein or other services. This can enhance services such as web service connection to the IP Gateway database(s).

[0020] The IP Gateway can include both processors and server computers referred to as notification server computer(s) (for determining how to handle alerts and transactions, using specific parameters), and one or more databases for storing issuer information, cardholder enrollment data, and transaction data (i.e., records of transactions and alerts). The IP Gateway can also include computer readable media and processors for executing reporting and billing logic (such as reporting on billings, status, fraud, consumer data, etc.). The IP Gateway can have a messaging interface for delivery channel logic. This messaging interface allows the IP Gateway to send and receive messages using any suitable communication channel, such as Text (SMS) messages, email, web delivery, etc. The IP Gateway further provides web services, for access to the system using one or more web enabled browsers. The web services can allow for enrollment of users in the alerts and other services. Enrollment may be performed by filling in fields on a website (one or more users at a time) hosted by an enrollment server computer, or may be done in batch, by file delivery from an issuer or other party. The web services can further provide customer service functions for the user and the issuer.

[0021] In certain embodiments, alerts can be generated after a payment transaction has been authorized. Thus, a message can be processed through the integrated payments system (and in certain implementations the IP Gateway), but can be generated as the payment transaction is returned from the issuer in an authorization response message. This processing allows the alert to be withheld if the payment transaction is declined, minimizing any possible confusion by the consumer (i.e., no alerts may be sent for payment transactions that are not completed). The alert engine may add another trigger that generates a special message based on the declined payment transaction. This “declined transaction” trigger can provide another tool to discover fraud. Thus, a user may receive a message regarding a declined transaction in which the user did not originate.

[0022] In certain embodiments, alerts can be sent at the earliest point in a switched transaction where all information is present from all entities (consumer, merchant, acquirer, issuer, etc.). These alerts can be “real time” or “near real time,” and can contain all relevant results and information regarding the payment transaction. The payment authentication message may be passed to the IP Gateway for alternate communications such as SMS messages or email. This can improve the payment experience for certain payment methods such as mobile based

money transfer. In other embodiments, the payment transaction may be passed to other alternative systems and/or may be passed at other steps in the transaction flow.

[0023] The database(s), such as the enrollment database, within the payment processing network and the integrated payments system can be synchronized with the database(s) within the IP Gateway. Furthermore, the IP Gateway can send messages regarding the payment transaction through various delivery channels, such as by SMS message, email, or other delivery methods such as instant message or other web based services. The IP Gateway may also be accessible to online banking services such enrollment with an issuer, account management, and customer service functions, through web services. The web services may be on websites controlled by the payment processing system or the issuer, or may be controlled by a combination of the payment processing system and the issuer. In certain implementations the website may be hosted by one entity but can redirect the user to a site hosted by another entity.

[0024] In certain embodiments, the enrollment database(s) within the payment processing system or other systems (e.g., the issuer) may be efficiently connected. Such connection can synchronize mobile payment and message based user information, with core enrollment user information found in the integrated payments system. This can improve quality of service, fraud reduction, and improve reputation tracking. In certain implementations, the optimization described above can be used with any payment processor that addresses mobile cardholder enrollments.

[0025] The enrollment database in the integrated payments system can share information with the cardholder enrollment database in the IP Gateway. In certain implementations, this can allow for a "thin" database within the integrated payments system that includes all users enrolled in alert services. Thus, as a payment transaction is processed by the payment processing network (using the integrated payments system), the thin database can allow for fast determination of whether an alert should be generated. If it is determined that an alert should be generated, the transaction can be forwarded to the IP Gateway. If no alert should be generated, the integrated payments system can bypass the IP Gateway and can forward the transaction to the appropriate party, such as the acquirer. This prevents the IP Gateway from having to process unnecessary transactions (such as transactions without alerts) while maintaining secure and fast process flow. The dual database

approach provides for fast processing as it can filter out the transactions that require alert processing from the transactions that do not. The system can optimize enrollment database information from the integrated payments system to the IP Gateway. The card enrollment functions can be performed via web services for customer services in communication with the IP Gateway. The IP Gateway can also send data via various user channels and issuer online banking services.

[0026] Other specific examples of embodiments of the invention are described in further detail below.

I. SYSTEM

[0027] FIG. 1 is a diagram illustrating an alert messaging system **100**, in accordance with an embodiment of the invention. The alert messaging system **100** includes a user **110**, a portable consumer device **120**, a merchant **130**, an access device **132**, an acquirer **140**, a Payment Processing Network (PPN) **150**, an issuer **160**, an IP Gateway **170**, mobile device carriers **190**, e-mail servers **180**, a mobile device **200**, a user computer **210**, and web services **220**. Although one user **110**, one mobile device **200**, one user computer **210**, one merchant **130**, one acquirer **140**, and one issuer **160** are shown, there may be any suitable number of any of these entities in intelligent alert messaging system **100**.

[0028] User **110** is in operative communication with the portable consumer device **120**. Merchant **130** has an access device **132** for interacting with the consumer portable device **120** and acquirer **140** associated with merchant **130**. Acquirer **140** is in communication with issuer **160** through payment processing network **150**.

[0029] The alert messaging system **100** also includes a mobile device **200** in operative communication with user **110** for displaying alert messages to the user **110**.

[0030] The alert message system **100** also includes an IP Gateway **170** that is in communication with payment processing network **150**. IP Gateway **170** receives the transaction data from the payment processing network **150** and generates the alert messages. IP Gateway **170** is also in communication with the mobile device carriers **190**, e-mail servers **180**, and web services **220**. The mobile device carriers **190** are in operative communication with the mobile device **200**, and

the mail servers **180** are in operative communication with the user computer **210**. The alert messages that are generated from IP Gateway **170** are sent to the mobile device carriers **190** and/or mail servers **180** to be sent to the mobile device **200**, and/or to be accessed by the user computer **210**. The web services **220** is also in operative communication with the user **110** for enrolling the user **110** in the alert messaging service provided by the alert messaging system **100**.

[0031] Each of the components shown in FIG. 1 is described in further detail below.

[0032] FIG. 2 is a diagram illustrating the architecture of a subsystem **101** of the alert system **100**. FIG. 2 illustrates more details about the IP Gateway **170**. The IP Gateway **170** includes a notification server computer **171** having a computer-readable medium (CRM) **172**, and a processor (not shown) that is coupled to the CRM **172**. Although one CRM **172** is shown in FIG. 2, the notification server computer **171** may house more than one CRM as needed. The notification server computer **171** is in communication with database **173**. In some embodiments, database **173** may be included in the notification server computer **171**. Database **173** contains alert customization data that are used to generate the alert messages. The alert customization data includes transaction data **174**, cardholder enrollment data **175** (which includes account identifiers associated with portable consumer devices of users enrolled in the alert messaging service), and issuer data **176**. Cardholder enrollment data **175** are synchronized with the enrollment database **152** via the synchronization link **156**. The enrollment database **152** contains data related to users who are enrolled in the alert messaging service. As shown in FIG. 2, IP Gateway **170** is in communication with payment processing network **150**, and web services **220** via the network connection **154** which may be in any suitable form. The network connection **154** may include, for example, at least a portion of the Internet. Delivery channel logic **177** is in communication with IP Gateway **170**, mobile service carriers **190**, e-mail servers **180**, and other delivery channels **178**.

[0033] User **110** refers to an individual or organization such as a business that is capable of purchasing goods or services or making any suitable payment transaction with merchant **130**.

[0034] Portable consumer device **120** refers to any suitable device that allows the payment transaction to be conducted with merchant **130**. Portable consumer

device **120** may be in any suitable form. For example, suitable portable consumer devices **120** can be hand-held and compact so that they can fit into a consumer's wallet and/or pocket (e.g., pocket-sized). They may include smart cards, magnetic stripe cards, keychain devices (such as the Speedpass™ commercially available from Exxon-Mobil Corp.), etc. Other examples of portable consumer devices **120** include cellular phones, personal digital assistants (PDAs), pagers, payment cards, security cards, access cards, smart media, transponders, and the like. In some cases, portable consumer device **120** may be associated with an account of user **110** such as a bank account.

[0035] Merchant **130** refers to any suitable entity or entities that make a payment transaction with user **110**. Merchant **130** may use any suitable method to make the payment transaction. For example, merchant **130** may use an e-commerce business to allow the payment transaction to be conducted by merchant **130** and user **110** through the Internet. Other examples of merchant **130** include a department store, a gas station, a drug store, a grocery store, or other suitable business.

[0036] Access device **132** may be any suitable device for communicating with merchant **130** and for interacting with portable consumer device **120**. Access device **132** can be in any suitable location such as at the same location as merchant **130**. Access device **132** may be in any suitable form. Some examples of access devices **132** include POS devices, cellular phones, PDAs, personal computers (PCs), tablet PCs, hand-held specialized readers, set-top boxes, electronic cash registers (ECRs), automated teller machines (ATMs), virtual cash registers (VCRs), kiosks, security systems, access systems, websites, and the like. Access device **132** may use any suitable contact or contactless mode of operation to send or receive data from portable consumer devices **120**.

[0037] If access device **132** is a POS terminal, any suitable POS terminal may be used and may include a reader, a processor, and a computer-readable medium. Reader may include any suitable contact or contactless mode of operation. For example, exemplary card readers can include radio frequency (RF) antennas, optical scanners, bar code readers, magnetic stripe readers, etc. to interact with portable consumer device **120**.

[0038] Acquirer **140** refers to any suitable entity that has an account with merchant **130**. In some embodiments, issuer **160** may also be acquirer **140**.

[0039] Payment processing network (PPN) **150** refers to a network of suitable entities that have information related to an account associated with portable consumer device **120**. This information includes data associated with the account on portable consumer device **120** such as profile information, data, and other suitable information.

[0040] Payment processing network **150** may have or operate a server computer and may include a database. The database may include any hardware, software, firmware, or combination of the preceding for storing and facilitating retrieval of information. Also, the database may use any of a variety of data structures, arrangements, and compilations to store and facilitate retrieval of information. The server computer may be coupled to the database and may include any hardware, software, other logic, or combination of the preceding for servicing the requests from one or more client computers. Server computer may comprises one or more computational apparatuses and may use any of a variety of computing structures, arrangements, and compilations for servicing the requests from one or more client computers. For illustration purposes, examples of some of the elements of the payment processing network **150** such as authorization module **182**, settling and clearing module **184** and payment processing server computer **186** are shown in FIG. 2. Each of settling and clearing module **184**, authorization module **182**, and the payment processing server **186** contain an appropriate number of computer readable mediums and processors (not shown) that perform the functions described herein with respect to these elements.

[0041] Payment processing network **150** may include data processing subsystems, networks, and operations used to support and deliver authorization services, exception file services, and clearing and settlement services. An exemplary payment processing network **150** may include VisaNet™. Networks that include VisaNet™ are able to process credit card transactions, debit card transactions, and other types of commercial transactions. VisaNet™, in particular, includes a integrated payments system (Integrated Payments system) which processes authorization requests and a Base II system which performs clearing and settlement services. Payment processing network **150** may use any suitable wired or wireless network, including the Internet.

[0042] Issuer **160** refers to any suitable entity that may open and maintain an account associated with portable consumer device **120** for user **110**. Some examples of issuers may be a bank, a business entity such as a retail store, or a governmental entity. In many cases, issuer **160** may also issue portable consumer device **120** associated with the account to user **110**.

[0043] IP Gateway **170** refers to an entity that generates and delivers notifications and alert messages to various delivery channels. IP Gateway may include one or more servers and databases for generation of the alert messages and retrieval of data. IP Gateway **170** may be part of the payment processing network **150** or may be a separate entity in communication with payment processing network **150**.

[0044] Notification server computer **171** may be a powerful computer or cluster of computers. For example, the server computer can be a large mainframe, a minicomputer cluster, or a group of servers functioning as a unit. In one example, the notification server computer may be a database server coupled to a Web server. Notification server computer **171** includes a computer-readable medium (CRM) **172** and a processor (not shown) coupled to the CRM **172**.

[0045] Database **173** may be in the form of one or more server computers for storage of data. It may also be in the form of one or more electronic storage units (stand alone hard drives) capable of storing electronic data.

[0046] Delivery channel logic **177** may be in the form of an application program that sends the alert messages to the appropriate delivery channel. Delivery channel logic **177** may be part of the IP Gateway **170** or the payment processing network **150**. In some embodiments, delivery channel logic runs on a server computer that is in communication with the notification server computer **171**. In other embodiments, delivery channel logic may run on the notification server computer **171**.

[0047] E-mail servers **180** are server computers configured to receive an e-mail from a network connection and store the e-mail in memory for future retrieval.

[0048] Mobile device carriers **190** refer to entities that provide wireless infrastructures for wireless data transfer and communication via cellular phone or

other mobile devices. Example of such entities are AT&T™, Verizon Wireless™, T-Mobile™, etc.

[0049] Mobile device **200** may be in any suitable form. For example, suitable mobile device **200** can be hand-held and compact so that they can fit into a consumer's wallet and/or pocket (e.g., pocket-sized). Some examples of mobile device **200** include desktop or laptop computers, cellular phones, personal digital assistants (PDAs), pagers, payment cards, security cards, access cards, smart media, transponders, and the like. In some embodiments, mobile device **200** and portable consumer device **120** are embodied in the same device.

[0050] User computer **210** may be a personal computer or a laptop. The User computer **210** may run an operating system such as Microsoft Windows™ and may have a suitable browser such as Internet Explorer™.

[0051] Web services **220** may be in the form of one or more server computers and a website which allows users to enroll in the alert messaging service. Web services may include an enrollment server computer **222** that hosts a website which provides an electronic enrollment form to users to enroll in the alert messaging service. Web services **220** may be provided by the issuer **160** or the payment processing network **150**.

II. METHOD

A. SEPARATION OF PROCESSES AND RESOURCES

[0052] In order to use the transaction data to provide information-based services such as alert messages, yet not burdening various elements of the payment processing network **150** with any additional processing, separate systems in communication with elements of the payment processing network **150** may be used. IP Gateway **170**, shown in FIG. 2, includes the elements such as notification server computer **171** and database **173** that are used to generate alert messages from transaction data received from the payment processing server computer **186**.

[0053] In one embodiment, IP Gateway **170** may be part of the payment processing network **150** and only the server(s) and database(es) used to generate the alert messages be operationally separated from the elements of the payment processing network **150** that are used to perform the payment transactions. In other

embodiments, IP Gateway **170** may be separated from the payment processing network **150**, as shown in FIG. 2, and embodied as a separate entity.

[0054] In a typical purchase transaction, which will be described in detail later, acquirer **140** sends an authorization request to payment processing network **150** (arrow 3 in FIG. 2) which in turn is passed to the issuer **160** (arrow 4). In response, issuer **160** sends an authorization response message back to the payment processing network **150** (arrow 5), which indicates whether the transaction was approved or declined. payment processing network **150** then sends the authorization response message to the acquirer **140** (arrow 6). Using the arrangement as shown in FIG. 2, the process of generating alert messages may begin at the time of receiving the authorization request message from acquirer **140** (arrow 3), or at the time of receiving the authorization response message from the issuer **160** (arrow 5), or both, depending on the type of the alert. The authorization request message and the authorization response message include the transaction data. The authorization request messages may contain more data in addition to transaction data. The authorization response messages may also contain more data in addition to transaction data.

[0055] In one embodiment, user **110** may be notified about a transaction before an authorization request message is submitted to the issuer **160**. In this situation, transaction data at the time of receiving the authorization request message from the acquirer **140** may be used so that appropriate type of alert is provided to the user **110**. This can be used to involve the user **110** in verifying the transaction which may help in fraud detection.

[0056] In another embodiment, user **110** may be notified about a transaction after it has been approved or declined by the issuer **160**. In this situation, transaction data at the time of receiving the authorization response message from the issuer **160** may be used. This can be used to notify the user about a recent transaction. For example, when user **110** purchases a coffee at a coffee shop, he will receive a message on his mobile device **200** that says: "your card was charged \$2.00 at starbucks."

[0057] In some embodiments, when transaction data from issuer **160** are used, an alert may be customized based on the result of the transaction and include additional details that gives an "intelligent" aspect to the alert messages. For

example, an alert may be withheld if a transaction is declined to avoid any possible confusion. Alternatively, an alert may be issued stating that the transaction was declined and additional details may be provided to help the user **110** understand why the transaction was declined. For example, an alert in this example may say: "transaction was declined. Insufficient available credit," or "Transaction was declined. Verification from cardholder is required. Please contact the issuer."

[0058] Utilizing this method and separating the resources and processes, eliminates the burden of processing and generating the alerts from the resources of the payment processing network **150**, especially when great level of details and customizations are provided in the alerts: payment processing network **150** forwards the transaction data, that it normally receives from acquirer **140** and issuer **160**, to IP Gateway **170**. Further processing and customizing the alert messages is performed by the resources of IP Gateway **170**. This may advantageously result in a "real time" or "near real time" process, since when transaction data are received by the IP Gateway **170**, generation of the alert messages and the rest of the payment processing are performed in parallel.

[0059] In addition to eliminating the processing power needed for generating alerts, separation of processes and resources between payment processing network **150** and IP Gateway **170**, may be advantageous for the purpose of delivering the generated alerts which requires additional processing. When alerts are generated by the notification server computer **171**, they are sent to the delivery channel logic **177** for delivery to the user **110** via a user device. The delivery channel logic **177** may be in the form of one or more software applications running on one or more computers that are tasked with delivery of the alerts to the appropriate delivery channel(s). In one embodiment, the delivery channel logic may be part of the IP Gateway **170**. In another embodiment, the delivery channel logic **177** may be a third party entity that receives the alert message via network connection **154** and sends it to an appropriate user device.

[0060] In one embodiment, the alert message may be sent along with an identifier that specifies what form of delivery channel should be used for the delivery of the message. Delivery channel logic **177** is in communication with mobile device carriers **190** and e-mail servers **180**, for sending the alert messages in formats that are readable by the mobile device **200**, and in the form of e-mail messages that are readable by user computer **210**.

[0061] In some embodiments, an alert may be sent to a user in the form of Interactive Voice Response (IVR), Instant Message (IM), Voicemail, etc. Therefore, FIG. 2 shows that delivery channel logic **177** is in communication with other delivery channels **178** that can deliver the alert messages in a variety of formats to a user device.

[0062] It can be appreciated that the architecture of FIG. 2 provides several advantages. For example, generation of the alerts by the IP Gateway **170** and delivery of the alerts by the delivery channel logic **177**, will not overload the resources of payment processing network **150** with additional processing. In addition, this architecture allows for outsourcing of the IP Gateway **170**, delivery channel logic **177**, or any of their elements while reducing any potential security concerns. Given that IP Gateway **170** receives a copy of the transaction data from payment processing network **150**, it can be embodied as a third party entity tasked with generation of the alerts. Same applies to delivery channel logic **177**. Moreover, segmenting the resources provides the possibility of shutting down the elements used for alert generation and delivery without impacting the transaction processing operations of the payment processing network **150**.

B. ENROLMENT AND LINKAGE OF IP GATEWAY

[0063] In order to receive the alert messages, user **110** must be enrolled for the service provided by the alert messaging system **100**. There may be multiple ways in which the user **110** may become enrolled in the alert service. In some embodiments, the user **110** may be enrolled automatically by the issuer **160** that issues the portable consumer device **120**. Enrollment may also be done in a batch mode, by file delivery from issuer **160** or by file delivery from some other party. In other embodiments, the issuer **160** or payment processing network **150** may provide the alert service as an option to the user **110** at which time the user **110** may enroll in the alert messaging service either by contacting a customer service representative over the phone (provided either by the issuer **160** or payment processing network **150**), or by accessing a web site and filling out an online application. This may be done by web services **220**. The web services **220** can allow for enrollment of users in the services provided by the IP Gateway **170**. In certain implementations, the web site may be hosted by one entity but can redirect the consumer to a site hosted by another entity.

[0064] In some embodiments, issuer **160** may integrate its website with the web services **220**, and communicate with web services **220** on behalf of the user **110**. FIG. 3a and FIG. 3b illustrate two embodiments where user **110** is enrolled in the alert service by communicating with a website provided by the issuer **160** that is integrated with web services **220**. These embodiments are illustrated as examples of many possible ways that users may be enrolled in the alert services. These embodiments also illustrate the degree of flexibility and customization that the architecture of FIG. 2 provides for other entities such as issuer **160** to interact with the alert messaging system while maintaining the security, and without using the resources of the payment processing network **150**. Therefore, those skilled in the art will understand that the following embodiments are illustrative and not restrictive.

[0065] Going back to FIG. 3a and FIG. 3b, two possible methods of enrolling users with a web site **230** provided by issuer **160** that is integrated with web services **220** are illustrated. FIG. 4 is a flowchart that describes the steps in FIG. 3a and FIG. 3b. As shown in both FIG. 3a and FIG. 3b, user **110** enters the issuer web site **230** and authenticates himself. This is shown as step 301 in FIG. 4. Issuer **230** then indicates services eligibility for the accounts that the user **110** holds with the issuer **160**. (Step 302 in FIG. 4). User **110** then selects one or more of his accounts for enrollment. (Step 303 in FIG. 4). Next, user **110** is presented with an electronic enrollment form to be filled out. Appropriate fields of this form may be provided by the issuer **160**, or based on an arrangement between issuer **160** and web services **220**, the fields may be provided by the web services **220**. FIG. 3a illustrates the embodiment in which issuer **160** requests and receives appropriate fields for user **110** from web services **220**. This is shown at step 304a in FIG. 4. FIG. 3b illustrates the embodiment in which the issuer **160** directly presents the appropriate enrollment fields for the user **110**. This is shown as step 304b in FIG. 4. From the vantage point of the user **110** there will be no difference in either of these embodiments, because the integration of the issuer website **230** and the web services **220** is done in the background.

[0066] Thereafter, user **110** completes the enrollment information. (step 305 in FIG. 4). Issuer **160** conducts a channel verification and completes the user activation. (Step 306 in FIG. 4). In step 306, issuer **160** verifies and activates the delivery channels such as e-mail, SMS messaging, etc. that user **110** requested when filling out the electronic enrollment form. The user activation status is then

passed by issuer **160** to the IP Gateway **170** via web services **220**. (Step 307 in FIG. 4). Finally IP Gateway begins processing alerts for the enrolled account(s) of user **110**. (step 308 in FIG. 4).

[0067] Once the user **110** is enrolled in the alert service, appropriate information regarding the user **110** such the preferences and type of user device(es) used for delivery of alerts, account identifier (account number or any other data that identifies the user account enrolled in the alert service), etc. are stored in the cardholder enrollment data **175** in the database **173**. Cardholder enrollment data **175** are used along with issuer data **176** and transaction data **174** for generation of the alert messages. As a result of the enrollment process, cardholder enrollment data **175** in the database **173** will contain a group of account identifiers that indicate the account numbers of users enrolled in the alert messaging service.

[0068] In some embodiments, only the transaction requests/responses that are associated with an account that is enrolled in the alert messaging system **100** are sent to the IP Gateway **170**. In order for the payment processing network **150** to determine whether the transaction data are associated with a portable consumer device **120** that is enrolled in the alert service, the payment processing network **150** maintains a list of account identifiers (account numbers or any other data that identifies the user accounts enrolled in the alert service) associated with the portable consumer devices of users who are enrolled in the alert messaging service. This list is stored in the enrollment database **152**. The account identifiers in the enrollment database **152** are synchronized with the appropriate portion(s) of the cardholder enrollment data **175** via synchronization link **156**. Synchronization link **156** may be in any suitable form. For example, the synchronization link **156** may be in the form of local area network connection or Internet.

[0069] Synchronization link **156** stores a copy of the group of account identifiers that are stored in cardholder enrollment data **175**, into enrollment database **152**. This will make the enrollment database **152** to act as a "thin" database that stores an appropriate portion of the data in the database **173**, and allows the payment processing server computer **186** to initiate the process of alert message generation and delivery by accessing a thin database (enrollment database **152**).

[0070] Synchronization link **156** performs the synchronization process between an appropriate portion of the data stored in the database **173** and enrollment database **152**, at predetermined times or as new data are stored in the database **173**. In some embodiments, synchronization link **156** synchronizes the data (the group of account identifiers) at predetermined times per day. For example, in one embodiment, synchronization link **156** may synchronize the data at the end of each day. In this situation, users who enroll their accounts with the alert messaging service will have to wait until the next day for activation. In some other embodiments, synchronization link **156** may synchronize the data as they are stored in the database **173**. In such embodiments, user's accounts will be enrolled in the alert messaging service shortly after they finish the enrollment process. In some embodiments, synchronization link **156** may synchronize the data certain number of times per day at predetermined times or based on a predetermined number of new enrolled accounts.

[0071] After the payment processing network **150** receives an authorization request message from the acquirer **140**, authorization response message from the issuer **160**, or both, an application program, running on a computer system such as the payment processing server computer **186**, compares the account number and/or other forms of account identifier(s) associated with the authorization request message (or the authorization response message) with a list of account identifiers of the enrolled account numbers in the enrollment database **152**. If there is a match, which indicates that the account number associated with portable consumer device **120** is enrolled in the alert messaging service, the payment processing network **150** sends the transaction data **174** associated with that particular transaction to the IP Gateway **170**.

[0072] If the transaction is associated with account number that is not enrolled in the alert service, payment processing network **150** does not send the transaction data to IP Gateway **170** and resumes the payment processing. This prevents the IP Gateway from having to process unnecessary transactions while maintaining a secure and fast process flow. This dual database approach provides for fast processing as it can filter out the transactions that require alert processing from the transactions that do not.

C. PERFORMING TRANSACTIONS AND PROVIDING ALERT MESSAGES

[0073] FIG. 1 and the flowchart of FIG. 5 illustrate the entire process from performing a transaction until generation and delivery of alert(s) associated with the transaction. In a typical purchase transaction (payment transaction), the user **110** purchases goods or services at the merchant **130** using the portable consumer device **120** (arrow 1 in FIG. 1 and step 501 in FIG. 5). An authorization request message comprising transaction data is generated by a processor in the access device **132** after the portable consumer device **120** interacts with the access device **132**. The authorization request message may comprise, for example, the BIN (bank identification number), the account identifier (account number) and expiration date associated with the portable consumer device **120**, the purchase amount, and a merchant code such as a merchant category code (MCC). The authorization request message is then forwarded from the merchant **130** to the acquirer **140** (arrow 2 in FIG. 1 and step 502 in FIG. 5). After receiving the authorization request message, the acquirer **140** then sends it to the payment processing network **150** (arrow 3 in FIG. 1 and step 503 in FIG. 5).

[0074] The payment processing network **150** then forwards the authorization request message to the issuer **160** of the portable consumer device **120** (arrow 4 in FIG. 1 and step 504 in FIG. 5). After the issuer **160** receives the authorization request message, the issuer **160** sends an authorization response message back to the payment processing network **150** to indicate whether or not the current transaction is authorized (arrow 5 in FIG. 1 and step 505 in FIG. 5).

[0075] At this point, payment processing server computer **186** (shown in FIG. 2) accesses the enrollment database **152** (also shown in FIG. 2) to determine if the transaction is associated with an account identifier that is stored in the enrollment database **152** (step 506 in FIG. 5). If the transaction is associated with an account enrolled in the alert service, appropriate portions, or in some embodiments, the entirety of transaction data that includes the account identifier are sent to the IP Gateway **170** (arrow 6b in FIG. 1 and step 510 in FIG. 5). Step 506 in FIG. 5 may also be performed after, or concurrent with step 503. In some embodiments, payment processing network **150** may send the transaction data at the time of receiving an authorization request message. In some other embodiments, the payment processing network **150** may send transaction data both at the time of

receiving the authorization request message and at the time of receiving the authorization response message. As mentioned before (in section A), this can be used for different types of alerts.

[0076] In either case (i.e., transaction is associated with an enrolled account or not), after the payment processing network **150** receives the authorization response message, it then forwards the authorization response message back to the acquirer **140** (arrow 6 in FIG. 1 and step 507 in FIG. 5). The acquirer **140** then sends the response message back to the merchant **130** (arrow 7 in FIG. 1 and step 508 in FIG. 5), and it is then presented to the user **110** (arrow 8 in FIG. 1 and step 509 in FIG. 5).

[0077] If at step 506 (FIG. 5) it is determined that the transaction is associated with an account not enrolled in the alert service (i.e. account identifier does not exist in enrollment database **152**), the process of performing the transaction continues without sending the transaction data to the IP Gateway **170**.

[0078] For transactions associated with enrolled accounts in the alert messaging service, steps 510 to 514 in FIG. 5 are performed parallel to steps 507 to 509. Steps 510 to 514 are performed by IP Gateway **170** and delivery channel logic **177**. After the transaction data are sent to IP Gateway **170** (step 510), notification server computer **171** generates the appropriate alert(s) for that transaction.

[0079] The determining factor in formatting and complexity of alert messages may be the combination of user preferences, technical requirements regarding the delivery channels, issuer preferences, and availability of data regarding the transactions. The notification server computer **171** considers such criteria when generating an alert message. Depending on preferences of the user in terms of the types of alerts, conditions in which trigger the generation of alerts, format, method of delivery, language, issuer criteria and rules, information in the transaction data, etc., that are stored in database **173** and collectively referred to as "customization data", the notification server computer **171** generates one or more alerts in the form of messages, sounds, images, impressions or any combination thereof.

[0080] In one embodiment, an alert may be in a short format notifying the user **110** about a recent transaction. For example, if the user **110** uses the consumer portable device **120** to buy groceries, the alert message may state "The card was used for the purchase of groceries." In other embodiments, the alert may be in the

form of an intelligent alert message enhanced with additional information such as the name of the merchant, location of the merchant and the amount of the transaction. For example, if the user **110** used the portable consumer device **120** for purchasing \$45.00 fuel at a Shell gas station at 123 First Street in San Francisco, the message may state "The card was used to purchase fuel at the Shell gas station in 123 First Street in San Francisco in the amount of \$45.00."

[0081] Alternatively or additionally, an alert may be in the form of a customized sound file played on the mobile device **200**. Also, conditions that triggers the alerts may be set by the user **110**, or the issuer **160**, or both. Such conditions may include a range of possibilities from generating alert for every transaction to generating alerts for purchase amounts more than a specified number. The form of the alerts may also be customized by user **110**, or issuer **160**, or both. For example, user **110** may specify during the enrollment process that he wants to receive an intelligent alert message for all the transaction with amount grater than \$100 while receiving a sound file indicating the transactions below \$100. In addition, user **110**, issuer **160**, or both may specify what types of delivery channel to be used and for what types of alerts. Based on such preferences, some alerts may be delivered via an e-mail message to the user's e-mail account while some other alerts are delivered to the user's mobile device **200** in the form of a SMS message.

[0082] Referring again to FIG. 5, notification server computer **171** generates one or more alerts (step 511) for the transaction. The one or more alerts are sent to the delivery channel logic **177** (step 512) to be delivered to the user device (i.e. mobile device **200** and/or user computer **210** shown in FIG. 1). The alerts are delivered via mobile device carriers **190**, e-mail servers **180** or other delivery channel logic **178** (step 513). Finally, the one or more alerts are received by the user **110** via the designated user device. (i.e., mobile device **200** and/or user computer **210**).

[0083] It can be appreciated that the architecture shown in FIG. 2 provides the ability of using the transaction data to generate and deliver alert messages associated with the transactions without affecting the processing resources of the payment processing network **150**. For example, if transaction data for all transactions are sent to the notification server computer **171** for processing, the notification server computer may become overburdened with data. By providing a "thin" database in the payment processing network, only transaction data associated with cardholders enrolled in the alerts services are sent to the notification server for

processing. This way, transaction data associated with cardholders that are not enrolled in the alert messaging service is processed quickly.

[0084] Moreover, the architecture in FIG. 2 provides a way of sending and receiving additional data from other entities such as issuers and the users to be utilized for generation and delivery of the alerts. Data are exchanged between issuers, users and other entities without storing that data in the resources of payment processing network **150** that may potentially result in security concerns. The sensitive resources of payment processing network **150** remain intact and undisturbed while payment processing network **150** communicates with IP Gateway **170** for generation of alerts.

[0085] The various participants and elements in the previously described system diagrams (e.g., the computers, issuers, servers, etc. in FIGS. 1, 2, 3a and 3b) may use any suitable number of subsystems to facilitate the functions described herein. Examples of such subsystems or components are shown in FIG. 6. The subsystems shown in FIG. 4 are interconnected via a system bus **675**. Additional subsystems such as a printer **674**, keyboard **678**, fixed disk **679** (or other memory comprising computer-readable media), monitor **676**, which is coupled to display adapter **682**, and others are shown. Peripherals and input/output (I/O) devices, which couple to I/O controller **671**, can be connected to the computer system by any number of means known in the art, such as serial port **677**. For example, serial port **677** or external interface **681** can be used to connect the computer apparatus to a wide area network such as the Internet, a mouse input device, or a scanner. The interconnection via system bus allows the central processor **673** to communicate with each subsystem and to control the execution of instructions from system memory **672** or the fixed disk **679**, as well as the exchange of information between subsystems. The system memory **672** and/or the fixed disk **679** may embody a computer-readable medium.

[0086] The software components or functions described in this application may be implemented as software code to be executed by one or more processors using any suitable computer language such as, for example, Java, C++ or Perl using, for example, conventional or object-oriented techniques. The software code may be stored as a series of instructions, or commands on a computer-readable medium, such as a random access memory (RAM), a read-only memory (ROM), a magnetic medium such as a hard-drive or a floppy disk, or an optical medium such

as a CD-ROM. Any such computer-readable medium may also reside on or within a single computational apparatus, and may be present on or within different computational apparatuses within a system or network.

[0087] The present invention can be implemented in the form of control logic in software or hardware or a combination of both. The control logic may be stored in an information storage medium as a plurality of instructions adapted to direct an information processing device to perform a set of steps disclosed in embodiments of the present invention. Based on the disclosure and teachings provided herein, a person of ordinary skill in the art will appreciate other ways and/or methods to implement the present invention.

[0088] In embodiments, any of the entities described herein may be embodied by a computer that performs any or all of the functions and steps disclosed.

[0089] Any recitation of "a", "an" or "the" is intended to mean "one or more" unless specifically indicated to the contrary.

[0090] The above description is illustrative and is not restrictive. Many variations of the invention will become apparent to those skilled in the art upon review of the disclosure. The scope of the invention should, therefore, be determined not with reference to the above description, but instead should be determined with reference to the pending claims along with their full scope or equivalents.

WHAT IS CLAIMED IS:

1. A system comprising:
a payment processing server;
a first database comprising a group of account identifiers coupled to the payment processing server computer;
a second database comprising at least the group of account identifiers, wherein the second database is operatively coupled to the first database; and
a notification server computer operatively coupled to the second database.
2. The system of claim 1, further comprising:
delivery channel logic operationally coupled to the notification server computer and configured to receive alert messages from the notification server computer and deliver the alert messages to a user device.
3. The system of claim 1, further comprising:
an enrollment server computer coupled to the second database and configured to enroll one or more users in an alert service by providing an electronic enrollment form to one or more users.
4. The system of claim 1, wherein the payment processing server computer and the first database are part of a payment processing network.
5. The system of claim 4, wherein the second database and the notification server computer are used to generate one or more alert messages from transaction data received from the payment processing server computer.
6. The system of claim 5, wherein the payment processing server computer comprises a processor, and a computer readable medium coupled to the processor, wherein the computer readable medium comprises code for causing the processor to implement a method comprising sending the transaction data to the notification server computer for a transaction associated with an account identifier in the group of account identifiers in the first database.
7. The system of claim 1, wherein the account identifiers are associated with a plurality of accounts of a plurality of portable consumer devices used to perform payment transactions.

8. The system of claim 1, wherein the group of account identifiers in the first database are synchronized with the group of account identifiers in the second database.

9. The system of claim 1, wherein the notification server computer comprises a processor, and a computer readable medium coupled to the processor, wherein the computer readable medium comprises code for causing the processor to implement a method comprising generating an alert message tailored for a user associated with a portable consumer device, which is associated with an account identifier in the group of account identifiers in the first database, when the user uses the portable consumer device to perform a payment transaction.

10. The system of claim 1, wherein the group of account identifiers are associated with one or more accounts enrolled in an alert messaging service.

11. A method comprising:
receiving transaction data comprising an account identifier;
determining if the account identifier is present in a first database comprising a group of account identifiers;
if the account identifier is in the first database, then sending the transaction data to a notification server computer, which is in communication with a second database comprising at least the group of account identifiers, wherein the notification server computer thereafter sends an alert message to a user device; and
if the account identifier is not in the first database, then sending an authorization response message to a merchant without sending the transaction data to the notification server computer.

12. The method of claim 11, wherein the account identifier is a first account identifier and wherein the method further comprises providing a second account identifier to the second database, but not the first database.

13. The method of claim 12, wherein the second account identifier is loaded into the first database using a synchronization link.

14. The method of claim 12, wherein the second account identifier is associated with an account enrolled in an alert messaging service.

15. The method of claim 11, wherein the notification server computer accesses the second database and retrieves alert customization data associated with the account identifier for generation of one or more alert messages.

16. The method of claim 11, wherein sending the alert message occurs in parallel with transmission of an authorization response message from a payment processing network to a merchant device.

17. The method of claim 11, wherein the transaction data is present in an authorization request message from an acquirer.

18. The method of claim 11, wherein the transaction data is present in an authorization response message from an issuer.

19. A method comprising:
using a portable consumer device, performing an electronic transaction; and
receiving an alert message associated with a transaction at a user device, wherein the alert message is generated from a notification server computer coupled to a payment processing server computer, and wherein the notification server computer receives transaction data from the payment processing server computer and generates the alert message based on customization data stored in a database coupled to the notification server computer.

20. The method of claim 19, further comprising:
using an electronic enrollment form provided by an enrollment server computer coupled to the database, customizing a format and a method of delivery of the alert message.

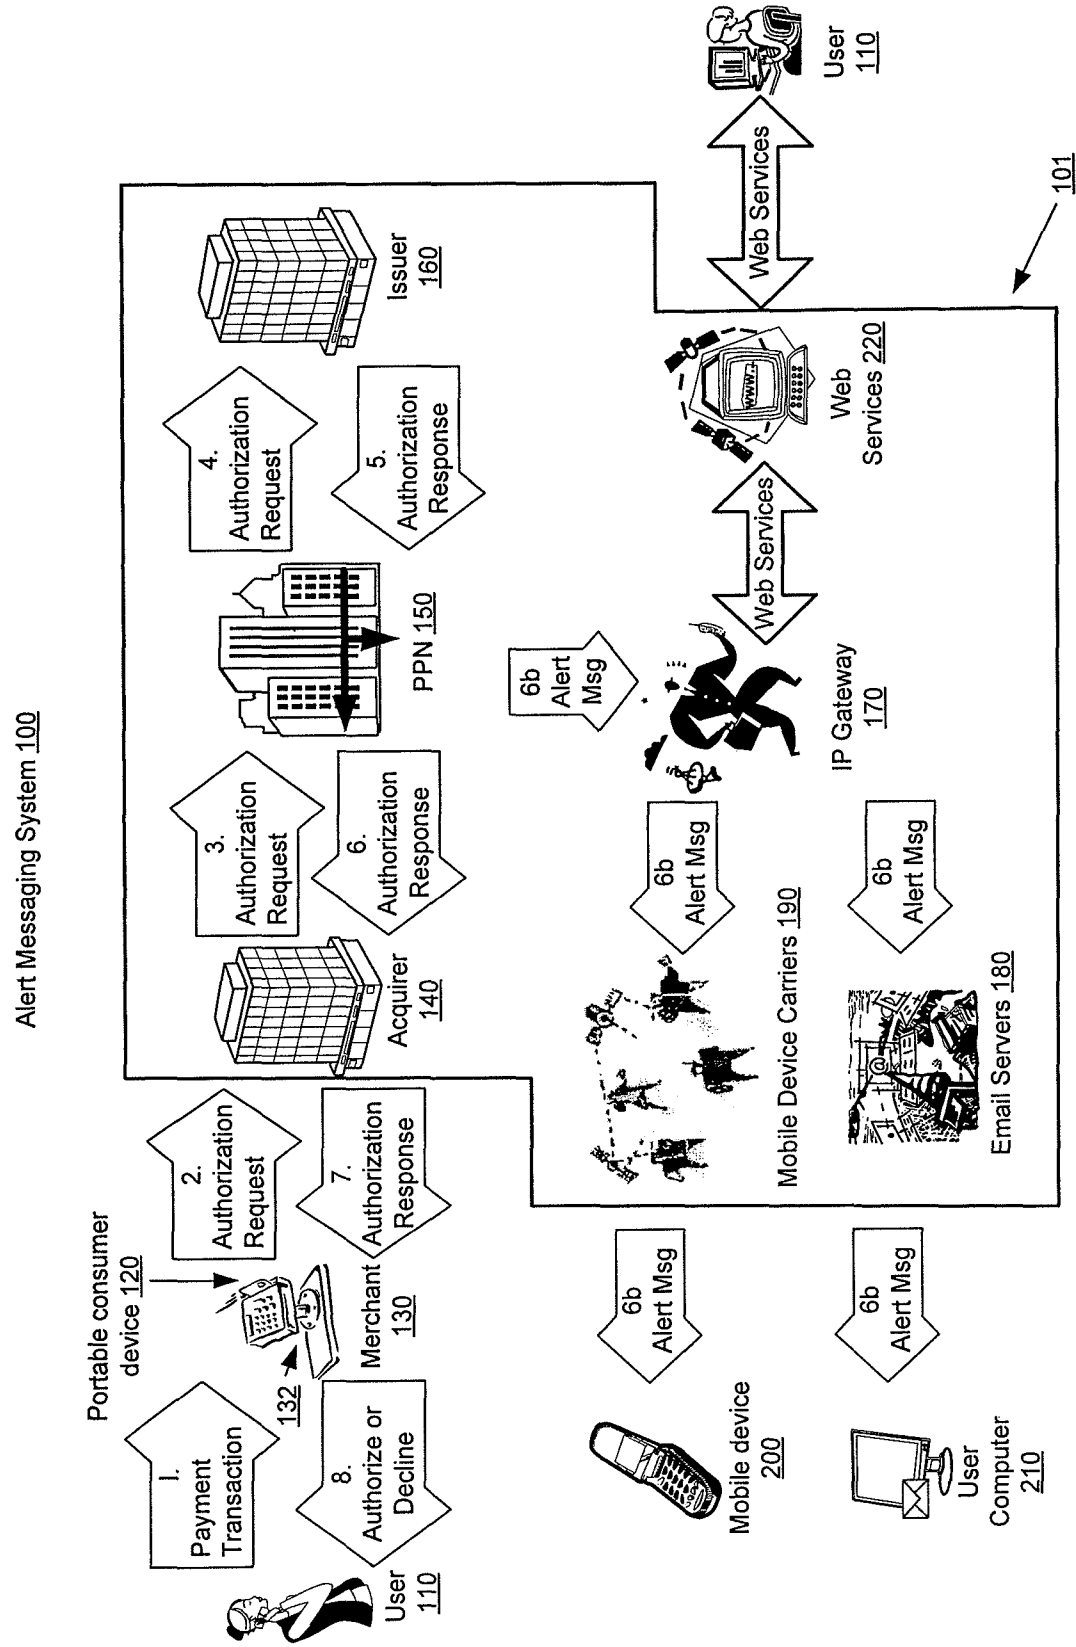


Fig. 1

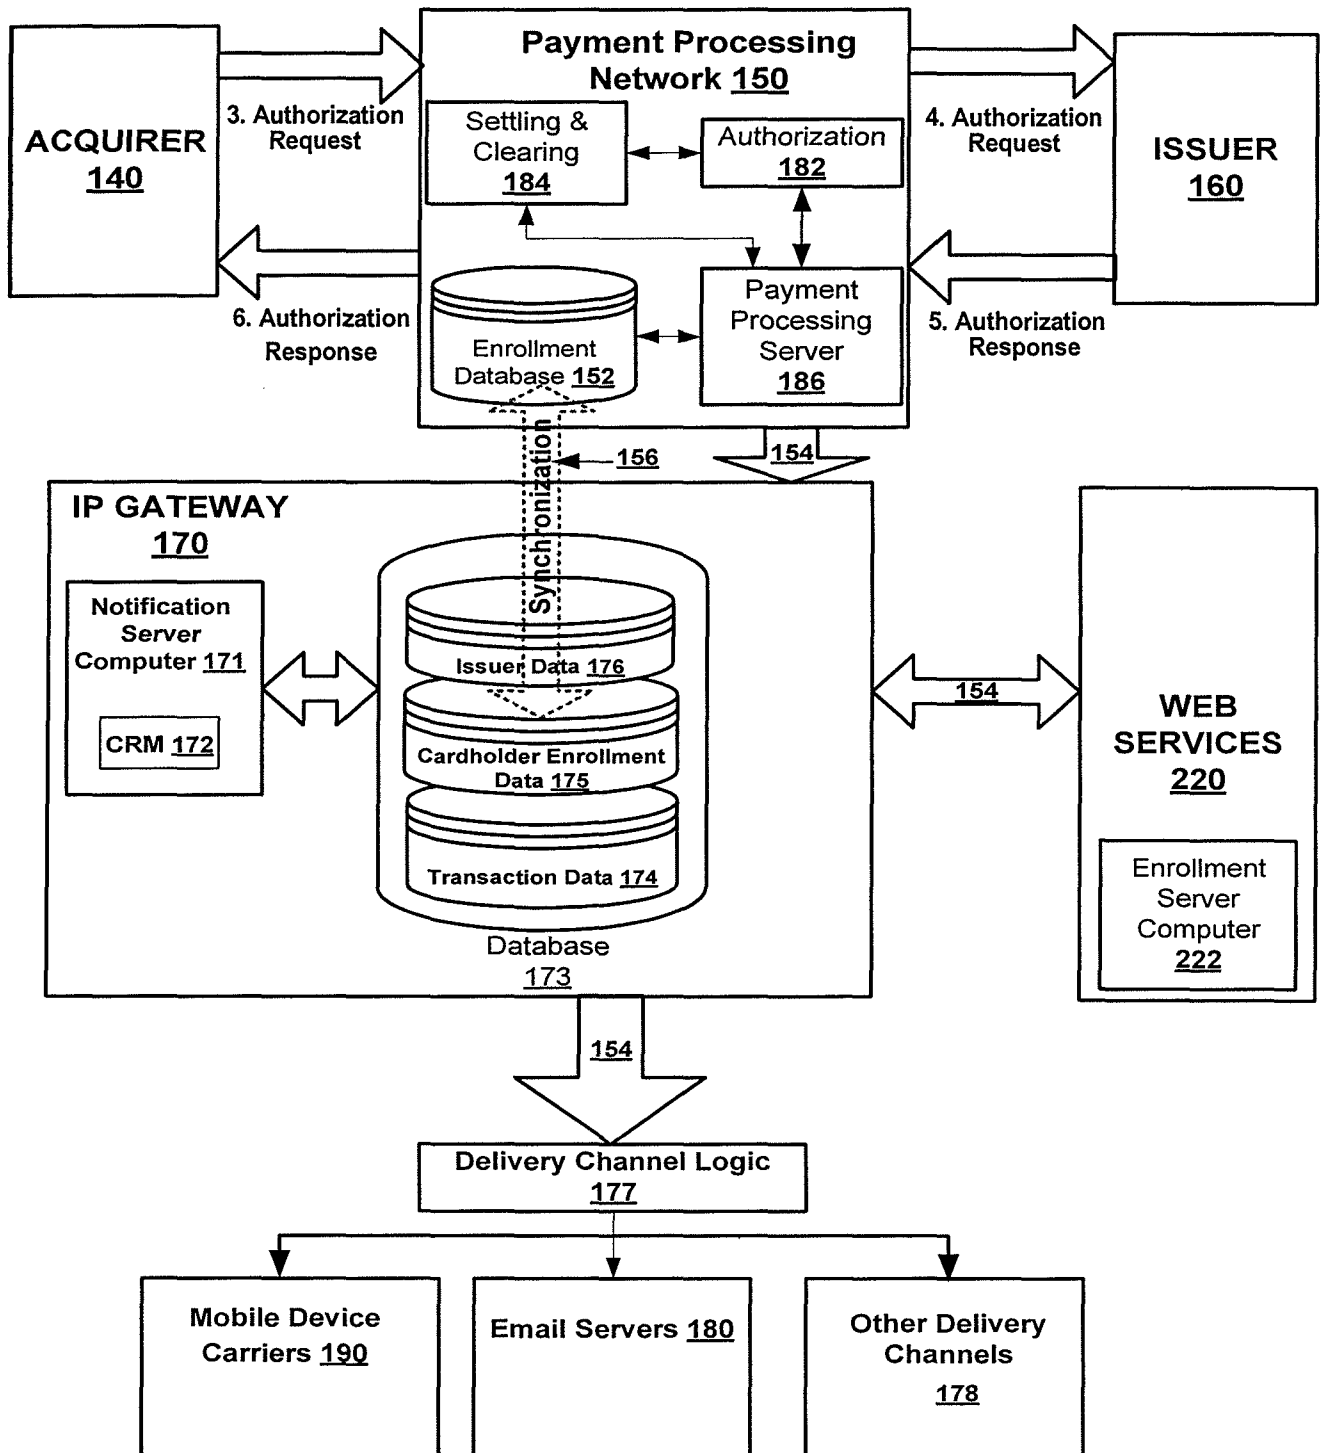
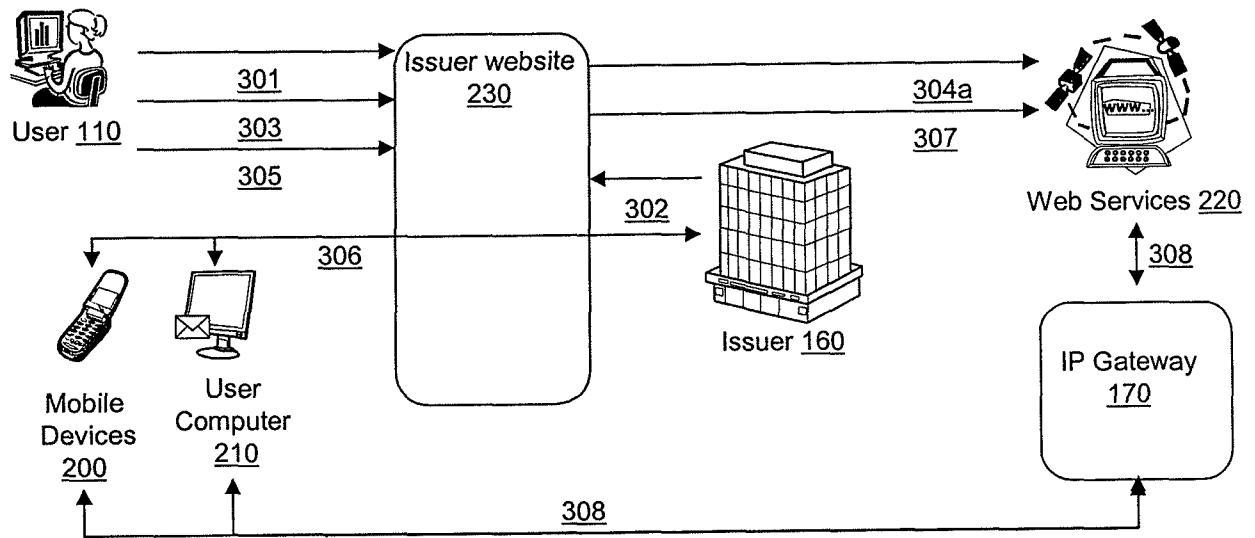
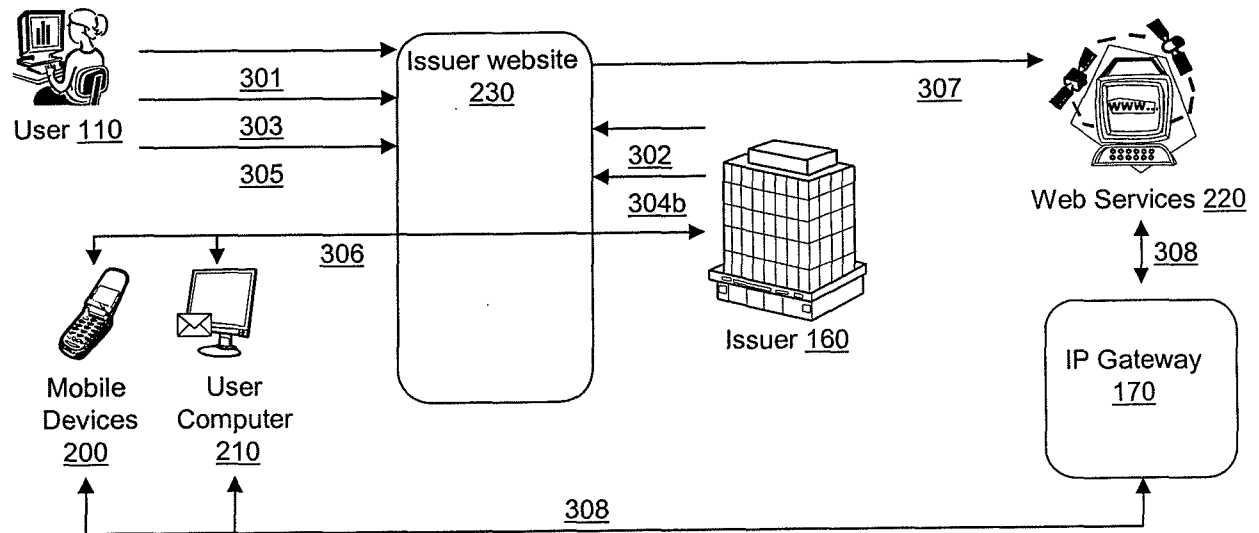
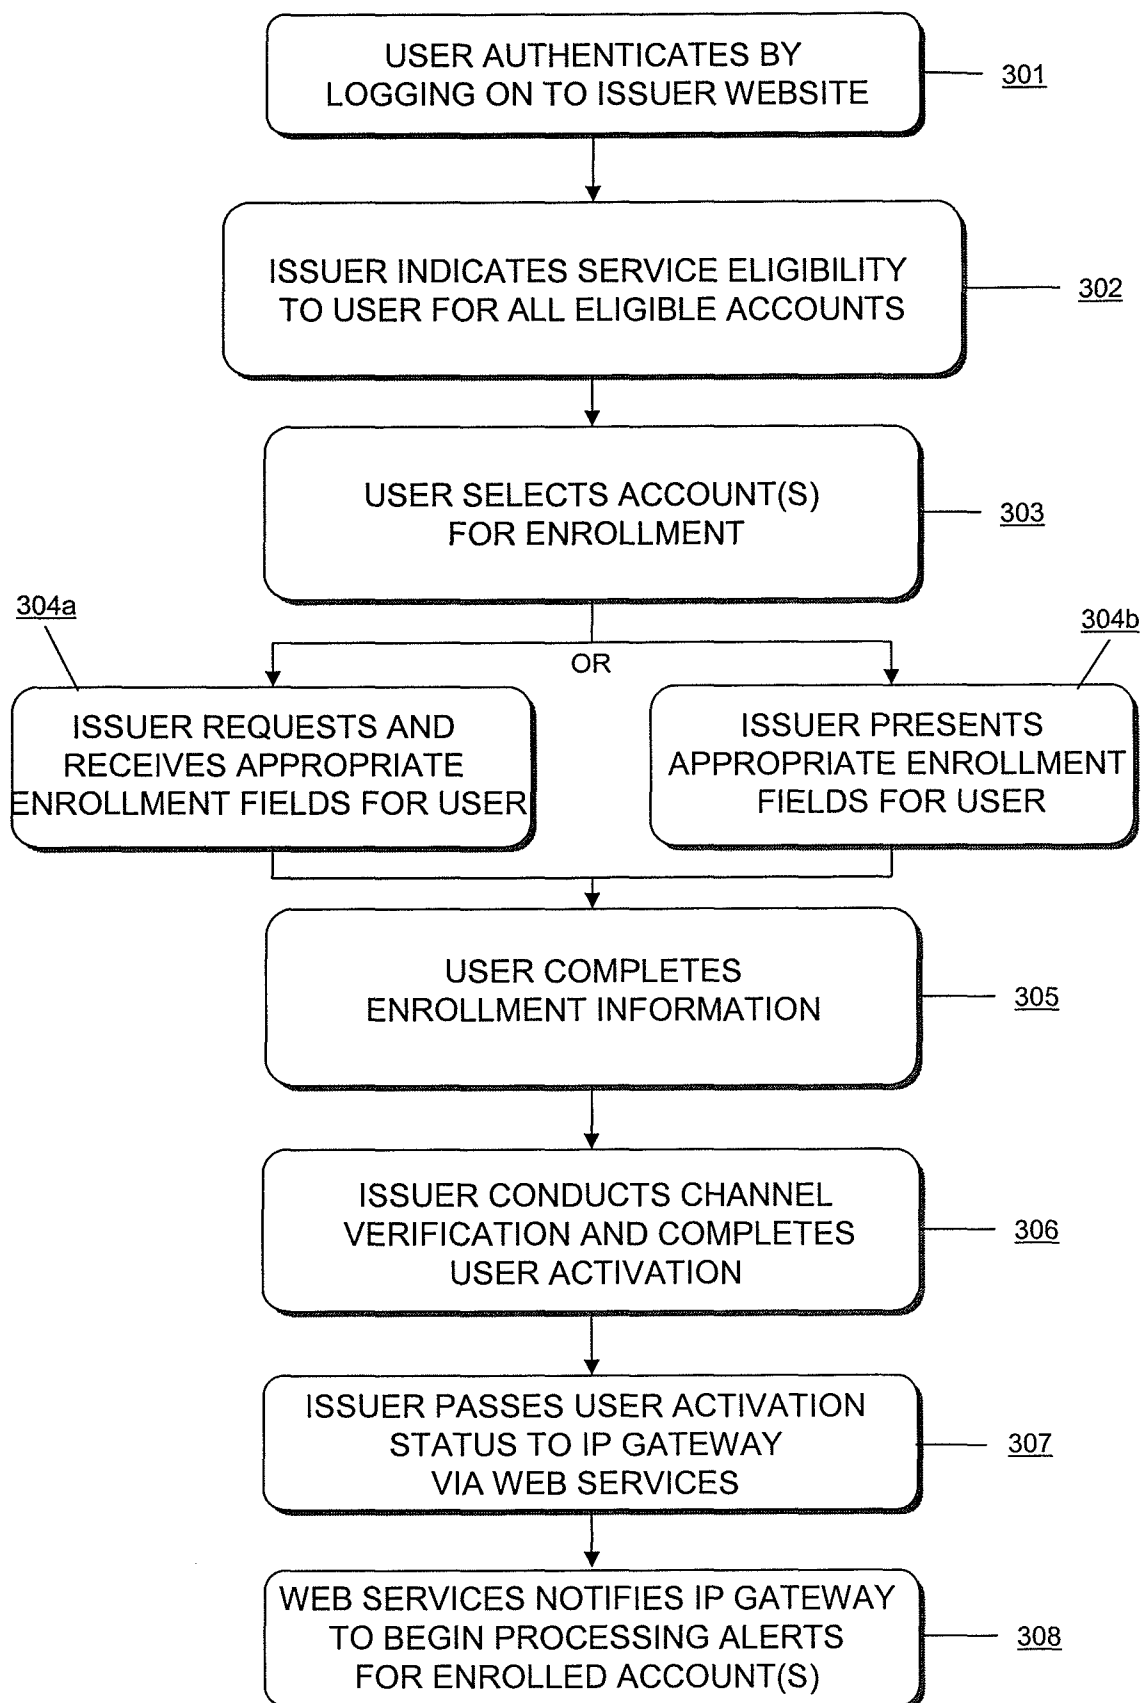


Fig. 2

3/6

**FIG. 3a****FIG. 3b**

4/6

**FIG. 4**

5/6

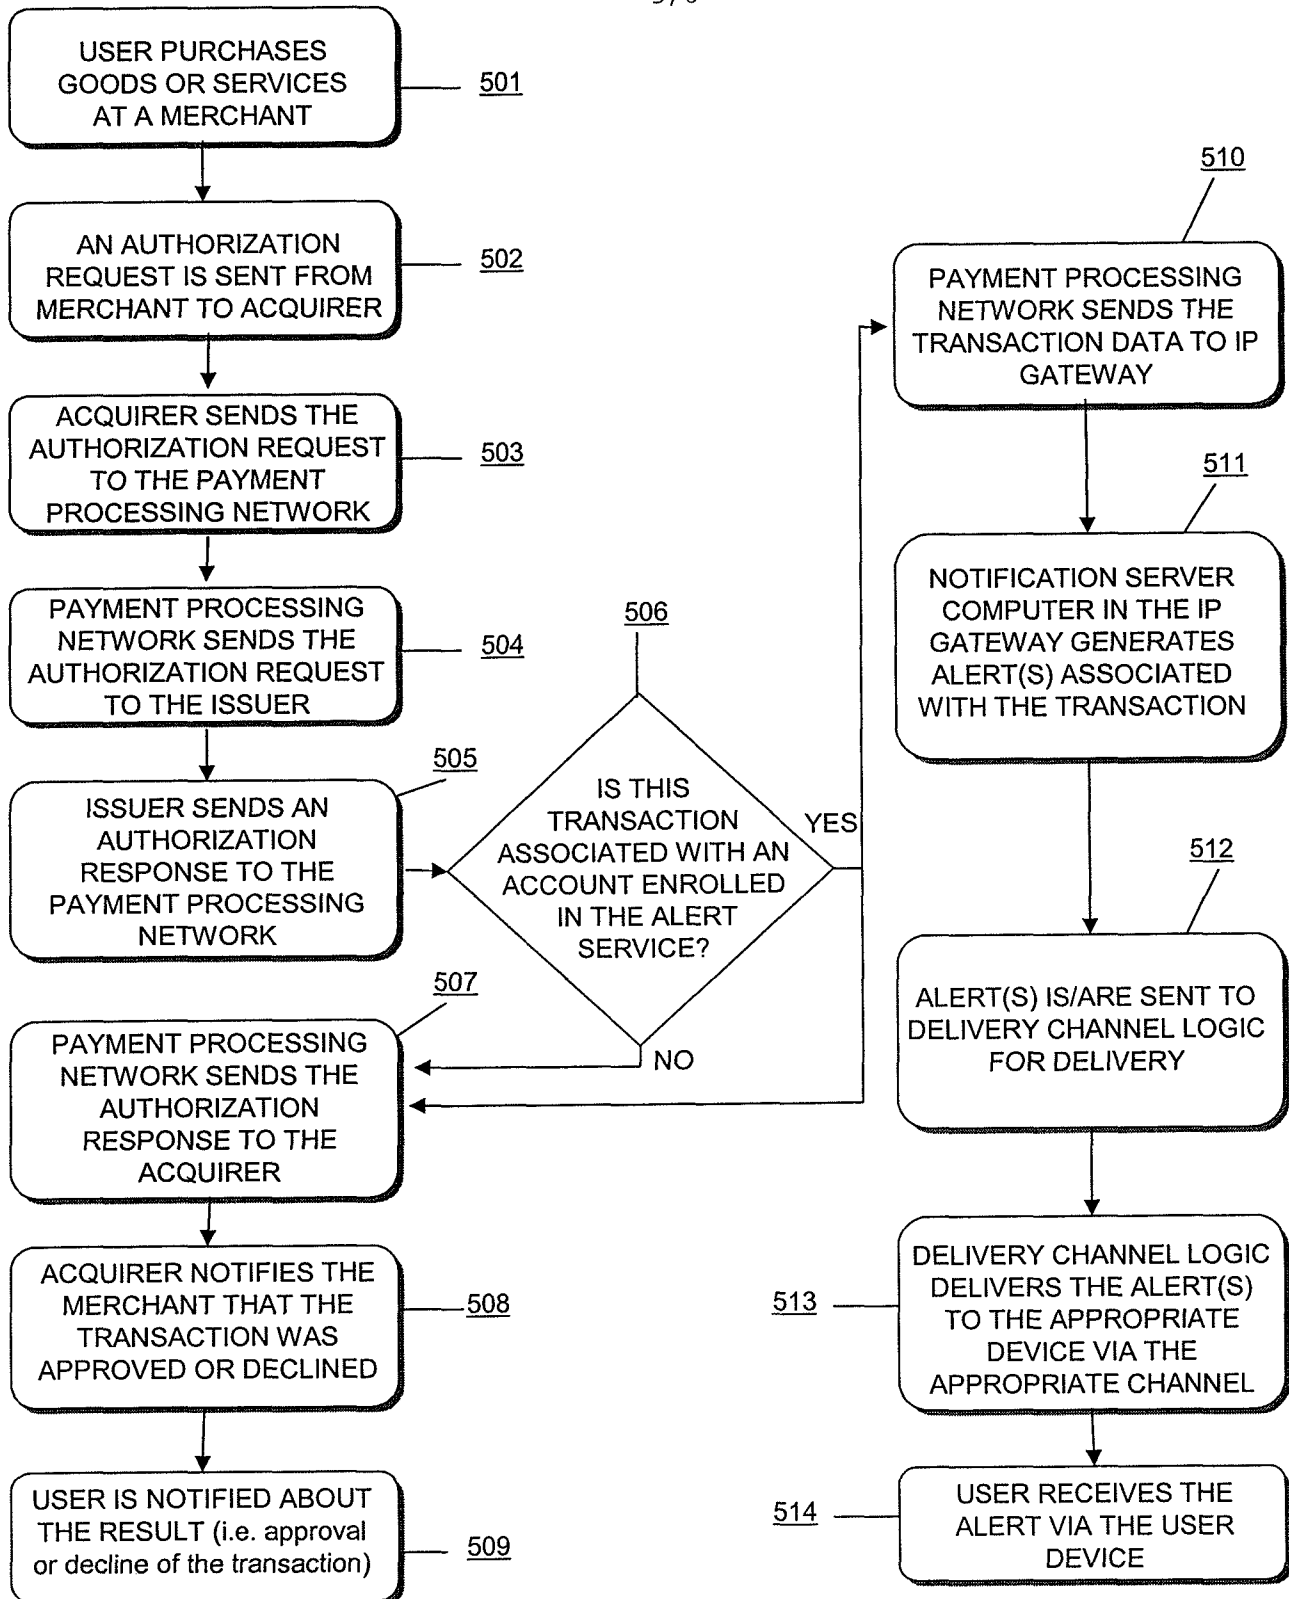
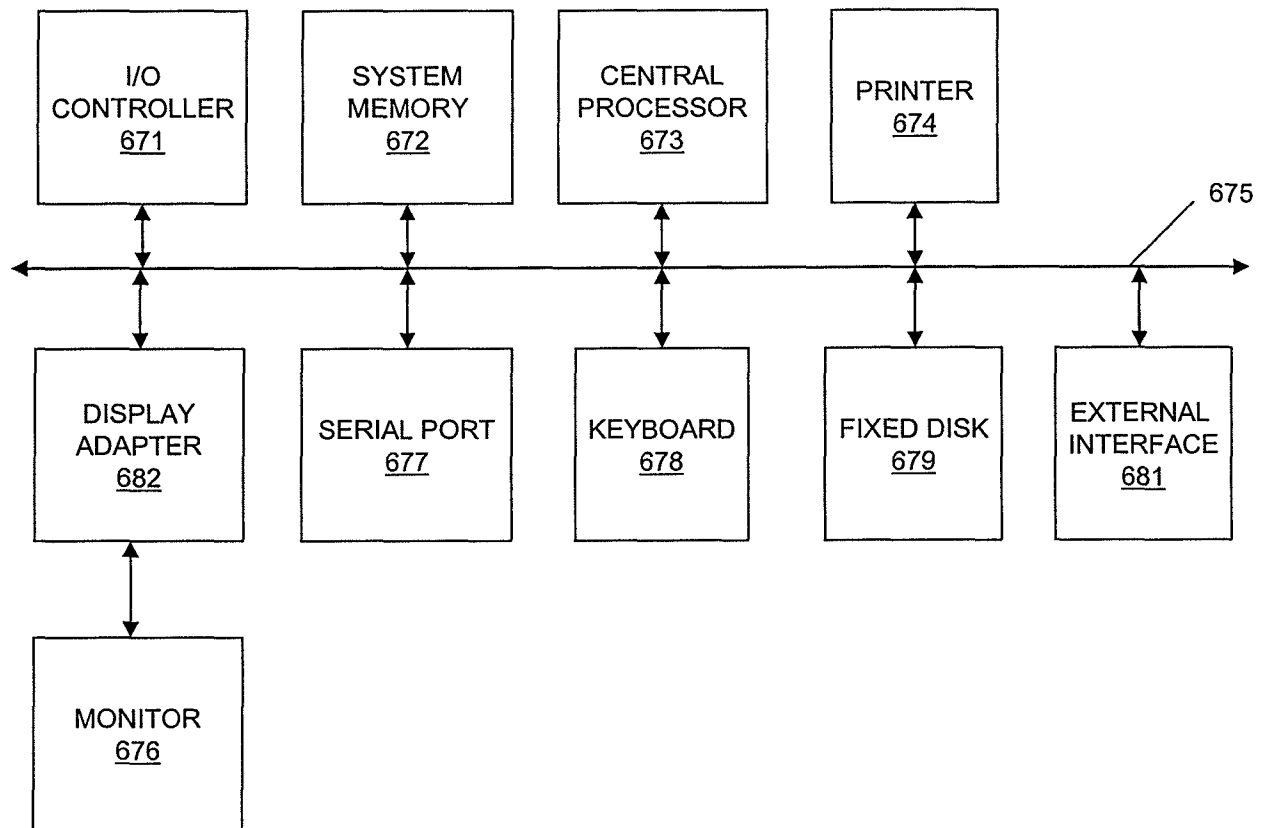


FIG. 5

6/6

**FIG. 6**