




(86) **Date de dépôt PCT/PCT Filing Date:** 2012/04/19
 (87) **Date publication PCT/PCT Publication Date:** 2012/10/26
 (85) **Entrée phase nationale/National Entry:** 2013/10/18
 (86) **N° demande PCT/PCT Application No.:** KR 2012/003024
 (87) **N° publication PCT/PCT Publication No.:** 2012/144833
 (30) **Priorité/Priority:** 2011/04/19 (KR10-2011-0036447)

(51) **Cl.Int./Int.Cl. H04W 4/02** (2009.01),
G06F 15/16 (2006.01), **G06F 9/44** (2006.01)
 (71) **Demandeur/Applicant:**
SAMSUNG ELECTRONICS CO., LTD., KR
 (72) **Inventeurs/Inventors:**
ROH, DONG-HYUN, KR;
SONG, MOON-BAE, KR;
KIM, SANG-MI, KR;
KWAK, HYUN-MI, KR
 (74) **Agent:** MARKS & CLERK

(54) **Titre : PROCEDURE ET SYSTEME PERMETTANT DE PARTAGER ET D'UTILISER DES INFORMATIONS DE LOCALISATION DANS UN TERMINAL PORTABLE**

(54) **Title: METHOD AND SYSTEM FOR SHARING AND USING LOCATION INFORMATION IN PORTABLE TERMINAL**

[Fig. 2]

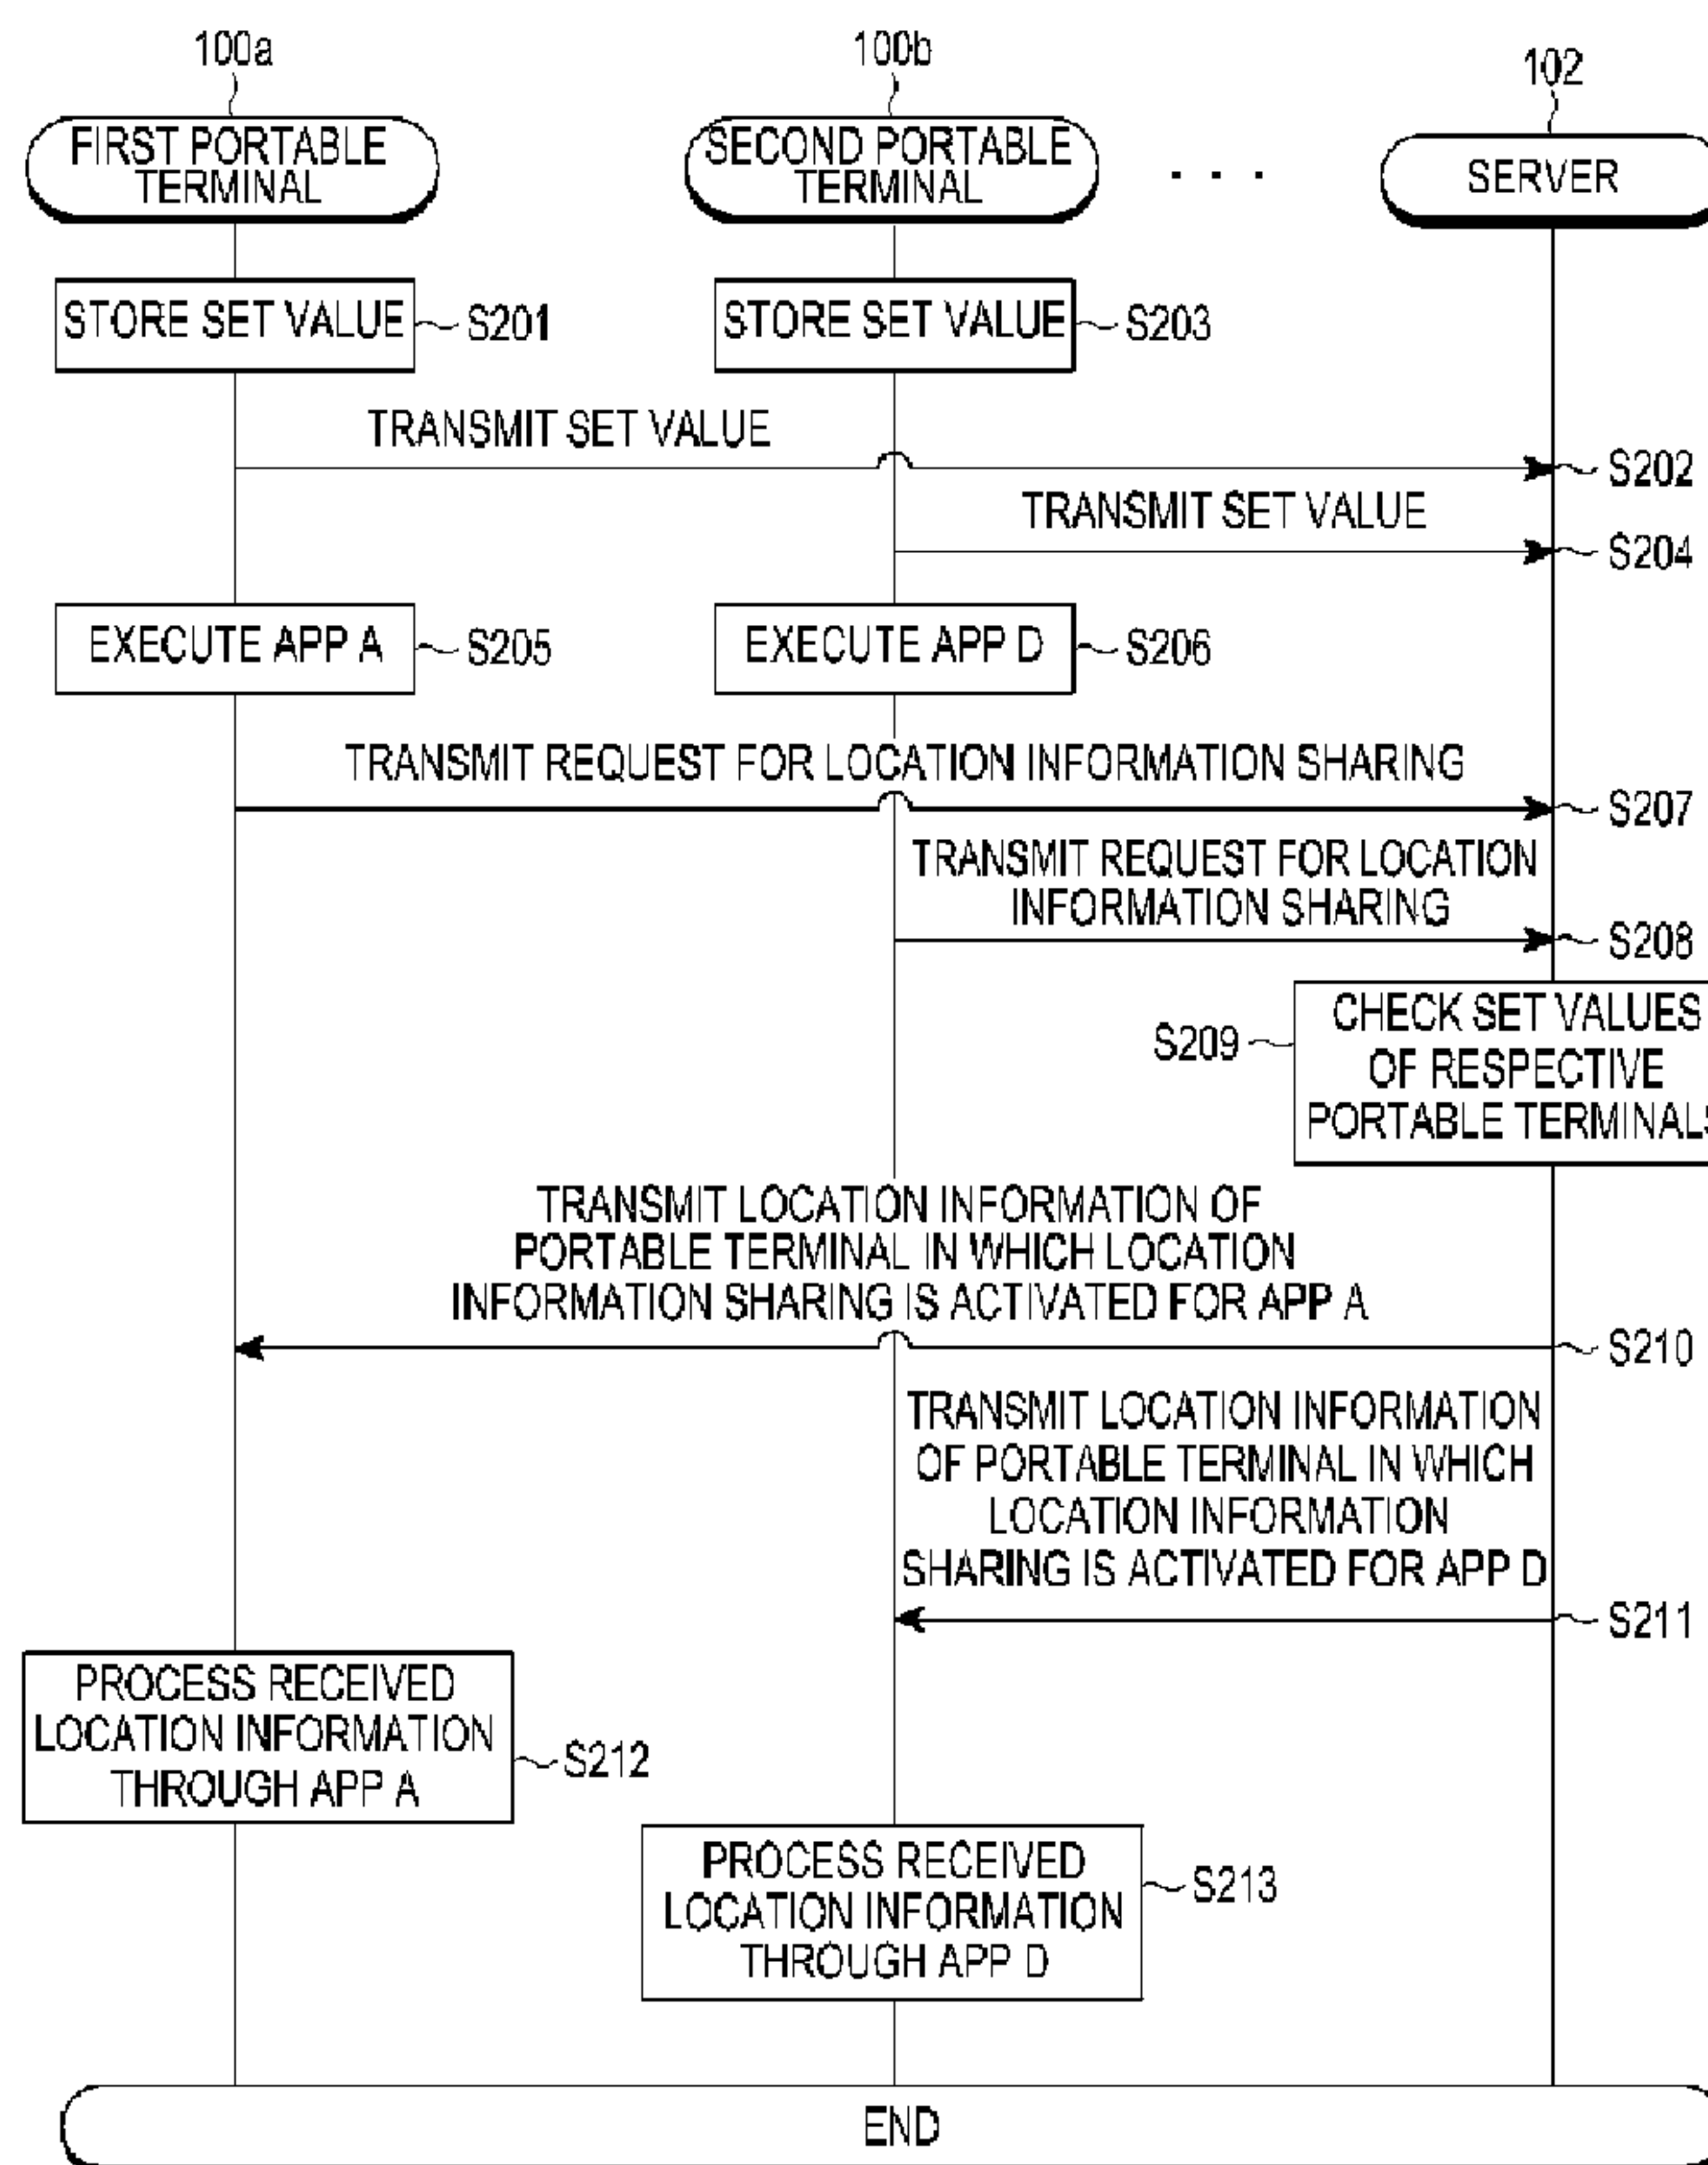

(57) **Abrégé/Abstract:**

Methods, apparatus and a system are provided for sharing and using location information in a portable terminal. A setting indicating whether location information sharing is activated is received for each application of the portable terminal that uses location



(57) Abrégé(suite)/Abstract(continued):

information. The settings are transmitted to a server. An application for which location information sharing is activated is executed. A request for sharing of location information with respect to the executed application is transmitted to the server. Location information of a portable terminal in which location-information sharing is activated for the executed application is received from the server. The received location information is processed through the executed application.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
26 October 2012 (26.10.2012)(10) International Publication Number
WO 2012/144833 A3

(51) International Patent Classification:

H04W 4/02 (2009.01) G06F 9/44 (2006.01)
G06F 15/16 (2006.01)

(21) International Application Number:

PCT/KR2012/003024

(22) International Filing Date:

19 April 2012 (19.04.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10-2011-0036447 19 April 2011 (19.04.2011) KR

(71) Applicant (for all designated States except US): **SAM-SUNG ELECTRONICS CO., LTD.** [KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-742 (KR).(72) Inventors: **ROH, Dong-Hyun**; #109-403, Hanyang Sujain APT., Bora-dong Housing Site 1, Giheung-gu, Yongin-si, Gyeonggi-do 446-904 (KR). **SONG, Moon-Bae**; #11-911,Wolgye Miseong APT., Wolgye 3-dong, Nowon-gu, Seoul 139-771 (KR). **KIM, Sang-Mi**; #112-1704, Seonsa Hyundai APT., Amsa-dong, Gangdong-gu, Seoul 134-050 (KR). **KWAK, Hyun-Mi**; #304, Fine ville, 39-1, Uman 2-dong, Paldal-gu, Suwon-si, Gyeonggi-do 442-816 (KR).(74) Agent: **LEE, Keon-Joo**; Mihwa Bldg. 110-2, Myongryundong 4-ga, Chongro-gu, Seoul 110-524 (KR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR SHARING AND USING LOCATION INFORMATION IN PORTABLE TERMINAL

[Fig. 2]

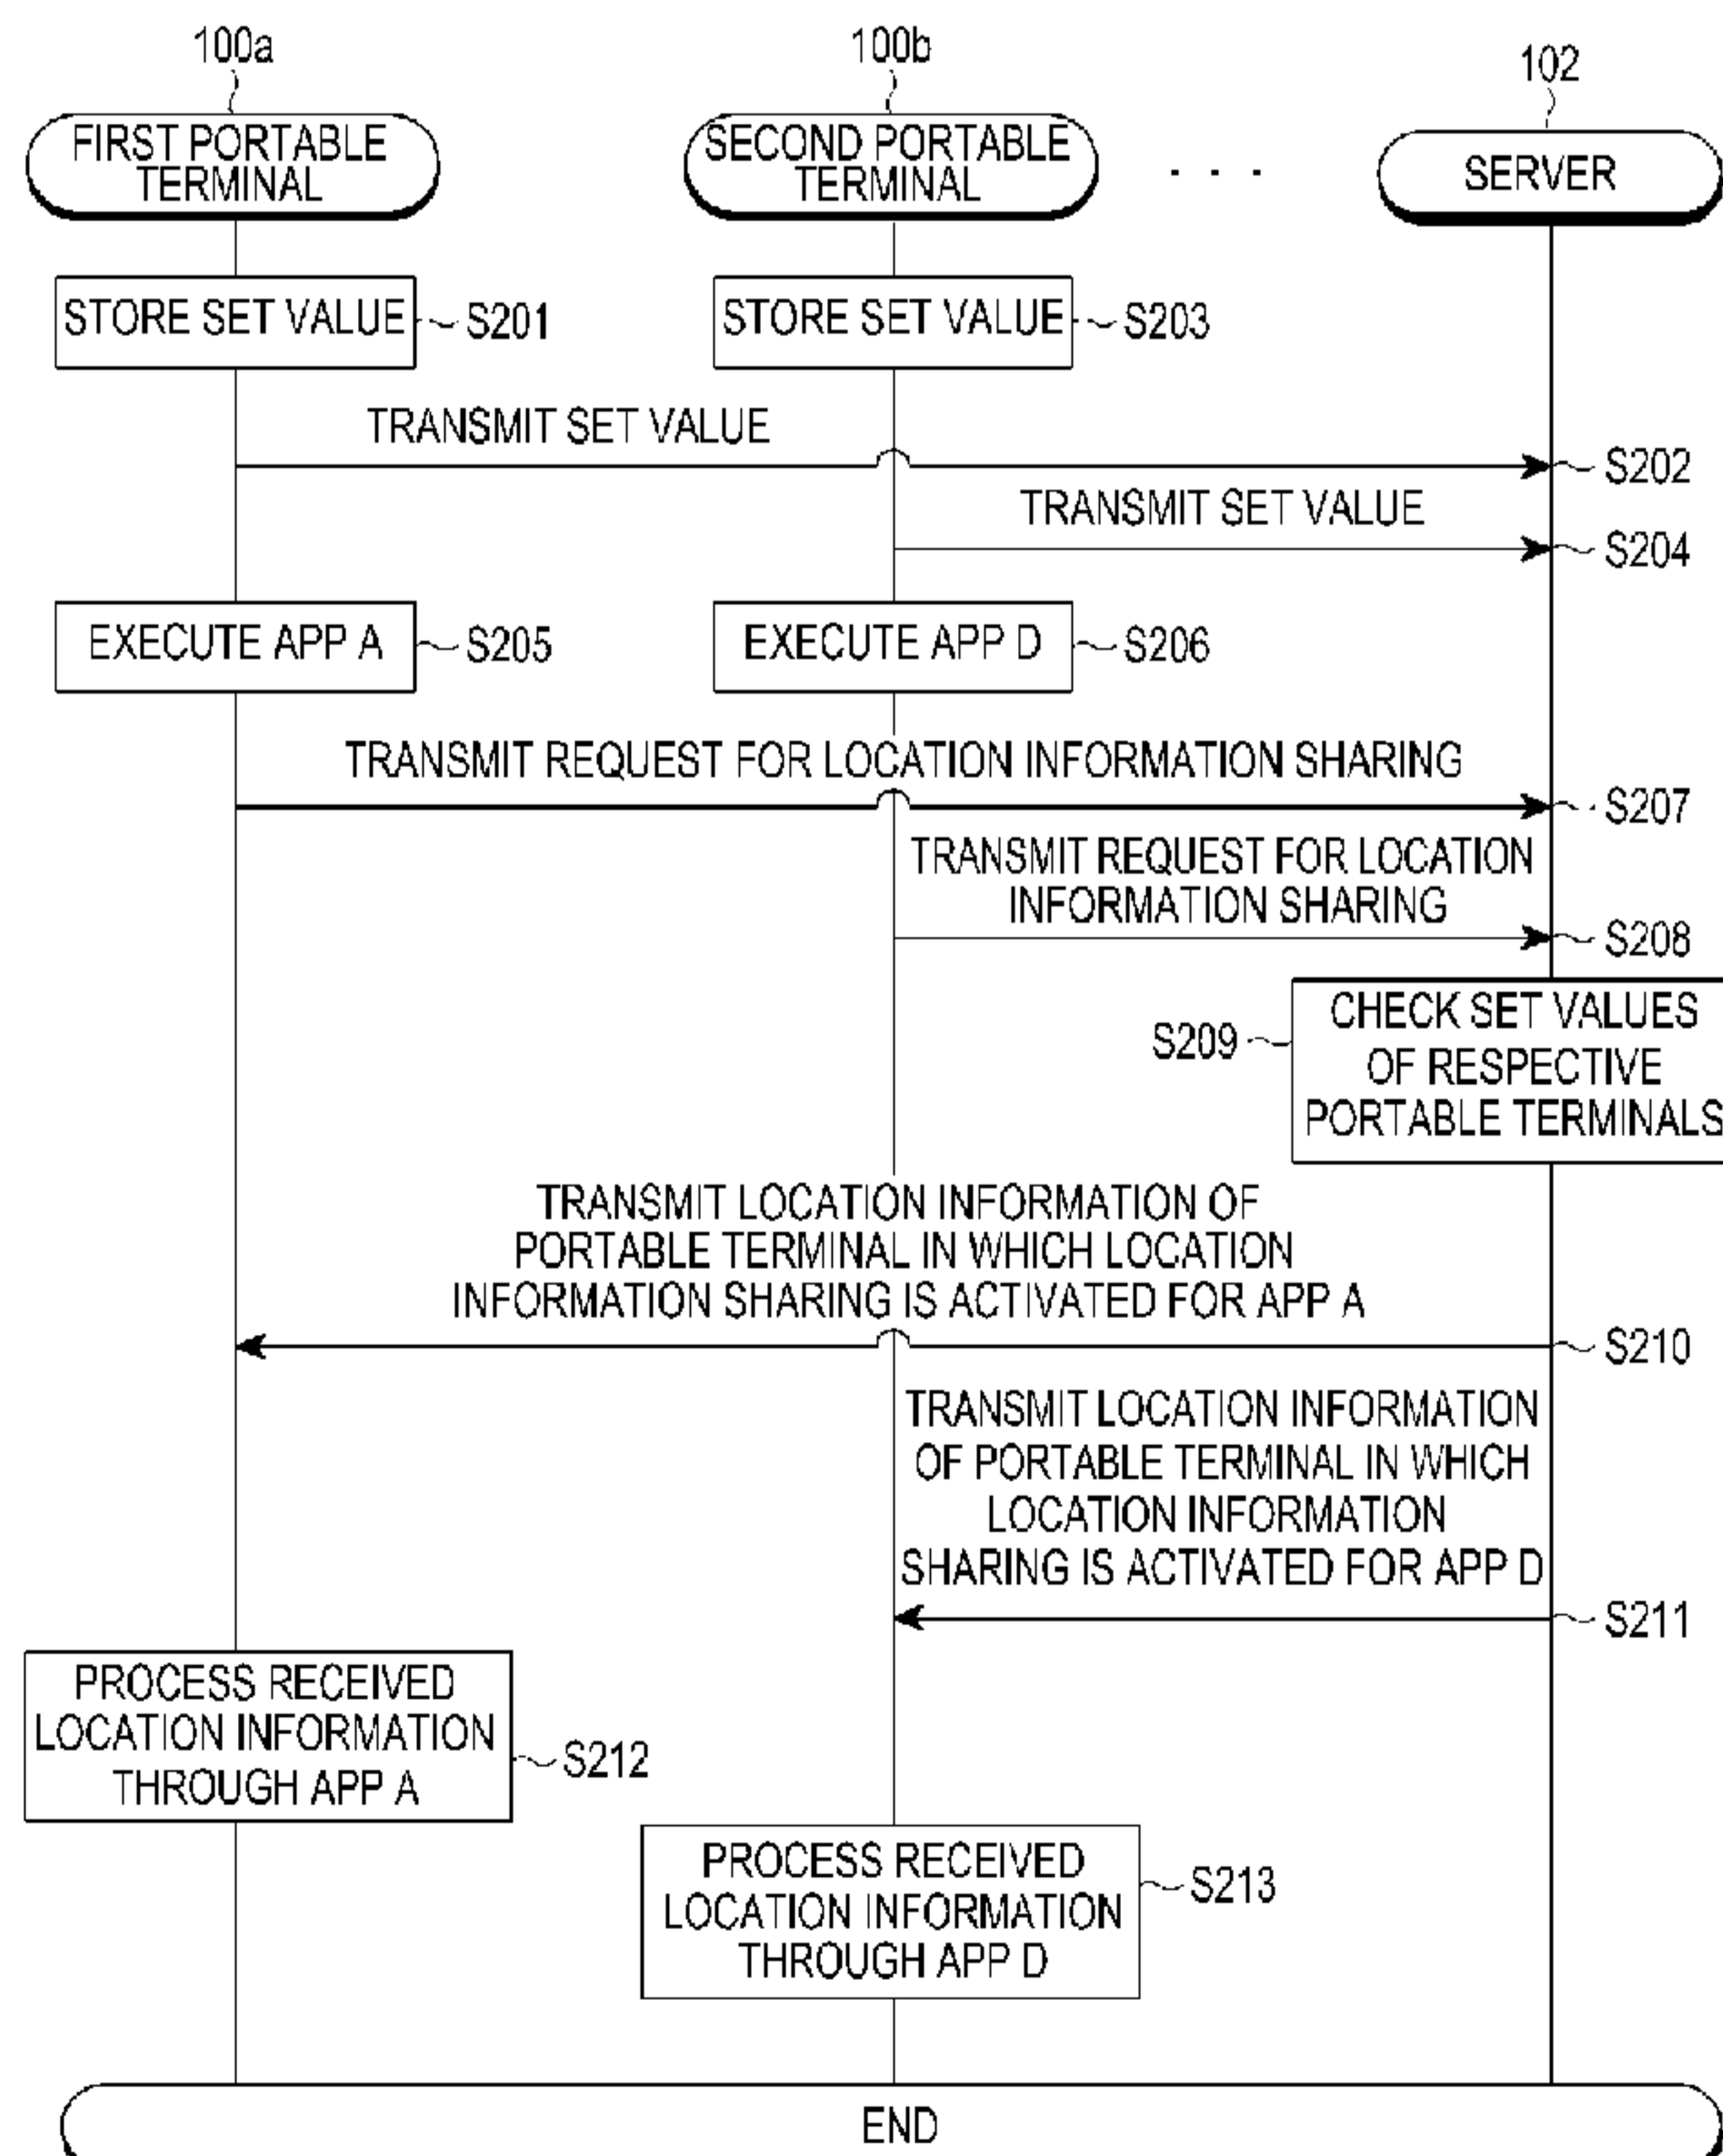

(57) Abstract: Methods, apparatus and a system are provided for sharing and using location information in a portable terminal. A setting indicating whether location information sharing is activated is received for each application of the portable terminal that uses location information. The settings are transmitted to a server. An application for which location information sharing is activated is executed. A request for sharing of location information with respect to the executed application is transmitted to the server. Location information of a portable terminal in which location-information sharing is activated for the executed application is received from the server. The received location information is processed through the executed application.

WO 2012/144833 A3



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

(88) Date of publication of the international search report:
10 January 2013

Published:

— *with international search report (Art. 21(3))*

Description

Title of Invention: METHOD AND SYSTEM FOR SHARING AND USING LOCATION INFORMATION IN PORTABLE TERMINAL

Technical Field

- [1] The present invention relates generally to the use of location information in a portable terminal, and more particularly, although not exclusively, to the sharing of location information between portable terminals and the use of the shared location information.

Background Art

- [2] Portable terminals, such as, for example, smart phones and tablets, include applications that provide various useful functions for users.
- [3] In particular, recently developed portable terminals provide, for example, a Location Based Service (LBS) function that uses a Global Positioning System (GPS) module, or the like.
- [4] There are currently various applications that utilize location information. A user may install a desired application in a portable terminal, and location information may be used through the installed application.

Disclosure of Invention

Technical Problem

- [5] When several applications that use location information are already installed in the portable terminal, the user may set whether the individual applications are permitted to use the location information. Specifically, conventional techniques allow for the separate setting of permission to use location information on application-by-application basis.

Solution to Problem

- [6] According to an aspect of the present invention, a method is provided for sharing and using location information in a portable terminal. A setting indicating whether location information sharing is activated is received for each application of the portable terminal that uses location information. The settings are transmitted to a server. An application for which location information sharing is activated is executed. A request for sharing of location information with respect to the executed application is transmitted to the server. Location information of a portable terminal in which location information sharing is activated for the executed application is received from the server. The received location information is processed through the executed application.

- [7] According to another aspect of the present invention, a system is provided for sharing and using location information in a portable terminal. The system includes a portable terminal for receiving, for each application of the portable terminal, a corresponding setting indicating whether location information sharing is activated, and transmitting the settings to a server. The system also includes a server for, when the portable terminal requests sharing of location information after executing an application, transmitting location information of a portable terminal in which location-information sharing is activated for the executed application to the portable terminal.
- [8] According to an additional aspect of the present invention, a method is provided for sharing location information in a server. The server receives, from a plurality of portable terminals, settings indicating whether location-information sharing is activated for each application of the plurality of portable terminals that uses location information. A request is received for sharing of location information from a first portable terminal of the plurality of portable terminals in which an application for which location-information sharing is activated is executed. It is determined whether location-information sharing is activated for the application in any of the plurality of portable terminals. When location-information sharing is activated for the application in a second portable terminal of the plurality of portable terminals, location information of the second portable terminal is transmitted to the first portable terminal.
- [9] According to a further aspect of the present invention, a portable terminal is provided for sharing and using location information. The portable terminal includes an input unit for receiving, for each application of the portable terminal that uses location information, a corresponding setting indicating whether location-information sharing is activated. The portable terminal also includes a transceiver for transmitting, to a server, the settings and a request for sharing of location information with respect to an executed application in which location information sharing is activated, and receiving location information of a portable terminal in which location-information is activated for the executed application. The portable terminal further includes a controller for executing the application, and processing the received location information through the executed application.
- [10] Additionally, according to another aspect of the present invention, a server is provided for sharing location information. The server includes a receiver for receiving, from a plurality of portable terminals, settings indicating whether location-information sharing is activated for each application of the plurality of portable terminals that uses location information, and receiving a request for sharing of location information from a first portable terminal of the plurality of portable terminals in which an application for which location-information sharing is activated is executed. The server also includes a controller for determining whether location-information sharing is activated for the ap-

plication in any of the plurality of portable terminals. The server further includes a transmitter for transmitting location information of a second portable terminal of the plurality of portable terminals to the first portable terminal, when location-information sharing is activated for the application in the second portable terminal.

[11] According to another aspect of the present invention, an article of manufacture is provided for sharing and using location information in a portable terminal. The article of manufacture includes a machine readable medium containing one or more programs which when executed implement the steps of: receiving, for each application of the portable terminal that uses location information, a corresponding setting indicating whether location-information sharing is activated; transmitting the settings to a server; executing an application for which location-information sharing is activated; transmitting a request for sharing of location information to the server with respect to the executed application; receiving, from the server, location information of a portable terminal in which location-information sharing is activated for the executed application; and processing the received location information through the executed application.

[12] Another aspect of the present invention provides a computer program comprising instructions arranged, when executed, to implement a method, system and/or apparatus, in accordance with any one of the above-described aspects. A further aspect provides machine-readable storage storing such a program.

[13] Other aspects, advantages, and salient features of the invention will become apparent to those skilled in the art from the following detailed description, which, taken in conjunction with the annexed drawings, disclose exemplary embodiments of the invention.

Advantageous Effects of Invention

[14] The present invention has been made to address, solve, mitigate or obviate, at least partly, at least one of the problems and/or disadvantages associated with the prior art, including the above problems and/or disadvantages, and to provide at least one of the advantages described below. Accordingly, an aspect of the present invention provides the sharing of location information of a portable terminal and the use of the shared location information.

Brief Description of Drawings

[15] The above and other aspects, and features and advantages of certain exemplary embodiments and aspects of the present invention will be more apparent from the following detailed description when taken in conjunction with the accompanying drawings, in which:

[16] FIG. 1 is a block diagram illustrating a portable terminal, according to an embodiment of the present invention;

[17] FIG. 2 is a flowchart illustrating a process of sharing location information, according to an embodiment of the present invention;

[18] FIG. 3 is a diagram illustrating a process of sharing location information, according to an embodiment of the present invention; and

[19] FIG. 4 is a diagram illustrating a process of sharing location information, according to an embodiment of the present invention.

Mode for the Invention

[20] Embodiments of the present invention are described in detail with reference to the accompanying drawings to assist in a comprehensive understanding of the present invention, as defined by the claims. The description includes various specific details to assist in that understanding but these are to be regarded as merely exemplary. Accordingly, those of ordinary skill in the art will recognize that various changes and modifications of the embodiments described herein can be made without departing from the scope of the invention. The same or similar components may be designated by the same or similar reference numerals although they are illustrated in different drawings. Detailed descriptions of constructions or processes known in the art may be omitted to avoid obscuring the subject matter of the present invention.

[21] The terms and words used in the following description and claims are not limited to the bibliographical meanings, but, are merely used by the inventor to enable a clear and consistent understanding of the invention. Accordingly, it should be apparent to those skilled in the art that the following description of exemplary embodiments of the present invention is provided for illustration purpose only and not for the purpose of limiting the invention as defined by the appended claims.

[22] In accordance with an embodiment of the present invention, a portable terminal is a mobile electronic apparatus that is easy to carry, including, for example, a video phone, a portable phone, a smart phone, an International Mobile Telecommunication (IMT)-2000 terminal, a Wideband Code Division Multiple Access (WCDMA) terminal, a Universal Mobile Telecommunication Service (UMTS) terminal, a Personal Digital Assistant (PDA), a Portable Multimedia Player (PMP), a Digital Multimedia Broadcasting (DMB) device, an Electronic(E)-book, a portable computer (a notebook, a tablet, etc.), and a digital camera.

[23] Referring initially to FIG. 1, a block diagram illustrates a portable terminal 100, according to an embodiment of the present invention. The portable terminal includes a Radio Frequency (RF) transceiver 23, an audio processor 25, a key input unit 27, a memory 30, a GPS module 40, a display unit 50, and a controller 50.

[24] The RF transceiver 23 includes an RF unit and a modem. The RF unit includes an RF transmitter for up-converting a frequency of a transmission signal and amplifying the

up-converted transmission signal. The RF unit also includes an RF receiver for low-noise-amplifying a received signal and down-converting a frequency of the low-noise-amplified signal. The modem includes a transmitter for encoding and modulating the transmission signal, and a receiver for demodulating and decoding the received signal.

[25] The audio processor 25 constitutes a codec including a data codec and an audio codec. The data codec processes packet data and the audio codec processes audio signals, such as, for example, voice and a multimedia files. The audio processor 25 also converts a digital audio signal received from the modem into an analog audio signal through the audio codec and reproduces the analog audio signal. The audio processor 25 also converts an analog audio signal generated from a microphone (MIC) into a digital audio signal through the audio codec and transmits the digital audio signal to the modem. The codec may be separately provided or may be included in the controller 10.

[26] The key input unit 27 includes keys for inputting numeric and character information, and function keys or a touch pad for setting various functions. When the display unit 50 is implemented with a touch screen of, for example, a capacitive or resistive type, the key input unit 27 includes only preset minimum keys, such that the display unit 50 may replace a part of the key input function of the key input unit 27.

[27] According to an embodiment of the present invention, the key input unit 27 provides functions of executing an application that uses location information and requesting the sharing of location information in the executed application.

[28] The memory 30 includes program and data memories. The program memory stores programs for controlling a general operation of the portable terminal. The memory 30 may include an external memory, such as, for example, a Compact Flash (CF), a Secure Digital (SD), a Micro Secure Digital (Micro-SD), a Mini-SD, an Extreme Digital (xD), a memory stick, or the like. The memory 30 may also include a disk, such as, for example, a Hard Disk Drive (HDD) or a Solid State Disk (SSD).

[29] According to an embodiment of the present invention, the memory 30 stores a set value regarding the sharing of location information of the portable terminal. Once a predetermined application, which provides a Location Based Service (LBS) function via the location information of the portable terminal, is installed, the user is provided with a menu for setting whether use of the location information of the portable terminal is permitted for each installed application. For example, for several applications using location information, the user may set whether use of location information of the portable terminal is permitted for each application, and the setting is stored as a set value in the memory 30. A set value may be in the form of any suitable value, code, string or indicator for indicating whether use of location information of the portable

terminal is permitted for an application.

[30] When a predetermined application for which permission to use and share location information is set is deleted, a set value is updated by deleting a setting corresponding to the removed application from the set value, and the updated set value is stored in the memory 30. When the set value is changed (e.g., updated), the changed set value is promptly transmitted to a server within a predetermined time.

[31] The GPS module 40 receives a GPS signal for the acquisition of a longitudinal value and a latitudinal value corresponding to a current location of the portable terminal. These values provide location information regarding the current location of the portable terminal. The GPS module 40 may be replaced or used together with a separate or integrated hardware or software module capable of providing location information of the portable terminal using any suitable technique other than GPS, many examples of which will occur readily to the skilled person. For example, in an embodiment of the present invention, the function of providing the location information by the GPS module 40 may be replaced or be used together with a positioning function or module that uses a triangulation based on an interworking between the RF transceiver 23 and base stations.

[32] The display unit 50 includes a Liquid Crystal Display (LCD), or an Organic Light Emitting Diode (OLED), such as, for example, a Passive Matrix OLED (PMOLED) or an Active Matrix OLED (AMOLED). The display unit 50 outputs display information that is generated in the portable terminal. The display unit 50 may be embodied as a touch screen of a capacitive or resistive type, and may operate as an input unit for controlling the portable terminal, together with the key input unit 27.

[33] According to an embodiment of the present invention, the display unit 50 may provide the key input function of executing an application that uses location information via the touch screen. The display unit 50, having the touch screen, may also request the sharing of location information in the executed application.

[34] The controller 10 controls the overall operation of the portable terminal 100, according to an embodiment of the present invention, and switches and controls the operation of the portable terminal according to user input generated through the key input unit 27 or the display unit 50. According to an embodiment of the present invention, the controller 10 receives a setting of whether to share location information for each application that uses the location information. The controller 10 stores the settings as a set value, and transmits the stored set value to the server. The controller 10 requests that the server share location information after execution of a predetermined application. The controller 10 also receives the location information of another portable terminal, for which sharing is activated in association with the executed application, from the server, which has checked the set values of portable

terminals. The controller 10 processes the received location information through the executed application.

[35] Devices, such as a Bluetooth module, a WiFi module, an acceleration sensor, a proximity sensor, a geo-magnetic sensor, a Digital Media Broadcasting (DMB) receiver, may also be included in the portable terminal to provide corresponding functions.

[36] For example, the acceleration sensor senses a motion state of the portable terminal by measuring a dynamic force such as acceleration, vibration, shock, or the like. The acceleration sensor also senses a display direction of the display unit of the portable terminal through the sensed motion state.

[37] The proximity sensor senses a proximity of a part of a user's body to the portable terminal, thereby preventing malfunction of the portable terminal.

[38] The gyroscope observes dynamic motion of the rotating portable terminal and senses a rotating motion along any suitable combination of axis. For example, the gyroscope may observe dynamic motion of the rotating portable terminal and sense a rotating motion along six axes of the portable terminal, such as , up or down, left or right, forward or backward, an X axis, a Y axis, and a Z axis, in association with the acceleration sensor.

[39] A camera module that allows the user to capture a (still or moving) image may also be included in the portable terminal, such that location information acquired by the GPS module 40 at the time of capturing may be inserted into a captured image to allow the user to know later the location where the image is captured.

[40] FIG. 2 is a flowchart illustrating a process of sharing location information, according to an embodiment of the present invention FIG. 2, illustrates operations of a first portable terminal 100a and a second portable terminal 100b While only the first portable terminal 100a and the second portable terminal 100b are described with reference to FIG. 2, embodiments of the present invention can be carried out through any number of portable terminals.

[41] In steps S201 and S203, each of the first portable terminal 100a and the second portable terminal 100b stores a set value related to location-information sharing. In steps S202 and S204, the first portable terminal 100a and the second portable terminal 100b transmit the stored set value to a server 102.

[42] The set values transmitted to the server 102 may be understood with reference to FIG. 3, which illustrates first through fourth set values 310 through 340, according to an embodiment of the present invention.

[43] A first set value 310 corresponds to setting in which a user of the first portable terminal 100a activates location-information sharing for applications A and D and deactivates location-information sharing for applications B and C.

- [44] A second set value 320 corresponds to setting in which a user of the second portable terminal 100b deactivates location-information sharing for the applications A, B, and C, and activates location-information sharing for the application D.
- [45] A third set value 330 corresponds to setting in which a user of a third portable terminal 100c activates location-information sharing for the applications A and B, and deactivates location-information sharing for the applications C and D.
- [46] A fourth set value 340 corresponds to setting in which a user of a fourth portable terminal 100d activates location-information sharing for the application A, and deactivates location-information sharing for the applications B, C, and D.
- [47] As described regarding the set values 310 through 340, a first user of a portable terminal may permit a second user of another portable terminal to check the first user's location through a particular application. For example, the user of the first portable terminal 100a applies the first set value 310 as setting regarding location-information sharing, thereby permitting a users of other portable terminals to check the location information of the user of the first portable terminal 100a by using the applications A and D.
- [48] By activating or deactivating location-information sharing for each application, a user's privacy is protected, and when necessary, location information of the user can be easily determined.
- [49] When the second set value 320 of FIG. 3 is applied, for example, the user of the second portable terminal 100b deactivates location-information sharing, such that users of other portable terminals using the applications A, B, and C cannot determine the location of the user of the second portable terminal 100b, thereby protecting the user's privacy. Assuming that the application D is an application for searching for a person's location, which is used in an authorized organization (e.g., a police station), the user of the second portable terminal 100b permits the user of another portable terminal (e.g., a police officer) to check the location of the user of the second portable terminal 100b through the application D.
- [50] When the server 102 receives the set values from the respective portable terminals (e.g., the portable terminals 100a, 100b, 100c, and 100d shown in FIG. 4), the server 102 stores the received set values in a separate database.
- [51] Referring again to FIG. 2, in steps S205 and S206, a controller of the first portable terminal 100a and a controller of the second portable terminal 100b each execute a pre-determined application that uses location information at the request of the user. In steps S207 and S208, the first portable terminal 100a and the second portable terminal 100b send a request for sharing location information to the server 102.
- [52] The user of the first portable terminal 100a activates location-information sharing for the application A as indicated in the first set value 310 of FIG. 3, executes the ap-

plication A, and requests sharing of location information to determine location information of another portable terminal during use of the application A.

- [53] The user of the second portable terminal 100b activates location-information sharing for the application D as indicated in the second set value 320 of FIG. 3, executes the application D, and requests sharing of location information to determine location information of another portable terminal.
- [54] Users of the third portable terminal 100c and the fourth portable terminal 100d may also request sharing of location information after execution of a predetermined application.
- [55] Thus, if sharing of location information is requested by the user, the controller of the portable terminal transmits predetermined data to the server 102 to request sharing of location information from the server 102.
- [56] When transmitting the data related to the request for sharing of location information to the server 102, the controller may also transmit location information of the requesting portable terminal (e.g., the current location of the requesting portable terminal) to the server 102. The controller of the requesting portable terminal may also transmit identification information of an application related to the request for sharing of location information to the server 102.
- [57] For example, if sharing of location information is requested by the user after execution of the application A, the controller of the first portable terminal may transmit the location information of the first portable terminal, the identification information of the application A, and the data related to the request for sharing of location information to the server 102. The server 102 may confirm that sharing of location information is requested, check the location of the portable terminal that requested sharing of location information, and check a type of the application that was executed and will use the location information.
- [58] In step S209, the server 102 checks the set values acquired from the respective portable terminals. In step S210, the server 102 transmits location information of a portable terminal for which location-information sharing is activated for the application in which sharing of location information is requested by the first portable terminal 100a, to the first portable terminal 100a. In step S211, the server 102 transmits location information of a portable terminal for which location-information sharing is activated for an application in which sharing of location information is requested by the second portable terminal 100b, to the second portable terminal 100b.
- [59] Referring to FIG. 3, the user of the first portable terminal 100a, which corresponds to the first set value 310, requests sharing of location information after execution of the application A. The user of the second portable terminal 100b, which corresponds to the second set value 320, requests sharing of location information for the application D.

The user of the third portable terminal 100c, which corresponds to the third set value 330, requests sharing of location information for the applications A and B. The user of the fourth portable terminal 100d, which corresponds to the fourth set value 340, requests sharing of location information for the applications B and C.

[60] Therefore, the server 102 checks the set values for the respective portable terminals that are stored in the predetermined database, and recognizes that in response to the request for sharing of location information from the first portable terminal 100a in association with the application A, only location information of the third portable terminal 100c is provided. Thus, the server 102 acquires the location information of the third portable terminal 100c from the third portable terminal 100c (or a separate server), and transmits the location information of the third portable terminal 100c to the first portable terminal 100a.

[61] Likewise, the server 102 recognizes that in response to the request for sharing of location information from the second portable terminal 100b in association with the application D, only location information of the first portable terminal 100a and the fourth portable terminal 100d are provided. The server 102 then transmits the location information of the first portable terminal 100a and the location information of the fourth portable terminal 100d to the second portable terminal 100b.

[62] When the third portable terminal 100c requests sharing of location information after execution of the application B, the server 102 transmits the location information of the fourth portable terminal 100d to the third portable terminal 100c.

[63] If the fourth portable terminal 100d requests sharing of location information after execution of the application C, the server 102 may recognize that there is no portable terminal in which location-information sharing is activated for the application C, and may notify so to the fourth portable terminal 100d. When receiving data indicating that there is no portable terminal in which location-information sharing is activated for the application C, the controller of the fourth portable terminal 100d notifies the user through, for example, audible information, visual information, and/or vibration information.

[64] Referring back to FIG. 2, in steps S212 and S213, the controllers of the first and second portable terminals 100a and 100b process the location information of another portable terminal, which has been received in response to the request for sharing of location information, through the corresponding application.

[65] Referring to FIG. 4, the controller of the first portable terminal 100a, after requesting sharing of location-information for the application A, receives the location information of the third portable terminal 100c, which has transmitted the third set value 330 (in which location-information sharing has been activated for the application A), and processes the location information of the third portable terminal (e.g., displays the

location information on a map or screen) through the application A.

[66] Similarly, the controller of the second portable terminal 100b, after requesting sharing of location information for the application D, receives the location information of the first portable terminal 100a, which has transmitted the first set value 310, and the location information of the fourth portable terminal 100d, which has transmitted the fourth set value 340, from the server 102. Thereafter, the controller of the second portable terminal 100b processes the location of the first portable terminal 100a and the location of the fourth portable terminal 100d through the application D.

[67] Although it has been described that once sharing of location information is requested from a portable terminal, the server 102 checks all set values of respective portable terminals, which are stored in the database, such configuration may be changed in additional embodiments of the present invention.

[68] Specifically, when requesting sharing of location information after execution of an application using location information, a portable terminal may transmit information (e.g., a phone number) regarding a particular portable terminal whose location information is desired. The server 102 may check only a set value of the particular portable terminal indicated by the phone number, and then transmit location information of only the particular portable terminal to the requesting portable terminal.

[69] For example, the first portable terminal 100a may also transmit information identifying the third portable terminal 100c (e.g., a phone number of the third portable terminal) when transmitting a request for sharing of location information to the server 102 after execution of the application A. Thus, the server 102 rapidly checks the set value of only the third portable terminal 100c, such that the server 102 recognizes that location-information sharing of the third portable terminal 100c has been activated for the application A, and transmits the location information of the third portable terminal 100c to the first portable terminal 100a.

[70] While it has been described that location-information sharing is requested after execution of an application using location information, execution of the application does not have to precede the requesting of the sharing of location-information because execution of the application needs some amount of execution time.

[71] Therefore, an embodiment of the present invention in which sharing of location-information is requested after execution of the application in steps S205 through S208 of FIG. 2 may be implemented by setting a predetermined menu or inputting a predetermined key for requesting sharing of location-information sharing (as long as location-information sharing can be rapidly requested).

[72] By setting whether to share location information application-by-application, the location information can be used usefully and variously.

[73] It will be appreciated that embodiments of the present invention can be realized in

the form of hardware, software or a combination of hardware and software. Any such software may be stored in the form of volatile or non-volatile storage such as, for example, a storage device like a ROM, whether erasable or rewritable or not, or in the form of memory such as, for example, RAM, memory chips, device or integrated circuits or on an optically or magnetically readable medium such as, for example, a CD, DVD, magnetic disk or magnetic tape or the like. It will be appreciated that the storage devices and storage media are embodiments of machine-readable storage that are suitable for storing a program or programs comprising instructions that, when executed, implement embodiments of the present invention. Accordingly, embodiments provide a program comprising code for implementing apparatus or a method as claimed in any one of the claims of this specification and a machine-readable storage storing such a program. Still further, such programs may be conveyed electronically via any medium such as a communication signal carried over a wired or wireless connection and embodiments suitably encompass the same.

[74] For example, software components including instructions or code for performing the methodologies described herein may be stored in one or more of associated memory devices (e.g., Read Only Memory (ROM), fixed or removable memory) and, when ready to be utilized, loaded in part or in whole (e.g., into Random Access memory (RAM)) and executed by a Central Processing Unit (CPU).

[75] Throughout the description and claims of this specification, the words "comprise" and "contain" and variations of the words, for example "comprising" and "comprises" means "including but not limited to" and is not intended to (and does not) exclude other moieties, additives, components, integers or steps.

[76] Throughout the description and claims of this specification, the singular encompasses the plural unless the context otherwise requires. In particular, where the indefinite article is used, the specification is to be understood as contemplating plurality as well as singularity, unless the context requires otherwise.

[77] Features, integers, characteristics, compounds, chemical moieties or groups described in conjunction with a particular aspect, embodiment or example of the invention are to be understood to be applicable to any other aspect, embodiment or example described herein unless incompatible therewith.

[78] It will be also be appreciated that, throughout the description and claims of this specification, language in the general form of X for Y (where Y is some action, activity or step and X is some means for carrying out that action, activity or step) encompasses means X adapted or arranged specifically, but not exclusively, to do Y.

[79] While the invention has been shown and described with reference to certain embodiments thereof, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the scope of the

invention as defined by the appended claims.


Claims

- [Claim 1] A method for sharing and using location information in a portable terminal, the method comprising the steps of:
receiving, for each application of the portable terminal that uses location information, a corresponding setting indicating whether location-information sharing is activated;
transmitting the settings to a server;
executing an application for which location-information sharing is activated;
transmitting a request for sharing of location information to the server with respect to the executed application;
receiving, from the server, location information of a portable terminal in which location-information sharing is activated for the executed application; and
processing the received location information through the executed application.
- [Claim 2] The method of claim 1, wherein transmitting the request comprises transmitting information relating to a predetermined portable terminal whose location information is desired to the server with the request for sharing of location information.
- [Claim 3] The method of claim 2, wherein receiving the location information comprises receiving the location information of the predetermined portable terminal from the server when location-information sharing is activated for the executed application in the predetermined portable terminal.
- [Claim 4] The method of claim 1, 2 or 3 wherein the settings are stored as a set value and the set value is transmitted to the server.
- [Claim 5] The method of claim 4, further comprising, when an application is deleted, updating the set value by deleting a setting that corresponds to the deleted application.
- [Claim 6] The method of claim 5, further comprising, transmitting the updated set value to the server within a predetermined time, when the set value is updated.
- [Claim 7] The method of any preceding claim, further comprising receiving from the server a notification indicating that there is no portable terminal in which location-information sharing is activated for the executed application.


- [Claim 8] The method of any preceding claim, wherein transmitting the request comprises transmitting identification data identifying the executed application with data related to the request for sharing of location information to the server.
- [Claim 9] The method of claim 8, further comprising transmitting a current location of the portable terminal.
- [Claim 10] A system for sharing and using location information in a portable terminal, the system comprising:
a portable terminal for receiving, for each application of the portable terminal, a corresponding setting indicating whether location information sharing is activated, and transmitting the settings to a server;
and
the server for, when the portable terminal requests sharing of location information after executing an application, transmitting location information of a portable terminal in which location-information sharing is activated for the executed application to the portable terminal.
- [Claim 11] The system of claim 10, wherein the portable terminal executes the application for which location information sharing is activated, and transmits information relating to a predetermined portable terminal whose location information is desired to the server with the request for sharing of location information.
- [Claim 12] The system of claim 11, wherein the server, determines whether location-information sharing is activated for the executed application by checking a set value of the predetermined portable terminal, and transmits the location information of the predetermined portable terminal to the portable terminal when location-information sharing is activated for the executed application in the predetermined portable terminal.
- [Claim 13] The system of claim 10, 11 or 12 wherein the portable terminal receives the location information and processes the location information through the executed application.
- [Claim 14] The system of any of claims 10 to 13, wherein the portable terminal stores the settings as a set value and transmits the set value to the server.
- [Claim 15] The system of claim 14, wherein, when an application is deleted, the portable terminal updates the set value by deleting a setting that corresponds to the deleted application, and transmits the updated set value to the server within a predetermined time.

- [Claim 16] The system of any of claims 10 to 15, wherein the server transmits, to the portable terminal, a notification indicating that there is no portable terminal in which location-information sharing is activated for the executed application.
- [Claim 17] The system of any of claims 10 to 16, wherein the portable terminal transmits identification data identifying the executed application with data related to the request for sharing of location information.
- [Claim 18] The system of claim 17, wherein the portable terminal transmits a current location of the portable terminal together with the identification information and the data related to the request for sharing of location information.

[Fig. 1]

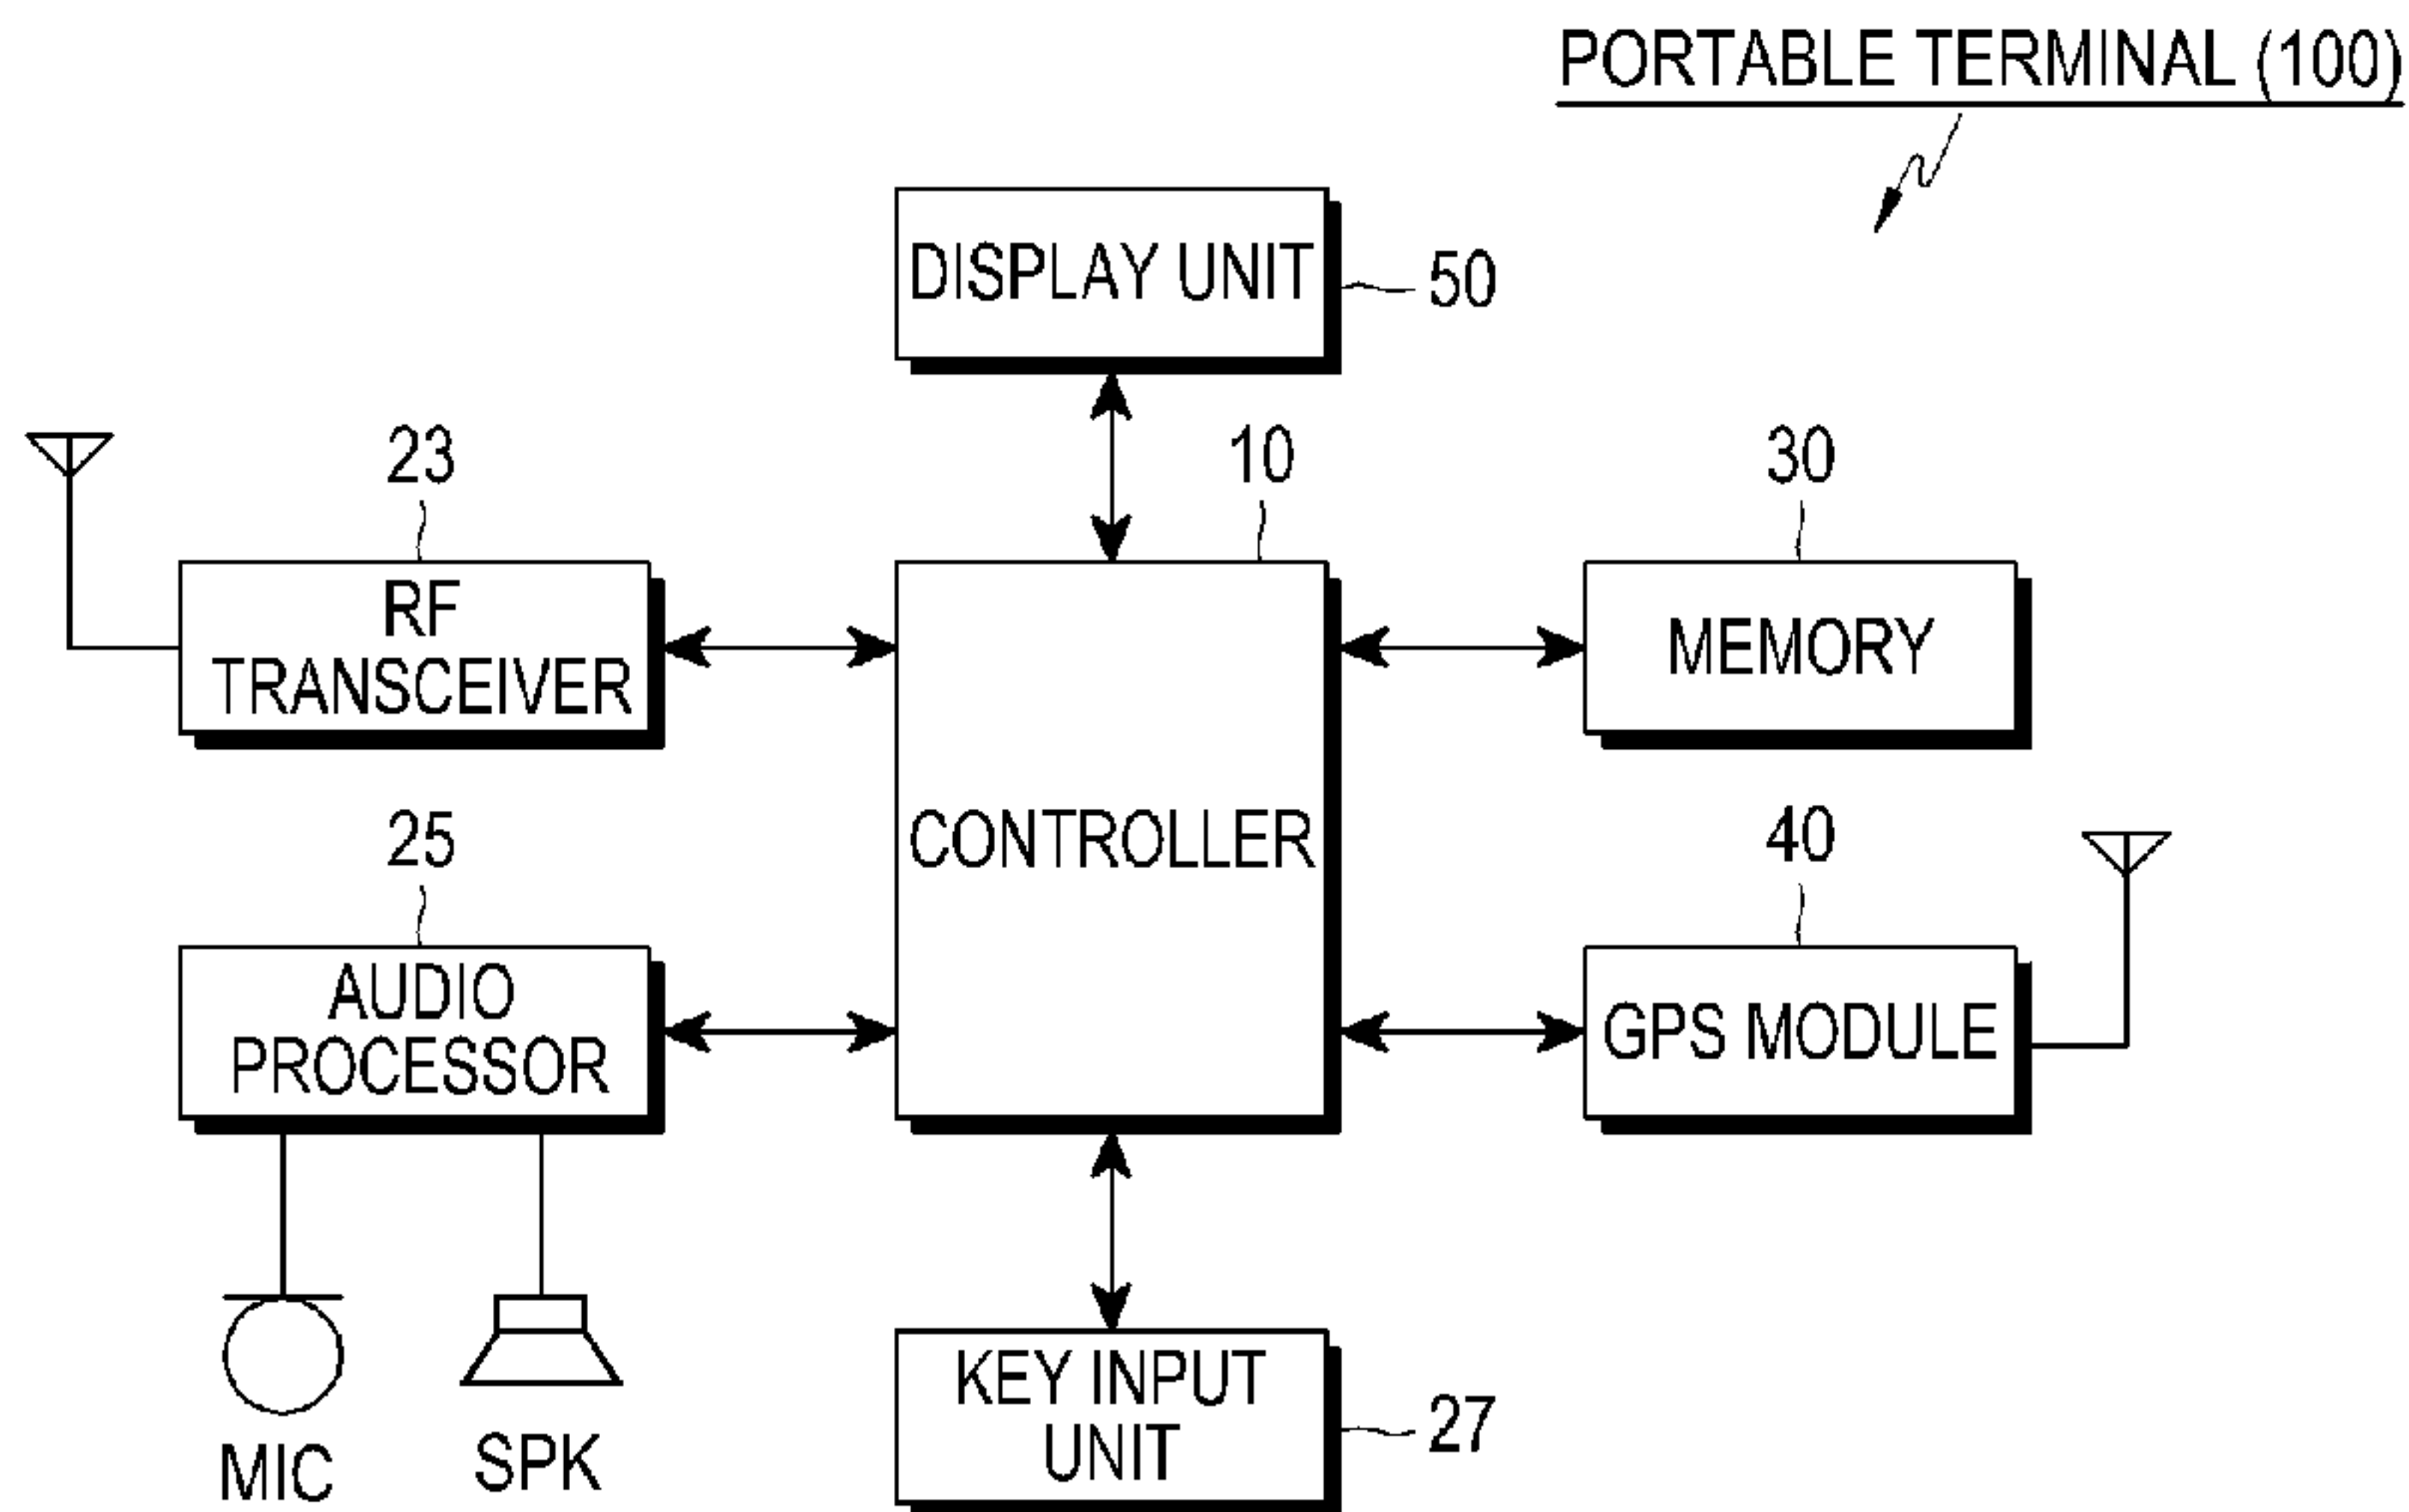


[Fig. 2]

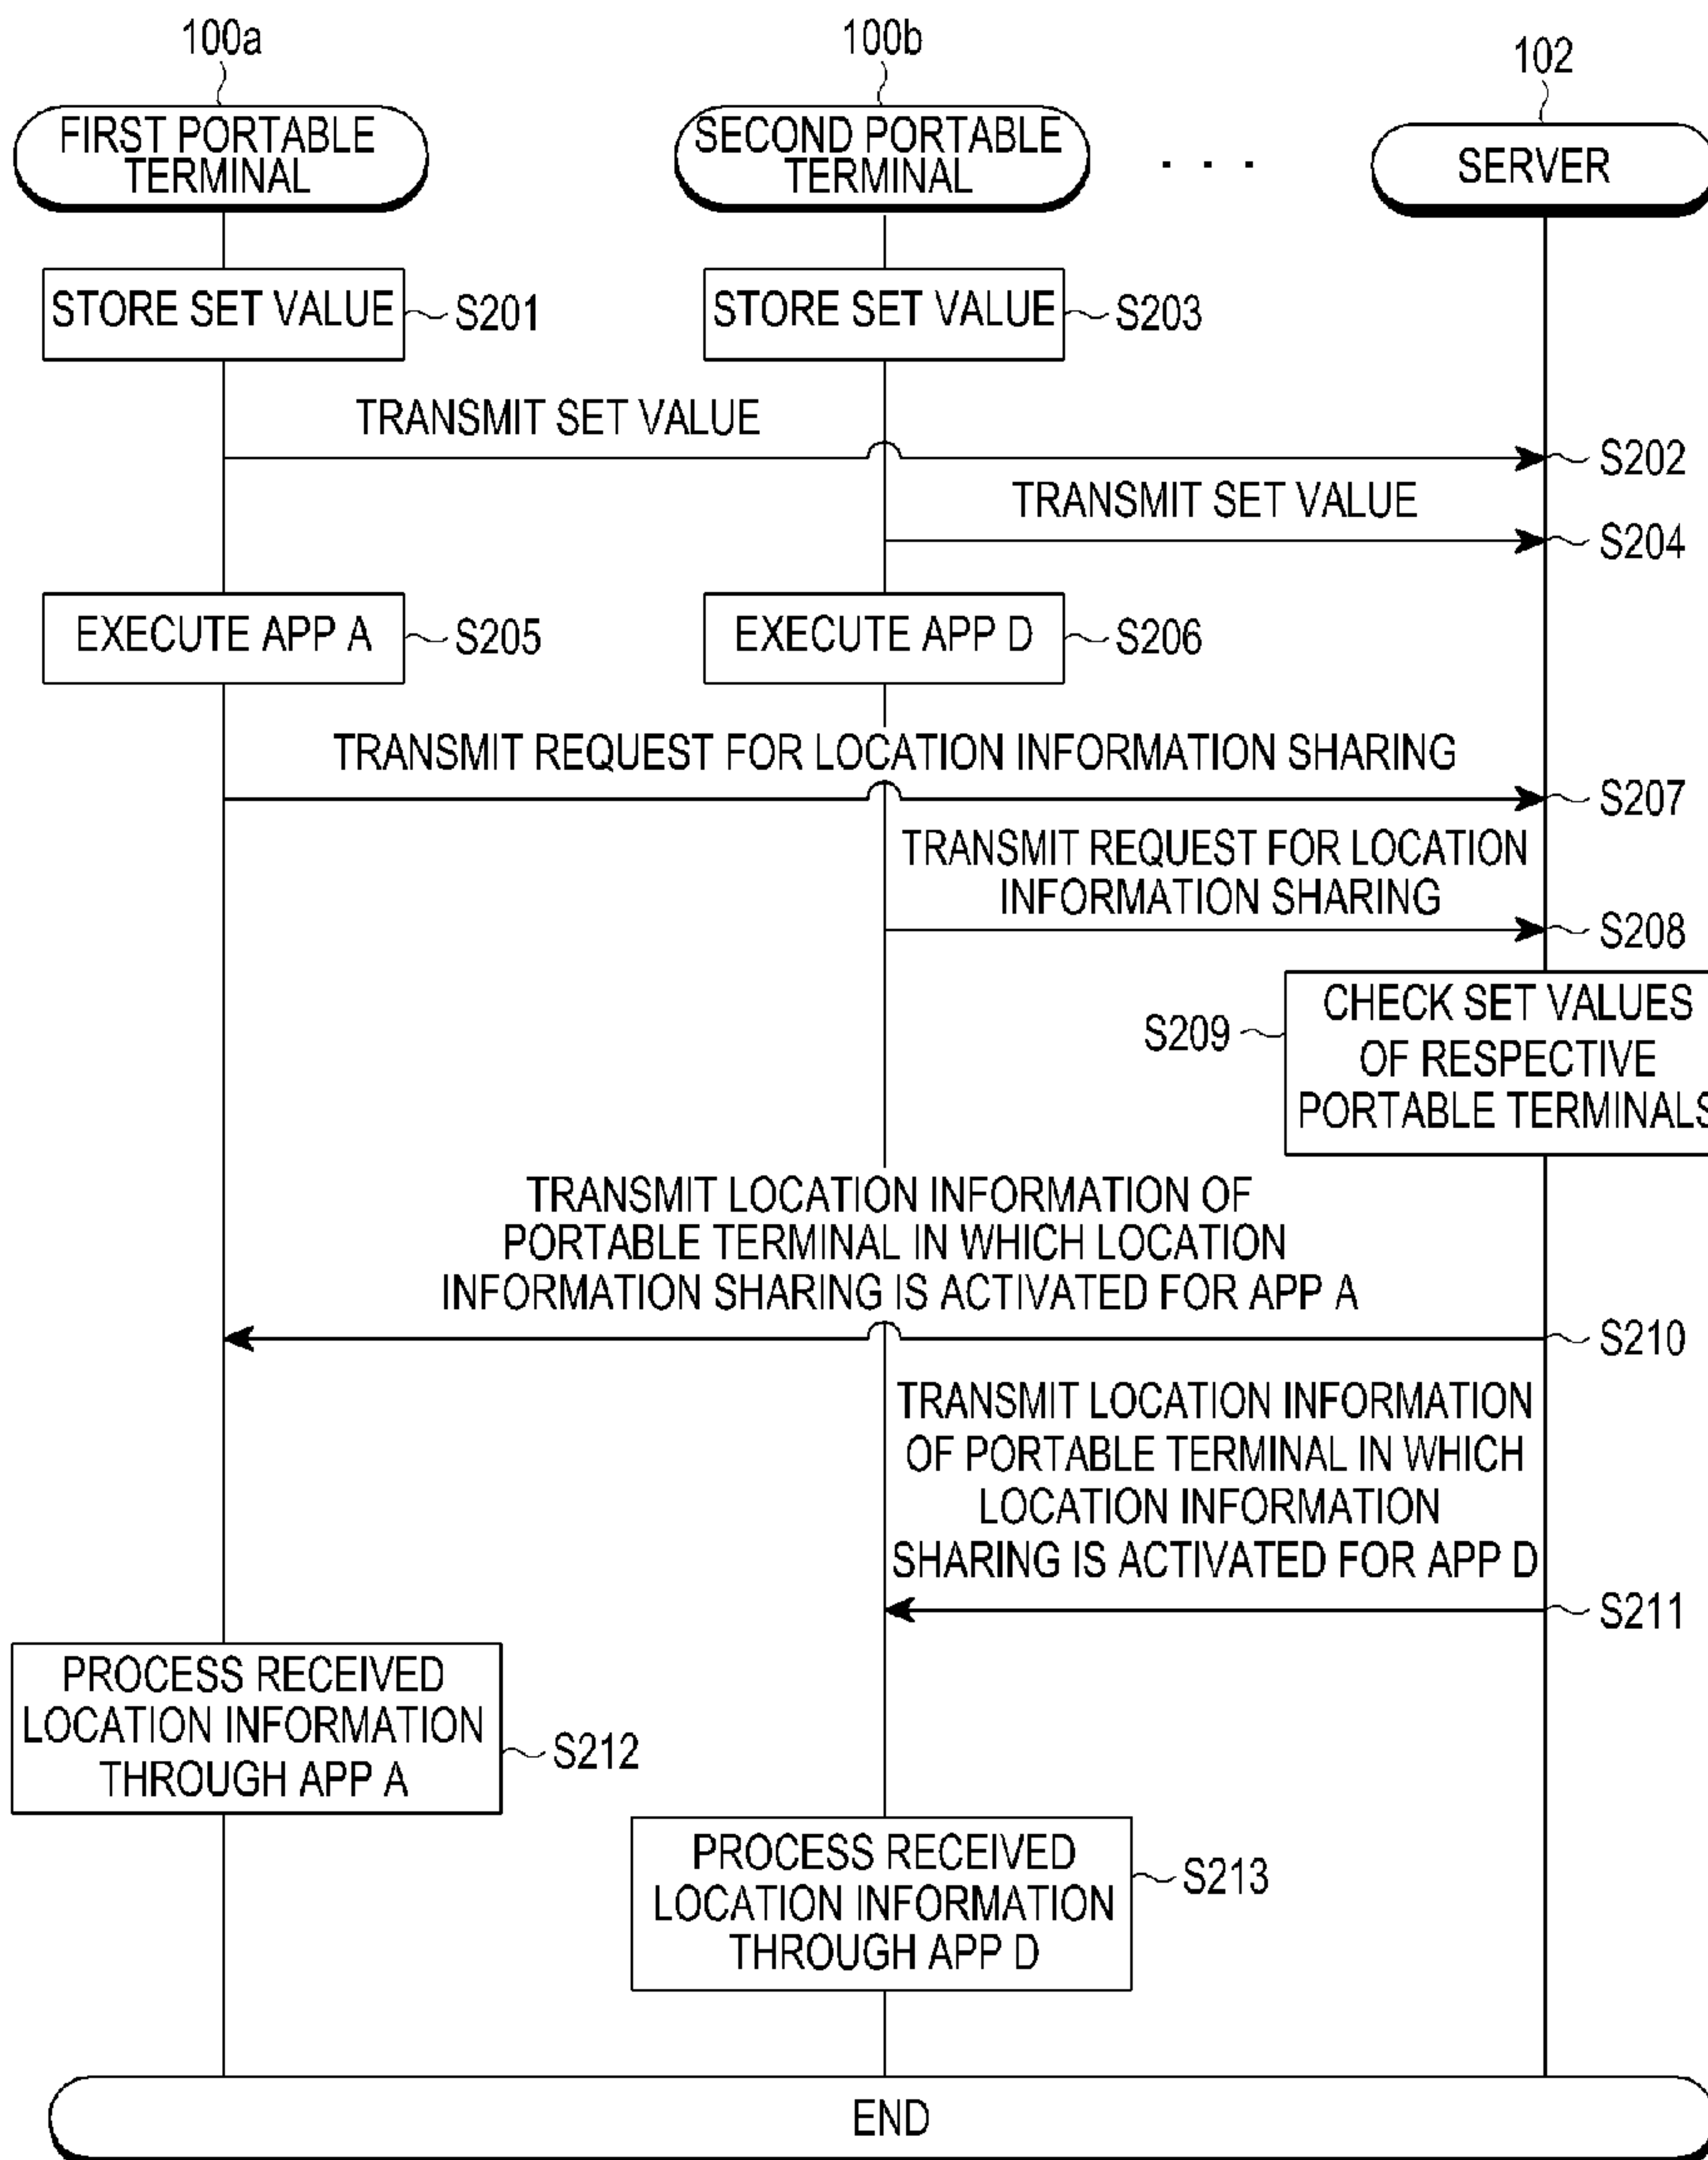

[Fig. 3]

310		320	
FIRST SET VALUE		SECOND SET VALUE	
App A	ON	App A	OFF
App B	OFF	App B	OFF
App C	OFF	App C	OFF
App D	ON	App D	ON
⋮		⋮	
330		340	
THIRD SET VALUE		FOURTH SET VALUE	
App A	ON	App A	OFF
App B	ON	App B	ON
App C	OFF	App C	ON
App D	OFF	App D	ON
⋮		⋮	

[Fig. 4]

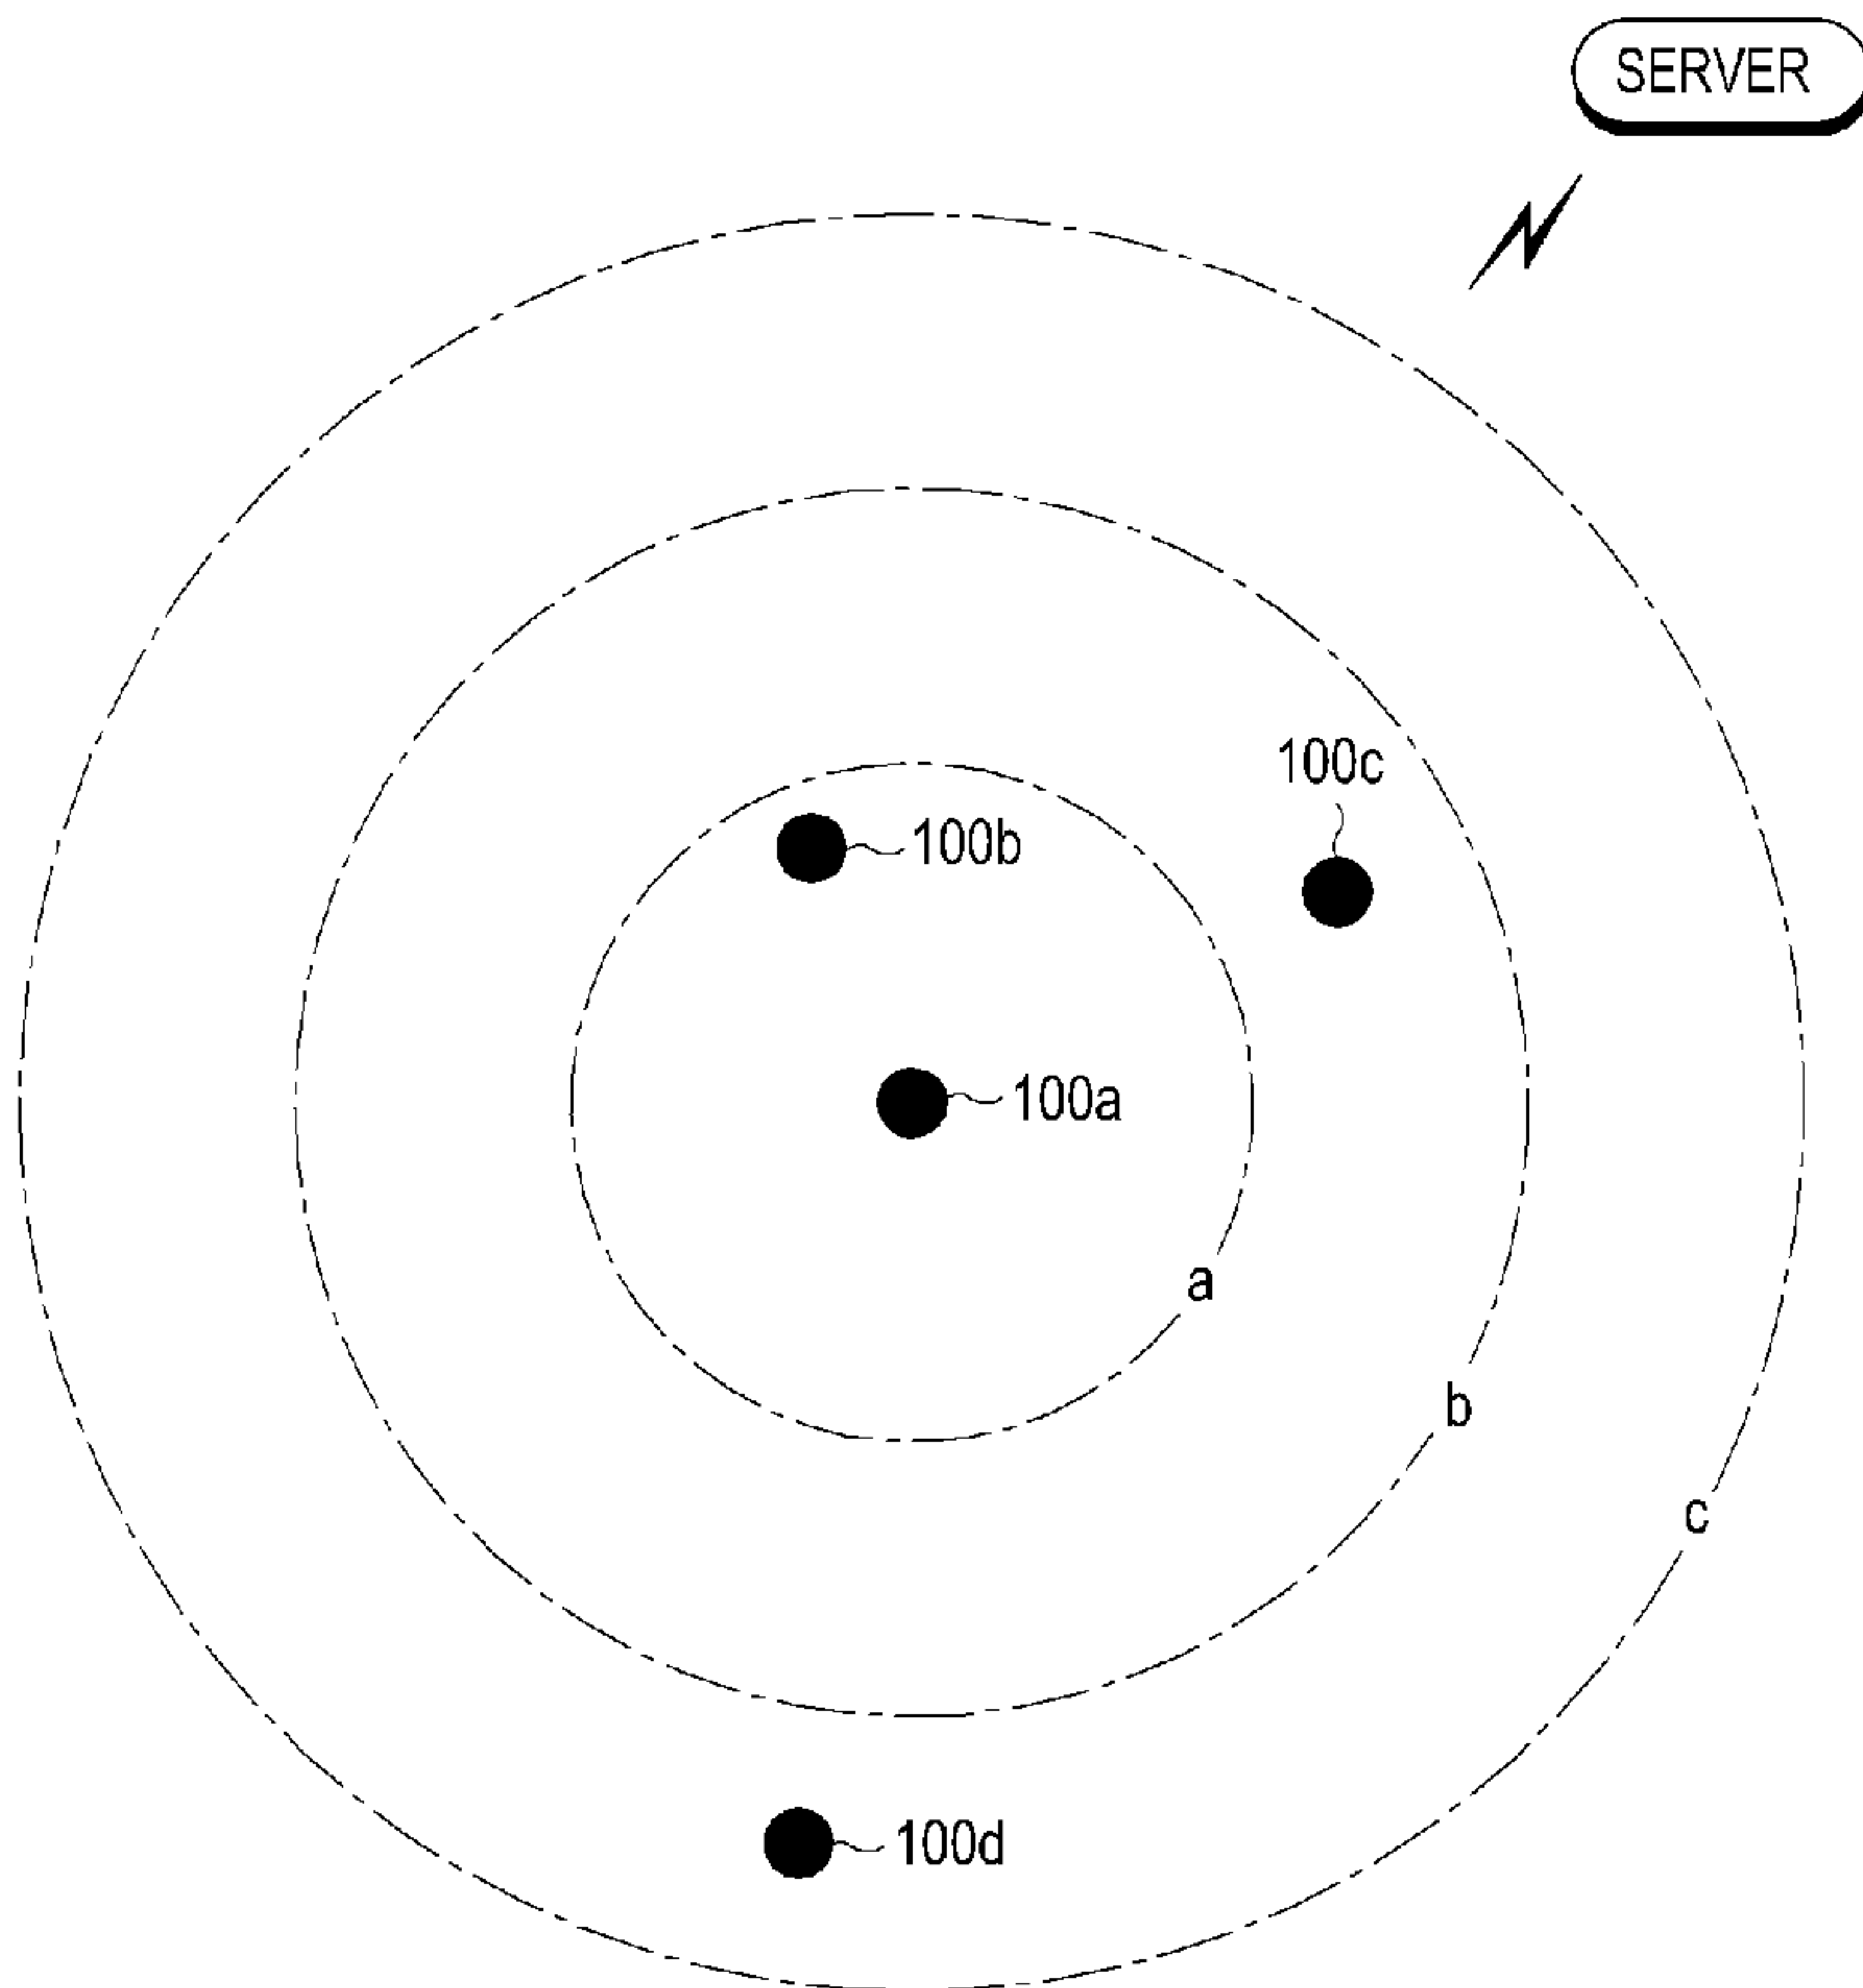

[Fig. 2]

