



US 20170329580A1

(19) **United States**

(12) **Patent Application Publication**
Jann et al.

(10) **Pub. No.: US 2017/0329580 A1**

(43) **Pub. Date: Nov. 16, 2017**

(54) **SMART TEMPLATES FOR USE IN MULTIPLE PLATFORMS**

13, 2016, provisional application No. 62/335,873, filed on May 13, 2016, provisional application No. 62/335,875, filed on May 13, 2016.

(71) Applicant: **SAP SE**, Walldorf (DE)

(30) **Foreign Application Priority Data**

Nov. 16, 2016 (TW) 105217483

(72) Inventors: **Annette Jann**, Heidelberg (DE); **Kai Richter**, Muehlthal (DE); **Tina Rauschenbach**, Mannheim (DE); **Ioannis Grammatikakis**, Maxdorf (DE); **Jan-Michel Blinn**, Osthofen (DE); **Denis Timur**, Mannheim (DE); **Roman Rommel**, Neustadt an der Weinstrasse (DE); **Carlos Martinez Gomez**, Heidelberg (DE); **Janos Varadi**, Ludwigshafen (DE)

Publication Classification

(51) **Int. Cl.**
G06F 9/44 (2006.01)
(52) **U.S. Cl.**
CPC **G06F 8/35** (2013.01)

(21) Appl. No.: **15/461,313**

(57) **ABSTRACT**


(22) Filed: **Mar. 16, 2017**

In one general aspect, a method for creating an enterprise application can include receiving, by a computing device, a selection of a project for creating using a template, receiving, by the computing device, a selection of an application for the project, receiving information for associating with the application, receiving a selection of a data source, receiving a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template, receiving a selection of a data service that utilizes the selected core data service, receiving a selection of an annotated data service, and creating the enterprise application. The creating can be based on the smart template. The creating can utilize the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

Related U.S. Application Data

(60) Provisional application No. 62/335,760, filed on May 13, 2016, provisional application No. 62/335,762, filed on May 13, 2016, provisional application No. 62/335,765, filed on May 13, 2016, provisional application No. 62/335,767, filed on May 13, 2016, provisional application No. 62/335,888, filed on May 13, 2016, provisional application No. 62/335,892, filed on May 13, 2016, provisional application No. 62/335,895, filed on May 13, 2016, provisional application No. 62/335,897, filed on May 13, 2016, provisional application No. 62/335,899, filed on May

400 ↘

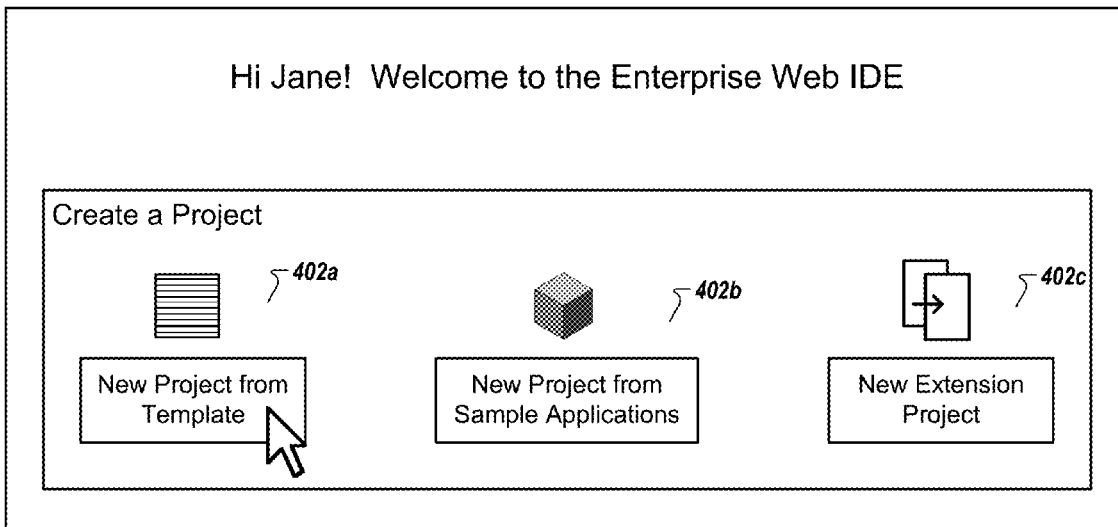

100 ↗

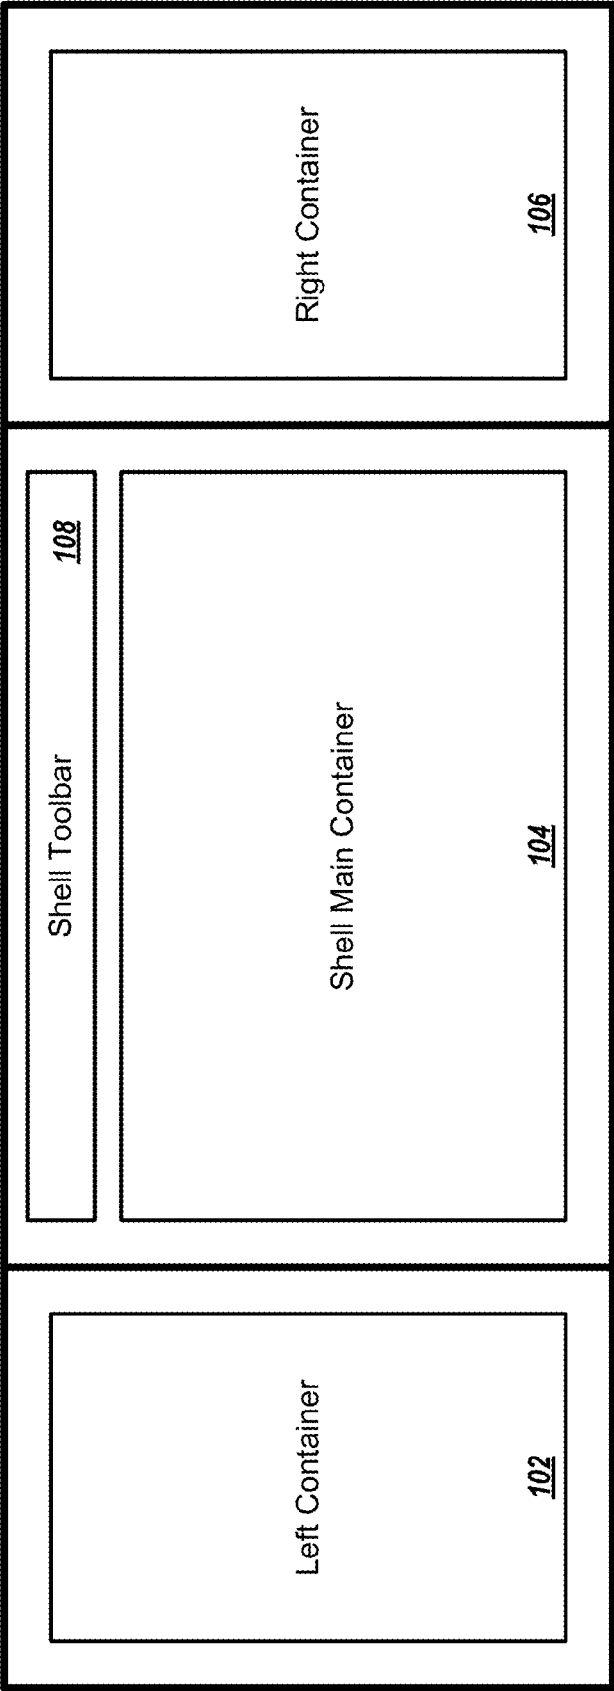


FIG. 1A

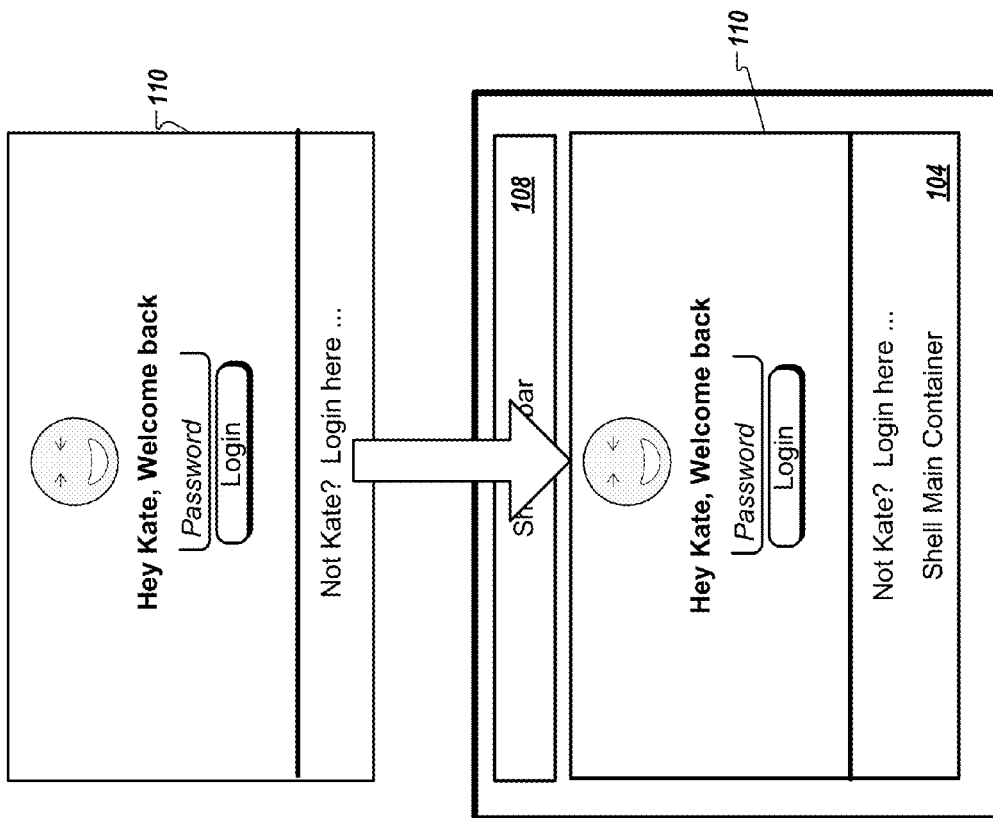


FIG. 1B

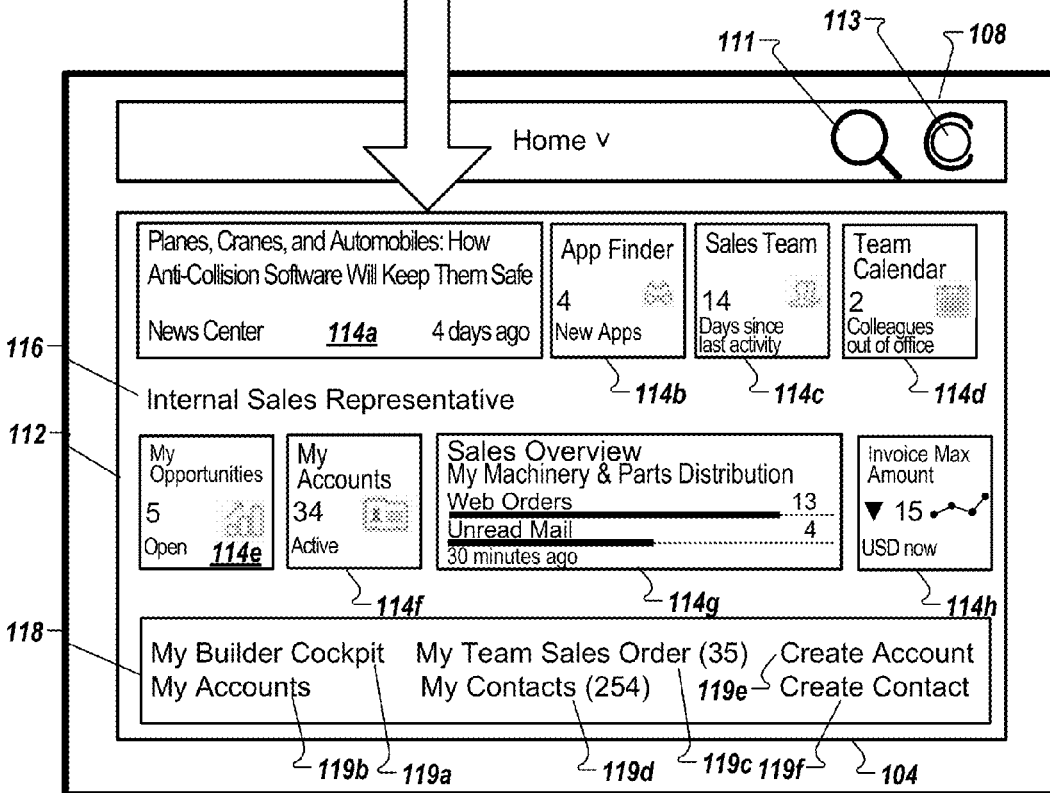
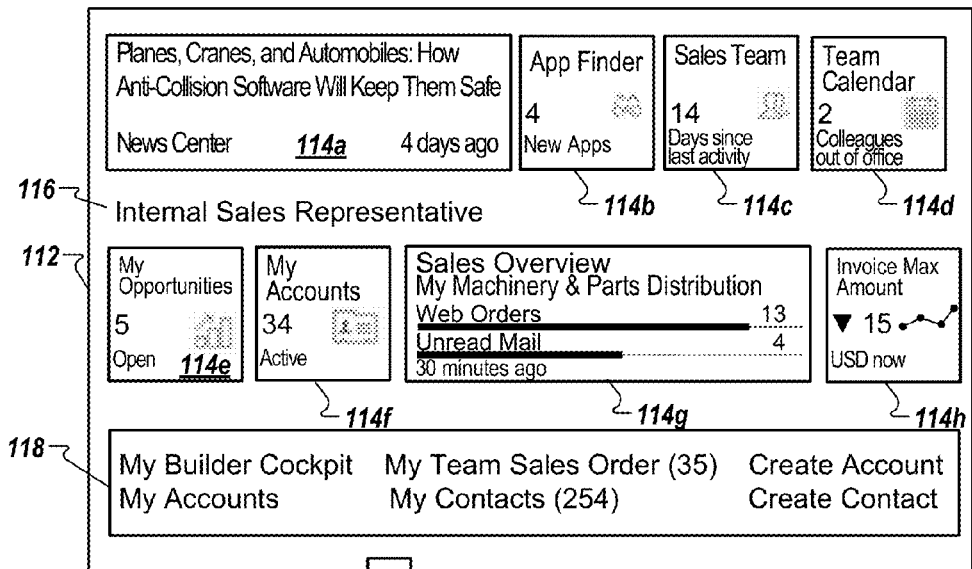


FIG. 1C

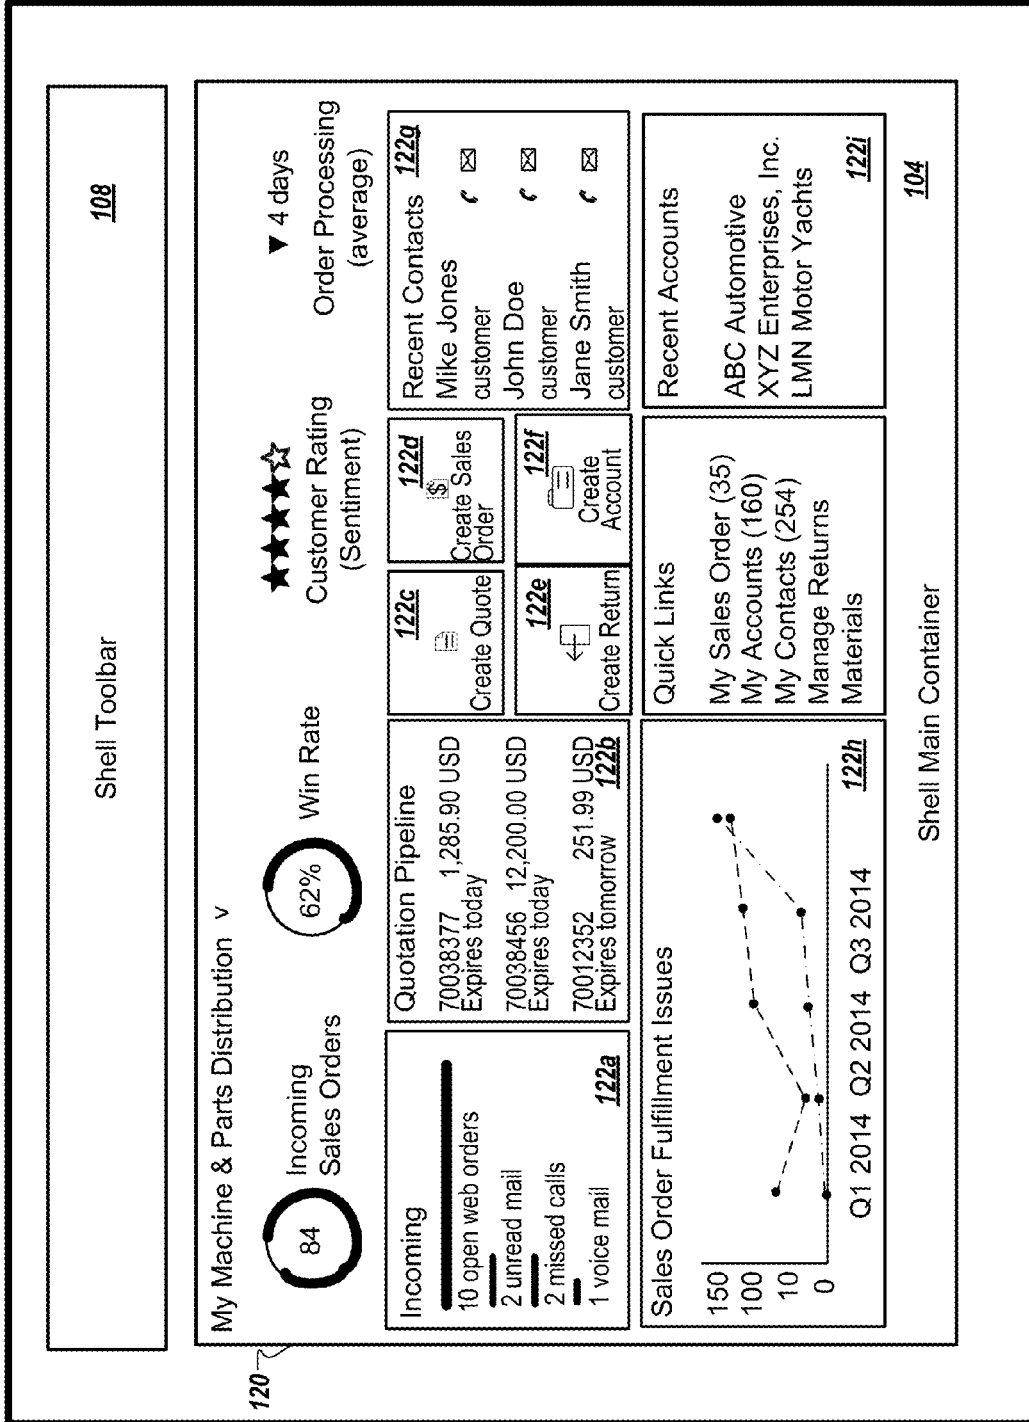


FIG. 1D

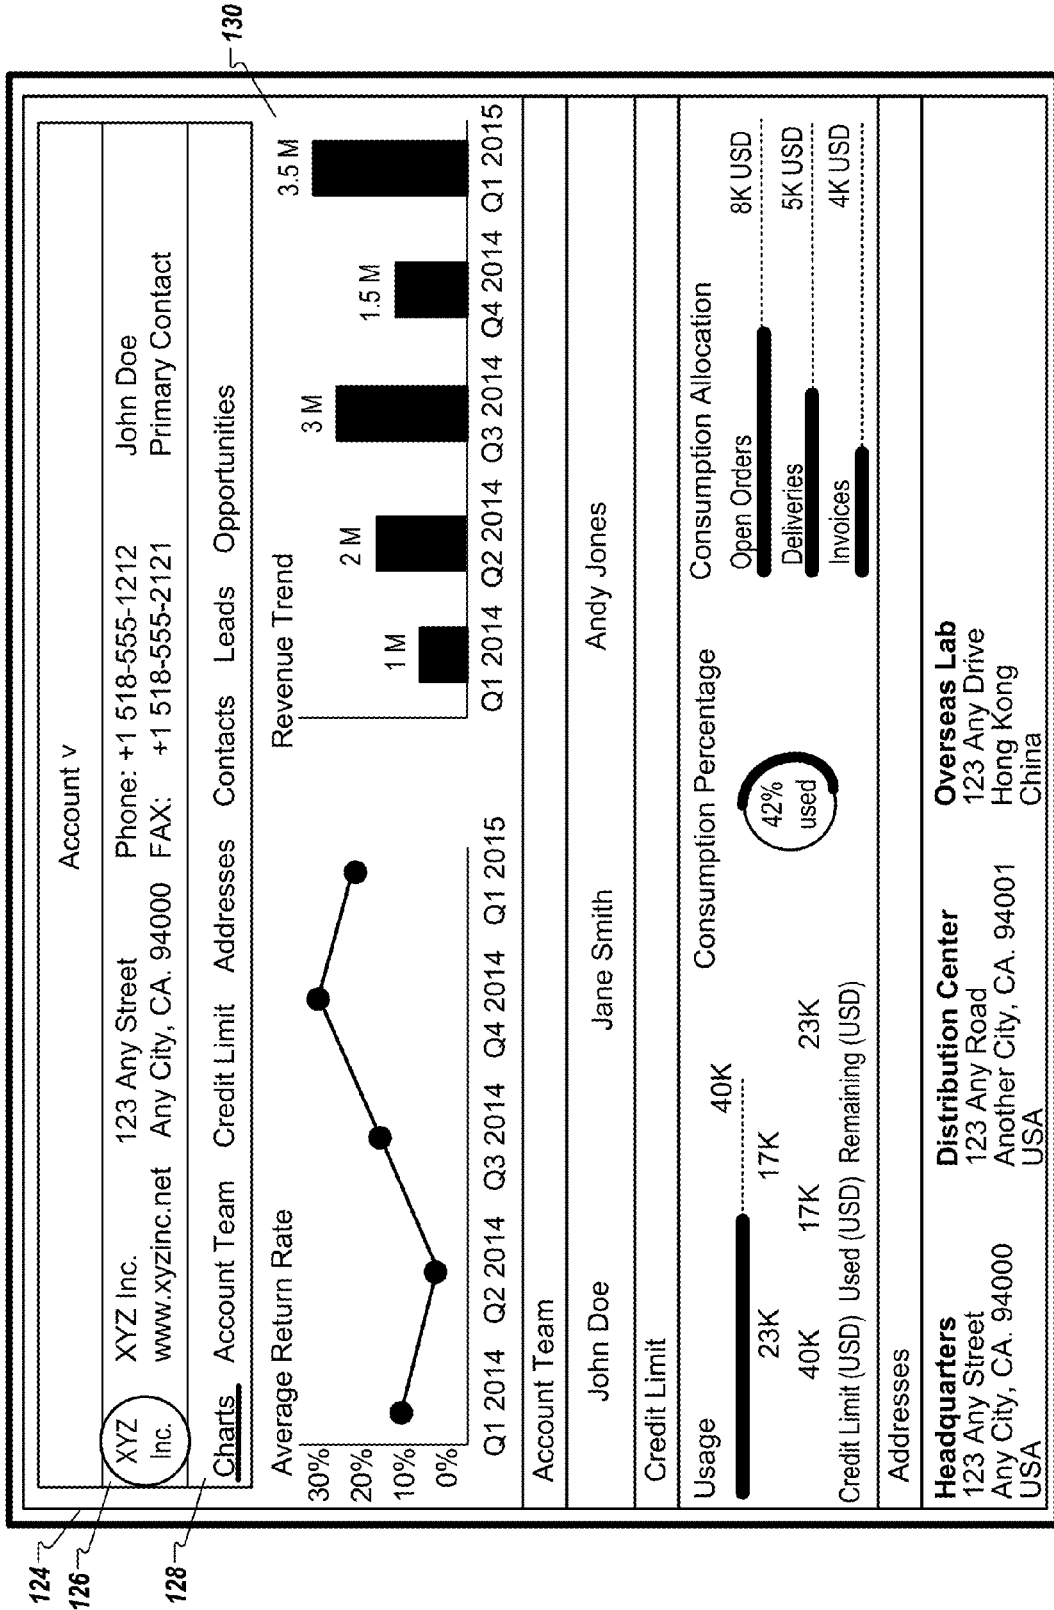


FIG. 1E

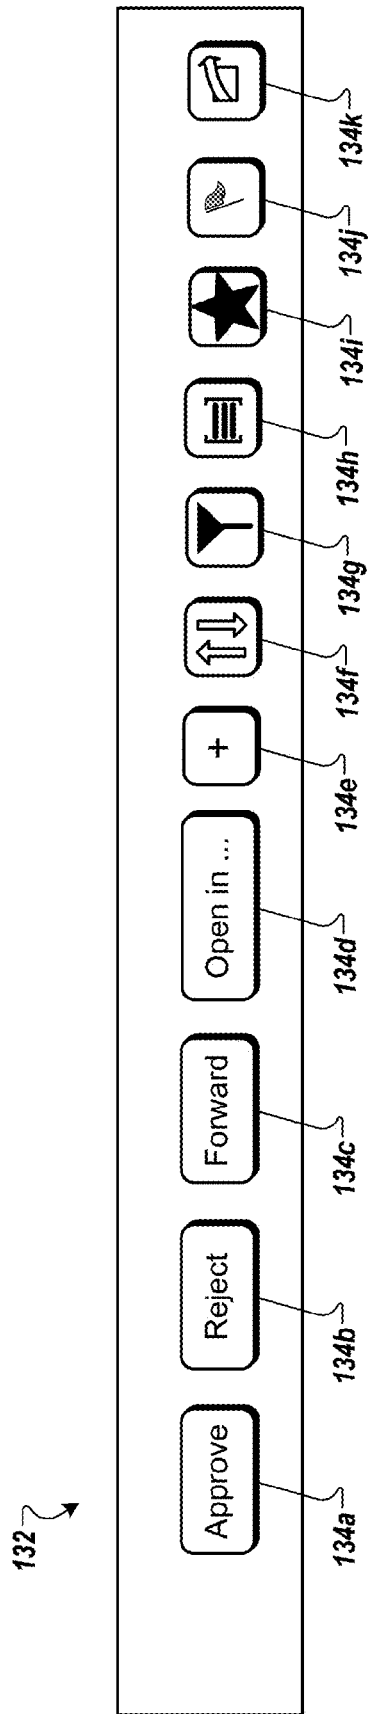


FIG. 1F

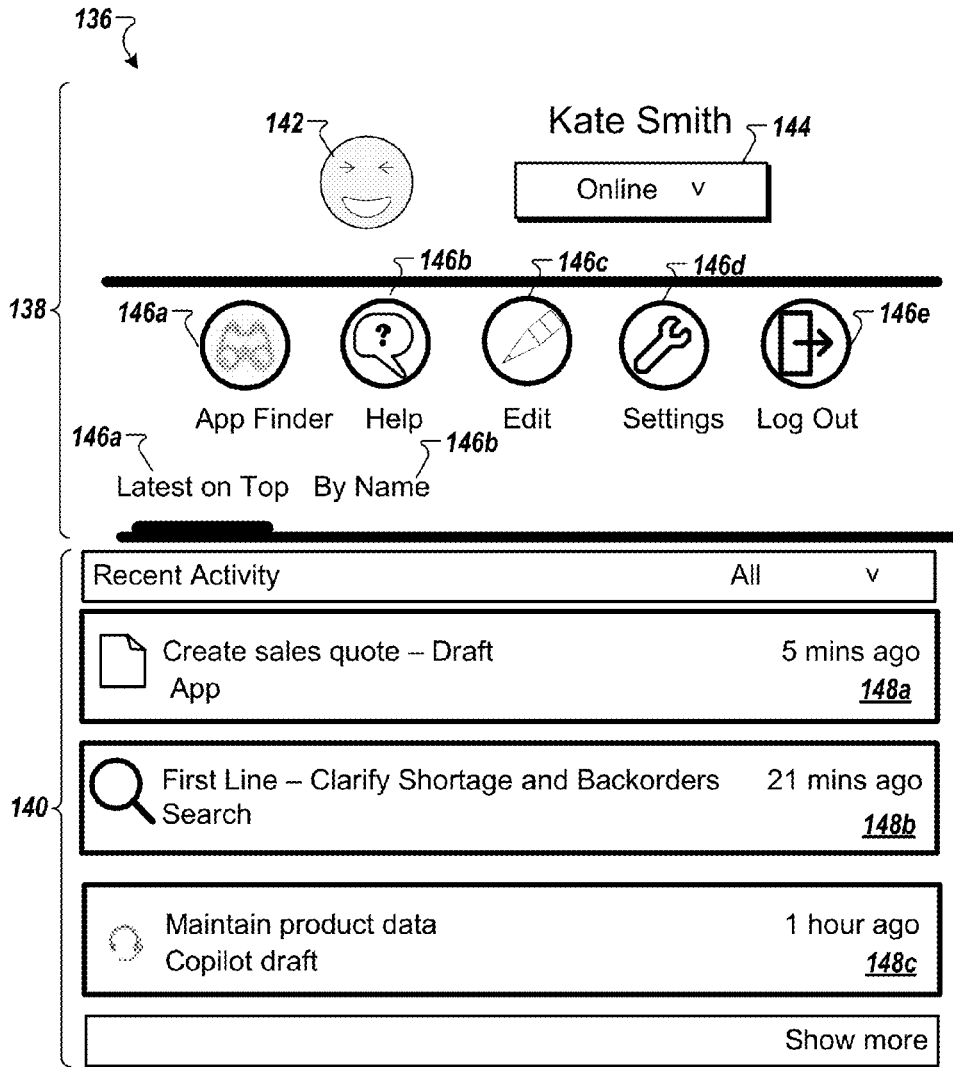


FIG. 1G

150 ↘

Request: Promote Account Classification to "A" Now
ABC Inc. 154a
152a More Info 160a Reject 156a Acknowledge 158a

Request: Approve Sales Quote #126621 2 hrs ago
Items: 3x alpha ... Sum: 7,197.00 USD 154b
152b More Info 160b Reject 156b Acknowledge 158b

Mnemonics "Test Line – Clarify Shortage & Backorders" 6 hrs ago
got updated
Jane Doe added 1 new item 154c
152c

FIG. 1H

162

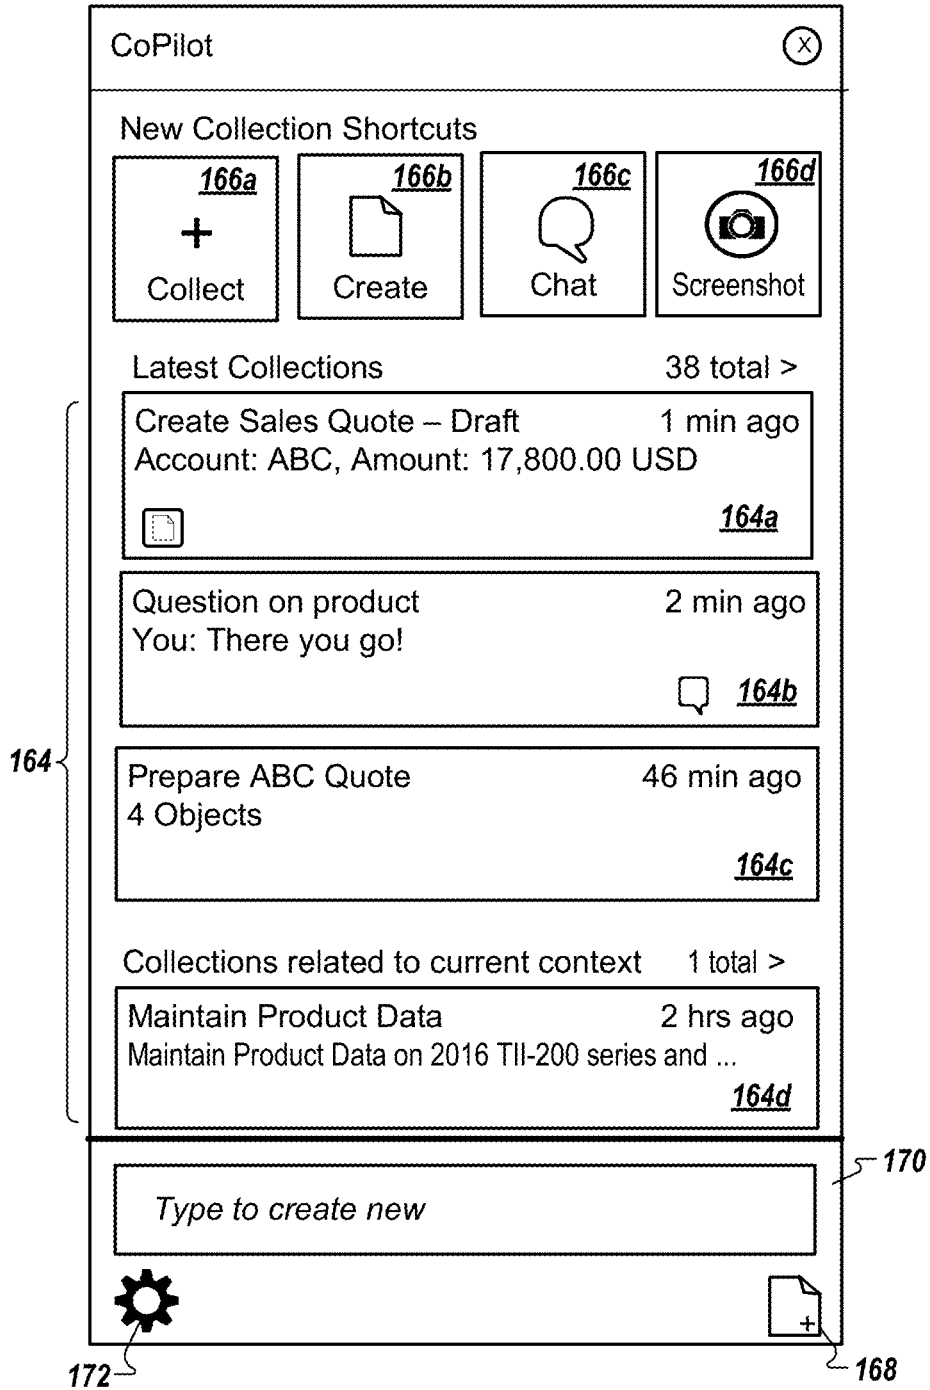


FIG. 11

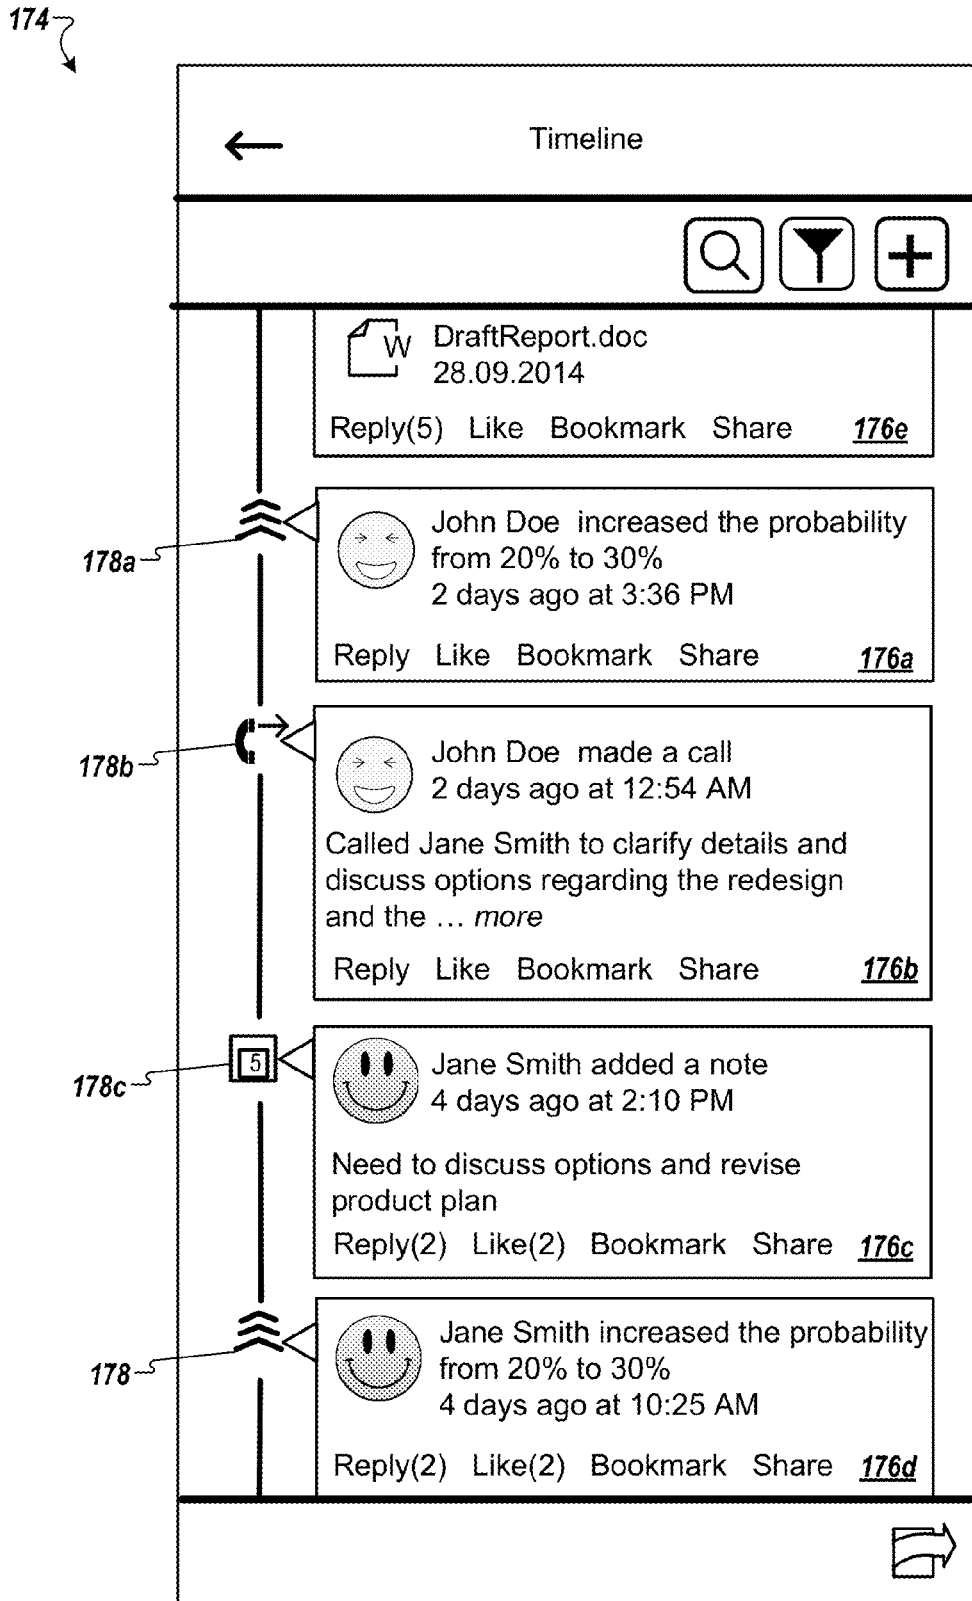


FIG. 1J

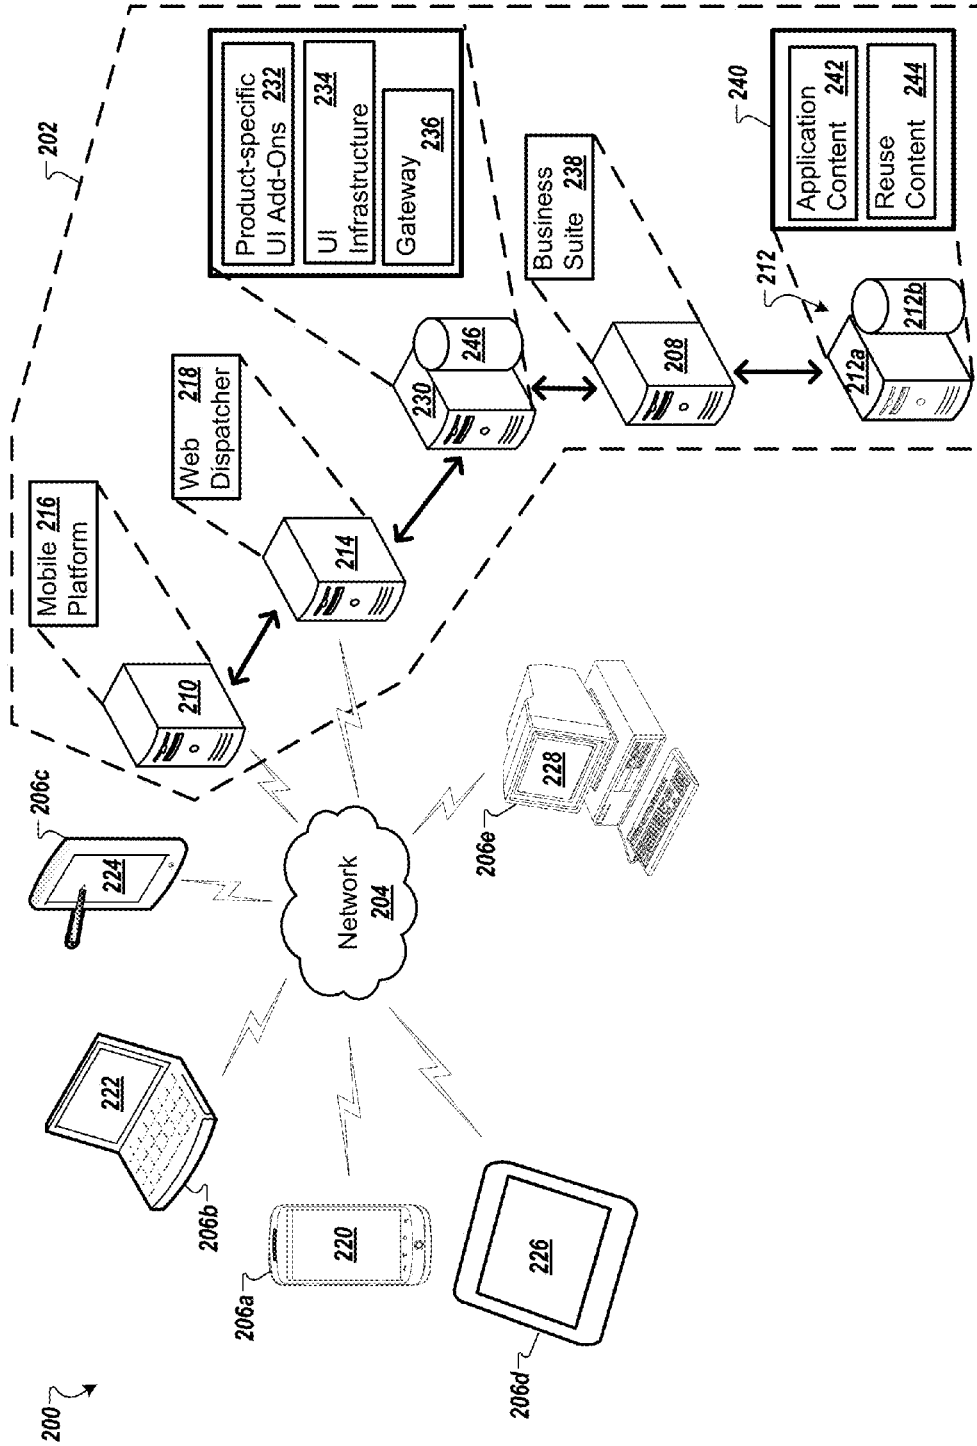


FIG. 2

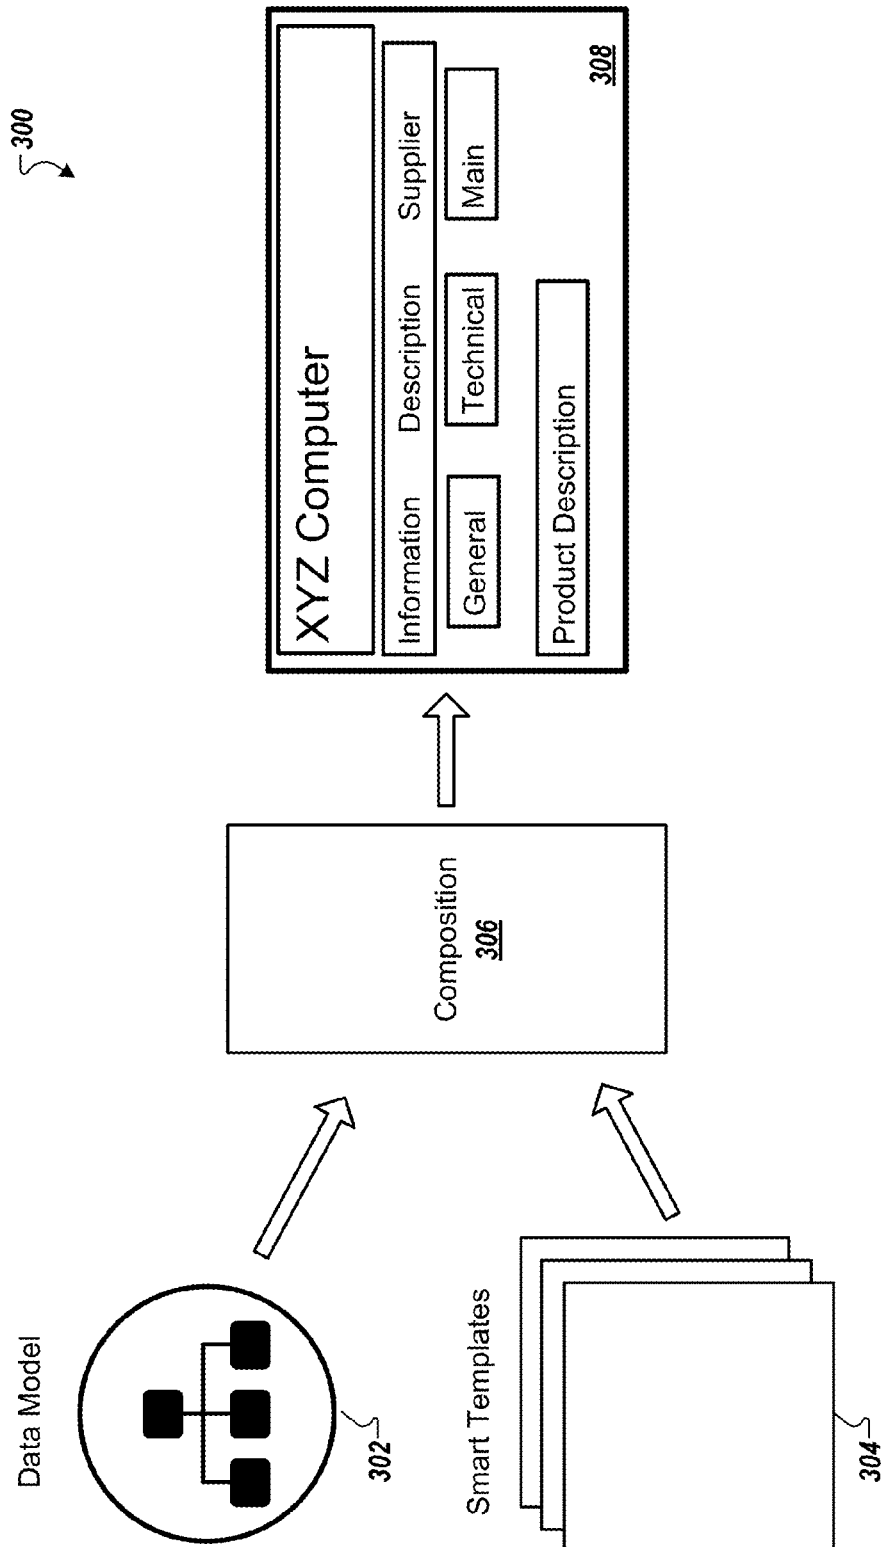


FIG. 3

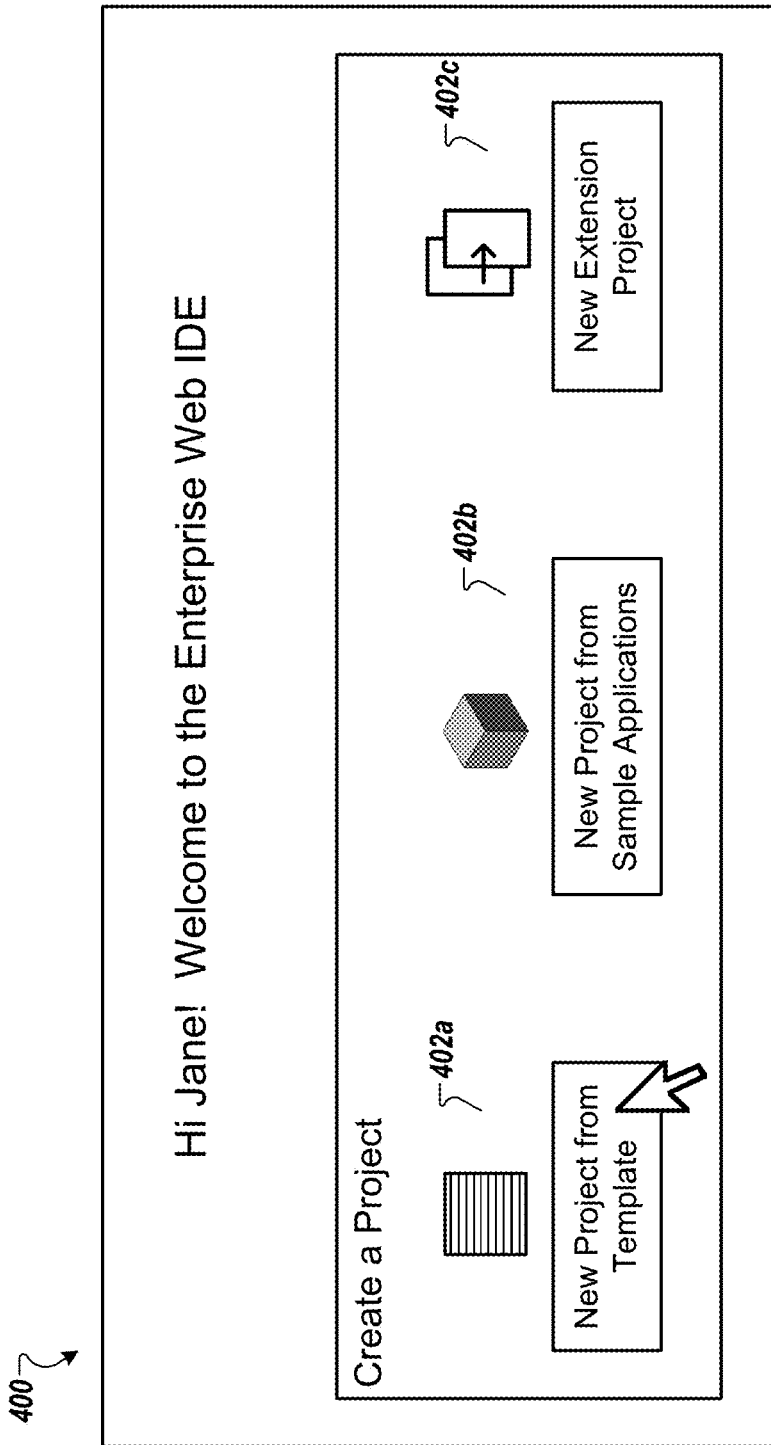


FIG. 4A

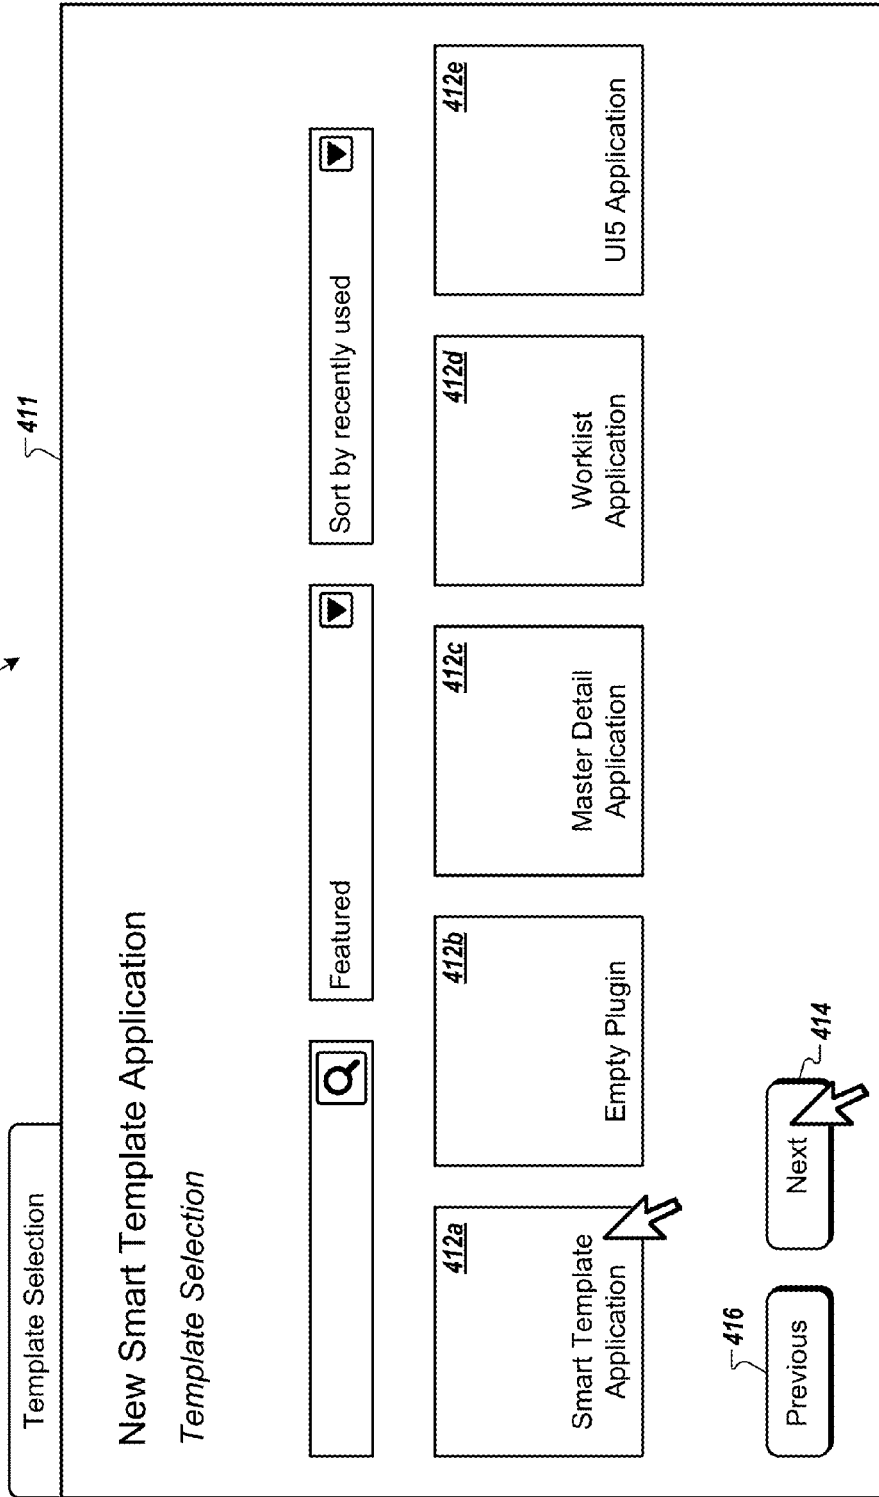


FIG. 4B

420

Basic Information

421

New Smart Template Application

Basic Information

Project Name 428

App Descriptor Data

Title 422a

Namespace 422b

Description 422c

Application Component Hierarchy 422d

Enterprise Application ID 422e

Development Path 422f

Previous 426

Next 424

FIG. 4C

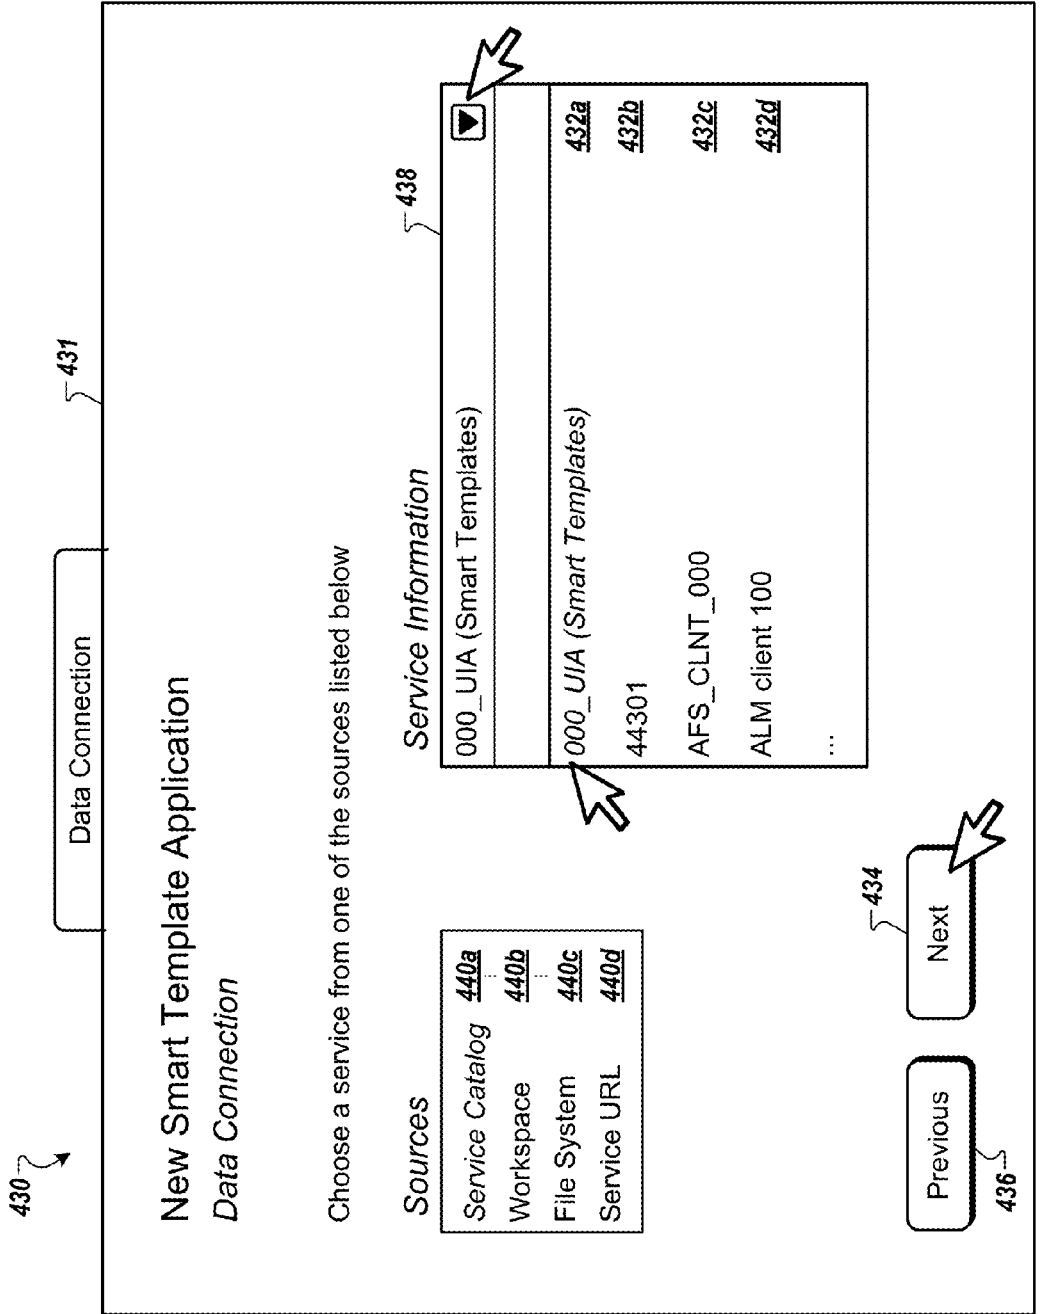


FIG. 4D

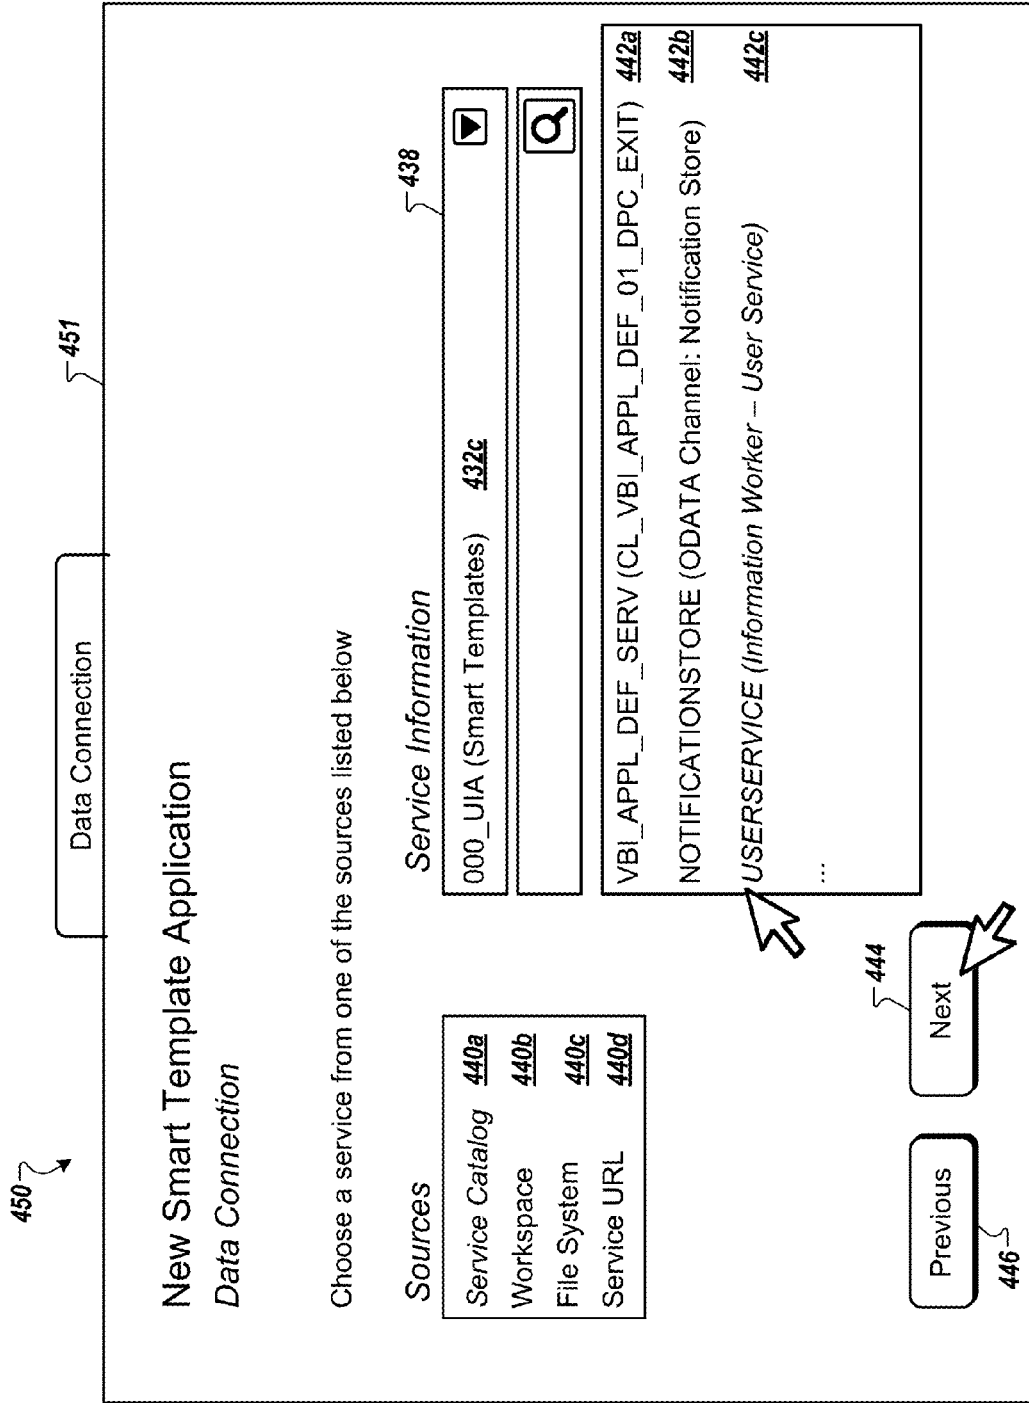


FIG. 4E

Data Connection 461

New Smart Template Application

Data Connection

Service: STTA_PROD_MAN selected

Choose a service from one of the sources listed below

Sources

Service Catalog 440a

Workspace 440b

File System 440c

Service URL 440d

Service Information

000_UIA (Smart Templates) 432c

state 468

ZTESTTANYA_SRV [test] 462a

STTA_PROD_MAN [Smart Templates Tech, Apps, Manage Products] 462b

STTA_SALES_ORDER_ND_SRV [Smart Templates, Tech, Apps, Sales Order non draft] 462c

Previous

Next

466
464

FIG. 4F

470

Annotation Selection 471

New Smart Template Application Annotation Selection

+ Add Annotated Files

Rank	Name	Source
1	Selected Service Metadata	Remote 472a
2	STTA_PROD_MAN_ANNO_MDL	Remote 472b

Previous 476

Next 474

FIG. 4G

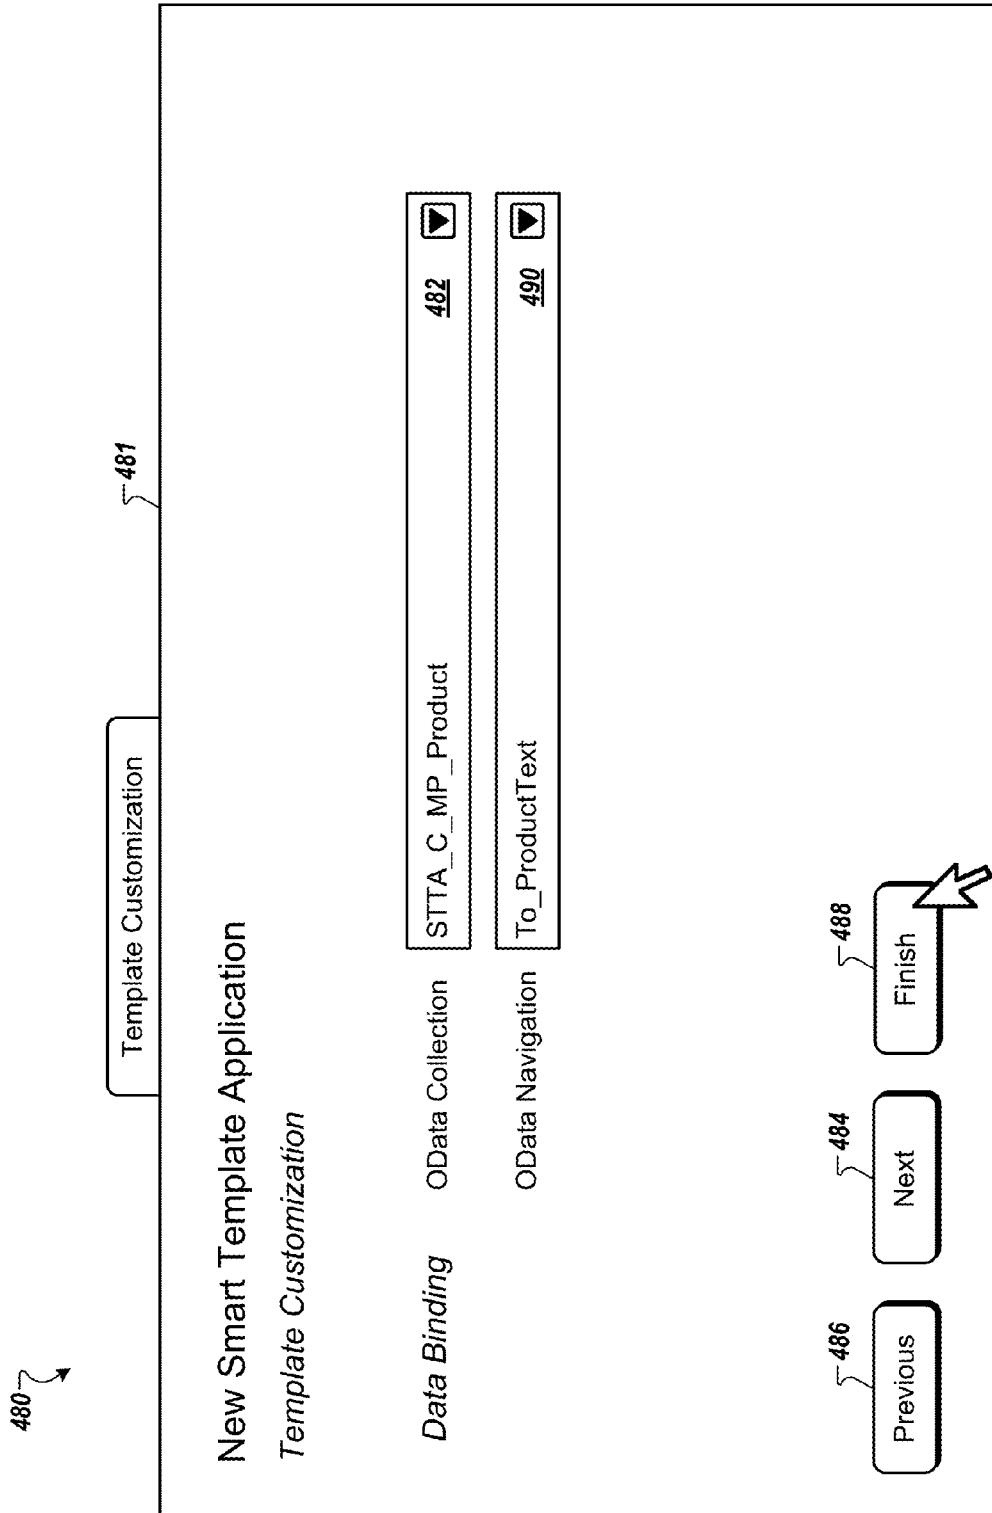


FIG. 4H

100

The screenshot shows a web application interface for managing products. At the top, there is a navigation bar with a home icon, a search icon, and a user profile icon labeled 'User'. Below this is a 'Manage Products' section with a search bar (516) and a 'Go' button (518). The main content area is divided into two sections: a filter section and a table section.

The filter section includes:

- 'Editing Status:' (506a) with a dropdown menu (508a).
- 'Category:' (506b) with a dropdown menu (508b).
- 'Supplier:' (506c) with a text input field (508c).

The table section (502) displays a list of products with columns for Product ID, Name, Category, Company, Availability, and Price. A 'Copy' button (522) is located above the table. A mouse cursor is pointing at the price of the first product.

Product ID	Name	Category	Company	Availability	Price
* Product 26 HT-1000	Product 26 HT-1000	ProductCategory 26	CompanyName1	StockAvailability_1	5,768.43 USD
* Product 27 HT-1001	Product 27 HT-1001	ProductCategory 27	CompanyName1	StockAvailability_1	4,023.43 USD
* Product 28 HT-1002	Product 28 HT-1002	ProductCategory 26	CompanyName1	StockAvailability_1	592.46 USD
...					

FIG. 5A

530 ↷

Product

User

← New Product Name 1 Product 26

General Information +

Second Facet 534

General Information ↷

Price: 532

Category: 536

Second Facet ↷

Language	Name	Description
<input type="text" value="Language 1"/>	<input type="text" value="Name 1"/>	<input type="text" value="Description 1"/>
<input type="text" value="Language 2"/>	<input type="text" value="Name 2"/>	<input type="text" value="Description 2"/>
<input type="text" value="Language 3"/>	<input type="text" value="Name 3"/>	<input type="text" value="Description 3"/>

...

FIG. 5B

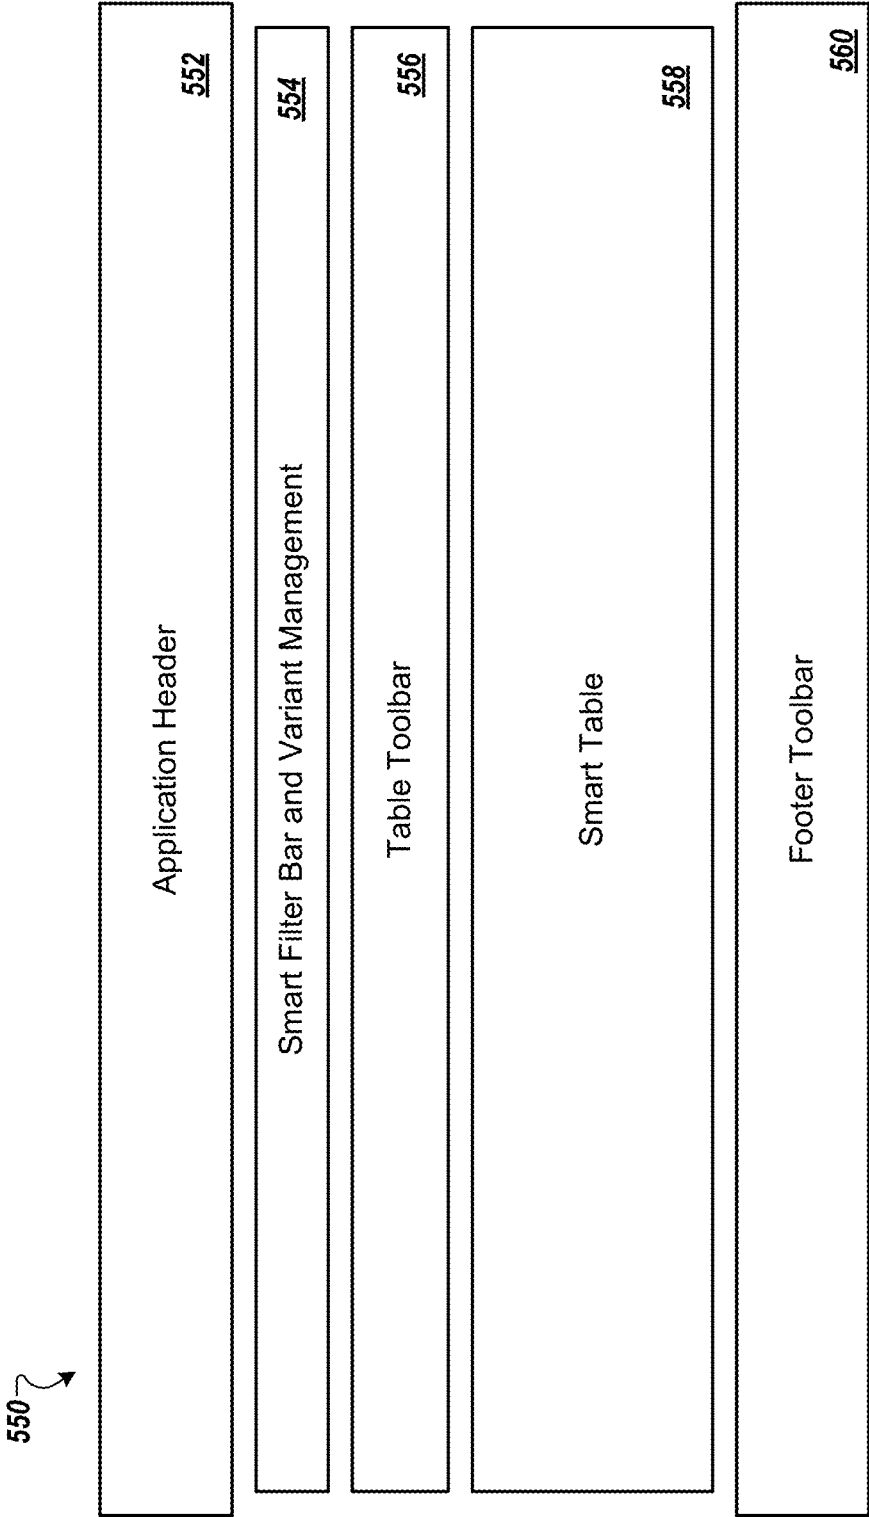


FIG. 5C

600 ↗

```
define view Product ... {  
  @UI: {  
    listItem: {position: 30, importance: #HIGH}, ↗602  
    selectionField: {position: 20}, ↗604  
  }  
  @Semantics.amount.currencyCode: 'Currency' ↗606  
  Price,  
  @ObjectModel: { ↗608  
    mandatory: true,  
    foreignKey.association: '___Currency' ↗610  
  }  
  @Semantics.currencyCode: true ↗612  
  Currency,  
  ...  
}
```

FIG. 6

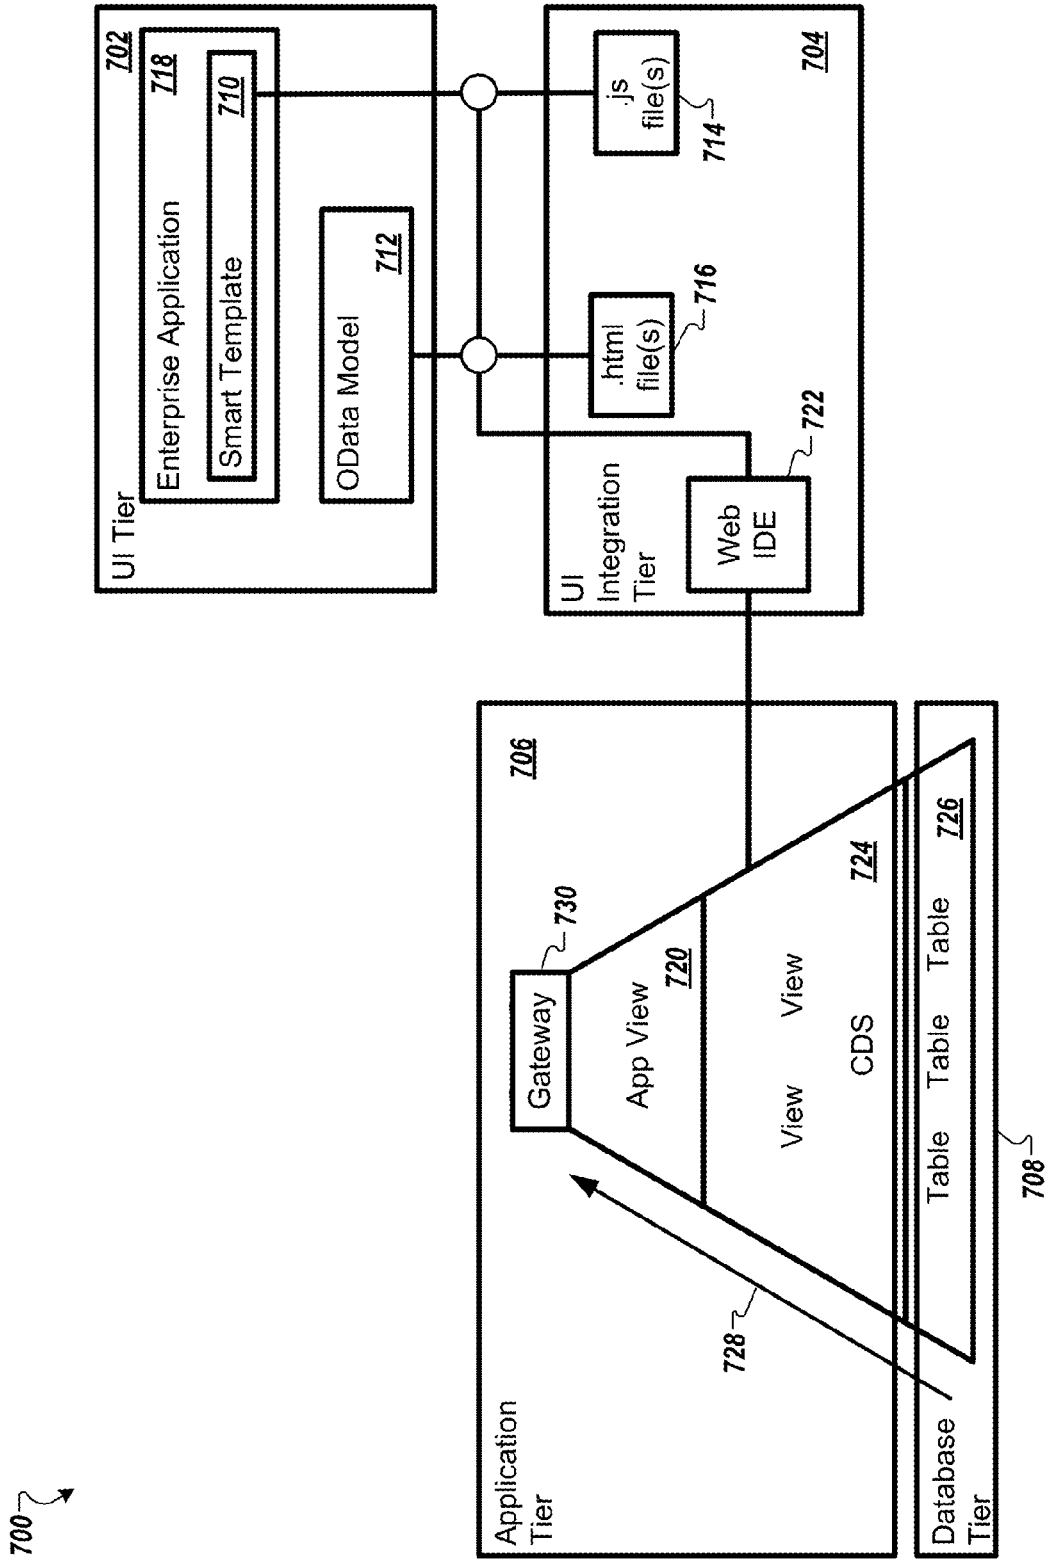


FIG. 7A

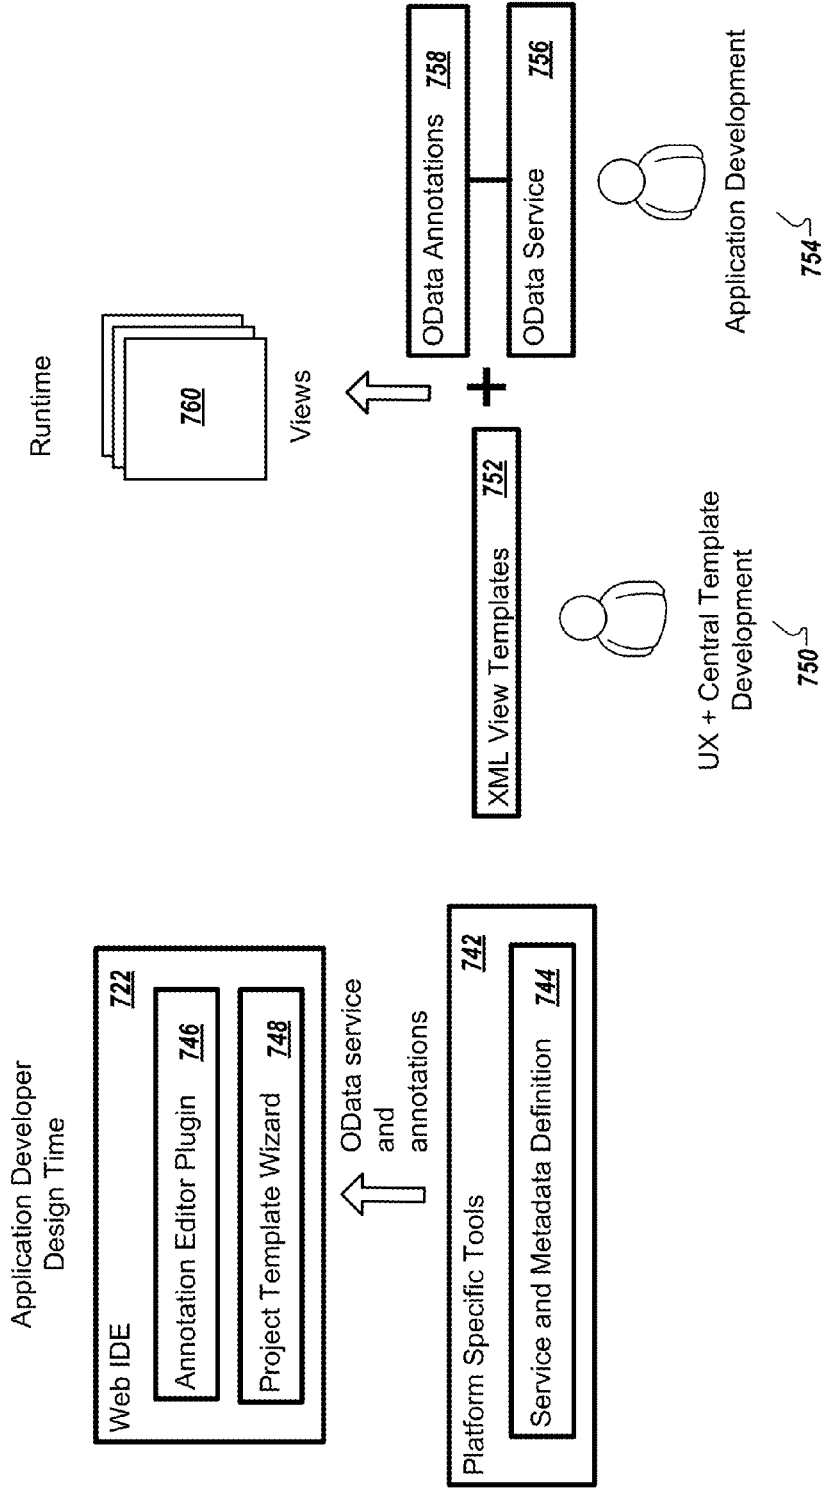


FIG. 7B

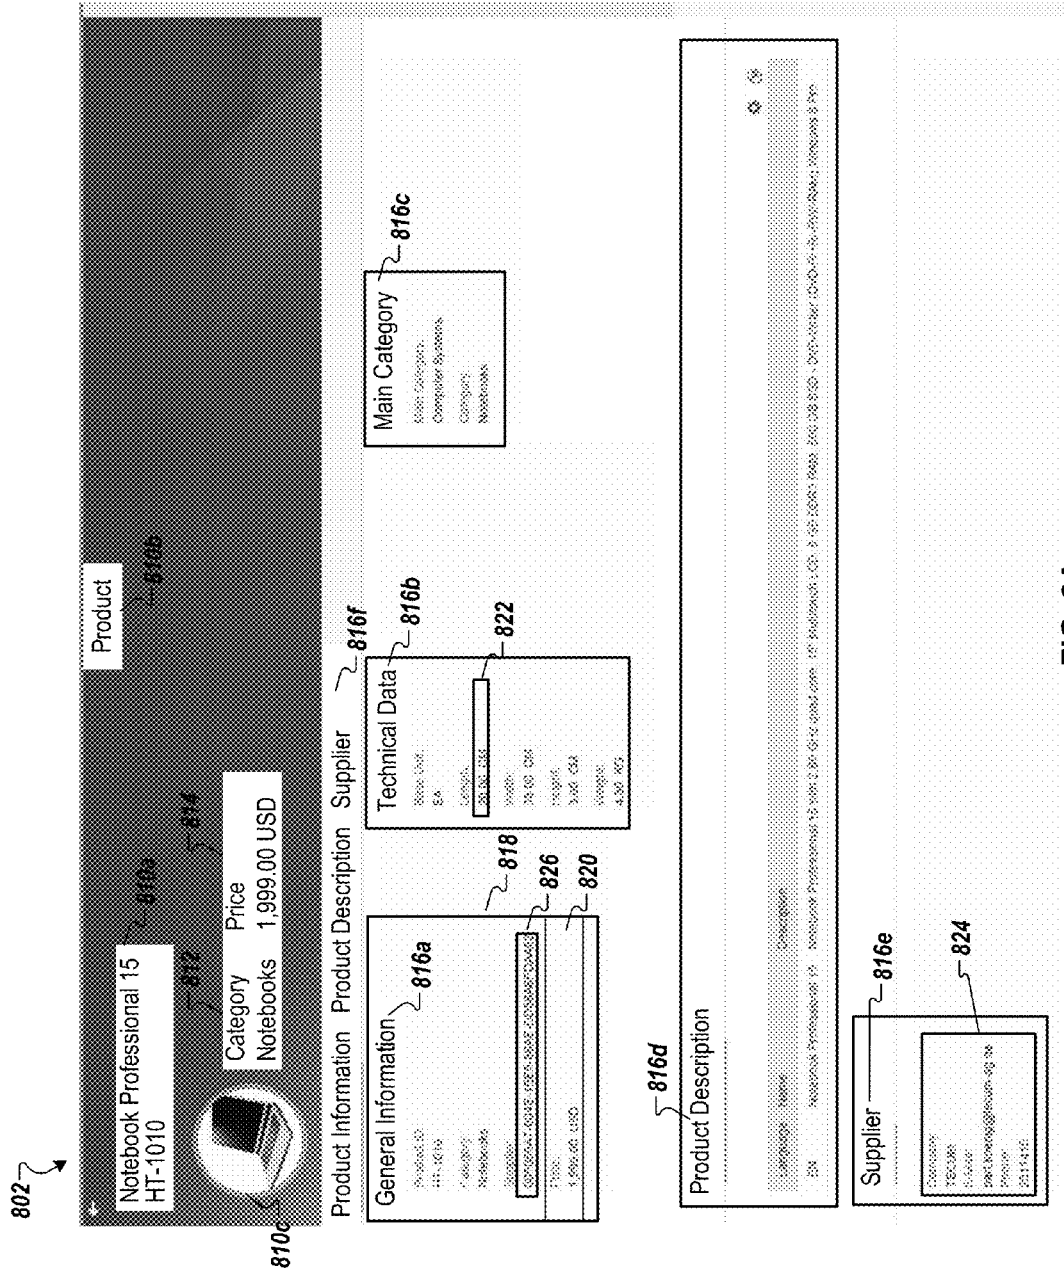


FIG. 8A

```
<Annotation Term="UI.HeaderInfo">
  <Record>
    <PropertyValue Property="TypeName" String="Product"/>
    <PropertyValue Property="ImageUrl" Path="ProductPictureURL"/>
    <PropertyValue Property="Title">
      <Record Type="UI.DataField">
        <PropertyValue Property="Value" Path="Product_Text"/>
      </Record>
    </PropertyValue>
    <PropertyValue Property="Description">
      <Record Type="UI.DataField">
        <PropertyValue Property="Value" Path="Product"/>
      </Record>
    </PropertyValue>
  </Record>
</Annotation>
```

840

```
<Annotation Term="UI.DataPoint" Qualifier="ProductCategory">
  <Record>
    <PropertyValue Property="Title" String="Category"/>
    <PropertyValue Property="Value" Path="ProductCategory"/>
  </Record>
</Annotation>

<Annotation Term="UI.DataPoint" Qualifier="ProductPrice">
  <Record>
    <PropertyValue Property="Title" String="Price"/>
    <PropertyValue Property="Value" Path="Price" />
  </Record>
</Annotation>
```

842

844

FIG. 8B

```
<Annotation Term="UI.Facets">
  <Collection>
    <Record Type="UI.CollectionFacet">
      <PropertyValue Property="Label" String="Product Information"/>
      <PropertyValue Property="Facets">
        <Collection>
          <Record Type="UI.ReferenceFacet">
            <PropertyValue Property="Label" String="..."/>
            <PropertyValue Property="Target"
              AnnotationPath="@UI.FieldGroup#GeneralInformation"/>
          </Record>
          <Record Type="UI.ReferenceFacet">...</Record>
          <Record Type="UI.ReferenceFacet">...</Record>
        </Collection>
      </PropertyValue>
    </Record>
    <Record Type="UI.ReferenceFacet">
      <PropertyValue Property="Label" String="Product Description"/>
      <PropertyValue Property="Target"
        AnnotationPath="to_ProductText/@UI.LineItem"/>
    </Record>
    <Record Type="UI.ReferenceFacet">
      <PropertyValue Property="Label" String="Supplier"/>
      <PropertyValue Property="Target"
        AnnotationPath="to_Supplier/@UI.Identification"/>
    </Record> ...
  </Collection>
</Annotation Term="UI.Facets">
```

846a

FIG. 8C

```
<Annotation Term="UI.Facets"> } 846b
  <Collection>
    <Record Type="UI.CollectionFacet">
      <PropertyValue Property="Label" String="Product Information"/>
      <PropertyValue Property="Facets">
        <Collection>
          <Record Type="UI.ReferenceFacet">
            <PropertyValue Property="Label"
              String="General Information"/>
            <PropertyValue Property="Target" AnnotationPath="..."/>
          </Record>
          <Record Type="UI.ReferenceFacet">...</Record>
          <Record Type="UI.ReferenceFacet">...</Record>
        </Collection>
      </PropertyValue>
    </Record>
    <Record Type="UI.ReferenceFacet">
      <PropertyValue Property="Label" String="Product Description"/>
      <PropertyValue Property="Target" AnnotationPath="..."/>
    </Record>
    <Record Type="UI.ReferenceFacet">
      <PropertyValue Property="Label" String="Supplier"/>
      <PropertyValue Property="Target" AnnotationPath="..."/>
    </Record> ...
```

FIG. 8D

```

<Annotation Term="UI.FieldGroup" Qualifier="GeneralInformation">
  <Record>
    <PropertyValue Property="Label" String="General Information"/>
    <PropertyValue Property="Data">
      <Collection>
        <Record Type="UI.DataField">
          <PropertyValue Property="Label" Path="Product ID"/>
          <PropertyValue Property="Value" Path="Product"/>
        </Record>
        <Record Type="UI.DataField"> ...
          <PropertyValue Property="Value" Path="ProductCategory"/>
        </Record>
        <Record Type="UI.DataField"> ...
          <PropertyValue Property="Value" Path="SupplierUUID"/>
        </Record>
        <Record Type="UI.DataField">
          <PropertyValue Property="Value" Path="Price"/>
        </Record>
      </Collection>
    <Annotations
      Target="SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/Price">
      <Annotation Term="Common.Label" String="Price">
    </Annotations> ...
  </Record>
</Annotation>
  
```

848

```

<Annotations
  Target="SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/Price">
  <Annotation Term="Measures.ISOCurrency" Path="Currency">
</Annotations>
...
or as $metadata extension:
<EntityType Name="SEPMRA_I_ProductWithDraftType">
  <Property Name="Price" Type="Edm.Decimal" sap:unit="Currency" ...>
  <Property Name="Currency" Type="Edm.String"
    sap:semantics="currency-code" /> ...
</EntityType>
  
```

850

FIG. 8E

Usage of Text Annotations (Common.Text) 852

```
<Annotations Target=
  "SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/ProductBaseUnit">
  <Annotation Term="Common.Text"
    Path="to_ProductBaseUnit/UnitOfMeasure_Text">
</Annotations>
<Annotations>
Target="SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/SupplierUID">
  <Annotation Term="Common.Text" Path="to_Supplier/CompanyName">
</Annotations>
...
```

Usage of Contact Annotations (Communication.Contact) 854

```
<Annotations Target="SEPMRA_PROD_MAN.SEPMRA_I_SupplierType">
  <Annotation Term="Communication.Contact">
    <Record>
      <PropertyValue Property="fn" Path="CompanyName"/>
      <PropertyValue Property="email">
    </Record>
      <PropertyValue Property="address" Path="EmailAddress"/>
      <PropertyValue Property="type"
        EnumMember="ContactInformationType/work"/>
    ...
  </Annotations>
or
<Annotations
Target="SEPMRA_PROD_MAN.SEPMRA_I_SupplierType/EmailAddress">
  <Annotation Term="Communication.IsEmailAddress">
</Annotations>
```

Usage of UI.DataFieldWithUrl or UI.DataFieldForIntentBasedNavigation 856

```
<Record Type="UI.DataFieldWithUrl">
  <PropertyValue Property="Value" Path="SupplierUID"/>
  <PropertyValue Property="Url" Path="SupplierWebSite"/>...
```

FIG. 8F

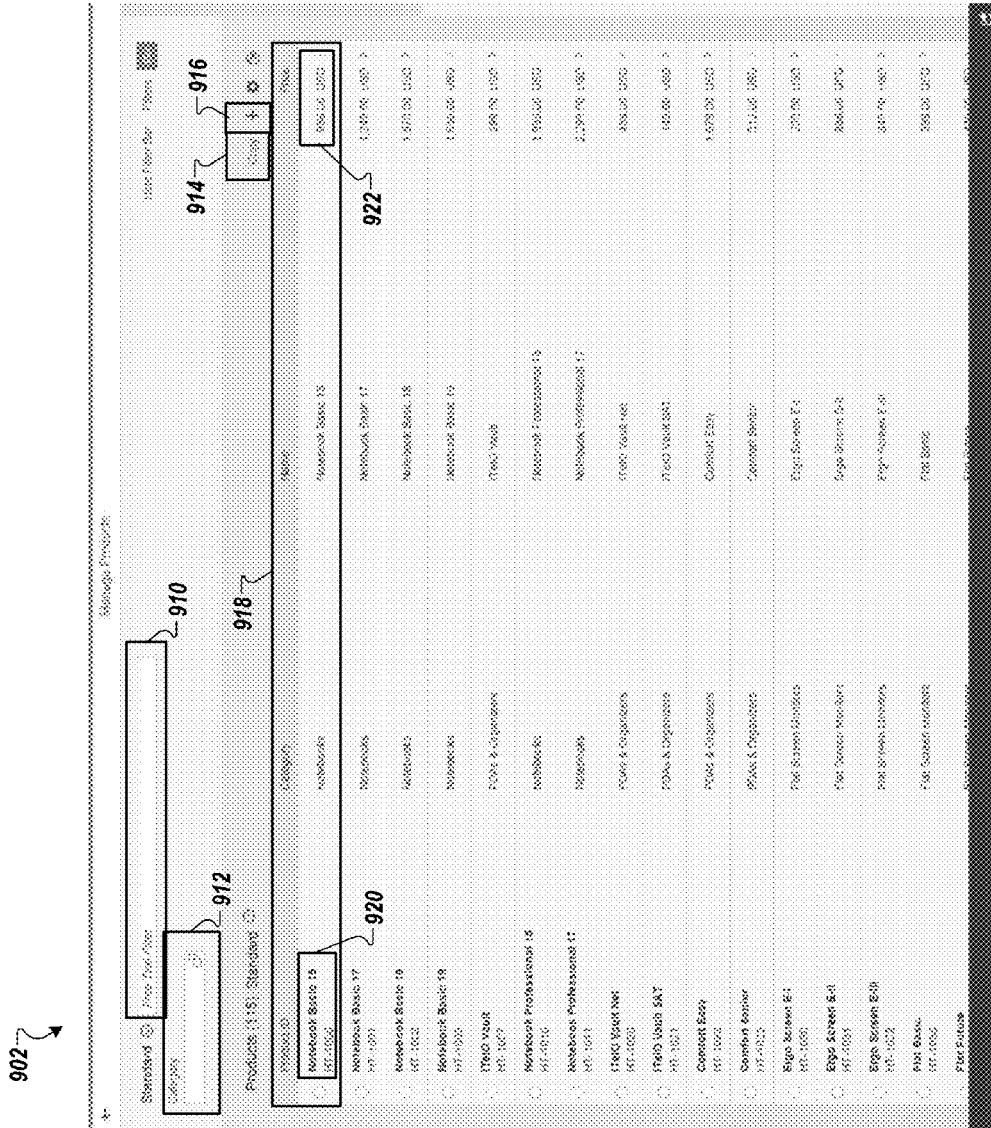


FIG. 9A

Default for filter:

```
<Annotations Target="ManageProducts.SEPMRA_I_ProductWithDraftType">  
  <Annotation Term="UI.SelectionFields">  
    <Collection>  
      <PropertyPath>ProductCategory</PropertyPath>  
    </Collection>  
  </Annotation>
```

932

...required in filter:

```
<Annotations Target=  
"ManageProducts.SEPMRA_PROD_MAN_Entities/SEPMRA_I_ProductWithDraft">  
  <Annotation Term="Capabilities.FilterRestrictions">  
    <Record>  
      <PropertyValue Property="RequiredProperties">  
        <Collection>  
          <PropertyPath>ProductCategory</PropertyPath>  
        </Collection>
```

...or in \$metadata:

```
<EntityType Name="SEPMRA_I_ProductWithDraftType">  
  <Property Name="ProductCategory" sap:required-in-filter="true"...>
```

```
<Annotations Target=  
"ManageProducts.SEPMRA_PROD_MAN_Entities/SEPMRA_I_ProductWithDraft">  
  <Annotation Term="Capabilities.SearchRestrictions">  
    <Record> <!-- optional, default value is true -->  
      <PropertyValue Property="Searchable" Bool="true">  
    </Record>
```

930

...or in \$metadata:

```
<EntitySet Name="SEPMRA_I_ProductWithDraft" sap:searchable="true"...>
```

FIG. 9B

```
<Annotation Term="UI.LineItem">  
<Collection>  
<!-- this action data field is shown in the list toolbar -->  
<Record Type="UI.DataFieldForAction">  
  ...  
  <PropertyValue Property="Label" String="Copy" />  
  <PropertyValue Property="Action" String=  
    "ManageProducts.SEPMRA_PROD_MAN_Entities/  
    SEPMRA_I_ProductWithDraftCopy" />  
</Record> ...
```

934

```
<Annotations Target=  
  "ManageProducts.SEPMRA_PROD_MAN_Entities/SEPMRA_I_ProductWithDraft">  
<Annotation Term="Capabilities.InsertRestrictions">  
<Record> <!-- optional, default value is true -->  
  <PropertyValue Property="Insertable" Bool="true">  
</Record>  
...or in $metadata (optional, since default value is true):  
<EntitySet Name="SEPMRA_I_ProductWithDraft" sap:creatable="true" ...>
```

936

FIG. 9C

```

<Annotation Term="UI.LineItem">
  <Collection>
    <Record Type="UI.DataField">
      ...
      <PropertyValue Property="Value" Path="Product"/>
    </Record>
    <Record Type="UI.DataField">
      ...
      <PropertyValue Property="Value" Path="ProductCategory"/>
    </Record>
    <Record Type="UI.DataField">
      ...
      <PropertyValue Property="Value" Path="Product_Text"/>
    </Record>
    <Record Type="UI.DataField">
      ...
      <PropertyValue Property="Value" Path="Price"/>
    </Record> ...
  
```

938

Usage of Text Annotations (Common.Text)

```

<Annotations Target=
  "SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/Product">
  <Annotation Term="Common.Text" Path=„Product_Text">
</Annotations>
... or in $metadata:
<EntityType Name="SEPMRA_I_ProductWithDraftType">
  <Property Name="Product" sap:text="Product_Text"...>
  
```

940

Usage of Unit Annotations (Measures.Unit, Measures.ISOCurrency)

```

<Annotations Target=
  "SEPMRA_PROD_MAN.SEPMRA_I_ProductWithDraftType/Price">
  <Annotation Term="Measures.ISOCurrency" Path="Currency">
</Annotations>
... or in $metadata:
<EntityType Name="SEPMRA_I_ProductWithDraftType">
  <Property Name="Price" sap:unit="Currency"...>
  <Property Name="Currency" sap:semantics="currency-code"...>
  
```

942

FIG. 9D

1002

The screenshot displays a mobile application interface titled "Manage Products". At the top, there is a navigation bar with a back arrow and the title. Below the title, there are filter options: "Standard" (selected), a "Free Text Filter" input field, "Hide Filter Bar", and "Filters" with a grid icon. A "Category:" label is followed by an empty input field with a search icon. Below this, it says "Products (115) Standard" with a refresh icon and action icons for "Copy", "+", "Settings", and "Share".

Product ID	Name	Price
HT-1000	Notebook Basic 15	996.00 USD
HT-1001	Notebook Basic 17	1,249.00 USD
HT-1002	Notebook Basic 18	1,570.00 USD
HT-1003	Notebook Basic 19	1,650.00 USD
HT-1007	iTelO Vault	299.00 USD
HT-1010	Notebook Professional 15	1,999.00 USD
HT-1011	Notebook Professional 17	2,299.00 USD
HT-1020	iTelO Vault Net	499.00 USD

Each product entry includes a radio button for selection, the product ID, name, price, and a right-pointing chevron. Below each entry, the category is listed: "Notebooks" for the first six items and "PDAs & Organizers" for the iTelO Vault item. A dark bar at the bottom right contains a share icon.

FIG. 10

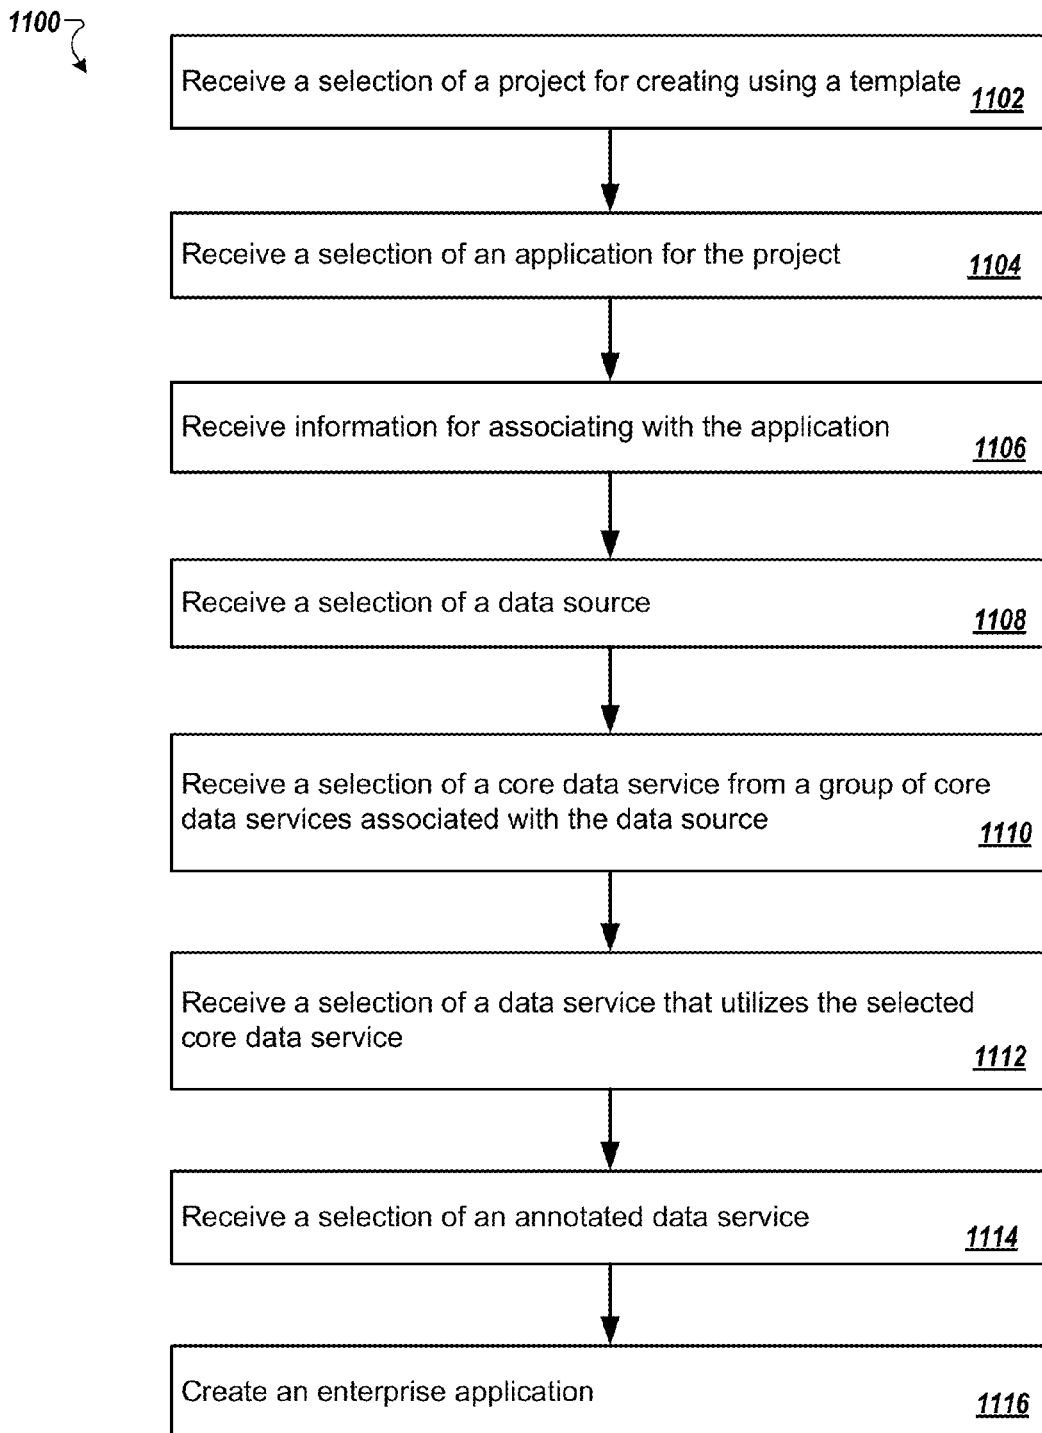


FIG. 11

SMART TEMPLATES FOR USE IN MULTIPLE PLATFORMS

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to and the benefit of U.S. Provisional Application No. 62/335,760, filed May 13, 2016, U.S. Provisional Application No. 62/335,762, filed May 13, 2016, U.S. Provisional Application No. 62/335,765, filed May 13, 2016, U.S. Provisional Application No. 62/335,767, filed May 13, 2016, U.S. Provisional Application No. 62/335,888, filed May 13, 2016, U.S. Provisional Application No. 62/335,892, filed May 13, 2016, U.S. Provisional Application No. 62/335,895, filed May 13, 2016, U.S. Provisional Application No. 62/335,897, filed May 13, 2016, U.S. Provisional Application No. 62/335,899, filed May 13, 2016, U.S. Provisional Application No. 62/335,873, filed May 13, 2016, U.S. Provisional Application No. 62/335,875, filed May 13, 2016, each of which is incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] This description generally relates to user interfaces. The description, in particular, relates to systems and techniques for providing a user interface experience for viewing data and information related to multiple software applications.

BACKGROUND

[0003] A user of software applications designed to support processes used by an enterprise often needs to navigate back and forth between multiple (and in many cases different) user interfaces and application instances in order to carry out transactional tasks when making a viable decision for the enterprise. In many cases, the navigation can include viewing data and information related to multiple applications. While navigating between the various user interfaces and application instances, the user may become lost and confused, losing a context of a current transactional task. This can create major usability issues, resulting in the inability of the user to effectively carryout the transactional tasks. In general, the user has a poor user experience using and interacting with the software applications.

SUMMARY

[0004] According to one general aspect, a system of one or more computers can be configured to perform particular operations or actions by virtue of having software, firmware, hardware, or a combination of them installed on the system that in operation causes or cause the system to perform the actions. One or more computer programs can be configured to perform particular operations or actions by virtue of including instructions that, when executed by data processing apparatus, cause the apparatus to perform the actions.

[0005] In one general aspect, a method for creating an enterprise application can include receiving, by a computing device, a selection of a project for creating using a template, receiving, by the computing device, a selection of an application for the project, receiving information for associating with the application, receiving a selection of a data source, receiving a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template, receiving a selection

of a data service that utilizes the selected core data service, receiving a selection of an annotated data service, and creating the enterprise application. The creating can be based on the smart template. The creating can utilize the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

[0006] Implementations may include one or more of the following features. For example, the creating of the enterprise application can be performed using a web Integrated Development Environment (IDE). The web IDE can execute on a web browser executing on the computing device. The data source, the core data service, the data service, and the annotated data service can be included for selection in a data connection tab of the web IDE. The data source can be an annotated Open Data Protocol (OData) source. The application can be a smart template application. The data service can be an OData service. The annotated service can be an OData annotated service. The smart template application can use predefined template views and controllers that use the OData service and the OData annotated service. The OData annotated service can add semantics and structures to data provided by the data source. The smart template application can use the predefined template views and controllers at runtime to generate at least one view for the enterprise application.

[0007] In another general aspect, a non-transitory, machine-readable medium has instructions stored thereon. The instructions, when executed by a processor, cause a computing device to receive a selection of a project for creating using a template, receive a selection of an application for the project, receive information for associating with the application, receive a selection of a data source, receive a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template, receive a selection of a data service that utilizes the selected core data service, receive a selection of an annotated data service, and create an enterprise application. The creating can be based on the smart template. The creating can utilize the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

[0008] Implementations may include one or more of the following features. For example, the instructions when executed by the processor can further cause the computing device to create the enterprise application using a web Integrated Development Environment (IDE). The instructions when executed by the processor that further cause the computing device to create the enterprise application using a web Integrated Development Environment (IDE) can execute on a web browser executing on the computing device. The data source, the core data service, the data service, and the annotated data service can be included for selection in a data connection tab of the web IDE. The data source can be an annotated Open Data Protocol (OData) source. the application can be a smart template application. The data service can be an OData service. The annotated service can be an OData annotated service. The smart template application can use predefined template views and controllers that use the OData data service and the OData annotated service. The OData annotated service can add semantics and structures to data provided by the data source. The smart template application can use the predefined

template views and controllers at runtime to generate at least one view for the enterprise application.

[0009] In yet another general aspect, a system can include at least one memory including instructions on a computing device, and at least one processor on the computing device. The processor can be operably coupled to the at least one memory and can be arranged and configured to execute the instructions that, when executed, cause the processor to implement receiving, by the computing device, a selection of a project for creating using a template, receiving, by the computing device, a selection of an application for the project, receiving information for associating with the application, receiving a selection of a data source, receiving a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template, receiving a selection of a data service that utilizes the selected core data service, receiving a selection of an annotated data service, and creating an enterprise application. The creating can be based on the smart template. The creating can utilize the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

[0010] Implementations may include one or more of the following features. For example, the application can be a smart template application. The data service can be an OData service. The annotated service can be an OData annotated service. The smart template application can use predefined template views and controllers that use the OData service and the OData annotated service. The OData annotated service can add semantics and structures to data provided by the data source. The smart template application can use the predefined template views and controllers at runtime to generate at least one view for the enterprise application.

[0011] The details of one or more implementations are set forth in the accompanying drawings and the description below. Other features will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] FIG. 1A is an illustration of a user interface entry point (a viewport) for a particular user experience.

[0013] FIG. 1B is an illustration showing an example login screen displayed in a shell main container.

[0014] FIG. 1C is an illustration showing an example launchpad displayed in a shell main container.

[0015] FIG. 1D is an illustration showing an example active application screen (an overview page) displayed in a shell main container.

[0016] FIG. 1E is an illustration showing an example object page displayed in a shell main container.

[0017] FIG. 1F is an illustration showing an example footer toolbar.

[0018] FIG. 1G is an illustration showing an example me area that can be displayed in a left container.

[0019] FIG. 1H is an illustration showing an example notification area that can be displayed in a right container.

[0020] FIG. 1I is an illustration showing an example copilot user interface.

[0021] FIG. 1J is an illustration of a timeline user interface that can display timeline entries.

[0022] FIG. 2 is a diagram of an example system that can implement the user interfaces and user experiences described herein.

[0023] FIG. 3 is a block diagram illustrating an example general aspect of incorporating smart templates in an enterprise application.

[0024] FIG. 4A illustrates example projects for use in creating and generating an enterprise application.

[0025] FIG. 4B illustrates example template applications for use in creating and generating an enterprise application.

[0026] FIG. 4C illustrates example information for use in creating and generating an enterprise application.

[0027] FIG. 4D illustrates example data connection information that includes example annotated OData sources and example core data services for selection when creating and generating an enterprise application.

[0028] FIG. 4E illustrates example data connection information that includes example OData services for selection when creating and generating an enterprise application that uses the selected core data service.

[0029] FIG. 4F illustrates example data connection information that includes example annotated OData services for selection when creating and generating an enterprise application that uses the selected core data service and a selected state OData service.

[0030] FIG. 4G illustrates example annotated files for use when creating and generating an enterprise application.

[0031] FIG. 4H illustrates example template customizations for use when creating and generating an enterprise application.

[0032] FIG. 5A shows an example UI for an enterprise application that utilizes a smart template.

[0033] FIG. 5B shows another example UI for an enterprise application that utilizes a smart template.

[0034] FIG. 5C is a block diagram showing a layout for a UI based on the use of a smart template.

[0035] FIG. 6 shows example source code for an example core data service (CDS) for a product view that includes semantic information.

[0036] FIG. 7A is a block diagram illustrating layering and sources of annotations for use in smart templates.

[0037] FIG. 7B is a block diagram illustrating how smart templates work, showing application developer design time aspects of the development process and runtime aspects of the development process.

[0038] FIGS. 8A-F show smart templates as applied to the development of an object page.

[0039] FIGS. 9A-D show smart templates as applied to the development of a list report.

[0040] FIG. 10 shows another smart template as applied to the development of a list report.

[0041] FIG. 11 is a block diagram of a flowchart showing an example method for implementing the creation of an enterprise application that utilizes smart templates.

[0042] Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION

[0043] Enterprise transactional applications can evolve from large monolithic on-premise software deployments into multiple (e.g., hundreds of, thousands of) small, componentized applications that can execute (run) on various types of computing devices and network platforms. For example, the fifth version of Hypertext Markup Language

(HTML5) can be used as a basis for structuring and presenting an application platform that includes a grid matrix-style home screen or dashboard-like user interface. The use of HTML5 can provide an improved user experience, can reduce a user interface complexity, and may increase user productivity across multiple types of computing devices. The computing devices can include, but are not limited to, desktop computers and mobile computing devices such as laptop computers, tablet computers, notebook computers, personal digital assistants (PDAs), smartphones, mobile phones, smart watches, etc.).

[0044] In some cases, the grid matrix-style home screen or dashboard-like user interface allows a user to open and access a selected application. In some cases, the grid matrix-style home screen or dashboard-like user interface allows a user to access content within an application. These user interfaces can present user experience (UX) and user interface (UI) shortcomings while attempting to provide optimized usability and user-centric business functionalities related to transactional tasks.

[0045] For example, users may need to navigate back and forth between multiple screens that can include home screens, application instances, and drill downs, in order to perform various transactional tasks to make viable business decisions. The user may need to navigate back and forth between multiple screens when viewing related data between various applications.

[0046] For example, applications and application instances may not interoperate with each other. Because of this, user navigation and operations may not be minimized. Applications may not readily access relative content without first needing to open an application instance and then perform numerous navigations.

[0047] In order to improve a user experience (UX), a user interface can be implemented to intuitively propose relative context or intent to a user. A user interface can be implemented to conform to, recognize, and facilitate ways in which a user may personally work. A user interface can be implemented to help a user remember important tasks. The use of such a “smart” user interface can help a user easily manage and keep track of the context of current tasks and activities when carrying out transactional tasks.

[0048] A shortcoming of a UX and a UI can be a lack of relative business contexts related to user roles and expertise that can empower employees to do their job better, faster, and in a more deliberate way. Providing a user with a way to personalize an experience of the user based on a role requirement of the user can result in a better overall user experience. For example, the personalization can result in a UI automatically providing proposals for transactional tasks that the user may need to see. The proposals can be provided at a time when the user wants to see the proposal and on a computing device chosen by the user. The proposals can be provided to the user as a result of a single click or gesture input to the user interface by the user. The UI can be considered a central interface that can provide a user with the ability to communicate, collaborate, initiate, and/or respond to colleagues, managers, and customers without leaving the context of their current activity or application.

[0049] Alternatively, a user may have to navigating through multiple applications and user interfaces. A user may easily lose a context of a current task or activity while having to navigate through user interfaces provided in a multiple application environment for an enterprise. The loss

of context can affect the ability of the user to effectively carryout a transactional task. In addition, navigating through user interfaces provided in a multiple application environment may not allow a user to readily view, at a glance, live data that may be relevant to personal and professional daily activities, responsibilities and organizational accountabilities of the user. The user may not be provided with a way to efficiently manage hundreds (or thousands) of applications associated with transactional workflows in the enterprise.

[0050] Enterprise applications that are associated with transactional workflows in an enterprise can be implemented using a software development technology or foundation (e.g., HTML5/CSS/JS technology) in a particular UI framework (e.g., SAPUI5) in order to provide a beneficial UX and UI. The enterprise applications can be implemented to execute or run on multiple different types of computing devices such as desktop computers and mobile computing devices (e.g., laptop computers, tablet computers, notebook computers, personal digital assistants (PDAs), smartphones, mobile phones, smart watches, etc.).

[0051] For example, the UI may use elements of a particular UX (e.g., an SAP Fiori® UX) to provide a user with a personalized, responsive, seamless, and simple user experience across enterprise applications (including legacy and new), across different types of computing devices such as desktop computers and mobile computing devices (e.g., laptop computers, tablet computers, notebook computers, personal digital assistants (PDAs), smartphones, mobile phones, smart watches, etc.), and across all possible deployment options (e.g., on-premise, cloud, as-a-service, etc.).

[0052] The particular UX can deploy an array of interactive features and process tools that can be integrated with a suite or set of enterprise applications that have specific functionalities. The particular UX can provide intelligent, contextual-based support for users across an enterprise. The particular UX can use a “push” model that can anticipate tasks (e.g., transactional tasks) for a user based on a role of the user in the enterprise. The particular UX can import real-time data that can be tailored to specific tasks. The software for the UI for the particular UX can be implemented to easily and transparently scale the UI accordingly for display on each display device included in each of the different possible computing devices that can execute (run) the enterprise applications.

[0053] The particular UX can be personalized, responsive, simplified, and optimized, enabling and empowering users by providing a consistent and coherent view across target computing devices, making a suite or set of enterprise applications easier and more intuitive to use. The particular UX can be designed for a specific user. Complex applications can be decomposed into task-based experiences with a central entry point for each specific user. The can support how, when, and where a user works. The particular UX can dynamically adapt to meet the requirements of multiple computing devices, versions, and channels to provide a common user experience. The particular UX can reduce the time needed by a user to complete routine tasks by providing a role-based experience and contextual information, by supporting the effective presentation of real-time information, and by offering efficient navigation paradigms.

[0054] FIG. 1A is an illustration of a UI entry point (a viewport **100**) for a particular UX. The viewport **100** can be a single-screen view partitioned into multiple (e.g., three) multifunctional screen areas (e.g., a left screen area (left

container **102**, a center screen area (shell main container **104**), and a right screen area (right container **106**) for display in a display area (on a display device) included in a computing device. The viewport **100** can include a shell toolbar **108**. The shell toolbar **108** can include a global search and other services, which are available to a user across all enterprise applications.

[0055] The shell main container **104** can display information for use as a main workspace for the UX. In some implementations, multiple different screens can be displayed in the shell main container **104**. For example, a login screen, a launchpad screen, and an overview page can alternatively be displayed in the shell main container **104**. The viewport **100** can provide a user with a screen orientation that can allow the user access to application information. The viewport **100** can provide the user with a UX and UI that includes the business functionalities and enterprise application-to-application navigations needed by the user without disrupting a context of a current task of the user.

[0056] FIG. 1B is an illustration showing an example login screen **110** displayed in the shell main container **104**. The login screen **110** provides a UI that allows a user to enter credentials in order to log into and begin a personalized and customized UX. In the example shown in FIG. 1B, the login screen **110** appears to drop into the shell main container **104** from a virtual extension area located along a top of a display area. In some implementations, the virtual extension area can be placed along the bottom of the display area. In some implementations, the virtual extension area can be placed to the left and/or the right of the display area.

[0057] FIG. 1C is an illustration showing an example launchpad **112** displayed in the shell main container **104**. The launchpad **112** can be a web-based entry point (or homepage) for enterprise applications that can execute (run) across multiple platforms and computing devices. In the example shown in FIG. 1C, the launchpad **112** appears to drop into the shell main container **104** from the top of a display area. In some implementations, the virtual extension area can be placed along the bottom of the display area. In some implementations, the virtual extension area can be placed to the left and/or the right of the display area.

[0058] The launchpad **112** can serve as a bracket around (or a base for) a set (or group) of enterprise applications, providing a single point of entry for the set of enterprise applications. In the example shown in FIG. 1C, the launchpad **112** presents (displays on a screen of a computing device of a user) each application represented by a tile. A tile can be a container that represents the application. Each tile can display different types of content. A user can interact with each tile to navigate to the specific enterprise application associated with the tile. In addition, when designing a tile to represent a specific application, a programmer can assign a tile to a specific user or group of users. The launchpad **112** can provide one or more services. The one or more services can include, but are not limited to, application-to-application navigation, personalization, role-based application assignments, search, and incident creation.

[0059] For example, complex applications can be decomposed into a task-based experience with a central entry point for each user of the application. The launchpad **112** can be a role based, personalized, real-time and contextual aggregation point for business applications and analytics. The launchpad **112** can run (execute) on multiple computing devices including, but not limited to, desktop computers and

mobile computing devices such as laptop computers, tablet computers, notebook computers, personal digital assistants (PDAs), smartphones, mobile phones, smart watches, etc.). In addition, the launchpad **112** can be deployed on multiple platforms (e.g., Linux, Windows, Windows Phone, MAC®, iOS®, OS X®, Android®, etc.).

[0060] The launchpad **112** includes tiles **114a-h**. Each tile can display different types of content. For example, tile **114a** can be a news and feeds tile that can enhance collaboration by providing a user with information about the enterprise. The tiles **114a-h** can be individually color-coded. A color can represent a particular role (e.g., finance, human resources, supply chain management (SCM), customer relationship management (CRM), etc.). The tiles **114a-h** can be associated with a group **116**. Tile **114f** can be a key performance indicator (KPI) tile. Tile **114b** can be a basic launch tile. Tile **114d** can be a monitoring tile. Tile **114g** can display a comparison chart for specific content.

[0061] The launchpad **112** includes a link list area **118** that includes links **119a-f**. The link list area **118** is an area on the launchpad **112** that can provide links to enterprise applications represented by the tiles **114a-h**. For example, a user can select and drag a tile from the tile area on the launchpad **112** into the link list area **118** to create a link to the application associated with (represented by) the tile. In some implementations, the launchpad **112** can include a footer toolbar (e.g., footer toolbar **132** as shown in FIG. 1F). In some implementations, the footer toolbar can appear to float over the content displayed in the launchpad **112**.

[0062] In some implementations, the shell toolbar **108** can display a search icon **111** and a copilot launch icon **113**. A user can select (click on) the copilot launch icon **113** to launch a copilot UI. A copilot UI will be described in more detail with reference to FIG. 1I.

[0063] FIG. 1D is an illustration showing an example active application screen (overview page **120**) displayed in the shell main container **104**. The enterprise applications that can be accessed by a user by way of the launchpad **112** and then subsequently displayed in an active application screen (e.g., the overview page **120**) can include, but are not limited to, transactional applications, analytical applications, and fact sheet applications (contextual navigation applications). Transactional applications can allow a user to create, change and/or approve processes with guided navigation. Analytical applications can provide a user with a visual overview of a dedicated topic for monitoring and tracking purposes to allow for further key performance indicator (KPI) related analysis. Fact sheet applications can allow a user to view essential information about an object and to allow navigation between related objects.

[0064] The overview page **120** can visualize all of the information a user may need for a specific business context (business domain) on a single page or screen. The information can be displayed in one or more variable content packages (VCPs) or cards **122a-i**. Each card can be a container of content for organizing large amounts of information on an equal plane within the overview page **120**. In some implementations, a user can rearrange the position of the cards **122a-i** on the overview page **120**. In some implementations, a user define, add, or delete cards included in the overview page **120**.

[0065] An overview page (e.g., the overview page **120**) can be a selectable application (e.g., from the launchpad **112**) providing an integrated gateway into enterprise appli-

cations and application content included in the launchpad **112**. The UI of the overview page (e.g., the overview page **120**) can provide a user with a visual summary of data, links, actions, and content that are relevant to a business domain of expertise of a user and relevant to a selected role of the user within the domain. The visual summary can be presented in one or more cards (e.g., the cards **122a-i**) that display live content to a user at-a-glance without the user having to open multiple applications and perform multiple drill downs through application content to find and present the content.

[0066] In some implementations, the overview page **120** can include a footer toolbar (e.g., footer toolbar **132** as shown in FIG. 1F). In some implementations, the footer toolbar can appear to float over the content displayed in the overview page **120**.

[0067] In some implementations, an enterprise system can determine content displayed on an overview page (e.g., the overview page **120**). In addition or in the alternative, a selection of one or more business domains and one or more roles of a user in the business or enterprise can determine content displayed on an overview page (e.g., the overview page **120**). In some implementations, a user can make the selection using a settings UI included in a launchpad (e.g., the launchpad **112**). In some implementations, a user can select one or more business domains and/or one or more roles of the user in the enterprise by way of an overview page (e.g., the overview page **120**). Selecting one or more business domains and/or one or more roles of the user in the enterprise by way of the overview page can maintain absolute relevance to the individual user and the way in which the user works.

[0068] In some implementations, the user can personalize the layout and placement of one or more cards (e.g., the cards **122a-i**) included in a UI of an overview page (e.g., the overview page **120**) and the display of content included in each card. The personalization can enhance the workplace productivity of the user.

[0069] FIG. 1E is an illustration showing an example object page (object page **124**) displayed in the shell main container **104**. An object page can be a floorplan used to represent objects in a UI. An object page can be used to display, create, or edit an object. An object can represent a business entity (e.g., a customer, a sales order, a product, an account, etc.). Enterprise applications that reflect a specific scenario (e.g., a sales order, an account status) can be bundled using an object. The object page can include a header area **126**, a navigation area **128**, a content area **130**, and, in some implementations, a footer toolbar (e.g., footer toolbar **132** as shown in FIG. 1F). In some implementations, the footer toolbar can appear to float over the content displayed in the object page **124**. For example, referring to FIG. 1C, a user can select the tile **114f** and an object page can be displayed to the user.

[0070] FIG. 1F is an illustration showing an example footer toolbar (e.g., footer toolbar **132**). In some implementations, referring to FIG. 1A, the footer toolbar **132** can appear at the bottom of a screen displayed in the shell main container **104**, the left container **102**, and/or the right container **106**. For example, as described herein with reference to FIGS. 1C-E, a footer toolbar (e.g., the footer toolbar **132**) can be displayed at the bottom of the launchpad **112**, the overview page **120**, and the object page **124**. The footer toolbar (e.g., the footer toolbar **132**) can continue to appear

at the bottom of the screen of the display area of the display device even as the displayed screen is scrolled. The footer toolbar (e.g., the footer toolbar **132**) can appear to hover over or float over the content being displayed on the screen. The footer toolbar **132** can include buttons or controls **134a-k**. The controls **134a-k** can be selected by a user in order to perform one or more actions that can impact content included on the page being displayed on the screen. The controls **134a-k** are examples of controls that can be included in a footer toolbar. In some implementations, the controls can be different, fewer than, or more than the controls **134a-k**. The type and number of controls included in a footer toolbar can be based on the type of page being displayed and/or the content being displayed in the page.

[0071] FIG. 1G is an illustration showing an example me area (e.g., me area **136**) that can be displayed in the left container **102**. In some implementations, the me area **136** can be displayed in the right container **106**. The me area **136** includes an upper section **138** and a lower section **140**. The upper section **138** includes a user icon **142**. Selecting (clicking on) the user icon **142** can provide a user profile. A dropdown indicator button **144** displays a status of the user and, if selected, a user can log out of an application. The upper section **138** includes navigation targets **146a-e**. Selection of (clicking on) a navigation target by a user triggers a corresponding functionality (e.g., an application) associated with a navigation target. The me area **136** can provide various generalized functionalities as they are related to a user.

[0072] The upper section **138** can include sort selections **146a-b**. A user can select (click on) a sort selection (e.g., one of the sort selections **146a-b**) to determine how the listing of the recent activities included in the lower section **140** will be sorted and displayed.

[0073] The lower section **140** of the me area **136** includes a list of recent activities **148a-c**. The recent activities **148a-c** can include links **156a-c**, respectively, that when selected (clicked on) by a user can navigate the user to back to the shell main container **104**, opening an application (or function) that corresponds to the link in the shell main container **104**. Recent activity items can include, but are not limited to, enterprise applications, triggered searches, co-pilot collections, and co-pilot drafts.

[0074] FIG. 1H is an illustration showing an example notification area (e.g., notification area **150**) that can be displayed in the right container **106**. In some implementations, the notification area **150** can be displayed in the left container **102**. The notification area **150** includes notifications **152 a-c**. A user interacting with the UI for the notification area **150** can take immediate action on a notification. A notification item (e.g., notifications **152 a-c**) can have an indicator (e.g., notification indicators **154a-c**) that can indicate the status of the notification. For example, a notification indicator can be color coded to indicate a particular status of the notification.

[0075] A user can reject a notification by selecting (clicking on) a reject selection (e.g., a reject selection **156a-b**). For example, a user can reject the notification **152a** by selecting (clicking on) the reject selection **156a**. The rejection of the notification **152a** (the notification status) can be indicated by content included in (e.g., a color of) a notification indicator **154a**. A user can acknowledge a notification by selecting (clicking on) an acknowledge selection (e.g., an acknowledge selection **158a-b**). For example, a user can acknowledge the

notification **152b** by selecting (clicking on) the acknowledge selection **158b**. The acknowledgement of the notification **152b** (the notification status) can be indicated by content included in (e.g., a color of) a notification indicator **154b**.

[0076] A user can drill down into a relevant application by selecting (clicking on) a more info selection (e.g., a more info selection **160a-b**). In some cases, a user may contact someone directly in response to a notification.

[0077] FIG. 1I is an illustration showing an example copilot UI (e.g., copilot UI **162**). For example, referring to FIG. 1C, a copilot application can be launched from the launchpad **112** when a user selects (clicks on) the copilot launch icon **113**. The copilot application can provide (generate and display) the copilot UI **162**. In some cases, the copilot UI **162** can float over the UI included in the launchpad **112**. As a floating UI control, the copilot UI **162** can be visually unobtrusive and flexible in its cross-functional omnipresent implementation across any device or application screen.

[0078] The example copilot UI **162** is an example copilot start page or start screen. The start screen (the copilot UI **162**) can be an entry point for copilot functionality for an enterprise system.

[0079] The copilot UI **162** can provide shortcuts to different copilot features. For example, as shown in FIG. 1I, a collection can be represented by an entry in a collection list **164** that includes collection list entries **164a-d**. A copilot collection can be a cluster of items in relation to a specific topic. For example, an item can be a note, a screenshot, a chat message, a copilot message, an object, or a quick create. In some implementations, the items included in the collection can be homogeneous (e.g., all of the items are of the same type). In some implementations, the items included in a collection can be non-homogeneous (e.g., the items can be of different types). Each collection list entry **164a-d** can provide a representation of a collection that can include a title, a timestamp (e.g., last changed), a visual content summary, and a textual content preview. In some implementations, the collection list **164** can be searched and/or filtered.

[0080] For example, the selection of a copilot shortcut **166a-d** can allow a user to create and navigate to a new collection with a specified intention. The selection of a copilot create icon **168** located in a copilot footer toolbar **170** can create and navigate to a new plain collection. The selection of a copilot settings icon **172** located in the copilot footer toolbar **170** can allow a user access to copilot settings (e.g., display a copilot settings UI, open a copilot settings application).

[0081] Copilot entries can be living, gradually growing artifacts and software entities that can accompany a user from the identification of an issue to a solution for the issue, while providing support in the form of relevant context and actions. Copilot entries can serve as memory aides while the copilot entries can incrementally evolve into valuable transactional tasks and collaborations as they mature in meaningful ways that bridge a gap between predefined application functionality and processes based on personal way of working for a user. Though the example shown in FIG. 1I describes launching the copilot application from the launchpad **112**, referring to FIG. 1A, the copilot application can be launched from other screens displayed in (included in) the shell main container **104**, the left container **102**, and/or the right container **106**.

[0082] Copilot entries can be made ready for users to use when communicating, collaborating, and creating actionable transactions in desktop or mobile scenarios. For example, copilot text entries can be analyzed for recognizing and identifying relevant text related objects. Copilot text entries can emphasize displayed text, and a copilot application can recommend contextual entities for use in a current task. The copilot application can understand user context and can intelligently propose selections, auto-entries, and user options.

[0083] A smart template can provide a framework for generating user interfaces (UI) at runtime for an enterprise application. For example, a smart template can be used to generate the UI for the overview page **120** as shown in FIG. 1D. For example, a smart template can be used to generate the UI for the object page **124** as shown in FIG. 1E. A smart template can provide a framework for generating the user interfaces based on metadata annotations and predefined templates for the most used application patterns. The use of smart templates can ensure design consistency by providing centralized high quality code that uses predefined templates and controllers. The use of smart templates can keep applications up to date with evolving design guidelines. The use of smart templates can reduce an amount of front-end code for building enterprise applications. The term “smart” can refer to annotations that add semantics and structures to provided data. The term “smart” can also refer to the way in which the templates understand the semantics. A goal for the use of smart templates is to ensure UI consistency along with increasing the efficiency of UI development.

[0084] FIG. 1J is an illustration of a timeline UI (e.g., the timeline **174**). A timeline UI (e.g., the timeline **174**) can display timeline entries **176a-e**. For example, the entries can be events, objects, and/or posts listed and displayed in a chronological order. The timeline **174** includes nodes **178a-d** that correspond to respective timeline entries **176a-d**.

[0085] The timeline **174** can be used for collaborative communications. The timeline **174** can be configured in multiple different ways depending on use case implementations. For example, the timeline **174** can provide information about changes of an object or about events related to an object. The timeline **174** can provide information about generated entries (e.g., value XY changed from A to B) or about manual entries (e.g., comments from an individual). In some implementations, the latest entry is at the top of a list displayed by a timeline. In some implementations, the timeline **174** can be displayed along with a business object. In some cases, the timeline **174** can be displayed to the right of the business object.

[0086] Two versions of a timeline can include a basic timeline and a social timeline. A basic timeline can be a read-only timeline. A social timeline can allow for interaction and collaboration among users.

[0087] FIG. 2 is a diagram of an example system **200** that can implement the user interfaces and user experiences described herein. The system **200** includes an enterprise computing system **202**, a network **204**, and client computing devices **206a-e**.

[0088] For example, computing device **206a** can be a mobile phone, a smartphone, a personal digital assistant, or other type of mobile computing device. The computing device **206a** includes a display device **220**. For example, computing device **206b** can be a laptop or notebook com-

puter. The computing device **206b** includes a display device **222**. For example, computing device **206c** can be a tablet computer. The computing device **206c** includes a display device **224**. For example, the computing device **206d** can be a wearable device such as a smartwatch. The computing device **206d** includes a display device **226**. For example, the computing device **206e** can be a desktop computer. The computing device **206e** can include a display device **228**. A user of the computing devices **206a-e** can use/interface with the display devices **220**, **222**, **224**, **226**, and **228**, respectively, when interacting with the enterprise computing system **202**. The computing devices **206a-e** can display on the display devices **220**, **222**, **224**, **226**, and **228** any of the screens and UIs described herein.

[0089] The enterprise computing system **202** can include one or more computing devices such as a web management server **214**, a frontend server **230**, a backend server **208**, and a mobile device management server **210**. The enterprise computing system **202** can also include a database management computing system **212** that includes a database management server **212a** and a database **212b**. Though not specifically shown in FIG. 2, each server (the web management server **214**, the frontend server **230**, the backend server **208**, the mobile device management server **210**, and the database management server **212a**) can include one or more processors and one or more memory devices. Each server can run (execute) a server operating system.

[0090] In some first implementations, the client computing devices **206a-d** (e.g., the mobile computing devices) can communicate with the enterprise computing system **202** (and the enterprise computing system **202** can communicate with the client computing devices **206a-d**) by way of the mobile device management server **210**. The mobile device management server **210** includes one or more mobile device platform application(s) **216**. By using the mobile device platform application(s) **216**, the enterprise computing system **202** can deliver cross-platform, secure, and scalable applications to the computing devices **202a-d**, independent of the mobile computing device-type (e.g., laptop, notebook, smartwatch, mobile phone, PDA, etc.) and independent of the operating system running on the computing device **206a-d**. In these implementations, the mobile device management server **210** can then communicate with the web management server **214**.

[0091] In some second implementations, the client computing devices **206a-e** (both the mobile computing devices (computing devices **206a-d**) and the desktop computing device **206e**) can communicate with the enterprise computing system **202** (and specifically with the web management server **214**), and the enterprise computing system **202** (and specifically with the web management server **214**) can communicate with each of the client computing devices **202a-e** using the network **204**. The web management server **214** includes a web dispatcher application **218**. In both the first implementations and the second implementations, the web dispatcher application **218** can act as a “software web switch” accepting or rejecting connections to the enterprise computing system **202**.

[0092] In some implementations, the network **204** can be a public communications network (e.g., the Internet, cellular data network, dialup modems over a telephone network) or a private communications network (e.g., private LAN, leased lines). In some implementations, the computing devices **206a-e** can communicate with the network **204**

using one or more high-speed wired and/or wireless communications protocols (e.g., 802.11 variations, WiFi, Bluetooth, Transmission Control Protocol/Internet Protocol (TCP/IP), Ethernet, IEEE 802.3, etc.).

[0093] The frontend server **230** can include product specific UI Add-On Applications **232** and a UI infrastructure **234**. The UI infrastructure **234** can include a design portion and a runtime portion. The frontend server **230** can decouple a lifecycle of a UI (e.g., design and runtime deployment) from the backend server **208**. The decoupling can allow UI applications to interface with a plurality of different databases. The decoupling provides a single point of UI design, access, and maintenance allowing for theming, branding, configuring, and personalizing a UI without a need for development privileges to the backend server **208** (e.g., no need to have backend administrative rights). The decoupling can result in a more secure enterprise computing system. The decoupling can provide for rule-based dispatching of requests in a multi-system landscape (e.g., for approvals including aggregation).

[0094] The frontend server **230** includes a gateway **236**. The gateway **236** can provide a way to connect devices, environments, and platforms to enterprise software based on market standards. The gateway **236** can enable the development of UIs for use in different environments (e.g., social and collaboration environments). The gateway **236** can enable the development of UIs for use on different types of client computing devices (e.g., client computing devices **206a-e**). The gateway **236** can enable the development of UIs for use in internet-based applications.

[0095] The front end server **230** can access one more databases or repositories (e.g., database **246**). The database **246** can include (store) smart templates for use in creating UIs for an enterprise application at runtime. The backend server **208** can include a bundle (a set) of business applications (e.g., business suite **238**). The business applications can be transactional applications, analytical applications, and fact sheet and contextual navigation applications. Transactional applications can allow task-based access to tasks that can include create and change. In addition or in the alternative, transactional applications can allow access to entire processes with guided navigation. Analytical applications can provide a user with a visual overview of complex tasks for monitoring and tracking purposes. Fact sheet applications and contextual navigation applications involve search and explore activities. Fact sheet applications and contextual navigation can allow a user to view essential information about an object and can allow contextual navigation between related objects.

[0096] The database management computing system **212** includes a database management server **212a** that can run (execute) applications that can manage a database **212b**. For example, the database **212b** can be an in-memory, column-oriented, relational database (e.g., SAP HANA®). The database management computing system **212** can include extended application services **240** that can embed a full featured application server, web server, and development environment within the database management computing system **212**. The extended application services **240** can include application content **242** and reuse content **244** for use by the enterprise computing system **202** when providing a personalized, responsive, and simple UX across different types of computing devices and deployment options.

[0097] Smart templates can provide a configurable set of pre-defined building blocks that can be referred to as user interface (UI) floorplans. The UI floorplans can provide a framework for generating user interfaces at runtime by applying a metadata driven approach to user interface design and development for an enterprise application. The use of UI floorplans can reduce an amount of frontend code needed for building applications that include user interfaces. Smart templates can foster user interface design consistency within an enterprise application. Because the UI floorplans included in the smart templates can provide a framework for generating user interfaces at runtime, the user interfaces included in an enterprise application can be updated with evolving user interface design guidelines.

[0098] A smart template facility can reside or operate within a user interface on any type of target computing device (e.g., computing devices 206a-e). A smart template facility can dynamically adjust or adapt aspects of a smart template to account for particulars (e.g., hardware and/or software (e.g., operating system)) of a target computing device (e.g., display real estate, display size, display resolution, input mechanism(s), input devices (e.g., keyboard, mouse, microphone, touchpad, trackpad), output devices (e.g., speakers)).

[0099] FIG. 3 is a block diagram illustrating an example general aspect 300 of incorporating smart templates in an enterprise application. For example, a team of software developers (e.g., backend developer(s), UI developer(s), and template developer(s)) can create a data model 302 and smart templates 304. In addition, a team of designers can also assist in the creation of the smart templates 304. The data model 302 can define the semantics of the data for use by the enterprise application. The semantics for the data can include, but is not limited to, data types, information structure, and relations. The smart templates 304 can be created for commonly used page types, layouts, and compositions for the enterprise application. A UI developer can compose (composition 306) a UI 308 for the enterprise application by combining the smart templates 304 with the data using the data model 302. In addition, the developer can fine tune the UI to include configuration and freestyle development where needed. For example, a UI can be based on a smart template and can include one or more template items as well as user customizable additional aspects of the UI (e.g., freestyle development elements). For examples, referring to FIG. 2, the smart templates 304 and the data model 302 can be included (stored) in the database 246 for use by the frontend server 230 when a UI is composed. The data model 302 can be applied to data included in the database 212b.

[0100] FIGS. 4A-H show block diagrams illustrating development steps for user interface design and development for an enterprise application using smart templates. The UI design and development for the enterprise application can be included in an enterprise web integrated development environment (IDE). The enterprise web IDE can execute (run) in a web browser application executing (running) on a computing device of a developer. The enterprise web IDE can be considered a wizard for creating a new project that can incorporate smart template(s). The computing devices can be, for example referring to FIG. 2, one or more of the computing devices 206a-e. The computing devices 206a-e can communicate with the frontend server 230 using the network 204. The UI infrastructure 234 can include a design portion and a runtime portion. Referring to

FIGS. 2 and 3, the frontend server 230 can decouple the design and runtime deployment from the backend server 208 allowing UI applications to interface with a plurality of different databases that can include data used by a data model (e.g., the data model 302) when composing the UI using smart templates (e.g., the smart templates 304).

[0101] FIG. 4A illustrates example projects 402a-c for use in creating and generating an enterprise application. An example first step 400 in the creation of the enterprise application that uses smart templates is the selection of a new project from a template (project 402a). For example, a developer interfacing with the enterprise web IDE can select (e.g., point to and click on) the project 402a. Smart templates can incorporate the latest design and UX building blocks of a UI for the enterprise application. Smart Templates can provide the most used application patterns. A smart template can provide a framework for generating a fully functional UI for the enterprise application at runtime (e.g., example UI 306 as shown in FIG. 3C).

[0102] FIG. 4B illustrates example template applications 412a-e for use in creating and generating an enterprise application. The template applications 412a-e can be shown in a template selection tab (web page) 411 of the enterprise web IDE executing in the web browser. An example second step 410 in the creation of the enterprise application that uses smart templates is the selection of the smart template application 412a. The template applications 412a-e can incorporate the latest enterprise application design and UX. The selection of a template application can create an enterprise application that is based on one or more predefined template views and controllers. The one or more predefined template views and controllers can use Open Data Protocol (OData) services and annotated files. The use of OData services can allow for the execution of enterprise applications in a scalable and cost-effective manner in a cloud computing environment (e.g., the example system 200) by following protocols defined in the OData services. In general, smart templates can use (interface with) OData services to build user interfaces (UIs) for a simplified user experience (UX) across digital assets defined in applications and interfaces across multiple platforms (e.g., UI technologies such as HTML5/SAP.UI5, WebDynPro, WebGUI, and SAPGUI, etc.).

[0103] Once a template application is selected, a next button 414 can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button 416 can be selected in order to return to a previous step (e.g., the example first step 400 as shown in FIG. 4A).

[0104] FIG. 4C illustrates example information for use in creating and generating an enterprise application. The information can be shown in a basic information tab (web page) 421 of the enterprise web IDE executing in the web browser. An example third step 420 in the creation of the enterprise application that uses smart templates is the entering of basic information and application descriptor data (app descriptor data 422a-f) for use by the smart template application. For example, a project name can be entered in a project name data entry field 428. The app descriptor data can provide a central, machine readable, and easily accessible location in a database for storing metadata associated with an application or an application component. The app descriptor data can include, but is not limited to, application specific attributes, UI specific attributes, and platform specific attributes.

For example, the metadata can include, but is not limited to, the app descriptor data as entered in app descriptor data entry fields **422a-f** as shown in FIG. 4C. The app descriptor data entry fields **422a-f** can include, but are not limited to, a title field **422a**, a namespace field **422b**, a description field **422c**, an application component hierarchy field **422d**, an enterprise application identifier (ID) field **422e**, and a development path field **422f**.

[0105] Once the basic information is entered, a next button **424** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **426** can be selected in order to return to a previous step (e.g., the example second step **410** as shown in FIG. 4B).

[0106] FIG. 4D illustrates example data connection information that includes example annotated OData sources **440a-d** and example core data services (CDS) **432a-d** for selection when creating and generating an enterprise application. The example core data services (CDS) **432a-d** can be shown for selection in a data connection tab (web page) **431** of the enterprise web IDE executing in the web browser. An example fourth step **430** in the creation of the enterprise application that uses smart templates is the selecting of a **000_UIA** (Smart Templates) CDS **432c**. As shown in FIG. 4D, the **000_UIA** (Smart Templates) CDS **432c** can be selected from the drop-down menu of services (e.g., service information **438**). For example, the services listed in the drop-down menu of services can be based on the annotated OData sources.

[0107] Once the data connection information is entered, a next button **434** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **436** can be selected in order to return to a previous step (e.g., the example third step **420** as shown in FIG. 4C).

[0108] FIG. 4E illustrates example data connection information that includes example OData services **442a-c** for selection when creating and generating an enterprise application that uses the selected **000_UIA** (Smart Templates) CDS **432c**. For example, the example OData services **442a-c** can be specific OData services included in the **000_UIA** (Smart Templates) CDS **432c**. The example OData services **442a-c** can be shown for selection in a data connection tab (web page) **451** of the enterprise web IDE executing in the web browser. An example fifth step **450** in the creation of the enterprise application that uses smart templates is the selecting of an OData service (e.g., the OData service **442c**) for use with a core data service (e.g., core data service **432a**).

[0109] Once the data connection information is entered, a next button **444** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **446** can be selected in order to return to a previous step (e.g., the example fourth step **430** as shown in FIG. 4D).

[0110] FIG. 4F illustrates example data connection information that includes example annotated OData services **462a-c** for selection when creating and generating an enterprise application that uses the selected **000_UIA** (Smart Templates) CDS **432c** and a selected state OData service **468**. For example, the example annotated OData services **462a-c** can be specific annotated OData services included in the state OData service **468** for the **000_UIA** (Smart Templates) CDS **432c**. The example annotated OData services **462a-c** can be shown for selection in a data connection tab

(web page) **461** of the enterprise web IDE executing in the web browser. An example sixth step **460** in the creation of the enterprise application that uses smart templates is the selecting of an annotated OData service (e.g., the annotated OData service **462b**) for use with an OData service (e.g., the state OData service **468**) for a core data service (e.g., core data service **432a**).

[0111] Once the data connection information is entered, a next button **464** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **466** can be selected in order to return to a previous step (e.g., the example fifth step **450** as shown in FIG. 4E).

[0112] FIG. 4G illustrates example annotated files **472a-b** for use when creating and generating an enterprise application. The example annotated files **442a-b** are shown in an annotation selection tab (web page) **471** of the enterprise web IDE executing in the web browser. An example seventh step **470** in the creation of the enterprise application that uses smart templates is the adding and ranking of annotated files (e.g., the annotated files **472a-b**). The annotation files **472a-b** are selected and then ranked in an order in which they will be loaded by the smart template application. In some cases, if the annotation files **472a-b** overlap, the annotation file last loaded will overwrite any previously loaded annotation files. A selected service (e.g., as shown in FIG. 4F) can include annotated data.

[0113] Once the annotation selection information is entered, a next button **474** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **476** can be selected in order to return to a previous step (e.g., the example sixth step **460** as shown in FIG. 4F).

[0114] FIG. 4H illustrates example template customizations for use when creating and generating an enterprise application. The example template customizations are shown in a template customization tab (web page) **481** of the enterprise web IDE executing in the web browser. An example eighth step **480** in the creation of the enterprise application that uses smart templates is the selecting and specifying of data binding services in order to customize the smart template application and the subsequent smart template created by the smart template application. OData collection services (e.g., OData collection service **482**) and OData navigation services (e.g., OData navigation service **490**) are selected that can provide the binding of the data to the smart template application.

[0115] Once the template customization information is entered, a next button **484** can be selected in order to proceed to the next step in the creation of the enterprise application that uses smart templates. In some cases, a previous button **486** can be selected in order to return to a previous step (e.g., the example seventh step **470** as shown in FIG. 4G). In some cases, a finish button **488** can be selected. For example, a developer can select to execute (run) the smart template application from a developer dashboard or UI provided on a computing device. The smart template application can create (generate) a smart UI as shown, for example in FIG. 5A.

[0116] FIG. 5A shows an example UI **500** for an enterprise application that utilizes a smart template. For example, referring to FIG. 2, a user of a desktop computing device (e.g., the computing device **206e**) can view the UI **500** on a screen of a display device (e.g., the display device **228**). The example UI **500** as shown in FIG. 5A can be for a list report

of the enterprise application. The UI **500** includes a smart table (e.g., table **502**) that includes semantic information for data included in (displayed in) or associated with the UI **500**. The UI **500** also includes additional semantic information.

[0117] The UI includes a search field **516**. The search field **516** can define if there is a search on an entity. The UI **500** includes semantics for defining the type of table (e.g., the table **502**) that is used in the smart template for the UI **500**. For example, a line item annotation semantic for the table **502** can define which columns are visible in a default result set of the table **502**. For example, a selection fields annotation can define what fields are shown (displayed in the UI **500**, included in the UI **500**) in a filter bar **518** included in the UI **500**. The UI **500** includes fields with field labels **506a-c** that are displayed in the UI **500**. For example, a header information annotation can define the text for a table header (e.g., a table header **521**).

[0118] The UI **500** includes selection fields **508a-c** associated with each field label **506a-c**, respectively. A user can select (or enter) information in the selection fields **508a-c** related to data for display in the table **502** that is associated with a respective field included in the table **502**. The UI **500** includes links to value lists (e.g., links **510a-b**) that are associated with a respective selection field (e.g., selection fields **508b-c**, respectively) for a respective field label (e.g., field labels **506b-c**, respectively).

[0119] Individual code fields can be linked text fields **512a-c**. For example, a user can select a text field and be directed to a code field for the smart table entry. The smart table **502** can include line item fields **514a-c**.

[0120] The table **502** can be considered a responsive table because one or more fields included in the table (e.g., a price field **504**) if selected can provide an additional example UI **500** (another smart UI) as shown in FIG. **5B**.

[0121] For example, a user can select the price field **504** in the UI **500**. Based on the use of a smart template for the UI **500**, FIG. **5B** shows another example UI **530** for an enterprise application that utilizes a smart template. Responsive to the selection of the price field **504**, the UI **530** is displayed. The UI **530** includes a user interface that allows for entry and interaction with data associated with a price for a product (e.g., the price as shown in a price field **532** for the product named Product **26**). The information and data associated with the product can include general information **534** and a second facet **536** of data and information. The semantic information included in the UI **500** can include, but is not limited to, references between fields (e.g. Code→Text, Amount→Currency, Quantity→Unit, etc.), references from fields to data sources (e.g., Value Help, Data Navigation (Master-Detail), etc.), field purpose (e.g., selection, lineitem), field decoration (e.g., label), field control (e.g., mandatory, optional, readonly, hidden, etc.), and data purpose (e.g., contact data, address data, etc.).

[0122] FIG. **5C** is a block diagram showing a layout **550** for a UI based on the use of a smart template. For example, the layout **550** can be a smart template list report layout (a list report floorplan). The layout **550** can be used for the example UI **500** shown in FIG. **5A** which can be for a list report of the enterprise application. The layout **550** includes an application header **552** showing a name for the application (e.g., application header **520**). The layout **550** includes a smart filter bar with variant management **554** (e.g., the filter bar **518**). The layout **550** includes a table toolbar **556** (e.g., table toolbar **522**). A table toolbar can provide for

generic and application specific actions. The layout **550** includes a smart table with layout management **558** (e.g., the smart table **502**). The layout **550** can include a footer toolbar **560** (e.g., the footer toolbar **132** as shown in FIG. **1F**).

[0123] FIG. **6** shows example source code **600** for an example core data service (CDS) for a product view (e.g., the product view as shown in FIG. **5A**) that includes semantic information. The source code **600** includes code for a line item field **602** and a selection field **604**. The source code **600** includes code for an amount linked to currency **606**, a field control **608**, and field semantics **612**. The source code **600** includes code for a link to a value list **610**.

[0124] FIG. **7A** is a block diagram illustrating layering and sources of annotations **700** for use in smart templates. The layers include a UI tier **702**, a UI integration tier **704**, an application tier **706**, and a database tier **708**. The UI tier **702** includes an enterprise application **710** and an OData model **712**. The UI tier **702** can be considered as a layer on top of the UI integration tier **704**. The UI tier **702** can provide the smart template **710** and the OData model **712** for use in creating a UI based on a smart template. The UI integration tier **704** can provide local application scope by providing the functionality and development tools needed by a developer when for interfacing between the application tier **706** and the UI tier **702** when using smart templates.

[0125] The smart template **710** can access and execute a javascript file (e.g., .js file **714**). The enterprise smart template **710** can execute the .js file to run client side JavaScript code in a web page of a web browser. The enterprise application **718** including the smart template **710** can include a view template and controller logic that can evaluate annotations at runtime. The OData model **712** includes data and merged annotations from application specific views included in an application view **720** of the application tier **706**. The OData model **712** can interface with HyperText Markup Language (html) files (e.g., a .html file **716**) included in the UI integration tier **704** providing the semantic and annotations needed to the html elements included in the .html file **716**. The .html file **716** includes markup language for rendering a web page for the enterprise application **718** using the smart template **710**. A web IDE **722** included in the UI integration tier **704** can execute (run) in a web browser application executing (running) on a computing device of a developer. A developer can interface with the web IDE **722** when creating a new project that incorporates at least one smart template (e.g., the smart template **710**) in an enterprise application (e.g., the enterprise application **718**). In some implementations, the OData model **712** can be interfaced to the web IDE **722**.

[0126] The web IDE **722** can access one or more core data services (CDS) in a CDS view hierarchy **724** included in the application tier **706** for selection by a developer when creating an enterprise application (e.g., the enterprise application **718**) that includes a smart template (e.g., the smart template **710**). The core data services can provide the web IDE **722** with a shared data model that includes annotations across all enterprise applications. The database tier **708** can include one or more tables (e.g., table(s) **726**) that include data for use by a smart templates (e.g., the smart template **710**). A direction of increased annotation propagation (e.g., as shown by arrow **728**) starts from the tables **726** included in the database tier **708** and increases through the CDS view hierarchy **724** to the application view **720**. In some imple-

mentations, the more generic the semantic information included in a core data service, the deeper down (the lower) the location of the core data service in the CDS view hierarchy **724**. CDS propagation of annotations can increase the consistency and development efficiency for an enterprise application that uses smart templates. In some implementations, generic defaults can be overridden with more specific annotations at an upper layer of the UI development tier (e.g., in the UI integration tier **704**). The application tier **706** can include a gateway **730**. The gateway **730** can allow for the connecting of devices, environments, and other platforms the application tier **706**.

[0127] FIG. 7B is a block diagram illustrating how smart templates work, showing application developer design time aspects of the development process and runtime aspects of the development process. At application development design time, platform specific tools **742** that include service and metadata definitions **744** can provide OData service and annotations to a web IDE (e.g., the web IDE **722** as shown in FIG. 7A). The web IDE can include an annotation editor plugin **746** and a project template wizard **748**. As described, the web IDE **722** can use the project template wizard **748** to create a new project that incorporates smart template(s). The web IDE **722** can use the annotation editor plugin **746** when incorporating a smart template in a project. At runtime, a user experience (UX) and central template development **750** can interface with (use) one or more xml view templates (one or more smart templates) **752**. For example, the xml view templates **752** can use smart controls. Application development **754** can interface with (use) OData services **756** along with OData annotations **758** in the xml view template **752** to create (generate) one or more views **760** (e.g., user interfaces) for an enterprise application.

[0128] Smart templates can be used to create enterprise application based on OData services and annotations that may not require JavaScript UI coding. An enterprise application based on smart templates can use predefined template views and controllers that can be centrally provided. As such, no application specific view instances are required. A runtime can interpret metadata and annotations of an underlying OData service. The runtime can use corresponding views for the enterprise application in a UI for the enterprise application at the startup of the execution of the enterprise application.

[0129] Predefined view templates and controllers can ensure UI design consistency across enterprise applications. A metadata driven development model can reduce an amount of frontend code needed per enterprise application, relying instead on commonly shared already existing and available code.

[0130] For example, smart templates can be applied to the development of UIs for a full screen application, a list report, an object page (e.g., the object page **124** as shown in FIG. 1E), an overview page (e.g., the overview page as shown in FIG. 1D), a draft, a nondraft, and a global edit flow.

[0131] FIGS. 8A-F show smart templates as applied to the development of an object page. FIG. 8A is an example of an object page **802**. FIGS. 8B-F show example annotations to one or more fields included in the UI for the object page **802** that provide the smart controls included as part of the smart template for the object page **802**. FIG. 8B shows a header annotation **840** for a header information fields **810a-c**, a product category annotation **842** for a product category field **812**, and a product price annotation **844** for a product price

field **814**. FIGS. 8C-D shows UI facets annotations **846a-b** for UI facet fields **816a-f**. FIG. 8E shows a UI annotation **848** for a UI general information field **818** and a price annotation **850** for price field **820**. FIG. 8F shows a text annotation **852**, a contact annotation **854**, and a navigation annotation **856** for a text field **822**, a contact field **824**, and a navigation field **826**, respectively.

[0132] FIGS. 9A-D show smart templates as applied to the development of a list report. FIG. 9A is an example of a list report **902**. FIGS. 9B-D show example annotations to one or more fields included in the UI for the list report **902** that provide the smart controls included as part of the smart template for the list report **902**. FIG. 9B shows a search annotation **930** for a search field **910** and a category annotation **932** for a category field **912**. FIG. 9C shows a line item annotation **934** for a UI copy control **914** and a capabilities annotation **936** for a UI insert control **916**. FIG. 9D shows a line item annotation **938** for a general information field **918**, a text annotation **940** for a text field **920**, and a currency annotation **942** for price field **922**.

[0133] FIG. 10 shows another smart template as applied to the development of a list report **1002**. FIG. 9A can show a smart template for viewing on a display device included in a first type of computing device. FIG. 10 can show a smart template for viewing on a display device included in a second type of computing device. For example, the list report **902** can be the same list report **1002**, where each list report **902**, **1002** is viewed on a different type of display device. Referring to FIG. 2, the list report **902** can be viewed on the display device **228** included in the computing device **206e** (e.g., a desktop computing device) while the list report **1002** can be viewed on the display device **220** included in the computing device **206a** (e.g., a mobile computing device). The use of smart templates for the list report allows the list report to be easily and properly displayed on each of the display devices **228** and **220** without the need for special code. By using smart templates, UI consistency can be ensured with increasing efficiency of UI development over a plurality of different display devices and computing devices.

[0134] FIG. 11 is a block diagram of a flowchart showing an example method **1100** for implementing the creation of an enterprise application that utilizes smart templates. In some implementations, the systems and processes described herein can implement the method **1100**.

[0135] A selection of a project for creating using a template is received (block **1102**). A selection of an application for the project is received (block **1104**). Information for associating with the application is received (block **1106**). A selection of a data source is received (block **1108**). A selection of a core data service from a group of core data services associated with the data source is received (block **1110**). The core data service can utilize a smart template. A selection of a data service that utilizes the selected core data service is received (block **1112**). A selection of an annotated data service is received (block **1114**). The enterprise application is created (block **1116**). The creating of the enterprise application can be based on the smart template. The creating of the enterprise application can utilize the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

[0136] Smart templates can offer one or more of the following features: reuse functionality that may not require

specific programming; a common look and feel and UI behavior across all enterprise applications; edit mode control that allows for switching between display and edits modes and submitting changes; message handling; launchpad integration; support for flexibility services; use of a web IDE for creation of the enterprise application; the control of the UI by smart templates using OData annotations which can semantically enrich OData metadata; multi-device support (e.g., support for multiple different types of computing devices that can include different type of display devices (e.g., the computing devices 206a-e and respective display devices 220, 222, 224, 226, and 228)); the use of status colors and icons in a smart template that can indicate level of criticality; header facets that can define the information to display in a header for the UI; help with values included in the UI; handling of draft documents including draft saving; the ability to extend a header area of an object page that uses a smart template; the support of multi-select using a new setting included in a list report that uses a smart template; support for smart link navigation for object pages that use a smart template where the smart link is in a smart table that passes a header parameter; and a drop-down menu for filtering edit states.

[0137] In some implementations, annotated OData services can be derived from the core data services for reuse, productivity, and consistency. The annotations can describe the semantics related to data for use by the smart template application. The use of smart templates refers to the annotations and the way in which the templates understand the semantics described by the annotations. The annotated services can connect a frontend of a UI for the enterprise application to a backend of the UI for the enterprise application.

[0138] Various implementations of the systems and techniques described here can be realized in digital electronic circuitry, integrated circuitry, specially designed ASICs (application specific integrated circuits), computer hardware, firmware, software, and/or combinations thereof. These various implementations can include implementation in one or more computer programs that are executable and/or interpretable on a programmable system including at least one programmable processor, which may be special or general purpose, coupled to receive data and instructions from, and to transmit data and instructions to, a storage system, at least one input device, and at least one output device.

[0139] These computer programs (also known as programs, software, software applications or code) include machine instructions for a programmable processor, and can be implemented in a high-level procedural and/or object-oriented programming language, and/or in assembly/machine language. As used herein, the terms “machine-readable medium” “computer-readable medium” refers to any computer program product, apparatus and/or device (e.g., magnetic discs, optical disks, memory, Programmable Logic Devices (PLDs)) used to provide machine instructions and/or data to a programmable processor, including a machine-readable medium that receives machine instructions as a machine-readable signal. The term “machine-readable signal” refers to any signal used to provide machine instructions and/or data to a programmable processor.

[0140] To provide for interaction with a user, the systems and techniques described here can be implemented on a computer having a display device (e.g., a CRT (cathode ray

tube) or LCD (liquid crystal display) monitor) for displaying information to the user and a keyboard and a pointing device (e.g., a mouse or a trackball) by which the user can provide input to the computer. Other kinds of devices can be used to provide for interaction with a user as well; for example, feedback provided to the user can be any form of sensory feedback (e.g., visual feedback, auditory feedback, or tactile feedback); and input from the user can be received in any form, including acoustic, speech, or tactile input.

[0141] The systems and techniques described here can be implemented in a computing system that includes a back end component (e.g., as a data server), or that includes a middle-ware component (e.g., an application server), or that includes a front end component (e.g., a client computer having a graphical user interface or a Web browser through which a user can interact with an implementation of the systems and techniques described here), or any combination of such back end, middleware, or front end components. The components of the system can be interconnected by any form or medium of digital data communication (e.g., a communication network). Examples of communication networks include a local area network (“LAN”), a wide area network (“WAN”), and the Internet.

[0142] The computing system can include clients and servers. A client and server are generally remote from each other and typically interact through a communication network. The relationship of client and server arises by virtue of computer programs running on the respective computers and having a client-server relationship to each other.

[0143] A number of embodiments have been described. Nevertheless, it will be understood that various modifications may be made without departing from the spirit and scope of the invention.

[0144] In addition, the logic flows depicted in the figures do not require the particular order shown, or sequential order, to achieve desirable results. In addition, other steps may be provided, or steps may be eliminated, from the described flows, and other components may be added to, or removed from, the described systems. Accordingly, other embodiments are within the scope of the following claims.

What is claimed is:

1. A method for creating an enterprise application comprising:

- receiving, by a computing device, a selection of a project for creating using a template;
- receiving, by the computing device, a selection of an application for the project;
- receiving information for associating with the application;
- receiving a selection of a data source;
- receiving a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template;
- receiving a selection of a data service that utilizes the selected core data service;
- receiving a selection of an annotated data service; and
- creating the enterprise application, the creating being based on the smart template and the creating utilizing the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

2. The method of claim 1, wherein the creating of the enterprise application is performed using a web Integrated Development Environment (IDE).

3. The method of claim 2, wherein the web IDE executes on a web browser executing on the computing device.

4. The method of claim 3, wherein the data source, the core data service, the data service, and the annotated data service are included for selection in a data connection tab of the web IDE.

5. The method of claim 1, where the data source is an annotated Open Data Protocol (OData) source.

6. The method of claim 1, wherein the application is a smart template application; wherein the data service is an OData service; wherein the annotated service is an OData annotated service; and wherein the smart template application uses predefined template views and controllers that use the OData service and the OData annotated service.

7. The method of claim 6, wherein the OData annotated service adds semantics and structures to data provided by the data source.

8. The method of claim 6, wherein the smart template application uses the predefined template views and controllers at runtime to generate at least one view for the enterprise application.

9. A non-transitory, machine-readable medium having instructions stored thereon, the instructions, when executed by a processor, cause a computing device to:

receive a selection of a project for creating using a template;
 receive a selection of an application for the project;
 receive information for associating with the application;
 receive a selection of a data source;
 receive a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template;
 receive a selection of a data service that utilizes the selected core data service;
 receive a selection of an annotated data service; and
 create an enterprise application, the creating being based on the smart template and the creating utilizing the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

10. The medium of claim 9, wherein the instructions when executed by the processor further cause the computing device to create the enterprise application using a web Integrated Development Environment (IDE).

11. The medium of claim 10, wherein the instructions when executed by the processor that further cause the computing device to create the enterprise application using a web Integrated Development Environment (IDE) execute on a web browser executing on the computing device.

12. The medium of claim 11, wherein the data source, the core data service, the data service, and the annotated data service are included for selection in a data connection tab of the web IDE.

13. The medium of claim 9, where the data source is an annotated Open Data Protocol (OData) source.

14. The medium of claim 9, wherein the application is a smart template application; wherein the data service is an OData service; wherein the annotated service is an OData annotated service; and

wherein the smart template application uses predefined template views and controllers that use the OData data service and the OData annotated service.

15. The medium of claim 14, wherein the OData annotated service adds semantics and structures to data provided by the data source.

16. The medium of claim 14, wherein the smart template application uses the predefined template views and controllers at runtime to generate at least one view for the enterprise application.

17. A system comprising:
 at least one memory including instructions on a computing device; and

at least one processor on the computing device, wherein the processor is operably coupled to the at least one memory and is arranged and configured to execute the instructions that, when executed, cause the processor to implement:

receiving, by the computing device, a selection of a project for creating using a template;
 receiving, by the computing device, a selection of an application for the project;
 receiving information for associating with the application;
 receiving a selection of a data source;
 receiving a selection of a core data service from a group of core data services associated with the data source, the core data service utilizing a smart template;
 receiving a selection of a data service that utilizes the selected core data service;
 receiving a selection of an annotated data service; and
 creating an enterprise application, the creating being based on the smart template and the creating utilizing the received information for associating with the application, the data source, the core data service, the data service, and the annotated data service.

18. The system of claim 17, wherein the application is a smart template application; wherein the data service is an OData service; wherein the annotated service is an OData annotated service; and

wherein the smart template application uses predefined template views and controllers that use the OData data service and the OData annotated service.

19. The system of claim 18, wherein the OData annotated service adds semantics and structures to data provided by the data source.

20. The system of claim 18, wherein the smart template application uses the predefined template views and controllers at runtime to generate at least one view for the enterprise application.

* * * * *