



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A61F 2/38	A1	(11) International Publication Number: WO 92/03108 (43) International Publication Date: 5 March 1992 (05.03.92)
(21) International Application Number: PCT/GB91/01446 (22) International Filing Date: 28 August 1991 (28.08.91) (30) Priority data: 9018782.4 28 August 1990 (28.08.90) GB (71) Applicant (for all designated States except US): BRITISH TECHNOLOGY GROUP PLC [GB/GB]; 101 Newington Causeway, London SE1 6BU (GB). (72) Inventors; and (75) Inventors/Applicants (for US only) : GOODFELLOW, John, William [GB/GB]; 6 Nourse Close, Woodeaton, Oxfordshire OX3 9TJ (GB). O'CONNOR, John, Joseph [GB/GB]; 9 Beaumont Road, Halton, Oxfordshire OX3 9JN (GB).		(74) Agent: PARKER, Geoffrey; Patents Department, British Technology Group plc, 101 Newington Causeway, London SE1 6BU (GB). (81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US. Published <i>With international search report.</i>
(54) Title: PROSTHETIC FEMORAL COMPONENTS 		
(57) Abstract A prosthetic femoral component of tricompartmental form has tibial facet surfaces (21) of like spherical shape and a patellar facet groove (31) of circular arcuate longitudinal shape, the latter having a slightly larger radius of curvature than the former, by about 1.2:R, and with the centre of curvature (34) of the latter being respectively off-set by about 0.4R and 0.6R superiorly and anteriorly relative to those (26) of the former as seen in a lateral aspect.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	⁴ SU ⁺	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE*	Germany	MC	Monaco	US	United States of America
DK	Denmark				

⁺ Any designation of "SU" has effect in the Russian Federation. It is not yet known whether any such designation has effect in other States of the former Soviet Union.

- 1 -

PROSTHETIC FEMORAL COMPONENTS

This invention concerns prosthetic femoral components of tricompartmental form for replacement of the patellar facet and both tibial facets of the distal femur.

Components of this kind have been in routine use for some
05 years, typically, although not exclusively, for total knee joint replacement in association with other components to replace the femoral facets of the proximal tibia and also the femoral facet of the patella. However, there is a current concern with the rates of failure found to arise with such other components due to
10 various causes.

An object of the present invention is to reduce these failure rates and pursuit of this objective finds its basis in an on-going programme of development and analysis which began in the early 1970s. The first practical result of this programme was a
15 proposal for an improved knee joint device, described in GB Patent No. 1,534,263, involving femoral, tibial and meniscal components co-operable to allow movement closely simulating that of the natural joint in flexion-extension and, at the same time, congruence at the articulation interfaces of the device. A
20 feature of this proposal was that the femoral components could have spherically shaped tibial facets.

It has, since then, been found that the tibial facets in the natural femur in fact closely approximate spherical shaping. More recently, it has been found that the sulcus of the trochlea,
25 the base of the patellar facet of the distal femur, closely approximates circular arcuate shaping in the sagittal plane. Most recently, it has been found that there is a sufficiently predetermined relationship between the dimensions and spacing of these shapings to allow adoption of the same in a
30 tricompartmental femoral component.

One benefit of such a component is that it further extends the possibilities for knee joint replacement while attaining benefits similar to those of the above mentioned patent, that is

- 2 -

to say, a capability for closer simulation of natural femoral shaping as well as close simulation of natural movement with a high degree of congruence at articulation interfaces. Another benefit is that production of such a component is facilitated by
05 simplification of its geometry relative to prior art tricompartmental femoral components in current use whereby, when made in metal as will normally be the case, the former is more readily amenable to finish machining while the latter is usually polished directly from a cast form.

10 In any event, a tricompartmental femoral component according to the present invention comprises an integrated body defining two articulation surfaces of spherical shape in spaced side-by-side disposition to assume the roles of respective tibial facets, and a further articulation surface in the form of a
15 groove extending longitudinally in off-set manner sagittally between said two surfaces to assume the role of patellar facet, said groove having circular arcuate longitudinal shape.

In terms of dimensions, the spherical shapes are preferably of the same radius of curvature as each other and the circular
20 arcuate shape is of the same order of radius. As presently contemplated the arcuate shape will normally be of greater radius than the spherical shape by a minor proportion of the latter, suitably at about 1.2:1.

In terms of spatial relationship, the centres of the
25 spherical shapes are coincident as seen in a lateral aspect, with the centre of the arcuate shape being relatively off-set by about 0.4R superiorly and 0.6R anteriorly, where R represents the radius of the spherical shapes, and the arcuate shape is essentially centrally located between the spherical shapes when
30 viewed along a sagittal direction with the centres of the latter spaced by about 2.3R.

The transverse cross-section of the groove may be of circular, rounded triangular or other shape to accommodate the natural patella or a patellar component.

- 3 -

These features of the present invention are exemplified by way of an initial embodiment of the latter illustrated in the accompanying drawings, in which:-

05 Figures 1, 2 and 3 diagrammatically illustrate the same respectively in a cross-section taken at 1-1 in Figure 3, front elevation and rear elevation.

The illustrated component embodiment is denoted generally at 10 and is essentially comprised of three parts 20,30,20.

10 Parts 20 are of like form and correspond with unicompartmental femoral components according to Patent Specification No. GB 2215610A with each having a spherical articulation surface 21 to act as a tibial facet and a remaining surface 22 adapted for securement with bone. Surface 22 has spherical and planar portions 23,24 as taught by said
15 Specification and may also, as indicated in broken outline in Figure 1, have a pin 25. Parts 20 are of generally strip form disposed in spaced side-by-side manner, interconnected by way of part 30.

20 Part 30 is also of general strip form and it is disposed in side-by-side manner between parts 20, but off-set in a generally longitudinal sense relative to the strip forms. Part 30 is longitudinally curved in circular arcuate manner and defines a grooved articulation surface 31 on the same side of the component as surfaces 21, which surface acts as a patellar facet. This
25 grooved surface 31 has a circular arcuate cross-sectional shape. The remaining surface 32 has a substantially cylindrical shape, although the free end portion at 33 is straightened to a planar form diverging slightly from a disposition parallel with the planar portions of surfaces 22.

30 In one size of this embodiment the spherical and arcuate surfaces 21 and 31 have respective radii of 24 mm and 28 mm, the respective centres 26 and 34 are spaced by 10 mm vertically and 14 mm horizontally as seen in Figure 1, and the centres 26 are spaced by 45 mm as seen in Figure 2. The cross-section of

- 4 -

surface 31 has a radius of 25 mm. The divergence between surface portions 24 and 33 is about 3°.

These details relate to other dimensions proportioned essentially as illustrated, with part 30 having a width of 25 mm as seen in Figure 2, and suit a particular size of knee. Other sizes of knee may be catered for on a simple proportionate basis. Alternatively, other sizes may involve proportionate changes only in part, to embrace the relative spacing of surfaces 21 and 31, but without corresponding changes in curvature for such surfaces.

Application of an embodiment such as illustrated can be effected by modification of the techniques proposed for a unicompartmental femoral component in the above-mentioned Specification. Certainly parts 20 can be applied in this way with femoral site preparation in the areas concerned being coordinated by way of an intramedullary nail as a reference member for the relevant tooling. Site preparation to receive part 30 can be similarly coordinated in that it involves rotary and plane cutting, suitably with end mills, of predetermined geometry relative to such a reference member.

The geometry of the embodiment is equally such that component production is facilitated. This is particularly so for the articulation surfaces which can be finish machined by simple individual rotary actions about the respective centres. This contrasts with prior art tricompartmental femoral components which currently involve arcuate profiles involving three, four or more successively different curvatures which are to be smoothly blended at each curvature transition and not readily amenable to such production.

For the purposes of total knee joint replacement the proposed component is preferably deployed in association with tibial and meniscal components in general accordance with the above-mentioned Patent, and particularly with co-pending UK Patent Application No. 9013025.3. Also, a cooperating patellar component preferably accords with co-pending UK Patent Application No. 9018737.8.

- 5 -

CLAIMS

1. A prosthetic femoral component of tricompartmental form comprising an integrated body defining two articulation surfaces of spherical shape in spaced side-by-side disposition to assume the roles of respective tibial facets, and a further articulation
05 surface in the form of a groove extending longitudinally in off-set manner sagittally between said two surfaces to assume the role of patellar facet, said groove having circular arcuate longitudinal shape.
2. A component according to Claim 1 wherein said two surfaces
10 are of the same radius of curvature and said circular arcuate shape is of the same order of radius.
3. A component according to Claim 2 wherein said arcuate shape radius is larger than that of said two surfaces by a small proportion of the latter.
- 15 4. A component according to Claim 3 wherein said radii are in a ratio of about 1.2:1.
5. A component according to any one of Claims 1 to 4 wherein said two surfaces are coincident as seen in a lateral aspect.
6. A component according to Claim 5 wherein said further surface
20 is disposed centrally between said two surfaces.
7. A component according to Claim 5 or 6 wherein the centre of curvature of said further surface is respectively off-set by about 0.4R and 0.6R superiorly and anteriorly relative to the centres of curvature of said two surfaces as seen in a lateral
25 aspect, where R is the radius of curvature of said two surfaces.
8. A component according to Claim 5, 6 or 7 wherein the centres of curvature of said two surfaces are spaced by about 2.3 times the related radius of curvature.
9. A component according to any preceding claim wherein said
30 further surface groove has a circular arcuate cross-sectional shape.

1/1

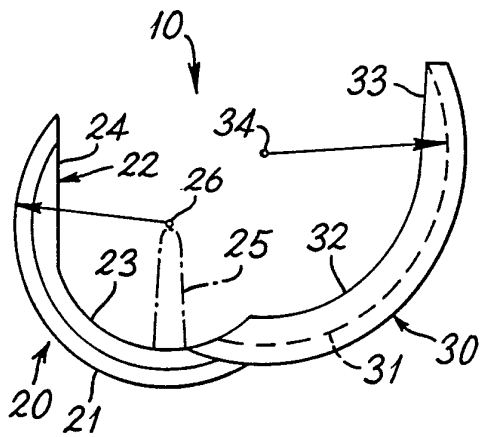


Fig. 1

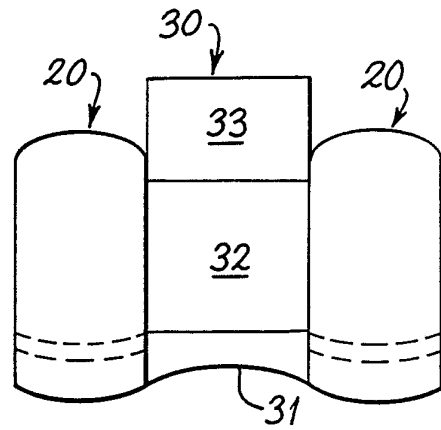


Fig. 2

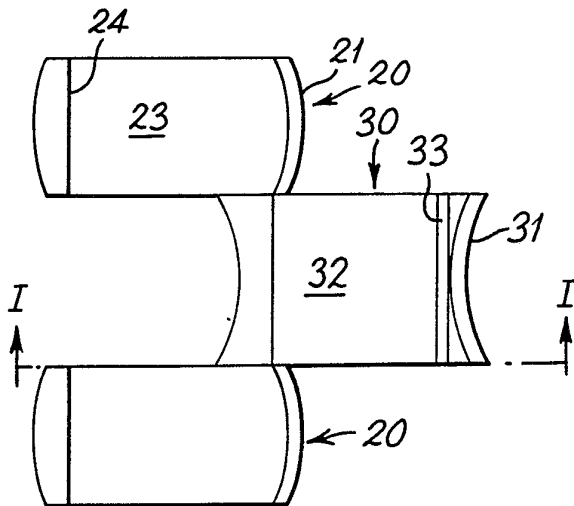



Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 91/01446

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 A61F2/38		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	A61F	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
Y	FR,A,2 172 104 (SULZER A. G.) 28 September 1973 see claims; figures ---	1,9
Y	FR,A,2 465 470 (GAUTHIER) 27 March 1981 see claim 1; figure 8 ---	1,9
A	US,A,4 340 978 (BIOMEDICAL ENGINEERING CORP.) 27 July 1982 see column 7, line 54 - column 9, line 17; figures 7,22,23 ---	1,2,5
A	US,A,4 215 439 (GOLD ET AL.) 5 August 1980 ---	-
A	US,A,4 094 017 (MATTHEWS ET AL.) 13 June 1978 ---	-
¹⁰ Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
26 NOVEMBER 1991	13. 12. 91	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	VILLENEUVE J.M. 	

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 9101446
SA 50881

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 26/11/91

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
FR-A-2172104	28-09-73	CH-A-	548202	30-04-74
		AT-B-	323316	10-07-75
		BE-A-	795410	14-08-73
		GB-A-	1371317	23-10-74
		NL-A-	7202790	20-08-73

FR-A-2465470	27-03-81	None		

US-A-4340978	27-07-82	US-A-	4309778	12-01-82
		AT-T-	E7456	15-06-84
		CA-A-	1176004	16-10-84
		CA-A-	1169201	19-06-84
		EP-A, B	0021421	07-01-81
		JP-C-	1210110	29-05-84
		JP-A-	56083343	07-07-81
JP-B-	58048180	27-10-83		

US-A-4215439	05-08-80	None		

US-A-4094017	13-06-78	CH-A-	618874	29-08-80
		DE-A-	2805744	24-08-78
		FR-A, B	2380769	15-09-78
		GB-A-	1545458	10-05-79
		JP-A-	53103695	09-09-78
