



- (51) International Patent Classification:
C01D 3/06 (2006.01)
- (21) International Application Number:
PCT/BR2012/000046
- (22) International Filing Date:
17 February 2012 (17.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/444,245 18 February 2011 (18.02.2011) US
- (71) Applicant (for all designated States except US): **VALE S.A.** [BR/BR]; Avenida Graça Aranha, 26, Centro, Rio de Janeiro - RJ 20030-000 (BR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **FARIA, Flávio Marcio de Lima** [BR/BR]; Rua Joaquim Ribeiro Costa, 130 - apto 202, Bairro Palmares, 31160-490, Belo Horizonte, MG - BR (BR). **SIMÕES, Marcus de Castro Carvalho** [BR/BR]; Rua Alfonso Ricaldoni 40. apto 103, Bairro Castelo, 30840-520, Belo Horizonte, MG (BR). **PESSOA, Antonio Francisco Cisne** [AR/AR]; Olga Cossettini, 731 - piso 1, Buenos Aires, C1107CDA (AR).
- (74) Agents: **VEIRANO E ADVOGADOS ASSOCIADOS** et al.; Avenida das Nações Unidas 12.995, 18° andar, São Paulo, SP - 04578-000 (BR).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: PROCESS TO OBTAIN POTASSIUM CHLORIDE

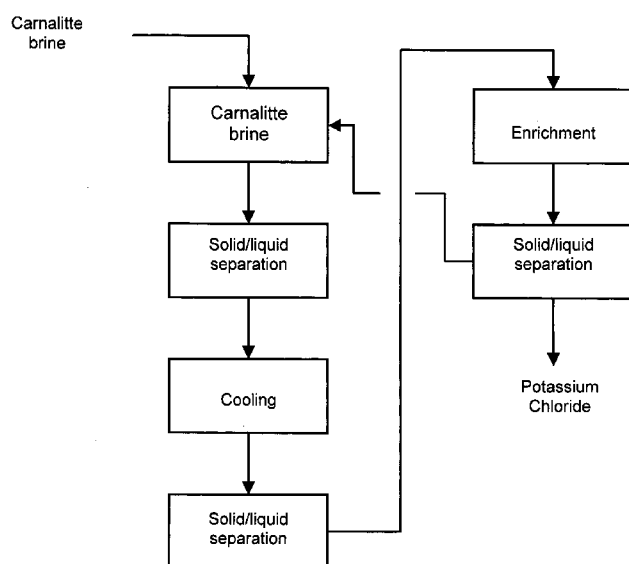


FIG. 1

(57) **Abstract:** The present invention refers to a process to obtain potassium chloride which comprises the following stages: a) To submit brine to concentration; b) To make brine separation after concentration, resulting in a first solid content and a first liquid content; c) To cool the first liquid content; d) To make separation of the first liquid content after cooling, thus resulting in a second solid content and a second liquid content; e) To perform the enrichment of the second solid content; f) To make separation of the second solid content after enrichment, thus resulting in a third solid content and a third liquid content. This process is environmentally correct, as it comprises stages using solvents and equipment which does not harm the environment. Moreover, it presents a significant energy consumption reduction.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

5 Invention patent descriptive report for **“PROCESS TO OBTAIN
POTASSIUM CHLORIDE”**

INVENTION FIELD

The present invention refers to obtainment of potassium chloride from
carnallite brines or from brines with high $MgCl_2$ contents, which comprises steps
10 allowing said process to reach a reduction in energy consumption.

BACKGROUNDS

Potassium chloride is a halide metal salt formed by chloride and
potassium. The use of potassium chloride is widely diffused in medical
environment as a substitute of this electrolyte in the organism. Potassium
15 chloride is used in cooking as well.

Moreover, potassium chloride is widely used also as a fertilizer to
increase productivity in wide range of plantations.

There are some known brine processing routes for production of
fertilizing grade potassium chloride, in addition to processes to obtain salts from
20 different sources. However, those routes present significant energy
consumption.

BRIEF DESCRIPTION OF THE INVENTION

The present invention refers to a process to obtain potassium chloride
that comprises the following steps:

- 25 a) To submit the brine to concentration;
 b) To make brine separation after concentration, resulting in a first solid
content and a first liquid content;
 c) To cool the first liquid content;
 d) To make separation of the first liquid content after cooling, thus
30 resulting in a second solid content and a second liquid content;
 e) To perform the enrichment of the second solid content;
 f) To make separation of the second solid content after enrichment, thus

5 resulting in a third solid content and a third liquid content.

The step of submitting brine to concentration can be carried out through multistage evaporation, evaporation by thermal vapor recompression – TVR, evaporation by mechanical vapor recompression – MVR, or by combinations of multistage evaporation and/or TVR and/or MVR.

10 The step of cooling the first liquid content can be carried out by vacuum cooling, cooling through heat exchangers or by a combination of vacuum and cooling through heat exchangers.

The stage of performing the enrichment of the second solid content can be carried out through cold leaching, direct flotation of potassium chloride or
15 elutriation.

The enrichment of the second solid content may also be carried out through combinations between operations of multistage evaporation and thermal vapor recompression – TVR and operations of multistage evaporation by mechanical vapor recompression – MVR.

20 The process of the present invention may further comprise a brine preheating stage prior to submitting the brine to concentration. This brine preheating can be performed by surface condensers.

DETAILED DESCRIPTION OF THE INVENTION

The following detailed description at any rate is not intended to limit the
25 scope, applicability or configuration of the present invention. More exactly, the following description provides understandings to implement exemplary modalities. When using the teaching provided herein, people skilled in the art will recognize suitable alternatives to be used, without leaving the scope of the present invention.

30 The process of the present invention, as illustrated in figure 1, comprises the following stages:

a) To submit the brine to concentration;

5 b) To separate the brine after concentration resulting in a first solid content and a first liquid content;

 c) To cool the first liquid content;

 d) To make separation of the first liquid content after cooling, thus resulting in a second solid content and a second liquid content;

10 e) To perform the enrichment of the second solid content;

 f) To make separation of the second solid content after enrichment, thus resulting in a third solid content and a third liquid content.

 The brine used in the process of the present invention preferably derives from working by carnallite dissolution that includes a significant potassium
15 chloride, magnesium chloride and sodium chloride content.

 Canallite brine or brine that has high potassium chloride, magnesium chloride and sodium chloride content may be obtained from carnallite rocks or natural brine. Obtainment of this brine from carnallite rocks occurs essentially by dissolution of the carnallite rock. Such dissolution may occur *in-situ* or in the
20 own processing plant. In cases of *in-situ* dissolution we may highlight the working for dissolution and methods thereof, among which we can mention the "Single Well" and "Dual Wells".

 In the "Single Well" method only one well for injection of solvent and brine collections is required. This technique, a central portion of said well is
25 perforated so as to reach preferably the carnallite layer beneath the earth surface. Solvent is injected and the resulting brine is collected in a concentric pipe system.

 In the "Dual Wells" method in turn, two wells are perforated near each other. The contact of wells occurs through a cavern formed by means of
30 development of separate cavities with simultaneous solvent injection. At completion of the cavern, one of the wells receives the solvent and the other one provides the resulting brine. In the present invention, brine used in the

5 process may be obtained by above-described methods or by any other known method.

Concentration stage in the present invention is preferably multistage evaporation.

10 The first solid content resulting from step of the present invention refers essentially to sodium chloride. This material is removed from the process and may be purged, diluted or suffer any other type of physical process to be used in purposes other than those presented herein.

Cooling step preferably refers to two successive cooling substages, the first of which being vacuum cooling and the second, direct cooling.

15 The second liquid content resulting from step "d" of the process of the present invention is disposal material.

The second solid content resulting from step "d" of the process of the present invention comprises essentially potassium chloride and sodium chloride.

20 The third solid content resulting from step "f" of the process of the present invention refers essentially to potassium chloride in a suitable content for application, the final purpose of the present invention.

The third solid content resulting from step "f" of the process of the present invention preferably returns back to step "a", feeding brine to suffer a
25 concentration process.

The process of the present invention includes in their preferred modalities:

- Multistage evaporation and sodium chloride crystallization, including sodium chloride separation;
- 30 - Vacuum cooling and potassium chloride crystallization;
- Direct cooling either with cold water or saline solution or glycol solutions (e.g., glycol-ethylene) in varied compositions thereof;

- 5 - Dewatering (solid-liquid separation);
 - Leaching to obtain potassium chloride;
 - Evaporation of leached brine or recirculation (mixing with the first brine)
of the leached brine in the evaporation stage;

A preferred embodiment of the process of the present invention
10 comprises the following steps:

a) To submit brine to evaporation. Preferably, evaporation occurs by
multistage evaporation, and it can be performed either partially or fully by
mechanical vapor recompression (MVR) or thermal vapor recompression
(TVR). Evaporation may be further performed by operations of multistage
15 evaporation and/or MVR and/or TVR;

b) To perform brine separation after evaporation, resulting in a first solid
content and a first liquid content, one of which being a condensate, vapor
condensate and a solid, the sodium chloride. Separation can be performed
preferably by centrifugation or filtration, or any other known unitary operation for
20 solid/liquid separation;

c) To cool the first liquid contents by means of substages, with vacuum
cooling using cooling water and direct cooling by cold water or saline solution or
glycol solutions (e.g., ethylene-glycol) in their several compositions thereof, both
substages providing crystallization of potassium chloride and sodium chloride
25 as impurity;

d) To make separation of the first liquid content after cooling, resulting in
a second solid content and a second liquid content. The separation can be
performed preferably by centrifugation or filtration, or any known unitary
operation for solid/liquid separation. The liquid material containing magnesium
30 chloride and low concentration of potassium chloride is discarded;

e) To make leaching of the second solid content by using leaching water
or condensate generated in the process. Leaching can be performed cold.

5 Alternatively, direct flotation of potassium chloride or elutriation can be used;

f) To make separation of the second solid content after leaching resulting in a third solid content and a third liquid content. Separation can be performed preferably by centrifugation or filtration, or any known unitary operation for solid/liquids separation. The resulting product is potassium chloride that, after
10 compacted, presents content higher than 95% mass. The third liquid content is sent to step "a" of concentration.

In other preferred embodiment of the process of the present invention, carnallite brine enters the process in a temperature between 20°C and 70°C.

15 In that embodiment, brine can be preheated preferably in surface condensers. Condensate vapor is collected in condensate storage.

Heated brine circulates in the evaporation and NaCl content is separated. The solution will be concentrated so as no potassium chloride crystallization occurs.

20 Cooling agents include process water, cooling water and cold water or saline solution or glycol solutions (e.g., glycol-ethylene) in varied compositions thereof.

Vacuum crystallization KCl has a K₂O content of approximately 44% in solvent-free solid. In order to reach business quality, there is a leaching stage, which can be carried out in a sole stage or, preferably, performed in multiple
25 stages. In case of two-stage leaching, in the first substage of cold leaching, the solid contents will be treated as the solution of the second cold leaching substage. Thus, a moderate increase is reached from a K₂O content of approximately 44% to approx. 52% of solvent-free solid.

30 The solution separated from the cold leaching substage is transferred to the first cold leaching substage. The leached solid content of the first leaching substage is sent to the second substage, where is mixed with leaching water or process condensate, thus increasing potassium chloride concentration in

5 suitable levels to commercialization, of about 96% of content.

Solid content which has dewatered potassium chloride crystallized elements, after the solid-liquid separation stage, is stored or dried in dryers and conditioned thereafter to meet market specifications.

The total quantity of dry potassium chloride is sent to compaction and

10 granulation.

The obtainment process of the present invention contemplates an excellent unitary operation arrangement. Thus, it is possible to increase the number of evaporation stages, performing evaporation in MgCl_2 concentrations lower than the conventional routes.

15 Some advantages of the process of the present invention include:

- Reduction of the overall energy consumption;
- Reduction of process operating costs;
- Increased vapor saving (ton of evaporated water x ton of fed boiler vapor);

20 - Reduction of natural gas consumption;

- Operating simplicity

5

CLAIMS

1. Process to obtain potassium chloride, which comprises the following stages:

a) To submit the brine to concentration;

b) To make brine separation after concentration resulting in a first solid content and a first liquid content;

10 c) To cool the first liquid content;

d) To make separation of the first liquid content after cooling, thus resulting in a second solid content and a second liquid content;

e) To perform the enrichment of the second solid content;

f) To make separation of the second solid content after enrichment, thus
15 resulting in a third solid content and a third liquid content.

2. Process according to claim 1, characterized in that the stage of submitting brine to concentrations performed through multistage evaporation.

3. Process according to claim 1, characterized in that the stage of submitting brine to concentrations is performed through thermal vapor recompression - TVR.
20

4. Process according to claim 1, characterized in that the stage of submitting brine to concentrations performed through evaporation by mechanical vapor recompression – MVR.

5. Process according to claim 1, characterized in that the stage of
25 submitting brine to concentrations performed through combinations between operations of multistage evaporation and thermal vapor recompression – TVR.

6. Process according to claim 1, characterized in that the stage of submitting brine to concentrations is performed through combinations of operations of multistage evaporation and evaporation by mechanical vapor
30 recompression – MVR.

7. Process according to claim 1, characterized in that the stage of submitting brine to concentrations is performed through combinations between

5 operations of thermal vapor recompression - TVR and evaporation by mechanical vapor recompression – MVR.

8. Process according to claim 1, characterized in that the stage of cooling the first liquid content is carried out through vacuum cooling.

9. Process according to claim 1, characterized in that the stage of cooling
10 the first liquid content is carried out through cooling by means of heat exchangers.

10. Process according to claim 1, characterized in that the stage of cooling the first liquid content is carried out through a combination between vacuum cooling and cooling through heat exchangers.

15 11. Process according to claim 1, characterized in that the stage of performing the enrichment of the second solid content is carried out through cold leaching.

12. Process according to claim 1, characterized in that the stage of performing the enrichment of the second solid content is carried out through
20 direct flotation of potassium chloride.

13. Process according to claim 1, characterized in that the stage of performing the enrichment of the second solid content is carried out through elutriation.

14. Process according to claim 1, characterized in that the stage of
25 performing the enrichment of the second solid content is carried out through combinations between operations of multistage evaporation and thermal vapor recompression – TVR, and operations of multistage evaporation and evaporation by mechanical vapor recompression – MVR.

15. Process according to claim 1, characterized in that comprises, prior
30 to stage of submitting brine to concentration, a brine preheating stage.

16. Process according to claim 15, characterized in that brine preheating is performed by surface condensers.

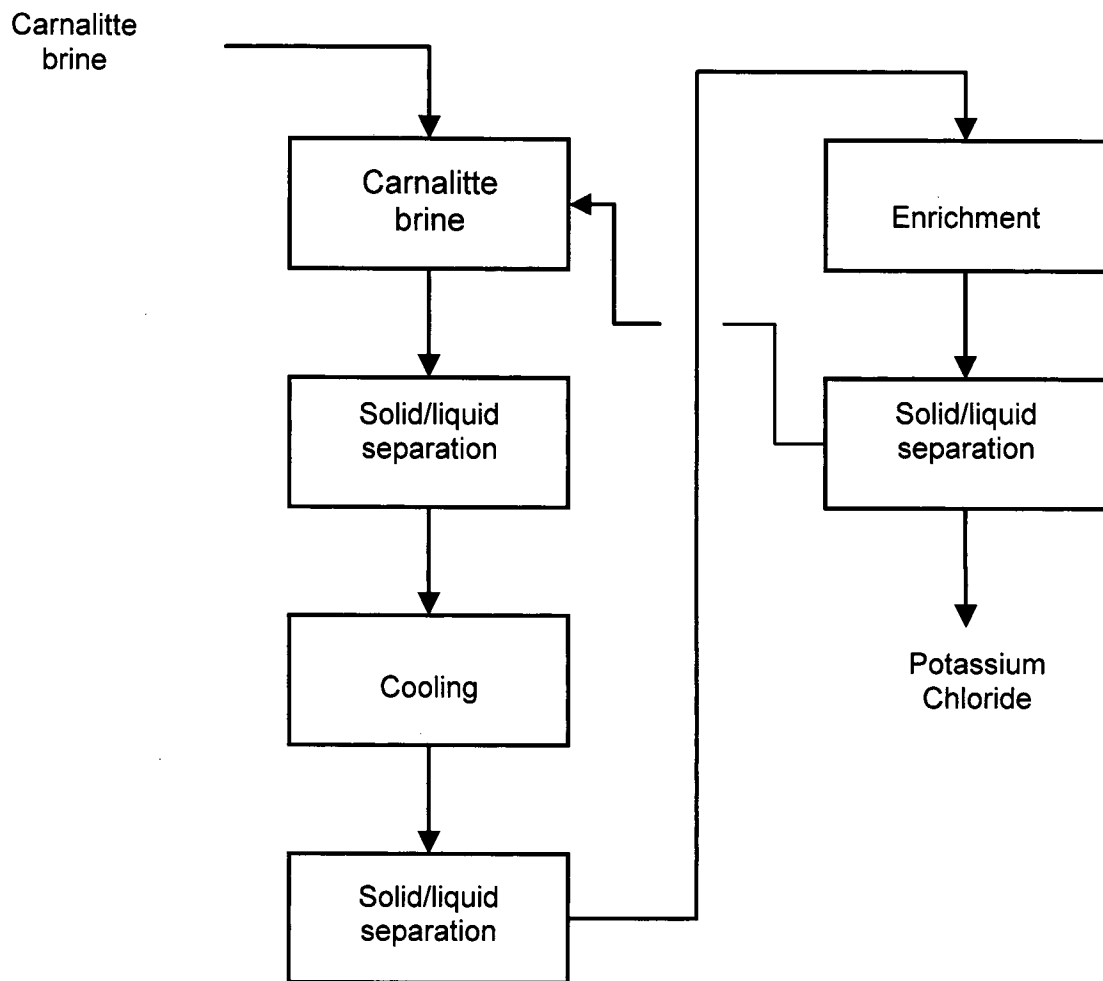


FIG. 1

INTERNATIONAL SEARCH REPORT

International application No

PCT/BR2012/000046

A. CLASSIFICATION OF SUBJECT MATTER

INV. C01D3/06

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 994 531 A (DILLARD JR DAVID S ET AL) 30 November 1976 (1976-11-30) claims example 1	1-16
X	WO 2008/106741 A1 (TECH RESOURCES PTY LTD [AU]; SHAW RAYMOND WALTER [AU]; BATTERHAM ROBIN) 12 September 2008 (2008-09-12) claim 1 page 1, lines 8-30	1-16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 July 2012

Date of mailing of the international search report

18/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Stratford, Katja

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/BR2012/000046

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3994531	A	30-11-1976	CA 961408 A1
			US 3994531 A
			21-01-1975
			30-11-1976
WO 2008106741	A1	12-09-2008	AR 065612 A1
			AU 2008222613 A1
			CA 2680182 A1
			CL 6762008 A1
			CN 101679056 A
			CO 6231021 A2
			EP 2132139 A1
			JP 2010520143 A
			RU 2009136489 A
			US 2010143237 A1
			WO 2008106741 A1
			17-06-2009
			12-09-2008
			12-09-2008
			10-10-2008
			24-03-2010
			20-12-2010
			16-12-2009
			10-06-2010
			20-04-2011
			10-06-2010
			12-09-2008