



US 20060255929A1


(19) **United States**(12) **Patent Application Publication**  
**Zanovitch et al.**(10) **Pub. No.: US 2006/0255929 A1**(43) **Pub. Date: Nov. 16, 2006**(54) **THREAT SCANNING MACHINE  
MANAGEMENT SYSTEM**(52) **U.S. Cl. .... 340/518**(76) Inventors: **Joseph Zanovitch**, Barton, NY (US);  
**Susan Douglas**, Candor, NY (US);  
**Michael Heaton**, Owego, NY (US);  
**Tonya Bender**, Owego, NY (US)(57) **ABSTRACT**

Correspondence Address:  
**MILES & STOCKBRIDGE PC**  
**1751 PINNACLE DRIVE**  
**SUITE 500**  
**MCLEAN, VA 22102-3833 (US)**

Disclosed is a dynamically configurable threat scanning machine management system that utilizes a network to connect threat scanning machines with a central control computer. The central control computer can transmit, among other things, operational software and threat profiles to the threat scanning machines, while the threat scanning machines can transmit, among other things, images and performance data to the central computer. The threat scanning machine management system can be arranged in a hierarchical manner, which enables threat scanning machines at various locations to be connected into regional, national or international control centers for greater management efficiency. The network may be wireless and the control computer may be portable, enabling a supervisor to remotely manage the threat scanning machines while remaining mobile about the facility, or elsewhere. Additionally, the threat scanning machine management system can be accessed and monitored remotely from a web browser via secure Internet access.

(21) Appl. No.: **11/493,012**(22) Filed: **Jul. 26, 2006****Related U.S. Application Data**

(63) Continuation of application No. 10/804,088, filed on Mar. 19, 2004.

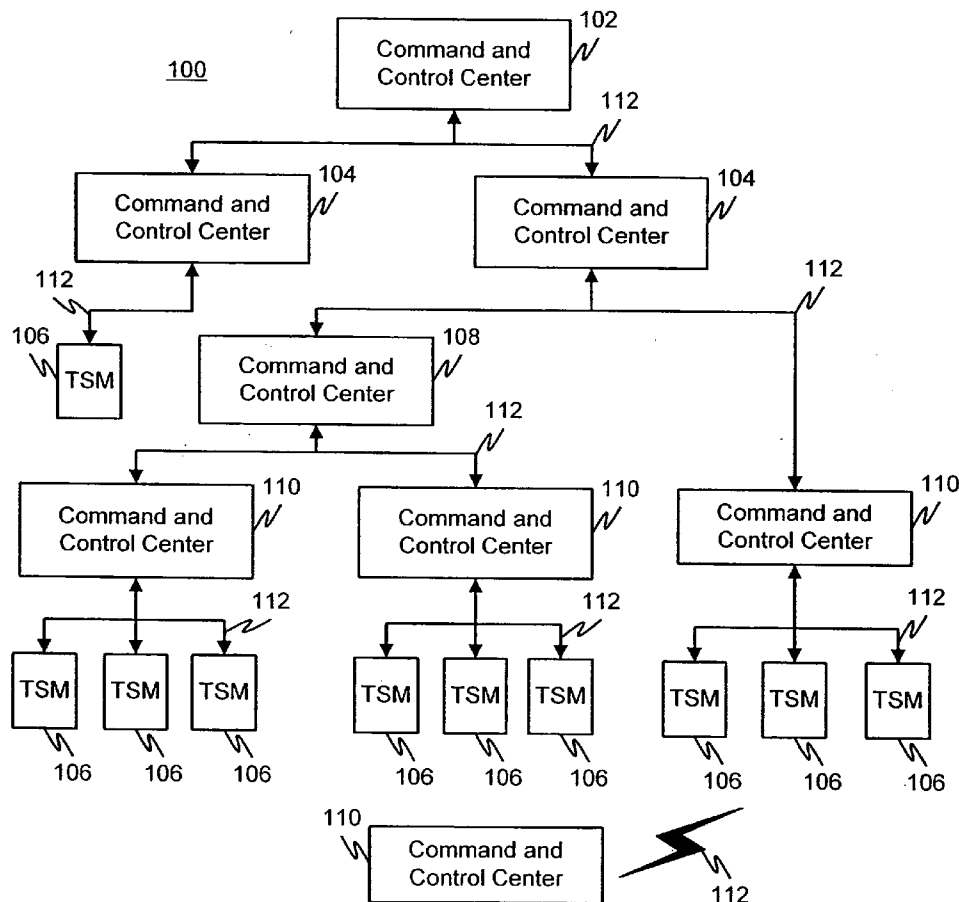**Publication Classification**(51) **Int. Cl.**  
**G08B 26/00** (2006.01)

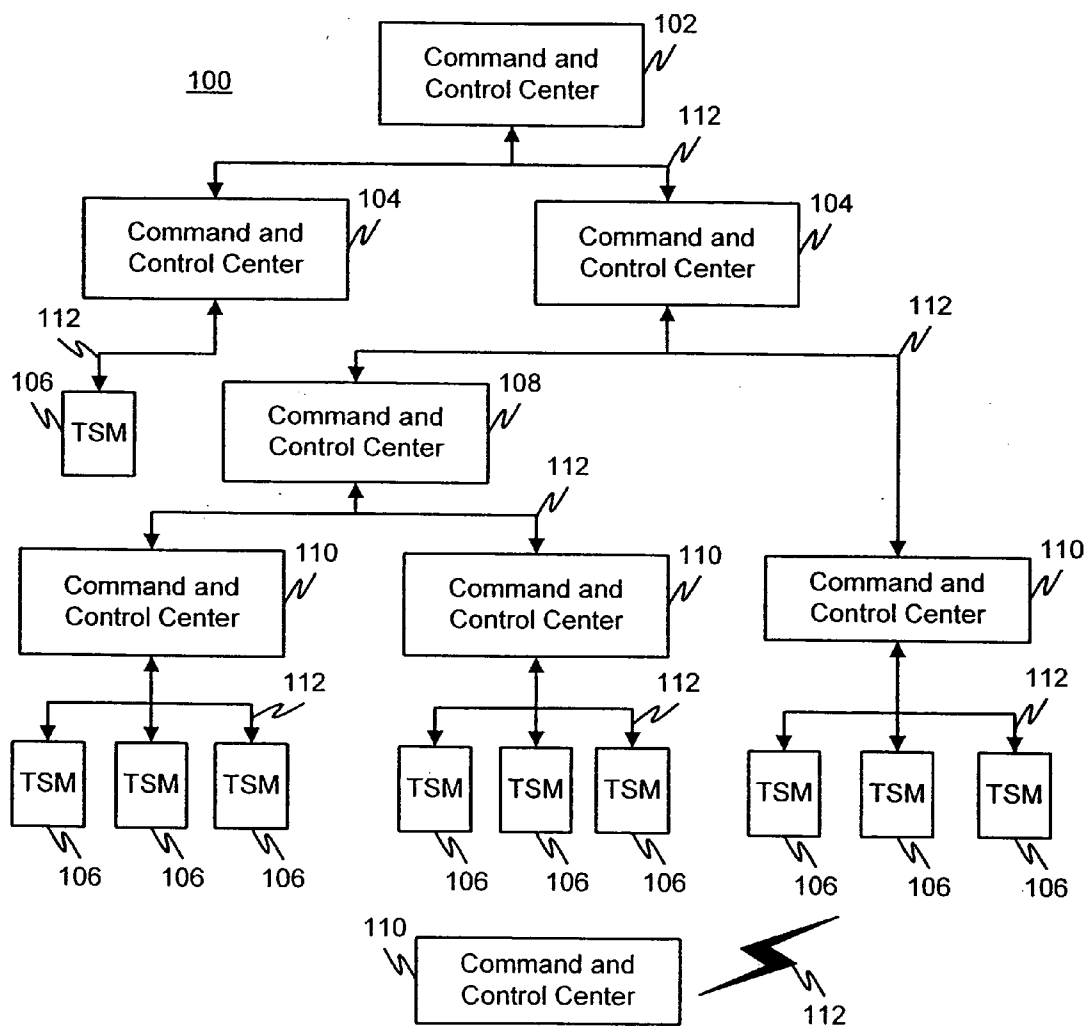


FIG. 1

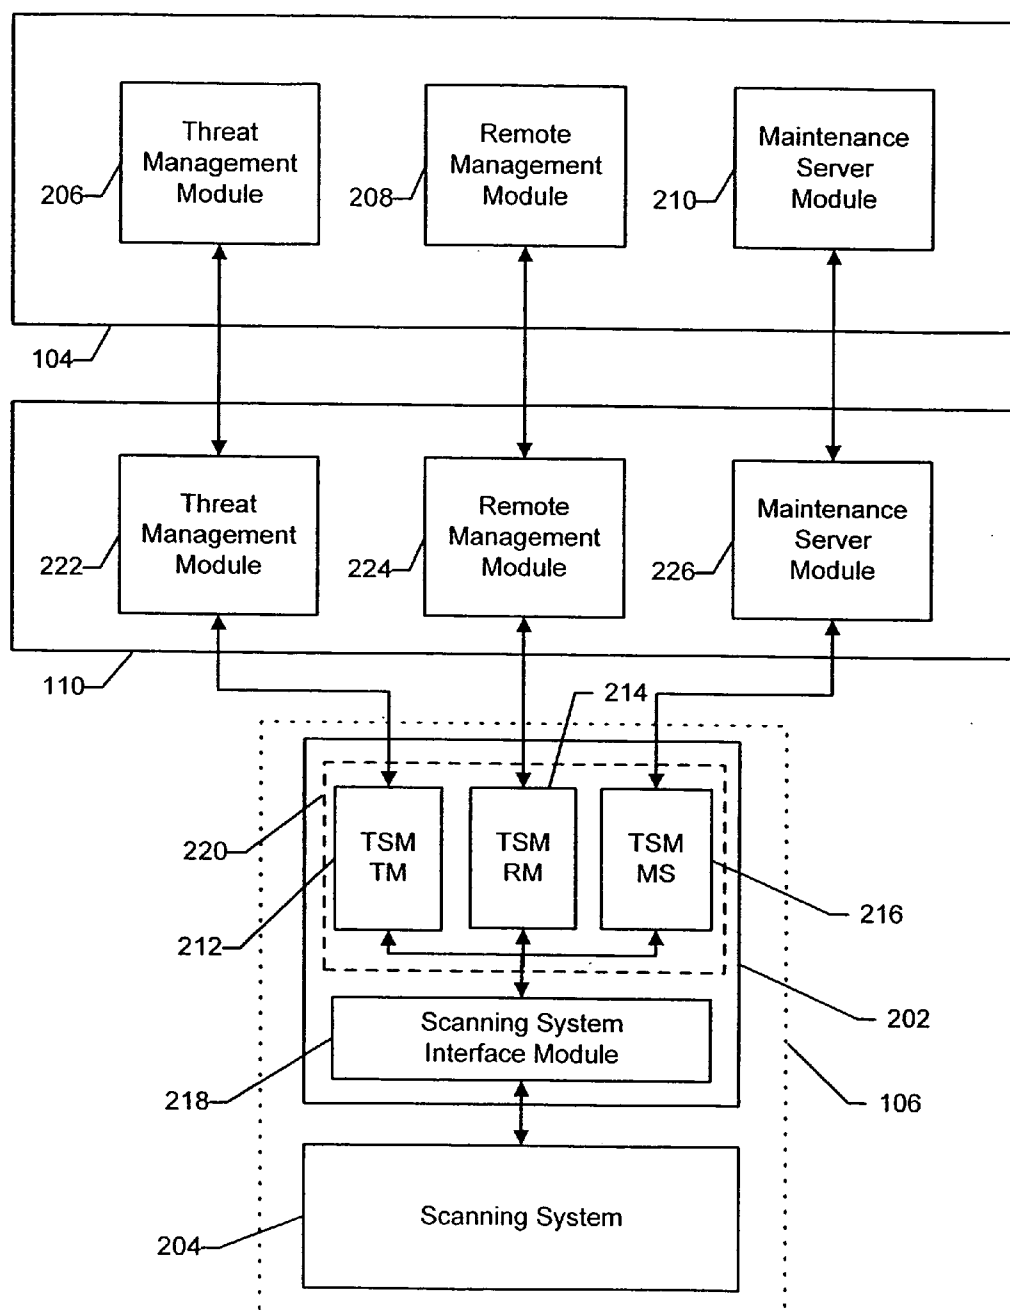


FIG. 2

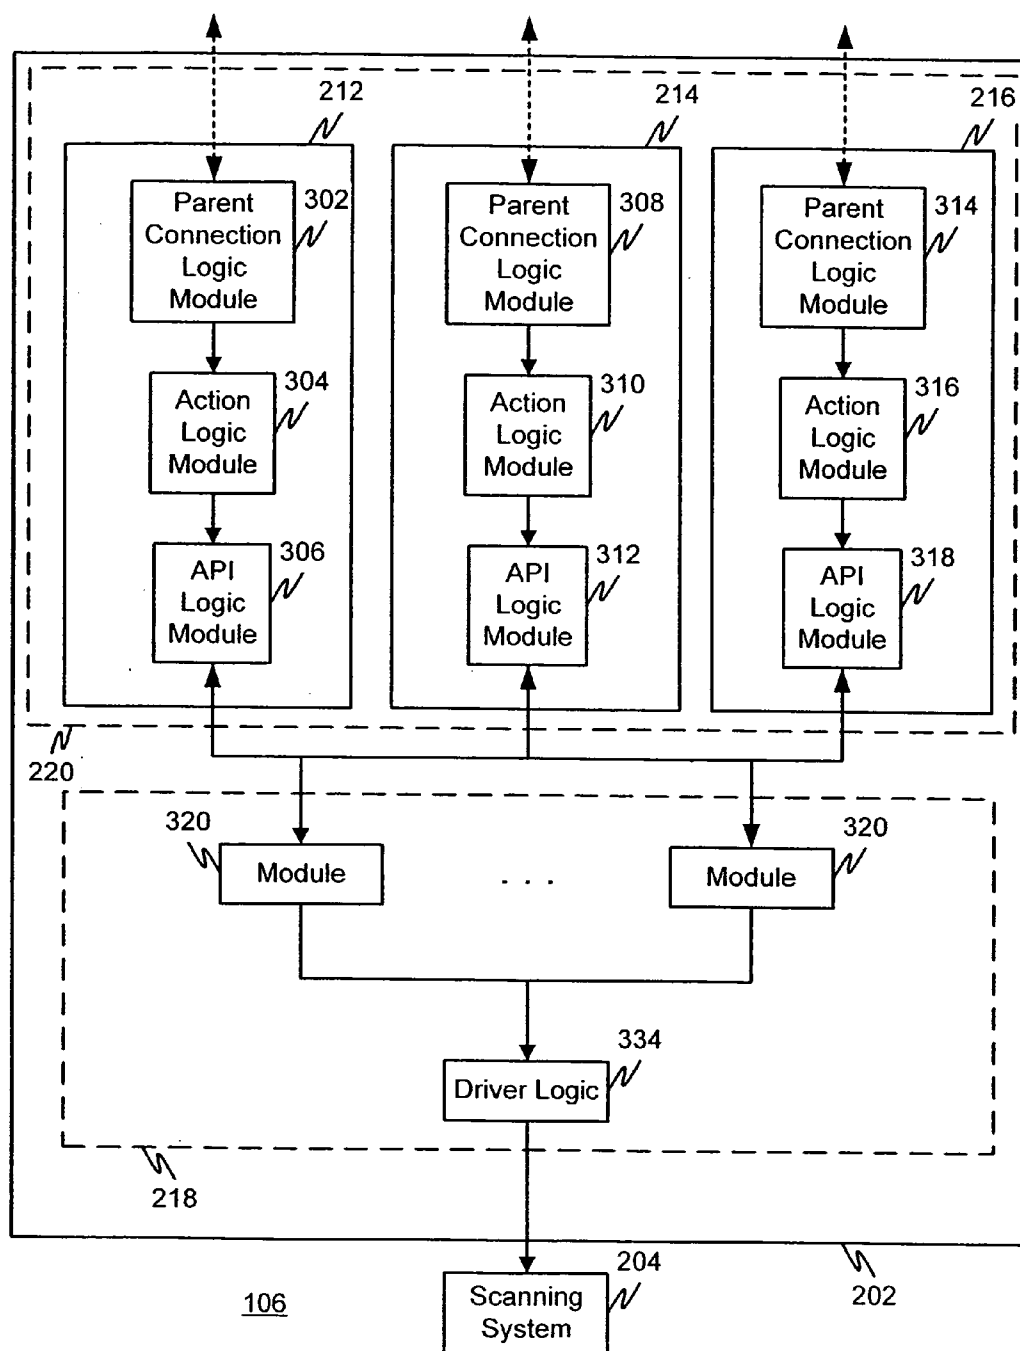


FIG. 3

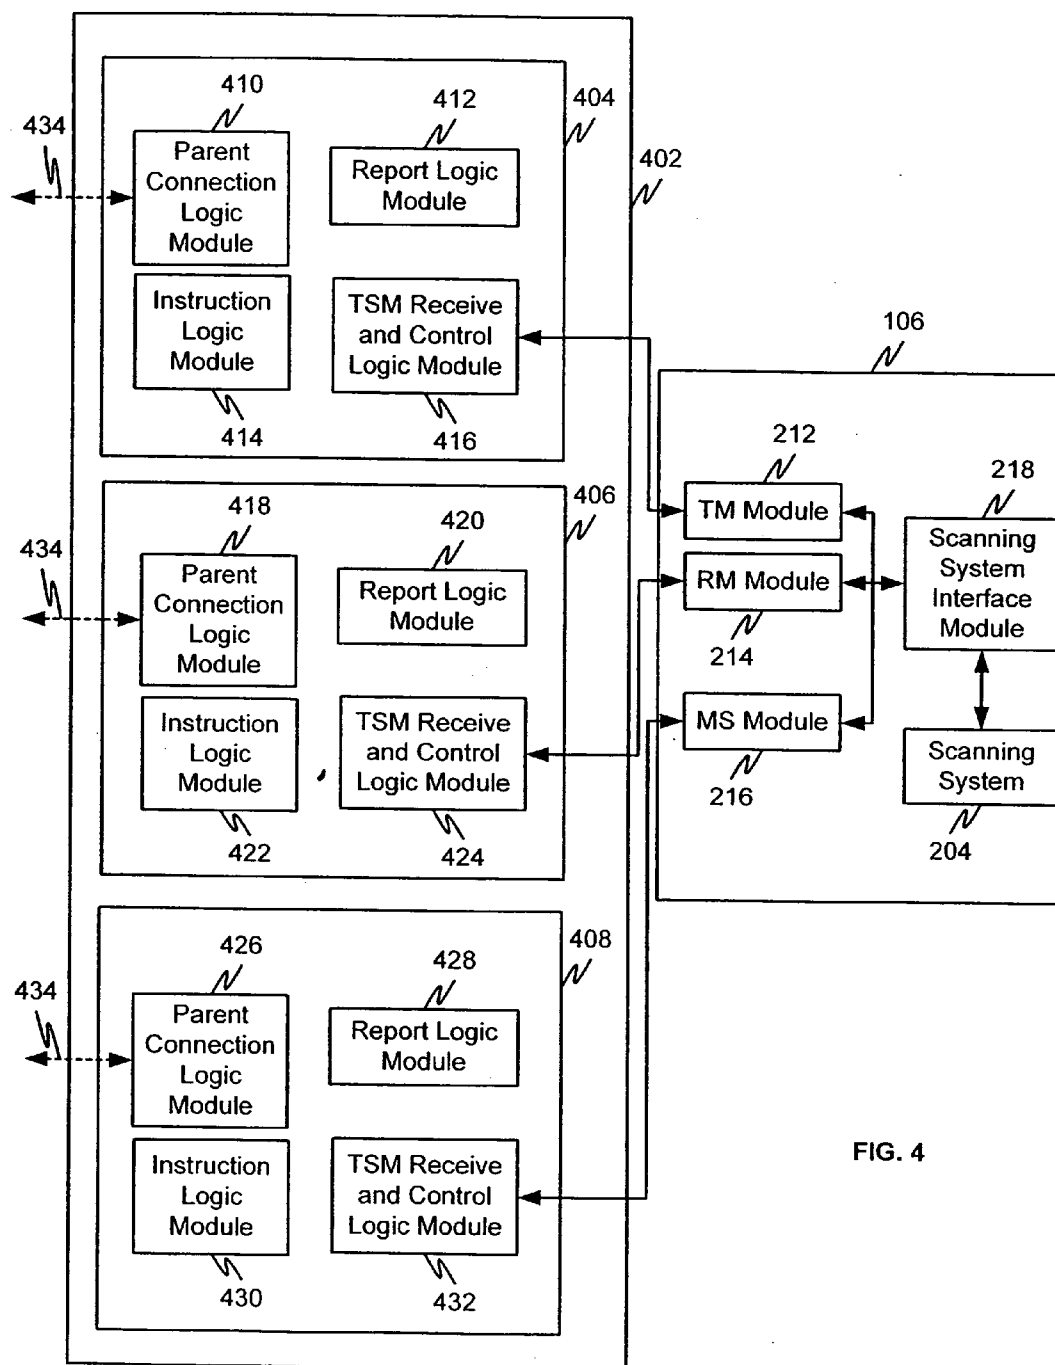


FIG. 4

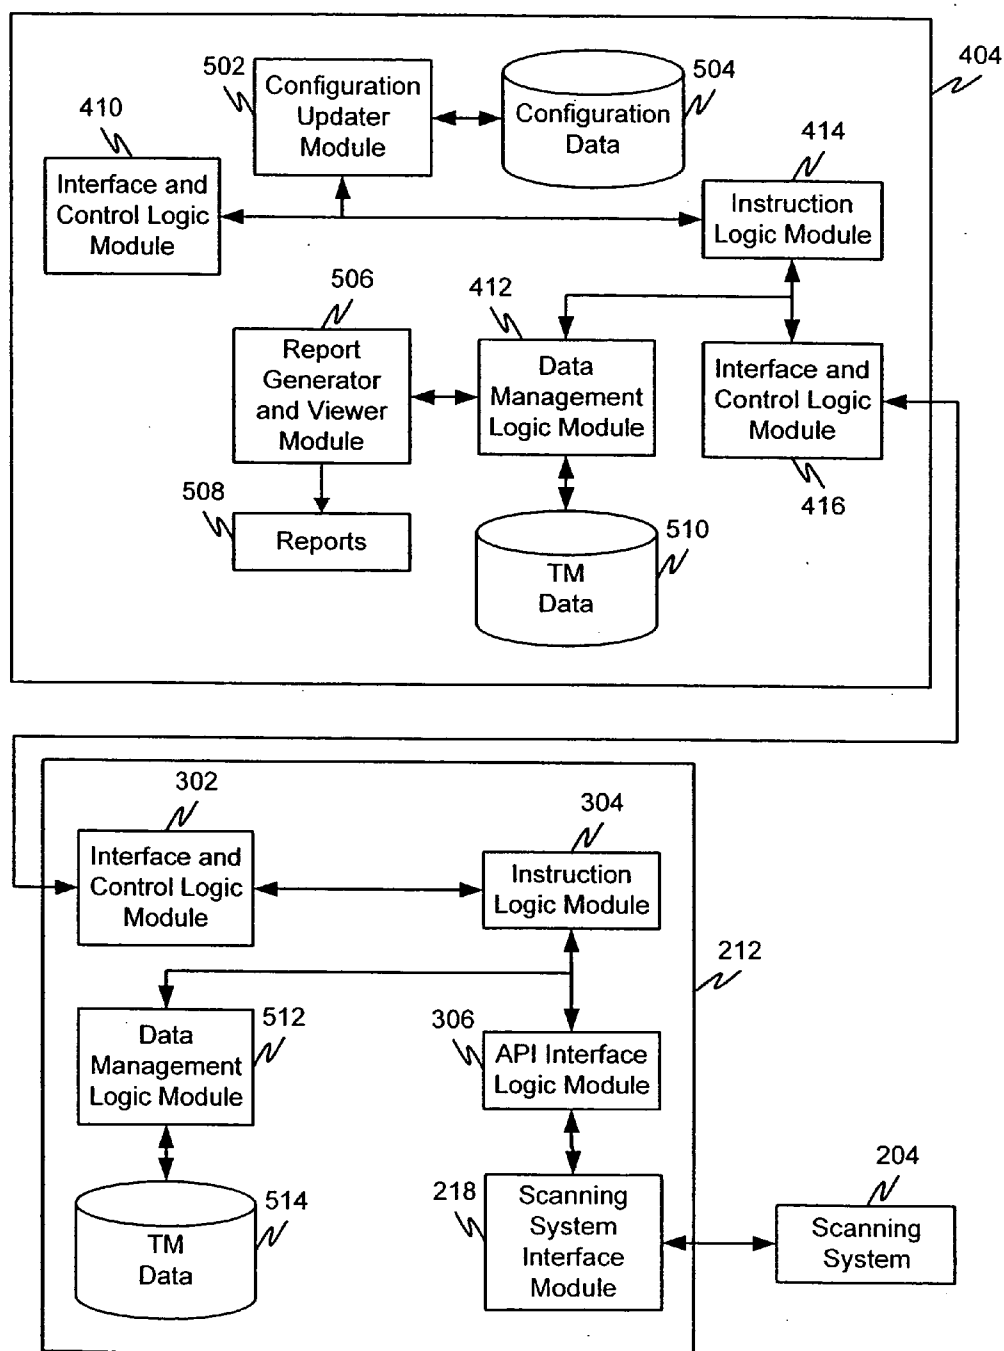


FIG. 5

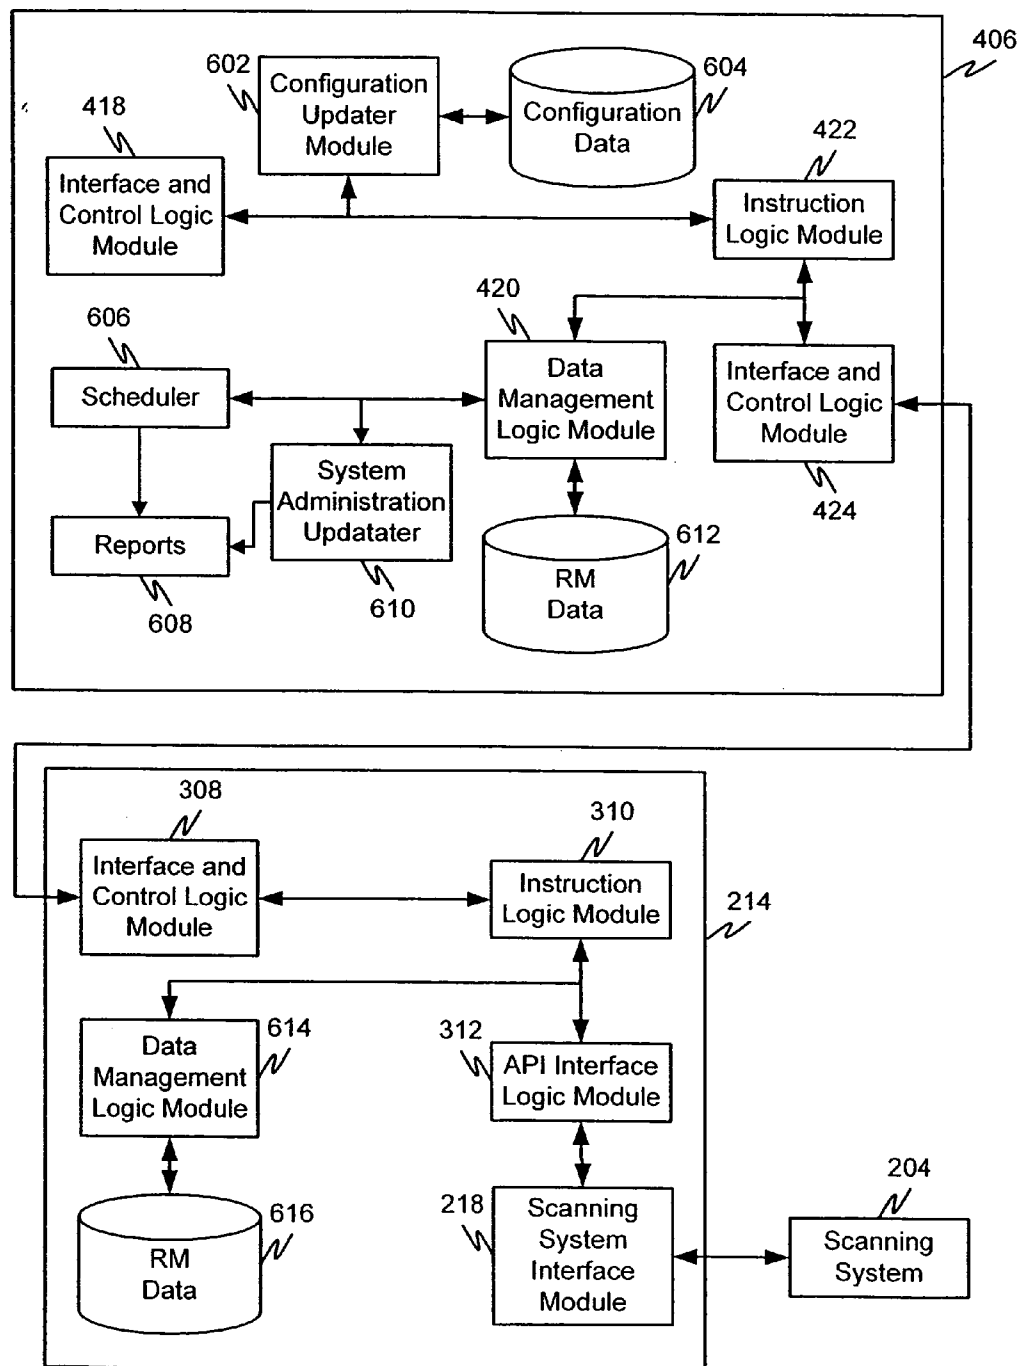


FIG. 6

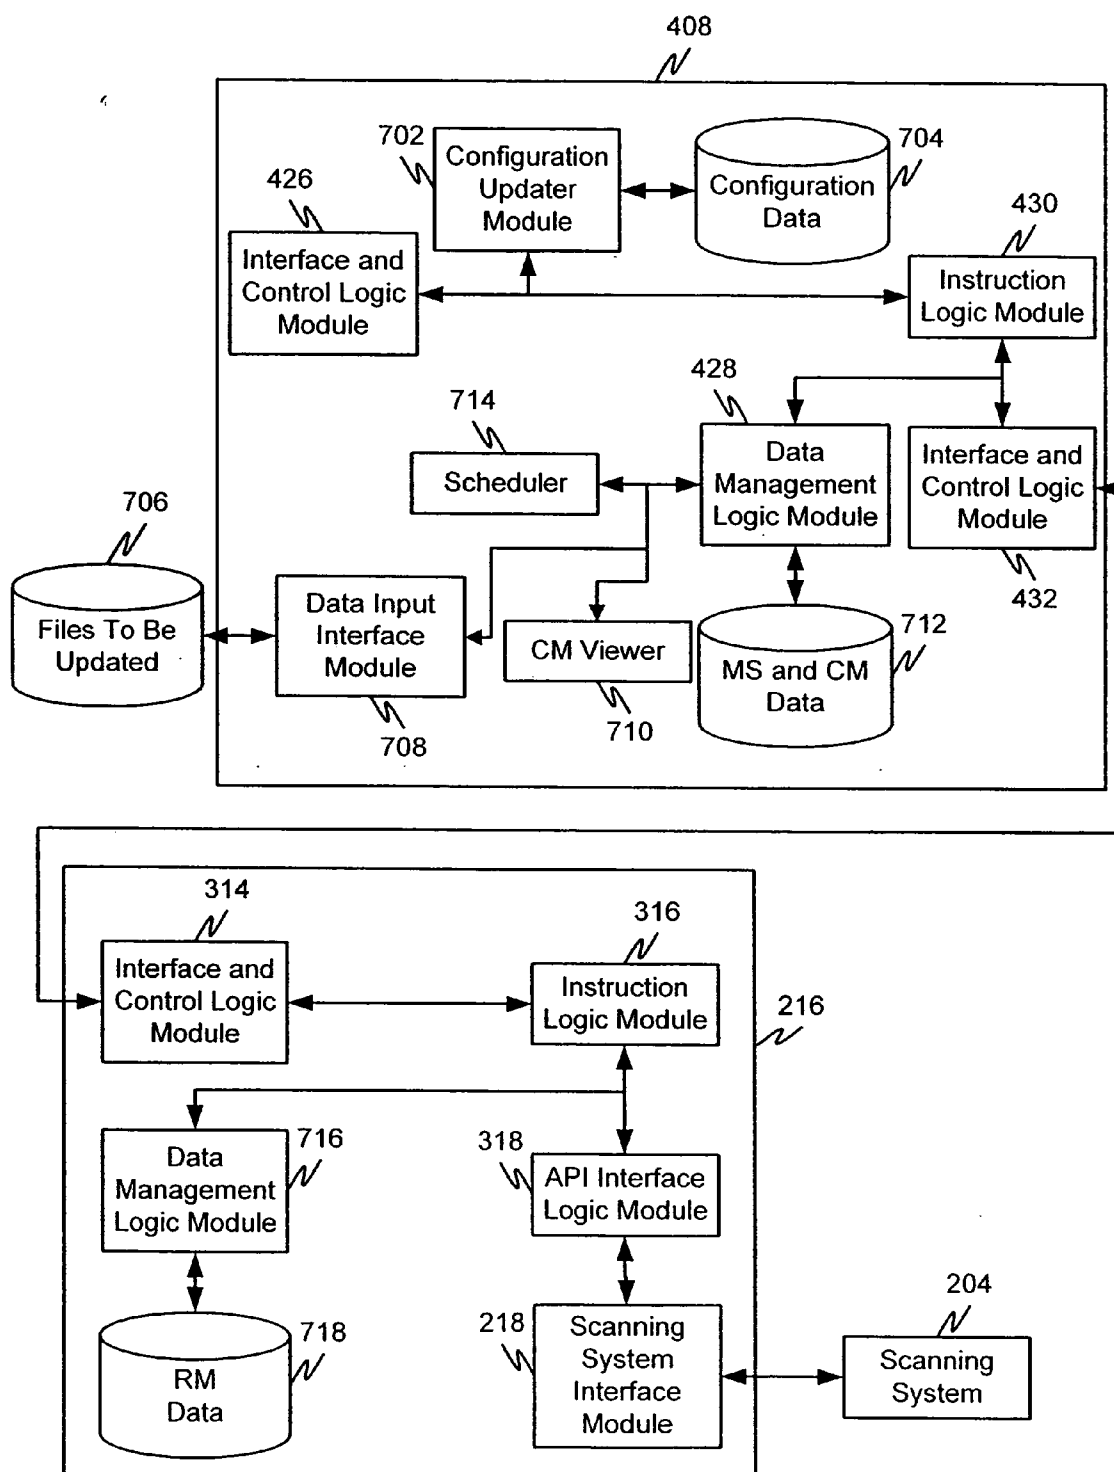


FIG. 7



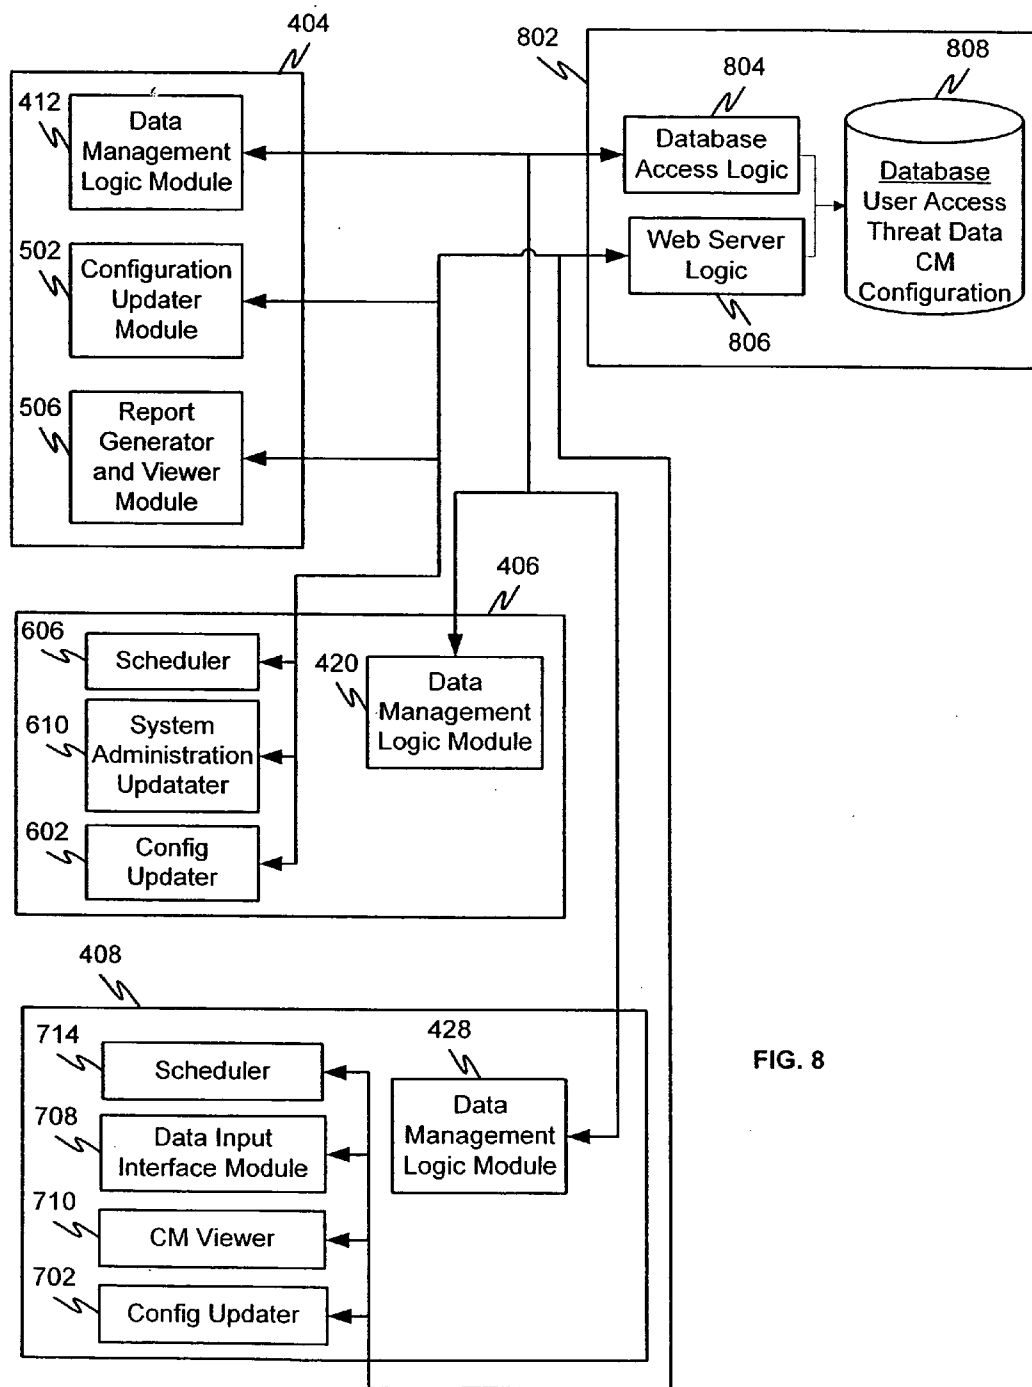


FIG. 8

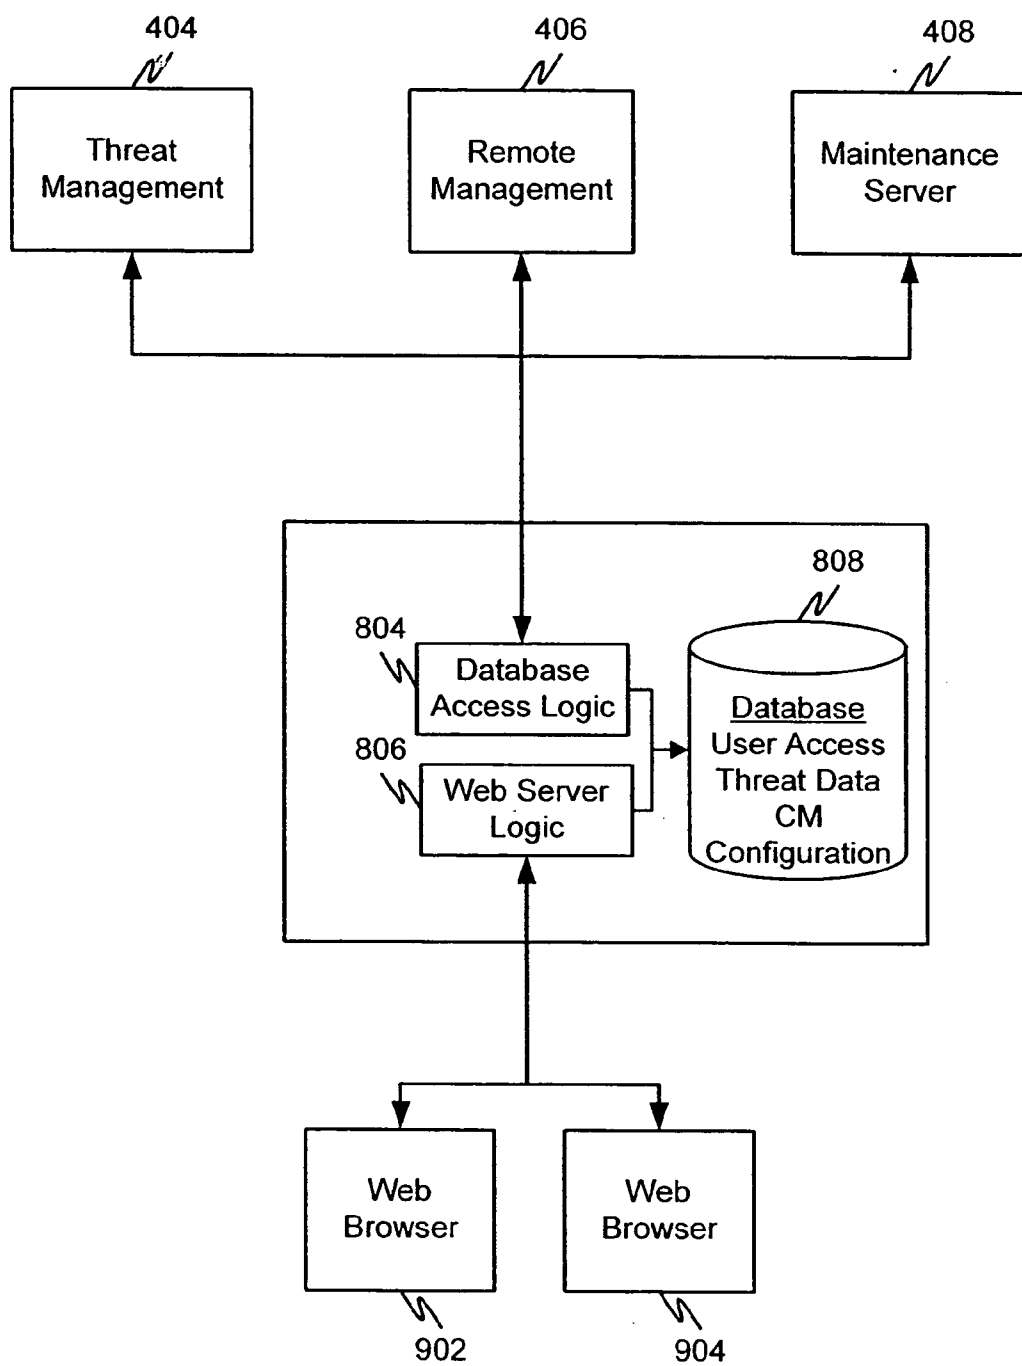


FIG. 9

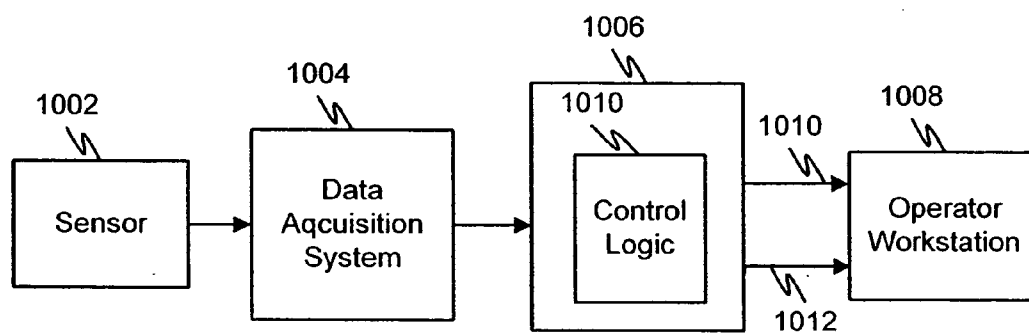


FIG. 10

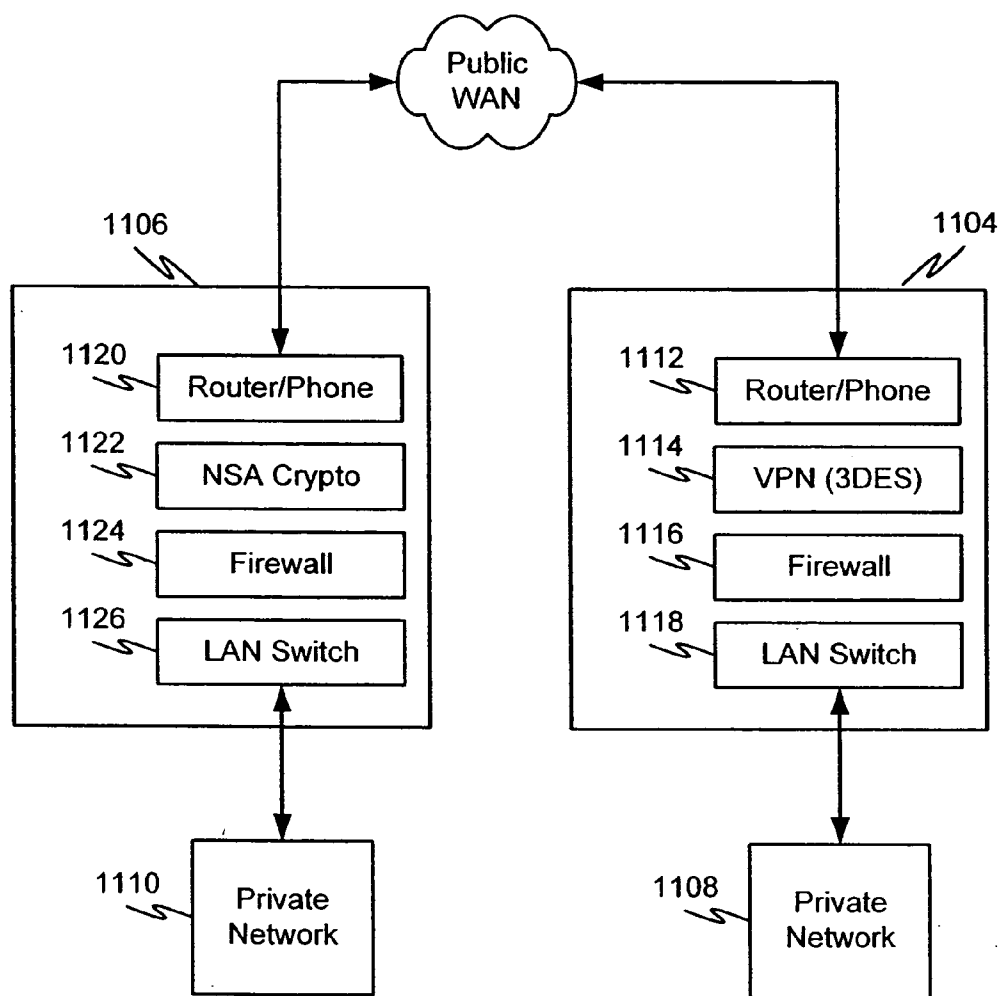
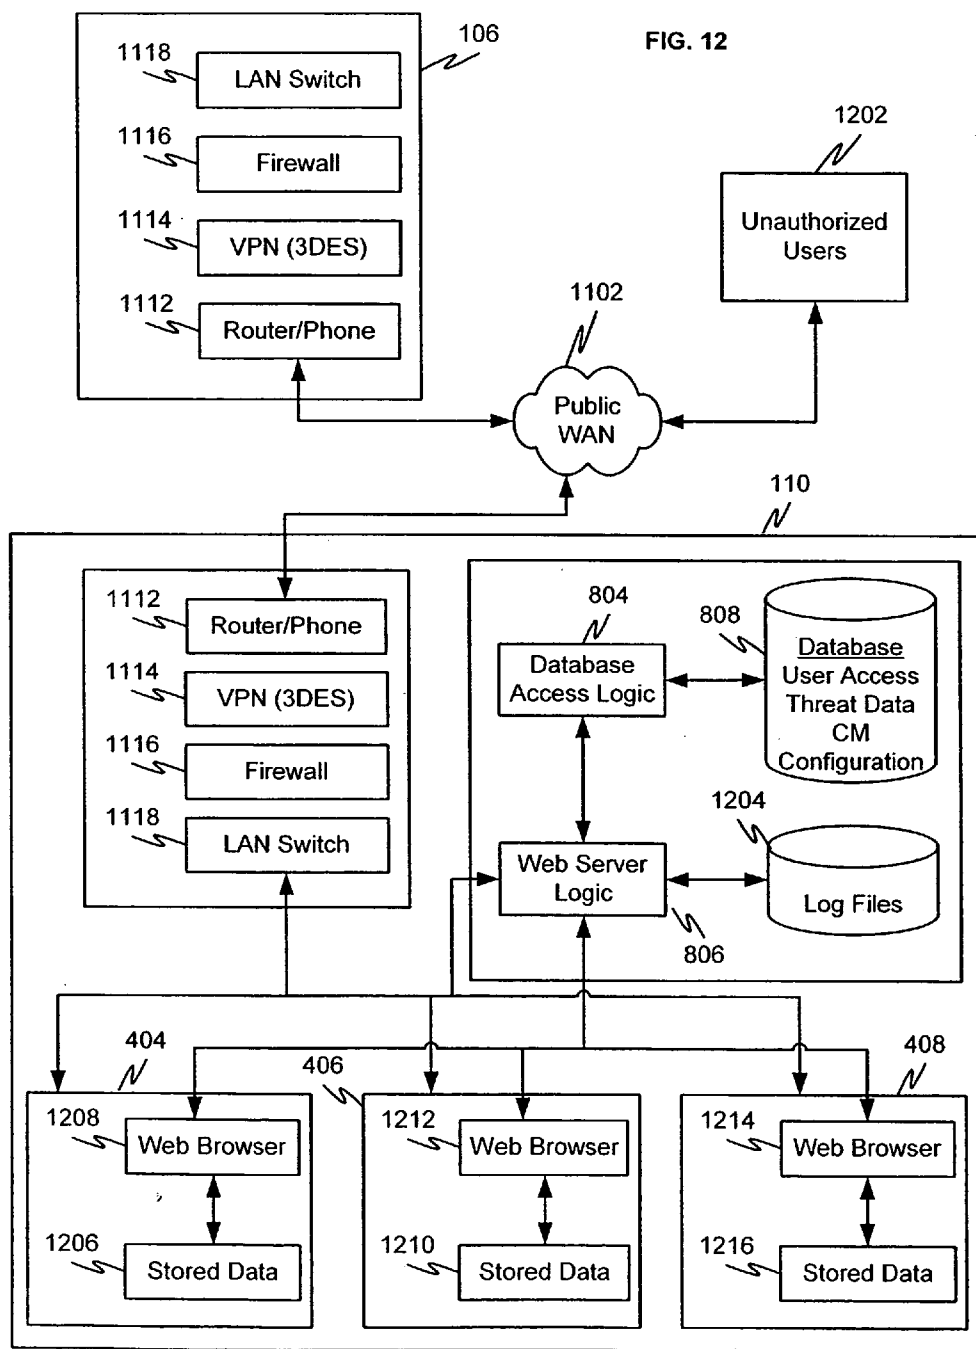


FIG. 11



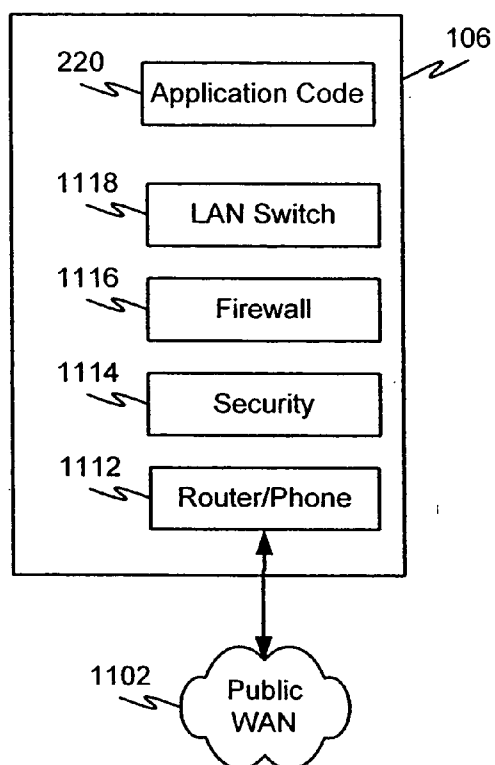


FIG. 13A

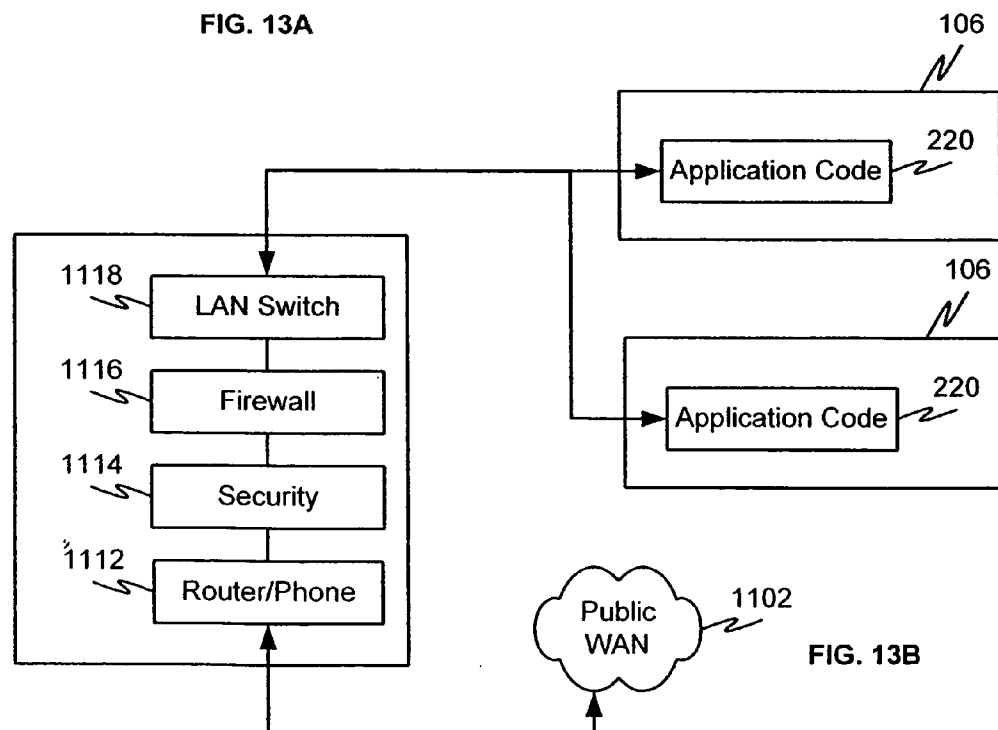


FIG. 13B

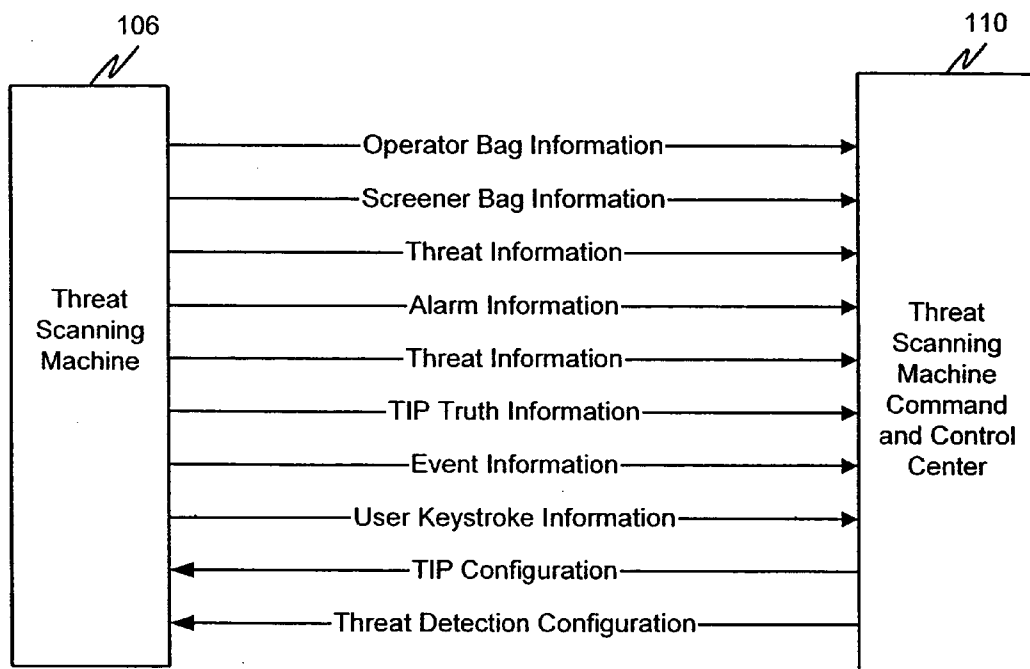


FIG. 14

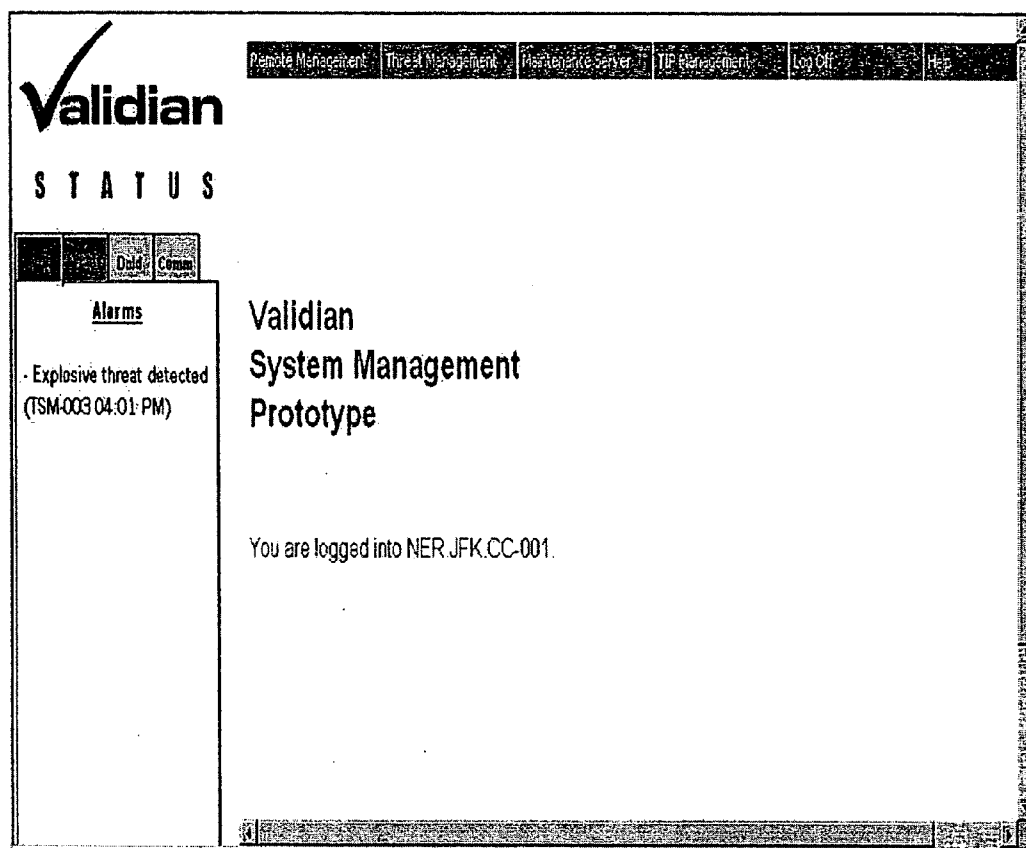


FIG. 15



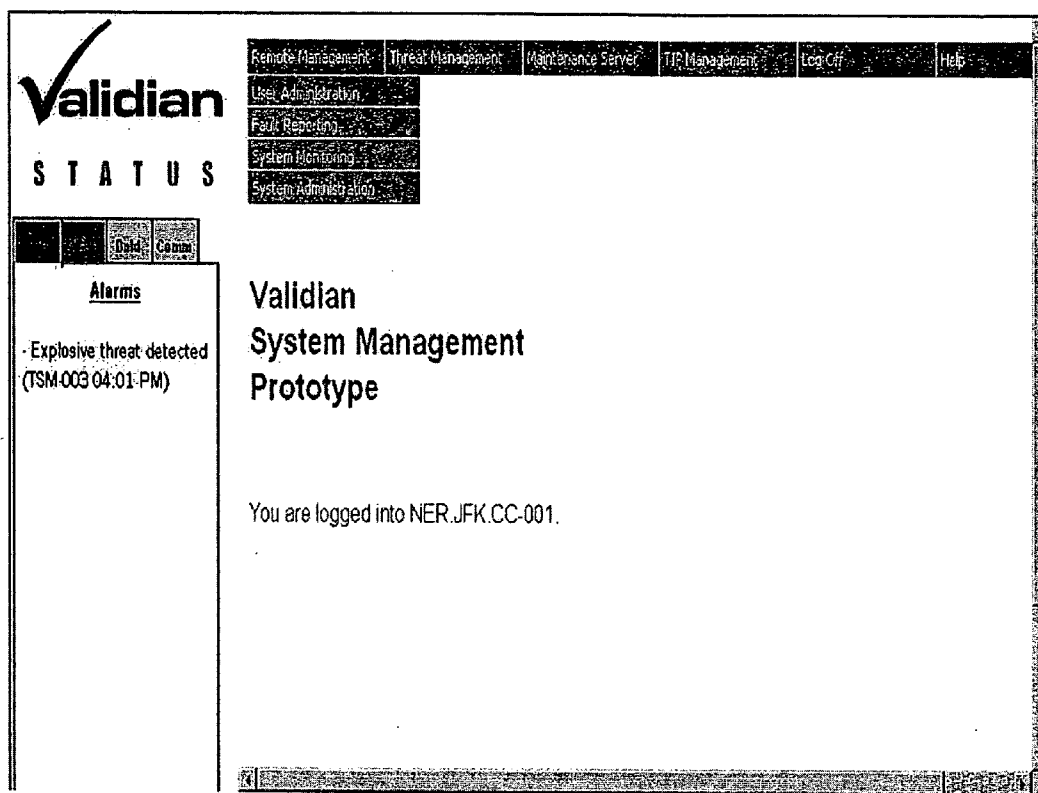


FIG. 16

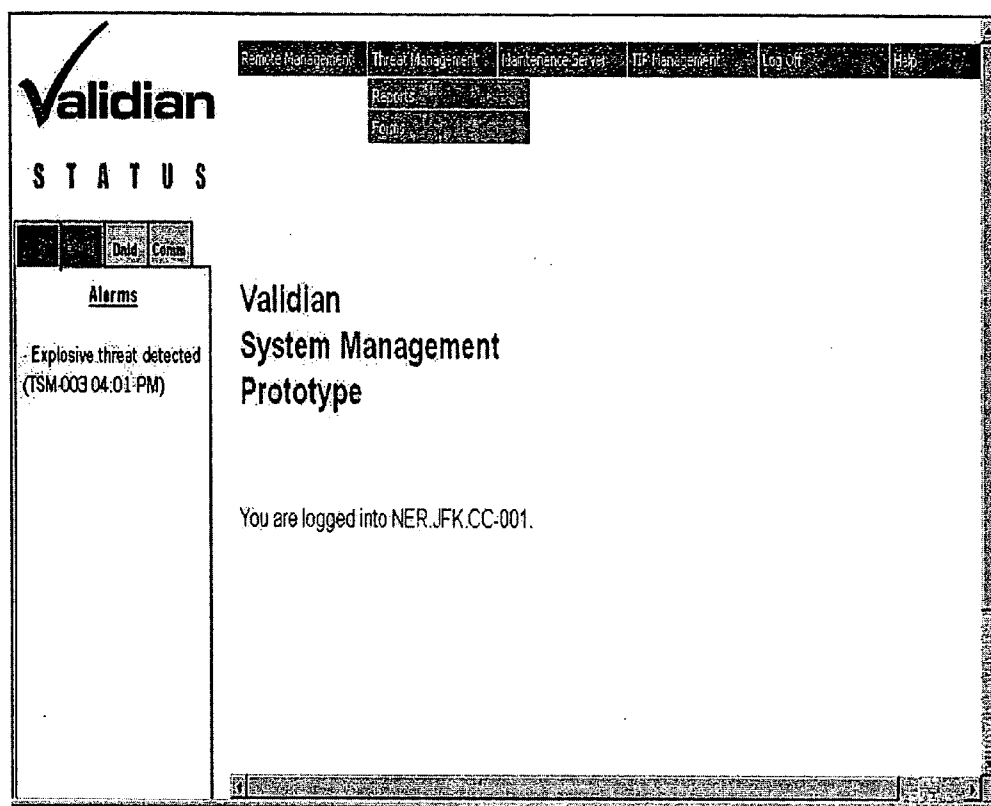


FIG. 17

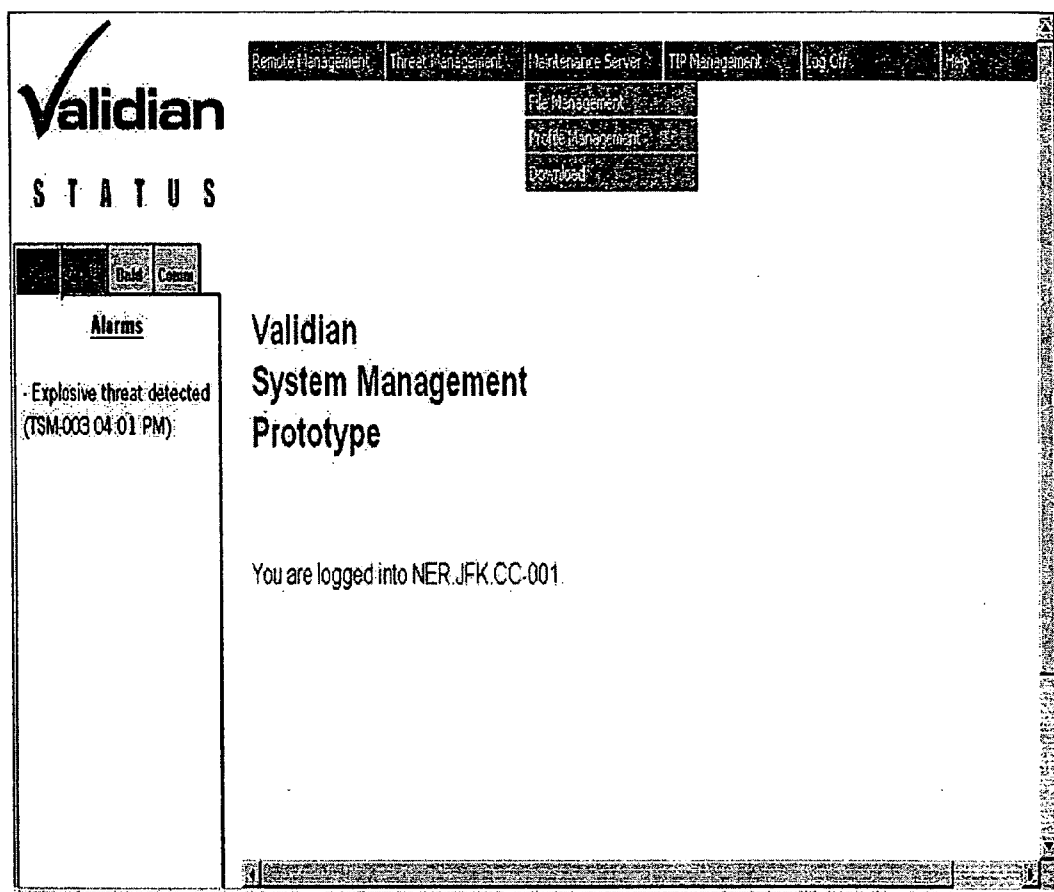


FIG. 18

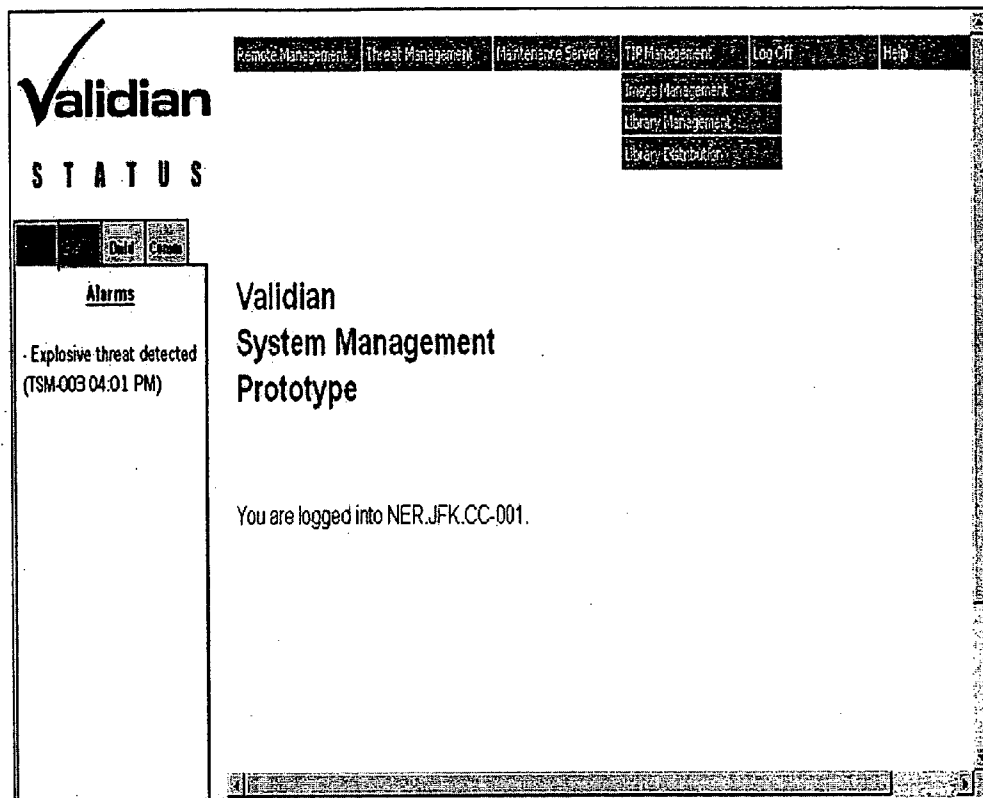


FIG. 19

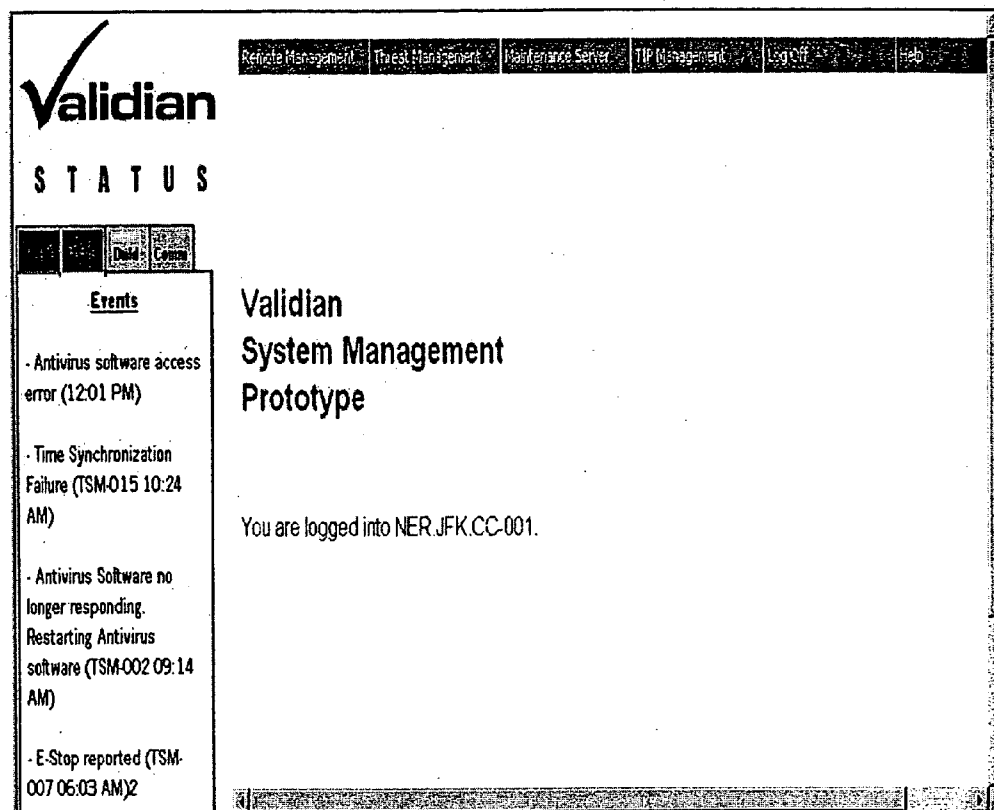



FIG. 20



**STATUS** User Administration

Remote Management Threat Management Maintenance Server TIF Management Log Off Help

**Communications**  
No Response to Ping  
(TSA-023 07:23 AM)

Employee ID	First Name	Last Name	Status	Access Level	Last Access
E130153	Jane	Smith	Logged on HH-001	4	05/01/2003 12:03pm
E130154	Edward	Chin	Logged on TSM-002	1	05/01/2003 09:04pm
E130155	Joe	Zanovitch	Logged on CC-002	4	05/01/2003 09:04pm
E130156	Bill	Bates	Suspended	2	05/01/2003 09:04pm
E130157	Joe	Porter	Logged off	4	05/01/2003 09:04pm
E130158	Mark	Gaug	Logged on TSM-003	1	05/01/2003 09:04pm
E130159	Sheila	Curry	Logged on TSM-004	1	05/01/2003 09:04pm
E130160	Dave	Matthews	Logged off	3	05/01/2003 09:04pm
E130161	Eunice	Kim	Logged off	1	05/01/2003 12:03pm
E130162	Jim	Bean	Logged on HH-003	3	05/01/2003 09:04pm
E130163	Jane	Smith	Logged on HH-001	4	05/01/2003 12:03pm
E130164	Edward	Chin	Logged on TSM-002	1	05/01/2003 09:04pm

Unselect All

Create New User View Selected User Modify Selected User  
Delete Selected User(s)

FIG. 21

Period Management	Threat Management	Maintenance Server	TIP Management	Log Off	Help
-------------------	-------------------	--------------------	----------------	---------	------

# Validian

STATUS

**Communications**

No Response to Ping  
(TSA-023 07:23 AM)

**Report Filter**

Fault Type:

Start Date:

Machine(s):


Region	State	Airport
ALL	NE	ALL
SER	NV	LAX
NCR	NH	JFK
SCR	NJ	LGA
WR	NM	BGM
		CAE

Terminal

Cbedpoint

Machine

FIG. 22



**S T A T U S**

**Communications**

- No Response to Ping  
(TSA-023 07:23 AM)

## Performance Information

**Report Format:** Throughput

---

**Report Filter**

**Time Period/ Interval:** One year broken down by month

**Start Date:** 05/13/2003 [Popup Calendar](#)

**Machine(s):**

Region	State	Airport
ALL	NE	ALL
NEP	NV	LAX
SER	NH	JFK
NCR	NJ	LGA
SCR	NM	BGM
WR	NY	CAE

Terminal	Checkpoint	Machine
All	N/A	N/A
T1		
T2		
T3		
T4		


**Operator:** All

**Type:** Normal

Submit

FIG. 23





**Validian**

**S T A T U S**

[Remote Management](#) | [Threat Management](#) | [Maintenance Server](#) | [TIP Management](#) | [Log Off](#) | [Help](#)

## System Administration

**Communications**


No Response to Ping  
(TSA-023 07:23 AM)

Hostname	Type	IP Address	Connection Type	Commands
CC-001	Parent	24.12.225.44	LAN	
CC-029	CC	128.226.29.33	LAN	<a href="#">Sync Time</a>   <a href="#">Reboot</a>   <a href="#">Modify</a>   <a href="#">Delete</a>
TSM-001	TSM	24.29.61.12	Dialup	<a href="#">Get Software Versions</a>   <a href="#">Sync Time</a>   <a href="#">Reboot</a>   <a href="#">Modify</a>   <a href="#">Delete</a>
TSM-002	TSM	66.129.0.128	LAN	<a href="#">Get Software Versions</a>   <a href="#">Sync Time</a>   <a href="#">Reboot</a>   <a href="#">Modify</a>   <a href="#">Delete</a>
TSM-003	TSM	128.109.1.99	LAN	<a href="#">Get Software Versions</a>   <a href="#">Sync Time</a>   <a href="#">Reboot</a>   <a href="#">Modify</a>   <a href="#">Delete</a>

[Add New Host](#)

© 2003 Lockheed Martin Corporation

FIG. 24



**Validian**  
STATUS

[Remote Management](#)
[Threat Management](#)
[Maintenance Server](#)
[TIP Management](#)
[Log Off](#)
[Help](#)

Download
Cancel

**Communications**


No Response to Ping  
(TSA-023 07:23 AM)

## Download Schedule

Download	File	Date	Time	Locations
Dnld-001	All	05/20/2003	12:00pm	TSM-003
<u>Dnld-002</u>	Profile 2	05/21/2003	01:00pm	TSM-001, TSM-005, ...
Dnld-003	Profile 4	05/23/2003	03:00am	CC-003, CC-001, ...
Dnld-004	Profile 2	05/25/2003	05:00am	TSM-002
Dnld-005	Profile 3	05/26/2003	06:00am	All

[Schedule New Download](#)

FIG. 25



**STATUS System Administration**

Remote Management Threat Management Maintenance Server TIP Management Log Off Help

Parent:

Hostname	Type	IP Address	Status	Connection	Local Time
NER.CC-001	CC	24.26.114.9	Online	LAN	05/01/2003 12:03pm

Children:

Hostname	Type	IP Address	Status	Connection	Local Time
NER.JFK.HH-001	HH	24.26.165.15	Online	LAN	05/01/2003 12:03pm
NER.JFK.T6.CP2.CC-001	CC	24.26.165.15	Online	LAN	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-002	TSM	24.26.165.15	Online	Dialup	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-003	TSM	24.26.165.15	Offline	Dialup	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-004	TSM	24.26.165.15	Rebooting	LAN	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-005	TSM	24.26.165.15	Repair	LAN	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-006	TSM	24.26.165.15	Online	LAN	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-007	TSM	24.26.165.15	Online	LAN	05/01/2003 09:04pm
NER.JFK.T6.CP2.TSM-008	TSM	24.26.165.15	Online	LAN	05/01/2003 12:03pm

Unselect All

Synchronize All Times Reboot Selected Host(s)

Add New Host View Selected Host Modify Selected Host

Delete Selected Host(s)

© 2003 Lockheed Martin Corporation

FIG. 26

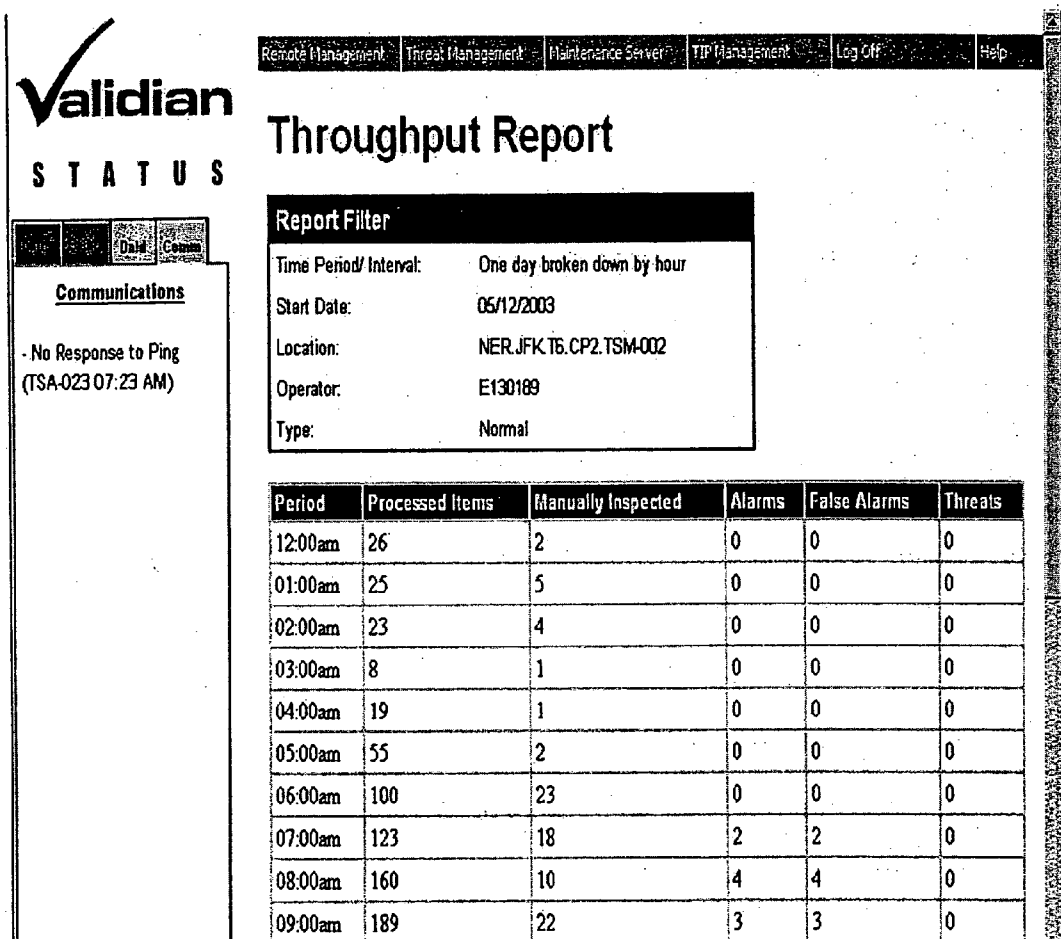


FIG. 27

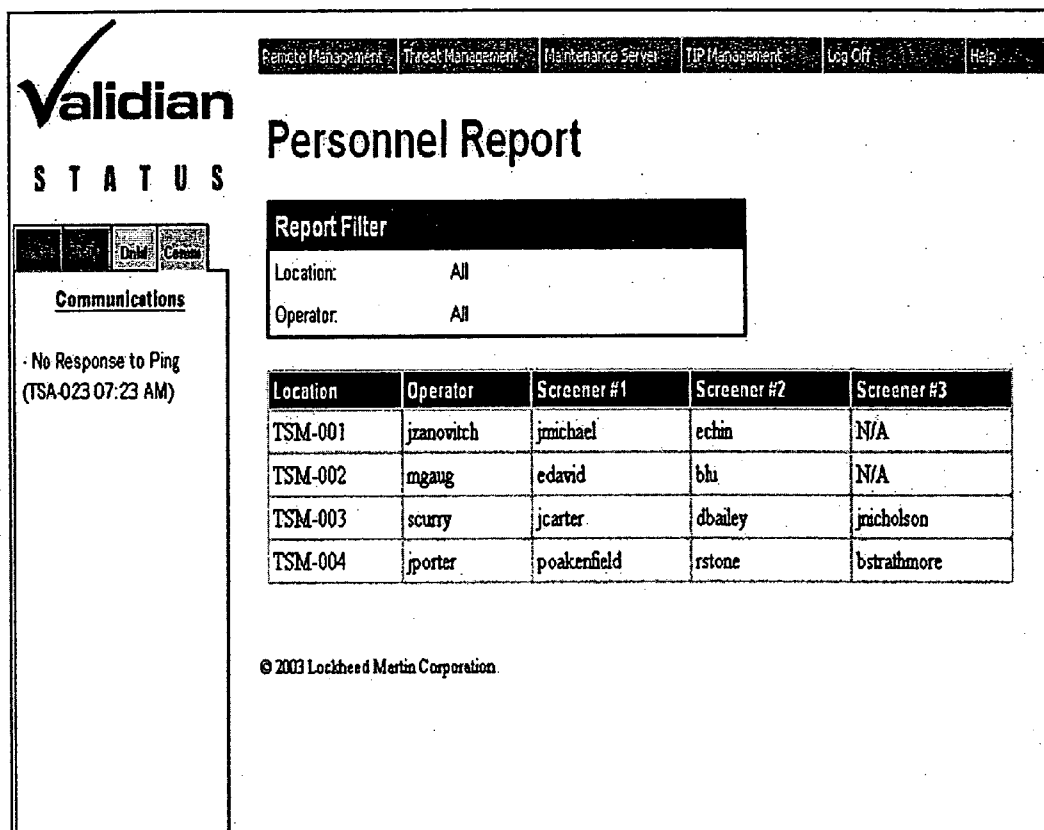


FIG. 28

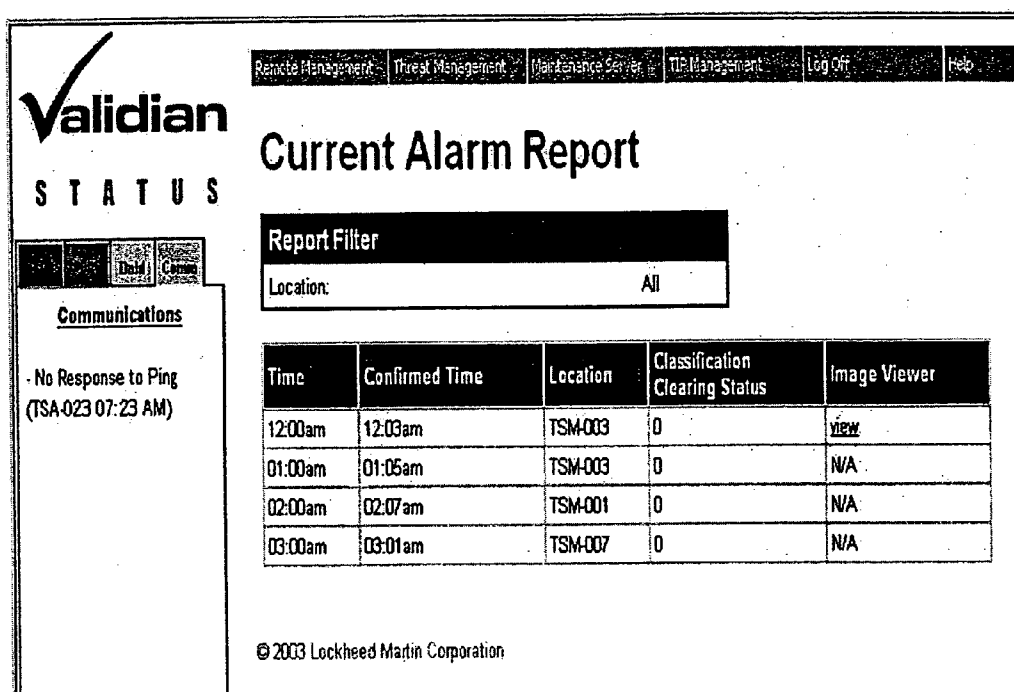



FIG. 29



**Validian**  
STATUS

[Remote Management](#) | [Threat Management](#) | [Maintenance Server](#) | [TIP Management](#) | [Log Off](#) | [Help](#)

## Historical Bag/Threat Information

### General Overview Report

**Communications**

- No Response to Ping  
(TSA-023 07:23 AM)

Report Filter	
Time Period:	One month
Machine ID:	All
Operator:	All

Bag ID	Machine ID	Date/Time	Threat Type	Supervisor Resolution
B000101	NER.JFK.T6.CP2.TSM-002	05/26/2003 05:43pm	Weapon	Threat successfully cleared.
B000102	NER.JFK.T6.CP2.TSM-004	05/29/2003 05:43pm	Explosive	Threat successfully cleared.
B012433	NER.JFK.T6.CP2.TSM-001	05/30/2003 05:43pm	Weapon	Threat successfully cleared.
B064321	NER.JFK.T6.CP2.TSM-006	06/14/2003 05:43pm	Explosive	Threat successfully cleared.

[Back](#)

© 2003 Lockheed Martin Corporation

FIG. 30

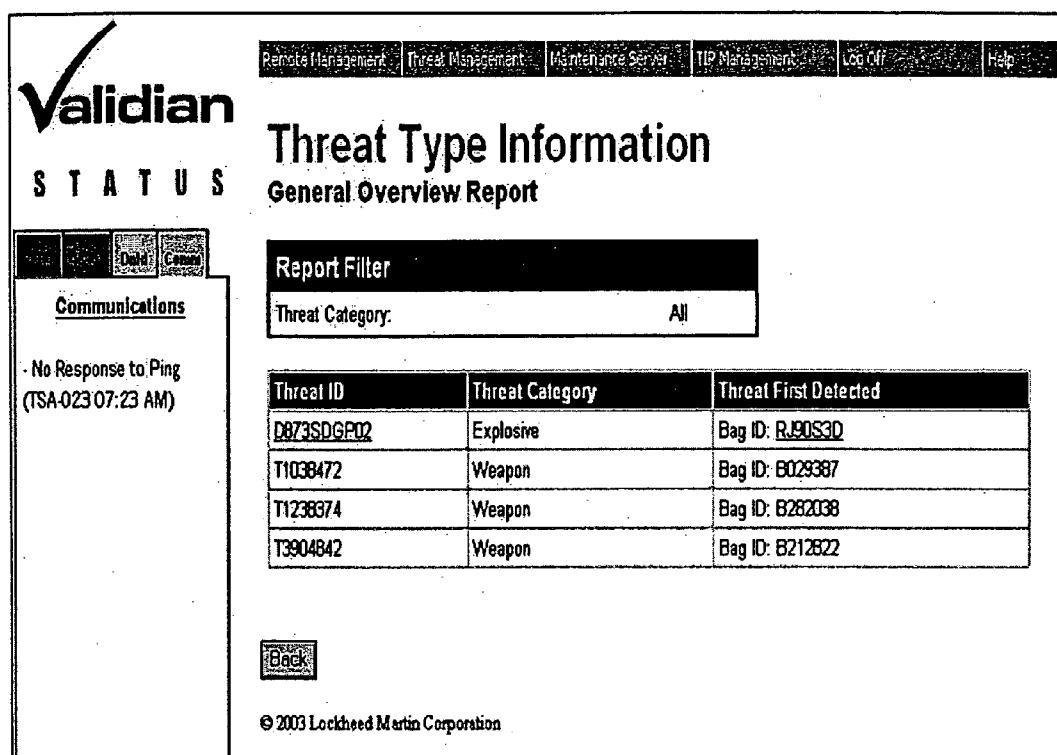


FIG. 31



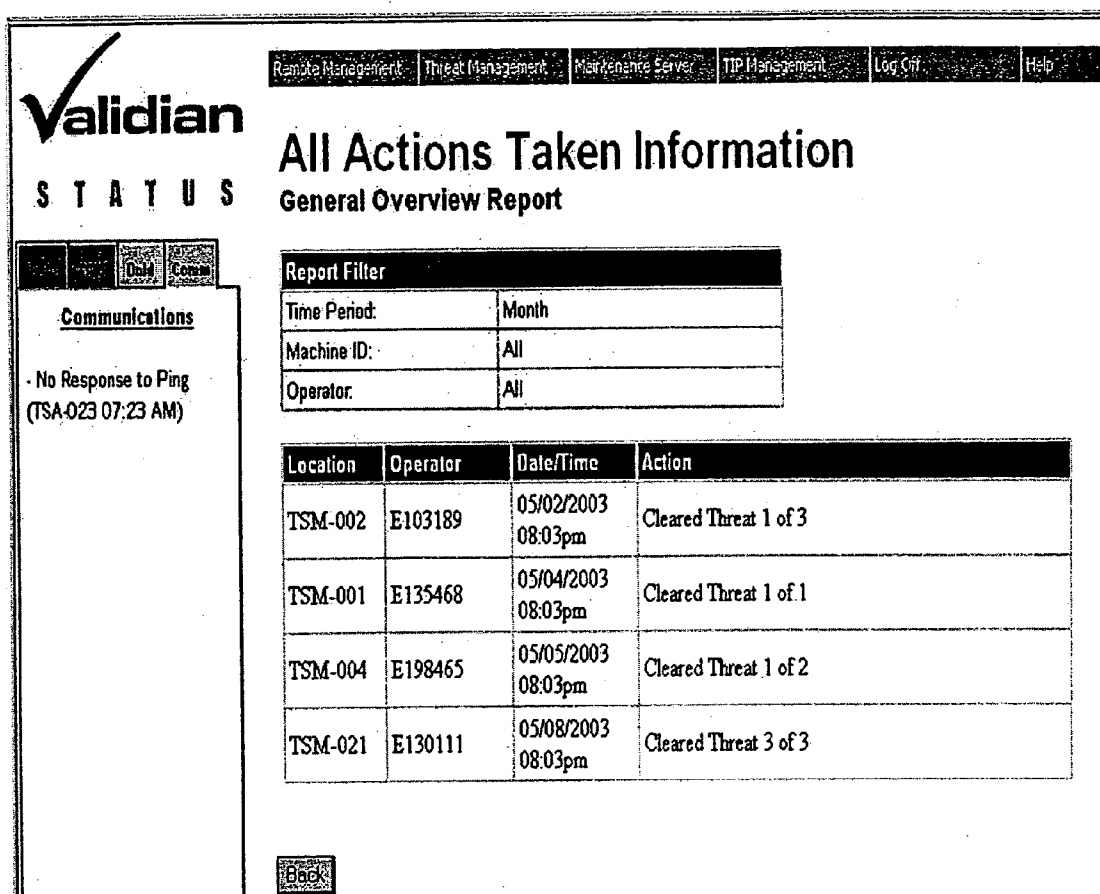



FIG. 32



**STATUS File Management**

Remote Management Threat Management Maintenance Server TIP Management Log Off Help

**Communications**

No Response to Ping  
(TSA-023 07:23 AM)

Filename	Description	Owner	Version	Type	Build Date
F000374	Maintenance Server Software	E130189	1.2	Config	05/01/2003
F000375	TSM firmware	E130190	3.1	SM	05/01/2003
F000376	Control Center Software	E130165	5.0	Control	05/01/2003
F000377	CC Antivirus Software	E130166	1.1	Exe	05/01/2003
F000378	Control Center Software	E130198	1.1	Config	05/01/2003
F000379	CT Software	E154123	1.6	CT	05/01/2003
F000380	SM Software	E130189	1.01	SM	05/01/2003
F000381	SM firmware	E130190	6.6	SM	05/01/2003
F000382	Threat Management Software	E130165	1.02	Config	05/01/2003
F000383	Remote Management Software	E130166	1.41	Control	05/01/2003
F000384	Threat Library - Hand Guns	E130198	1.11	SM	05/01/2003
F000385	Threat Library - Small Bombs	E154123	1.0	Exe	05/01/2003
F000386	Threat Library - Rifles	E130189	3.0	Config	05/01/2003
F000387	Threat Library - Kitchen Knives	E130190	2.2	SM	05/01/2003

Unselect All

Add New File Update Selected File View Selected File Details

Delete Selected File(s)

© 2003 Lockheed Martin Corporation

FIG. 33



# STATUS Profile Management

Profile ID	Description	Creator	Files	Type	Creation Date
P000374	Updated Control Center Software	E130189	10	Control	05/01/2003
P000375	Updated TSM firmware	E130159	25	SM	05/01/2003
P000376	Updated Control Center Software	E130186	1	Control	05/01/2003
P000377	Updated Control Center Software	E130120	15	Control	05/01/2003
P000378	Updated Control Center Software	E130121	12	Control	05/01/2003
P000379	Updated Control Center Software	E130122	13	Control	05/01/2003
P000380	Updated TSM firmware	E130160	4	SM	05/01/2003
P000381	Updated TSM firmware	E130178	6	SM	05/01/2003
P000382	Updated Control Center Software	E195189	15	Control	05/01/2003


Unselect All

Create New Profile View Selected Profile Details

Delete Selected Profile(s)

© 2003 Lockheed Martin Corporation

FIG. 34



Remote ManagementThreat ManagementMaintenance ServerTIP ManagementLog CtlHelp

STATUS

Download Management

Download IDProfile IDDateTime

D000383P00037405/20/200310:00am

D000408P00037505/20/200310:00am

D000409P00037605/20/200310:00am

D000410P00037705/20/200310:00am

D000411P00037805/20/200310:00am

D000412P00037905/20/200310:00am

D000413P00040005/20/200310:00am

Unselect All

Schedule New DownloadView/Modify Selected Download

Delete Selected Download(s)

© 2003 Lockheed Martin Corporation

Communications

No Response to Ping  
(TSA-023 07:23 AM)

FIG. 35

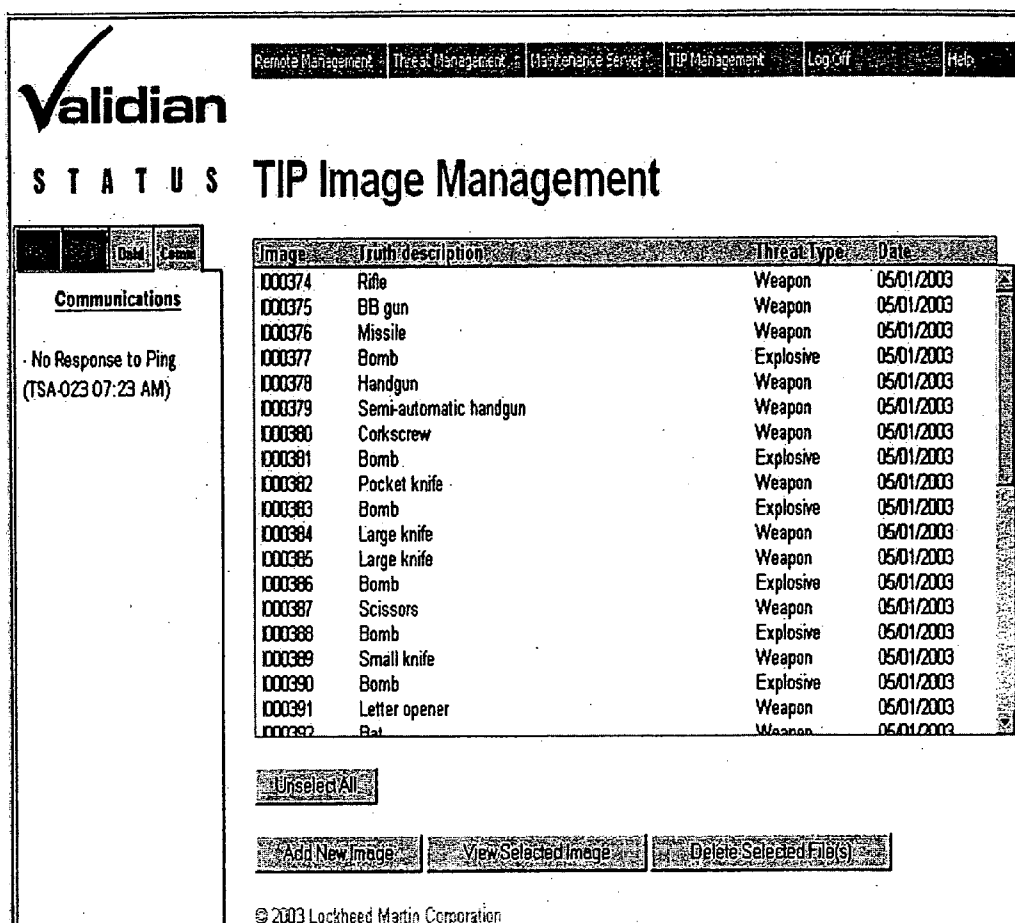


FIG. 36

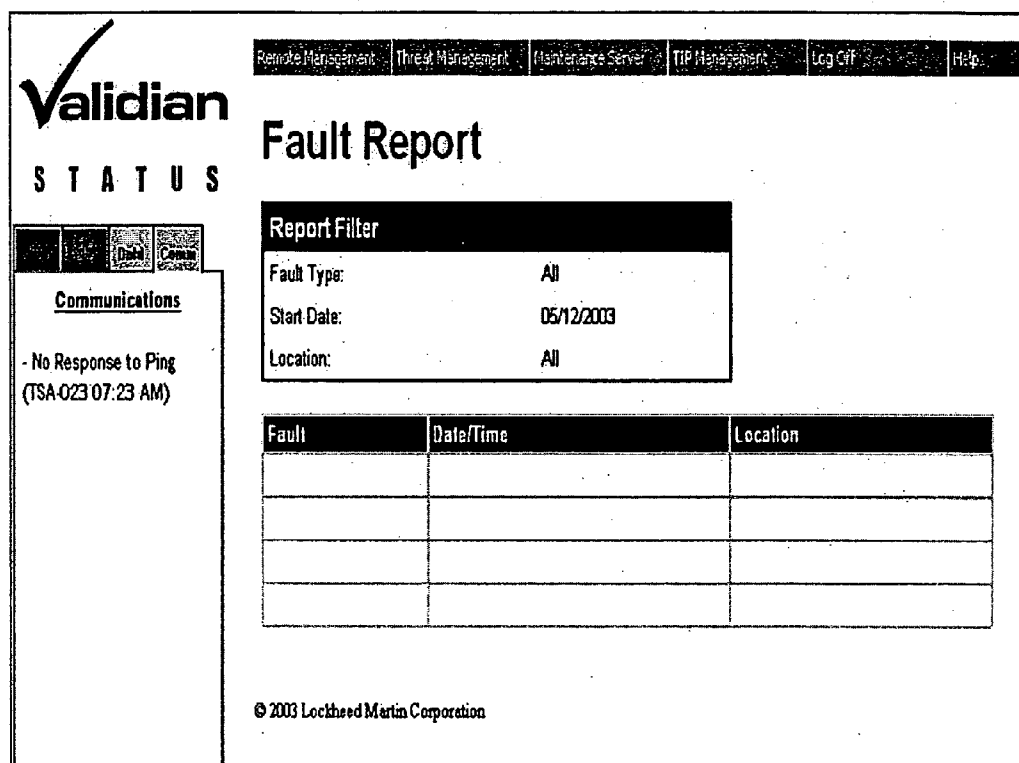


FIG. 37

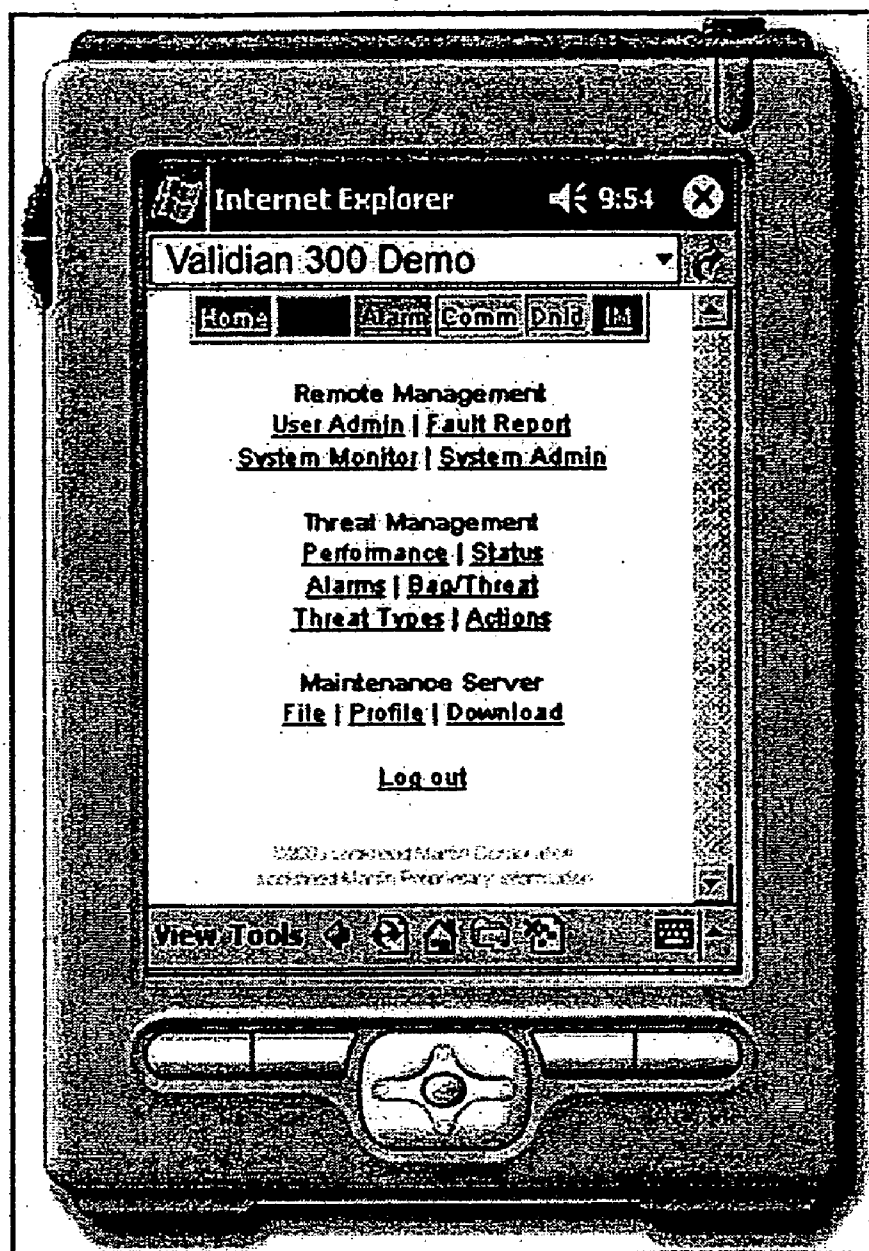


FIG. 38

## THREAT SCANNING MACHINE MANAGEMENT SYSTEM

[0001] The present invention relates generally to system management, and, more particularly, to the management of threat scanning machines.

[0002] Threat scanning machines are often employed in locations where safety and security are at issue. Transportation facilities, for example, airports, train stations, seaports, and the like, may employ threat scanning machines to detect security threats within passenger or freight baggage. Other facilities, such as office buildings, government buildings, court houses, museums and the like may employ threat scanning machines to detect restricted items being carried by a person seeking entry to the facility. A threat scanning machine, as used herein, refers to any device capable of detecting an object defined as a threat. A threat, as used herein, can be anything that is restricted from being brought aboard a vehicle, into a building or into an area.

[0003] Threat scanning machines may be of different make and model, including carry-on bag scanning machines, checked-bag scanning machines, walk-through metal detectors, x-rays, computerized tomography devices, magnetic resonance imaging devices, and the like, thus requiring individualized maintenance and control of each machine's software and data components. The task of individually maintaining and controlling each machine may be time consuming, prone to error and expensive. For example, when supervisor attention is required at a particular machine, the supervisor must physically go to the machine, assess the situation and provide guidance to the threat scanning machine operator. As another example, when the software in an existing threat scanning machine needs to be upgraded, the media containing the upgrade may be required to be carried from machine to machine in order to perform the upgrade. The diversity of threat scanning machine types and the varied locations of threat scanning machines pose obstacles to the efficient management of the threat scanning machines.

[0004] In an exemplary embodiment of the threat scanning machine management system, the threat scanning machines are connected to a communication network. One or more control center computers are connected to the communication network. The threat scanning machines, possibly of different make and model, are adapted with hardware and software to allow them to communicate over the network with the control center computer. The control center computer is adapted with software and/or hardware to control and manage threat scanning machines. In another exemplary embodiment of the present invention, the control computer can transmit data, such as, for example, operational software and threat profiles to the threat scanning machine; and the threat scanning machines may transmit data, such as, for example, images and performance data to the control computer.

[0005] In yet another exemplary embodiment of the present invention, a supervisor may view the images or performance data of a threat scanning machine remotely on the control center computer, assess the situation and assist the threat scanning machine operator remotely, thereby permitting the supervisor to manage multiple threat scanning machines in an efficient manner. In still another exemplary embodiment of the present invention, the threat scanning

machine management system may be dynamically configurable, the network may be a wireless network, and the control center computer may be a portable device, thus permitting a superior to manage the threat scanning machines while remaining mobile.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0006] FIG. 1 is a functional block diagram of an exemplary embodiment of a threat scanning machine management system;

[0007] FIG. 2 is a functional block diagram of an exemplary embodiment of a threat scanning machine management system showing the control centers connected to a threat scanning machine in accordance with the present invention;

[0008] FIG. 3 is a functional block diagram of an exemplary embodiment of a threat scanning machine management system showing the details of an exemplary threat scanning machine in accordance with the present invention;

[0009] FIG. 4 is a functional block diagram of an exemplary embodiment of a threat scanning machine management system showing the details of an exemplary control center in accordance with the present invention;

[0010] FIG. 5 is a functional block diagram of an exemplary embodiment of the logical functions of an exemplary threat management module in accordance with the present invention;

[0011] FIG. 6 is a functional block diagram of an exemplary embodiment of a remote management module in accordance with the present invention;

[0012] FIG. 7 is a functional block diagram of an exemplary embodiment of a maintenance server module in accordance with the present invention;

[0013] FIG. 8 is a functional block diagram of an exemplary embodiment of a control center database and web service connections in accordance with the present invention;

[0014] FIG. 9 is a functional block diagram of an exemplary control and maintenance system showing a web browser connection in accordance with the present invention;

[0015] FIG. 10 is a functional block diagram of an exemplary threat scanning machine architecture in accordance with the present invention;

[0016] FIG. 11 is a functional block diagram of an exemplary embodiment of the threat scanning machine management system showing an exemplary approach to network security in accordance with the present invention;

[0017] FIG. 12 is a functional block diagram of an exemplary embodiment of the threat scanning machine management system showing exemplary security components in accordance with the present invention;

[0018] FIGS. 13A and 13B are a functional block diagram of an exemplary embodiment of the threat scanning machine management system showing exemplary alternative approaches to the network connection of security equipment in accordance with the present invention;



[0019] **FIG. 14** is a functional block diagram of an exemplary message interface between a threat scanning machine and the threat scanning machine management system in accordance with the present invention;

[0020] **FIG. 15** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the main menu screen;

[0021] **FIG. 16** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the items of the Remote Management menu;

[0022] **FIG. 17** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the items of the Threat Management menu;

[0023] **FIG. 18** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the items of the Maintenance Server menu;

[0024] **FIG. 19** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the items of the Threat Image Projection (TIP) Management menu;

[0025] **FIG. 20** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing Event information;

[0026] **FIG. 21** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing User Administration data;

[0027] **FIG. 22** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Fault Reporting selection dialog;

[0028] **FIG. 23** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Report Filter selection dialog;

[0029] **FIG. 24** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing System Administration data;

[0030] **FIG. 25** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a download schedule;

[0031] **FIG. 26** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing the System Administration screen;

[0032] **FIG. 27** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Throughput Report;

[0033] **FIG. 28** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Personnel Report;

[0034] **FIG. 29** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Current Alarm Report;

[0035] **FIG. 30** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing an Historical Bag/Threat Information Report;

[0036] **FIG. 31** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Threat Type Information Report;

[0037] **FIG. 32** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing an All Actions Taken Information Report;

[0038] **FIG. 33** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a File Management Report;

[0039] **FIG. 34** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Profile Management Report;

[0040] **FIG. 35** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Download Management Report;

[0041] **FIG. 36** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a TIP Image Management Report;

[0042] **FIG. 37** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface showing a Fault Report; and

[0043] **FIG. 38** is an illustration of an exemplary embodiment of the threat scanning machine management system user interface adapted for use on a handheld or portable computer showing the main menu screen.

#### DETAILED DESCRIPTION

[0044] While the exemplary embodiments illustrated herein may show the various components of the threat scanning machine, and corresponding command and control center, collocated, it is to be appreciated that the various components of the system can be located at distant portions of a distributed network, such as a telecommunications network and/or the Internet or within a dedicated communications network. Thus, it should be appreciated that the components of the threat scanning machine and the command and control center, respectively, can be combined into one or more devices or collocated on a particular node of a distributed network, such as a telecommunications network. As will be appreciated from the following description, and for reasons of computational efficiency, the components of the communications network can be arranged at any location within the distributed network without affecting the operation of the system. Also, the exemplary embodiments shown provide a layout of the system in which the subsystems (i.e. Threat Management, Remote Management, and Maintenance Server) are shown separately for conceptual clarity and for illustrative purposes in both the threat scanning machines and the command and control center. However, it should be appreciated, that other layouts, groupings, and/or arrangements of the subsystems within the system can be used.

[0045] Furthermore, it should be appreciated that the various links connecting the elements can be wired or wireless links, or a combination thereof, or any known or later developed element(s) that is capable of supplying and/or communicating data to and from the connected elements.

[0046] **FIG. 1** shows a functional block diagram of an exemplary embodiment of a threat scanning machine man-

agement system 100. In particular, a command and control center 102 forms a top level of a system hierarchy and is interconnected by a network 112 to a next level comprising command and control centers 104. A command and control center 104 is interconnected with a threat scanning machine 106 by the network 112. A command and control center 104 is interconnected to command and control center 108 and to command and control center 110 via the network 112. A command and control center 110 is interconnected to one or more threat scanning machines 106 via the network 112.

[0047] The threat scanning machine management system 100 shown in FIG. 1 represents, for purposes of illustration, an exemplary configuration of command and control centers connected to each other and to threat scanning machines. However, it should be appreciated that the system 100 can be configured in order to be adaptable to various contemplated uses of the present invention. The configuration of the system 100 may be static or dynamic depending on contemplated uses of the invention. In an exemplary embodiment, a transportation facility may have an existing network (not shown), and in such a case, the threat scanning machine management system 100 may be adapted to the existing network. Alternatively, in another exemplary embodiment, if an existing network within a transportation facility is insufficient to be able to adapt to meet the communications requirements of the threat scanning machine management system 100 for any reason, such as low bandwidth or poor security, for example, then a new network can be installed for the threat scanning machine management system 100 to communicate over. However, it should be appreciated that any communications medium that allows the threat scanning machines and the control centers to communicate may be used with equal success. In an exemplary embodiment of the invention, the command and control centers and the threat scanning machines communicate over the network 112 using standard protocols common in the industry. Examples of standard protocols include, for example, HTTP, IIOP, RMI, SMTP, SSL, SHTTP and the like. Examples of a network 112 include wired or wireless solutions such as Ethernet, fiber optic, or the like. However, it should be appreciated that any present or future developed networks and/or network protocols which perform the tasks required for a command and control center to communicate with a threat scanning machine may be used with equal success according to the present invention.

[0048] In operation, the exemplary command and control center 110 communicates with one or more threat scanning machines 106 via the network 112. The command and control center 110 may transmit data to the threat scanning machine, for example, operational software, authorized users and credentials, threat profiles, etc. The operational software may comprise any combination of software for the operation of the scanning system and/or software for the operation of the management system 100. The authorized users and credentials, which may include, for example, a list of user login names and passwords. Threat profiles may include data that the threat scanning machine uses to aid in identification of threats, for example the shape of potential threat items, and/or the physical properties of an item that may indicate a potential threat. However, it should be appreciated that the data transmitted from the command and control center 110 to the threat scanning machine 106 may be any data required for the management and operation of

the threat scanning machine and could be used with equal effectiveness according to the present invention.

[0049] The exemplary threat scanning machine 106 communicates with the command and control center 110. The threat scanning machine may receive data from the command and control center 110 and/or may transmit data to the command and control center 110. The data that the threat scanning machine may transmit to the command and control center 110 may include, for example, performance data, requests for operator assistance, threat detection data, and/or the like.

[0050] The exemplary command and control center 110 may communicate with one or more command and control centers 104 and/or 102. In the exemplary embodiment shown in FIG. 1, the command and control centers 110 are interconnected to command and control centers 104. The command and control centers 104 are interconnected to command and control center 102. In this exemplary embodiment and configuration of the present invention control centers are arranged in a hierarchical manner to provide for the centralized management of many threat scanning machines 106 from a central command and control center 102, thus providing more efficient management of the threat scanning machines 106.

[0051] FIG. 2 is a functional block diagram of an exemplary embodiment of a threat scanning machine management system. In particular, a command and control center 104 at one level is interconnected with a command and control center 110 of another level. The command and control center 104 comprises, in addition to standard control center components, a threat management module 206, a remote management module 208 and a maintenance server module 210. The exemplary command and control center 110 comprises, in addition to standard control center components, a threat management module 222, a remote management module 224 and a maintenance server module 226. The exemplary command and control center 110 is interconnected to one or more exemplary threat scanning machines 106. The exemplary threat scanning machines 106 comprise, in addition to standard threat scanning machine components, a threat scanning machine computer 202 and a scanning system 204.

[0052] The exemplary threat scanning machine computer 202 comprises, in addition to standard computer hardware and software components, a management system interface module 220 and a scanning system interface module 218. The management system interface module 220 comprises a threat management module 212, a remote management module 214, and a maintenance server module 216. The exemplary threat management module 212, remote management module 214, and maintenance server module 216 are adapted to provide the interface and logic necessary for the threat scanning machine 106 to be connected to the maintenance and control system; these modules also communicate with the scanning system interface module 218. In an exemplary embodiment, the threat scanning machine computer 202 may be a standard PC. In another exemplary embodiment, the threat scanning machine computer 202 may be a specialized computer adapted specifically to control the threat scanning machine 106.

[0053] In yet another exemplary embodiment of the present invention, the threat scanning machine management

system 100 may be designed to adapt to any existing threat scanning machine computer 202 in order to allow the threat scanning machine 106 to connect and communicate within the threat scanning machine management system.

[0054] In still another exemplary embodiment of the present invention, the system interface module 220 can be housed in a computer separate from the threat scanning machine computer 202; this construction may be useful in situations where the execution of the system interface module 220 may present too great a processing and/or communications burden for the threat scanning machine computer 202.

[0055] In operation, the exemplary threat management module 206 of the command and control center 104 communicates with the threat management module 222 of the command and control center 110. The threat management module 222 of the command and control center 110 communicates with the threat management module 212 of the threat scanning machine 106. The threat management information comprises any information related to the management of threats. Examples of such information include Threat Image Projections (TIP), which are non-threat images with threats inserted into them for testing purposes, threats detected within a particular piece of baggage, or messages alerting the threat scanning machine operators to specific or general types of security risks that may be present or that may be attempted.

[0056] The exemplary remote management module 208 of the command and control center 104 communicates with the remote management module 224 of the command and control center 110. The remote management module 224 of the command and control center 110 communicates with the remote management module 214 of the threat scanning machine 106.

[0057] The exemplary maintenance server module 210 of the command and control center 104 communicates with the maintenance server module 226 of the command and control center 110. The maintenance server module 226 of the command and control center 110 communicates with the maintenance server module 216 of the threat scanning machine 106.

[0058] The command and control center 110 and the threat scanning machine 106 may communicate with each other using a predefined interface format. A predefined format allows for the command and control center 110 to be connected to any threat scanning machine 106 that has been adapted to work in accordance with the present invention. The tables below provide an example of a predefined interface between the command and control center 110 and the threat scanning machine 106. However, it should be appreciated that these tables merely represent an exemplary interface for illustration purposes. An actual interface may vary in both content and design, while still be used with equal success, depending on contemplated uses of the invention.

TABLE 1

Interface Message
Operator Bag Information
Screener Bag Information

TABLE 1-continued

Interface Message
Threat Information
Alarm Information
TIP Truth Information
Event Information
User Keystroke Information
TIP Configuration
Threat Detection Configuration

[0059] Table 1 shows the messages of an exemplary interface between the command and control center 110 and the threat scanning machine 106. In this exemplary interface the threat scanning machine 106 transmits messages to the command and control center 110, including, for example, Operator Bag Information, Screener Bag Information, Threat Information, Alarm Information, Threat Image Projection (TIP) Truth Information, Event Information, and/or User Keystroke Information. While the command and control center 110 transmits the TIP Configuration and Threat Detection Configuration messages to the threat scanning machine 106.

TABLE 2

Operator Bag Information	
Field Name	Description
Machine ID	Unique Identifier of Threat Scanning Machine
Bag ID	Identification of the bag
TIP ID	Identification of the TIP image
Logon ID	Operator ID
Bag Start Date CT	Date bag entered CT
Bag Start Time CT	Time bag entered CT
Bag Start Date QR	Date bag entered QR
Bag Start Time QR	Time bag entered QR
Operator Start Date CT	Date operator received the image
Operator Start Time CT	Time operator received the image
Operator End Date CT	Date operator completed the transaction
Operator End Time CT	Time operator completed the transaction
Bag Size	Length and/or weight of bag
Number of Threats	Number of threats detected in this bag
Number of Keystrokes	Number of keystrokes used by operator
Machine Decision	Machine indication of possible threat present within bag
Operator Decision	Operator indication of possible threat present within bag
Image ID	File name if cannot be derived from Bag ID

[0060] Table 2 shows the contents of an exemplary Operator Bag Information message. The Operator Bag Information message provides the command and control center 110 with information relating to a particular piece of baggage that has been scanned by the threat scanning machine 106.

[0061] In operation, the Operator Bag Information message is used to transmit information gathered by an operator on a particular bag. A supervisor or screener can review the Operator Bag Information message in assisting the operator in assessing a potential threat. Another use of the Operator Bag Information message may be to monitor the performance of an operator by placing a test bag containing a known threat or threat-like object in order to evaluate the operator's performance in identifying and assessing the potential threat. A further use of the Operator Bag Information message is to collect the messages over time in order

to form statistical models of the operator bag information. These statistical models may then be used to further enhance the operation of the threat scanning machine management system.

TABLE 3

<u>Screener Bag Information</u>	
Field Name	Description
Machine ID	Unique Identifier of Threat Scanning Machine
Bag ID	Identification of the bag
Logon ID	Screener ID
Screener Start Date CT	Date screener received the image
Screener Start Time CT	Time screener received the image
Screener End Date CT	Date screener completed the transaction
Screener End Time CT	Time screener completed the transaction
Number of Keystrokes	Number of keystrokes used by screener
Screener Decision	Determination of possible threat within bag
Screener Annotation	Screener's notes

[0062] Table 3 shows the contents of an exemplary Screener Bag Information message. The Screener Bag Information message provides the command and control center 110 with information from a particular screener about a particular piece of baggage.

[0063] In operation, when a threat scanning machine and/or operator detect a potential threat, a screener may be called upon to search the bag physically. The Screener Bag Information message is used to transmit information gathered by a Screener on a particular bag, such as the results of the physical search, threats found or not found, and any action taken by security with regard to the passenger or the baggage. A supervisor can review the Screener Bag Information in assisting the screener and operator in assessing and dealing with a potential threat. Another use of the Screener Bag Information message may be to monitor the performance of a screener by placing a test bag containing a known threat or threat-like object in order to evaluate the screener's performance in identifying and assessing the potential threat. A further use of the Screener Bag Information message is to collect the messages over time and correlate them with other system data, such as operator bag messages, in order to form statistical models of the screener bag information. These statistical models may then be used to further enhance the operation of the threat scanning machine management system.

[0064] An important aspect of the present invention, achieved through the operator and screener bag information messages, is that baggage may be tracked and associated with a particular person as that person moves about from place to place. For example, the information about a particular person's bag may be gathered as the person travels from location to location. The threat scanning can then be augmented with historical bag information data in order to further inform the operator, screener, or supervisor of the need for further inspection of the bag. Additionally, the baggage may be associated with an owner or carrier and vice versa, thereby permitting the threat scanning machine management system to enhance the threat scanning with auxiliary information about the owner or carrier to further enhance the security.

TABLE 4

<u>Threat Information</u>	
Field Name	Description
Machine ID	Unique Identifier of Threat Scanning Machine
Bag ID	Identification of the bag
CT Compound Type	Detected compound type
CT Mass	Measured mass/density
CT Confidence	Algorithm confidence factor
QR Compound Type	Detected compound type
QR Mass	Detected mass
Viewed by operator	Identifies if operator viewed this particular threat
Operator Action	Identifies what action the operator took on a given threat
Machine Decision	Machine decision of threat/non-threat
Threat Category	Identifies category of threat (e.g. weapon, explosive, etc.)
Picture File Name	The name of the file containing the picture

[0065] Table 4 above shows the contents of an exemplary Threat Information message. The Threat Information message provides the command and control center 110 with information about a particular threat detected by the threat scanning machine 106.

[0066] In operation Threat Information messages may be transferred to the command and control center for assistance in assessment by a supervisor. Additionally the supervisor in the command and control center may pass the message along to a more senior supervisor at a regional or national level command and control center. Further still, the system can be configured to automatically forward messages to higher levels in the hierarchy based on preselected or dynamic criteria, such as threat type or threat category. In this manner a threat that once was only able to be viewed and assessed on site, may now be able to be assessed by numerous people with possibly increasing levels of expertise, thereby by making efficient use of the supervisor's time through a hierarchical system of review and assessment of potential threats. This process can be carried out in a very expeditious manner through the interconnection of the threat scanning machine and the command and control centers on a distributed network. A further use of the Threat Information message is for the threat management system as a whole to scan for incidents of like or similar threats and alert supervisors and threat scanning machine operators to patterns in the data which may indicate a security breach is being attempted. Still another use of the Threat Information message is to gather information on things that have been identified as threats, but in actuality are only items of interest for purposes other than security. For example, the threat scanning machine could possibly be configured to monitor for aerosol cans within baggage and record statistics related to their occurrence in the baggage. This type of statistical information on "threats" could be used to guide policies regarding acceptable items, for general research into items in baggage, or for other such purposes. In yet another use of the Threat Information messages, the data may be collected over time and used to build statistical models of potential threats and their rates' of occurrence. These statistical models could be fed back into the threat management system in order to improve the accuracy, security, and management efficiency of the threat scanning machine management system.

TABLE 5

<u>Alarm Information</u>	
Field Name	Description
Machine ID	Unique Identifier of the Threat Scanning Machine
Bag ID	Identification of the bag
Alarm Severity	Identifies the severity of the alarm (e.g. nail clippers may be low, scissors may be medium, and gun/knife may be high)
Threat Category	Identifies category of threat (e.g. weapon, explosive, etc.)
Threat Confirmed	Annotation indicating if a threat was actually found

[0067] Table 5 shows the contents of an exemplary Alarm Information message. The Alarm Information message provides the command and control center 110 with information about a particular alarm from the threat scanning machine 106.

[0068] In operation the Alarm Information messages provide information useful to achieving management goals. As a current situational awareness indication, the Alarm Information may be transferred both vertically (i.e. from threat scanning machine to command and control center and on up the chain of command and control centers) and horizontally (i.e. threat scanning machine to threat scanning machine) in order to inform management and other operators of threat events in a real time manner. This real time reporting of threat event information makes an added dimension in security response possible, namely one of recognizing a looming security risk that may be geographically disbursed. By utilizing threat scanning machine management systems in multiple countries it would even be possible for nations to collectively detect and recognize a global security threat event that was in the early stages of being carried out. By collecting Alarm Information messages over time, statistical trends may be analyzed to aid management in improving the efficiency and security of the threat scanning machines.

TABLE 6

<u>Event Information</u>	
Field Name	Description
Machine ID	Unique Identifier of the Threat Scanning Machine
Logon ID	User ID
Event Date CT	Date event happened
Event Time CT	Time event happened
Event Code	Code responding to event
Event Detail	Text message about event

[0069] Table 6 shows the contents of an exemplary Event Information Message. The Event Information message provides the command and control center 110 with information about a particular event that occurred at a threat scanning machine 106.

[0070] In operation the Event Information messages provide information useful to achieving management goals. As a current situational awareness indication, the Event Information may be transferred both vertically (i.e. from threat scanning machine to command and control center and on up the chain of command and control centers) and horizontally (i.e. threat scanning machine to threat scanning machine) in

order to inform management and other operators of threat events in a real time manner. This real time nature of the reporting of threat event information brings a new dimension in security response, namely one of recognizing a looming security risk that may be geographically distributed. By collecting Event Information messages over time, statistical trends may be analyzed to aid management in improving the efficiency and security of the threat scanning machines.

TABLE 7

<u>User Keystroke Information</u>	
Field Name	Description
Machine ID	Unique Identifier of the Threat Scanning Machine
Logon ID	User ID
Bag ID	Identification of the bag
Keystroke Count	Number of keystrokes
Keystroke 1	Keystroke code
Timestamp 1	Time keystroke occurred
Keystroke 2	Keystroke code
Timestamp 2	Time keystroke occurred
...	...
Keystroke n	Keystroke code
Timestamp n	Time keystroke occurred

[0071] Table 7 shows the contents of an exemplary User Keystroke Information Message. The User Keystroke Information Message provides the command and control center 110 with details from the threat scanning machine 106 regarding the keystrokes of a user in the processing of a particular piece of baggage.

[0072] In operation, the User Keystroke Information message can be used for several management and supervisory purposes. The keystroke information may be used as a training aid by permitting supervisor to oversee the keystrokes used by a scanning machine operator and determine if the operator has used the scanning effectively, or if further training is needed in a particular area. Further, the keystroke information may be collected over time to study the efficiency of the threat scanning machine operators. Further still, the keystroke information may provide additional details to a supervisor who is assisting a scanning machine operator with a possible threat presence. Yet another use of the keystroke information may be to correlate the keystroke information with the image data and recreate, or playback, what took place at a particular machine to look for suspicious activity by the operator or as an aid in analyzing machine performance and debugging the threat scanning machine software.

[0073] An important aspect of the threat scanning machine management system is that is a system for managing both the threat scanning machine equipment and the personnel operating the threat scanning machines.

[0074] FIG. 3 is a functional block diagram of an exemplary threat scanning machine 106. In particular, the threat scanning machine 106 comprises, in addition to the standard threat scanning machine components, a computer 202 and a scanning system 204. The computer 202 comprises, in addition to standard computer components, management system interface module 220 and a scanning system interface module 218. The management system interface module 220 comprises a threat management module 212, a remote

management module 214, and a maintenance server module 216. The scanning system interface module 218 comprises one or more interface modules 320, and, optionally, a low level driver module 334. The threat management module 212 comprises a parent connection logic module 302, an action logic module 304, and an Application Programming Interface (API) logic module 306. The remote management module 214 comprises a parent connection logic module 308, an action logic module 310 and an API logic module 312. The maintenance server module 216 comprises a parent connection logic module 314, an action logic module 316, and an API logic module 318.

[0075] In operation, the threat scanning machine computer 202 executes the management system interface module 220 and the threat scanning machine physical machine interface software 218.

[0076] The exemplary interface and control logic module 302 contains the logic necessary for the connection and communication with the threat management module within the control computer. The Operation Logic component 304 contains operational logic. The application programming interface (API) component 306 contains the logic necessary for interfacing with the scanning system interface module 218.

[0077] The remote management module 214 contains interface and control logic module 308 that contains the logic necessary for the connection and communication with the remote management module in a command and control center. The operational logic module 310 that contains operational logic and an application programming interface (API) component 312 that contains the logic necessary for interfacing with the scanning system interface module 218.

[0078] The interface and control logic module 314 contains the logic necessary for the connection and communication with the maintenance server module in the command and control center. Also within the threat scanning machine maintenance server module 216 is an operational logic module 316 that contains operational action logic and an application programming interface (API) component 318 that contains the logic necessary for interfacing with the scanning system interface module 218.

[0079] An exemplary embodiment of the scanning system interface module 218 is shown in FIG. 3. In particular, the scanning system interface module 218 may contain one or more modules 320. These modules 320 may provide interface logic necessary for the management system interface module 220 to be interconnected with and/or to control the scanning system 204. The modules 320 may, for example, provide user interface functionality to the threat scanning machine 106 operator. In another exemplary embodiment of the invention, the operator interface module 320 may reside within the management system interface module 220. Examples of interface modules 320 include weapons processing, explosive processing, data archiving, diagnostics, image capture, material movement system, and/or the like. In addition, the scanning system interface module 218 also may contain a low-level driver module 334 adapted to directly control the circuitry, software, and/or mechanics of the scanning system 204. It should be appreciated that the threat scanning machine 106 shown in FIG. 3 is an exemplary embodiment shown for illustration purposes, and any threat scanning machine can be utilized within the threat

scanning machine management system 100 with equal success. The exact software component configuration of a particular threat scanning machine 106 will depend on its contemplated use and the capabilities of its subsystems, in accordance with the present invention.

[0080] FIG. 4 is a functional block diagram of an exemplary embodiment of the control center computer side of an exemplary threat scanning machine management system 100. In particular, the command and control center software 402 comprises, in addition to standard control center software components, a threat management module 404, a remote management module 406, and a maintenance server module 408.

[0081] The threat management module 404 comprises a parent connection logic module 410, a report logic module 412, an instruction logic module 414, and a threat scanning machine receive and control logic module 416.

[0082] The remote management module 406 comprises a parent connection logic module 418, a report logic module 420, an instruction logic module 422, and a threat scanning machine receive and control logic module 424.

[0083] The maintenance server module 408 comprises a parent connection logic module 426, a report logic module 428, an instruction logic module 430, and a threat scanning machine receive and control logic module 432. In an exemplary embodiment, the parent connection logic modules (302, 308, and 314) of the threat scanning machine 106 may be similar to the parent connection logic modules (410, 418, and 426) of the command and control center 110.

[0084] FIG. 5 is a functional block diagram of an exemplary embodiment of a threat management module in accordance with the present invention. In particular, a command and control center threat management module 404 is shown connected to a threat scanning machine threat management module 212. The command and control center threat management module 404 comprises an interface and control logic module 410, a configuration updater 502, a configuration database 504, a report generator and viewer module 506, one or more reports 508, an instruction logic module 414, a data management logic module 412, threat management database 510 and interface and control logic module 416. The threat scanning machine threat management module 212 comprises an interface and control logic module 302, an instruction logic module 304, a data management logic module 512, a threat management database 514, an API interface logic module 306, and a scanning system interface module 218.

[0085] FIG. 6 is a functional block diagram of an exemplary embodiment of a remote management module in accordance with the present invention. In particular, a command and control center remote management module 406 is shown connected to a threat scanning machine remote management module 214. The command and control center remote management module 406 comprises an interface and control logic module 418, a configuration updater 602, a configuration database 604, a scheduler 606, a system administration updater 610, one or more reports 608, an instruction logic module 422, a data management logic module 420, remote management database 612 and interface and control logic module 424. The threat scanning machine remote management module 214 comprises an interface and

control logic module 308, an instruction logic module 310, a data management logic module 614, a remote management database 616, an API interface logic module 312, and a scanning system interface module 218.

[0086] FIG. 7 is a functional block diagram of an exemplary embodiment of a maintenance server module in accordance with the present invention. In particular, a command and control center maintenance server module 408 is shown connected to a threat scanning machine maintenance server module 216. The command and control center maintenance server module 408 comprises an interface and control logic module 426, a configuration updater 702, a configuration database 704, a configuration management viewer 710, a data input interface 708, one or more data files 706, an instruction logic module 430, a data management logic module 428, maintenance server and configuration database 712, a scheduler module 714 and an interface and control logic module 432. The threat scanning machine threat management module 216 comprises an interface and control logic module 314, an instruction logic module 316, a data management logic module 716, a maintenance server database 718, an API interface logic module 318 and a scanning system interface module 218.

[0087] FIG. 8 is a functional block diagram of an exemplary embodiment of a control center database and web service connections in accordance with the present invention. In particular, the maintenance and control system data store 802 comprises a database access logic module 804, a web server logic module 806 and a database 808. The data management logic modules 412, 420, and 428 of the threat management, remote management, and maintenance server modules, respectively, are connected to the database access logic module 804. The report generator and viewer 506 and the configuration updater 502 of the threat management module 404 are connected to the web server logic module 806. The system administration updater 610, the scheduler 606 and the configuration updater 602 of the remote management module 406 are connected to the web server logic module 806. The configuration management viewer 710, the scheduler 714, the data input interface 708 and the configuration updater 702 of the maintenance server 408 are connected to web server logic module 806. The web server logic module 806 is connected to the database 808.

[0088] In operation, the data management logic modules 412, 420, and 428 of the threat management, remote management, and maintenance server modules respectively communicate with the database access logic module 804. The database access logic module provides the interface connectivity to the database 808. The web server logic module 806 provides the command and control center with web service access to the database 808.

[0089] FIG. 9 is a functional block diagram of an exemplary control and maintenance system showing a web browser connection in accordance with the present invention. In particular, web browsers 902 and 904 are shown connected to the web server logic module 806. While two web browsers are shown, it should be appreciated that multiple web browsers may connect to the web server logic module 806.

[0090] FIG. 10 is a functional block diagram of an exemplary threat scanning machine architecture. In particular, the threat scanning machine comprises a sensor 1002, a data

acquisition system 1004, a reconstruction computer 1006, and an operator workstation 1008. The reconstruction computer 1006 comprises a control logic module 1010. The operator workstation 1008 presents a graphical user interface to the operator of the threat scanning machine.

[0091] In operation, raw data from the sensor 1002 is collected by the data acquisition system 1004. The raw data is then transmitted to the reconstruction computer 1006. The reconstruction computer 1006 processes the raw data and may provide a three-dimensional image or a two-dimensional image to the operator workstation 1008. In a threat scanning machine adapted to be used with the maintenance and control system, the software for the maintenance and control system resides on the operator workstation 1008. The threat scanning machine management system can download software or data to the reconstruction computer 1006, operator workstation 1008, and/or other components of the threat scanning machine that may require software or data to operate.

[0092] FIG. 11 is a functional block diagram of an exemplary embodiment of the threat scanning machine management system showing an exemplary approach to network security for two different levels of security, confidential and secret. In particular, the public network 1102, for example a wide area network (WAN), is connected to both a confidential communications system 1104 and a secret communications system 1106. The confidential communications system comprises a router 1112, a triple data encryption standard (3DES) virtual private network connection 1114, a firewall 1116 and a local area network (LAN) switch 1118. An exemplary private network 1108 is connected to the LAN switch 1118. The secret communications system 1106 comprises a router 1120, a National Security Agency (NSA) cryptographic processor 1122, a firewall 1124, and a LAN switch 1126. A private network 1110 is connected to the LAN switch 1126.

[0093] FIG. 12 is a functional block diagram of an exemplary embodiment of the threat scanning machine management system showing exemplary security components in accordance with the present invention. In particular, a threat scanning machine 106 is connected to the public wide area network (WAN) 1102. A command and control center 110 is also connected to the public WAN 1102. Unauthorized users 1202 may be connected to the public wide area network. The threat scanning machine communications system comprises a router/phone 1112, an encryption module 1114 or 1120 depending on the level of security, a firewall 1116, and a local area network (LAN) switch 1118. The command and control center 110 comprises a threat management computer 404, a remote management computer 406, a maintenance server computer 408, a web server logic module 806, log files 1204, a database 808, a router/phone 1112, an encryption device 1114 or 1120 depending on the level of security required, a firewall 1116 and a LAN switch 1118.

[0094] In operation, the unauthorized users 1202 are restricted from accessing the threat scanning machine 106 or the command and control center 110. While the encryption devices 1114 or 1120, permit the threat scanning machine 106 and the command and control center 110 to communicate in a secure manner.

[0095] FIG. 13 is a functional block diagram of an exemplary embodiment of the threat scanning machine manage-

ment system showing exemplary alternative approaches to the network connection of security equipment in accordance with the present invention. In particular, **FIG. 13** shows two approaches to network security within a transportation facility. In **FIG. 13A**, the threat scanning machine **106** requires the security hardware and software to be present with the threat scanning machine. In **FIG. 13B**, there is one set of security hardware and software for an entire facility and the threat scanning machines **106** are all interconnected to the one set of communications security hardware and software.

[0096] In **FIG. 13A**, the threat scanning machine comprises application code **220**, a local area network switch **1118**, a firewall **1116**, an encryption device **1114** or **1120** depending on the level of security required, and a router/phone **1112**. In operation the threat scanning machine **106** containing its own set of communications security hardware and software is able to be directly connected to the public wide area network **1120**.

[0097] In **FIG. 13B**, the communications security hardware and software may be placed in a central locations and accessed by one or more threat scanning machines **106**. The communications equipment comprises a local area network switch **1118**, a firewall **1116**, an encryption device **1114** or **1120** depending on the level of security required, and a router/phone **1112**. The threat scanning machines **106** each contain their own application code **220**. The threat scanning machine are interconnected to the communications security equipment via the LAN switch **1118**.

[0098] In operation, each threat scanning machine **106** communicates through the LAN switch **1118** to the communications security hardware and software in order to access the public wide area network **1120**.

[0099] **FIG. 14** shows a functional block diagram of a threat scanning machine **106** interconnected with a command and control center **110**. In particular, **FIG. 14** shows an exemplary message interface between the threat scanning machine **106** and the command and control center **110** in accordance with the messages described in Tables 1 through 7 above.

[0100] In operation, the threat scanning machine **106** provides the following message to the command and control center **110**: operator bag information, the screener bag information, the threat information, alarm information, TIP truth information, event information, and user keystroke information. The command and control center **110** provides the following messages to the threat scanning machine **106**, TIP configuration and threat detection configuration.

[0101] One way that the personnel using a threat scanning machine management system can interact with the system is through computer adapted to provide a graphical user interface. The following is a description of an exemplary graphical user interface in accordance with the present invention. However, it should be appreciated that the graphical user interface shown in the figures is provided for illustrative purposes. A particular embodiment of the invention may have a graphical user interface that is implemented, configured, or adapted differently depending on the contemplated uses of the invention.

[0102] **FIG. 15** is an illustration of an exemplary user interface for the threat scanning machine management system showing the main menu screen. In particular, the main

menu comprises Remote Management, Threat Management, Maintenance Server, TIP Management, Log Off, and Help choices. There is also shown in **FIG. 15 a** tab style user interface element comprises the tabs choices of Alarms, Events, Dnld (an abbreviation for download), and Comm (an abbreviation for communications).

[0103] If the user selects the Remote Management menu choice, the Remote Management menu will be displayed. **FIG. 16** is an illustration of an exemplary user interface for the threat scanning machine management system showing the items available under the Remote Management menu choice. In particular, the Remote Management menu comprises User Administration, Fault Reporting, System Monitoring, and System Administration choices.

[0104] If the user selects, from the main menu, the Threat Management menu choice, the Threat Management Menu will be displayed. **FIG. 17** is an illustration of an exemplary user interface for the threat scanning machine management system showing the items available under the Threat Management menu choice. In particular, the Threat Management menu comprises Reports and Forms menu choices.

[0105] If the user selects, from the main menu, the Maintenance Server menu choice, the Maintenance Server menu will be displayed. **FIG. 18** is an illustration of an exemplary user interface for the threat scanning machine management system showing the items available under the Maintenance Server menu choice. In particular, the Maintenance Server menu comprises File Management, Profile Management, and Download menu choices.

[0106] If the user selects, from the main menu, the TIP Management menu choice, the TIP Management menu will be displayed. **FIG. 19** is an illustration of an exemplary user interface for the threat scanning machine management system showing the items available under the TIP Management menu choice. In particular, the TIP management menu comprises Image Management, Library Management, and Library Distribution menu choices.

[0107] If the user selects, from the main menu, the Log Off menu choice, the user will be logged of the system.

[0108] If the user selects, from the main menu, the Help menu choice, the user will be presented with information on how to operate the threat scanning machine management system.

[0109] **FIG. 20** shows an exemplary Events tab screen. **FIG. 26** shows an exemplary Comm (short for communications) tab screen. The tab screens allow the operator to quickly ascertain the status of important system functions.

[0110] Returning to the Remote Management menu of **FIG. 16**, if the user selects the User Administration menu choice, the User Administration screen will be displayed. **FIG. 21** is an illustration of an exemplary user interface for the threat scanning machine management system showing the User Administration screen.

[0111] If the users selects, from the Remote Management menu, the Fault Reporting menu choice, the Fault Reporting dialog will appear. **FIG. 22** is an illustration of an exemplary user interface for the threat scanning machine management system showing the Fault Reporting selection dialog interface.



[0112] If the user selects, from the Remote Management menu, the System Monitoring menu choice, the Performance Information dialog will be displayed. **FIG. 23** is an illustration of an exemplary user interface for the threat scanning machine management system showing the Performance Information dialog.

[0113] If the user selects, from the Remote Management menu, the System Administration menu choice, the System Administration menu will be displayed. **FIG. 24** is an illustration of an exemplary user interface for the threat scanning machine management system showing the System Administration screen.

[0114] Turning now to the Threat Management menu shown in **FIG. 17**, if the user selects, from the Threat Management menu, the Reports menu choice, the reports selection will be displayed. Examples of the types of reports available include the Download Schedule shown in **FIG. 25**, the Throughput Report shown in **FIG. 27**, the Personnel Report shown in **FIG. 28**, the Current Alarm Report shown in **FIG. 29**, the Historical Bag/Threat Information Report shown in **FIG. 30**, the Threat Type Information Report shown in **FIG. 31**, the Fault Report shown in **FIG. 37** and the All Actions Taken Information Report shown in **FIG. 32**.

[0115] Turning now to the Maintenance Server menu shown in **FIG. 18**, if the user selects from the Maintenance Server menu, the File Management menu choice, the File Management screen will be displayed. **FIG. 33** is an illustration of an exemplary user interface for the threat scanning machine management system File Management screen. From the File management screen, the user can add files.

[0116] If the user selects, from the Maintenance Server menu, the Profile Management menu choice, the Profile Management screen will be displayed. **FIG. 34** is an illustration of an exemplary user interface for the threat scanning machine management system showing the Profile Management screen. From the Profile Management screen, the user can define a profile comprising one or more files that require downloading. The profile is a way of bundling the files that require downloading together.

[0117] If the user selects, from the Maintenance Server menu, the Download menu choice, the Download Management screen will be displayed. **FIG. 35** is an illustration of an exemplary user interface for the threat scanning machine management system showing the Download Management screen. Using the Download Management screen, the user can schedule a download of a previously defined profile.

[0118] Turning now to the TIP Management menu shown in **FIG. 19**, if the user selects the Image Management option, the TIP Image Management screen will be displayed. **FIG. 36** is an illustration of an exemplary user interface for the threat scanning machine management system showing the TIP Image Management screen.

[0119] **FIG. 37** shows an exemplary Fault Report screen. There are no faults shown in this example. However, if faults were present for the report criteria specified, such faults would be displayed in the table along with the pertinent fault details.

[0120] **FIG. 38** shows an exemplary threat scanning machine management system user interface that has been adapted to be displayed on a handheld computer, laptop

computer, or the like. In particular, **FIG. 38** is presented to show the main menu screen on a simulated handheld device. While the other screens are not shown on a handheld device it should be appreciated that the entire threat management system user interface may be adapted to use on handheld computer, laptop computer, portable computer, network enabled communications device, or any type of portable computing device.

[0121] As shown in the above figures, the threat scanning machine management system can be implemented on a general-purpose computer, a special-purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit element, and ASIC or other integrated circuit, a digital signal processor, a hardwired electronic or logic circuit such as a discrete element circuit, a programmed logic device such as a PLD, PLA, FPGA, PAL, or the like. In general, any process capable of implementing the functions described herein can be used to implement a system for the management of threat scanning machines according to this invention.

[0122] Furthermore, the disclosed system may be readily implemented in software using object or object-oriented software development environments that provide portable source code that can be used on a variety of computer platforms. Alternatively, the disclosed system for managing threat scanning machines may be implemented partially or fully in hardware using standard logic circuits or a VLSI design. Other hardware or software can be used to implement the systems in accordance with this invention depending on the speed and/or efficiency requirements of the systems, the particular function, and/or a particular software or hardware system, microprocessor, or microcomputer system being utilized. The threat scanning machine management system illustrated herein can readily be implemented in hardware and/or software using any known or later developed systems or structures, devices and/or software by those of ordinary skill in the applicable art from the functional description provided herein and with a general basic knowledge of the computer and network communication arts.

[0123] Moreover, the disclosed methods may be readily implemented in software executed on programmed general-purpose computer, a special purpose computer, a microprocessor, or the like. In these instances, the systems and methods of this invention can be implemented as program embedded on personal computer such as JAVA® or CGI script, as a resource residing on a server or graphics workstation, as a routine embedded in a dedicated encoding/decoding system, or the like. The system can also be implemented by physically incorporating the system and method into a software and/or hardware system, such as the hardware and software systems of an image processor.

[0124] It is, therefore, apparent that there is provided in accordance with the present invention, systems and methods for managing threat scanning machines. While this invention has been described in conjunction with a number of embodiments, it is evident that many alternatives, modifications and variations would be or are apparent to those of ordinary skill in the applicable arts. Accordingly, applicants intend to embrace all such alternatives, modifications, equivalents and variations that are within the spirit and scope of this invention.

1. A dynamically configurable maintenance and control system for threat scanning machines located in an airport, the system comprising:

a threat scanning machine in the airport, adapted to communicate via a network; and

a control computer, adapted to communicate via the network with the threat scanning machine and to dynamically re-configure the system by selecting a threat scanning machine for addition to the system;

wherein said selecting is performed in real time in response to current conditions in the airport.

2-11. (canceled)

12. A method of centrally maintaining and controlling threat scanning machines located in an airport, the method comprising:

connecting a control computer to a communication network;

connecting a threat scanning machine to a communication network;

loading the control computer with software to communicate with threat scanning machines;

initiating communication between control computer and threat scanning machine; and

dynamically re-configuring the network by the control computer selecting a threat scanning machine in real time in response to a condition.

13-16. (canceled)

17. A computer program fixed in a tangible medium, the program comprising:

means for controlling a system of threat scanning machines via a network;

means for dynamically selecting a threat scanning machine for addition to the network in real time in response to a condition; and

means for dynamically restricting access of a threat scanning machine to the network.

18. The program of claim 17, wherein the means for dynamically selecting comprises means for identifying an activity taking place in an area near the selected threat scanning machine.

19. The program of claim 18, wherein the area is a portion of an airport.

\* \* \* \* \*