




(86) **Date de dépôt PCT/PCT Filing Date:** 2010/08/20
(87) **Date publication PCT/PCT Publication Date:** 2011/02/24
(45) **Date de délivrance/Issue Date:** 2014/12/16
(85) **Entrée phase nationale/National Entry:** 2012/02/15
(86) **N° demande PCT/PCT Application No.:** NO 2010/000312
(87) **N° publication PCT/PCT Publication No.:** 2011/021946
(30) **Priorité/Priority:** 2009/08/20 (NO2009 2870)

(51) **Cl.Int./Int.Cl.** **A01K 91/18** (2006.01)
(72) **Inventeurs/Inventors:**
SORVIK, OMAR, NO;
PAULSEN, ODD ARILD, NO
(73) **Propriétaire/Owner:**
SORINWEST A/S, NO
(74) **Agent:** PARLEE MCLAWS LLP

(54) **Titre : DISPOSITIF DE PROTECTION DE PECHE**

(54) **Title: FISHING PROTECTOR**

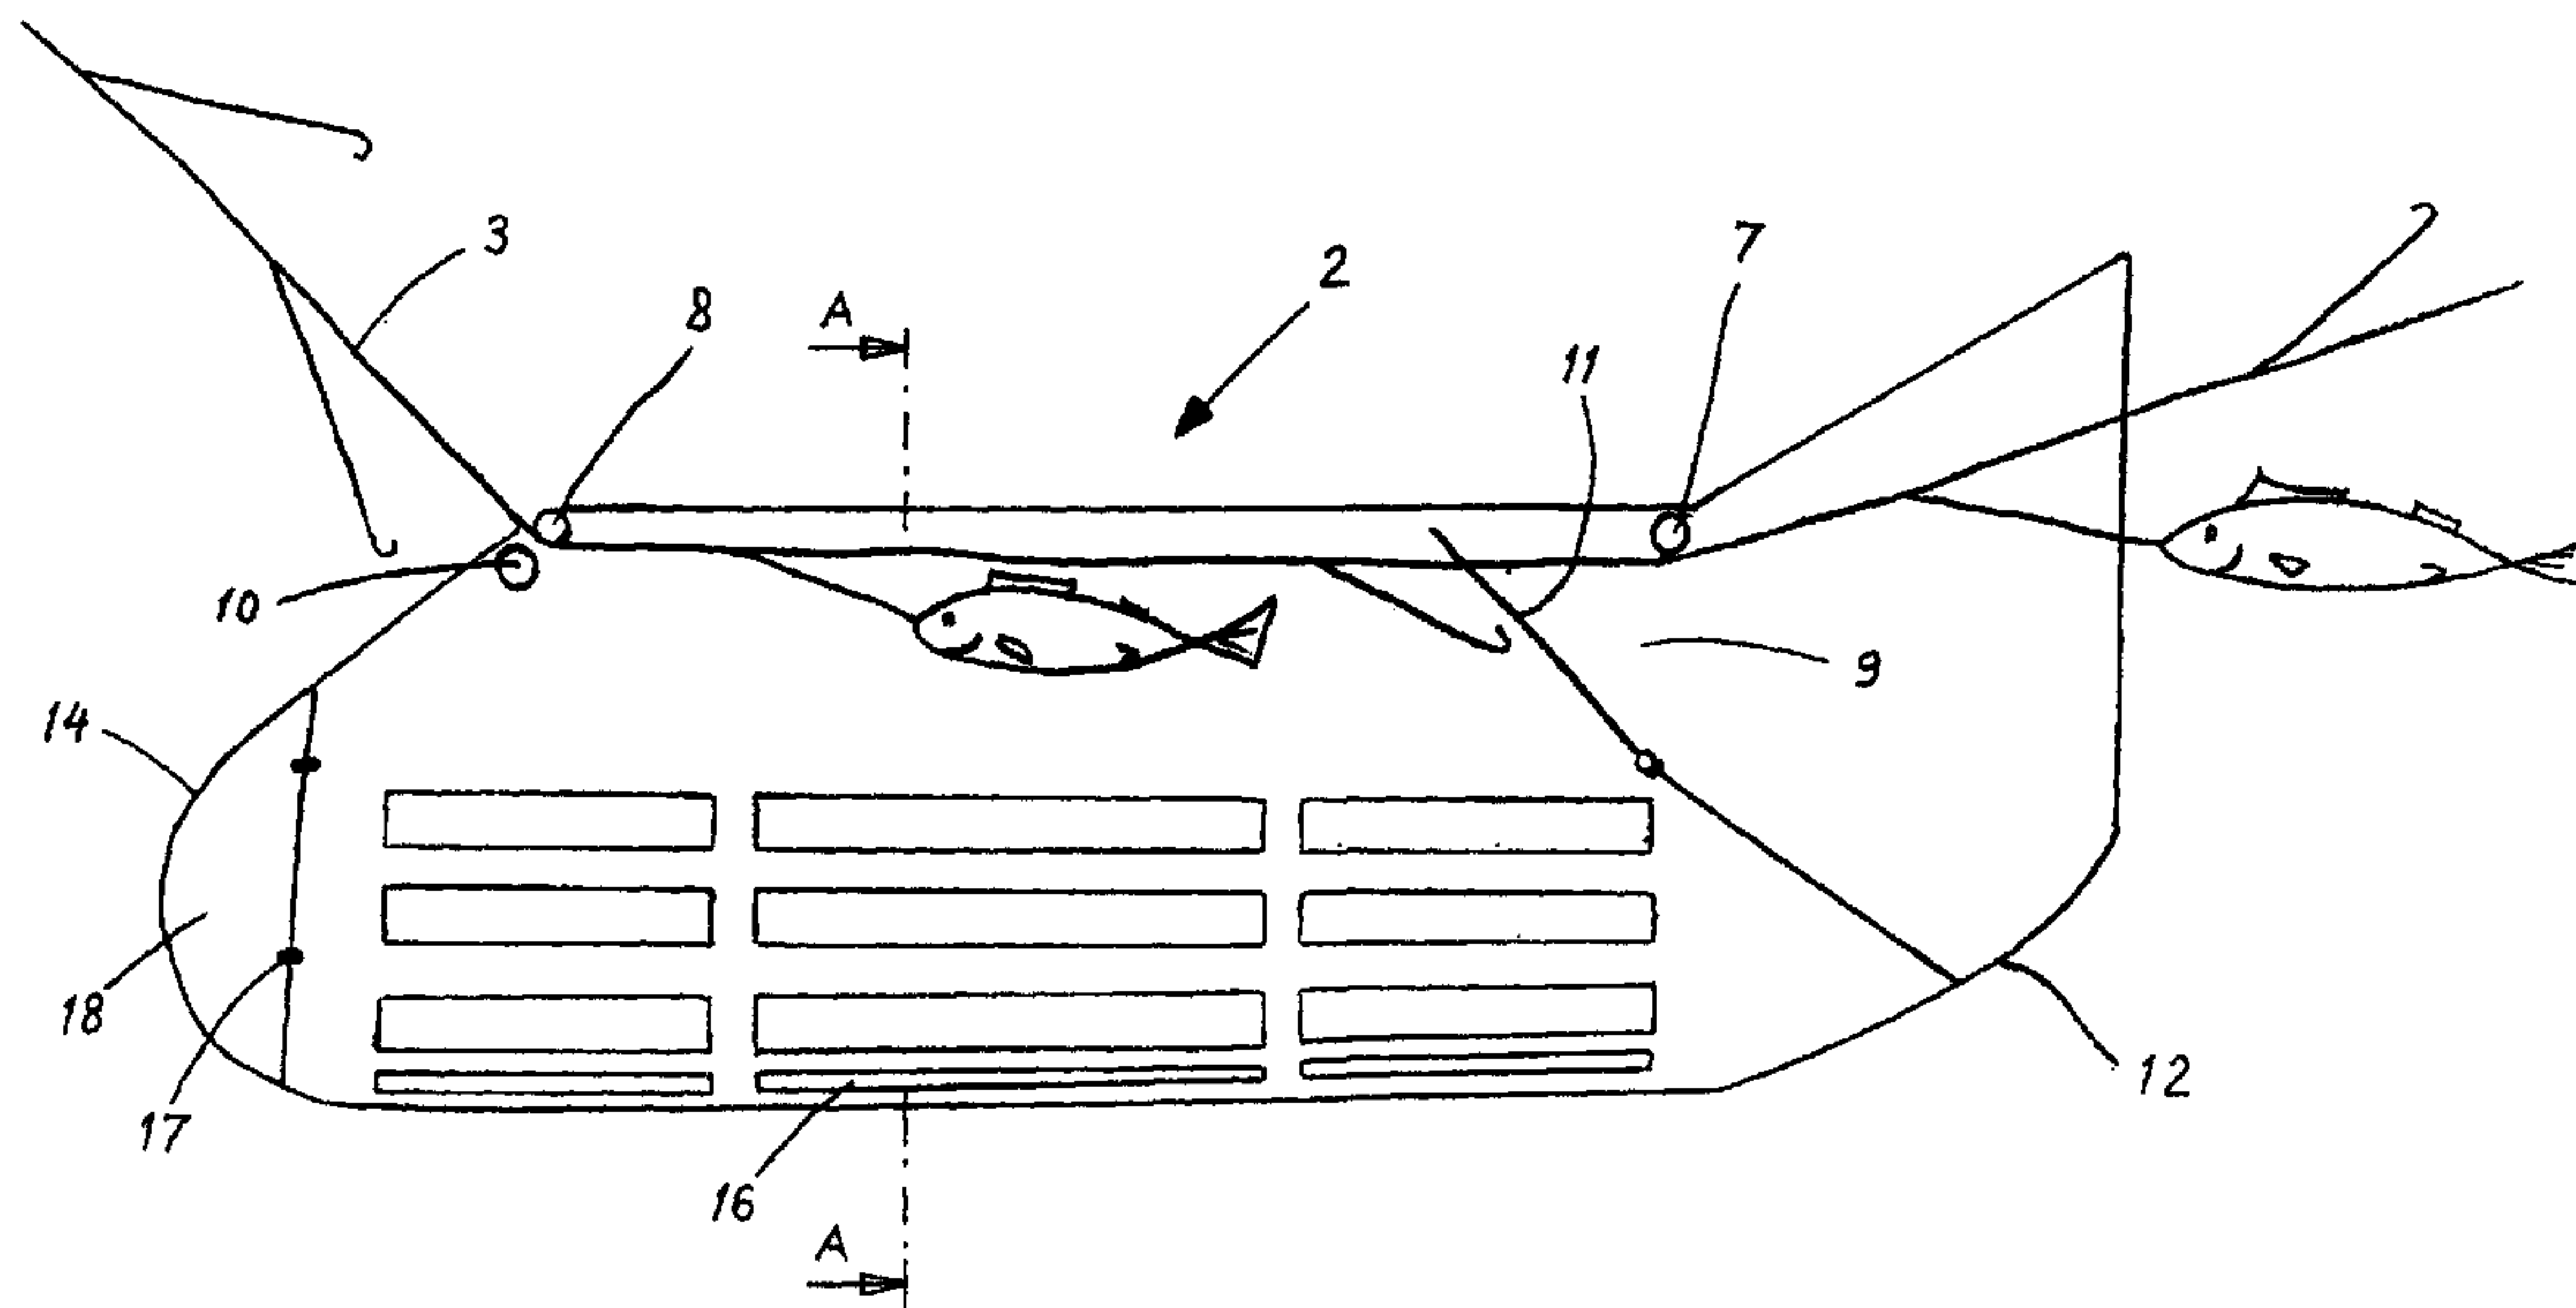

(57) **Abrégé/Abstract:**

The invention relates to a fishing protector (2) and a method for use of the fishing protector at or near the sea bed by long-line fishing to avoid that the catch is eaten by sea mammal when the line (3) with the catch is hauled into a fishing boat. A gliding stopper (6) is fastened at the termination of the line (3) and thereafter the fishing protector (2) is hooked on the line during the setting out of the line such that the line (3) passes through the fishing protector (2). By hauling of the line (3) the line is passing through the fishing protector (2) and the catch is hooked off inside the fishing protector (2). An opening and closing mechanism (11) at a first termination (12) of the fishing protector closes the opening (9) through which the fish passed, avoiding fish to escape. Finally, the opening (9) for receiving fish in the fishing protector (2) is closed by a gliding stopper (6) before the fishing protector (2) is hauled towards the surface.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
24 February 2011 (24.02.2011)



(10) International Publication Number
WO 2011/021946 A1

(51) International Patent Classification:
A01K 91/18 (2006.01)

(21) International Application Number:
PCT/NO2010/000312

(22) International Filing Date:
20 August 2010 (20.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2009 2870 20 August 2009 (20.08.2009) NO

(72) Inventors; and

(71) Applicants : SØRVIK, Omar [NO/OM]; N-5410
Sagvåg (NO). PAULSEN, Odd, Arild [NO/NO]; N-5430
Bremnes (NO).

(74) Agent: TANDBERGS PATENTKONTOR AS; P.O.
Box 1570 Vika, N-0306 Oslo (NO).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FISHING PROTECTOR

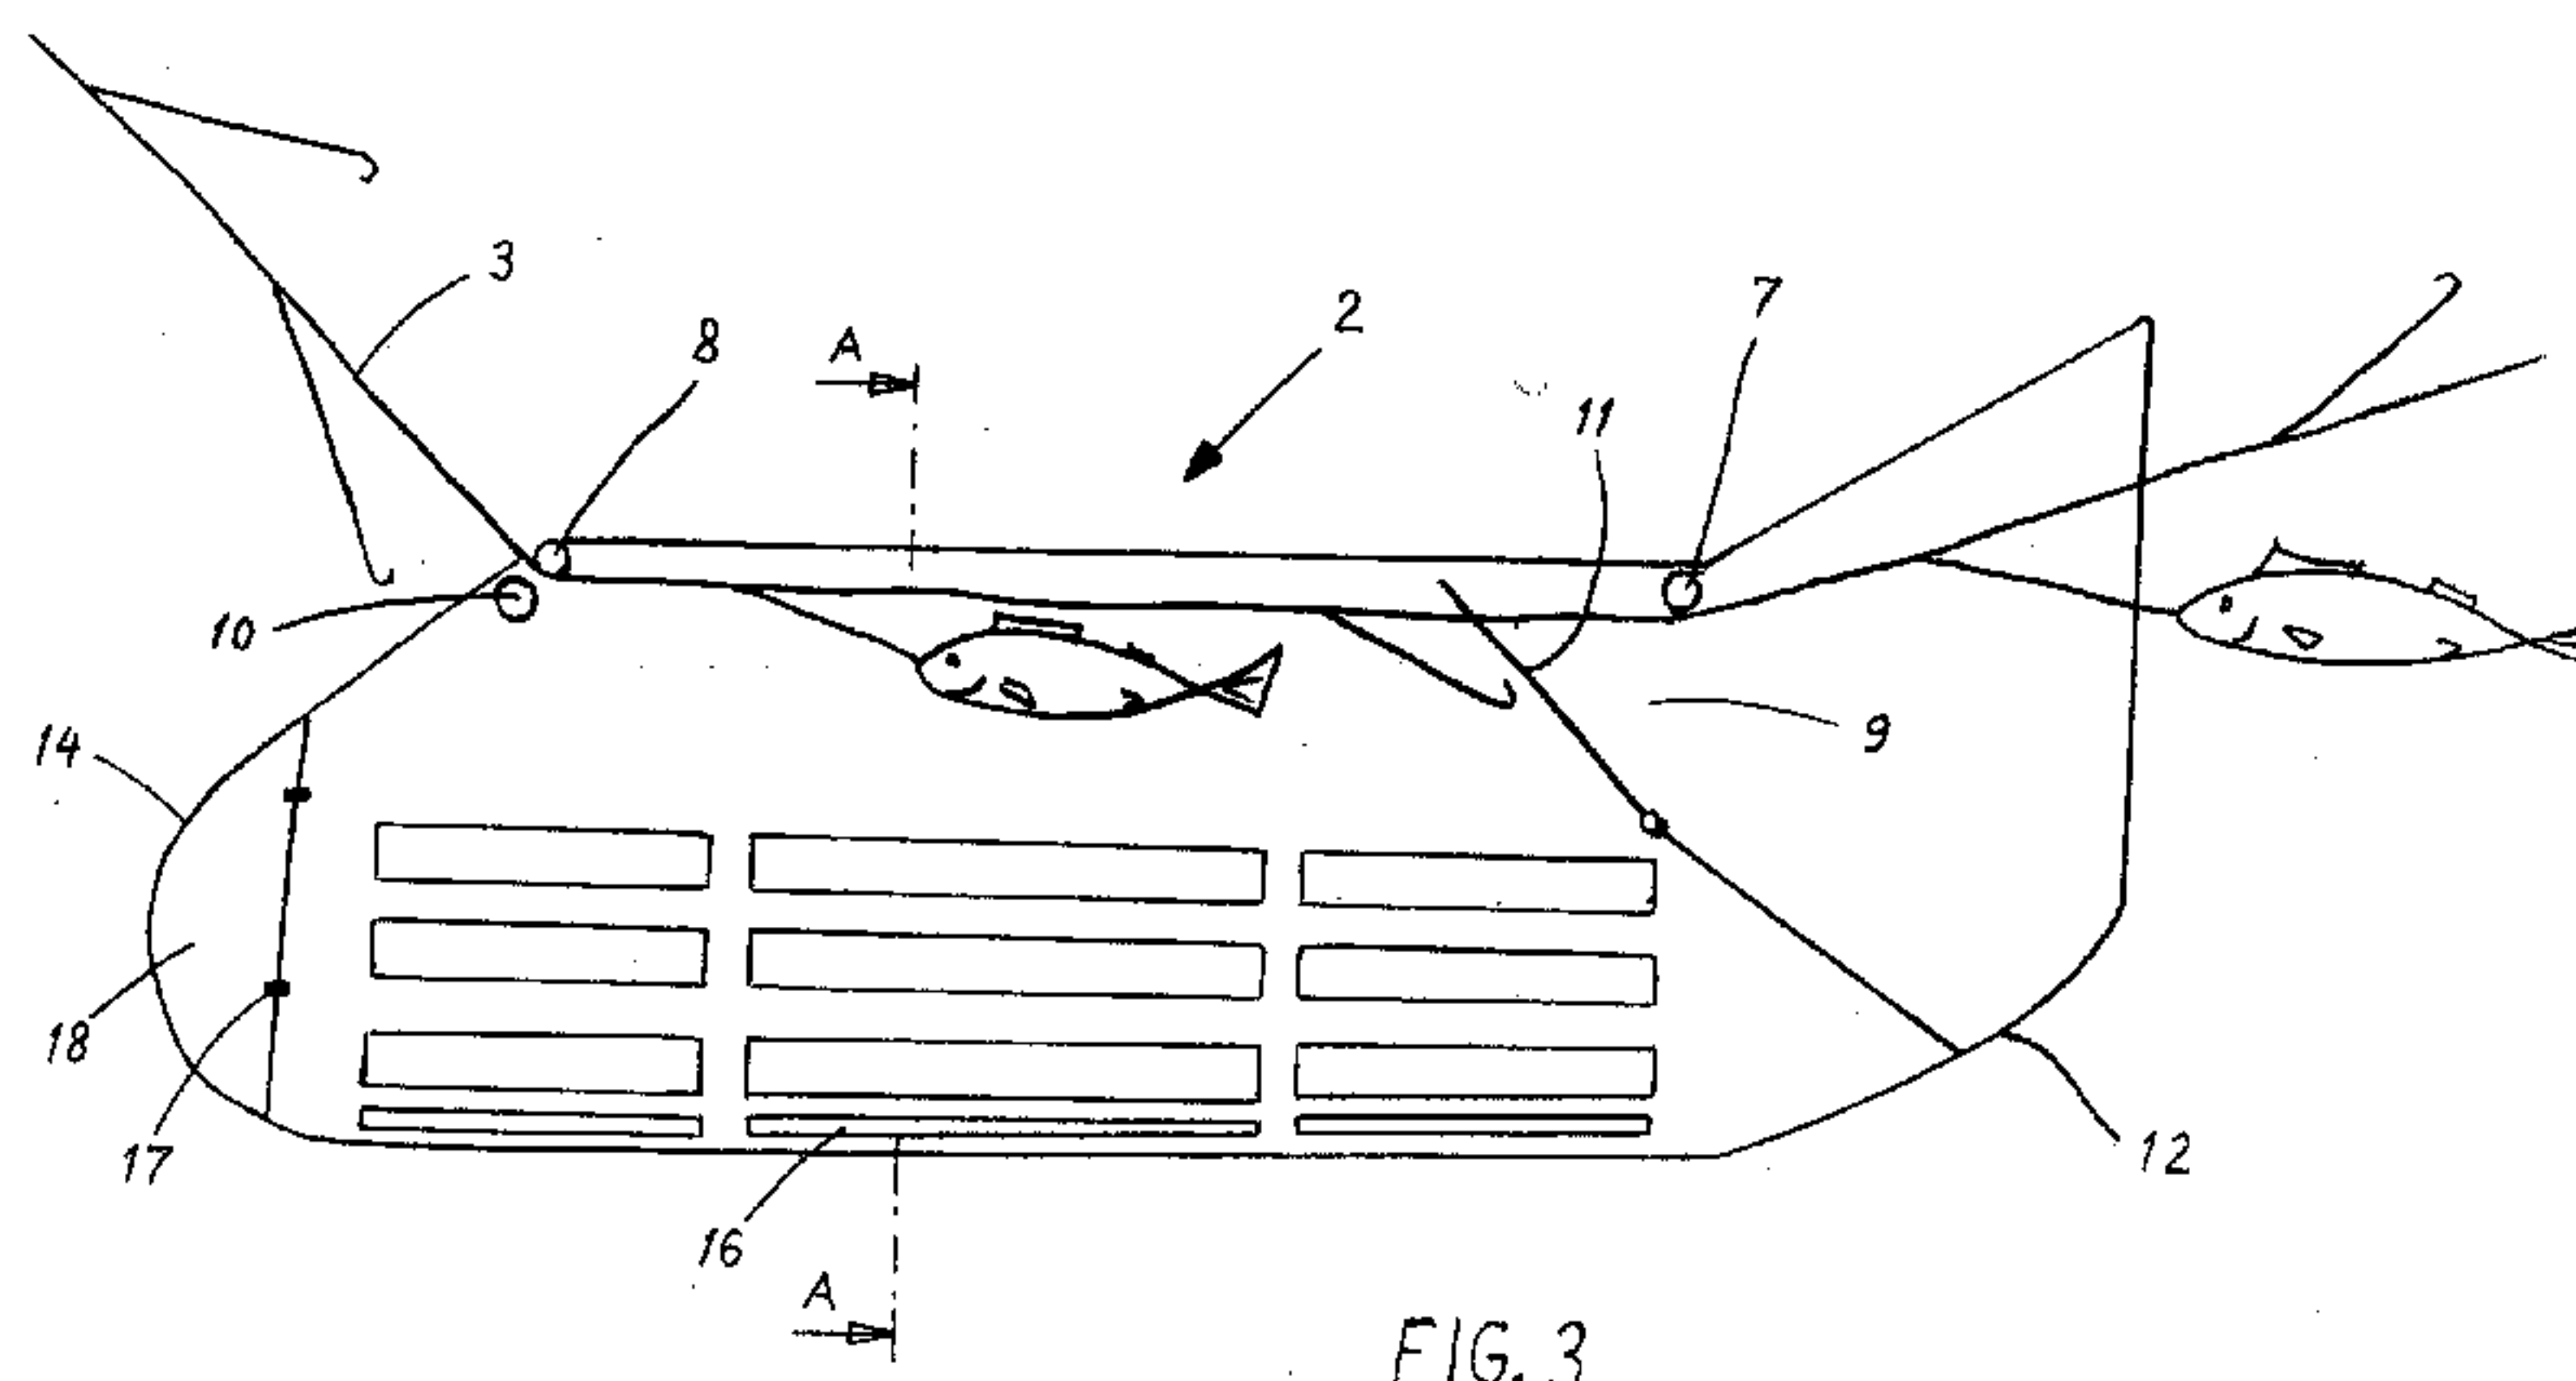

(57) Abstract: The invention relates to a fishing protector (2) and a method for use of the fishing protector at or near the sea bed by long-line fishing to avoid that the catch is eaten by sea mammal when the line (3) with the catch is hauled into a fishing boat. A gliding stopper (6) is fastened at the termination of the line (3) and thereafter the fishing protector (2) is hooked on the line during the setting out of the line such that the line (3) passes through the fishing protector (2). By hauling of the line (3) the line is passing through the fishing protector (2) and the catch is hooked off inside the fishing protector (2). An opening and closing mechanism (11) at a first termination (12) of the fishing protector (2) closes the opening (9) through which the fish passed, avoiding fish to escape. Finally, the opening (9) for receiving fish in the fishing protector (2) is closed by a gliding stopper (6) before the fishing protector (2) is hauled towards the surface.

Fishing protector

The present invention relates to a fishing protector for use at or near the sea bed by long-line fishing for collecting of fish on the line before the line with the catch
5 in the fishing protector is hauled into a fishing boat. The Norwegian and foreign long-line fishing fleet have since the beginning of the nineties experienced increasing loss of catch due to sperm whales (*Physeter macrocephalus*) during fishing near Greenland. The whales are baiting the catch especially during fishing of halibut and Greenland halibut.

10 Corresponding problems are also found on the southern hemisphere during fishing of "Patagonian Toothfish" outside Chile and by fishing of halibut, Greenland halibut and "Black Cod" in the Pacific Ocean, the Bering Sea and Ohotsk Sea on the Russian side and by Greenland and New Foundland during fishing of halibut and Greenland halibut. In addition to sperm whales are killer whales (*Orcinus orca*) and
15 other sea mammals a problem in these areas.

It is difficult to estimate the real loss, but the fishermen experience considerable decrease of catch yield. The fish which is taken is not naturally edible fish for these kinds of whales because they live on depths or areas where the whale normally does not find its meal. Whales are considered to be the biggest problem for
20 the line-fishing fleet which is fishing in these areas, and in some areas several vessels have given up fishing due to the difficulties with whales because it is too much work and difficult to take up their quota and consequently obtain an economically surviving trade.

Another problem in this connection is that the quota that is designated and
25 caught does not reflect the real exploitation of the different sorts of fishes because the loss to whales that eat the catch, cannot be exactly established. This may result in bigger exploitation than estimated and the result is reduced quota and even worse economy for the trade.

According to the fishermen, there has been an evident increase of the problem
30 during the last years. The trend is an increasing number of whales on the fishing grounds, and that whales are discovered on new areas. As a result of reduced catch, several of the vessels have tried to move to other areas hoping to avoid the whales. However the sperm whales often follow the vessels, and up to now the fishermen have not succeeded in finding effective methods for reducing the problem.

35 Very little scientific work has been implemented in describing or solving the problems in connection with the current problem between line fishermen and tooth whales. It has been implemented experiments which have made use of shielding technology, i.e. that electronic units generating sound are fastened to the line to shield

the line against whales, or sonar devices that are lowered from the vessel. Up to now the use of sound for frightening whales has been very little effective.

The problem with the whale is that it baits on the line. It steals fish hanging unprotected on the hooks when the line is hauled from the bottom. Shippers are
5 reporting to have observed sperm whales on the echo recorder down to 1500 m and killer whales down to 1000 m, baiting on the line.

In Chile it has been made experiments to protect the fish which is caught and hanging on the hook by means of a net which shall prevent the whale from getting the fish when the line is hauled from the sea bed. This system is adapted to the Spanish
10 method by fishing with sea bed line (ref. "Modification of fishing gear in the Chilean Patagonian Tooth fishery to minimize interactions with seabirds and toothed whales" by Carlos A. Moreno at Universidad Austral de Chile, Valdivia, and Ricardo Costa and Luis Mujica at Pesca Sur ibérica, Punta Arenas Chile).

It has also been made experiments in fishing with fish pots to protect the catch
15 against attack from whales. The experience up to now is that fish pots are not sufficiently effective to carry out an economically profitable fishing.

The object of the present invention is to provide a protector device for the catch at or near the sea bed which is easy to operate and which is preventing that the catch is eaten by whales or other sea mammals. The protector device shall be used
20 together with existing or today's fishing equipment. Further it is an object of the present invention to make a preliminary sorting of the fish based on size such that fish that shall not be caught, have the possibility to "escape" before they are hauled onboard the fishing vessel. According to the present invention these objects are obtained by the fishing protector with the features as stated in the claims. The invention also relates to
25 methods for use of the fishing protector.

In the following the invention shall be described in detail in connection with embodiments and with reference to the drawings, wherein the figure 1 shows a common line where fishing protectors are located with constant spaces, and each space has a number of hooks, figure 2 is a perspective view of the fishing protector, figure 3
30 is a longitudinal, sectional view of the fishing protector, figure 4 is a sectional view of the fishing protector along the line A-A on figure 3, figure 5 is a longitudinal sectional view of an alternative embodiment of the fishing protector near the sea bed, and figure 6 is a perspective view of the alternative embodiment of the fishing protector.

With reference to figure 1, it is shown a common line arrangement on a fishing
35 ground having at least one fishing protector 2 hooked on the line 3. The line as well as the fishing protector sink to the sea bed. The line may be provided with floating bodies to elevate parts of the line from the sea bed. At the termination of line 3 or before the next fishing protector 2, if several of them are used, it is located a gliding stopper 6.

When the line 3 is to be taken up, the hauling of the line is beginning from the marker buoy 5 on the surface 1 and begins to haul the mooring line 15 for the buoy with winch until the line 3 can be gripped and then starting to haul it with possible catch. The line may be placed on huge depths depending on the fish which is wanted to be caught and accordingly the line will be hauled inclined from the sea bed and not straight. The line 3 is guided through the fishing protector 2, and when the line is hauled, it will pass through the fishing protector 2 before it goes up towards the surface. The line 3 will pass through the fishing protector 2 at the upper part of the fishing protector, away from the central axis of the fishing protector. The fishing protector 2 is that heavy that it will glide along the line 3 and not leave the sea bed for more than short moments, i.e. some seconds at the time before it in the end shall be hauled to the surface. The fishing protector 2 may be lifted a little from the sea bed from time to time and thereafter slide a little along the line until it again meets the sea bed during this operation. The fishing protector 2 will in this way "dance" a little along the sea bed as the line is hauled little by little. In that the line is passing through the fishing protector along the upper part of the fishing protector, this makes the fishing protector directionally stable during this process, and it will not rotate around the line, but have the same side directed at the sea bed all the time due to gravitation.

Before the next fishing protector, or at the termination of the line, it is fastened a gliding stopper 6 which makes that the fishing protector cannot glide further along the line, and the fishing protector will therefore be hauled together with the line towards the surface and the vessel. On the way up the possible catch will be collected in the fishing protector and protected against attack from whales and other sea mammals.

The figures 2, 3 and 4 show an embodiment of the fishing protector which is in the form of a tank. The shape of the fishing protector may be different according to the different sorts of fish to be caught, however, the function will be the same. The fishing protector may be made of e.g. steel, glass fibres, aluminium, or combinations of these, however, it may also be made of other materials.

Line 3 passes through the fishing protector 2 past at least one rounded edge which may be a pulley/roller or pipe with a rounded termination/flange, for reducing the friction against the fishing protector. Generally, it will be at least one rounded edge 7 at the insertion of the line into the fishing protector and at least one rounded edge 8 at the outlet of the line from the fishing protector. In the termination 12 of the tank into which the line is inserted, it is an opening 9 which is adapted to the fish entering the fishing protector 2. This opening is automatically closed by a spring-loaded flap which prevents the fish to run away through the opening 9. In the second termination 14 of the tank where the line is let out through an opening 13, it is a device 10 which hooks off the fish and avoiding the fish to follow the line 3 to the surface, and let it stay in the

fishing protector 2. The opening 13 for the line 3, where it leaves the fishing protector 2, is too small for the fish to swim through. In avoiding the fish to swim out of the fishing protector 2 through the opening at the insertion of the line, it is arranged a device/flap 11 which opens and closes the opening 9 each time fish enter the fishing protector and thus prevents the fish running away.

Because the fish which is caught by the line is hooked off before the line goes towards the surface, the whales cannot bait on the catch on the line as the case is today. Instead the fish is collected in the fishing protector. When the fishing protector in the end is hauled towards the surface, the fishing protector will protect the catch and prevent loss of catch.

The fishing protector 2 is shaped to move through the water with as less resistance as possible when it in the end is hauled towards the surface and the vessel. Further the fishing protector is on one side provided with slots 16 or wire netting with a given mesh size so that fish which do not fulfil the catch size, may "run away" from the fishing protector after hooking off before the fishing protector is hauled into a fishing vessel on the surface.

The fishing protector 2 has a shape so that it can be used together with fishing equipment which is common in use today. Further it is easy to get off and on the line so that the fishing protector 2 fast and easy can be used if the situation requiring use of the invention, should turn up. This makes that if there are no whales on the fishing ground, there is no need to use the fishing protector, but if the whales should turn up, it is easy to use it directly. The fishing protector is able to cover catch from several hooks, so that it is not necessary to have many fishing protectors on board the fishing vessel, which again will occupy valuable space.

When the need for setting the fishing protector 2 on the line arises, there are two jobs to be done. One of the jobs consists in fastening a gliding stopper 6 on the line so that the fishing protector 2 will follow when it comes upon this gliding stopper. The second job consists in hooking the fishing protector on the line after a given number of hooks. This process will be repeated until the whole line has been set out. The sequence of the two operations is depending on how the line is set out, but has no importance for the functionality of the line. Generally it will be a gliding stopper 6 at the termination of the line in case the line has been set out without fishing protectors and the whales or sea mammals then turn up during the hauling of the line.

The gliding stopper 6 also has a function in relation to the fishing protector 2 in that it shall prevent fish that are in the fishing protector, from falling out or run away through the receiving opening 9. The gliding stopper 6 has a shape so that it will block the possibility for fish to get out through the opening 9. If the sea mammals are coming during the hauling of the line, it will be possible to hook on a fishing protector and then

WO 2011/021946

PCT/NO2010/000312

5

let the fishing protector slip down the line towards the sea bed and hook off, collect and protect fish on the way.

The fishing protector 2 may also be provided with releasing mechanism so that the fishing protector easy may be removed from the line in bad weather. Further, the
5 fishing protector has a hatch 18 at the second termination 14 of the tank enabling emptying the catch from the fishing protector. The hatch 18 is fastened removable to the second termination 14 by means of fastening means 17. The fastening means may be hinges, hooks or clamping devices, or a combination of these.

10

Claims

1. A fishing catch protector for use at or near a sea bed in connection with long-line fishing for collecting of a catch of fish on a fishing line before the fishing line with the catch
5 collected in the fishing catch protector is hauled into a fishing boat at a sea surface, wherein the fishing catch protector comprises:
- a tank for storing the catch, the tank having an entry opening in a first termination of the tank for receiving fish,
 - a hooking off device for hooking off the fish from the fishing line inside the tank,
 - 10 - at least one slot for discharging liquid from the tank,
 - at least one guiding device for guiding the fishing line through an upper part of the tank from the first termination to a second termination of the tank.
2. The fishing catch protector according to claim 1, further comprising a hooking
15 device enabling the fishing catch protector to be hooked on the fishing line before or during setting out the fishing line.
3. The fishing catch protector according to claim 1 or 2, wherein the entry opening for receiving fish in the tank is provided with an opening and closing mechanism.
20
4. The fishing catch protector according to any one of claims 1 to 3, wherein the at least one guiding device for guiding the fishing line through the upper part of the tank is located on an inside of an outer wall of the tank and wherein the at least one guiding device is rounded.
25
5. The fishing catch protector according to any one of claims 1 to 4, wherein the at least one guiding device is a pipe, a pulley or a metal plate.
6. The fishing catch protector according to any one of claims 1 to 5, wherein the
30 second termination of the tank has a hatch which is removably fastened to the second termination.

7. A method for use of the fishing catch protector according to claim 3, the method comprising

- fastening at least one gliding stopper at a termination of the fishing line,
- hooking the fishing catch protector on the fishing line during the setting out of the
5 fishing line such that the fishing line passes through the fishing catch protector by the pulling of the fishing line-without letting the fishing catch protector come to the sea surface,
- wherein the opening and closing mechanism opens the entry opening for letting
10 fish into the fishing catch protector and closes when the fishes have passed, and wherein the fish is hooked off when the fishing line passes the hooking off device inside the tank.

8. The method according to claim 7, wherein the entry opening for receiving fish in the fishing catch protector is closed by the at least one gliding stopper before the fishing catch
15 protector is hauled towards the sea surface.

1/5

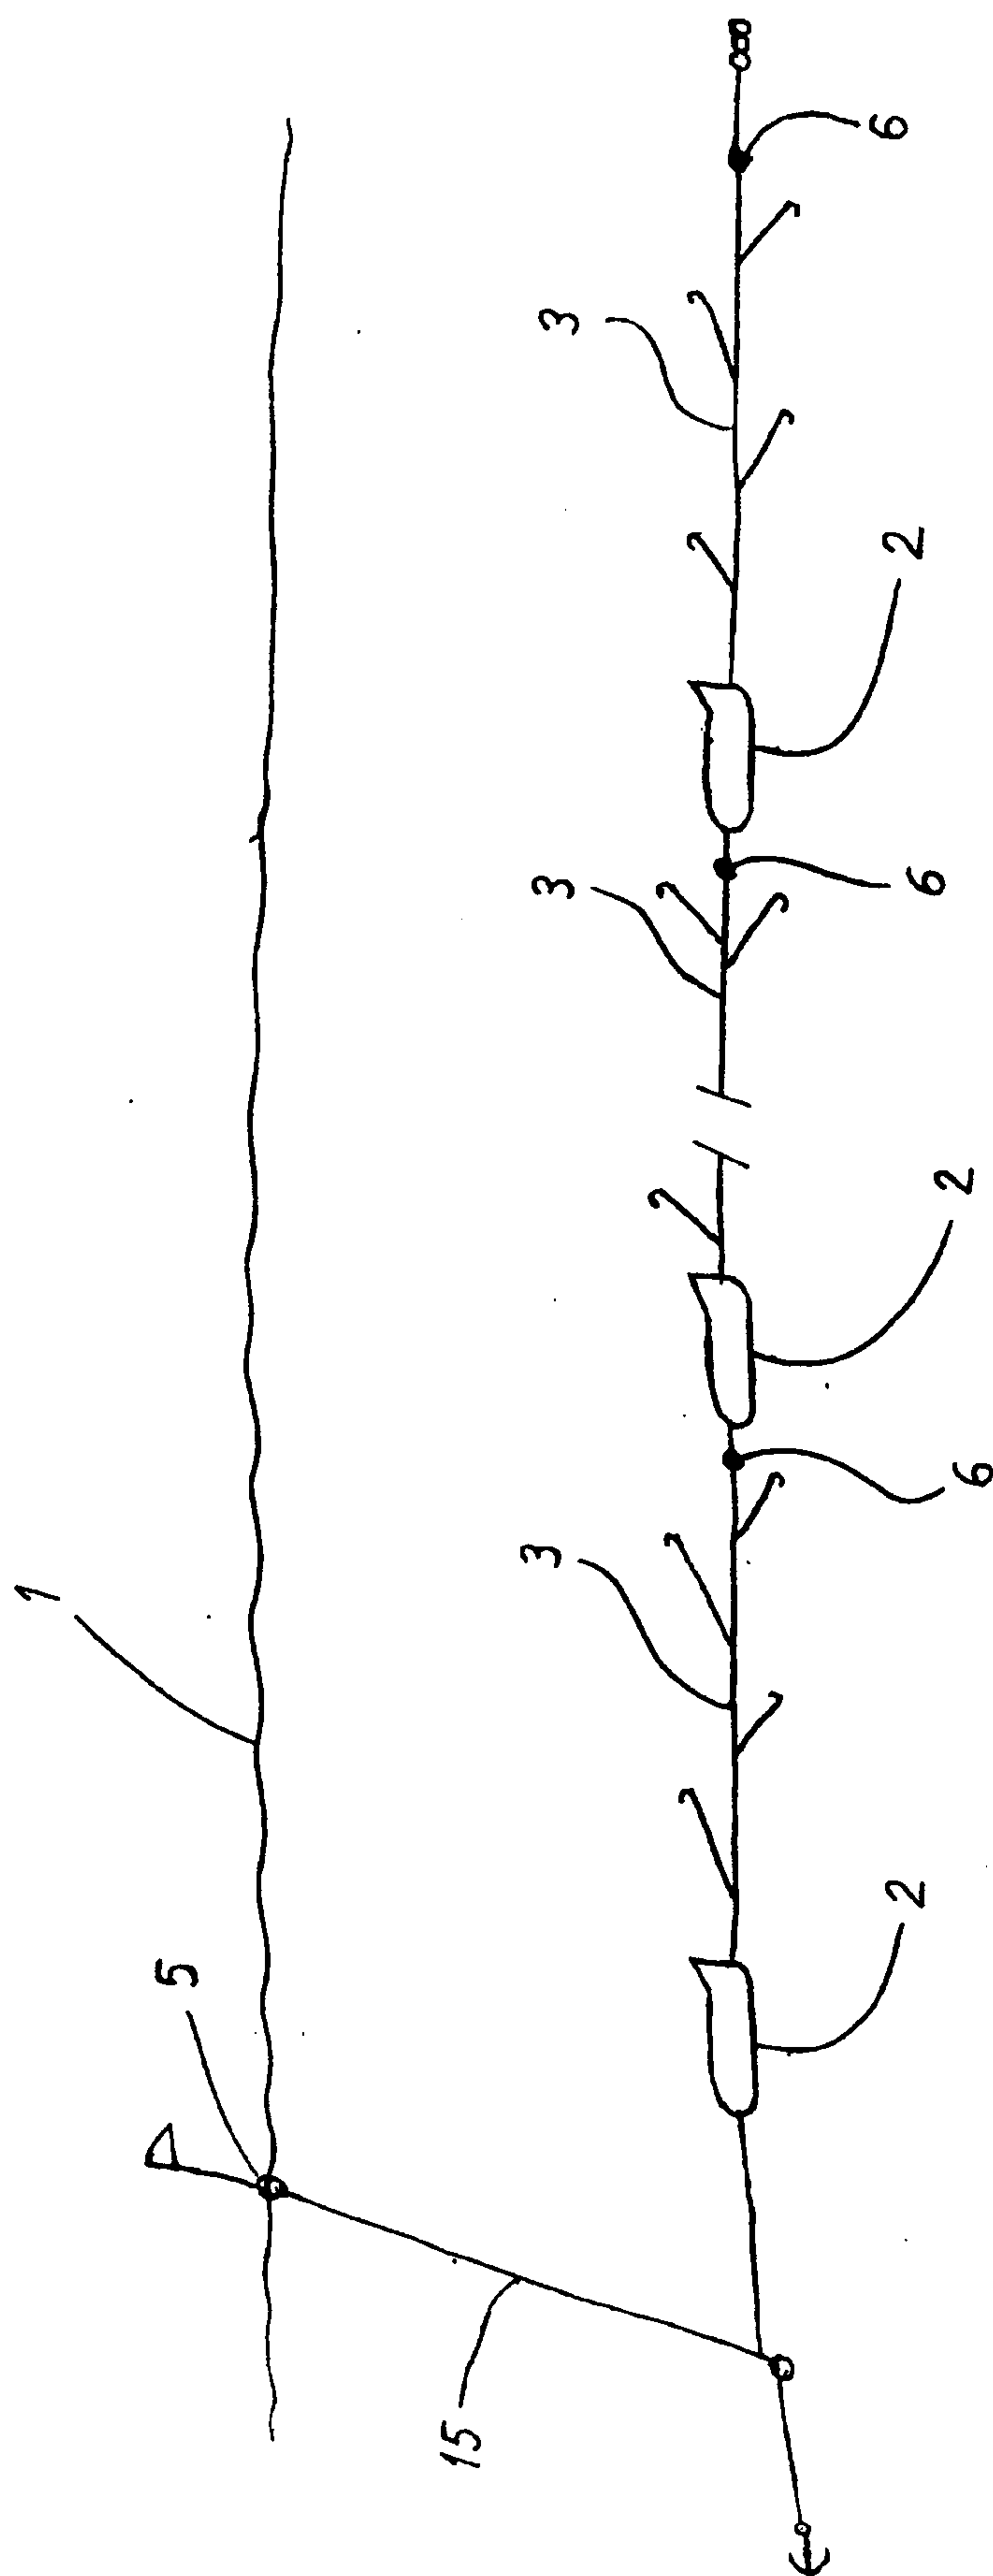
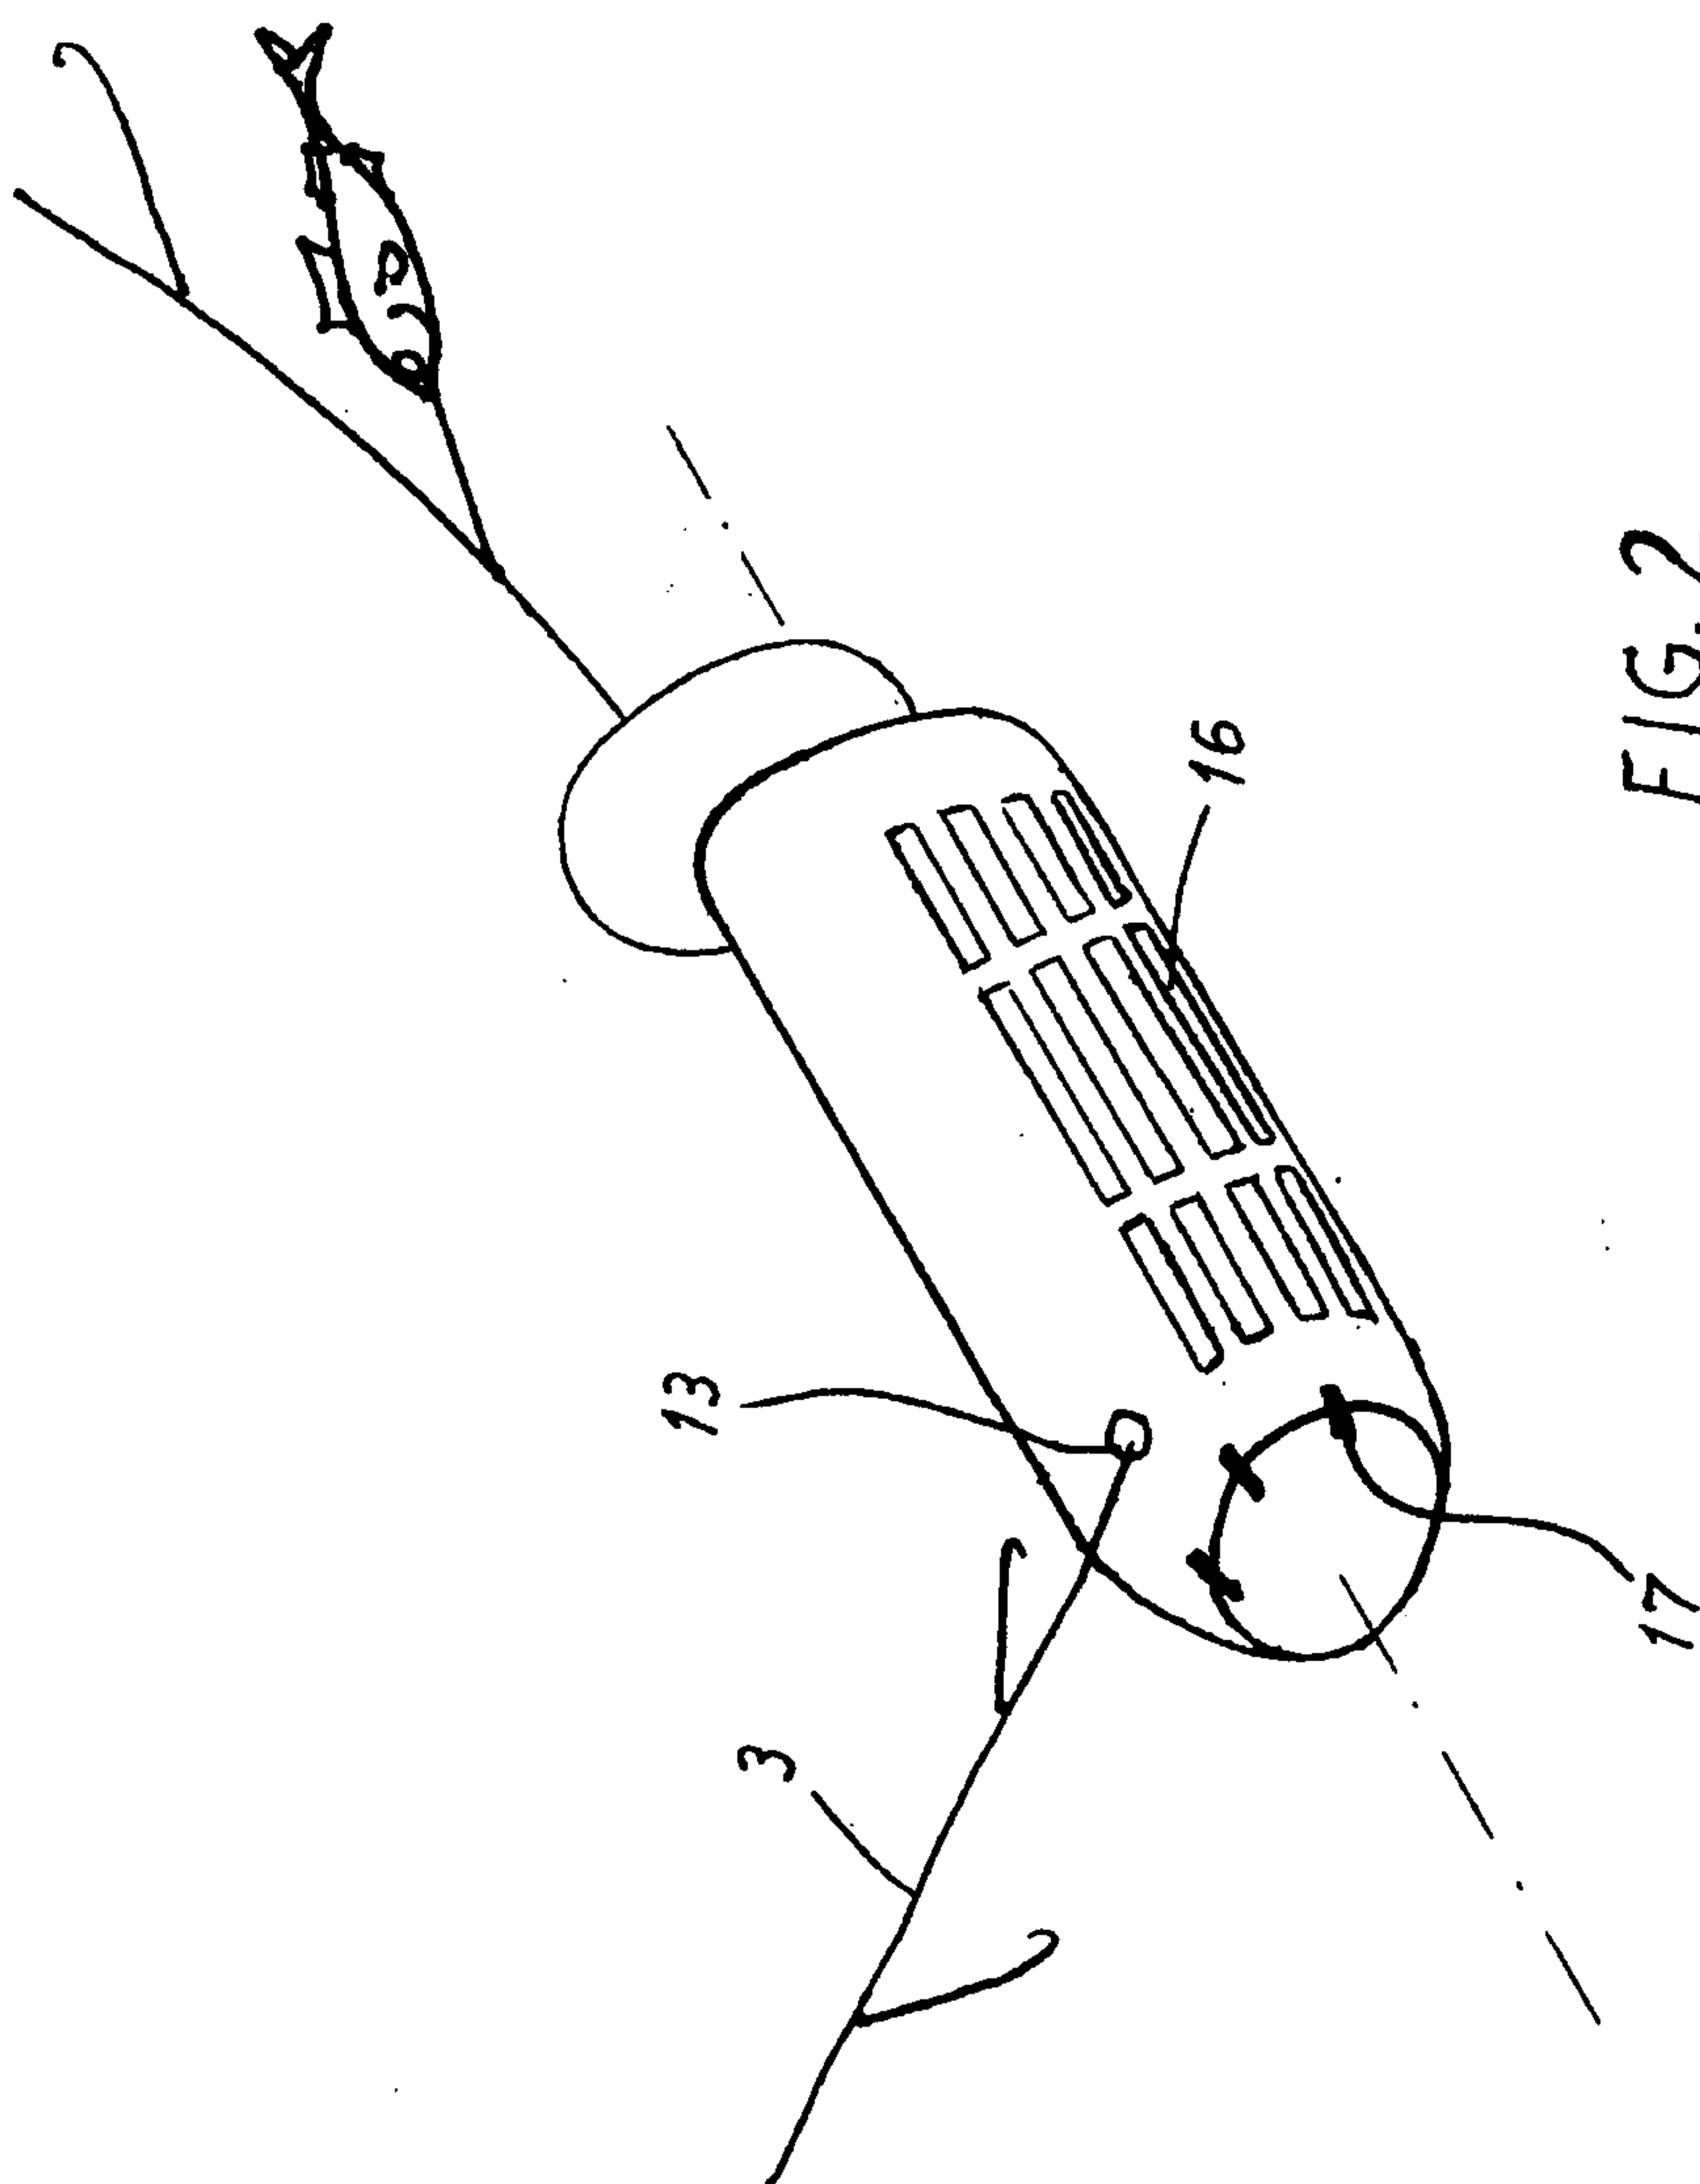
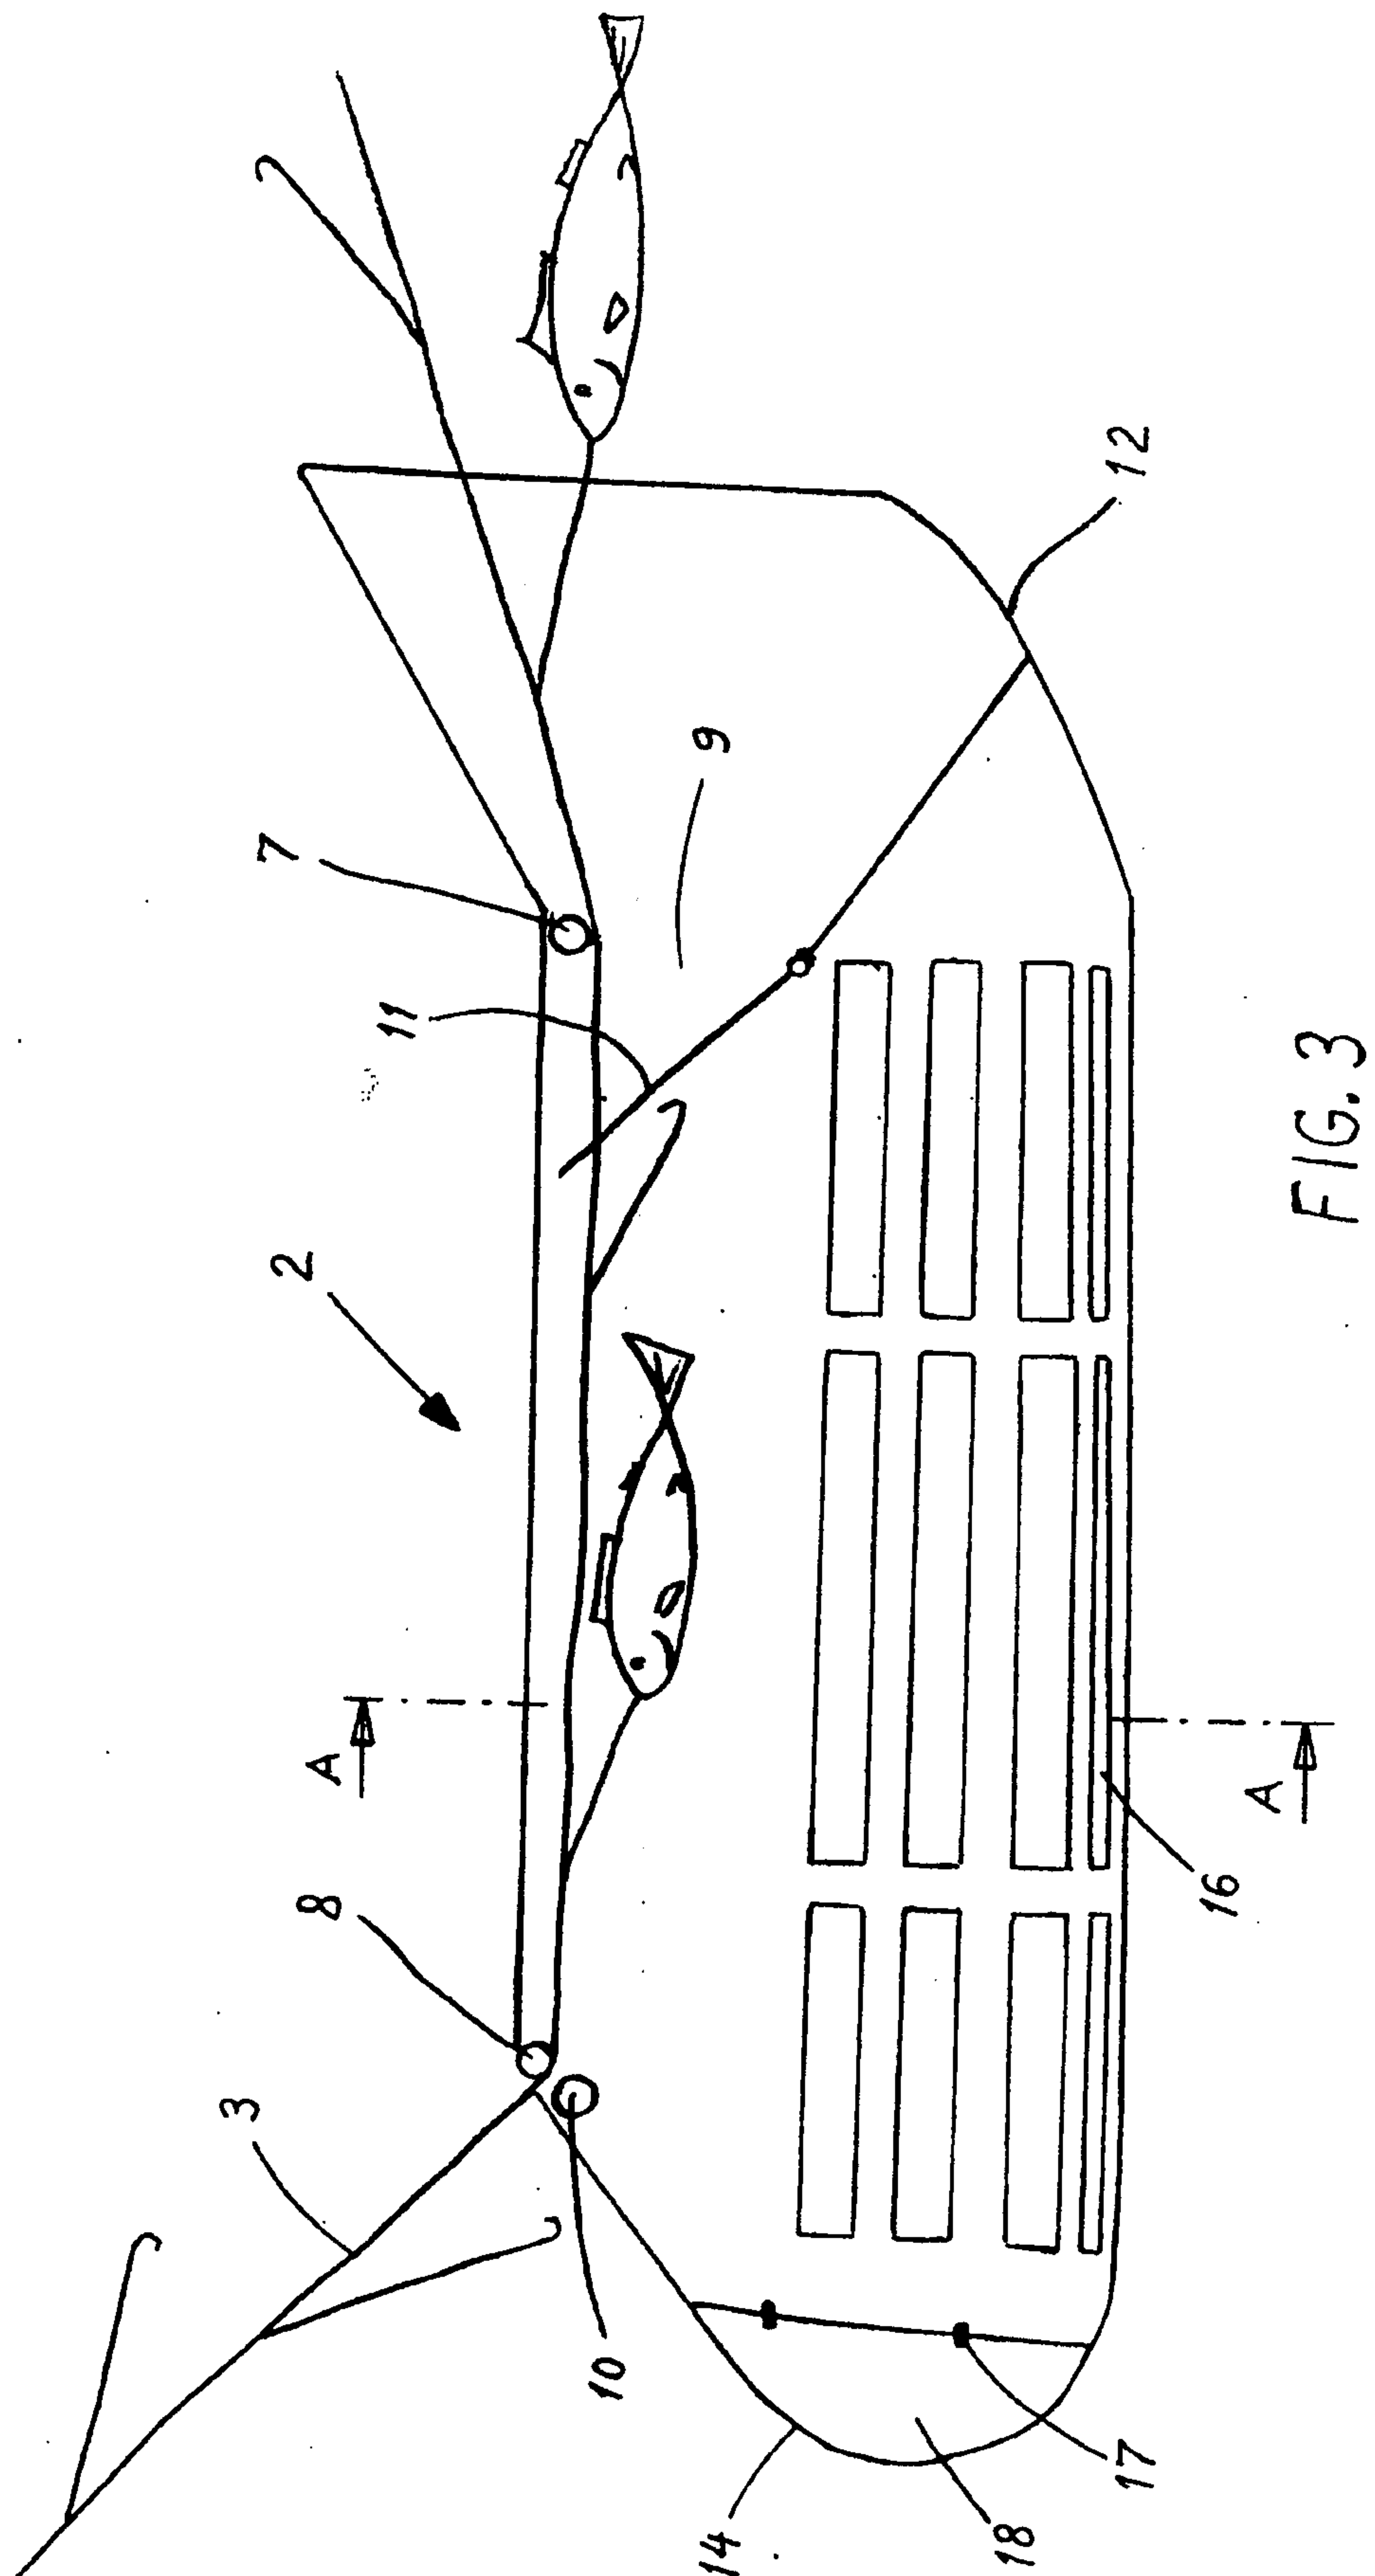


FIG. 1





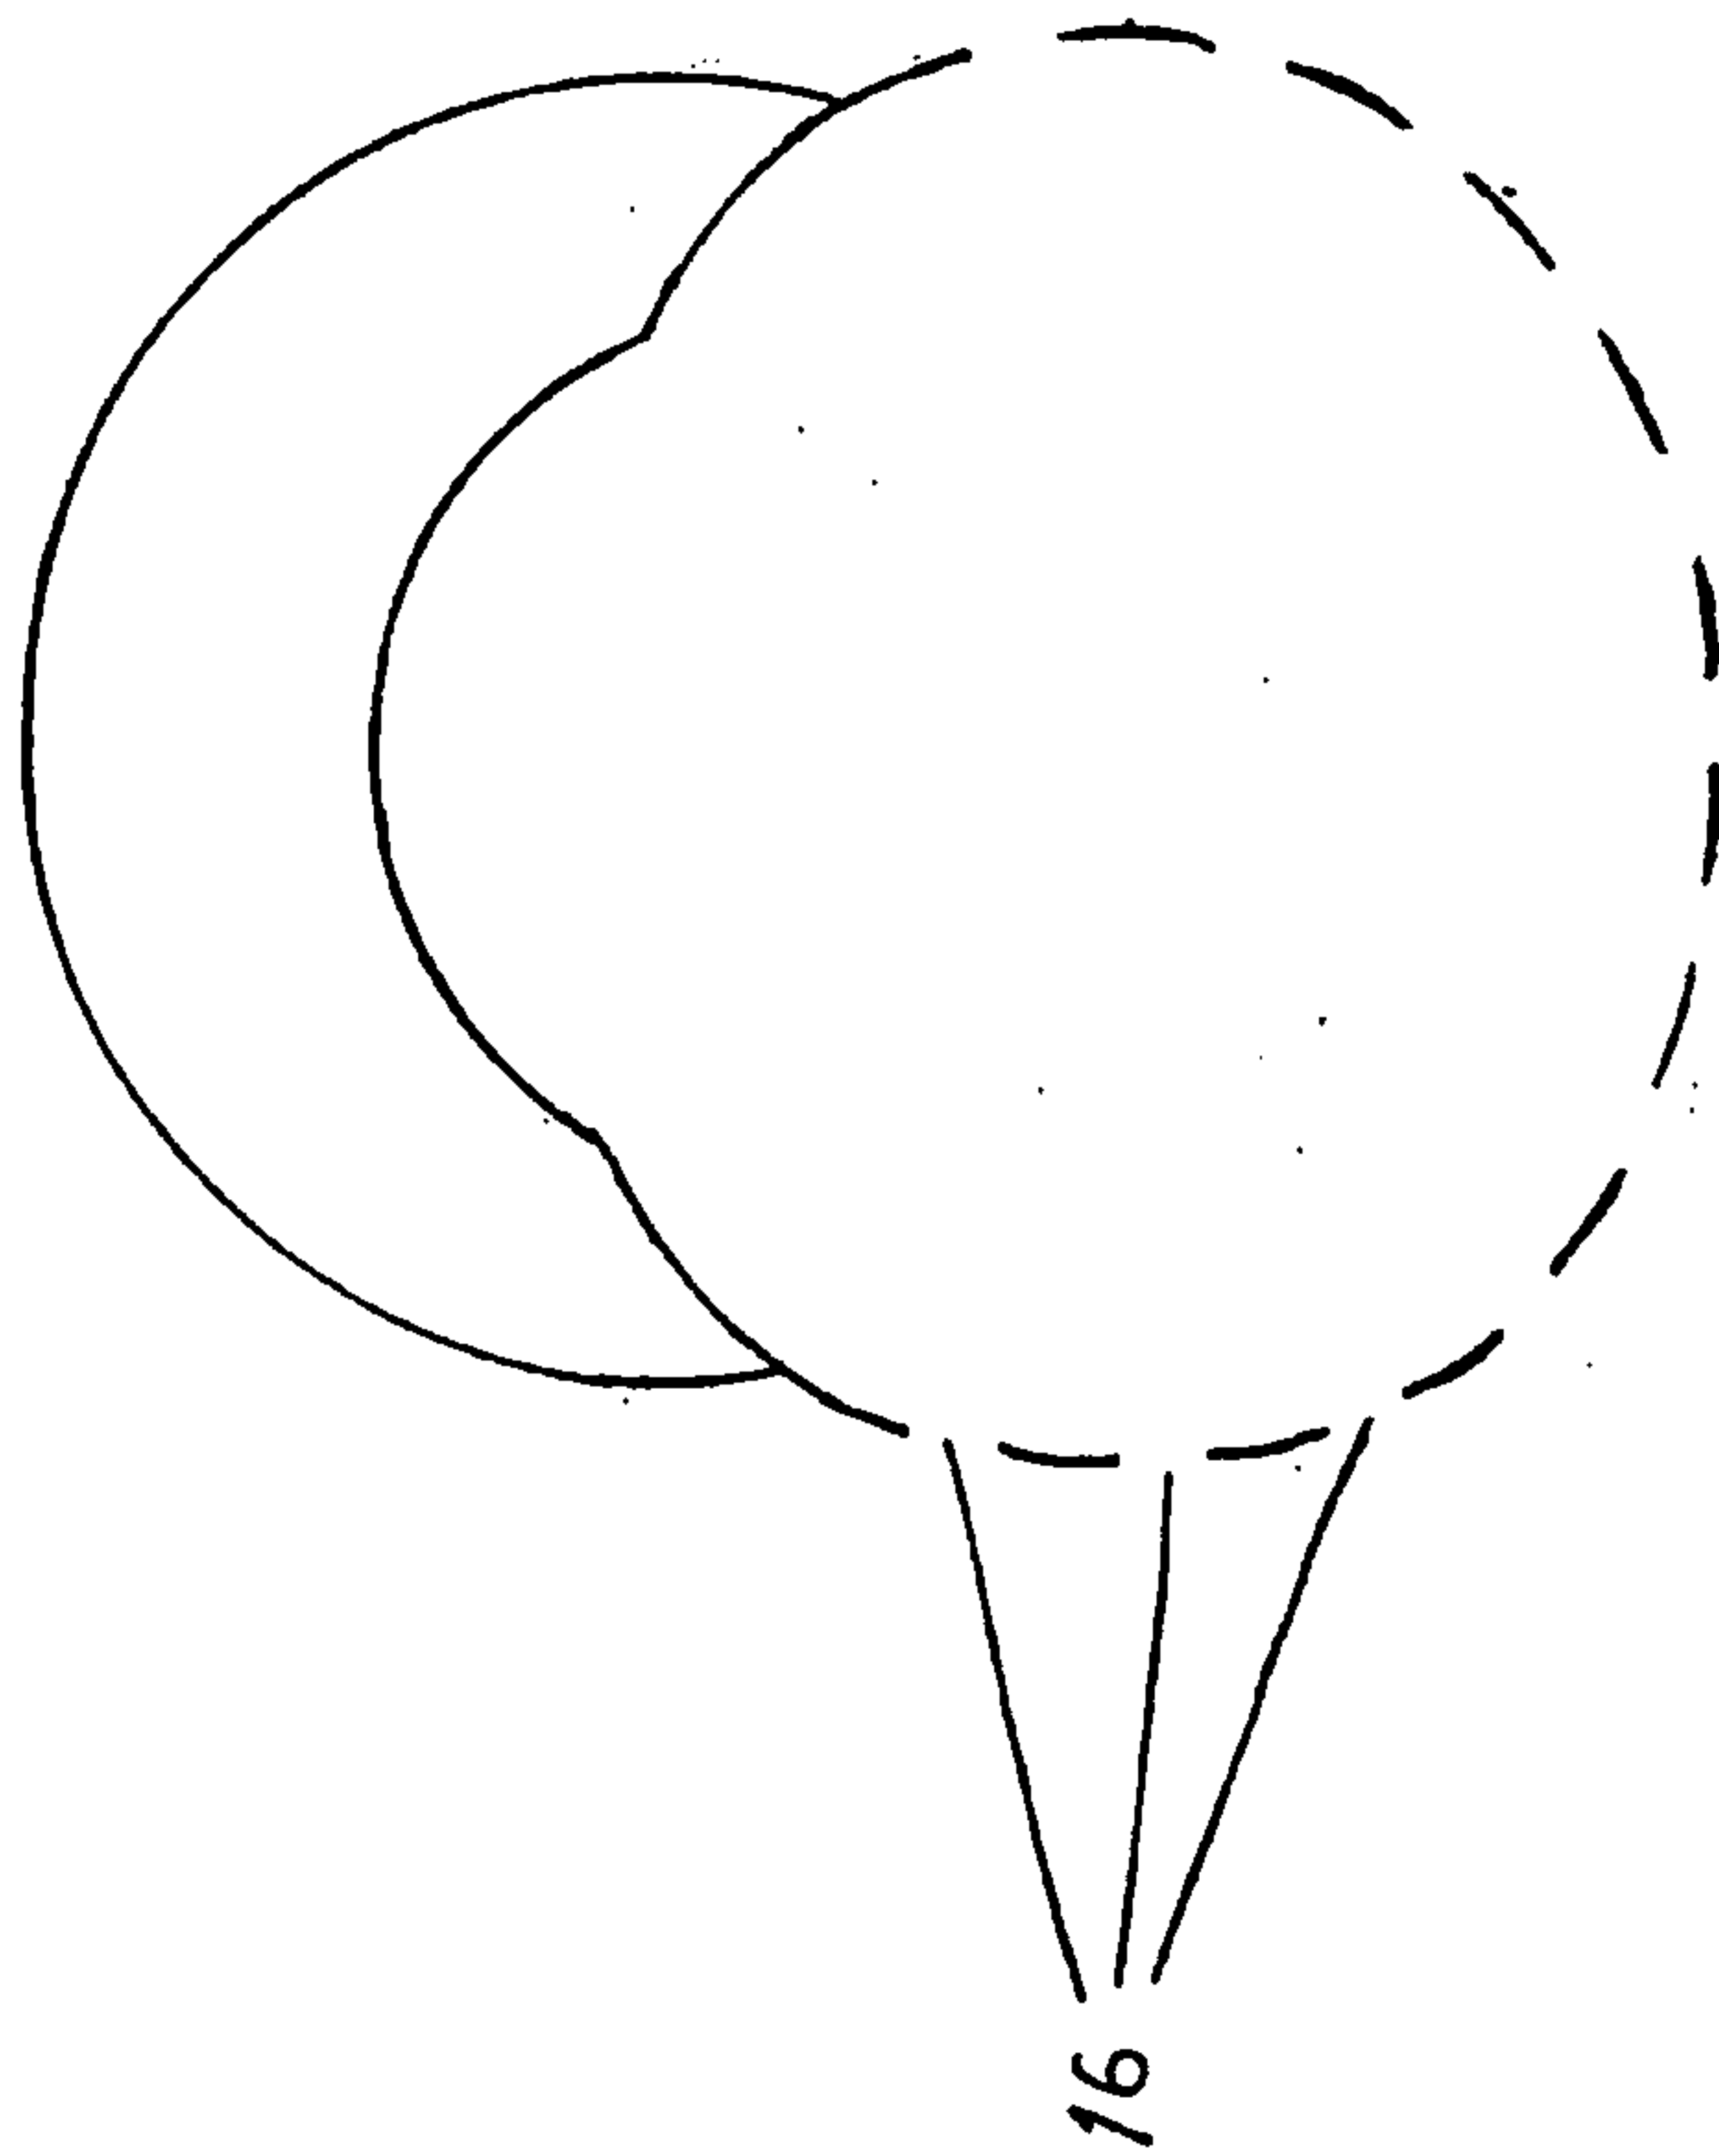


FIG. 4


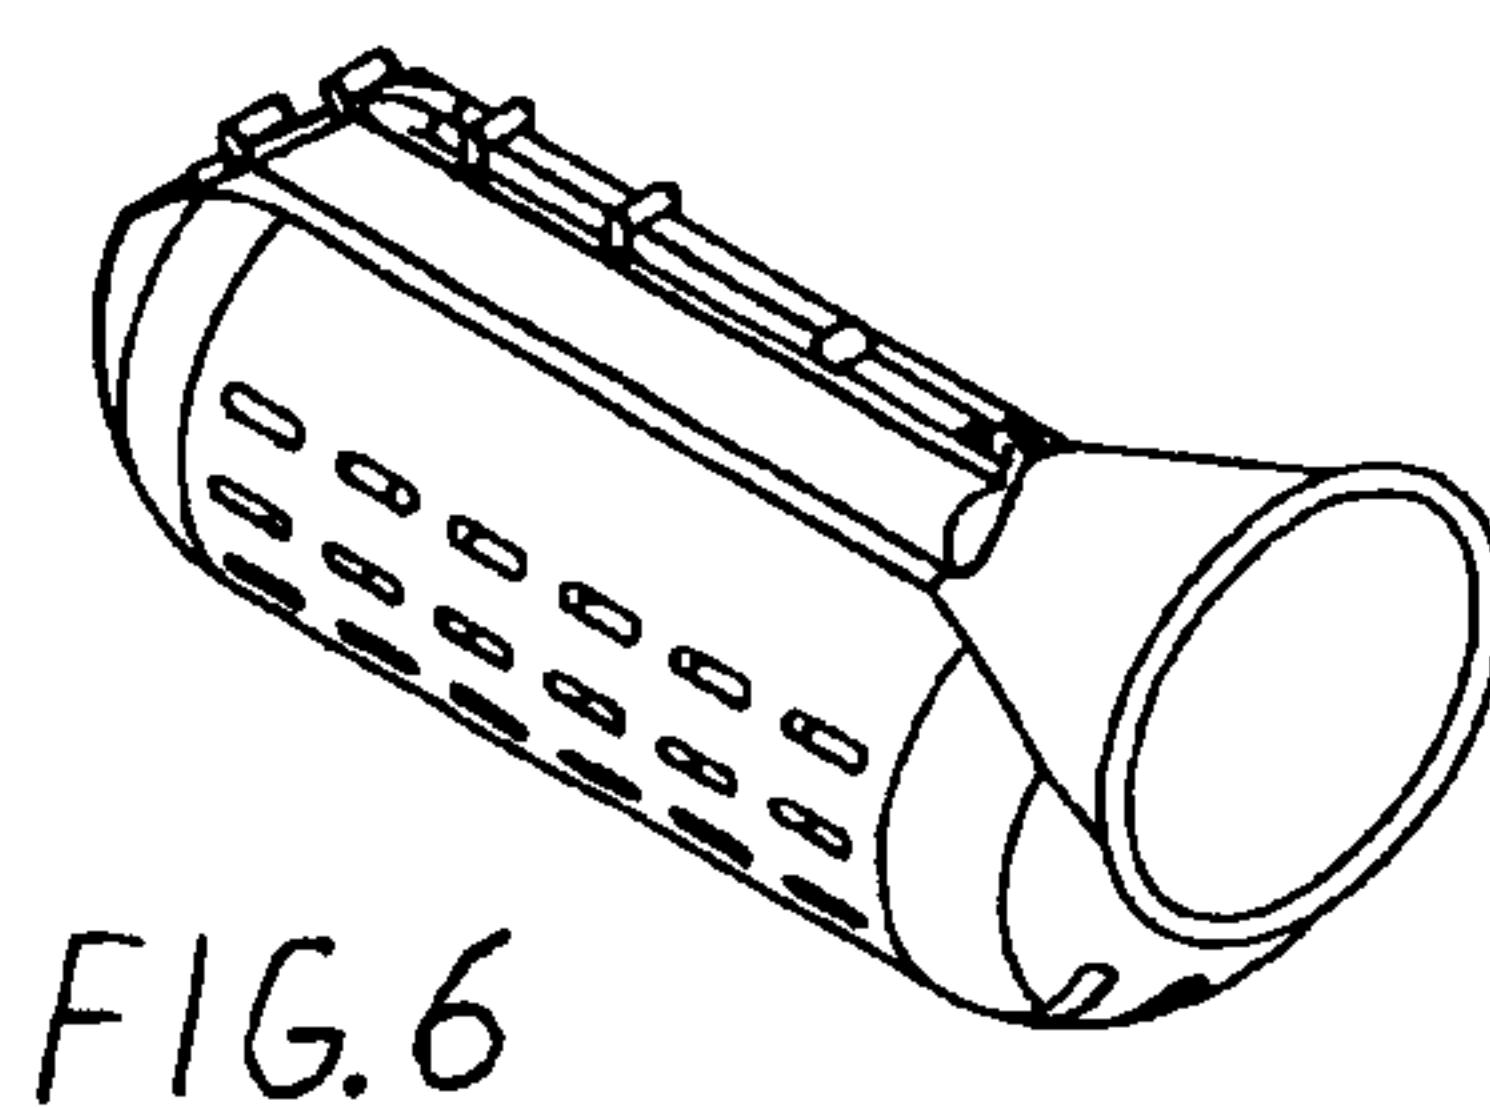


FIG. 5

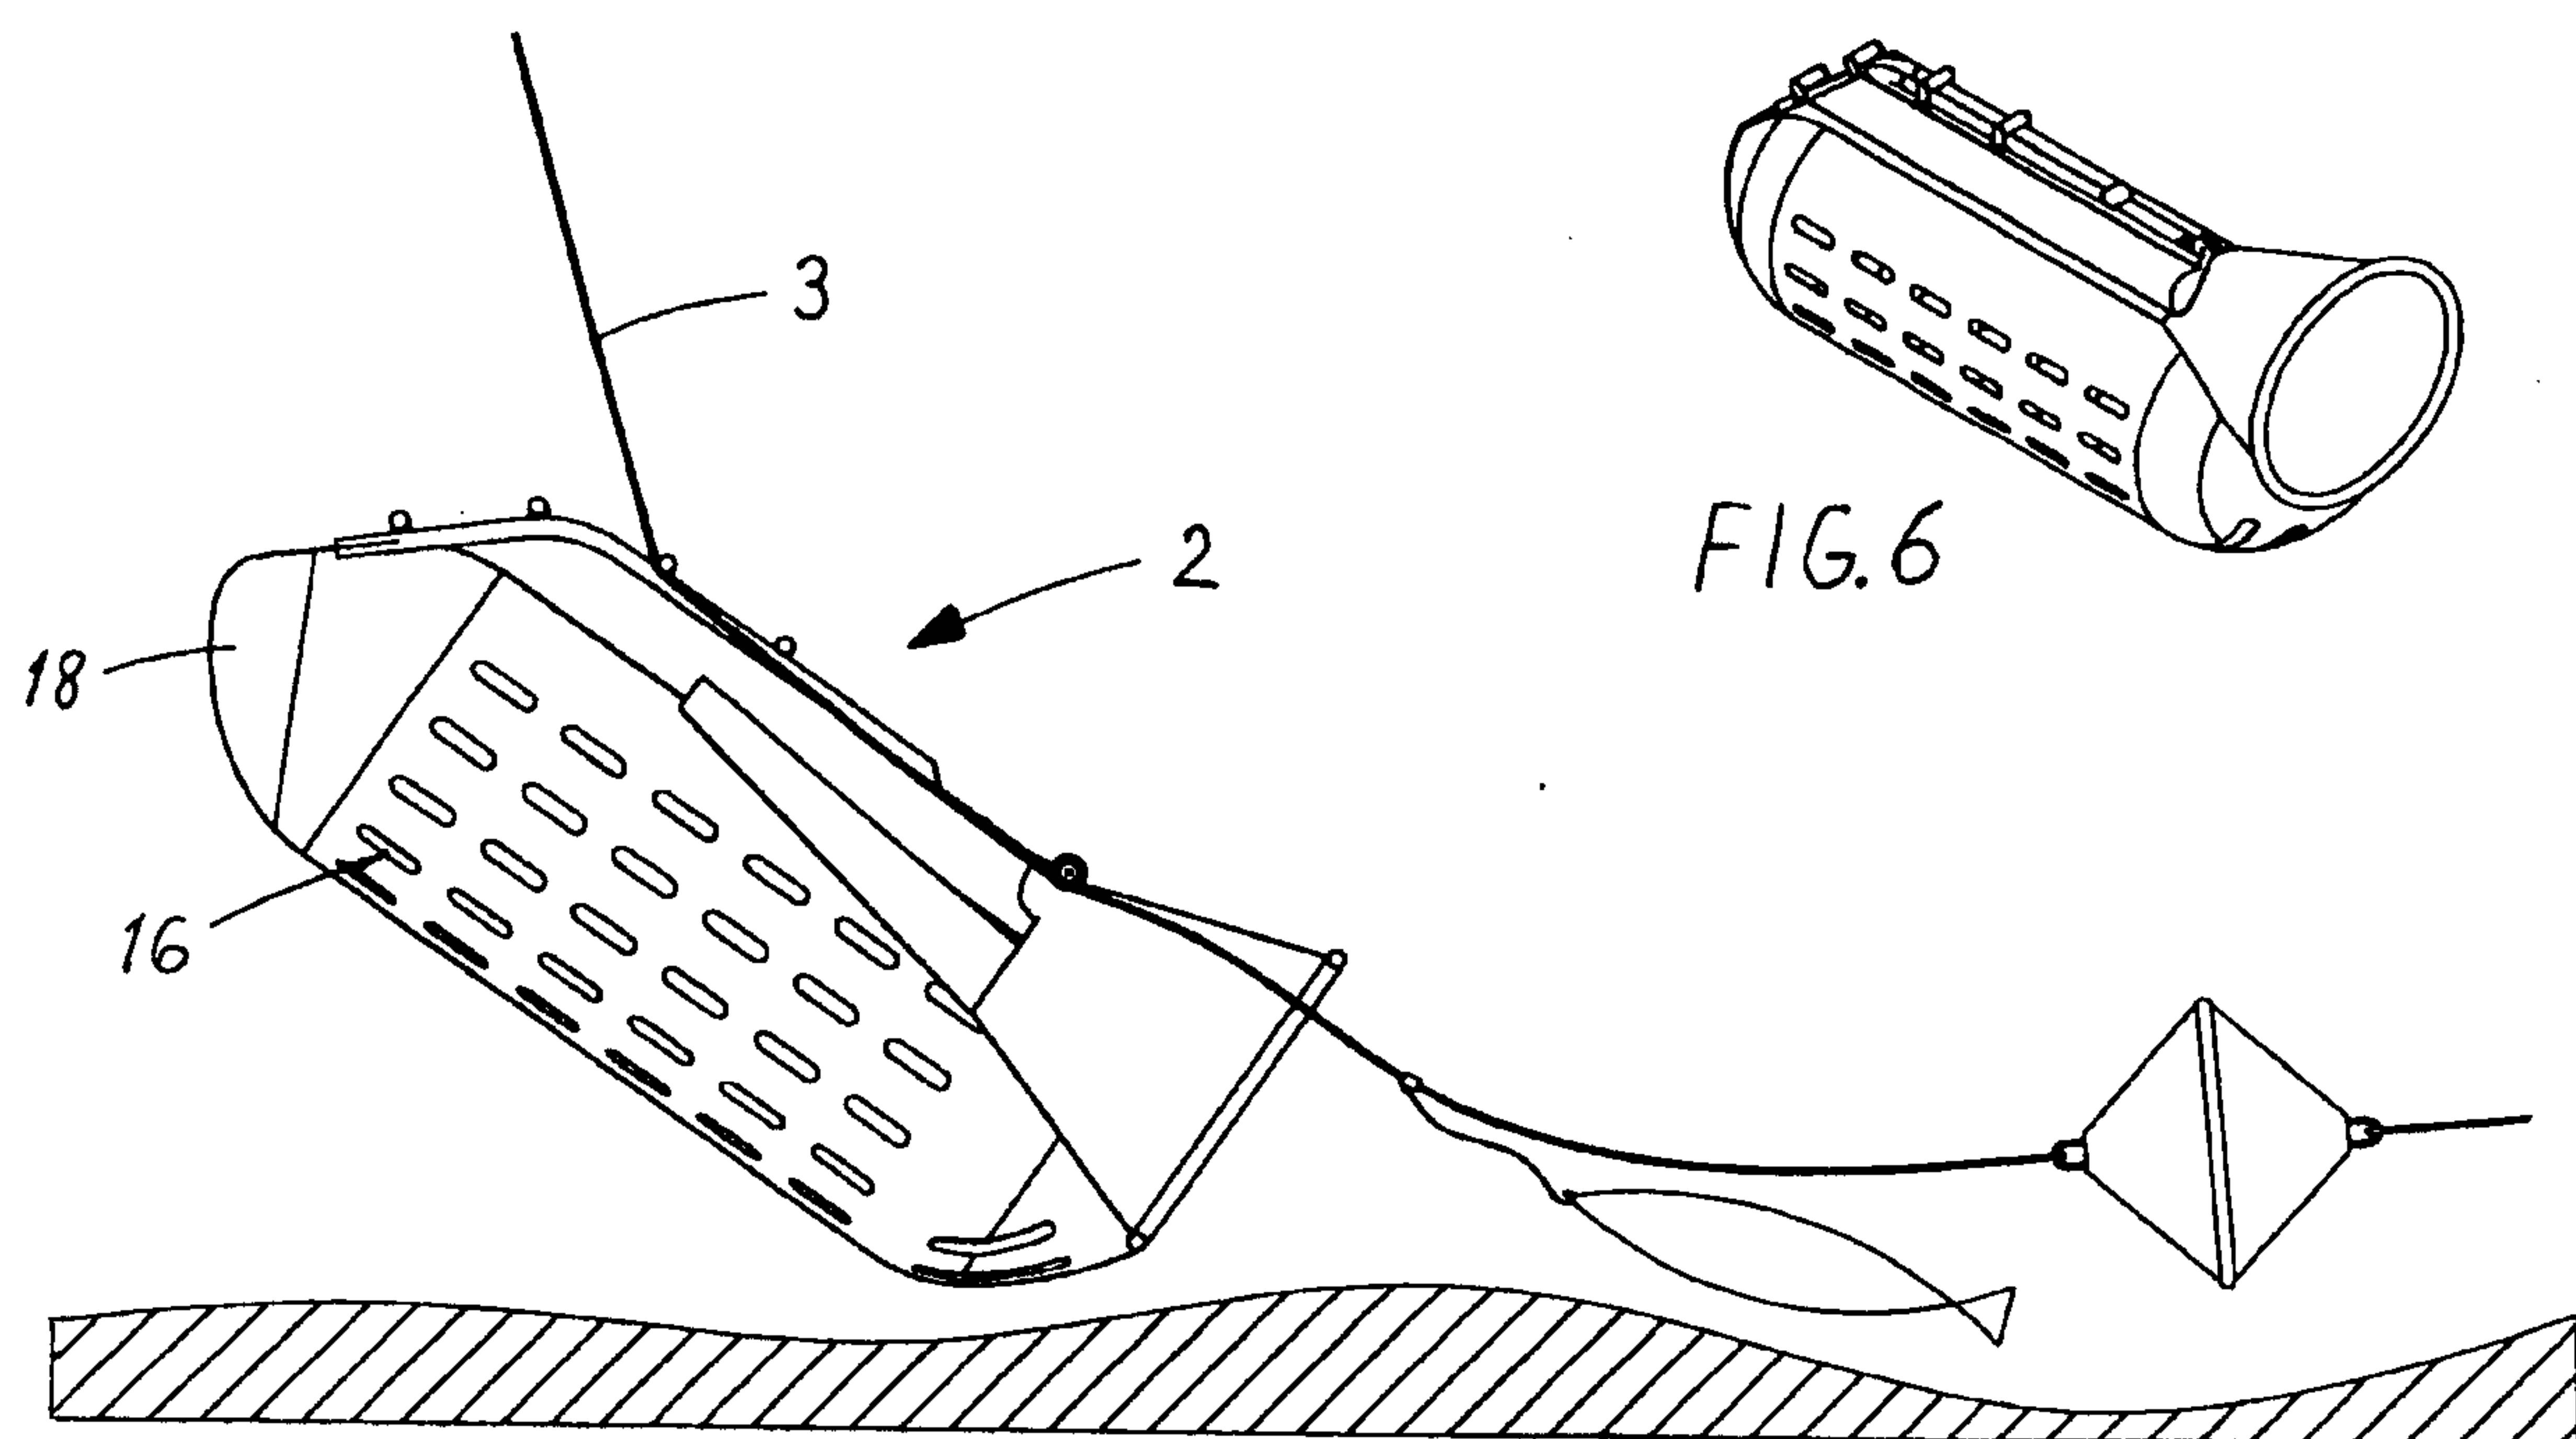