



(86) Date de dépôt PCT/PCT Filing Date: 1995/06/19
(87) Date publication PCT/PCT Publication Date: 1995/12/28
(45) Date de délivrance/Issue Date: 2005/04/05
(85) Entrée phase nationale/National Entry: 1996/12/20
(86) N° demande PCT/PCT Application No.: US 1995/007800
(87) N° publication PCT/PCT Publication No.: 1995/035547
(30) Priorité/Priority: 1994/06/20 (08/263,646) US

(51) Cl.Int.⁶/Int.Cl.⁶ G06F 19/00


(72) Inventeurs/Inventors:
PETERS, RICHARD M., JR., US;
BILLINGS, EDMUND, JR., US;
DAKIN, STEVEN, US;
MACKRAZ, JAMES, US;
PETERS, RICHARD M., SR., US;
ROBISON, JOHN, US;
SELPH, RUSSELL, US;
ABRAMS, JOYCE, US;
BURBACK, RON, US

(73) Propriétaire/Owner:
OCEANIA, INC., US

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : SYSTEME DE STRUCTURATION ET DE SELECTION DE TEXTE MEDICAL

(54) Title: MEDICAL TEXT STRUCTURING AND SELECTION SYSTEM

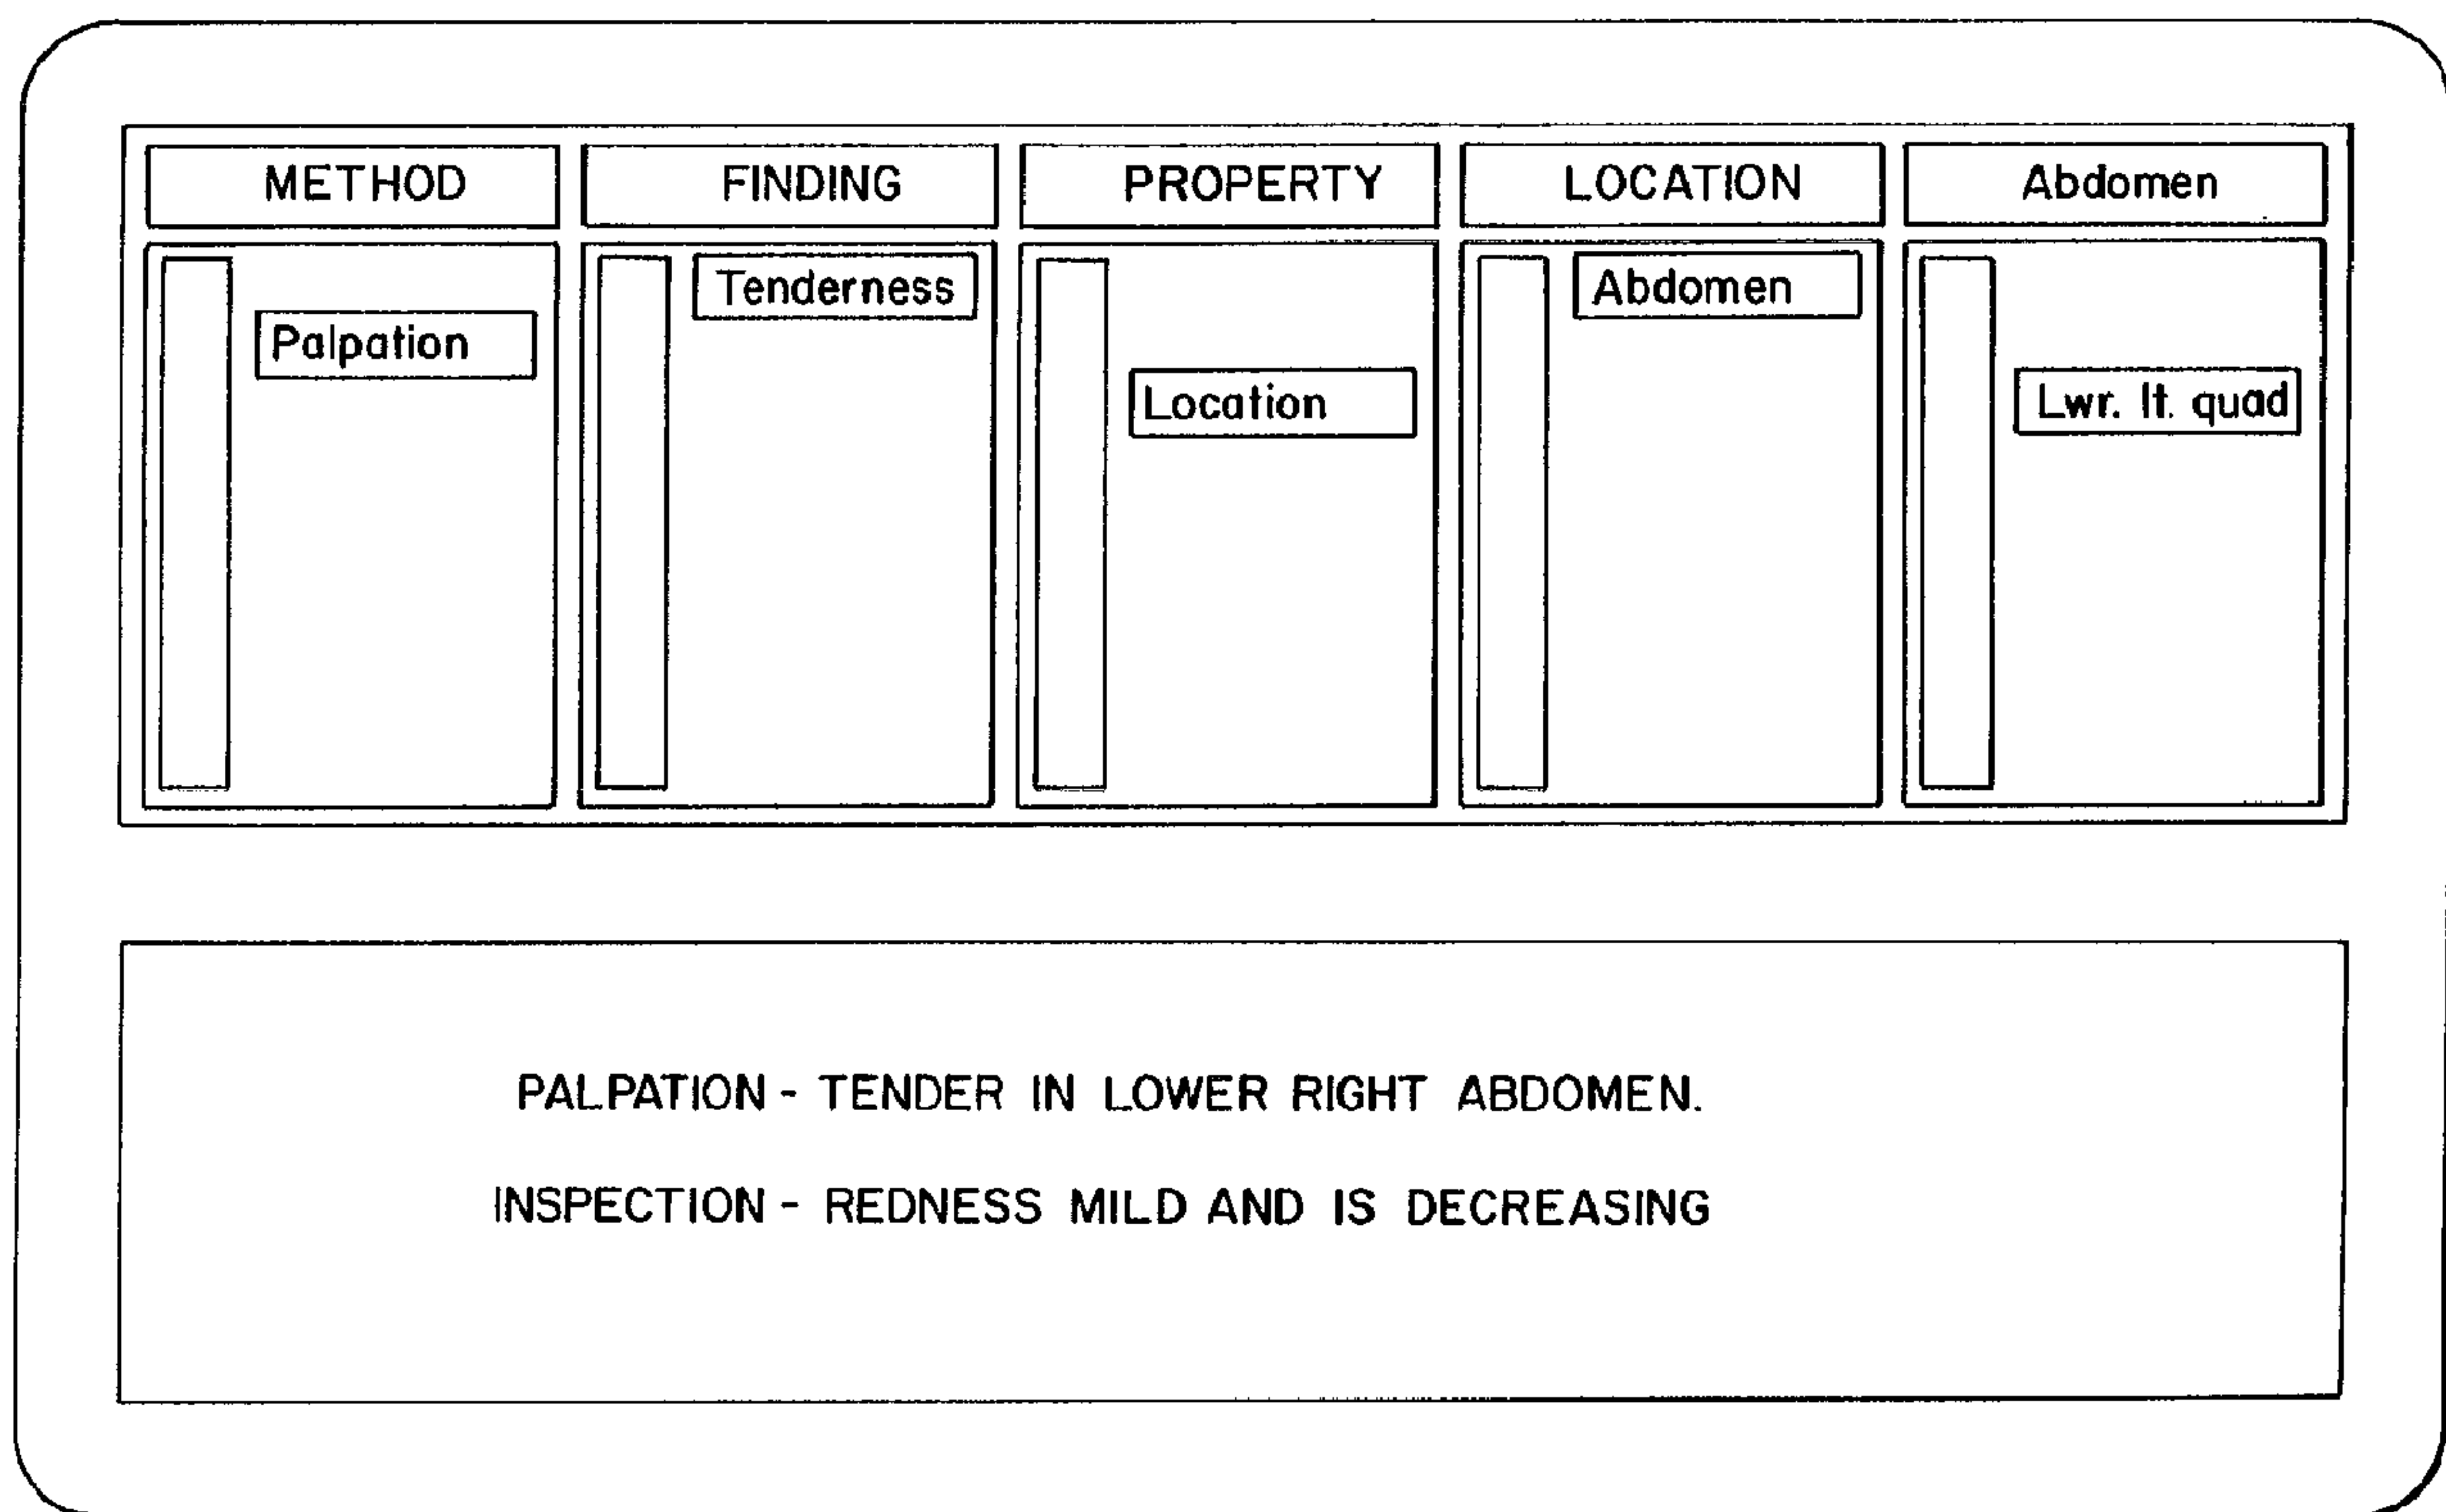

(57) Abrégé/Abstract:

A message originator (fig. 1) is presented with a tree of phrase choices (22) organized from broad to specific categories, with the selections in more specific categories directed by the originator's selections in the broader categories. The selections relate to a patient's medical condition (figs. 4, 5, and 6) and observations of a health care provider, with broader categories indicating general body systems and narrower categories indicating specific items, including values for properties of an item described by other selections on the path. The text of the message (66) is also presented to the originator, who can then edit the message as text (68). The text (66) is derivable from the tree structure selections, or path, taken from the originator and the interspersed free form text.





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

G06F 159/00

A1

(11) International Publication Number:

WO 95/35547

(43) International Publication Date:

28 December 1995 (28.12.95)

(21) International Application Number: PCT/US95/07800

(22) International Filing Date: 19 June 1995 (19.06.95)

(30) Priority Data:

08/263,646

20 June 1994 (20.06.94)

US

(71) Applicant: OCEANIA, INC. [US/US]; 3145 Porter Drive, Palo Alto, CA 94304 (US).

(72) Inventors: PETERS, Richard, M., Jr.; 1186 Chestnut Street, San Francisco, CA 94109 (US). BILLINGS, Edmund, Jr.; 1164 Green Street, San Francisco, CA 94109 (US). DAKIN, Steven; 231 Jessie Lane, No. 3, Mountain View, CA 94041 (US). MACKRAZ, James; 4021 Second Street, Palo Alto, CA 94306 (US). PETERS, Richard, M., Sr.; 1290 Sharon Heights Road, No. 48, Menlo Park, CA 94025 (US). ROBISON, John; 1001 Evelyn Terrace, No. 166, Sunnyvale, CA 94086 (US). SELPH, Russell; 722 University Drive, Palo Alto, CA 94304 (US). ABRAMS, Joyce; 131 Gloria Drive, San Rafael, CA 94901 (US). BURBACK, Ron; 1944 Paseo Del Cajon, Pleasanton, CA 94566 (US).

(74) Agents: ALBERT, Philip, H. et al.; Townsend and Townsend and Crew, Steuart Street Tower, 1 Market Plaza, San Francisco, CA 94105-1492 (US).


(81) Designated States: AU, CA, NZ, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published

With international search report.

2193706

(54) Title: MEDICAL TEXT STRUCTURING AND SELECTION SYSTEM

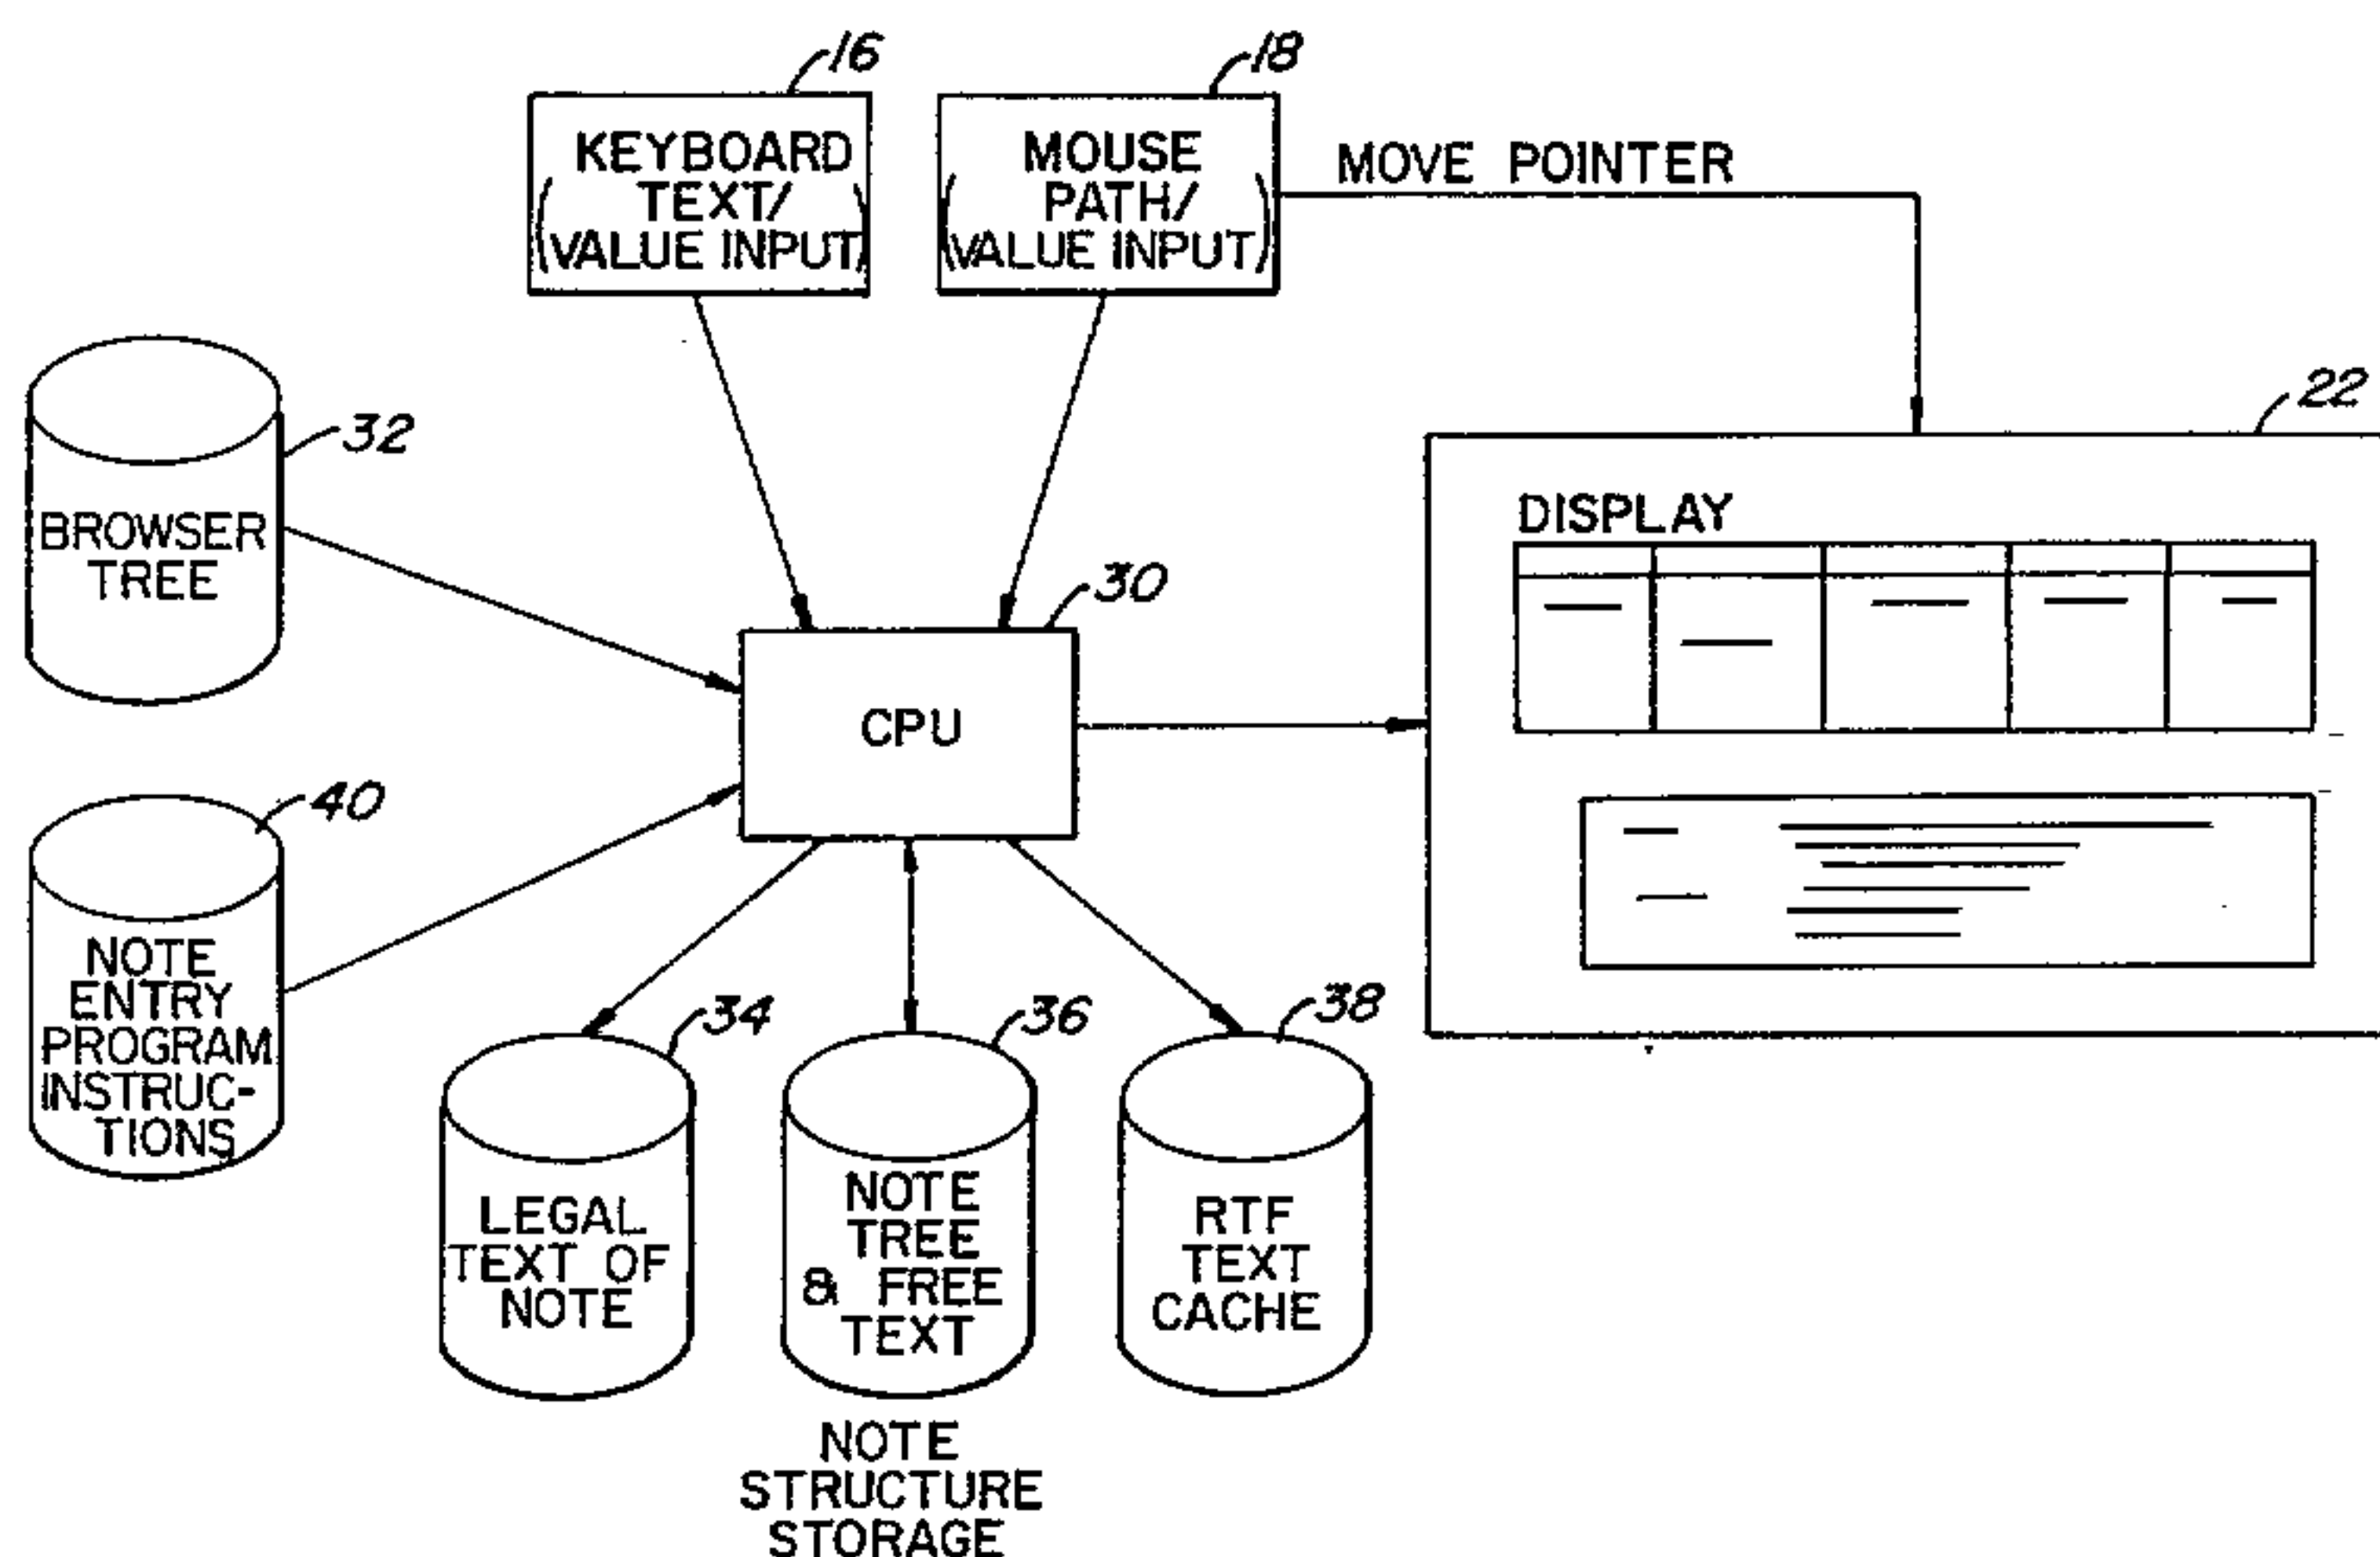

(57) Abstract

A message originator (fig. 1) is presented with a tree of phrase choices (22) organized from broad to specific categories, with the selections in more specific categories directed by the originator's selections in the broader categories. The selections relate to a patient's medical condition (figs. 4, 5, and 6) and observations of a health care provider, with broader categories indicating general body systems and narrower categories indicating specific items, including values for properties of an item described by other selections on the path. The text of the message (66) is also presented to the originator, who can then edit the message as text (68). The text (66) is derivable from the tree structure selections, or path, taken from the originator and the interspersed free form text.

MEDICAL TEXT STRUCTURING AND SELECTION SYSTEM

5

COPYRIGHT NOTICE

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the xerographic reproduction by anyone of the patent document or the patent disclosure in exactly the form it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

15

BACKGROUND OF THE INVENTION

The present invention relates to the field of structured text manipulation systems.

Several methods for structured text manipulation are known. For example, in a typical word processor, words are collected into units of sentences, paragraphs and sections, and these units can be operated upon. However, while providing maximal flexibility in the choice of text, the interrelationship between the words used cannot be accurately and easily discerned by an automatic analysis program. Although this is usually not a problem for human readers, who can usually parse a sentence to determine the subjects, nouns, and which modifiers apply to which parts of speech present in a sentence, this process is difficult for a computer. In some cases, such as a sentence about a "little red school jacket", even a human reader would have difficulty determining which modifiers modify which word, noun or adjective, in the phrase.

30

35

If the text is to be used just as text, the ambiguity is not a problem, since the context will usually provide the human reader with enough information which he or she can then use to resolve the ambiguity. Where the text is to be analyzed by a computer or mechanical text processor, however, the text might not be interpretable.

One solution to providing unambiguous information to such a processor is to limit the text to a well-defined computer language. Computer languages exist for programming, and also exist for other means of communication intended to be readable by both humans and computers. For example, some highly-structured languages provide for pseudo-coded instructions understandable by both computers and humans. Such a language has limited utility where not all the possible messages to be communicated can be considered in advance. Such is the case in the medical information field, where patient data is to be made understandable by both medical health care providers (HCP's) and analysis engines. The analysis engines might be employed to review the test to produce billing information, drug-drug interaction data, quality control functions, and the like.

The computer language approach to providing unambiguously analyzable messages is equivalent to providing a fixed set of multiple choice selections to the message composer and storing the message as a list of the selections made. While this might be suitable in many applications, in medical records management, this unacceptably limits HCP's in the task of accurately communicating a patient's situation.

What is needed is a method and apparatus for entry of messages readable by both human readers and analytical engines, and easily understood by those engines. Furthermore, if these messages and engines are to be used in a medical records environment, the messages must conform to legal requirements for medical records. These requirements concern the text of the message itself and not its underlying structure.

SUMMARY OF THE INVENTION

An improved message entry and storage system is provided by the present invention. In the system, a message originator is presented with a tree of phrase choices organized from broad to specific categories, with the selections in more specific categories directed by the originator's selections in the broader categories. The text

of the message is also presented to the originator, who can then edit the message as text. The text is derivable
5 from the tree structure selections, or path, taken from the originator and the interspersed free form text, At any time in an editing process, or a viewing process after the message has been fixed, an editor or viewer can reselect the path on the tree which generated the text.

10 Accordingly, the present invention provides a method for generating structured text,

comprising the steps of:

generating a browser tree which defines nodes for each of a plurality of phrases;

15 prompting a user to select nodes from an upper level of said browser tree;

accepting said selection of said upper level node;

20 displaying nodes from a lower level of said browser tree in a first display portion, where said nodes are nodes which are linked to said upper level node;

repeating said process of displaying, prompting and accepting until a node is reached which is at a lowest level, wherein a lowest level node is one
25 which does not have a required link to any other node of a lower level;

displaying text, separate from said displayed nodes and selections, wherein said text is generated according to emitted text strings and emission rules
30 maintained in said browser tree for each node, said emitted text strings being null strings or longer strings containing displayable text; and

wherein said browser tree nodes represent elements of a patient's medical condition, said text

3a

forms a note in said patient's patient chart, and a health care provider provides text input.

5 The message originator is a health care provider (HCP) and the message is a note providing that HCP's observations or instructions relative to a patient. The tree provided to the message originator is a set of phrases to describe these observations or instructions,
10 with broader categories indicating general body Systems and narrower categories indicating specific items, including values for properties of an item described by other selections on the path.

 The system also allows for editing of notes,
15 and will integrate a path of a note into another path where new paths are added, An integrated path makes the generation of naturally-worded text representations simpler.

 In a further aspect, the present invention
20 provides an apparatus for generating structured text, comprising:

 a processor;

 a browser tree structure, coupled to said processor, said browser tree structure comprising browser
25 tree nodes, each of which represent a portion of a phrase and include emittable text, wherein at least some of said browser tree nodes point to other browser tree nodes at a lower level and browser tree nodes below a top level are pointed to by browser tree nodes at one level higher;

30 a display coupled to said processor which is used by said processor to display, in a first display portion, a columnar representation of said browser tree structure;

3b

5 a mouse coupled to said processor, which is used to indicate to said processor selections of browser tree nodes;

a note tree structure coupled to said processor for storing said selections as a note tree, said note tree comprising at least one path, said at least one path comprising at least one node;

10 means for generating text representative of said selected nodes in a narrative form;

a second display portion of said display, for displaying said text, said second display portion coupled to said mouse such that a sentence unit of said text is
15 selectable;

means for populating said first display portion with nodes corresponding to a path corresponding to said sentence unit when said sentence unit is selected; and

20 means for combining paths when two paths from upper to lower levels of nodes have at least one node at an upper level in common.

A further understanding of the nature and advantages of the inventions herein may be realized by reference to the remaining portions of the specification
25 and the attached drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an illustration of a computer used to enter and edit notes;

30 Fig. 2 is a block diagram of the computer system shown in Fig. 1;

Fig. 3 is a high-level view of browser files forming a browser tree structure;

3c

Fig. 4 is a more detailed view of the display of the computer system shown in Fig. 1, illustrating the effects of a path selection on the selection display and the corresponding emitted text;

Fig. 5 illustrates the logical structure of a note tree; and

Fig. 6 is a diagram showing how a new path is integrated with an existing path for a note.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

5 Fig. 1 illustrates a typical means of message origination, a workstation 10. Of course, other data entry means, such as hand-held computers, voice-activated computers, personal desktop computers, mainframe terminals, etc., function equally well. Workstation 10 includes a computer
10 system 12 coupled to a fixed disk 14, a keyboard 16, a mouse 18, and a monitor 20. Monitor 20 is shown with a display surface 22.

Fig. 2 is an operational block diagram of workstation 10. Workstation 10 is shown with a central
15 processing unit ("CPU") 30 coupled to display 22, mouse 18, keyboard 16, a browser tree memory 32, a legal text memory 34, a note tree memory 36, and a rich-text format (RTF) text cache 38. Mouse 18 is also coupled to display 22 to provide a
20 display of a mouse pointer responsive to mouse movements. The associated drivers for the various devices are not shown. CPU 30 is used to process instructions of a note entry program which are stored in instruction memory 40. The functions of the various aspects of the diagram of Fig. 2 are discussed below.

25 Fig. 3 is a logical view of a browser tree structure 50 used to generate notes. In a structured text system, there may be more than one browser tree. The particular tree shown in Fig. 3 is used for medical applications, and thus has nodes suited for those applications. Each browser file contains
30 browser records for a list and is identified by a list number appearing in the upper left corner of each file shown in Fig. 3. Some files contain child records (as explained below), and are shown with the child records indicated by lines within the file, as is the case with lists 23 and 39.

35 For ease of manipulation by a digital computer, each list is organized as a series of node records. The contents of an example browser tree, which is used to generate the display shown in Fig. 4, is shown in Table 3, below. Each

list has an associated list type. As shown in Fig. 4, this is the title of the column for that list. For example, list 4 is a list of "METHOD" selections. Table 3, which shows excerpted details of the browser tree, shows two nodes, numbered 1 and 2, of list 4. As should be apparent from Table 3, each node of browser tree 50 is uniquely identified by its list number combined with its node number. Each node is also identified by a unique code and characterized by other fields.

In a specific implementation on a computer running the UNIX operating system, the browser tree is part of a data repository using the UNIX file system to construct a hierarchical "browser file" tree, wherein each browser file has a header followed by a variable number of "node" structures. The node structures represent the selectable terms which appear in each column and may include a link to a browser file representing a next level of the tree.

A header structure of a browser file includes the fields shown in Table 1 below.

<u>Field</u>	<u>Description</u>
--------------	--------------------

List#	This might be implied by the UNIX file system file name for the browser file.
-------	---

Title	It is placed at the top of the column. Also referred to as the Column Type.
-------	---

Table 1. Browser Header Structure (for a List)

A structure of a node of a browser file includes the fields shown in Table 2 below.

<u>Field</u>	<u>Description</u>
Node #	Unique number within the list
Node ID	Unique over the structured text system
Label/Name	Text which appears in the column for selection
5 Emitted Text	Text which appears in "legal text" view of note
Flags	Flags and emission rules control behavior of the emitted text
# subnodes	Number of children of this node. Subnode selections are stored in the same file as the parent nodes.
Next	Links (points) to next browser file. If # of subnodes is 0 and this field is a null pointer, this node is a "leaf" node.
Type	Indicates desired pop-up panel behavior. For example, with blood pressure, the pop-up panel would allow for entry of two numerical values within allowable ranges.

10

Table 2. Browser File Node Structure

As explained above, Table 3 is an example of the data stored in a browser tree.

15

List# (Column Type/Title)	Node#	Node ID	Next List	# of Subnodes
		Label/Name	Emitted Text	Flags/Emission Rules
20 4 (METHOD)	1	12345	48	0
		Inspection	"Inspection -"	always emit, bolded
25 2	12346	23	0	
	Palpation	"Palpation -"	always emit, bolded	
23 (FINDING)				

	1	13552	none	3
		Tenderness	"tender"	always emit
5	1a	13553	38	0
		Absent	"not"	negation, exclusive
	1b	13554	38	0
		Present	none	exclusive
10	1c	13555	38	0
		Frequently	"frequently"	prepend
	...			
	38	(PROPERTY)		
15	1	14329	39	0
		Location	none	-
	39	(LOCATION)		
	1	14587	none	0
20		Chest	"entire chest area"	-
	...			
	6	15245	none	3
		Abdomen	none	-
25	6a	15246	none	0
		entire	"entire abdomen"	exclusive
	6b	15247	none	0
		lower rt. quad	"lower right abdomen"	exclusive
30	6c	15248	none	0
		lower lt. quad	"lower left abdomen"	exclusive
	...			
	48	(FINDING)		
35	3	17054	67	0
		Redness	"redness"	if severity=severe, "very red"
	...			
	67	(PROPERTY)		
40	1	19930	84	0
		Severity	none	-
	2	19931	85	0
		Trend	none	-
45	3	19932	value(BP)	0
		Blood Pressure	"BP= %s/%s"	replace %s with values
	...			
	84	(SEVERITY)		
50	8	39874	none	0
		Mild	"mild"	-
	85	(TREND)		
	1	40987	none	0
		Decreasing	"is decreasing"	-
55	...			

Table 3.

For reasons of space, the data entry "type" fields are not shown in Fig. 3. The type field is used to indicate how to get input from the user. Typically, the type field indicates that the input from the user is a selection of a node from a list presented. For some entries, such as dosage information, instead of giving the user a set of fixed choices, a dialog window opens and requests entry of a

numerical value. Wherever the desired response is other than a selection from a well-defined set of choices, such a pop-up dialog window will be indicated by the type field. This is a per-node field instead of a per-list field, because one list is allowed to contain items of different types, which may require different pop-up dialog windows depending on the type of the item.

The emission rules are generally described by flags (four of which are described below) and conjunction rules (also described below) for each node, and control how the node contributes to the string of structured text which is emitted. The flags include:

Exclusive Flag - When set, all siblings of the node are excluded from the emitted text except the most recently selected sibling which has an "exclusive flag" set. This is so a parent node can only have one "exclusive" child in the emitted text at any one time. This is sometime known as "radio button" behavior.

Text Prefix Flag - When set, the text emission engine will prepend a parent's text value to that of the current node, to allow a text 'chain' starting from the current node and traversing the browser selection to the left until a break in the chain (a node without the text prefix flag set) is encountered. An example of the use of this flag is shown in Table 3. If a user selects, under Finding, the choice "Tenderness" (List #23), and then selects "frequently", the emitted text would be "frequently tender" rather than "tender frequently".

Negation Flag - When set, it operates as a 'prepend' flag, and causes the node's emitted text to be prepended to the subject of the sentence which contains it. Text for negative nodes is shown in the reverse order in which the nodes are selected. That is to say that any negative node text is prepended to the absolute beginning of the sentence. An example of the use of this flag is shown in Table 3. If a user selects, under Finding, the choice "Tenderness" and then selects "Absent", the emitted text would be "not tender" rather than "tender not".

Emit Property Flag - When set, the text emission engine emits the property as well as the emitted text.

The conjunctions, with their rules, include:

5 Period (.) - separates sentences.

Colon (:) - separates a group of sentences from its header. The header is understood to be common to all sentences, but only displayed once. An example is the 'system' header for a physical exam, which might be displayed
10 as:

 Cardiac System: Sentence 1. Sentence 2. General:
 Sentence 1. ...

Comma (,) - separates properties (and all associated values) within a sentence. For example:

15 Subject property 1 value 1, property 2 value 2.

And (and) - separates values within a property group.
For example:

 Subject property 1 value 1 and value 2, property 2
 value 3 and value 4 and value 5.

20 In the process of entering a note, the user selects nodes from the labels/names shown on display 22. Fig. 4 is an example of how a display might appear if the browser tree of Fig. 3/Table 3 is used and particular nodes are selected. In
25 this example, nodes 24444 (Method=Palpation), 18552 (Finding=Tenderness), 15329 (Property=Location), 12246 (Location=Lower right abdomen) are shown selected. These nodes, taken together, form a "path" of nodes. Note that two columns are used to provide all the possible choices for the
30 "Location=" node. The use of more than one column for a node selection is indicated by the use of normal case on all titles following the first column for that node (e.g., "LOCATION", and "Abdomen").

35 At the start of a path selection operation, only the first column, "METHOD", is presented to the HCP. This column corresponds to List #4 in Fig. 3. When item 2 is selected, CPU 30 reads the corresponding next list entry for item 2, which is list 23, and presents list 23 ("FINDING") in the

second column. When item 1 of list 23 ("TENDERNESS") is selected, CPU 30 reads the "next list" field of that entry, which is list 38, and displays that list ("PROPERTY") in the third column. From that list, item #3 ("LOCATION") is shown selected, which causes CPU 30 to present list #39 in the fourth column.

The "LOCATION" list is presented differently, since there are a great many choices for location than would be practical on a single list. Thus the response to location is actually presented in two columns; this is indicated by the use of ";" in the Label. The selection "Abdomen" and "Lower lt. quad" result in only one node being added to the note list, namely the node associated with list 39, item 7. The selection ends with this node, since there is no next list for this node.

Each node includes a unique NODE ID, which survives the modification of the browser tree, so that the text of a node can be regenerated even if the node is no longer part of the browser tree. However, if the node is deleted and later regenerated, the NODE ID value of the regenerated node may be different. Once a path is selected from a method down to a node which does not have a next list (a "leaf node"), the legal text for that selection is displayed in a second portion of the display. This legal text is generated by CPU 30 from the emitted text field and the emission rules for each of the nodes in the path.

As is the general practice in the health care field, an observation is described by an examination method, a finding, and properties, which have values. Often multiple properties are described. Thus, the columns and levels visited by a path are generally in this order, although nothing in this embodiment of the present invention requires that the particular column headings shown in Table 3 be used.

Fig. 5 is a more visual, structured diagram of the note entered into note tree storage 36 using CPU 30. As shown in Fig. 5, multiple paths from a given node, such as the base note node, are ordered. As is shown by the correspondence between the diagram of Fig. 5 and the lower portion of the

display shown in Fig. 4, the ordering determines the order of appearance in the text.

In the structured view, each message, generally called a "note", comprises a set of pointers to one or more sub-paths, which are ordered among themselves. The ordering indicates how any text "emitted" from the structure is ordered in the legal view. Text appears to the user to be "emitted", since after selection of a node along a path, or at the end of a path, text will be added to the legal text. (Although some node selections, by themselves, result in no text being emitted). For example, the node Property=Trend does not emit any text. However, in some embodiments, that node might emit the word "trend". The bold formatting indicated in the emission rules for the methods is also shown in Fig. 4.

In some cases, such as with a property, a value is more appropriate than a choice of selections at the next node in the path. For example, the "Property=Blood Pressure" node might lead to a value node, which is not presented as a series of choices, but as an opportunity to enter a number.

Once a path has been selected, the note can be completed, or another path can be selected. To edit the note, the user can select any sentence unit, which is a block of text, usually forming a sentence, emitted for one path. In Fig. 4, two sentence units are shown. If for example, the user were to select the first sentence unit, "Palpation ... abdomen.", CPU 30 would in response load the browser tree and execute the selections representative of the sentence unit, i.e. those selections shown in the upper portion of Fig. 4, and allow the user to change the selections. This is a preferred means of editing the text, since it remains formatted internally, instead of being all free-form text, as is the case with most text editing programs. The reloading of the browser file is made possible by the fact that CPU 30 stores the note tree in structure 36 (see Fig. 36) as well as the displayed text in RTF cache 38.

RTF cache 38 holds the text which is displayed on the lower half of display 22 and appears to the user to be what is being edited. It is just a cache, because it does not

hold the actual note, just a temporary display representation of the note. For many medical records purposes, an exactly reproducible full text version of a note is necessary for the legally required paper trail, hence the name "legal" note.

5 This legal text is stored in storage area 34, and is not normally used in editing. Once the legal text of a note is fixed, that note cannot be edited, so this is not much of a concern.

10 Often, when entering a note, or editing an existing note, the user will want to back track along a path and create a second branch, as is illustrated by the second branch of the note tree shown in Fig. 5. To avoid repetition, such as:

Palpation - Tender in lower right abdomen.

15 Inspection - Redness mild.

Inspection - Redness is decreasing.

CPU 30 combines paths to minimize the repetition when text is emitted.

20 Fig. 6 illustrates how the CPU 30 deals with a new branch added to original content. Fig. 6 shows a new branch 60, a note tree 62 containing the original content, a note tree 64 containing the merged content, the text emitted for the original content in a display view 66, and the text emitted for the merged content in a display view 68.

25 The path of the new content is:

Method=Palpation (12436)

Finding=Tenderness (13552)

Property=Location (14329)

30 Location=Abdomen; lower lt. quad (15246)

and the first two nodes are in common between the new path and the original content. Therefore, as shown by note structure 64, the new branch is inserted as a path off of the Finding=Tenderness (13552) node. As the RTF cache 68 shows, this
35 leads to good integration of the text when displayed.

In some embodiments, more sophisticated conjunction rules are provided for, wherein a node's emitted text field may include an associated "default conjunction rule" to direct the text emission engine as to how to perform linguistically
40 proper conjunction operations. For example, suppose four nodes A, B, C and D are stored as children of a parent node,

X. When X, with children A, B, C and D is emitted (added to the legal text representation), the text value for X is first emitted, followed by A (so far no punctuation has been necessary). Since there are more children to emit, an 'and' is emitted, followed by the next child (B). This process is repeated until all children have been emitted, and then a period is added at the end. This results in "A and B and C and D", however a rule that each child except for the second to the last and the last child is emitted followed by a comma, and the second to the last child is followed by "and" would result in more readable legal text. However, in some embodiments, the use of "and" repeatedly and not commas is preferred, if commas are used to separate PROPERTIES and a unique separator for values is desired. If the user sees no benefit of being able to identify property vs. value breaks (that is, commas and 'and's as uniquely different), then the more complex conjunction rule might be used.

The mapping of Browser Number and Node Tag to Oceania Clinical ID (OCCID) mapping is very useful for an exception charting engine. Every selection in a browser has a browser number (browser-level encoding) and tag (node-level encoding) associated with it. These two values are mapped to a single number, called an OCCID (or NODE ID, from Fig. 3), which is stored with the textual representation in the note. When the browser source of any text phrase must be recalled, the OCCID is mapped back to its original browser number and tag. These two values are then used to determine what browser to load and what node in that browser to select.

The above description is illustrative and not restrictive. Many variations of the invention will become apparent to those of skill in the art upon review of this disclosure. The scope of the invention should, therefore, be determined not with reference to the above description, but instead should be determined with reference to the appended claims along with their full scope of equivalents.

5

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

10

1. A method for generating structured text, comprising the steps of:

generating a browser tree which defines nodes for each of a plurality of phrases;

15

prompting a user to select nodes from an upper level of said browser tree;

accepting said selection of said upper level node;

20

displaying nodes from a lower level of said browser tree in a first display portion, where said nodes are nodes which are linked to said upper level node;

25

repeating said process of displaying, prompting and accepting until a node is reached which is at a lowest level, wherein a lowest level node is one which does not have a required link to any other node of a lower level;

30

displaying text, separate from said displayed nodes and selections, wherein said text is generated according to emitted text strings and emission rules maintained in said browser tree for each node, said emitted text strings being null strings or longer strings containing displayable text; and

35

wherein said browser tree nodes represent elements of a patient's medical condition, said text forms a note in said patient's patient chart, and a health care provider provides text input.

2. The method of claim 1, further comprising the steps of:

5 accepting a selection of text displayed in said step of displaying text;

 automatically generating paths through said browser tree which are equivalent to paths originally used to generate said displayed text;

10 displaying said selections and nodes in said first display portion as if said selections had been made manually; and

 prompting a user to modify said paths.

15 3. The method of claim 2, further comprising the steps of:

 accepting modifications to said paths of said browser tree;

 combining multiple paths with common nodes, if
20 any multiple paths occur; and

 displaying text generated from said combined multiple paths and other modified paths.

4. The method of claim 1, wherein said note in
25 said patient's chart is fixed such that the words of the note are not changed after being fixed even if said browser tree is subsequently altered,

5. The method of claim 1, further comprising
30 the steps of:

 accepting tree-form text and attaching said free-form text to a node; and

 incorporating said tree-form text into said

displayed text.

6. The method at claim 1, further comprising
5 the steps of:

accepting a value in response to the selection
of a node of a value-related type; and

incorporating said value into said displayed
text.

10

7. An apparatus for generating structured text,
comprising:

a processor;

a browser tree structure, coupled to said
15 processor, said browser tree structure comprising browser
tree nodes, each of which represent a portion of a phrase
and include emittable text, wherein at least some of said
browser tree nodes point to other browser tree nodes at a
lower level and browser tree nodes below a top level are
20 pointed to by browser tree nodes at one level higher;

a display coupled to said processor which is
used by said processor to display, in a first display
portion, a columnar representation of said browser tree
structure;


25 a mouse coupled to said processor, which is
used to indicate to said processor selections of browser
tree nodes;

a note tree structure coupled to said processor
for storing said selections as a note tree, said note
30 tree comprising at least one path, said at least one path
comprising at least one node;

means for generating text representative of
said selected nodes in a narrative form;

a second display portion of said display, for displaying said text, said second display portion coupled
5 to said mouse such that a sentence unit of said text is selectable;

means for populating said first display portion with nodes corresponding to a path corresponding to said sentence unit when said sentence unit is selected; and
10 means for combining paths when two paths from upper to lower levels of nodes have at least one node at an upper level in common.

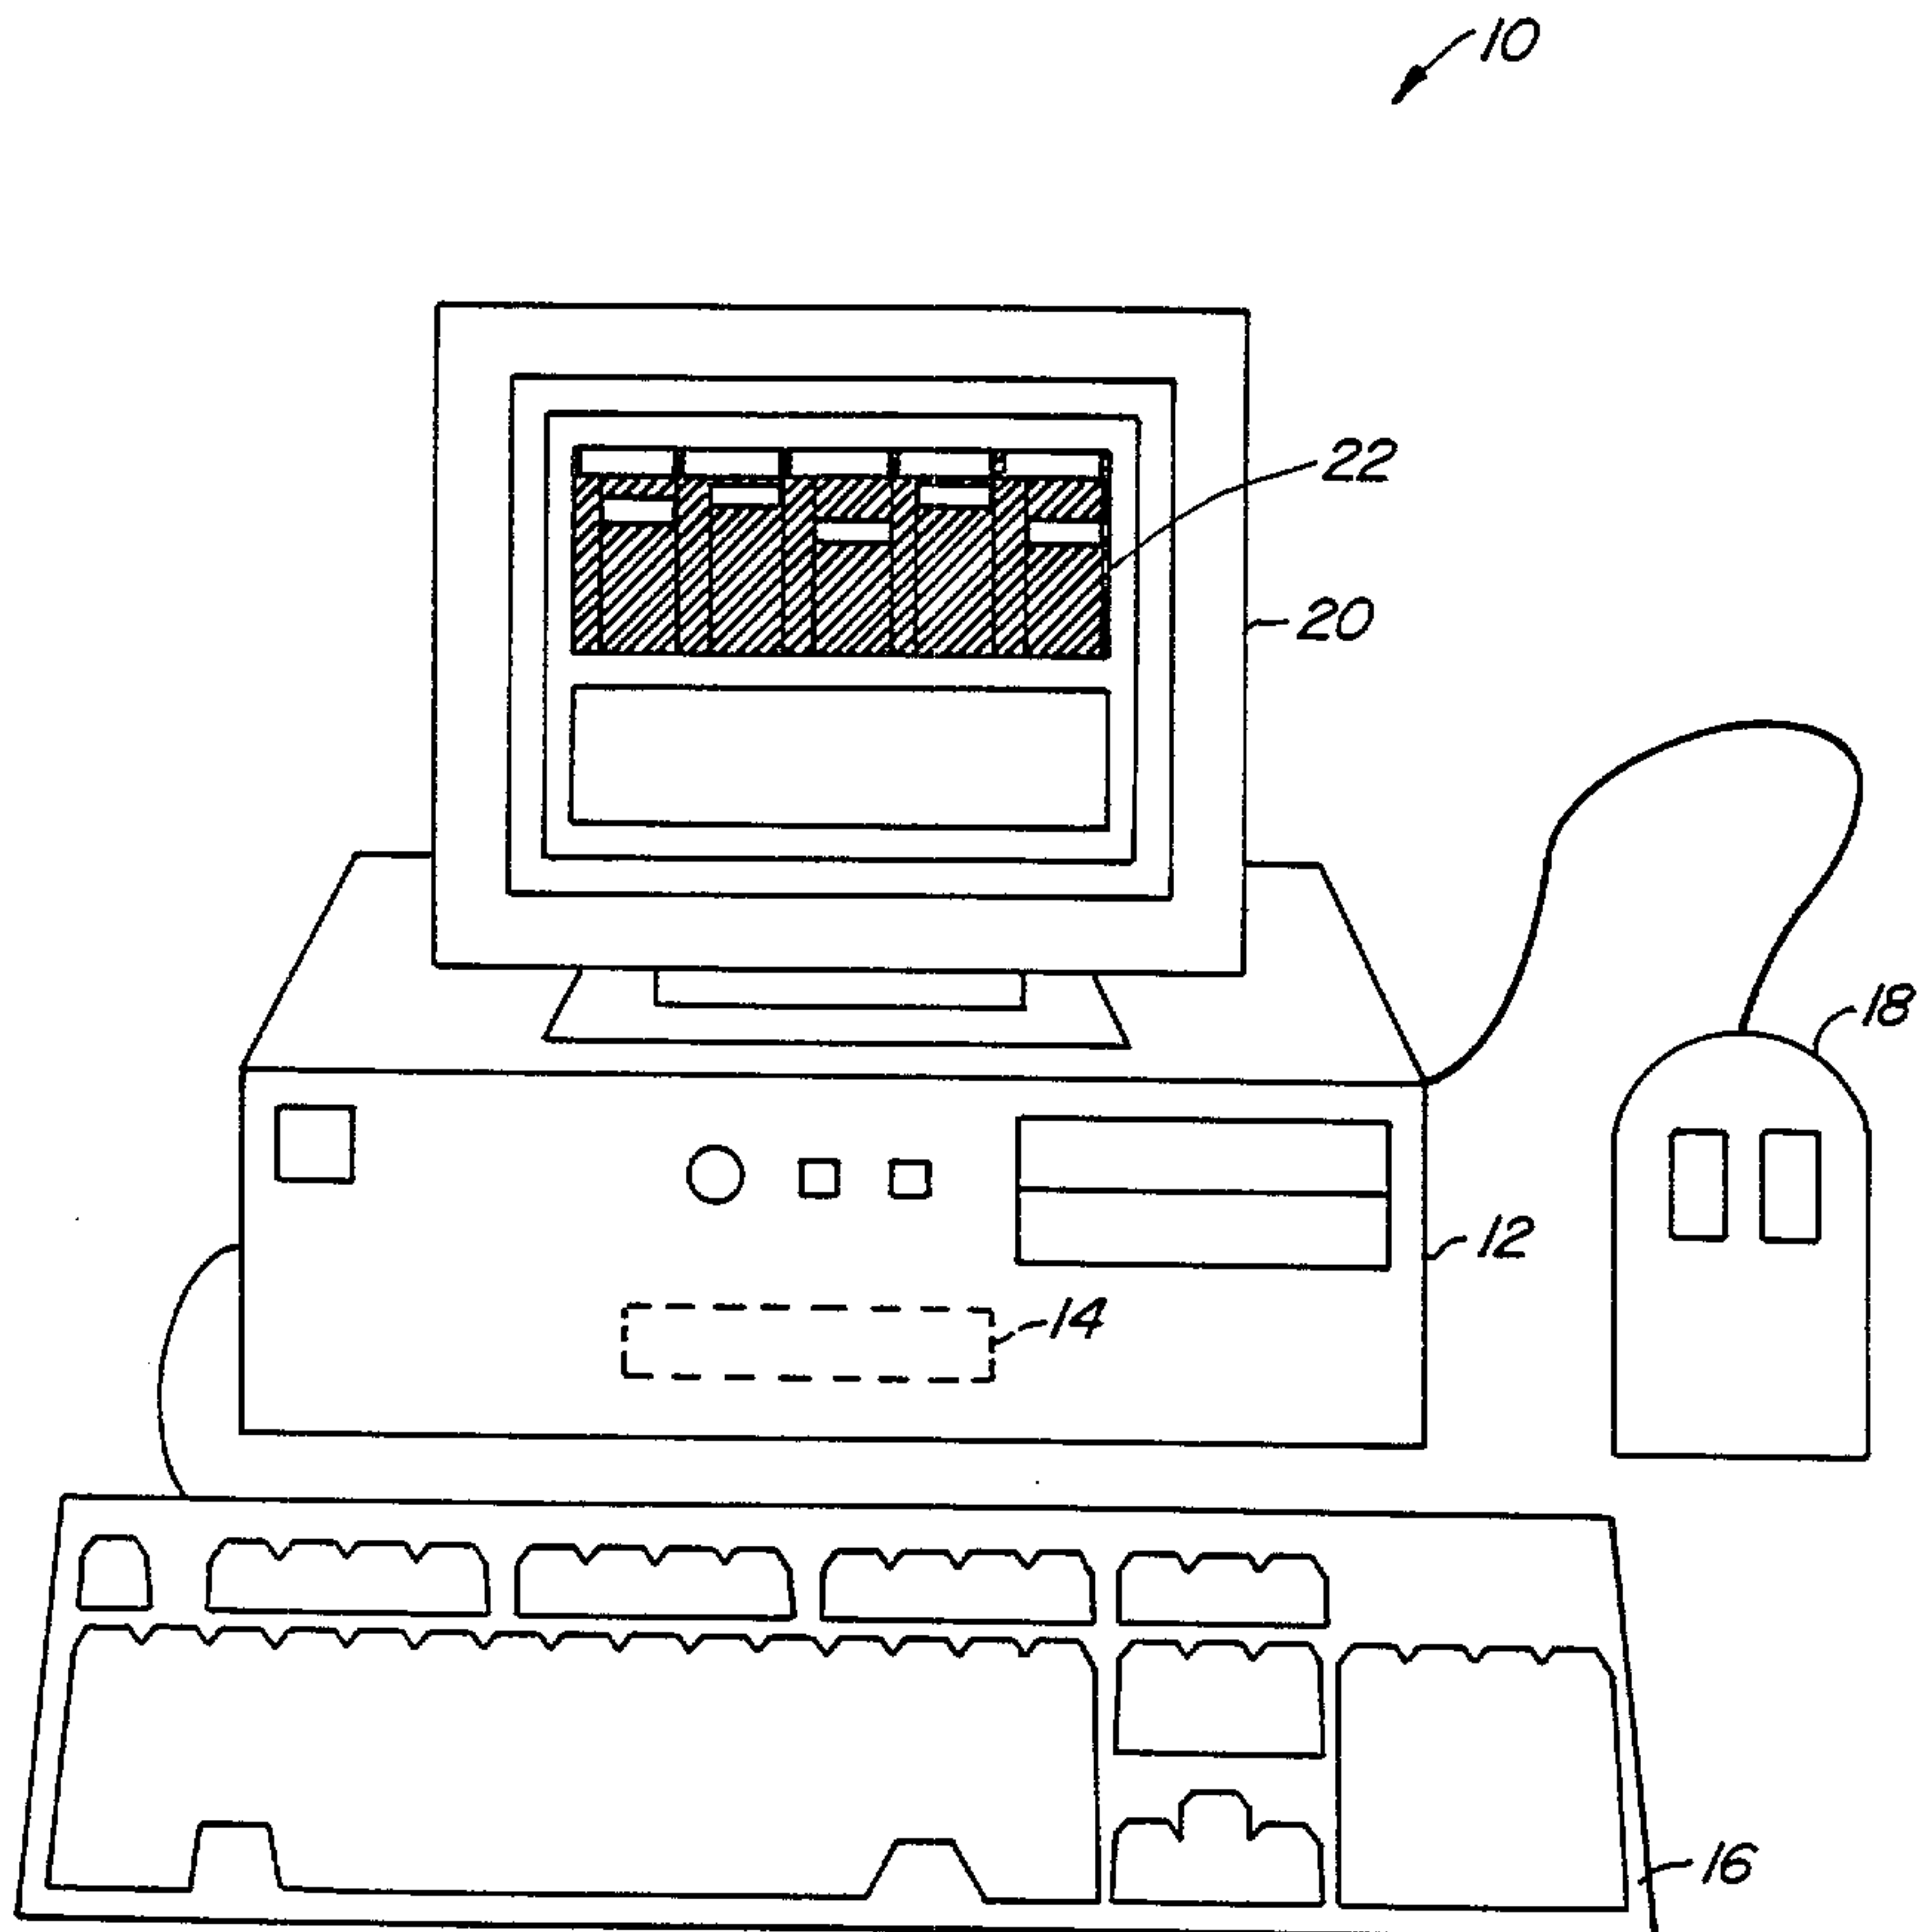**FIG. 1.**

2/6

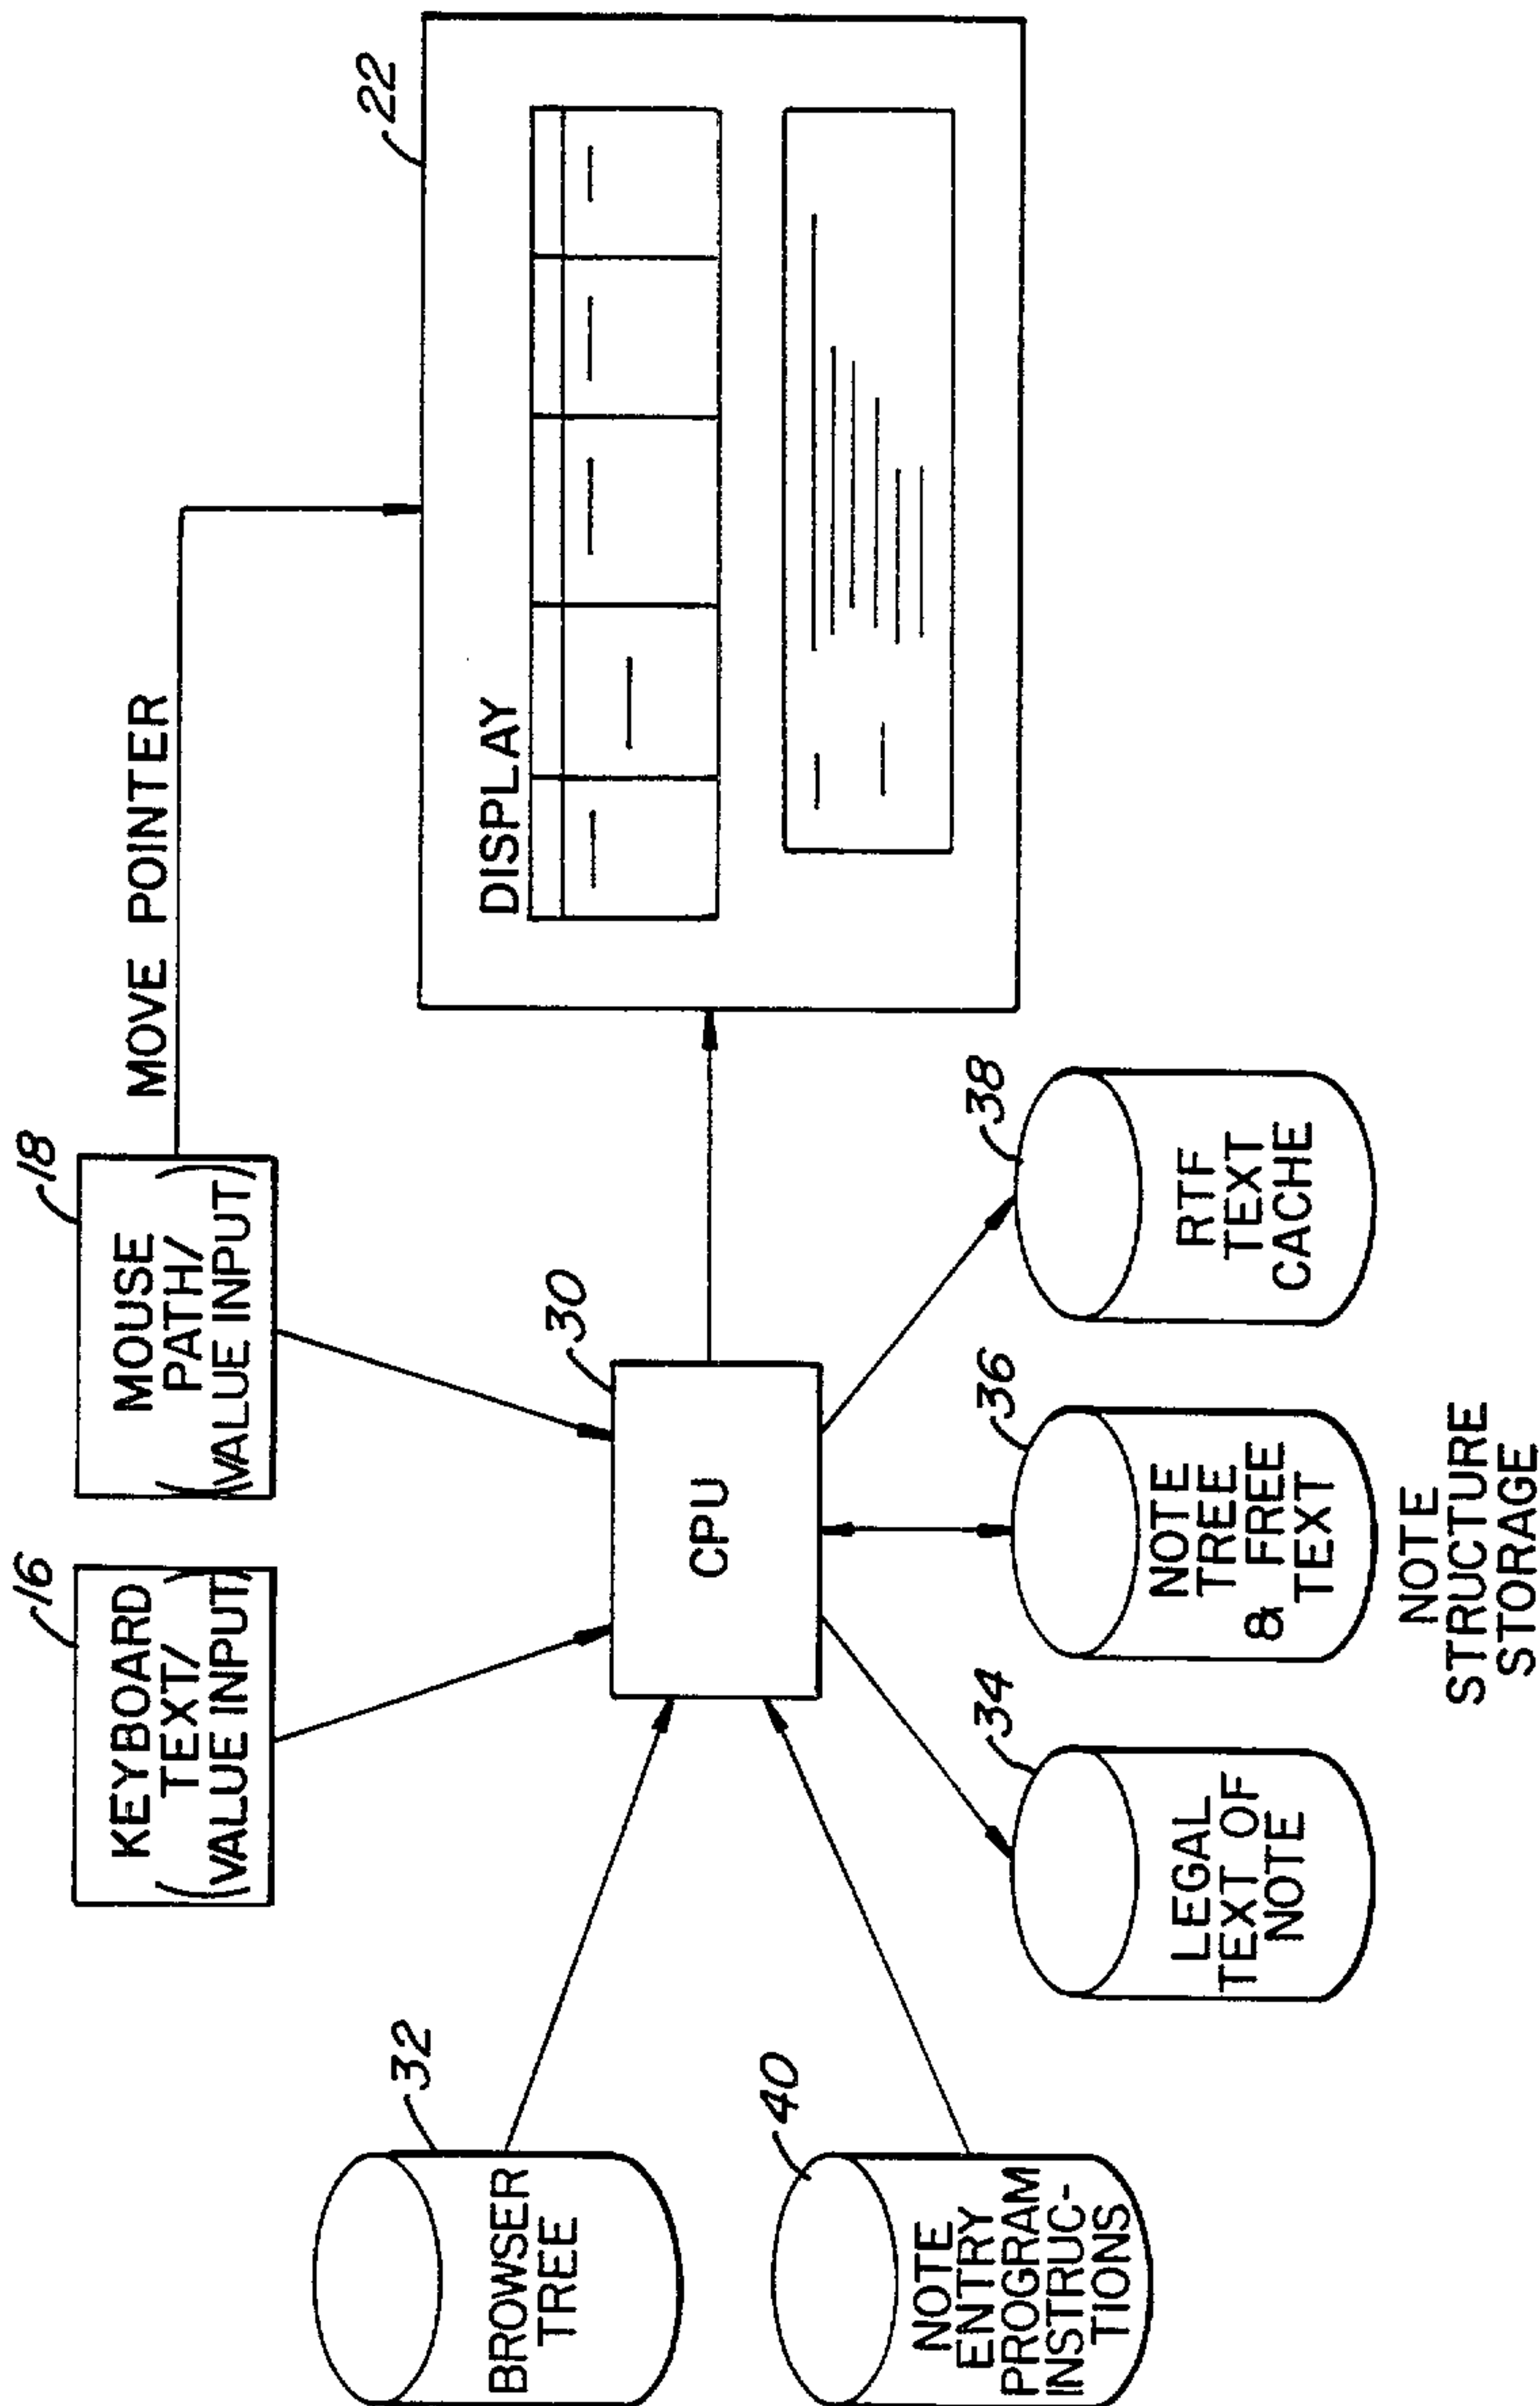


FIG. 2.

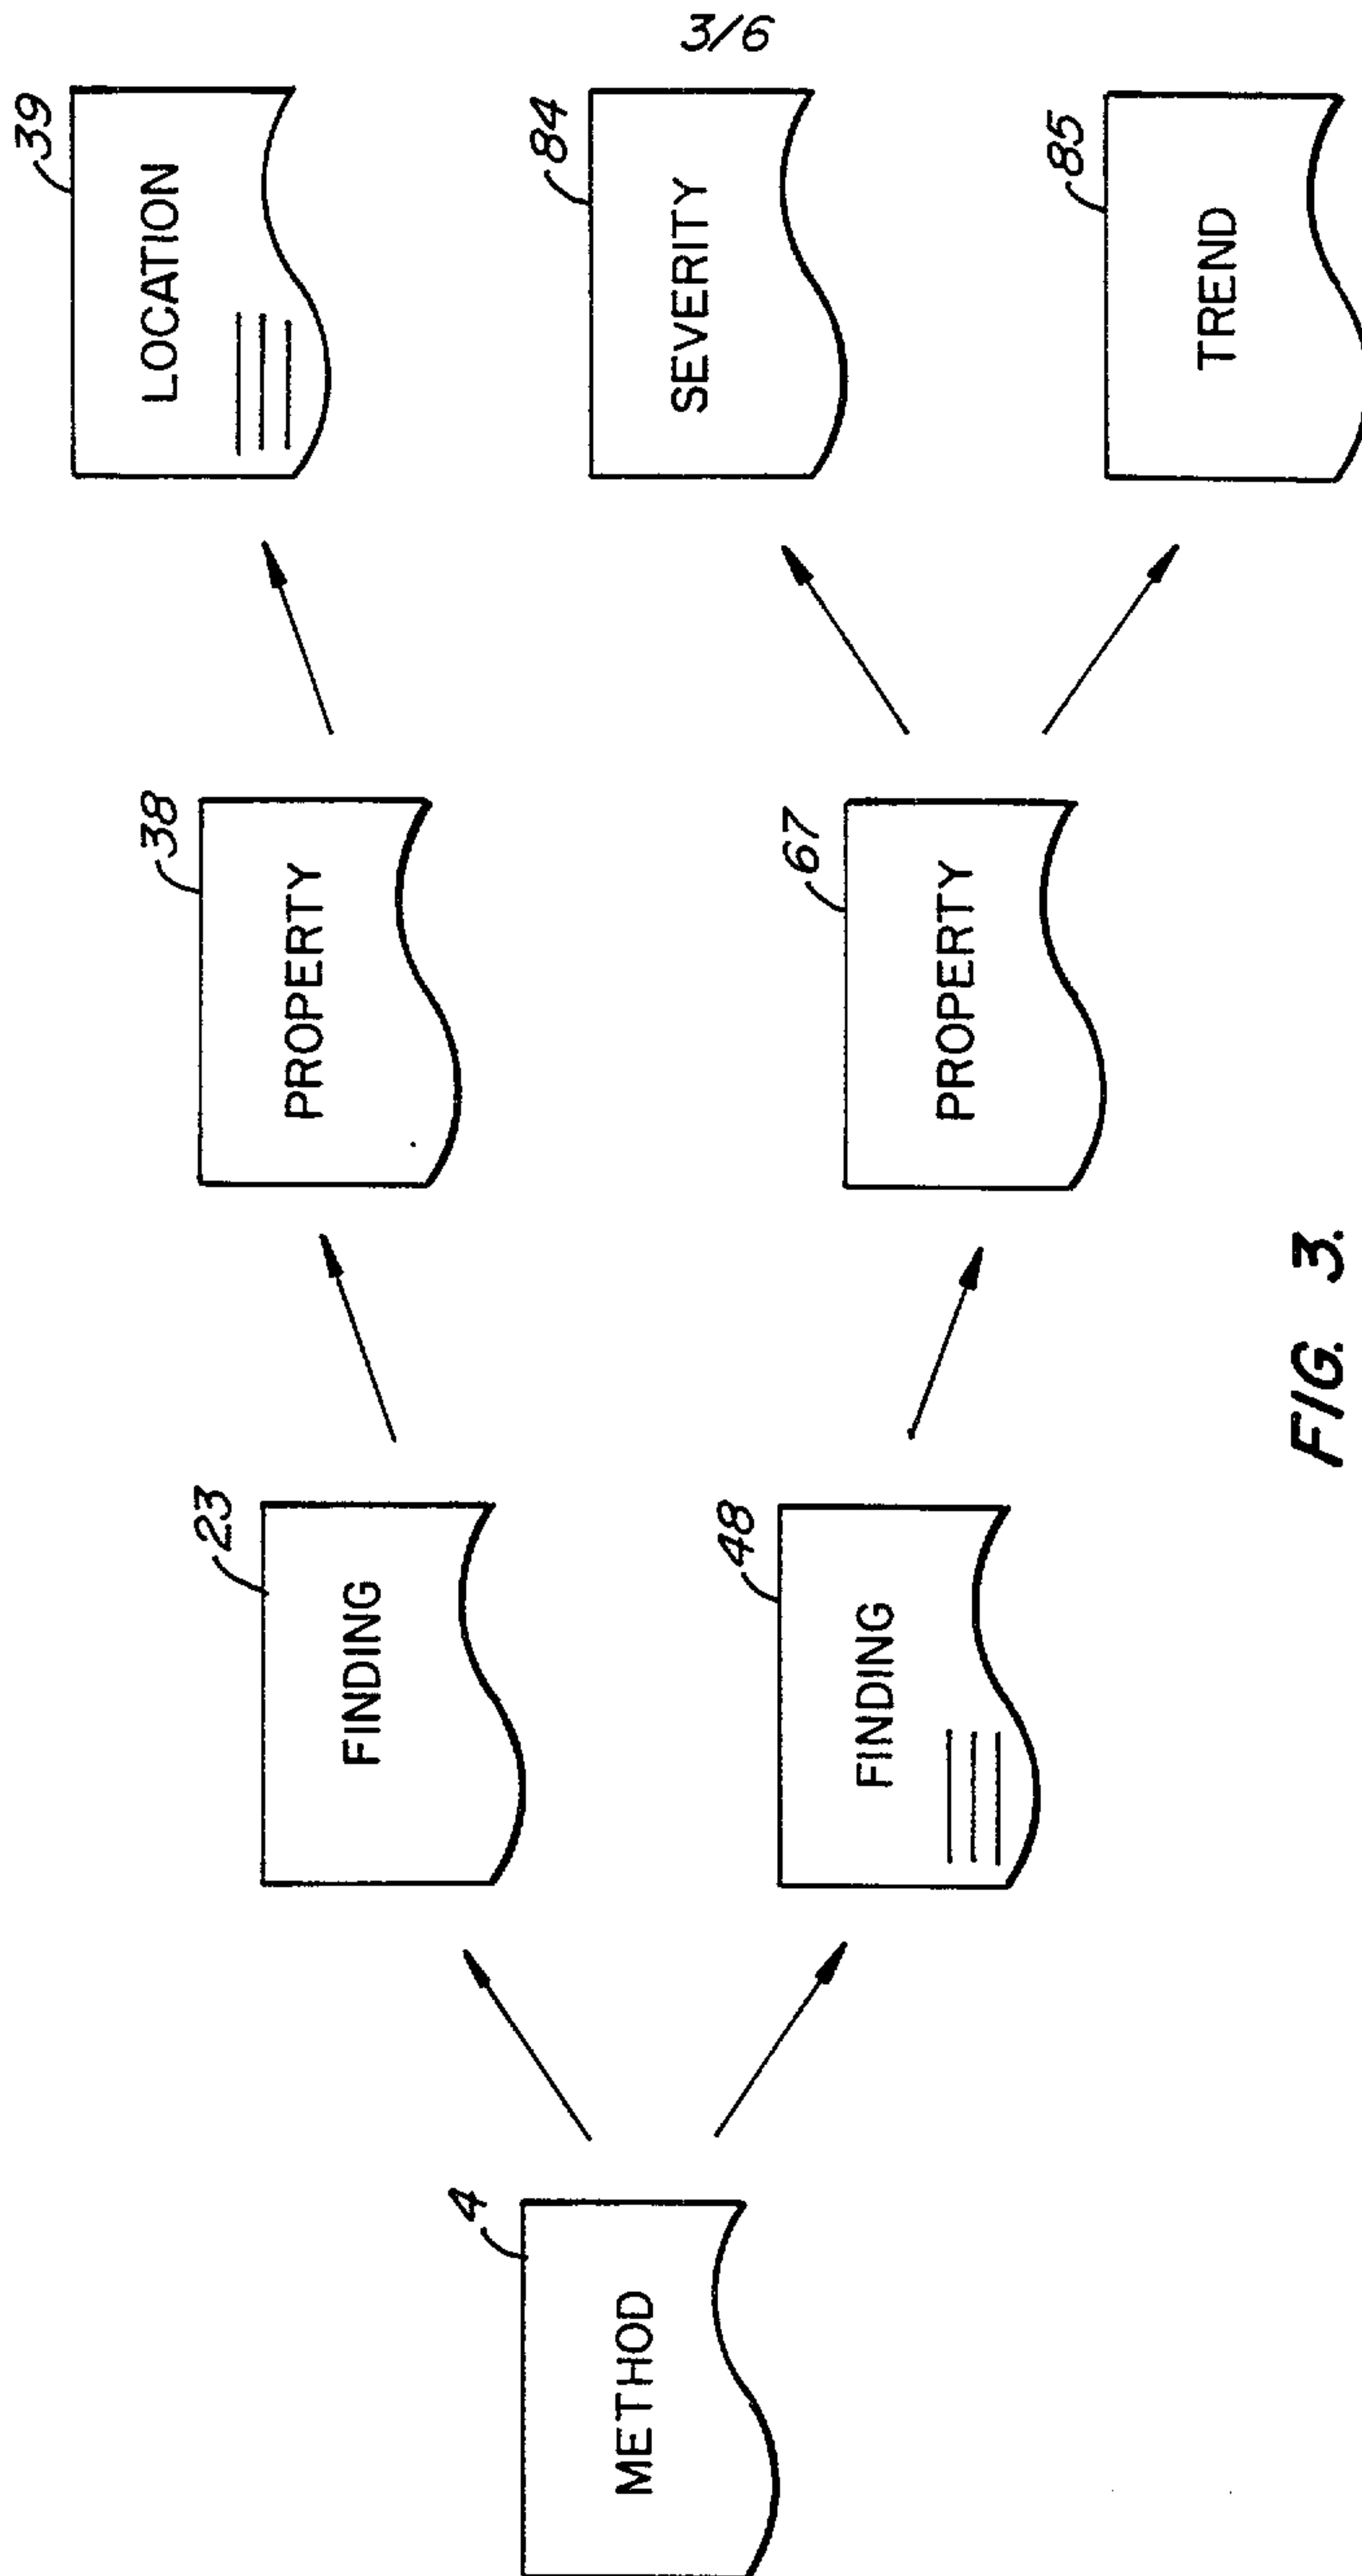


FIG. 3.

4/6

METHOD	FINDING	PROPERTY	LOCATION	Abdomen
Palpation	Tenderness	Location	Abdomen	Lwr. lt. quad

PALPATION - TENDER IN LOWER RIGHT ABDOMEN.

INSPECTION - REDNESS MILD AND IS DECREASING

FIG. 4.

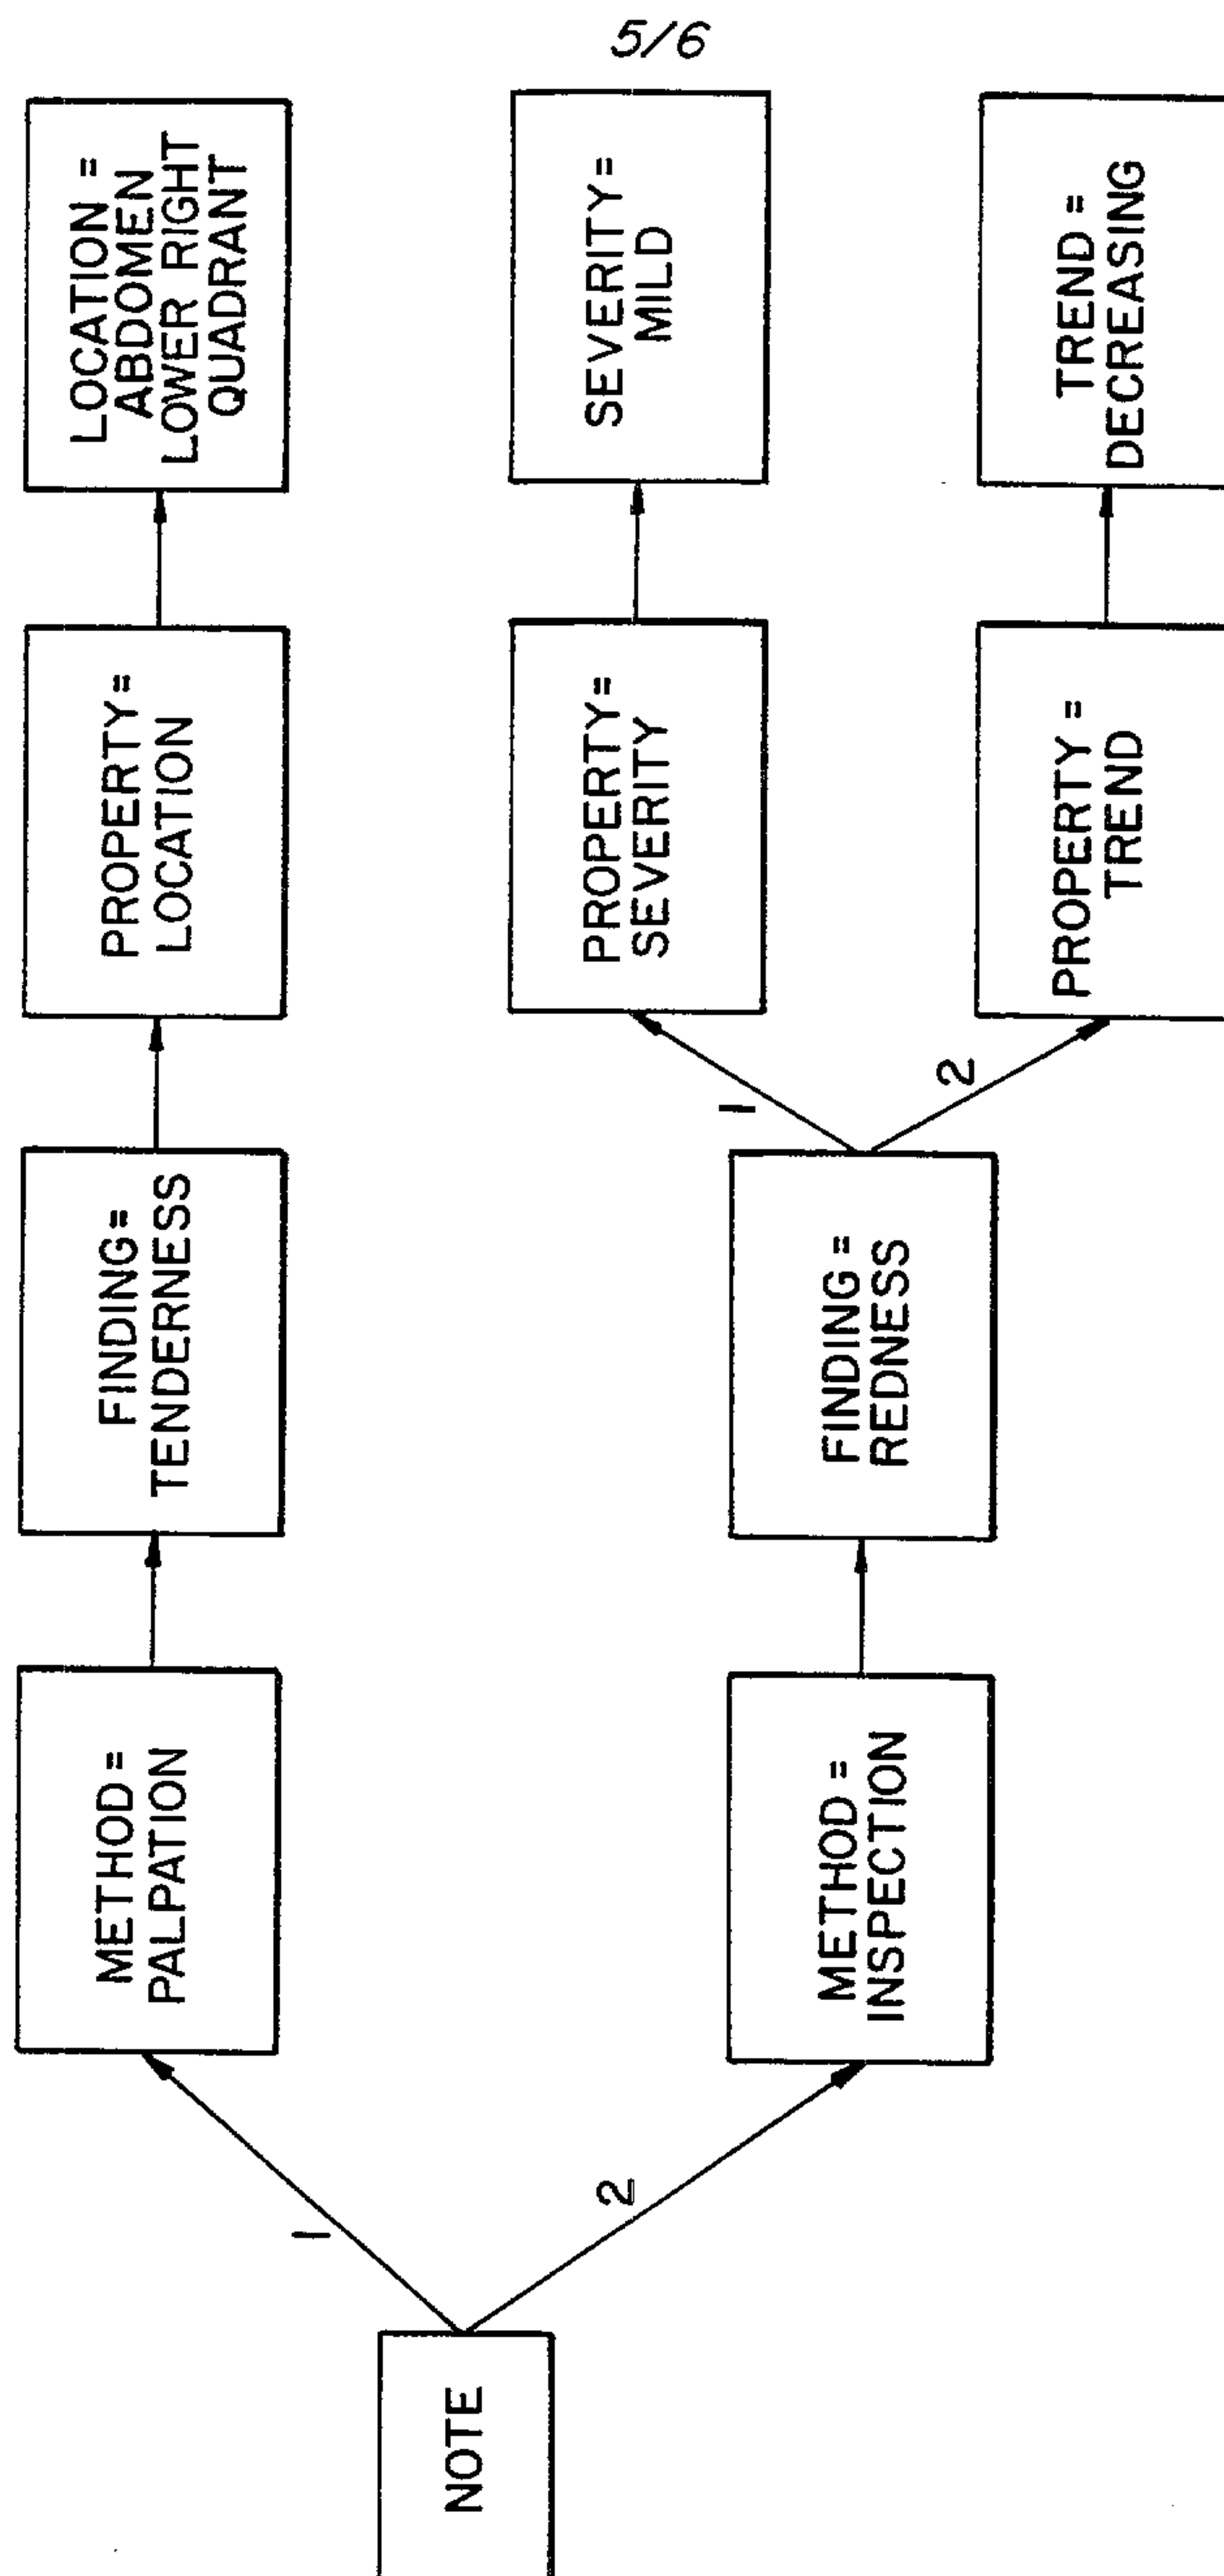


FIG. 5.

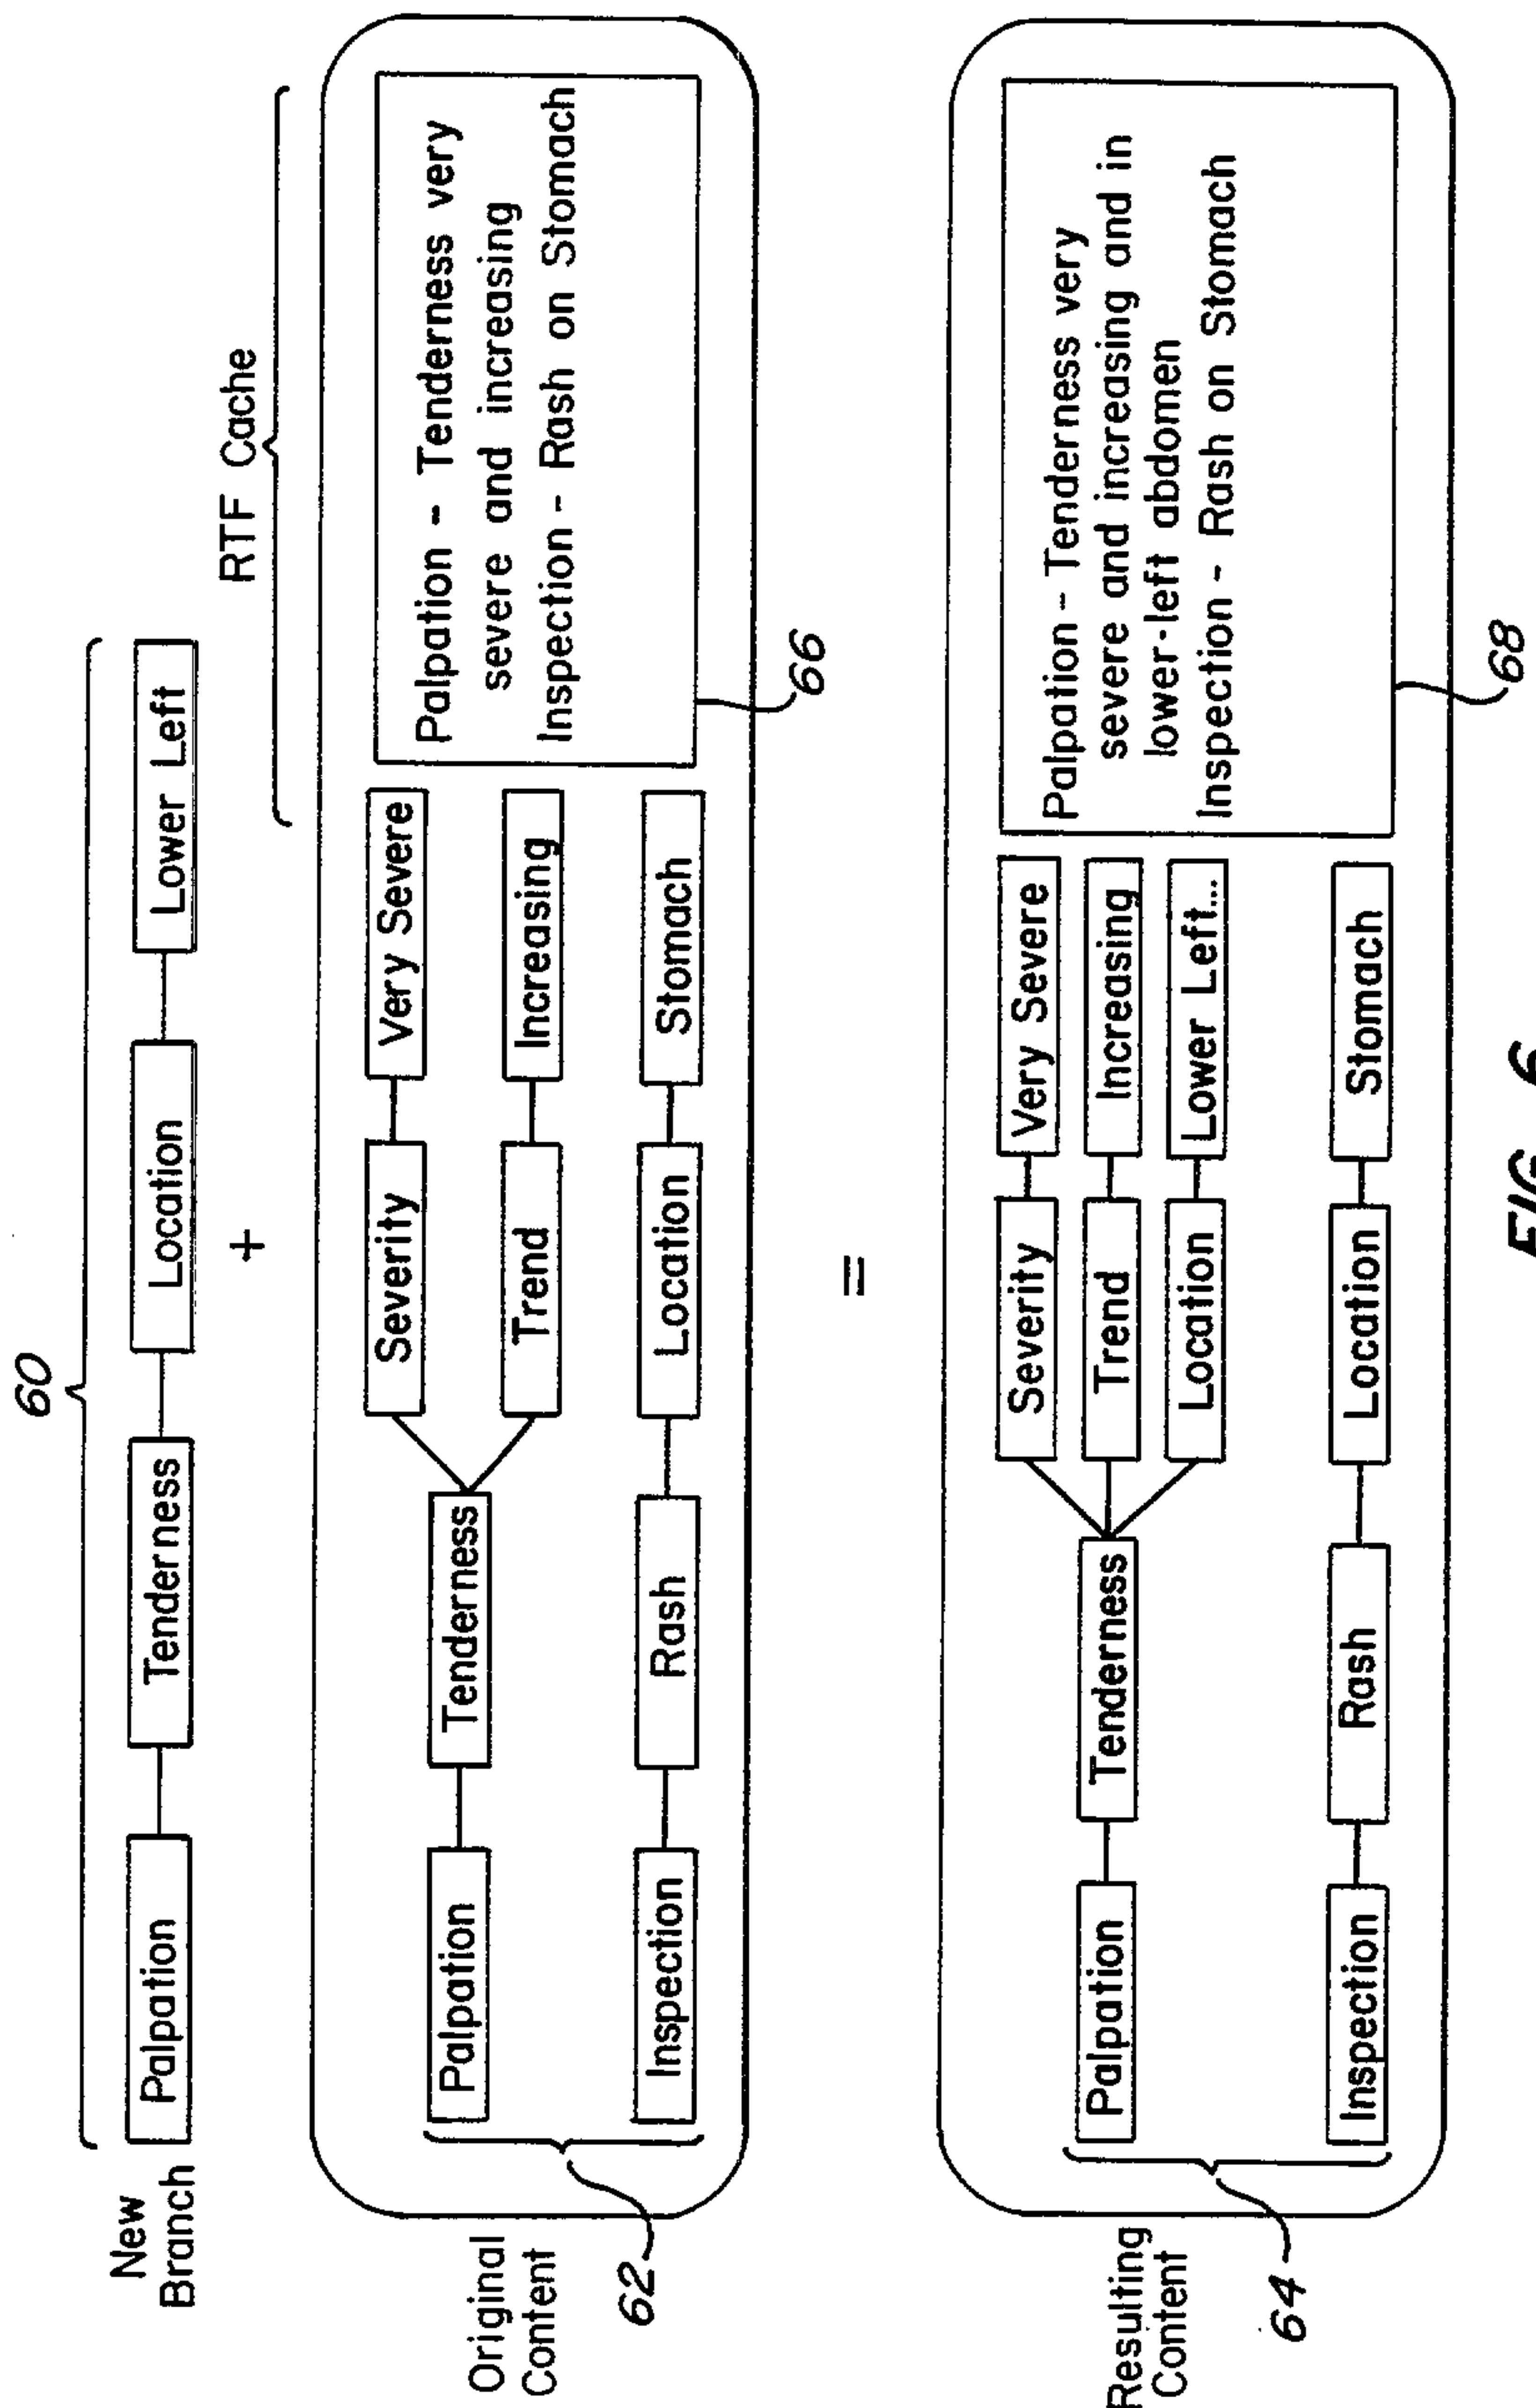


FIG. 6.

METHOD	FINDING	PROPERTY	LOCATION	Abdomen
Palpation	Tenderness	Location	Abdomen	Lwr. lt. quad

PALPATION - TENDER IN LOWER RIGHT ABDOMEN.

INSPECTION - REDNESS MILD AND IS DECREASING