



- (51) **International Patent Classification:**
G06F 3/0482 (2013.01) *G06K 9/62* (2006.01)
- (21) **International Application Number:**
PCT/US2015/013068
- (22) **International Filing Date:**
27 January 2015 (27.01.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/933,763 30 January 2014 (30.01.2014) US
- (71) **Applicant (for US only):** **FUTUREWEI TECHNOLOGIES, INC.** [US/US]; 5340 Legacy Drive, Suite 175, Plano, TX 75024 (US).
- (71) **Applicant (for all designated States except US):** **HUAWEI TECHNOLOGIES CO., LTD.** [CN/CN]; Huawei Administration Building, Bantian Longgang, Shenzhen, Guangdong, 518129 (CN).
- (72) **Inventors:** **PENG, Kuan-Chuan**; 201 Maple Ave. Apt. G9D, Ithaca, NY 14850 (US). **YU, Hong, Heather**; 4 Le Parc Dr., Princeton Jct, NJ 08550 (US). **ZHANG, Dongqing**; 5603 Ravens Crest Dr., Plainsboro, NJ 08536 (US). **CHEN, Tsuhan**; 20 Reach Run, Ithaca, NY 14850 (US).
- (74) **Agent:** **LYFORD, Nicholas**; Murabito, Hao & Barnes, LLP, 2 N. Market St., 3rd Floor, San Jose, CA 95113 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report (Art. 21(3))

(54) **Title:** EMOTION MODIFICATION FOR IMAGE AND VIDEO CONTENT

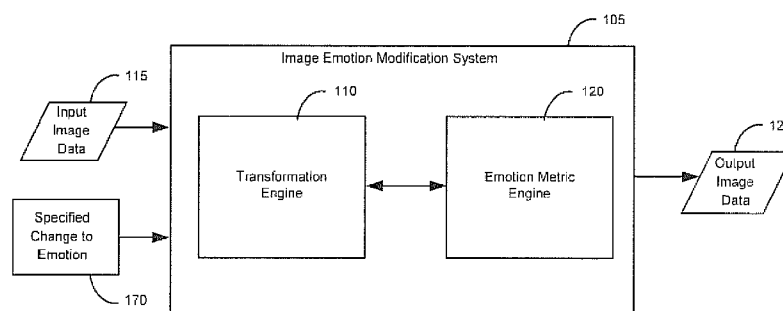


Figure 1

(57) **Abstract:** Apparatus and method for modification of emotion conveyed by an image. In one aspect, a metric corresponding to the emotion conveyed by an image is generated, and a command for modifying the emotion of the image causes the emotion conveyed by the image to be changed according to the specified change to emotion. The command to modify the image emotion can be made via an emotion keyword, and can include an indicated magnitude of emotion change. Emotion conveyed by an image can be specified via an emotion vector, where elements of the vector correspond with emotions arranged along orthogonal dimensions in an emotion space. In one aspect, an emotion predictor is trained to predict the emotion conveyed by an image via determining characteristic values for a set of image feature categories, based on a set of images associated with emotion keywords of the emotion space.

EMOTION MODIFICATION FOR IMAGE AND VIDEO CONTENT

CROSS-REFERENCE TO RELATED APPLICATIONS:

[0001] This application claims priority from U.S. Provisional Patent Application Ser. No. 61/933,763, filed Jan. 30, 2014, entitled "Method and Apparatus for Image and Video Content Classification via Emotion Experiential Analysis," the entire content of which is incorporated herein by reference.

FIELD OF THE INVENTION:

[0002] Embodiments of the present disclosure generally relate to image classification in computer vision. More specifically, embodiments of the present disclosure relate to modeling emotion content in an image, and enabling organization and searching of visual data with emotion primitives.

BACKGROUND:

[0003] In general, an image evokes emotion in a viewer differently, based not only on the content of the image but also upon the individual experiences of the viewer. For example, an image of a certain kind of food, like a hamburger, may elate some fast food lovers, while others may be irritated due to health reasons.

[0004] In computer vision, efforts are being made toward categorizing images via abstract concepts like affective image classification and aesthetic quality estimation. A variety of image sources, for example Internet images and abstract paintings and artistic pictures, are studied in recent literature regarding affective image classification in computer vision. Several efforts are directed toward affective image classification on both realistic and artistic images. These efforts typically describe the emotion elicited by a particular image using hard labels, that is, a fixed label describing the emotion content of the image.

[0005] Conventional approaches treat different emotion categories independently in a 1-vs-all setting of multi-class classification. This is despite the inconsistency of this approach with the notion that some emotion categories are closely related. For example, joy and sadness have strong negative correlation. Many emotion-related image categorization schemes use image

databases, such as emodb (M. Solli and R. Lenz, "Emotion related structures in large image databases," in International Conference on Image and Video Retrieval. ACM, 2010, pp. 398–405.), GAPED (E. S. Dan-Glauser and K. R. Scherer, "The geneva affective picture database (GAPED): a new 730-picture database focusing on valence and normative significance.," Behavior Research Methods, vol. 43, no. 2, pp. 468–477, 2011.), and IAPS (P. J. Lang, M. M. Bradley, and B. N. Cuthbert, "International affective picture system (IAPS): affective ratings of pictures and instruction manual. technical report a-8.," 2008.), that suffer from several drawbacks. Firstly, these image databases assign hard labels to images, ignoring the fact that there is not necessarily consensus amongst viewers of an image in terms of emotion experienced. Further, even with a similar kind of emotion experienced, conventional databases do not capture the notion that the degree of emotion may vary (for example, joy vs. ecstasy). Secondly, the emotion categories of these databases are chosen in an ad-hoc way without solid foundation of psychological theories. Thirdly, the number of images in each emotion category is not equal in these databases, resulting in an unbalanced database that may cause bias in image categorization results.

SUMMARY:

[0006] Recognizing that an image in general evokes people's emotions differently, embodiments according to the present disclosure describe the emotion associated with an image using soft labels (e.g., real numbers) rather than hard labels. Emotions are mapped in a dimensional model in emotion space, the emotions arranged in opposing pairs along orthogonal axes, the emotions based on psychological studies.

[0007] According to aspects of the present disclosure, an apparatus and method are provided for modification of emotion conveyed by an image. In one aspect, a metric corresponding to the emotion conveyed by an image is generated, and a command for modifying the emotion of the image causes the emotion conveyed by the image to be changed according to the specified change to emotion. The command to modify the image emotion can be made via an emotion keyword, and can include an indicated magnitude of emotion change. Emotion conveyed by an image can be specified via an emotion vector, where elements of the vector correspond with emotions arranged along orthogonal dimensions in an emotion space. In one aspect, an emotion metric is trained to predict the emotion conveyed by an image via determining characteristic values for a set of image feature categories, based on a set of images associated with emotion keywords of the emotion space.

[0008] According to an aspect of the present disclosure, a method of modifying an image to change an emotion conveyed by the image includes accessing an image stored in a memory, and generating a metric corresponding to emotions conveyed by the image, where the emotions arranged along a plurality of emotion dimensions. The method includes receiving a command to modify the image according to a specified change to a particular emotion, and transforming the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion. The method includes displaying a transformed image with the change in the particular emotion.

[0009] In an embodiment of the method the metric includes values corresponding to magnitudes of the emotions conveyed. According to a further embodiment the specified change to the particular emotion includes a magnitude of change. According to a further embodiment the metric is arranged in a vector including elements corresponding to the plurality of emotion dimensions. In an embodiment the plurality of emotion dimensions include orthogonal axes, and pairs of negatively correlated emotions are arranged on opposing ends of the orthogonal axes. According to a further embodiment the pairs of negatively correlated emotions include joy and sadness; fear and non-fear; and, disgust and non-disgust. According to a further embodiment the specified change to the particular emotion includes a keyword associated with the pairs of negatively correlated emotions. In an embodiment of the method the predefined image features include edge features, texture, color, saliency, and shape, and modifying the image includes modifying according to one of color histogram specification and edge-histogram specification.

[0010] According to another aspect of the present disclosure, an apparatus includes a display, a memory configured to store instructions, and a processor communicatively coupled with the display and the memory and configured to execute the instructions. The instructions cause the processor to access an image stored in the memory and to generate a metric corresponding to emotions conveyed by the image, the emotions arranged along a plurality of emotion dimensions. The instructions cause the processor to receive a command to modify the image according to a specified change to a particular emotion. The instructions cause the processor to transform the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion, and the instructions cause the processor to display a transformed image with the change in the particular emotion.

[0011] In an embodiment of the apparatus the metric includes values corresponding to magnitudes of the emotions conveyed. According to a further embodiment the specified change to the particular emotion includes a magnitude of change. According to a further embodiment the metric is arranged in a vector including elements corresponding to the plurality of emotion dimensions. In an embodiment the plurality of emotion dimensions include orthogonal axes, and pairs of negatively correlated emotions are arranged on opposing ends of the orthogonal axes. According to a further embodiment the pairs of negatively correlated emotions include joy and sadness; fear and non-fear; and, disgust and non-disgust. According to a further embodiment the specified change to the particular emotion includes a keyword associated with the pairs of negatively correlated emotions. In an embodiment of the apparatus the predefined image features include edge features, texture, color, saliency, and shape, and modifying the image includes modifying according to one of color histogram specification and edge-histogram specification.

[0012] According to another aspect of the present disclosure, a non-transitory computer readable medium contains programmed instructions, which, when executed by a processor in an image processing system, cause the processor to perform operations. The operations include accessing an image stored in a memory, and generating a metric corresponding to emotions conveyed by the image, where the emotions arranged along a plurality of emotion dimensions. The operations include receiving a command to modify the image according to a specified change to a particular emotion, and transforming the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion. The operations include displaying a transformed image with the change in the particular emotion.

[0013] In an embodiment of the non-transitory computer readable medium containing programmed instructions, the metric includes values corresponding to magnitudes of the emotions conveyed. In an embodiment of the non-transitory computer readable medium containing programmed instructions, the predefined image features include edge features, texture, color, saliency, and shape, and modifying the image includes modifying according to one of color histogram specification and edge-histogram specification. According to a further embodiment, the predefined image features are based on a sample image associated with the particular emotion.

BRIEF DESCRIPTION OF THE DRAWINGS:

[0014] The accompanying drawings, which are incorporated in and form a part of this specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention:

[0015] Figure 1 is an illustration of an image emotion modification system according to an embodiment of the present disclosure.

[0016] Figure 2 is an illustration of an exemplary emotion space, and images corresponding to emotions of the emotion space, according to embodiments of the present disclosure.

[0017] Figure 3 is a schematic diagram of components of an image emotion modification system, according to an embodiment of the disclosure.

[0018] Figure 4 is an illustration of a change in emotion conveyed by an image, to an embodiment of the disclosure.

[0019] Figure 5 is a flowchart depicting a method of changing an emotion conveyed by an image, according to an embodiment of the disclosure.

DETAILED DESCRIPTION:

[0020] In contrast to conventional efforts regarding affective image classification in computer vision, which treat emotion categories independently and predict emotion via hard labels, ignoring the correlation between emotion categories, embodiments of the present disclosure use a dimensional emotion space to model the correlation between certain emotion categories. A system and method of changing image emotion is disclosed, including an emotion predictor for predicting the emotion conveyed by an image. The emotion conveyed by an image can be changed by, for example, color histogram specification, guided by the image features of a sample image taken from a set of sample images having labeled emotion content.

[0021] Reference will now be made in detail to several embodiments. While the subject matter will be described in conjunction with the alternative embodiments, it will be understood that they are not intended to limit the claimed subject matter to these embodiments. On the contrary, the claimed

subject matter is intended to cover alternative, modifications, and equivalents, which may be included within the spirit and scope of the claimed subject matter as defined by the appended claims.

[0022] Furthermore, in the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the claimed subject matter. However, it will be recognized by one skilled in the art that embodiments may be practiced without these specific details or with equivalents thereof. In other instances, well-known methods, procedures, components, and circuits have not been described in detail as not to unnecessarily obscure aspects and features of the subject matter.

[0023] Some portions of the detailed description are presented in terms of procedures, steps, logic blocks, processing, and other symbolic representations of operations on data bits that can be performed on computer memory. These descriptions and representations are the means used by those skilled in the data processing arts to most effectively convey the substance of their work to others skilled in the art. A procedure, computer-executed step, logic block, process, etc., is here, and generally, conceived to be a self-consistent sequence of steps or instructions leading to a desired result. The steps are those requiring physical manipulations of physical quantities. Usually, though not necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated in a computer system. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers, or the like.

[0024] It should be borne in mind, however, that all of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities. Unless specifically stated otherwise as apparent from the following discussions, it is appreciated that throughout, discussions utilizing terms such as “accessing,” “writing,” “including,” “storing,” “transmitting,” “traversing,” “associating,” “identifying” or the like, refer to the action and processes of a computer system, or similar electronic computing device, that manipulates and transforms data represented as physical (electronic) quantities within the computer system's registers and memories into other data similarly represented as physical quantities within the computer system memories or registers or other such information storage, transmission or display devices.

[0025] A system according to the present disclosure enables modification of the emotion conveyed by an image, via specification of an emotion keyword and a magnitude of change. As a non-limiting example, the keyword can be “joy,” with a magnitude of change corresponding to a relative change from the initial emotion conveyed (e.g., 0.1 corresponding to 10% more joy than that present in the initial image). The system transforms the input image to a sample output image that is more correlated with the emotion indicated by user input (e.g., the output image contains more “joy” conveyed following the transformation).

[0026] Referring now to Figure 1, an image emotion modification system 105 includes a transformation engine 110 and an emotion metric engine 120. The image emotion modification system 105 is configured to receive an input image 115, and a specified change to emotion 170. The emotion modification is to the emotion conveyed by the input image 115, for example, a modification to the amount of the emotion “fear” that the input image 115 evokes in a viewer. The image emotion modification system 105 uses the transformation engine 110 and emotion metric engine 120 in order to transform the input image 115 according to the specified change to emotion 170, and outputs an image according to a specified change to emotion as output image 125. Image emotion modification system 105 will be better understood according to the description below.

EMOTION CATEGORY

[0027] Referring now to Figure 2, a dimensional emotion model consistent with soft labeling is depicted according to embodiments of the present disclosure. Three dimensions d_i ($i \in \{1, 2, 3\}$) are defined in an emotion space 200, where each dimension represents some basic emotion, for example, a basic emotion in Plutchik’s wheel (R. Plutchik, “A general psychoevolutionary theory of emotion,” *Emotion: Theory, Research, and Experience*, vol. 1, pp. 3–31, 1980.). In the emotion model according to the present disclosure, three emotion dimensions describing opposing emotions are arranged in emotion pairs, the emotion dimensions in one embodiment being joy–sadness (d_1), non-fear – fear (d_2), and non-disgust – disgust (d_3). A larger or smaller number of emotion dimensions are possible, as are other emotions.

[0028] These emotions form three dimensions and correspond with the emotion categories of the soft-label emotion metric database, described further below. Figure 2 depicts exemplary images

210 representative of the emotions in emotion space 200, one image each for emotions joy, sadness, non-fear, fear, non-disgust, and disgust.

EMOTION METRIC VECTOR

[0029] According to embodiments of the present disclosure, the emotions in the dimensions of emotion space 200 can be arranged in a vector, and normalized. For a three-dimension emotion space 200 depicted in Figure 2, the emotion vector can have elements s_1 , s_2 , and s_3 corresponding to the d_1 , d_2 and d_3 dimensions, respectively. For example, the joy-sadness dimension can correspond to dimension s_1 , where an s_1 value of 1 corresponds to maximum joy, and an s_1 value of 0 corresponds to maximum sadness. In a similar manner, the non-fear – fear dimension can correspond to dimension s_2 , where an s_2 value of 1 corresponds to maximum non-fear, and an s_2 value of 0 corresponds to maximum fear. In a similar manner, the non-disgust – disgust dimension can correspond to dimension s_3 , where an s_3 value of 1 corresponds to maximum non-disgust, and an s_3 value of 0 corresponds to maximum disgust.

SOFT-LABEL EMOTION METRIC DATABASE

[0030] In an embodiment, the soft-label emotion metric database (e.g., database including sample images 330 of Figure 3) contains feature categories correlated to the emotions forming three dimensions in emotion space. Table 1 includes exemplary feature categories, along with respective dimensions and a description thereof. The feature categories can be, for example “edge” with a dimension 512, “texture” with dimension of 27, “color” with a dimension of 80, “saliency” with a dimension of 4, “composition” with a dimension of 8, and “shape” with a dimension of 128.

Category	Dimension	Description
Edge	512	cascaded edge histograms in the most / least salient regions
Texture	27	features from gray-level co-occurrence matrix and Tamura features
Color	80	cascaded CIECAM02 color histograms in the most / least salient regions
Saliency	4	the differences of areas / color / edge features in the most / least salient regions
Composition	8	rule of third, diagonal dominance, symmetry, and visual balance

Shape	128	features of the fit ellipses of the segments from color segmentation
-------	-----	--

Table 1: Feature set for training emotion conveyed metric.

[0031] According to embodiments of the present disclosure, the soft-label emotion metric database includes images for each emotion category. For example, the soft-label emotion metric database includes 500 images for each emotion category, totaling 3000 images for a six-category database. The database images can be resized to approximately a same resolution, for example VGA resolution, while maintaining the original aspect ratio of the image. According to an embodiment, the database images can be acquired by entering the six category keywords as searching keywords into image databases available on the Internet, for example Flickr. Other web services may be used, and other sources of images are also consistent with the present disclosure. In a non-limiting example, synonyms and antonyms of joy, fear, and disgust are used as searching keywords. Preferably, each image downloaded to the soft-label emotion metric database is verified to correspond with the expected emotion. That is, an image downloaded using a “fear” keyword is verified to correspond to a “fear” emotion content, for example, by manual inspection. The verification is made in order to prevent erroneous image classifications.

[0032] The soft-label emotion metric database provides a correlation between the values of image features from the feature categories with emotions in the dimensional emotion model, to provide a measure of the emotion conveyed by the image (e.g., for emotion prediction). Each image in the database is assigned a binary label corresponding to one of the three dimensions. That is, each image is associated with one emotion, for example “joy,” and is not associated with any other emotion. In an embodiment, the image association is determined by a binary value, where a “1” corresponds to a positive emotion and where a “0” corresponds to a negative. Therefore, for an image associated with “joy,” an emotion value for the image includes a “1” in the joy-sadness dimension. Conversely, an image associated with “sadness” includes a “0” in the joy-sadness dimension. Similar values are associated with images corresponding to the non-disgust – disgust emotion pair, and the non-fear – fear pair, where a “1” indicates non-disgust and non-fear, and where a “0” indicates “disgust” and “fear.”

[0033] The details about the selection of emotion categories, image collection, and labeling procedure are described below.

EMOTION MODIFICATION

[0034] Referring now to Figure 3, a transformation engine and emotion metric engine (e.g., of Figure 1) are described in greater detail. Transformation engine 310 includes a database of sample images 330, from which a number N of sample images 335 are sampled. According to some embodiments of the present disclosure, the sampling is performed in a random manner. Other sampling methods known to those of skill in the art are also consistent with the spirit and scope of the present disclosure. The transformation engine 310 receives an input image 315 (e.g., corresponding to the input image 115), and in operation, performs feature transformation 340 on the input image 315. A respective feature transformation is made for each sample image of the N sample images 335. According to an embodiment of the present disclosure, the transformation is performed via a color histogram specification, where feature values (e.g., of the feature categories of Table 1) from the sample image are used to transform the image data of the input image, and thereby the emotion content. Alternatively, the transformation is performed via an edge-histogram specification. Other image transformation techniques are also consistent with the spirit and scope of the present disclosure.

[0035] A corresponding number N of output images 350 are generated as a result of feature transformation 340. The N sample images 335 include images from each emotion category (e.g., joy, sadness, non-fear, fear, non-disgust, and disgust), each image having respective features of feature categories from Table 1. According to an embodiment of the present disclosure, output images 350 are generated via feature transformation with a plurality of sample images. That is, rather than a single sample image transformation leading to a single output image, a pipeline of several sample images are used, in combination, to transform the input image 315 and generate an output image 350.

[0036] The output images 350 are provided to an emotion metric engine 320. The emotion metric engine 320 includes an emotion metric generator 355, which in operation, measures the emotion conveyed by the output images 350 and generates a corresponding number of emotion vectors 360, where one emotion vector is generated for each of the output images 350. The emotion metric engine 320 receives a specified emotion change 370 (for example, specified emotion change 170) corresponding to a command to modify the emotion conveyed by the input image 315, and performs emotion matching 375 between the specified emotion change 370 and the emotion

vectors 360. According to embodiments of the present disclosure, the specified emotion change 370 is in the form of a vector, with magnitudes of the elements of the vector corresponding to the magnitude of change for the corresponding emotion in the emotion space (e.g., emotion space 200). The specified change to emotion can be regarding a single emotion dimension (e.g., 20% more joy), or regarding multiple emotion dimensions.

[0037] Given an input image 315 and the desired change of emotion via specified emotion change 370, the system transforms features of the input image 315 with the guidance of a sample image taken from the predefined sample image database 330. The sample image database 330 stores example images corresponding to the different emotions of the emotion space 200, as described herein. In an embodiment, a total of N sample images 335 are randomly sampled from the sample image database 330 and N corresponding output images 350 are generated by the feature transformations 340. According to embodiments of the present disclosure, a value of N=20 can be used to reach a balance between output variety and computational efficiency. Other values of N are consistent with the spirit and scope of the present disclosure.

[0038] Using the emotion metric generator 355 to generate the emotion vectors 360 of the N output images 350, the system will output the transformed image 325 with the change of emotion closest to that of the specified emotion modification (e.g., specified emotion change 370). Each emotion metric generator 355 produces one emotion vector 360 that describes the corresponding output image. There are therefore N emotion vectors 360. The specified emotion change vector 370 is used by the system in comparing against the N emotion vectors 360, in order to determine the output image 350 corresponding to the specified emotion change to the input image 315. The system selects the one output image of output images 350 that corresponds to the emotion vector, of the N emotion vectors 360, that is closest to the specified emotion change of the input image 315. According to embodiments of the present disclosure, the closest emotion vector is determined by emotion vector matching 375 via “nearest neighbor” with the specified emotion change vector. Other criteria for determining emotion vector matching are consistent with the spirit and scope of the present disclosure. A transformed image output 325 is generated by selection of the output image of output images 350 that has the determined matching emotion vector. According to an embodiment, the indicated input image emotion modification 370 is a vector input by a user, with element values corresponding to a probability of emotion change for the emotion. That is, a vector having $s_1 = 0.2$, $s_2 = -0.3$, and $s_3 = .05$ corresponds to an emotion modification where the

probability of joy increases by 20%; the probability of fear increases by 30%; and the probability of non-disgust increases by 5%.

[0039] In one embodiment, the default sampling method of the sample images 330 is random sampling, and the feature transformation 340 used is a color tone adjustment by applying histogram specification to RGB channels, independently. Alternatively, the feature transformation 340 can be made via edge-histogram specification. Advantageously, due to the disparate images in the sample image set, and the sampling, a system according to the present disclosure can generate transformed output images having different color tones than the input image. Other forms of image transformation are consistent with the spirit and scope of the present disclosure. In an embodiment, a distance metric is used to compare the change of emotions in output selector, for example the distance metric may be L2-norm.

[0040] In general, each emotion metric generator 355 displayed is the same emotion metric generator, which in operation takes one image and outputs an emotion vector corresponding to the emotion conveyed by the image. Each dimension of the emotion vector describes the magnitude of the corresponding emotion triggered by the input image. In an embodiment, the input to the emotion metric generator is one image (e.g., output image 1) and the output is a 3-dimensional number having elements s_1 , s_2 , and s_3 corresponding to the 3 dimensions of the emotion space. It should be noted that “N” is a pre-defined number of pipelines specified for operation of the algorithm. A pipeline may be a single image (e.g., a single sample image from sample images 330), or several images. For each pipeline, the emotion metric generator 355 predicts all of the emotions in all of the emotion dimensions. According to embodiments of the present disclosure the number of pipelines is adjustable, where a greater number of pipelines provides greater statistical power to the emotion matching.

EMOTION METRIC GENERATION

[0041] In an embodiment of the present disclosure, features related to edge, texture, color, saliency, and shape are used to create a 759-dimensional feature set (e.g., the feature set of Table 1). For each image of a sample image database (e.g., sample image database 330), a corresponding feature vector is computed. Each dimension of the feature vector is properly normalized to the range [0, 1]. Randomly splitting each emotion category of the soft-label metric database into a training and a testing set, an emotion predictor EP_i may be trained in each

dimension d_i using the training set associated with d_i , where i is an element of $\{1, 2, 3\}$. By using standard support vector regression (SVR) with probability estimation provided by LIBSVM (C.-C. Chang and C.-J. Lin, "LIBSVM: A library for support vector machines," *ACM Transactions on Intelligent Systems and Technology*, vol. 2, pp. 27:1–27:27, 2011.), each EP_i predicts s_i , the regression value of the corresponding emotion in d_i . Specifically, s_1 , s_2 , and s_3 represent the regression values of joy, non-fear, and non-disgust, respectively. In each d_i , higher regression value represents more positive emotion. According to an embodiment of the present disclosure, the parameters of SVR are learned by performing 10-fold cross validation on the training set of the sample image database. The final real-valued emotion predictor EP is formed by cascading all EP_i 's such that EP will take an image as input, and output a vector $e = (s_1, s_2, s_3)$ specifying the emotion content in emotion space. According to embodiments of the present disclosure, the final real-valued emotion predictor EP is used to generate an emotion vector for an input image (e.g., emotion metric generator 355).

[0042] Referring now to Figure 4 an illustration 400 of a change in emotion conveyed by an image according to an embodiment of the disclosure is depicted. The left panel depicts an original input image, while the right panel depicts the image after undergoing an emotion modification according to a method of the present disclosure. As depicted in Figure 4, the image emotion modification is increased joy. The modification to the original input image can be made via, for example, color histogram specification or edge histogram specification.

[0043] Figure 5 is a flowchart 500 of an example of a computer-implemented method for modifying the emotion conveyed by an image, in embodiments according to the present disclosure. The flowchart 500 can be implemented as computer-executable instructions residing on some form of non-transitory computer-readable storage medium. The operations of the flowchart 500 can be implemented. Although described using a single input image as an example, the operations can be readily extended to multiple input images.

[0044] In block 502 a metric is generated corresponding to emotions conveyed by an image. The metric measures emotion conveyed by the image, based on the image data (for example, image data 115 received by image modification system 105). The emotion conveyed can be determined by emotion metric engine 120, and can include characterization of the emotion conveyed via a

vector, where elements of the vector indicate magnitudes of emotions in an emotion space (e.g., emotion space 200).

[0045] In block 504 data a command is received to modify the image according to a specified change to a particular emotion, for example specified change to emotion 170. The specified change to emotion can be made via a keyword (e.g., more “fear”), and/or via an emotion vector specifying the magnitude of emotion change.

[0046] In block 506 the image is transformed by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion. The transformed image can be transformed via color histogram specification, or some other image transformation means. The image transformation includes transformation of features of the input image using features of a sample image. The sample image is selected from a sample image database, where the sample image database includes a set of images corresponding to each emotion of an emotion space (e.g., of emotion space 200). The sample image selection for transforming the input image is made based on matching a predicted emotion conveyed by the sample image with the emotion conveyed by the modified input image, that is, the emotion conveyed by the input image following the specified change to emotion (e.g., specified change to emotion 170).

[0047] In block 508 a transformed image is displayed, the transformed image modified according to the specified change to emotion (e.g., output image 125).

[0048] Aspects of the present disclosure may be embodied in a computer-readable media including program instructions to implement various operations embodied by a computer or computing device (e.g., a cellular phone, tablet device, etc.). The media may also include, alone or in combination with the program instructions, data files, data structures, and the like. The media and program instructions may be those specially designed and constructed for the purposes of the example embodiments of the present disclosure, or they may be of the kind well-known and available to those having skill in the computer software arts. Examples of computer-readable media include magnetic media such as hard disks, floppy disks, and magnetic tape, optical media, for example, CD ROM disks and DVD, magneto-optical media, for example, optical disks, and hardware devices that may be specially configured to store and perform program instructions, for example, read-only

memory (ROM), random access memory (RAM), flash memory, and the like. Aspects of the present disclosure may also be realized as a data signal embodied in a carrier wave and comprising a program readable by a computer and transmittable over the Internet. Examples of program instructions include both machine code, for example, produced by a compiler, and files containing higher level code that may be executed by the computer using an interpreter. The described hardware devices may be configured to act as one or more software modules in order to perform the operations of the above-described example embodiments of the present disclosure.

[0049] Embodiments of the present disclosure are thus described. While the present disclosure has been described in particular embodiments, it should be appreciated that the present disclosure should not be construed as limited by such embodiments, but rather construed according to the following claims.

[0050] CLAIMS

What is claimed is:

- 5 1. A method of modifying an image to change an emotion conveyed by the image, the method comprising:
 accessing an image stored in a memory;
 generating a metric corresponding to emotions conveyed by the image, the emotions arranged along a plurality of emotion dimensions;
10 receiving a command to modify the image according to a specified change to a particular emotion;
 transforming the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion;
 displaying a transformed image with the change in the particular emotion.
15 2. The method according to Claim 1, wherein the metric comprises values corresponding to magnitudes of the emotions conveyed.
3. The method according to Claim 2, wherein the specified change to the particular
20 emotion comprises a magnitude of change.
4. The method according to Claim 2, wherein the metric is arranged in a vector comprising elements corresponding to the plurality of emotion dimensions.
- 25 5. The method according to Claim 1, wherein the plurality of emotion dimensions comprises orthogonal axes, and wherein pairs of negatively correlated emotions are arranged on opposing ends of the orthogonal axes.
6. The method according to Claim 5, wherein the pairs of negatively correlated
30 emotions comprise joy and sadness; fear and non-fear; and, disgust and non-disgust.
7. The method according to Claim 5, wherein the specified change to the particular emotion comprises a keyword associated with the pairs of negatively correlated emotions.

35 8. The method according to Claim 1, wherein the predefined image features comprise edge features, texture, color, saliency, and shape, and wherein modifying the image comprises modifying according to one of color histogram specification and edge-histogram specification.

 9. An apparatus comprising:
40 a display;
 a memory configured to store instructions; and
 a processor communicatively coupled with the display and the memory and configured to execute the instructions, wherein the instructions cause the processor to access an image stored in the memory and to generate a metric corresponding to emotions conveyed by the image, the
45 emotions arranged along a plurality of emotion dimensions, wherein the instructions cause the processor to receive a command to modify the image according to a specified change to a particular emotion, wherein the instructions cause the processor to transform the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion, and wherein the instructions cause
50 the processor to display a transformed image with the change in the particular emotion.

 10. The apparatus according to Claim 9, wherein the metric comprises values corresponding to magnitudes of the emotions conveyed.

55 11. The apparatus according to Claim 10, wherein the specified change to the particular emotion comprises a magnitude of change.

 12. The apparatus according to Claim 10, wherein the metric is arranged in a vector comprising elements corresponding to the plurality of emotion dimensions.

60 13. The apparatus according to Claim 9, wherein the plurality of emotion dimensions comprises orthogonal axes, and wherein pairs of negatively correlated emotions are arranged on opposing ends of the orthogonal axes.

65 14. The apparatus according to Claim 13, wherein the pairs of negatively correlated emotions comprise joy and sadness; fear and non-fear; and, disgust and non-disgust.

15. The apparatus according to Claim 13, wherein the specified change to the particular emotion comprises a keyword associated with the pairs of negatively correlated emotions.

70

16. The apparatus according to Claim 9, wherein the predefined image features comprise edge features, texture, color, saliency, and shape, and wherein modifying the image comprises modifying according to one of color histogram specification and edge-histogram specification.

75

17. A non-transitory computer readable medium containing programmed instructions, which, when executed by a processor in an image processing system, cause the processor to perform operations comprising:

accessing an image stored in a memory of the image processing system;

80 generating a metric corresponding to emotions conveyed by the image, the emotions arranged along a plurality of emotion dimensions;

receiving a command to modify the image according to a specified change to a particular emotion;

85 transforming the image by modifying the image according to predefined image features corresponding to the emotion, in accordance with the specified change to the particular emotion; displaying a transformed image with the change in the particular emotion.

18. The non-transitory computer readable medium according to Claim 17, wherein the metric comprises values corresponding to magnitudes of the emotions conveyed.

90

19. The non-transitory computer readable medium according to Claim 17, wherein the predefined image features comprise edge features, texture, color, saliency, and shape, and wherein modifying the image comprises modifying according to one of color histogram specification and edge-histogram specification.

95

20. The non-transitory computer readable medium according to Claim 19, wherein the predefined image features are based on a sample image associated with the particular emotion.

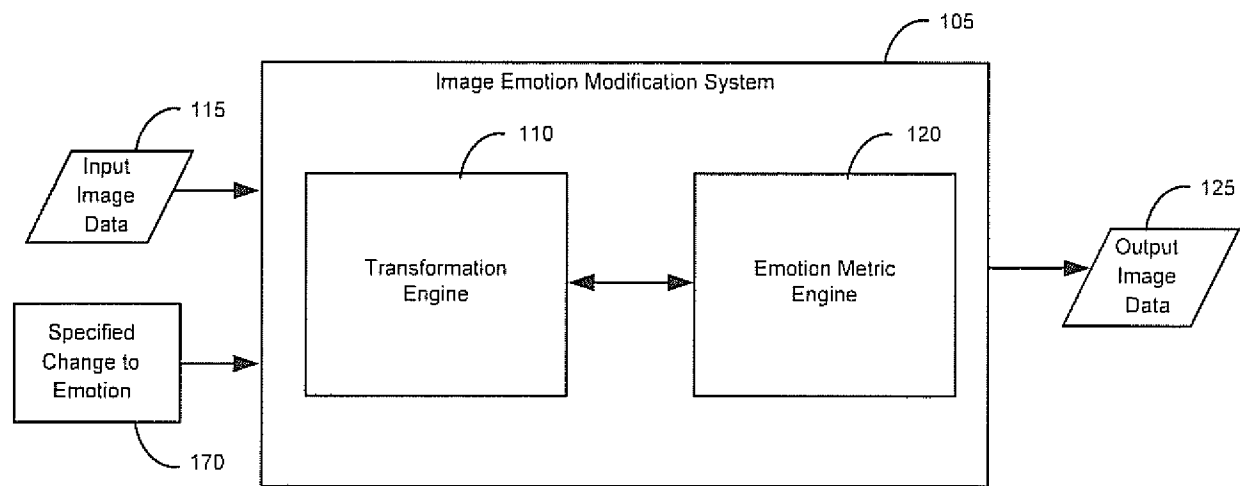


Figure 1

200

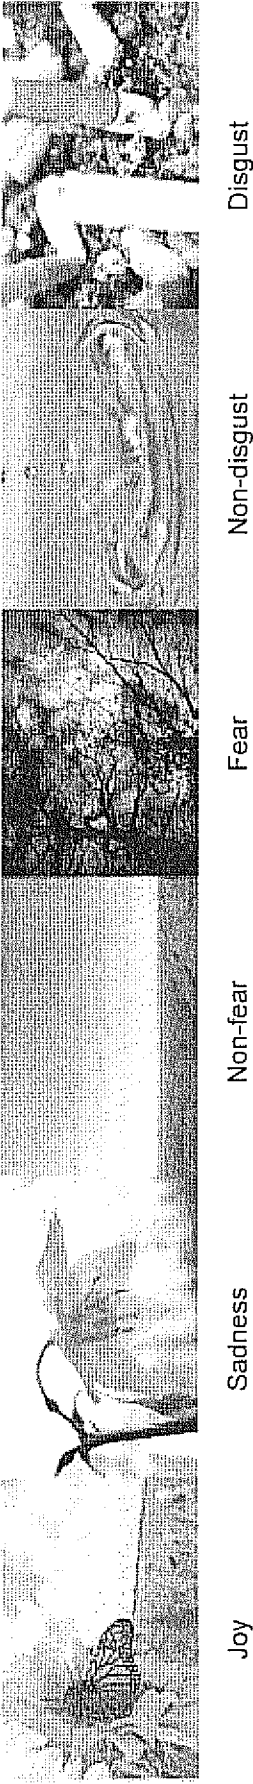
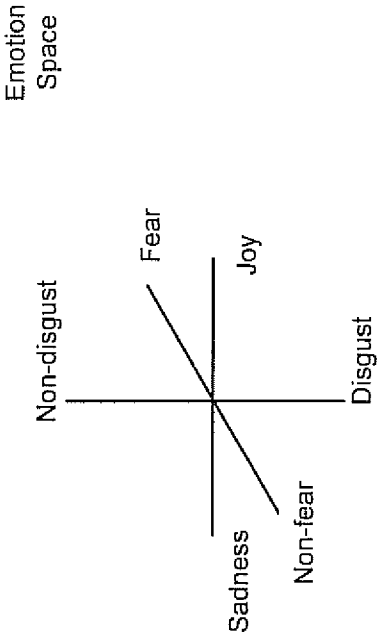


Figure 2


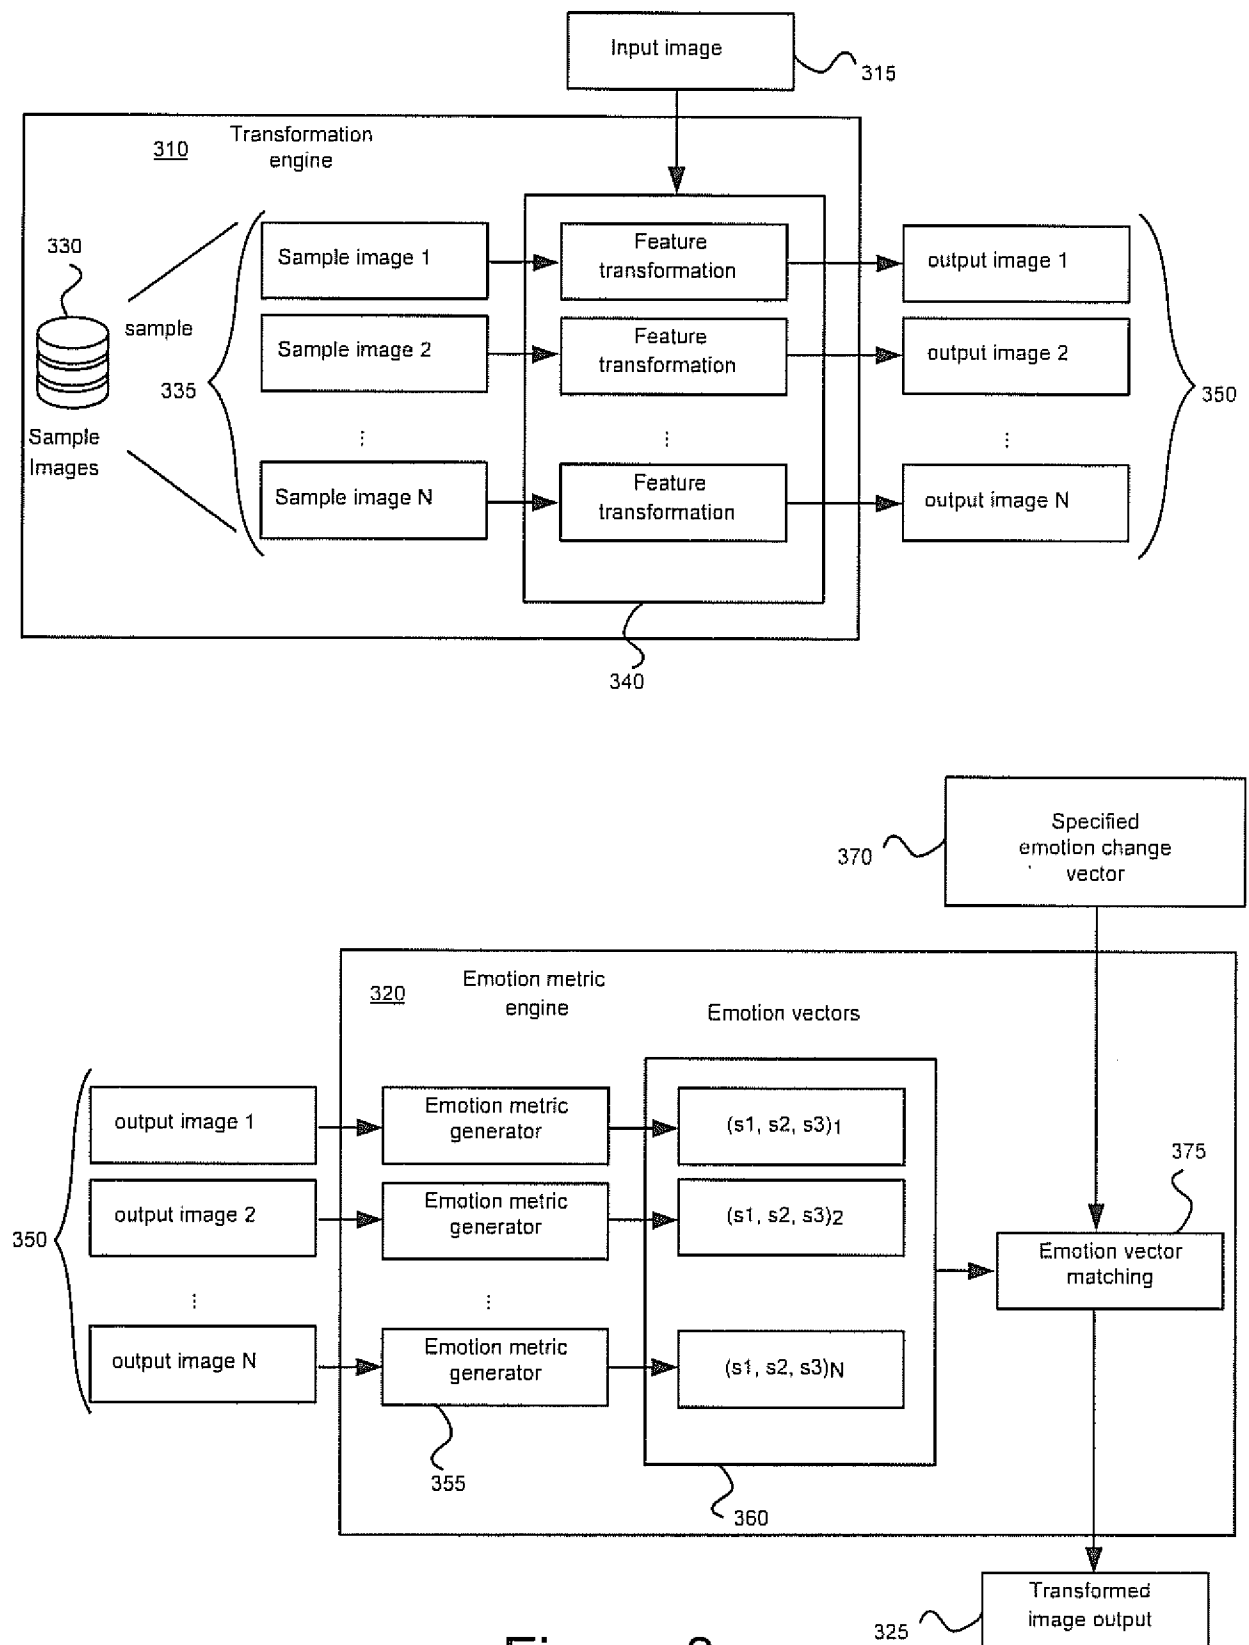


Figure 3

400

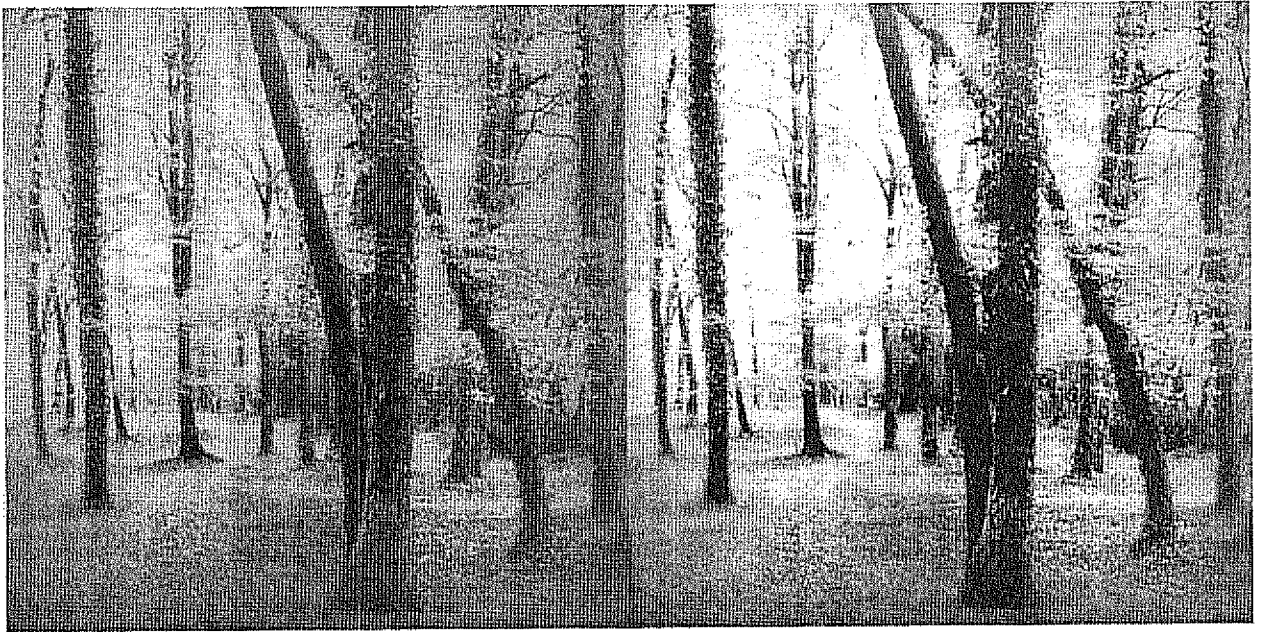

Emotion modification
for increased joy

Figure 4

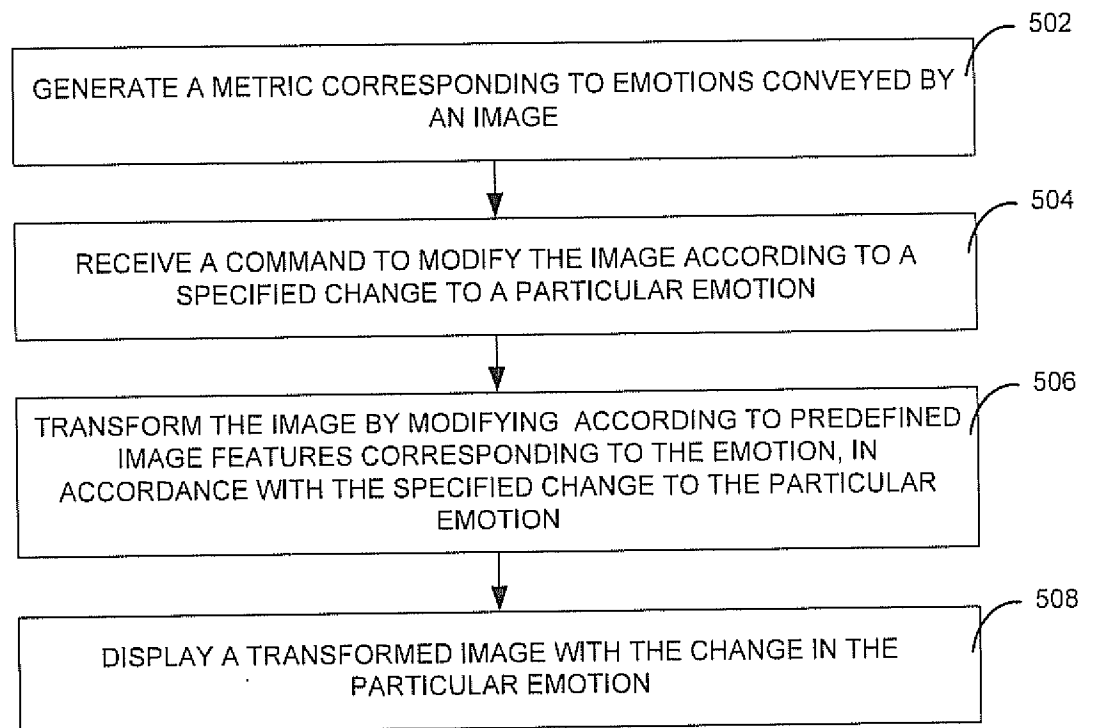
500

Figure 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US15/13068

A. CLASSIFICATION OF SUBJECT MATTER IPC(8) - G06F 3/0482; G06K 9/62 (2015.01) CPC - G06F 3/0482 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC(8): G06F 3/00, 3/0482; G06K 9/00, 9/0035, 9/62, 9/66, 9/78 (2015.01); CPC: G06F 3/00, 3/0482; G06K 9/00, 9/0035 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC); Google/Google Scholar; ProQuest; IP.com; SEARCH TERMS: image, picture, emotion, feeling, impression, mood, modify, alter, change, happy, sad, fear, joy, disgust, edge, texture, color, shape, saliency, histogram		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X ----- Y	US 2008/0068397 A1 (CAREY, J., et al.) March 20, 2008; abstract; figures 1-4; paragraphs [0015], [0023], [0025], [0027], [0030]-[0032], [0035], [0037]-[0040].	1-3, 9-11, 17, 18 ----- 4-8, 12-16, 19, 20
Y	US 2010/0211397 A1 (PARK, C., et al.) August 19, 2010; figures 3 and 6; paragraphs [0036], [0046], [0057].	4-7, 12-15
Y	US 2008/0075336 A1 (LUO, H., et al.) March 27, 2008; paragraphs [0019], [0025], [0034], [0038], [0054].	8, 16, 19, 20
A	US 2013/0346920 A1 (MORRIS, M., et al.) December 26, 2013; entire document.	1-20
☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 24 March 2015 (24.03.2015)		Date of mailing of the international search report 13 APR 2015
Name and mailing address of the ISA/ Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201		Authorized officer Shane Thomas PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774