



(22) Date de dépôt/Filing Date: 2004/08/11

(41) Mise à la disp. pub./Open to Public Insp.: 2005/02/17

(45) Date de délivrance/Issue Date: 2011/10/25

(62) Demande originale/Original Application: 2 535 093

(30) Priorité/Priority: 2003/08/12 (US60/494,606)

(51) Cl.Int./Int.Cl. *G06F 17/00* (2006.01),
G06F 17/30 (2006.01)


(72) Inventeurs/Inventors:
PARKS, MICHAEL T., US;
PETCHON, STEVEN B., US

(73) Propriétaire/Owner:
ACCENTURE GLOBAL SERVICES LIMITED, IE

(74) Agent: SMART & BIGGAR

(54) Titre : CREATION DE PRESENTATIONS UTILISATEURS FINALS A PARTIR DE DONNEES STRUCTUREES

(54) Title: GENERATING END-USER PRESENTATIONS FROM STRUCTURED DATA

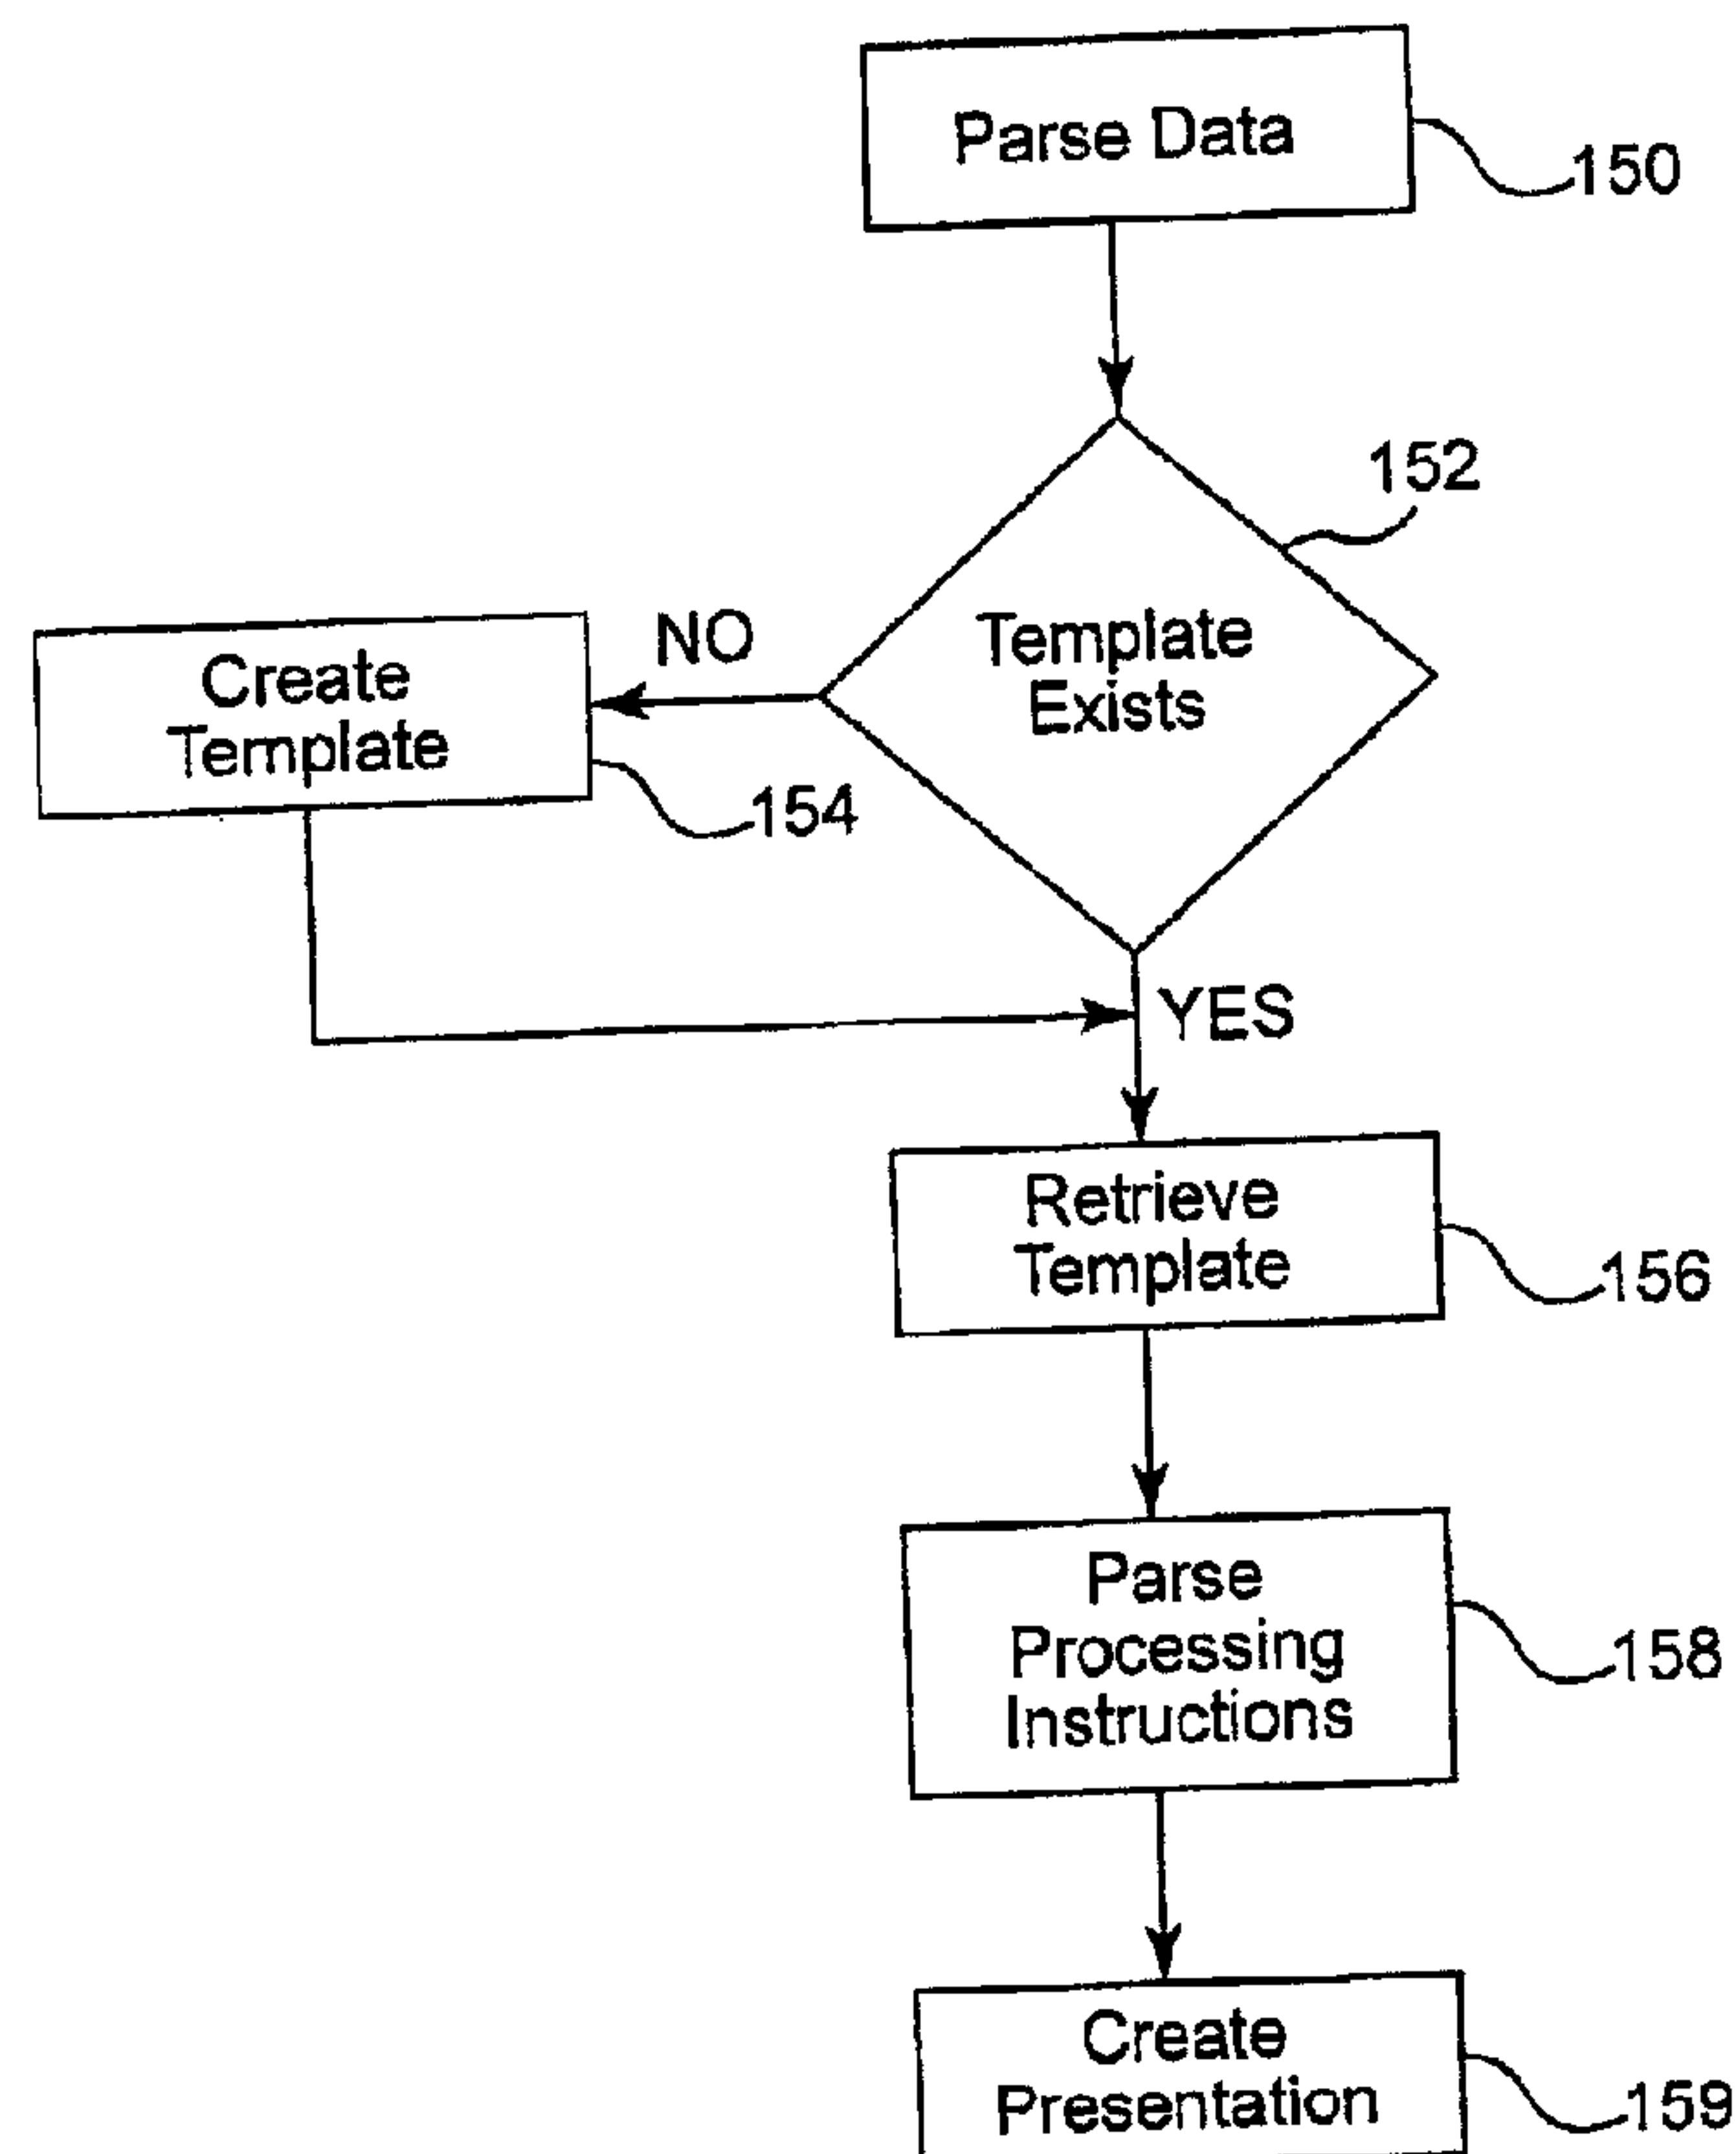

(57) Abrégé/Abstract:

In one aspect a method is provided for generating a presentation on a computing device. Tags associated with data fields may be displayed for user selection. A template file may be received comprising at least one of the tags and one or more processing instructions for indicating how data is to be processed to build a presentation file, including a query associating the data with the template file. A presentation file may be generated based on the template file, the tags and the one or more processing instructions.

ABSTRACT

In one aspect a method is provided for generating a presentation on a computing device. Tags associated with data fields may be displayed for user
5 selection. A template file may be received comprising at least one of the tags and one or more processing instructions for indicating how data is to be processed to build a presentation file, including a query associating the data with the template file. A presentation file may be generated based on the template file, the tags and the one or more processing instructions.

GENERATING END-USER PRESENTATIONS FROM STRUCTURED DATA

BACKGROUND OF THE INVENTION

5 This invention relates to a software system, specifically to a system that automatically generates a presentation, document, or other formatted product in an application format for an end user based on a template and structured data.

10 Users of computer systems desire to see and share data with familiar user-friendly computer products, such as word processors, spreadsheets, databases and presentation software. Computer systems themselves often do not have the ability to produce products in such user-friendly formats. In the few systems that allow data to be exported to such user-friendly products, users have little control in customizing the results since formatting is usually hard coded within the system. Such hard coded solutions also result in support of only a single type of data structure. Thus, when the end user wishes to see and share data in a user-friendly product based on another of the system's data files, this new use must also be hard coded.

20 What is needed is a way to allow a computer end user to generate a slide show, document, spreadsheet or other presentation using a word processor or other user-friendly product, based (in part) upon structured data from a software system. Such an innovation should allow the end user to specify the layout of the presentation as well as how to organize the data records and which data records to include.

TRADITIONAL MAIL MERGE FUNCTIONS AND THEIR LIMITATIONS

25 MICROSOFT™ WORD™ currently provides a mail merge helper feature. Variations of the mail merge feature are also available in other word processing software systems. The mail merge is designed to assist a user to create form letter documents and associated envelopes or mailing labels. As WORD's help file explains, mail merge feature guides the user through

organizing the address data, merging it into a generic document, and printing the resulting personalized documents.

To allow for a comparison between current systems and the novel features offered by the present invention, the WORD mail merge helper feature will now be discussed at length, with the example of using the feature to generate form letters to a set of customers. As one in the art is aware, MICROSOFT™ Corporation produces the ubiquitous OFFICE™ suite of software products, which includes WORD™ for word processing, POWERPOINT™ for slide shows and other presentations, and EXCEL™ for spreadsheets. While the present document specifically discusses MICROSOFT™ products, the present invention may also be compared to, and implemented in connection with other computer-based applications available to end users. For example, end users may also enjoy the present invention (in various embodiments) with WORDPERFECT's™ office suite that includes the WORDPERFECT™ word processor, QUATTRO PRO™ spreadsheet, PRESENTATIONS™ slide show creator and the PARADOX™ database product. Or end users may choose to use software from other vendors, such as CRYSTAL REPORTS™ or the STAROFFICE™ suite from SUN™ Microsystems, to name but a few. Some embodiments of the present invention may support using web portlets (i.e., modules that can be plugged into a web portal for real-time data searching capabilities), exporting to web services in XML or other format, or leveraging the ODBC protocol for access to other types of data sources.

Figure 1 shows the dialog box 10 for WORD's mail merge helper feature. The user may use the "Get Data" button 12 to associate a data file with the mail merge. Figure 2 shows the EXCEL spreadsheet data file 20 that is being used as the data file in this example. Here, each column is given a field name and each row represents one data record. Thus, the second row contains the data for Steven Lieske and the third row contains the information for Mike Bennett. The mail merge feature can also use a database file, a text file or a table in a WORD document as the data file.

Once the data file has been set up, the user creates or edits the main document 14, which is the template for the merge. Figure 3 shows a sample document created in WORD. The document includes generic text that will be included in each form letter, such as the sentence: "We are updating our computer records." The document also contains a series of merge tags 32 and 34 that are used to personalize each form letter. The merge tags may be a placeholder to a data field or may be a simple processing instruction. Figure 4 shows WORD's "Insert Merge Field" button 40, which allows the user to see all of the field names from the spreadsheet 20 and to choose which field names should be included in the template. In the example shown in Figure 3, the fields 32 called NAME, ADDRESS, CITY, STATE and ZIP are all included in the template.

The mail merger helper feature also supports nine merge instructions that are accessed by the "Insert Word Field" button 50 shown in Figure 5. The ASK and FILL-IN merge instructions can be inserted in a template to require the user to type in information from the keyboard as the merge is generating the form letters. With these two instructions, the user must be an active participant during the merge process since his or her keyboard input is required for each letter.

The IF-THEN-ELSE merge instruction provides conditional processing for text in the form letters. The template shown in Figure 3 includes one of these IF-THEN-ELSE merge instructions 34. This instruction 34 tests the PHONE field for the record being used for each form letter. If the PHONE field is not blank (i.e., <> ""), then the text "Our records indicate your phone number is" is added to the form letter followed by the value of the present record's PHONE field. If, however, the PHONE field is blank, then the 'else' portion of the merge instruction causes the text "We do not have your phone number on file" to be added to the form letter.

The MERGE-RECORD-# merge instruction simply includes in the resulting form letter the number of the record being processed. For example, if

the merge feature is using the fifth record's information to create the fifth form letter, then the number "5" is inserted where the MERGE-RECORD-# instruction is placed in the template.

5 In similar fashion, the MERGE-SEQUENCE-# merge instruction inserts in the form letter the total number of records being processed. For example, if the user decides to generate 10 form letters by processing records one through ten, then the number "10" is inserted where the MERGE-SEQUENCE-# instruction is placed in the template.

10 The NEXT-RECORD merge instruction causes the mail merge feature to proceed to the next record in the data file 20. This may allow a form letter to be a list reporting the data from several records. For example, the merged form letter may be set up to print the NAME and PHONE on a single page. The NEXT-RECORD-IF and SKIP-RECORD-IF merge instructions are similarly used to proceed to the next record on a single page, but these
15 instructions provide a condition that must be met for either the next record to be processed or the next record to be skipped. The conditions allowed by these two merge instructions are similar to the IF portion of the IF-THEN-ELSE merge instruction discussed above.

20 The final merge instruction supported by WORD's mail merge helper is the SET-BOOKMARK merge instruction, which inserts the text associated to a specified bookmark.

25 Once the template has been created with the desired merge fields and word fields, the user may set up a query 16 to instruct which records should be included in the merge and how they should be sorted. Figure 6 shows the FILTER RECORDS 60 dialog box that allows the user to select the criteria for inclusion in the form letters. Here, only records that have the STATE field set to MN will be used. Figure 7 shows the SORT RECORDS 70 dialog box that allows the user to select the sorting rules for the form letters. Here, the records will be sorted by the NAME field.

Once the template is finished and the data file is selected, and once any filters or sorting requirements are set up, the user may generate the merged form letters 18. As the data file from Figure 2 only includes two records with the STATE equal to MN, only two form letters are generated. Figure 8 shows the results for the second form letter 80. Unfortunately, the chosen data file, the filters and the sorting requirements are all details that the user must set up each time the mail merge is processed. The data file name, the filters and the query itself may not be embedded within the template. What is needed is a way to embed such information into the template. Furthermore, what is needed is a way to allow the template to requery the data or to query a second data source as part of merging the data.

The mail merge helper uses data from a text file or WORD table in much the same way as data from an Excel spreadsheet is used. These types of data files present information as a series sequential data records that are then processed in turn. The template must be set up to generate a single letter, label or address for each processed record. What is needed is way to present highly structured data in an advanced format.

The mail merge helper includes two aspects that may seem to offer such functionality. These are the catalog merge type and the ACCESS™ database data source. But even these are quite limited, as is shown in Figures 9 through 14.

A computer user may use ACCESS or similar relational database to store data, such as the data for company employees, for example. As one skilled in the art knows, such a relational database is a collection of data items organized as a set of formally-described tables from which data can be accessed or reassembled in many different ways without having to reorganize the database tables.

Figure 9 shows two tables set up in ACCESS for storing information about employees. The design for the Employees table 90 states that it stores the employee's ID, name, start date and job title. The design of the

ContactInfo table 92 states that it stores the address, city, state, ZIP and phone for a contact. Employees may have several contacts. For example, an employee may have a home address, a work address, and perhaps a sabbatical address. Figure 10 displays the Employees table 100 and ContactInfo table 102 with data for two employees. Per the relationship between the tables shown in Figure 9, the ID field of the Employees table 100 is used as the foreign key (i.e., EmployeeFK) for the ContactInfo table 102. Thus, the Steven Lieske employee has three ContactInfo records (i.e., 1, 2 and 3) and the Mike Bennett employee has two ContactInfo records (i.e., 4 and 5).

Figure 11 illustrates a report 112 created in ACCESS that prints out the full information for both of the employees. Here one sees the employee information for each employee as well as all associated contact information. Notice that while Steven Lieske has three contact addresses, his name only appears once rather than three times. In other words, the reports displays the data for each employee in a non-repetitive, easy-to-understand format. With such a report, even if Mike Bennett had 100 contact addresses set up in the database, they would all be included in the report without any additional programming effort.

The mail merge helper in WORD supports ACCESS database data. However, it does not support even as much functionality as the report writer does in ACCESS. As a first step, Figure 12 shows a SQL query 120 and query result 122 to gather all of the information that is found in the report shown in Figure 11. Figure 13 shows the mail merge helper 132 again, but this time the data source selected is the ACCESS database. As the mail merge helper does not support databases very well, one must choose a query defined in the database or else set up such a query on the fly. Here, the ListInfo query 130 from Figure 12 is selected. Once again, only one query is allowed and it must be set up by the end user just before performing the merge. The query may not be embedded within and saved as part of the template file.

The mail merger helper 132 also shows that the merge type is "Catalog" for this example rather than form letter. This type of merge is used

when information from several records is gathered together rather than each record producing a separate document. Figure 14 shows the template 140 that may be set up and then the resulting merged document 142 that is generated by merging the results of the ACCESS query 120 with the catalog template 140. Comparing these merged results 142 with the report shown in Figure 11, one can see the limitations of the mail merge helper. Rather than grouping the data in a logical format, the mail merge creates repetition with each row including the redundant employee name and job title.

The functionality shown in Figures 1 through 14 illustrate some of the shortcomings of the present art. While the WORD mail merge helper does well in producing standard form letters, envelopes and mailing labels, it does not offer various advanced features that are also lacking elsewhere in the art. Mail merge only allows for the creation of WORD documents. What is needed is a way to merge data into templates created with other desktop applications to produce other types of documents.

Mail merge only supports spreadsheets, databases, text files and WORD tables as the data source. Unfortunately, most business systems do not store their data in one of these formats. What is needed is a system that accepts structured data in other formats, such as XML data files.

Mail merge may use a query to choose the records to apply to the merge as well as its ordering. What is needed is a system that can include multiple queries and that can alternate between reporting data on a record by record basis and reporting data aggregated in a table (or with bullets or a list).

BRIEF SUMMARY OF THE INVENTION

In accordance with one aspect of the invention there is provided a method for generating a presentation file on a computing device. The method involves receiving data selected by a user interacting with a graphical user interface of a generator application being executed on the computing device,

the received data including a plurality of data records structured into a plurality of data fields. The method further involves processing a plurality of tags in the generator application based on the received data, wherein each tag is associated with one of the data fields in the received data. The method further involves receiving, in the graphical user interface of the generator application, a user selection of a template file. The template file includes at least one of the plurality of tags and at least one processing instruction for indicating how the received data is to be processed to build the presentation file. The at least one processing instruction comprises a query associating the received data with the template file. The method further involves, in response to receiving a generate instruction from the user in the graphical user interface of the generator application, causing data fields in the received data to be selected, the selected data fields being associated with the at least one processing instruction and the at least one of the plurality of tags in the template file and causing the presentation file to be generated on the computing device, wherein the presentation file includes the selected data fields.

Receiving the data may involve accessing at least one data source having the plurality of data records structured into the plurality of data fields.

The method may further involve embedding a first break-on condition in the template file for a first data field associated with the plurality of data fields, wherein the first break-on condition is satisfied in response to a change in the data associated with the first data field.

The template file may include a plurality of embedded processing instructions configured to control processing and insertion of the received data, and causing the presentation file to be generated may involve processing the template file with the received data to generate an ordered set of presentation output pages structured and ordered based on the plurality of embedded processing instructions in the template file.

The method may further involve processing the plurality of embedded processing instructions to generate a first presentation output page in a format readable by a desktop application.

The method may further involve processing the plurality of embedded processing instructions to generate a second presentation output page in a format readable by the desktop application, wherein the second presentation output page may include data and formatting different from the first presentation output page.

The method may further involve, each time the first break-on condition is met, repeating the above processing step to generate an additional presentation page using the plurality of embedded processing instructions.

The second presentation output page may include data and formatting structured and presented different from the first presentation output page.

The plurality of embedded processing instructions may further include an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field associated with the plurality of data fields.

The plurality of embedded processing instructions may further include an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field selected from the plurality of data fields.

The second data field may be different from the first data field.

The method may further involve generating an additional ordered set of presentation output pages for insertion into the presentation file in response to detection of a change in the second data field through execution of the order-based processing instruction.

The method may further involve generating an additional ordered set of presentation output pages for insertion into the presentation file each time the processing of the order-based processing instruction results in detection of a change in the second data field.

The method may further involve embedding a second break-on condition in the template file for a third data field of the plurality of data fields different from the first data field, wherein the second break-on condition is satisfied in response to a change in the data associated with the third data field.

The method may further involve generating a further ordered set of presentation output pages structured and ordered based on the template file in response to the second break-on condition being met.

5 In accordance with another aspect of the invention there is provided a computer readable medium encoded with codes for causing a computing device to execute any one of the above methods.

10 In accordance with another aspect of the invention there is provided an apparatus for generating a presentation file. The apparatus includes a computing device including a processor executing a generator application operably configured to cause the computing device to receive data comprising a plurality of data records structured into a plurality of data fields and display a plurality of tags. Each tag is associated with one of the data fields in the received data. The computing device is further caused to receive a user selection of a template file. The template file includes at least one of the
15 plurality of tags and at least one processing instruction for indicating how the received data is to be processed to build the presentation file. The at least one processing instruction includes a query associating the received data with the template file. The computing device is further caused to select data fields in the received data associated with the at least one processing instruction and
20 the at least one of the plurality of tags in the template file. The computing device is further caused by the generator application to generate the presentation file including the selected data fields.

25 The computing device may be operably configured to access at least one data source including the plurality of data records structured into the plurality of data fields.

The computing device may be operably configured to carry out any one of the above methods.

30 In accordance with another aspect of the invention there is provided an apparatus for generating a presentation file. The apparatus includes means for receiving a user selection of a data source file, means for receiving data from the data source file, the received data including a plurality of data records structured into a plurality of data fields, means for processing a plurality of tags

based on the received data, wherein each tag is associated with one of the plurality of data fields in the received data and means for receiving a user selection of a template file. The template file includes at least one of the plurality of tags and at least one processing instruction for indicating how the received data is to be processed to build the presentation file. The at least one processing instruction includes a query associating the received data with the template file. The apparatus also includes means for selecting data fields in the received data wherein the selected data fields are associated with the at least one processing instruction and the at least one of the plurality of tags in the template file and means for generating the presentation file wherein the presentation file includes the selected data fields.

The means for receiving data may include means for accessing at least one XML data file including the plurality of data records structured into the plurality of data fields.

The apparatus may further include means for embedding a first break-on condition in the template file for a first data field associated with the plurality of data fields, wherein the first break-on condition is satisfied in response to a change in the data associated with the first data field.

The template file may include a plurality of embedded processing instructions configured to control processing and insertion of the received data, and the apparatus may further include means for processing the template file with the received data to generate an ordered set of presentation output pages structured and ordered based on the plurality of embedded processing instructions in the template file.

The apparatus may further include means for processing the plurality of embedded processing instructions to generate a first presentation output page in a format readable by a desktop application.

The apparatus may further include means for processing the plurality of embedded processing instructions to generate a second presentation output page in a format readable by the desktop application, wherein the second presentation output page includes data and formatting different from the first presentation output page.

The apparatus may further include means for generating an additional presentation page using the plurality of embedded processing instructions each time the first break-on condition is met.

5 The second presentation output page may include data and formatting structured and presented different from the first presentation output page.

The plurality of embedded processing instructions may include an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field associated with the plurality of data fields.

10 The plurality of embedded processing instructions may include an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field selected from the plurality of data fields.

The second data field may be different from the first data field.

15 The apparatus may further include means for generating an additional ordered set of presentation output pages for insertion into the presentation file in response to detection of a change in the second data field through execution of the order-based processing instruction.

20 The apparatus may further include means for generating an additional ordered set of presentation output pages for insertion into the presentation file each time the processing of the order-based processing instruction results in detection of a change in the second data field.

25 The apparatus may further include means for embedding a second break-on condition in the template file for a third data field of the plurality of data fields different from the first data field, wherein the second break-on condition is satisfied in response to a change in the data associated with the third data field.

The apparatus may further include means for generating a further ordered set of presentation output pages structured and ordered based on the template file in response to the second break-on condition being met.

30 The method may further involve storing, in the template file, a graphical representation of locations where data fields selected from the received data are to be inserted in presentations based on the template file.

The template file may include a first storage area storing the graphical representation of the locations where data fields are to be inserted and a second storage area storing processing instructions operable to group a plurality of pages associated with the template file.

5 Processing the plurality of tags may involve parsing the received data to determine its field structure and generating the plurality of tags based on the field structure.

10 Processing the plurality of tags may involve displaying the plurality of tags for user selection in the graphical user interface of the generator application and facilitating insertion of at least one tag from the plurality of tags, into at least one template file, using the graphical user interface.

The template file may store a graphical representation of locations where data fields selected from the received data are to be inserted in presentations based on the template file.

15 The template file may include a first storage area storing the graphical representation of the locations where data fields are to be inserted; and a second storage area storing processing instructions operable to group a plurality of pages associated with the template file.

20 The generator application may be operably configured to cause the computing device to parse the received data to determine its field structure and generate the plurality of tags based on the field structure.

25 The generator application may be operably configured to cause the computing device to display at least some of the plurality of tags for user selection in a graphical user interface of the generator application, to facilitate insertion of at least one tag from the plurality of tags, into at least one template file, using the graphical user interface.

The method may further involve executing a desktop application of the computer device to provide a presentation based on the presentation file.

30 The computing device may be operably configured to execute a desktop application to provide a presentation based on the presentation file.

In some illustrative embodiments of the invention, a presentation generator may access a data file or other data source that is structured into a

set of data fields. The generator may present a user with a listing of tags, including tags that correspond to the various data fields for one or more data sources. The user may create a new template or modify an existing template by inserting one or more tags in the template, or the user may rely on a template that already has tags inserted in it. The user may indicate processing instructions for the template. The generator may process the data with the template based on the tags and the instructions. The processing instructions may include one or more queries for the data source.

Some illustrative embodiments may provide a way to create a presentation through a user-friendly software application based on a data from a computing system, a data file, a database or other data source. Some embodiments of the invention may allow the user to set up the formatting of the presentation using processing instructions rather than requiring hard coding. Some embodiments may allow the user to indicate which records from a data source should be included in the presentation. Some embodiments may allow multiple queries of the data source. Some embodiments may allow more than one data source to be used in building the presentation. Some embodiments may allow pages, slides, sections, etc. of the presentation to be grouped together, with the group repeated for each change in a specified data field. Some embodiments of the invention may allow a presentation to be updateable by the end user so that the presentation more accurately reflects the contents of the data source.

Other aspects and features of the present invention will become apparent to those ordinarily skilled in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying Figures.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows the prior art system of the mail merge helper from WORD.

Figure 2 shows the prior art system of data set up in EXCEL.

5 Figure 3 shows the prior art system template in WORD.

Figure 4 shows the prior art system's Insert Merge Field button.

Figure 5 shows the prior art system's Insert Word Field button.

Figures 6 and 7 show the prior art system Query Options feature of the mail merge helper.

10 Figure 8 shows the prior art system's merged letter from a template and data.

Figure 9 shows the prior art system as two related tables in ACCESS.

Figure 10 shows the prior art system as data in the two ACCESS tables.

15 Figure 11 shows the prior art system as an ACCESS report.

Figure 12 shows the prior art system as a SQL query and its results in ACCESS.

Figure 13 shows the prior art system mail merge helper accessing the ACCESS database.

20 Figure 14 shows the prior art system's catalog-type template and resulting merged document.

Figure 15 shows a flowchart of one embodiment of the invention generating a presentation.

Figure 16 shows a diagram of one embodiment of the invention interfacing with POWERPOINT and WORD to generate a presentation.

Figures 17, 18 and 19 are dialog boxes available in one embodiment of the invention.

5 Figure 20 is a block diagram showing a system and a computer program for one embodiment of the invention.

Figures 21 and 22 are matrices listing sample data.

Figures 23A, 23B and 23C show three pages in a template that can be processed by one embodiment of the invention.

10 Figures 24 to 28 show five pages from a presentation generated based on the template of figures 23A, 23B and 23C and the data of figures 21 and 22.

Figure 29 shows one page from a presentation template that may be processed by the present invention.

15 Figure 30 through 36 are dialog boxes available in another embodiment of the invention.

DETAILED DESCRIPTION

Embodiments of the present invention may enable an end user to use a template to create a presentation file based on one or more data sources. The template includes one or more tags that are mapped to fields in the data sources as well as one or more processing instructions that control how the data sources are queried and how the regions of the template are positioned within the presentation. One skilled in the art may create various software systems to accomplish the methodology of the present invention. One of the many various software systems is shown starting with Figure 15. In such an embodiment, a system parses one or more data files 150 or other data sources to determine the field structure of the data. A user may choose to create a

20

25

new template, revise an already existing template, or rely entirely on an already existing template 152 & 154. If the user chooses to create a new template 154, the user accesses a user-friendly software application to set up the template. In one embodiment, the user may choose from any of a number of user-friendly software applications, such as those developed by MICROSOFT (including the WORD word-processor, the EXCEL spreadsheet program and the POWERPOINT slide presentation program) or other vendors. Other embodiments of the invention may support other user-friendly applications.

To set up the template, the user may insert processing instructions, such as special tags into the location of the template where certain data fields should be inserted for the resulting presentation. In one embodiment, the user may insert such tags using the drag-and-drop technique with a listing of available tags. In another embodiment, the user may type the tags manually using a supported notation. In addition to arranging field tags in the template, the processing instructions may be queries, sorting requirements, etc. The processing instructions may also provide the system with information on how a series of pages or sections of the template are grouped or how they relate to the data. In one embodiment, such processing instructions are entered by the user in a specific location of the template, such as a notes section or a comments section.

Referring back to Figure 15, once the template is set up, the user may initiate an instruction for the system to generate the presentation. To do this, the system may retrieve the template 156 and parse the processing/merge instructions 158. Based on these processing instructions, the system may create a presentation 159 of one or more pages by inserting the desired data fields in the tagged locations of the template. The term "pages" is not limited to the traditional meaning of a page, but also means "slide", "chapter", "section" or some other type of dividing unit within the presentation.

Figure 16 shows a diagram of one embodiment of the invention interfacing with POWERPOINT and WORD to generate a presentation. As shown in the figure, data from a computer system may be accessed as an XML file 163. The attribute names from the XML file's attribute-value pairs can be used to create and modify POWERPOINT templates 164.1 and WORD templates 164.2. In embodiments accepting such XML data files, an XSD or other definition file that defines the data structure of the XML file may be accessed. A generator application 160 may be written in VB.NET™ or other computer language. The generator application 160 may be kicked off by a JAVA™ application 161 to either create/modify templates or to generate the presentations. A user may interact with the GUI interface to the generator application 160 to indicate which template and which XML file to process. The generator 160 may then spawn automation objects 165. For example, a POWERPOINT automation object 165.1 may load the appropriate POWERPOINT template 164.1 and process the instructions to generate a POWERPOINT slide show file 166.1 made up of a series of slides.

GENERATING A PRESENTATION

Figure 17 shows the first tabbed dialog box for one embodiment of the user interface of the present invention. As shown in Figure 17, the data source (i.e., "plan") from which the presentation (i.e., "briefing") is to be generated may be displayed in the 'Select a Plan File' area 172. On clicking the 'Browse' button next to this field, a File Chooser window may open to allow the user to browse through the file directory and specify an XML file that will be used to generate a briefing presentation. When the user selects a file and clicks OK, the filename may populate the Plan File field 172. The file that the user selects may be validated before processing.

The template(s) to be used for the briefing presentation generation may be displayed in the "Select a Template" field 174 as a list. The end user may add templates to the list using the 'Browse' button. This button may bring up a File Chooser window to allow the user to browse through the file director and specify a .pot or .dot file. When the user selects a file and clicks OK, the

filename may be displayed in the template list. The user may delete one or more templates from the list by selecting the template(s) to be deleted, and clicking the 'Delete' button. This may remove the templates from the list, but not delete the template(s) from the hard drive or other secondary storage device. The user may edit a template by highlighting the template to be edited and clicking the 'Edit' button.

In one embodiment of the present invention, commonly used settings, such as plan files and templates may be saved to a file, to a collaborative web service, etc. so that such settings may be used among a group of users. This sharing may increase the ease of use of embodiments of the invention.

Once a plan data source file 172 has been loaded, and a template 174 has been selected, the user may click on the 'Generate' 176 button to start the process of generating the merged briefing presentation. A date filtering window may display at this point, allowing the user to enter the specific date range for which he/she wants to generate the briefing. After entering the date range and clicking 'OK', a progress window may display for showing status descriptions to the user. The data source file may be first converted to a hierarchical format and stored in memory. If the conversion to hierarchical format completes successfully, the converted data source may be filtered based on the date filters specified.

The process differs now depending on the type of presentation that is being created. If the presentation is a MICROSOFT WORD or similar document, MICROSOFT WORD (or other program) may start and the briefing may be generated based on the template and the data from the data sources.

If however, the presentation is a MICROSOFT POWERPOINT slide show or similar presentation slide show document, then a dialog box may display on top of the progress bar, informing the user of the estimated number of slides that will be generated, and the estimated time for completion. If a successful generation is not guaranteed, the user may be alerted at this point, so that he/she can cancel the process. The number of slides may be

estimated based on the processing instructions in the template. The time may be estimated based on the complexity of the template and the plan using a formula, such as: Time in seconds = ((No. of rows/Tables + No. of slides) * Common factor)/60. In one embodiment, the common factor may be set up at perhaps 4.65.

A “no guarantee” message may be displayed on the screen if the number of processes is greater than 3200 or the total number of table rows is greater than 800, for example. The number of processes may be calculated by adding the number of rows per table with the number of slides in the template. If the user clicks ‘Cancel’ on the estimate window, the generation may be canceled. If the user clicks ‘Ok’, MICROSOFT POWERPOINT may open up and the generation may take place.

The second tabbed dialog window of one embodiment is shown in Figure 18. Here, the Plan File tab may contain a tree-view structure of the selected XML plan file(s) (data sources). The user may expand and collapse nodes (see 182 and 184) to see the whole plan. When the user clicks on the ‘Generate’ button in the Main tab to generate a briefing, the Plan File tab may be updated to show the tree-view structure of the converted hierarchical data source. While customizing templates, the user may drag and drop elements from the Plan File tab to the WORD template, and a reference to the path of the element may be displayed in the template. For example, if the user drags and drops the ‘assumptions’ field from the ‘Plan File’ tab to a template, the processing instruction {plan/assumptions} may be inserted in the template file.

One embodiment of the present invention may allow nicknames to be used rather than actual data field names. For example, rather than showing in this tree-view structure the field “ccINdata”, some embodiments of the invention may allow the nickname “Commander’s Intent” to be used in place of ccINdata. Or such nicknames may be supported in the slides themselves so that a user may more readily understand the slide template.

As one skilled in the art will recognize, the use of a tree-view or other view of the data may assist the user in building searches across multidimensional structured data, and is not limited to only two-dimensional data results, such as those found in relational databases.

5 The third tabbed dialog window of one embodiment is shown in Figure 19. Here, the Plan File Structure tab may contain a tree-view structure of the selected data source. The user may expand and collapse nodes to see the whole plan. When the user clicks on the 'Generate' button in the Main tab to generate a briefing, the Plan File Structure tab may be updated to show the
10 tree-view structure of the converted hierarchical data source file. While customizing templates, the user may drag and drop elements from the Plan File tab to the WORD template, and a reference to the element will be displayed in the template. For example, if the user drags and drops the 'assumptions' field from the 'Plan File Structure' tab to a template, the
15 {assumptions} processing instruction tag may be inserted in the template.

In addition to mapping the data structure using a tree-view method where the data fields are shown as a hierarchy, one embodiment may provide a relational mapping method, where data in one entity links or relates to data in another entity. In such an embodiment, the links or relationships may be
20 based on a key or other ID, for example.

Figure 20 shows a block diagram of one embodiment of a computer system using a computer program to generate presentations. In Figure 20, a PC or other general purpose computing device (such as a PDA or laptop) 200 has stored on it one or more computer programs 201 that provide the
25 functionality of the present invention in one of its embodiments. Data to be used to build the presentations may be extracted from one or more databases 202, other computing systems 205, web services 204, data files 206, or other data sources, for example. Templates and the resulting presentations may be stored on a disk 203 or other storage.

Figures 21 and 22 are matrices that show a representation of data fields and data that may be accessed from a database 202, data file 206, other computing system 205, etc. The sample data shown in Figure 21 is shown for illustrative purposes on how a presentation may be generated using data that represents a series of projects being handled by an organization. Each project has a level, type, name, description and other data fields. Figure 22 is a second listing showing further sample data for the projects first shown in Figure 21. As indicated by these two figures, the data used by embodiments of the present invention may exist in more than one database table, data file, web service, etc. A person skilled in the art will readily understand the numerous ways in which data can be stored and transmitted. For example, one embodiment of the invention may include an XML parser so that the data can be represented in XML format. For example, data for the first project shown in Figure 21 may be structured as a series of XML tags having attribute-value pairs, such as the tags shown in Table 1.

20

25

```

<project>
  <attribute name='id' value='1' />
</attribute>
  <attribute name='level' value='national' />
</attribute>
  <attribute name='type' value='military' />
</attribute>
  <attribute name='name' value='mil-ops-3829' />
</attribute>
  <attribute name='description' value='D1?' />
</attribute>
  <attribute name='rationale' value='R1?' />
</attribute>
  <attribute name='priority' value='high' />
</attribute>
  <attribute name='startDate' value='3-5-2003' />
</attribute>
  <attribute name='endDate' value='12-31-2003' />
</attribute>

  <attribute name='indicator'>
    <attribute name='label' value='L1' /> </attribute>
    <attribute name='description' value='D1' /> </attribute>
    <attribute name='value' value='V1' /> </attribute>
  </attribute>

  <attribute name='indicator'>
    <attribute name='label' value='L2' /> </attribute>
    <attribute name='description' value='D2' /> </attribute>
    <attribute name='value' value='V2' /> </attribute>
  </attribute>

  <attribute name='indicator'>
    <attribute name='label' value='L3' /> </attribute>
    <attribute name='description' value='D3' /> </attribute>
    <attribute name='value' value='V3' /> </attribute>
  </attribute>

  <attribute name='indicator'>
    <attribute name='label' value='L4' /> </attribute>
    <attribute name='description' value='D4' /> </attribute>
    <attribute name='value' value='V4' /> </attribute>
  </attribute>

  <attribute name='indicator'>
    <attribute name='label' value='L5' /> </attribute>
    <attribute name='description' value='D5' /> </attribute>
    <attribute name='value' value='V5' /> </attribute>
  </attribute>
</project>

```

Table 1

To explain how the data listed in Figures 21 and 22 or table 1 can be accessed by processing instructions in the template to generate a presentation in POWERPOINT, Figures 23A, 23B and 23C show three pages that are part

of a multi-slide template 230. Figure 24 illustrates how POWERPOINT may displays the first slide page of the template 230. Text and other display objects may be inserted by the end user in the slide pane area 232 of the template. The user may also insert processing instruction tags 236 corresponding to fields in the data source. Various means may be used to insert such tags. In Figure 24, the user encloses plain text in braces { } to indicate a tag. Additional parameters may also be enclosed by the brackets. For example, the template page in Figure 23A indicates that the TYPE data field should be inserted below the text "National Objectives" and then all of the NAME data fields should be listed as bullet points. The plus-sign in the example of Figure 24 may indicate that all pertinent records should be included rather than just the current record.

In one embodiment, the user does not need to type the brackets and text in order to insert tags. Rather, in such an embodiment the GUI shown in Figures 17 to 19 may be used and the user may simply click on one of the field names, and then drag-and-drop a tag for that field into the proper location of the template.

Figure 23A also shows the standard POWERPOINT notes pane 234 below the slide pane 232. One embodiment of the invention leverages the notes pane 234 to store processing instructions. Other embodiments allow the user to set up the processing instructions in different ways, such as in a comments section, within the main portion of the template, etc.

In yet another embodiment, the processing instructions may be associated with one or more smart tags and placed in the resulting presentation file. In such a presentation file, the end user may use the smart tag to update one section, multiple sections, or the entire presentation by re-querying the data source. Of course in yet other embodiments the processing instructions may be embedded in the presentation file itself not with smart tags but with other features that one skilled in the art may choose to leverage.

The processing instructions in the notes pane 234 of the example in Figure 23A include five lines. In this example, XPath query language is shown. In other embodiments, other protocols may be used. The first line ("# Group Filter...") sets the context of the slide (or group of slides). For example, here only records for which the LEVEL field is set to 'National' are to be included in the presentation.

One skilled in the art will recognize that setting the context (i.e., determining what data to extract from the data source) may be implemented to offer various features. Three possible features are to sort by frequency, sort by structural elements, and to sort by a combinations of structural elements and relational links. In sorting by frequency, in one embodiment, data from the data source may be sorted according to some frequency requirement. The highest 10 results, the most common 5 results, the lowest 15 different results are three examples of how frequency may be used in building the presentation.

In sorting by structural elements, the structure of the data source may itself be a sorting/filtering requirement. For example, one may choose to only report in the presentation items where more than two child elements exist. Or, the presentation may dictate that a data element should only be shown when its child elements have data for priority filed. In yet a third example, a user may use an instruction that a data entity should be listed in addition to its child entities.

In sorting by a combination of structural elements and relational links, the status of structural elements (such as choosing those with two or more child links) may be used in combination with the more traditional relational requirements (i.e., where the foreign key in one table is the primary key in a second table).

Some embodiments of the invention may also provide an analysis feature whereby the structure and data source may be proactively analyzed to determine commonly and likely queries that a user may find helpful. As data

sources may be complex in structure, pre-built queries may allow the use of some embodiments of the invention to be much more user friendly.

Returning now to Figure 23A, the second line ("Group sort...") includes information on how the context is to be sorted. Here, the data (and hence the presentation) will be sorted by the TYPE data field. The third line in the instructions ("Slides in Group...") informs the generator how many slide templates exist for the current grouping of slides. In Figure 23A, the processing instructions indicate that there is only the one slide making up its own group.

The fourth instruction line ("New Slide Per...") is the break-on condition, stating when to break to a new slide group. Figure 23A's slide template will break once the TYPE data field changes. The fifth and final instruction ("Order Bullets...") sets up the ordering format for any bullets or numbered list displaying on the template.

Comparing the data of Figures 21 and 22 against the first template shown in Figure 23A, one skilled in the art will understand that the generator program will work on only data for which the LEVEL field is set to "National" (i.e., rows with ID of 1 to 7). From these seven records, the generator will sort by TYPE (hence the records would first process the Economic, then the Military, then the Political, and finally the Social fields). Assuming that the presentation generating is currently processing the Military records, the Figure 23A template will cause the names of row IDs 1, 2 and 3 to be shown as the bullet points. Figure 24 shows such a resulting slide from the template and the bulleted data 244.

Figures 23B and 23C illustrate how a user may set up a second group of slide templates for the presentation in POWERPOINT. In these two figures, the processing instructions in the notes pane 234 indicate that there are two slides that make up the group. Thus, these two templates will cause two slides to be inserted in the presentation file for each processed record. Figures 25 and 26 illustrate the resulting portion of the presentation based on the template

slides of Figures 23B and 23C for the "mil-ops-3829" project and Figures 27 and 28 correspond to the "mil-ops-9220" project.

If a template consists of the three slides shown in Figs. 23A, 23B and 23C, and if only the "National" level data shown in Figures 21 and 22 are to be included, then the final presentation will consist of the following 18 slides, in this order:

5

slide #	template used		records included in slide	Type	Name
1	23A		ID = 6	economic	econ-ops-3892
2		23B	ID = 6	economic	econ-ops-3892
3		23C	ID = 6	economic	econ-ops-3892
4	23A		ID = 3, 1 and 2	military	mil-ops-0989, mil-ops-3829 & mil-ops-9220
5		23B	ID = 3	military	mil-ops-0989
6		23C	ID = 3, 110 and 111	military	mil-ops-0989
7		23B	ID = 1	military	mil-ops-3829
8		23C	ID = 1, 101, 102, 103, 104 and 105	military	mil-ops-3829
9		23B	ID = 2	military	mil-ops-9220
10		23C	ID = 2, 106 and 107	military	mil-ops-9220
11	23A		ID = 5 & 4	political	pol-ops-7739 & pol-ops-8328
12		23B	ID = 5	political	pol-ops-7739
13		23C	ID = 5	political	pol-ops-7739
14		23B	ID = 4	political	pol-ops-8328
15		23C	ID = 4	political	pol-ops-8328
16	23A		ID = 7	social	soc-ops-0558
17		23B	ID = 7	social	soc-ops-0558
18		23C	ID = 7	social	soc-ops-0558

Table 2

Notice in Table 2 how for each set of data processed from the data source, there is a slide based on the Figure 23A template followed by two slides from the grouped templates of Figures 23B and 23C.

5 To better understand the coding shown in the figures, a short explanation of XPath functionality will now be provided. First, the "/" item may be used to represent an absolute path to a data element. The "[]" item may be used to further specify an element. The "/" item may be used to select all elements in the document that satisfy the criteria queried. The "../" item may be used to select the parent of the current node. The "ancestor::" item may be used to select all of the ancestors (such as the parent and the grandparent) of the current node. The "preceding::" item may be used to select everything in the document before the starting tag of the current node.

15 In addition to the standard XPath features shown in Figures 23A, 23B and 23C, in one embodiment, additional specialized support to provided for parsing the following processing instruction elements: ?, @, and +. In one embodiment, the "?" item may act as a placeholder for 'unique objects' that are queried within an XML document. Each new object id may then represent a new set of slides to follow for that object. The "@" item may act like a 'carriage return' for information to be repeated (at the parent level) within a presentation (such as a POWERPOINT slide or a WORD document). The "+" item may act like a 'carriage return' for information to be repeated at the child level if it is used in conjunction with the "@" item.

The use of these processing elements may be shown in operation by the template shown in Figure 29 and explained in Table 3 below:

Table 3

Query #	Code Parsed	Explain Code in English
1	#	begin queries
	Group Filter : { <code>//branch</code>	for all branches...
	<code>/phase</code>	display those phases...
	<code>[not (</code>	except those that...
	<code>(uniqueObjectId =</code>	have a unique Object ID
	<code>preceding::phase/ uniqueObjectId)}}</code> ,	that has been found before.
		(In other words, for query 1, find all of the Phases within a Branch, but don't duplicate any.)
2	Group Sort:	sort the slide group
	<code>{../uniqueObjectId},</code>	by Branches having a unique Object ID
	Slides in Group: 1,	the group contains a single slide
3	New Slide Per:	Create a new slide ...
	<code>{../uniqueObjectId},</code>	for each Phase that has a unique Object ID
4	Order Bullets/Rows by:	Order the rows in the slide ...
	<code>{../priority},</code>	by the Priority field
5	Row Per:	Each row is ...
	<code>{//branch</code>	for all Branches ...
	<code>/phase</code>	display all Phases ...
	<code>[../uniqueObjectId='?']</code>	and create a placeholder that is for each Phase that has a unique Object ID ...
	<code>//objective</code>	and display those Objectives ...
	<code>[not</code>	except for those that ...
	<code>(uniqueObjectId=</code>	have a unique Object ID ...
	<code>preceeding::phase//objective/uniqueObjectId)]</code>	that have been found before in a preceding Phase ...
	<code>/label</code>	and display the name ...
	<code>[../level='Tactical']</code>	of those Objectives which have a level of 'Tactical'
		end Queries

5 The five queries for the template of Figure 29 begin with the first query being executed against the data source. As shown in the "Explain Query in English" column of table 3, the data for all of the Phases in a Branch are retrieved (without duplicates), stored and the cursor is located at the "Phase" level within the XML source file.

Queries 2 and 3 begin where this cursor was placed at the termination of query 1 (i.e., at the Phase level). Query #2 reads its query, and looks for its information one level up (i.e., at the "Branch" level, which is one level higher than where Query #1 concluded) and stores the appropriate data (i.e., sorting the slide group by Branch). Query #3 reads its query to, looks for its information at the "Phase" level (i.e. the same level where Query #1 concluded) and stores the appropriate data.

Query #5 is then read and stored with the cursor resting at the overall "level" for Objectives within the XML file. Lastly, query #4 reads its query and searches for its information at the "Objective" level within the XML file (one step up from where Query #5 concluded which was at the overall "level" for Objectives).

Figures 30 through 36 illustrate a more robust embodiment of the present invention than that shown in Figures 17 through 19 and discussed above. As shown starting in Figure 17, this embodiment of the invention has a four-tabbed user interface. The overview tab allows the user to store information about the presentation, such as its classification 3005, its title 3010, notes about it 3015, a point of contact 3020, dates of creation and modification 3025, and location of the template file 3030 and data sources 3035. Such an embodiment may include a preview region 3040 where a user may see a thumbnail of some of the slides in the template. This feature may help the user to quickly find the correct template.

Figure 31 shows the slides tab where a list of queries saved within the template are listed 3105 for the user to activate or deactivate. Details about the template may also be stored here 3110.

Figure 32 is the queries tab where queries may be added, or saved queries may be used (with or without modification) 3205. The query's format 3210 and details about its structure 3215 may be modified through this tab. Figure 33 shows how a dropdown menu may assist the user in choosing filtering for the query 3305. Figure 34 shows how a dropdown menu may

assist the user in choosing the level, which determines what (if any) data from children should be included with the query 3405.

Figure 35 shows a linking setup window 3505, which may be used to identify relational linking entities of one entity that then link two other entities. This feature may allow relationships that do not follow a tree hierarchy. This linking setup window is further shown in Figure 36, where one entity is linked to another entity 3605.

The foregoing description addresses embodiments encompassing the principles of the present invention. The embodiments may be changed, modified and/or implemented using various types of arrangements. Those skilled in the art will readily recognize various modifications and changes that may be made to the invention without strictly following the exemplary embodiments and applications illustrated and described herein, and without departing from the scope of the invention. For example, one embodiment of the invention provides functionality to enable the user to refresh individual pieces of data. Another embodiment enables the user to specify on the template that a hyperlink should be generated linked to another slide in the presentation. In yet another embodiment, the presentation generator's GUI allows the user to see the representative data on the template rather than the symbolic field tags.

While specific embodiments of the invention have been described and illustrated, such embodiments should be considered illustrative of the invention only and not as limiting the invention as construed in accordance with the accompanying claims.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A method for generating a presentation file on a computing device, the
5 method comprising:

receiving data selected by a user interacting with a graphical user
interface of a generator application being executed on the computing
device, the received data comprising a plurality of data records
10 structured into a plurality of data fields;

processing a plurality of tags in the generator application based on the
received data, wherein each tag is associated with one of the data
fields in the received data;

15 receiving, in the graphical user interface of the generator application, a
user selection of a template file, the template file comprising:

at least one of the plurality of tags; and

20 at least one processing instruction for indicating how the
received data is to be processed to build the presentation file,
wherein the at least one processing instruction comprises a
query associating the received data with the template file; and

25 in response to receiving a generate instruction from the user in the
graphical user interface of the generator application,

causing data fields in the received data to be selected, the
30 selected data fields being associated with the at least one
processing instruction and the at least one of the plurality of tags
in the template file, and

causing the presentation file to be generated on the computing device, wherein the presentation file includes said selected data fields.

- 5 **2.** The method of claim 1, wherein receiving said data comprises
accessing at least one data source having the plurality of data records
structured into the plurality of data fields.
- 10 **3.** The method of claim 2, further comprising embedding a first break-on
condition in the template file for a first data field associated with the
plurality of data fields, wherein the first break-on condition is satisfied in
response to a change in the data associated with the first data field.
- 15 **4.** The method of claim 3, wherein the template file comprises a plurality
of embedded processing instructions configured to control processing
and insertion of the received data, and wherein causing the
presentation file to be generated further comprises processing the
template file with the received data to generate an ordered set of
presentation output pages structured and ordered based on the
20 plurality of embedded processing instructions in the template file.
- 5.** The method of claim 4, further comprising processing the plurality of
embedded processing instructions to generate a first presentation
output page in a format readable by a desktop application.
- 25 **6.** The method of claim 5, further comprising processing the plurality of
embedded processing instructions to generate a second presentation
output page in a format readable by the desktop application, wherein
the second presentation output page comprises data and formatting
30 different from the first presentation output page.
- 7.** The method of claim 6, wherein each time the first break-on condition
is met, repeating the processing step of claim 6 to generate an

additional presentation page using the plurality of embedded processing instructions.

- 5 **8.** The method of any one of claims **6** or **7**, wherein the second presentation output page comprises data and formatting structured and presented different from the first presentation output page.
- 10 **9.** The method of any one of claims **4** to **8**, wherein the plurality of embedded processing instructions further comprises an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field associated with the plurality of data fields.
- 15 **10.** The method of any one of claims **4** to **8**, wherein the plurality of embedded processing instructions further comprises an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field selected from the plurality of data fields.
- 20 **11.** The method of any one of claims **9** or **10**, wherein the second data field is different from the first data field.
- 25 **12.** The method of any one of claims **9** to **11**, further comprising generating an additional ordered set of presentation output pages for insertion into the presentation file in response to detection of a change in the second data field through execution of the order-based processing instruction.
- 30 **13.** The method of any one of claims **9** to **11**, further comprising generating an additional ordered set of presentation output pages for insertion into the presentation file each time the processing of the order-based processing instruction results in detection of a change in the second data field.

14. The method of any one of claims 3 to 13, further comprising embedding a second break-on condition in the template file for a third data field of the plurality of data fields different from the first data field, wherein the second break-on condition is satisfied in response to a change in the data associated with the third data field.
15. The method of claim 14, further comprising generating a further ordered set of presentation output pages structured and ordered based on the template file in response to the second break-on condition being met.
16. A computer readable medium encoded with codes for causing a computing device to execute any one of the methods of claims 1 to 15.
17. An apparatus for generating a presentation file, the apparatus comprising a computing device including a processor executing a generator application operably configured to cause the computing device to:
- receive data comprising a plurality of data records structured into a plurality of data fields;
- display a plurality of tags, wherein each tag is associated with one of the plurality of data fields in the received data;
- receive a user selection of a template file, the template file comprising:
- at least one of the plurality of tags; and
- at least one processing instruction for indicating how the received data is to be processed to build the presentation file, wherein the at least one processing instruction comprises a query associating the received data with the template file;

select data fields in the received data associated with the at least one processing instruction and the at least one of the plurality of tags in the template file; and

5

generate the presentation file including said selected data fields.

10 **18.** The apparatus of claim **17**, wherein the computing device is operably configured to access at least one data source comprising the plurality of data records structured into the plurality of data fields.

15 **19.** The apparatus of any one of claims **17** or **18**, wherein the computing device is operably configured to carry out any one of the methods of claims **3** to **15**.

15

20. An apparatus for generating a presentation file, the apparatus comprising:

means for receiving a user selection of a data source file;

20

means for receiving data from the data source file, the received data comprising a plurality of data records structured into a plurality of data fields;

25

means for processing a plurality of tags based on the received data, wherein each tag is associated with one of the plurality of data fields in the received data;

30

means for receiving a user selection of a template file, the template file comprising:

at least one of the plurality of tags; and

at least one processing instruction for indicating how the received data is to be processed to build the presentation file, wherein the at least one processing instruction comprises a query associating the received data with the template file;

5

means for selecting data fields in the received data wherein the selected data fields are associated with the at least one processing instruction and the at least one of the plurality of tags in the template file; and

10

means for generating the presentation file wherein the presentation file includes said selected data fields.

21. The apparatus of claim **20**, wherein the means for receiving data comprises means for accessing at least one XML data file comprising the plurality of data records structured into the plurality of data fields.

15

22. The apparatus of any one of claims **20** or **21**, further comprising means for embedding a first break-on condition in the template file for a first data field associated with the plurality of data fields, wherein the first break-on condition is satisfied in response to a change in the data associated with the first data field.

20

23. The apparatus of claim **22**, wherein the template file comprises a plurality of embedded processing instructions configured to control processing and insertion of the received data, and wherein the apparatus further comprises means for processing the template file with the received data to generate an ordered set of presentation output pages structured and ordered based on the plurality of embedded processing instructions in the template file.

25

30

24. The apparatus of claim **23**, further comprising means for processing the plurality of embedded processing instructions to generate a first presentation output page in a format readable by a desktop application.
- 5 25. The apparatus of claim **24**, further comprising means for processing the plurality of embedded processing instructions to generate a second presentation output page in a format readable by the desktop application, wherein the second presentation output page comprises data and formatting different from the first presentation output page.
- 10 26. The apparatus of claim **25**, further comprising means for generating an additional presentation page using the plurality of embedded processing instructions each time the first break-on condition is met.
- 15 27. The apparatus of any one of claims **25** or **26**, wherein the second presentation output page comprises data and formatting structured and presented different from the first presentation output page.
- 20 28. The apparatus of any one of claims **23** to **27**, wherein the plurality of embedded processing instructions further comprises an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field associated with the plurality of data fields.
- 25 29. The apparatus of any one of claims **23** to **27**, wherein the plurality of embedded processing instructions further comprises an order-based processing instruction for producing sets of presentation output pages ordered based on a second data field selected from the plurality of data fields.
- 30 30. The apparatus of any one of claims **28** or **29**, wherein the second data field is different from the first data field.

- 5 **31.** The apparatus of any one of claims **28** to **30**, further comprising means for generating an additional ordered set of presentation output pages for insertion into the presentation file in response to detection of a change in the second data field through execution of the order-based processing instruction.
- 10 **32.** The apparatus of any one of claims **28** to **30**, further comprising means for generating an additional ordered set of presentation output pages for insertion into the presentation file each time the processing of the order-based processing instruction results in detection of a change in the second data field.
- 15 **33.** The apparatus of any one of claims **22** to **32**, further comprising means for embedding a second break-on condition in the template file for a third data field of the plurality of data fields different from the first data field, wherein the second break-on condition is satisfied in response to a change in the data associated with the third data field.
- 20 **34.** The apparatus of claim **33**, further comprising means for generating a further ordered set of presentation output pages structured and ordered based on the template file in response to the second break-on condition being met.
- 25 **35.** The method of claim **1** further comprising storing, in the template file, a graphical representation of locations where data fields selected from the received data are to be inserted in presentations based on the template file.
- 30 **36.** The method of claim **35** wherein the template file comprises:
 (a) a first storage area storing said graphical representation of the locations where data fields are to be inserted; and
 (b) a second storage area storing processing instructions operable to group a plurality of pages associated with the template file.

37. The method of claim 1 wherein processing said plurality of tags further comprises:
- 5 (a) parsing the received data to determine its field structure; and
(b) generating the plurality of tags based on the field structure.
38. The method of claim 37 wherein processing said plurality of tags further comprises:
- 10 (c) displaying the plurality of tags for user selection in the graphical user interface of the generator application; and
(d) facilitating insertion of at least one tag from said plurality of tags, into at least one template file, using the graphical user interface.
39. The apparatus of claim 17 wherein the template file stores a graphical representation of locations where data fields selected from the received data are to be inserted in presentations based on the template file.
- 15
40. The apparatus of claim 39 wherein the template file comprises:
- 20 (a) a first storage area storing said graphical representation of the locations where data fields are to be inserted; and
(b) a second storage area storing processing instructions operable to group a plurality of pages associated with the template file.
41. The apparatus of claim 17 wherein the generator application is operably configured to cause the computing device to:
- 25 (a) parse the received data to determine its field structure; and
(b) generate the plurality of tags based on the field structure.
42. The apparatus of claim 41 wherein the generator application is operably configured to cause the computing device to:
- 30 (c) display at least some of the plurality of tags for user selection in a graphical user interface of the generator application, to

facilitate insertion of at least one tag from said plurality of tags,
into at least one template file, using the graphical user interface.

- 5 **43.** The method of claim 1 further comprising executing a desktop
application of the computer device to provide a presentation based on
the presentation file.
- 10 **44.** The method of claim 17 wherein the computing device is operably
configured to execute a desktop application to provide a presentation
based on the presentation file.

1/38

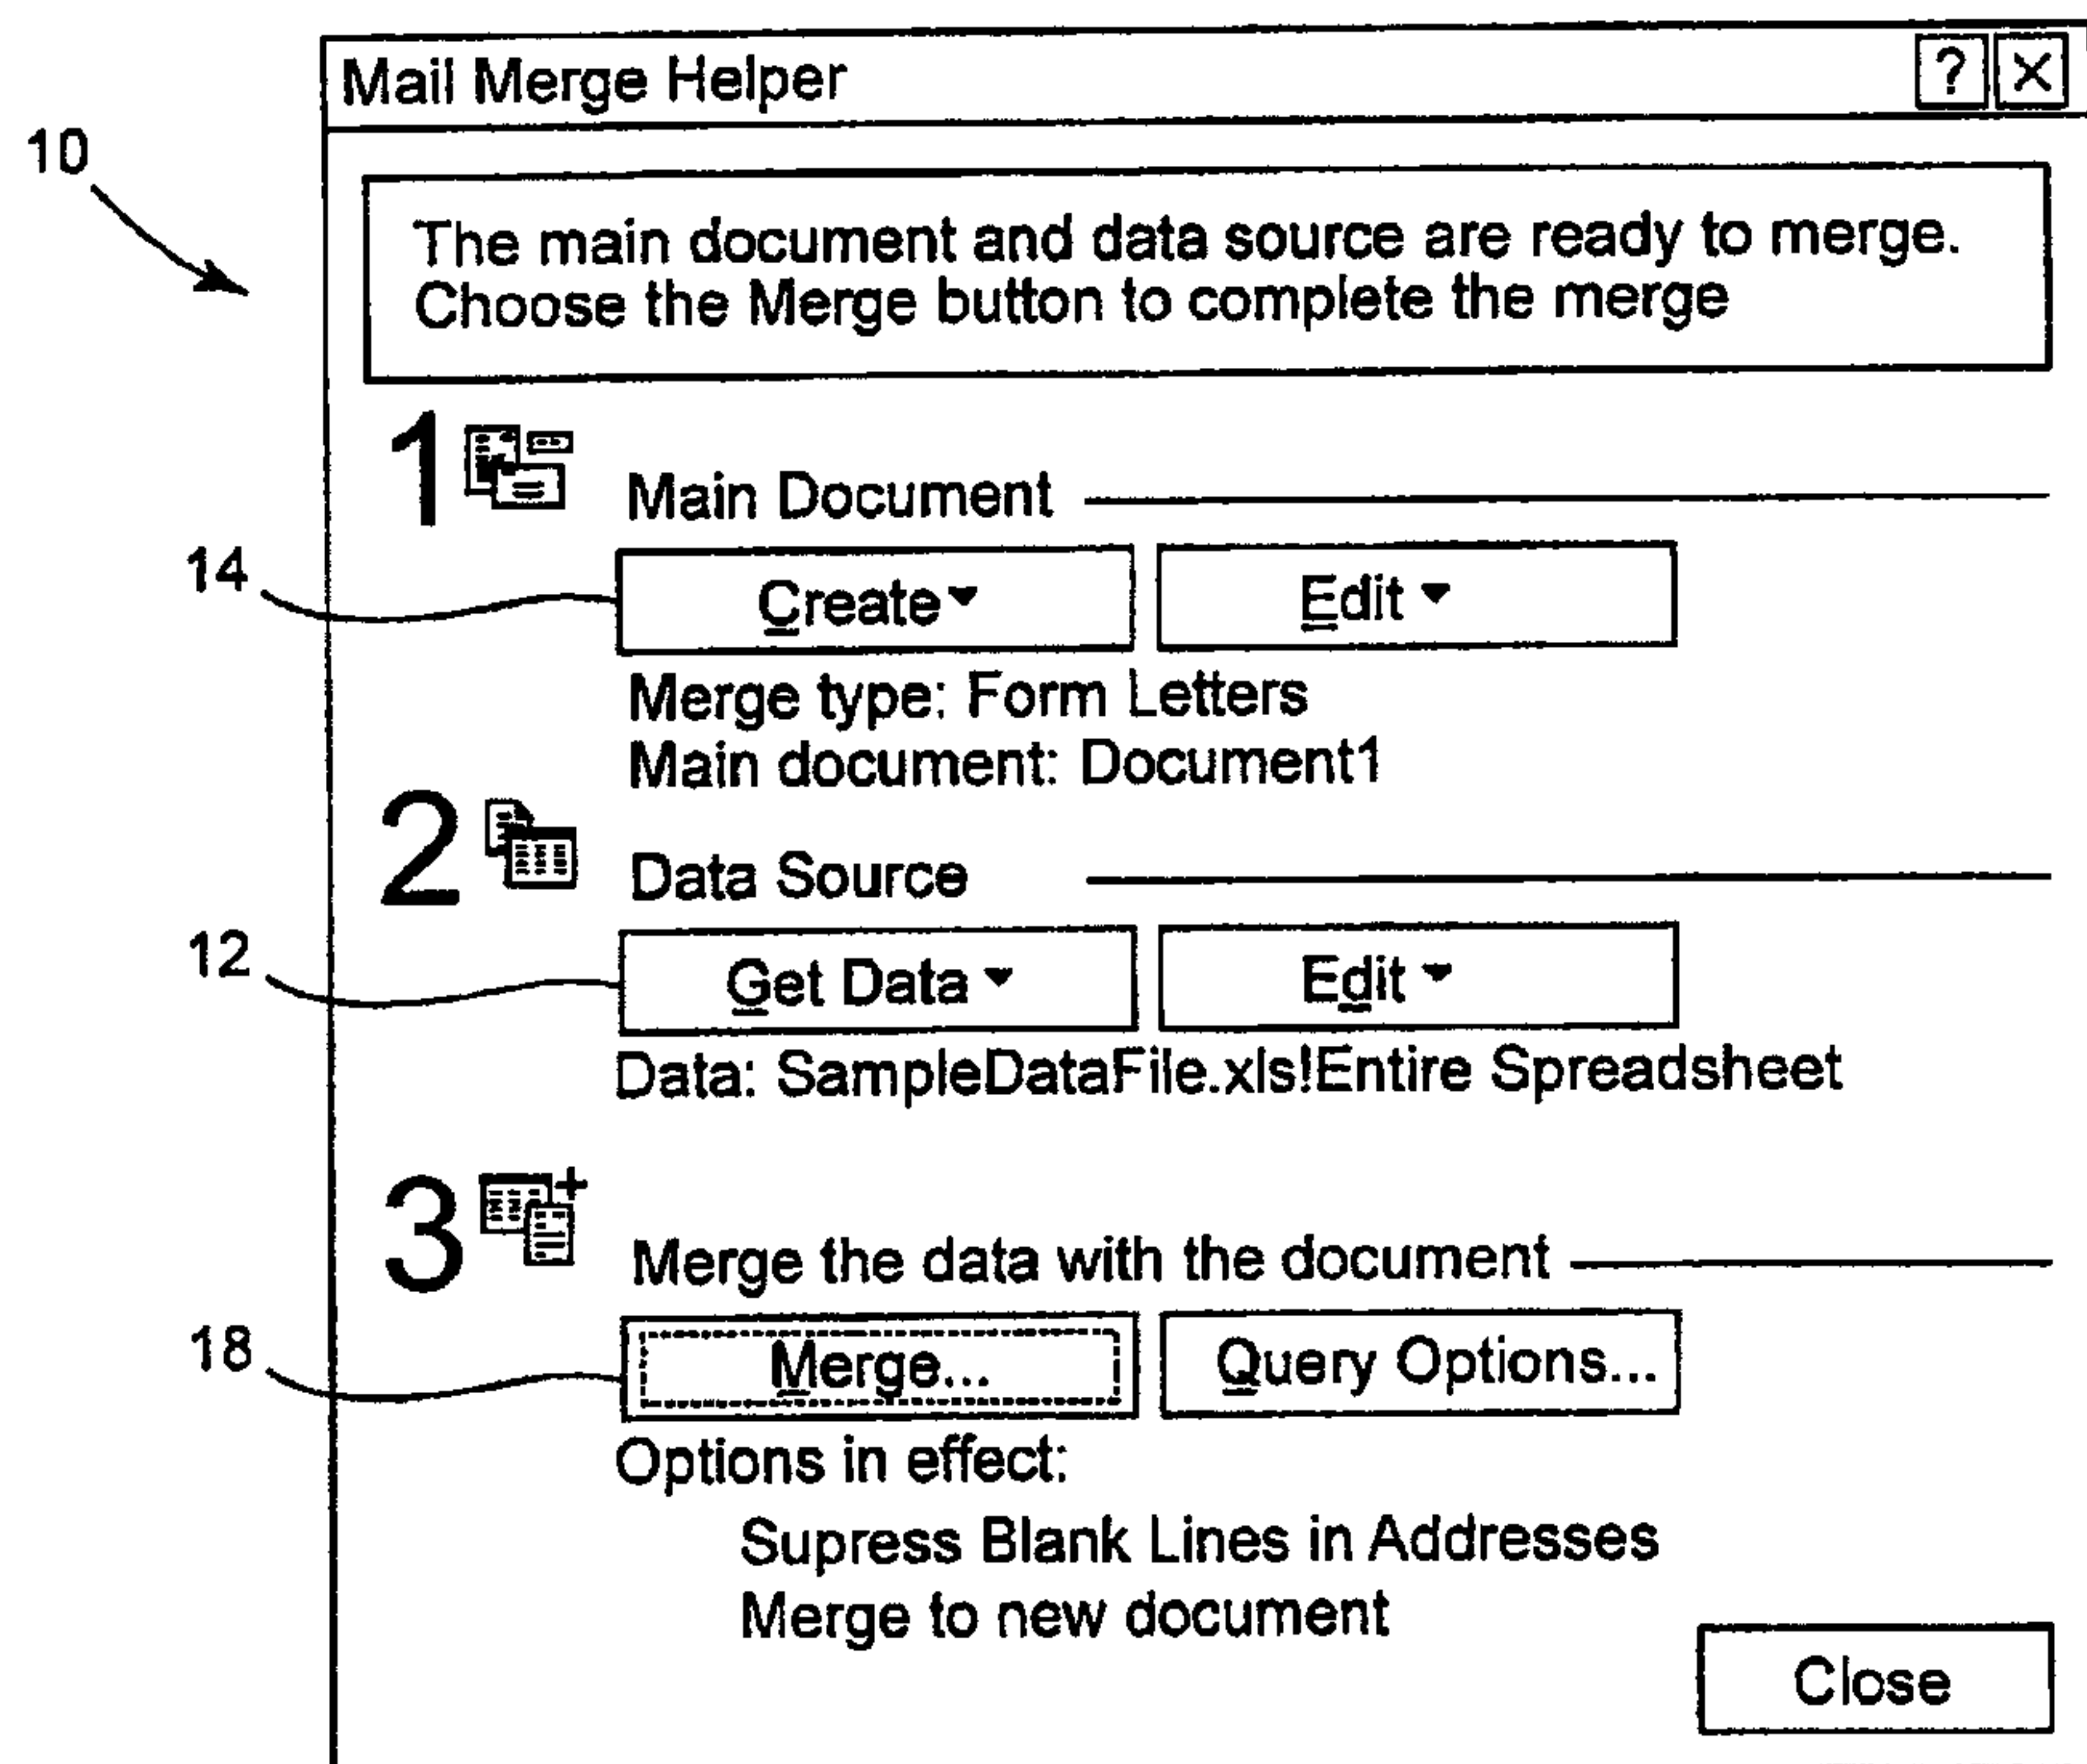


Fig. 1
Prior Art

2/38

20

The screenshot shows a Microsoft Excel window titled 'Microsoft Excel - SampleDataFile.xls'. The menu bar includes File, Edit, View, Insert, Format, Tools, Data, Window, and Help. The formula bar shows 'G5' and an equals sign. The spreadsheet has columns A through G. The data is as follows:

	A	B	C	D	E	F	G
1	Name	Address	City	State	ZIP	Country	Phone
2	Steven Lieske	2321 Girard Ave South	Minneapolis	MN	55405	USA	621-111-2222
3	Mike Bennett	1400 West Franklin Ave.	Minneapolis	MN	55105	USA	
4	Dylan Bert	123 Mettler Road	Houston	TX	77777	USA	111-222-3333
5	Madison Bert	456 Richmond Avenue	Houston	TX	88888	USA	
6							
7							


The status bar at the bottom shows 'Ready' and 'Sheet1'.

Excel Data File

Fig. 2

Prior art

3/38

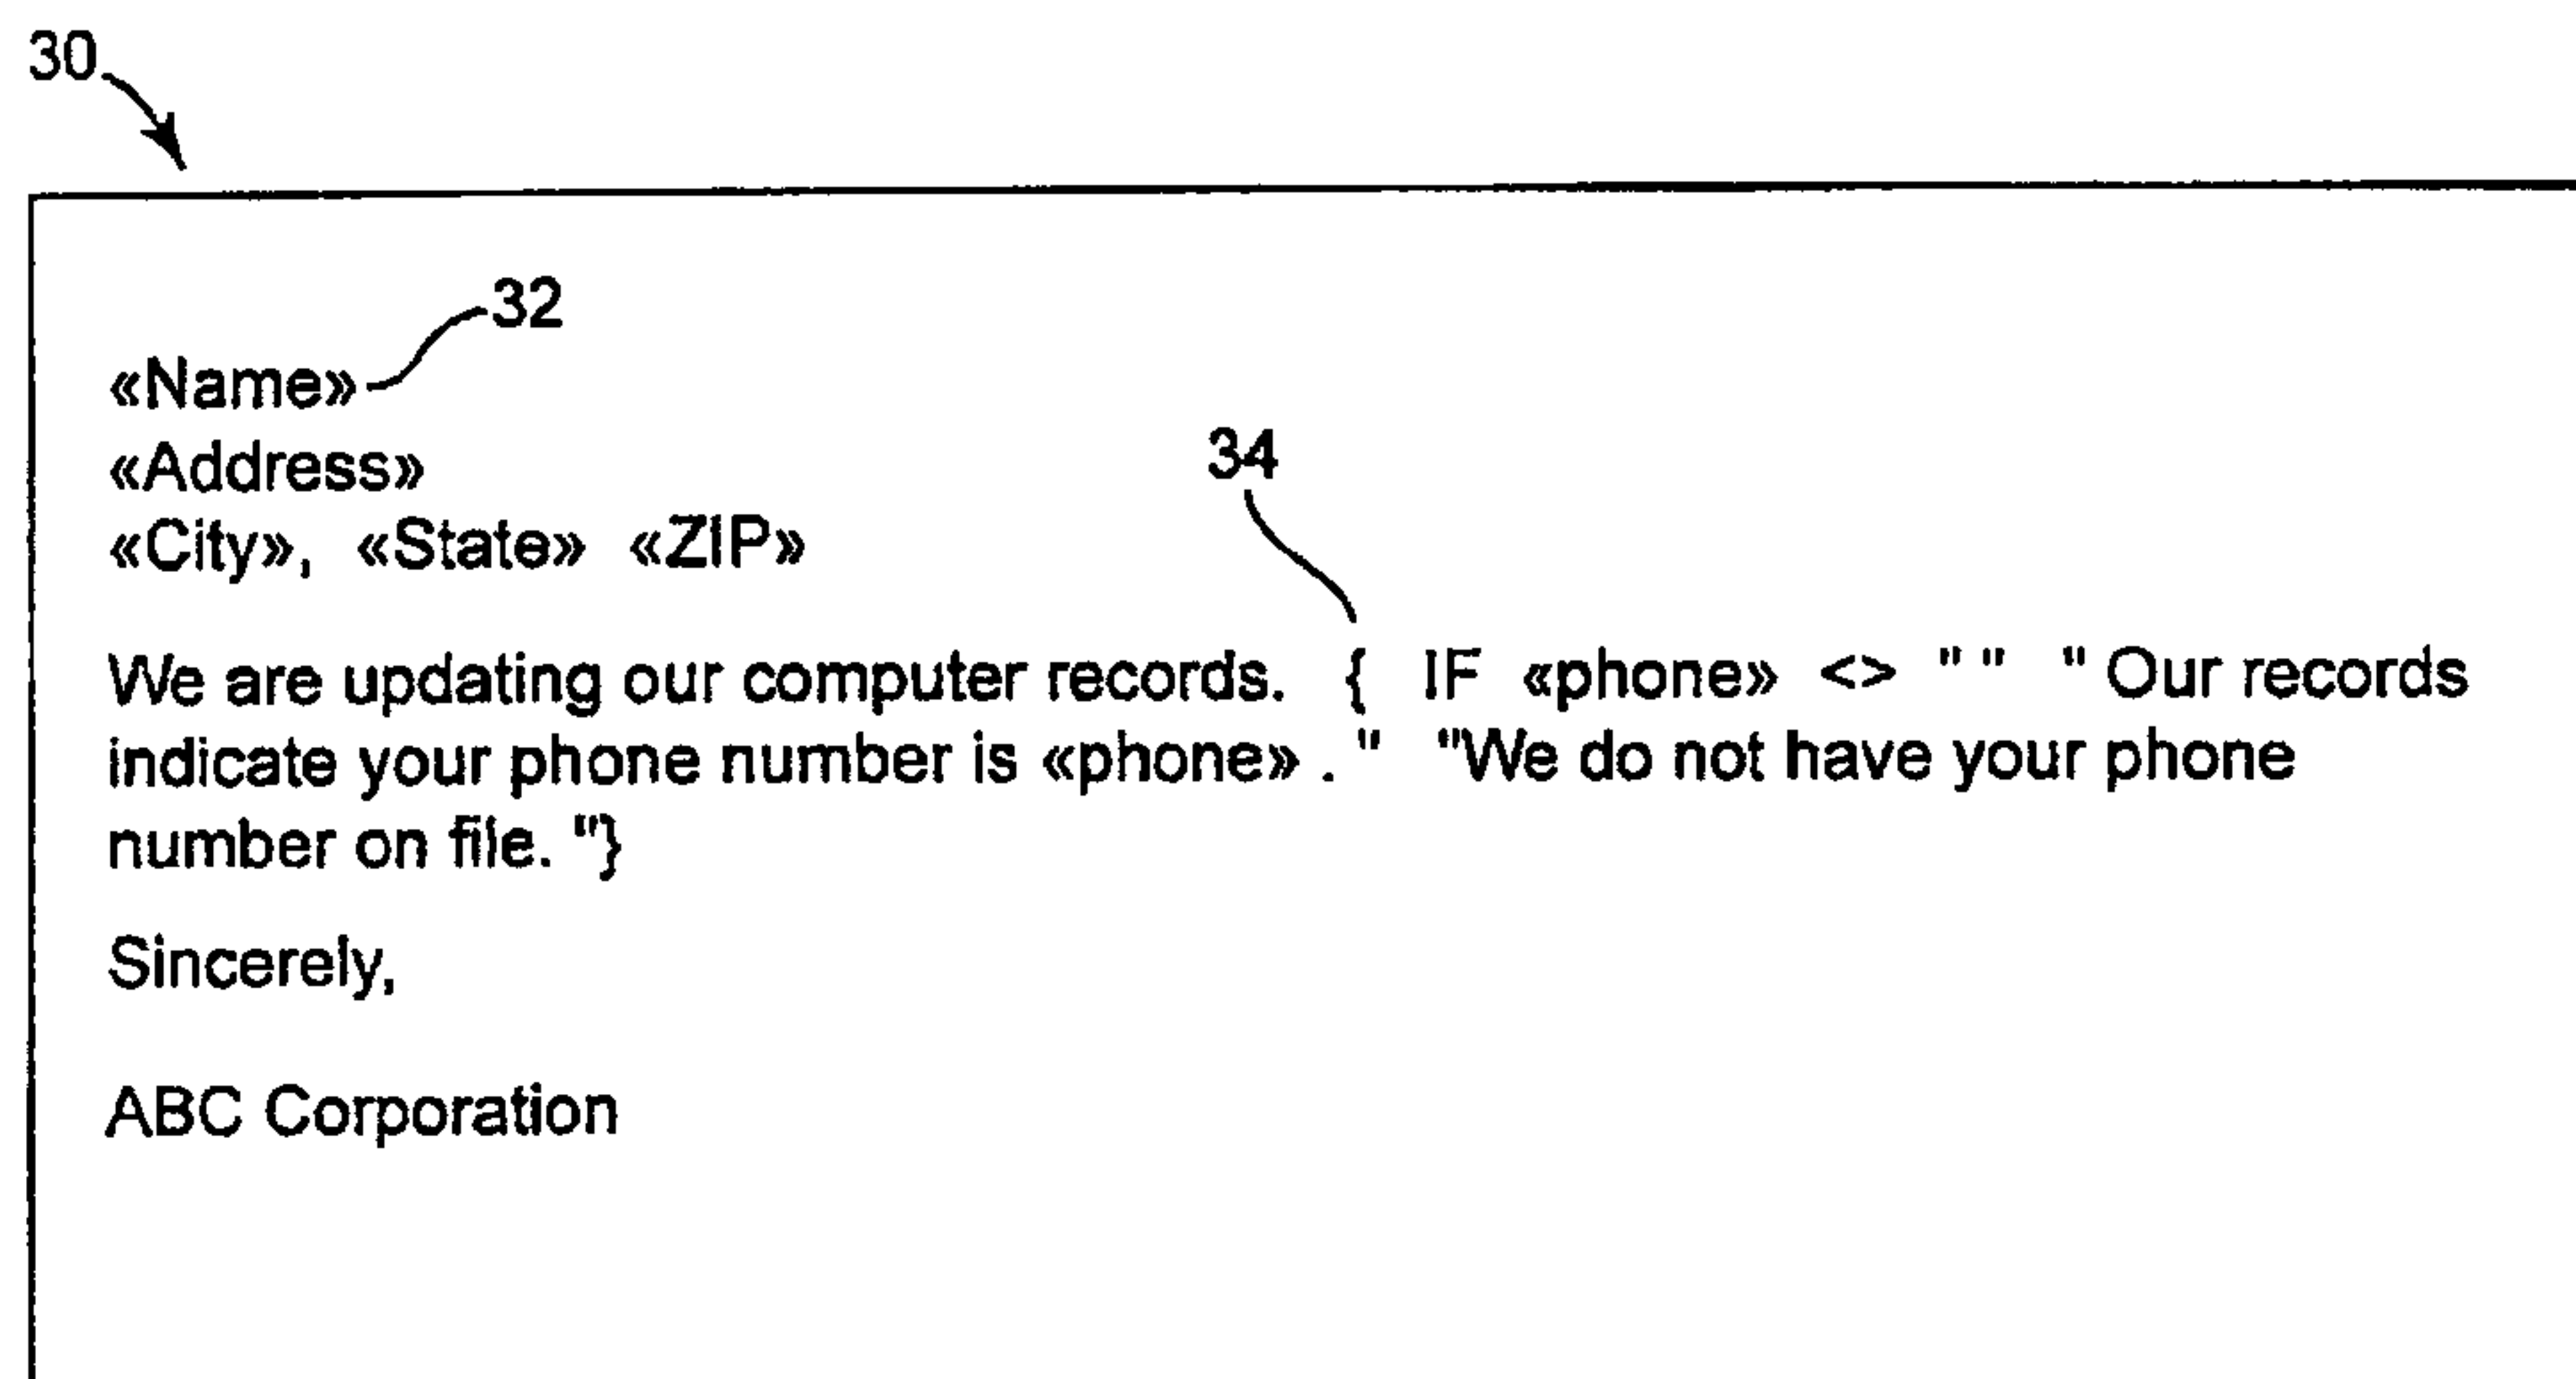

Template Letter

Fig. 3
Prior Art

4/38

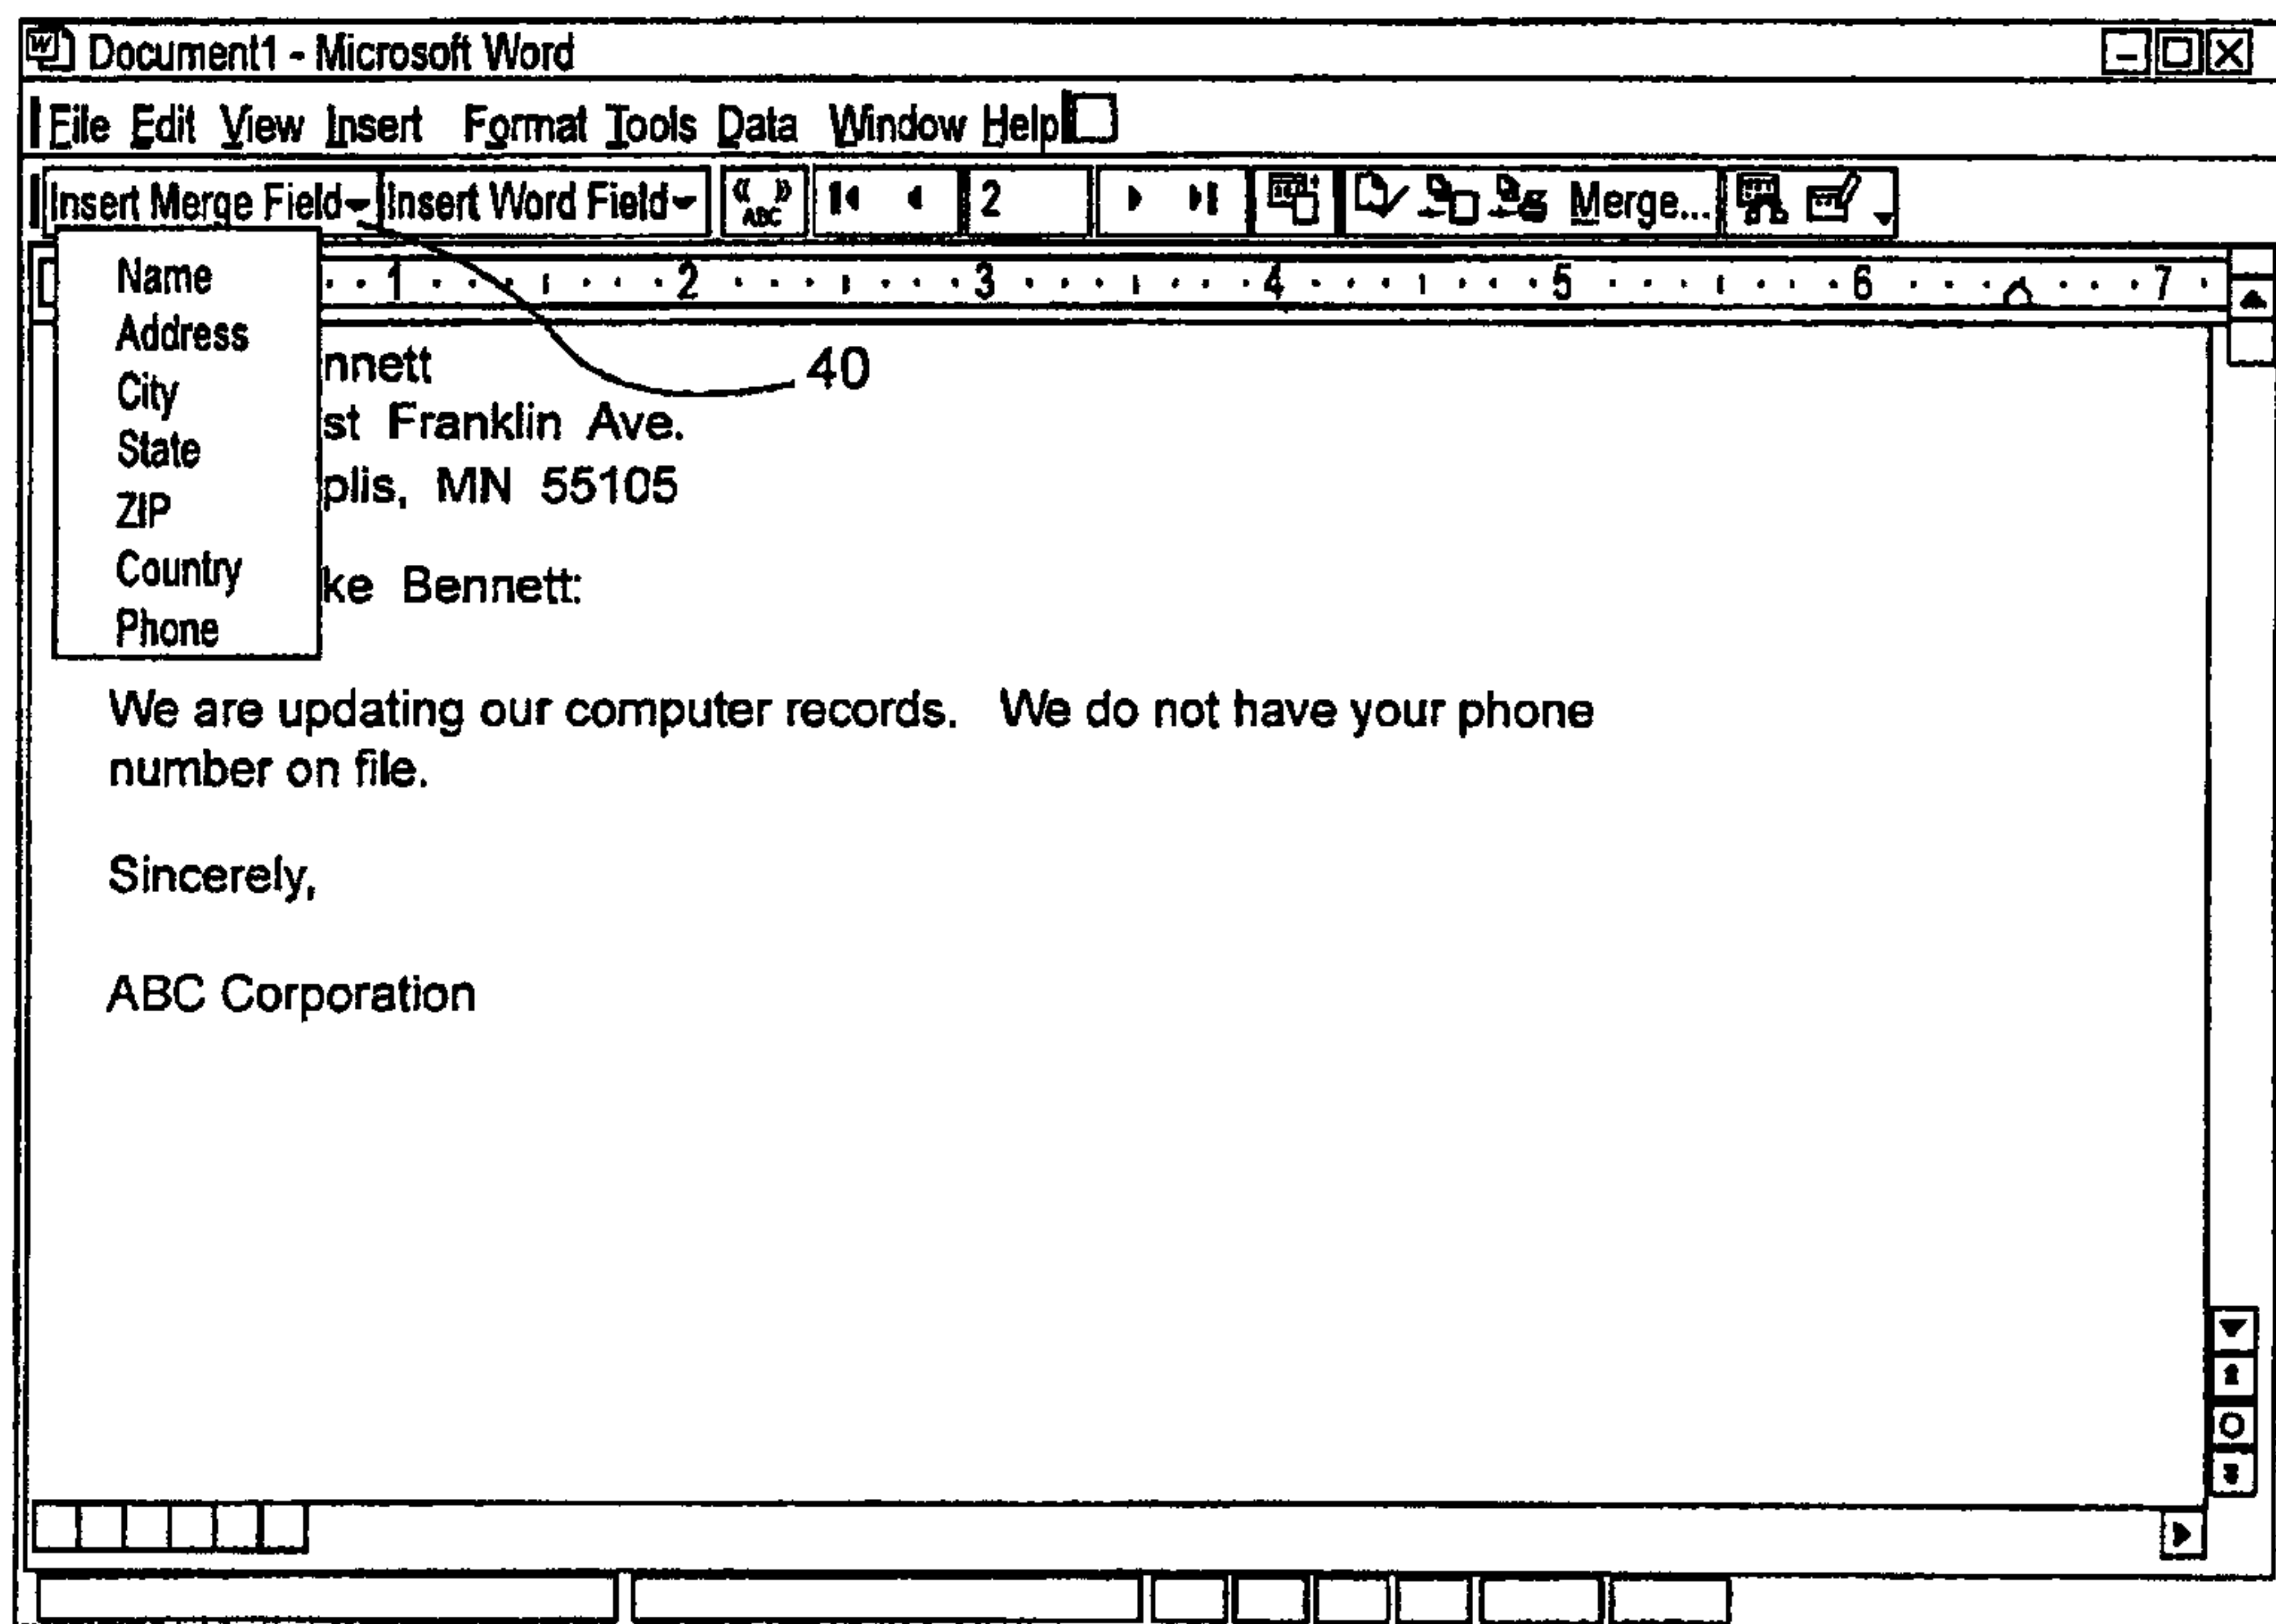


Fig. 4
Prior art

5/38

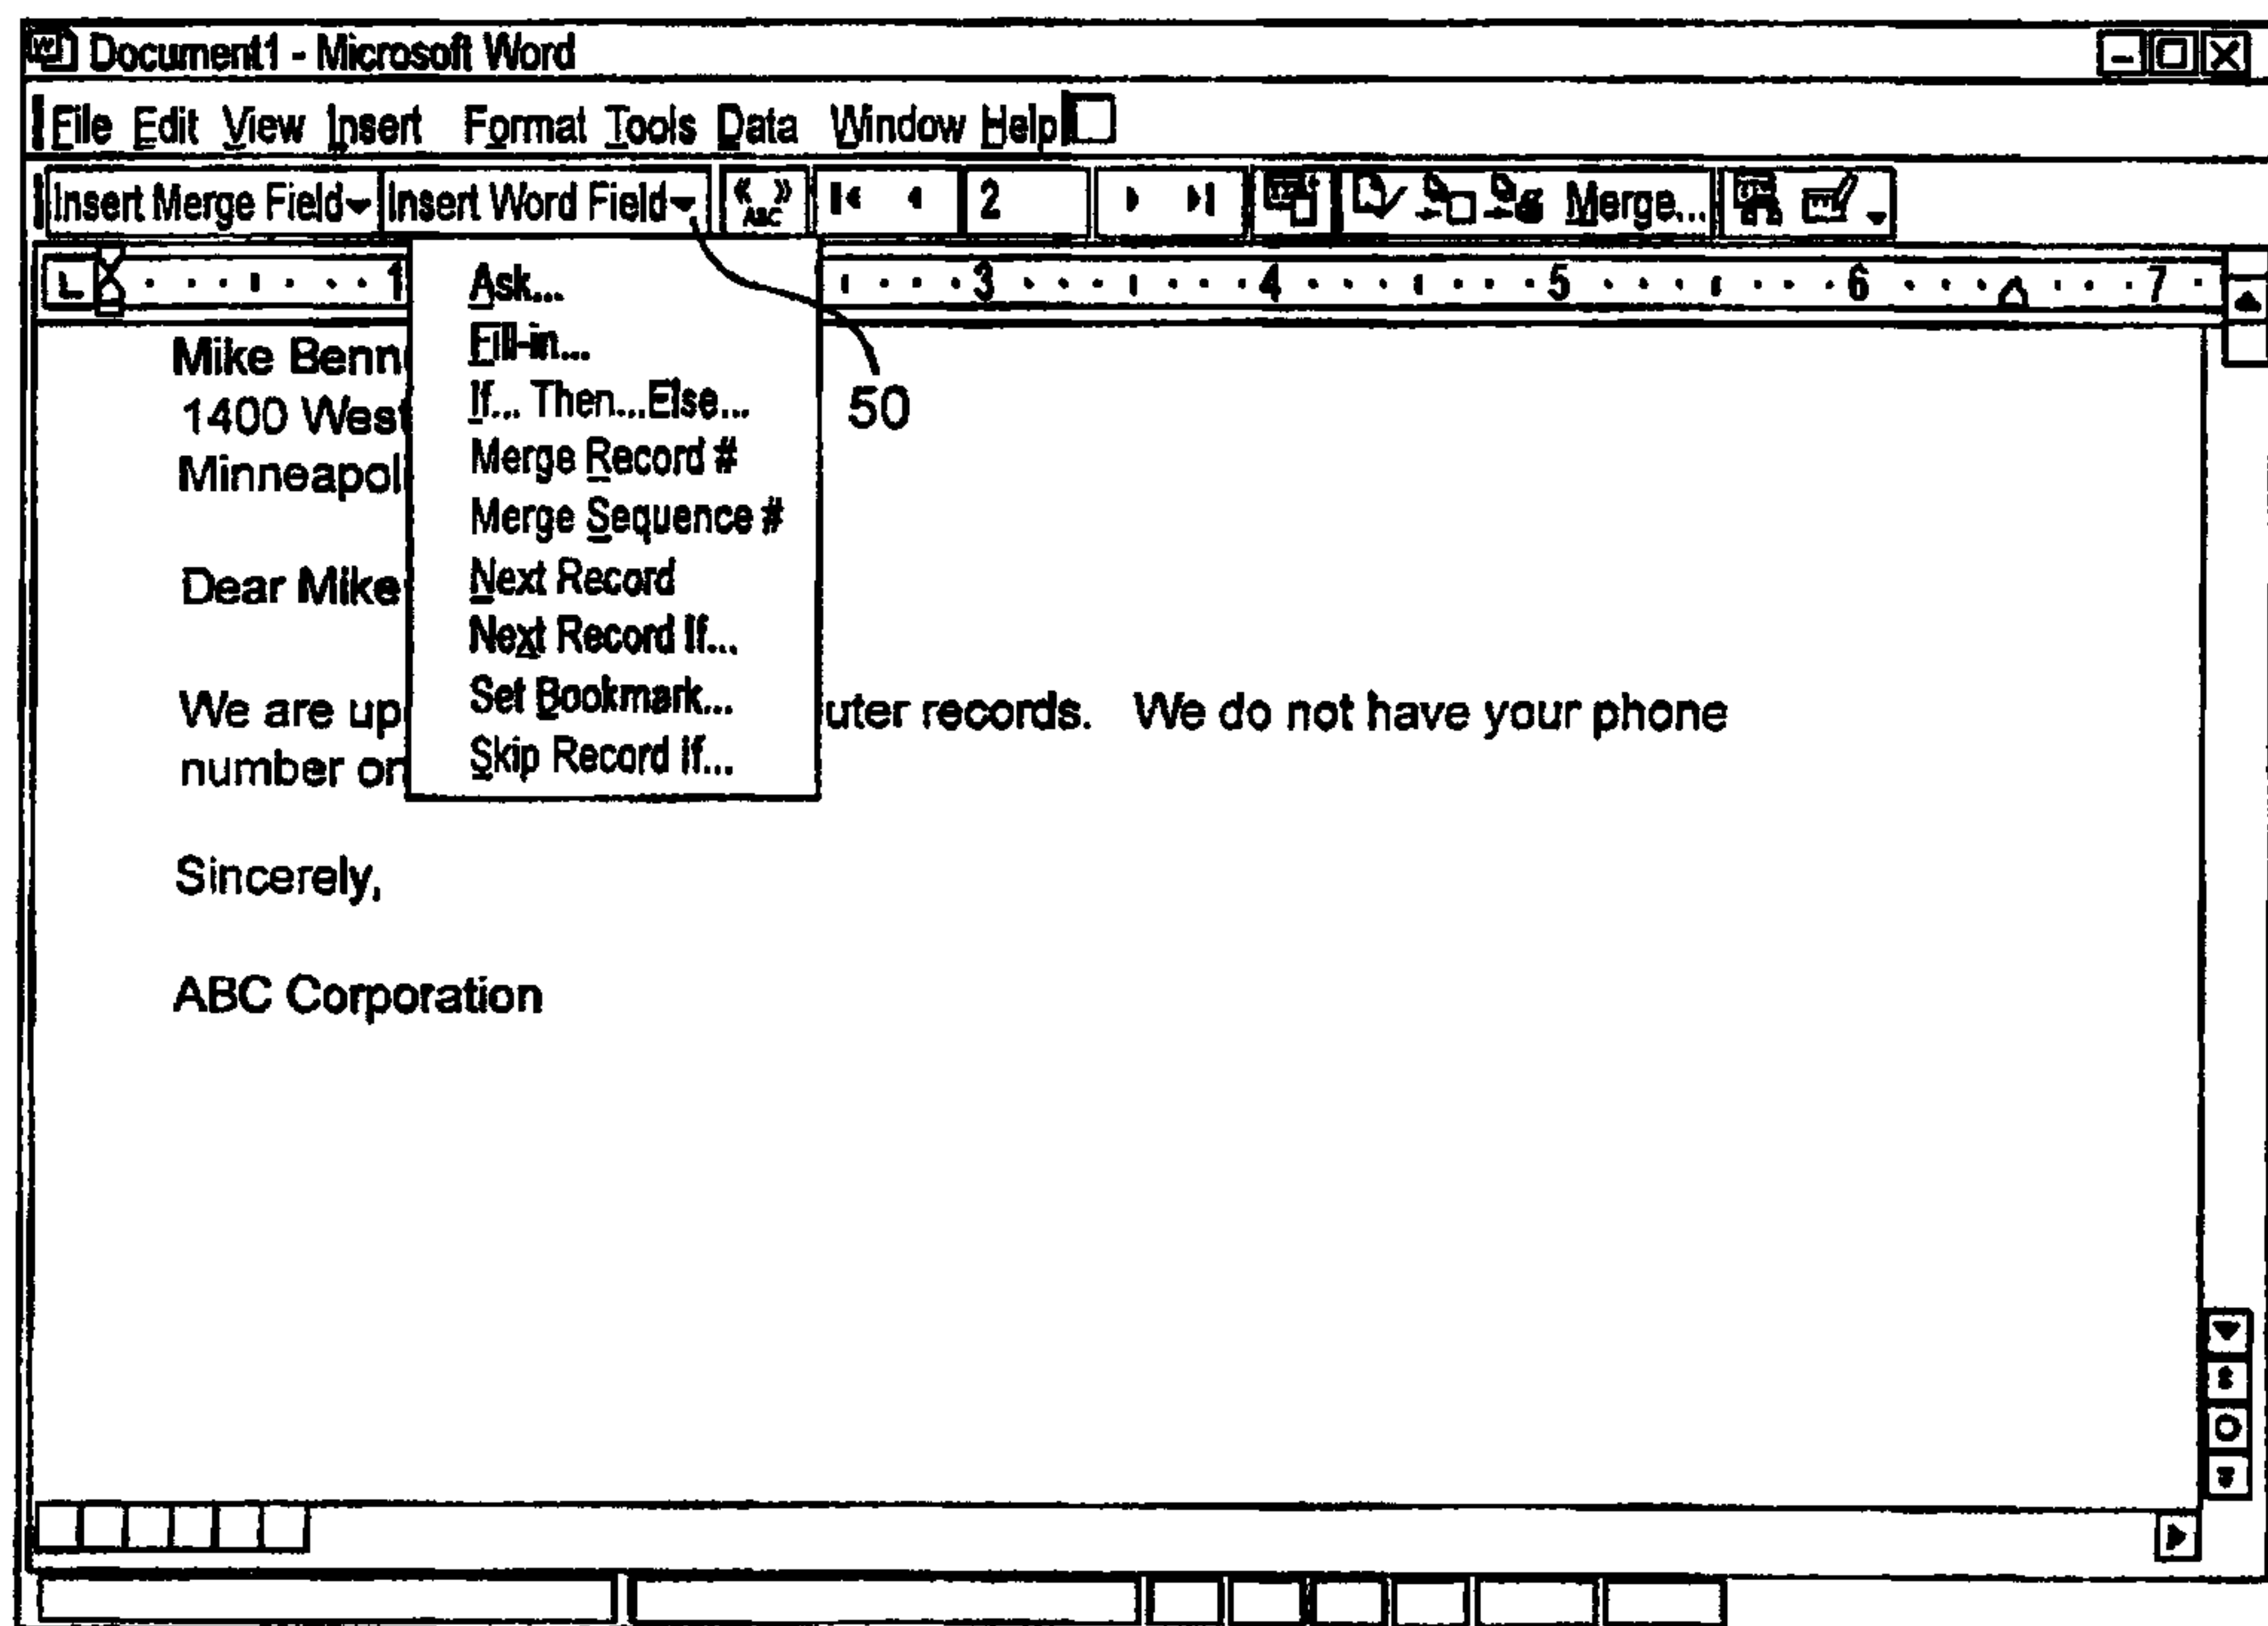


Fig. 5
Prior art

6/38

60

Query Options

Filter Records Sort Records

	Field:	Comparison:	Compare to:
	State	Equal to	MN
And			

OK Cancel Clear All

Fig. 6
Prior Art

7/38

70

Query Options

Filter Records Sort Records

Sort by
Name ☒ Ascending ☐ Descending

Then by
 ☒ Ascending ☐ Descending

Then by
 ☒ Ascending ☐ Descending

OK Cancel Clear All

Fig. 7
Prior Art

8/38

80 →

1400 West Franklin Ave.
Minneapolis, MN 55105

Dear Mike Bennett:

We are updating our computer records. We do not have
your phone number on file.


Sincerely,

ABC Corporation

Generated Form Letter

Fig. 8
Prior Art

9/38

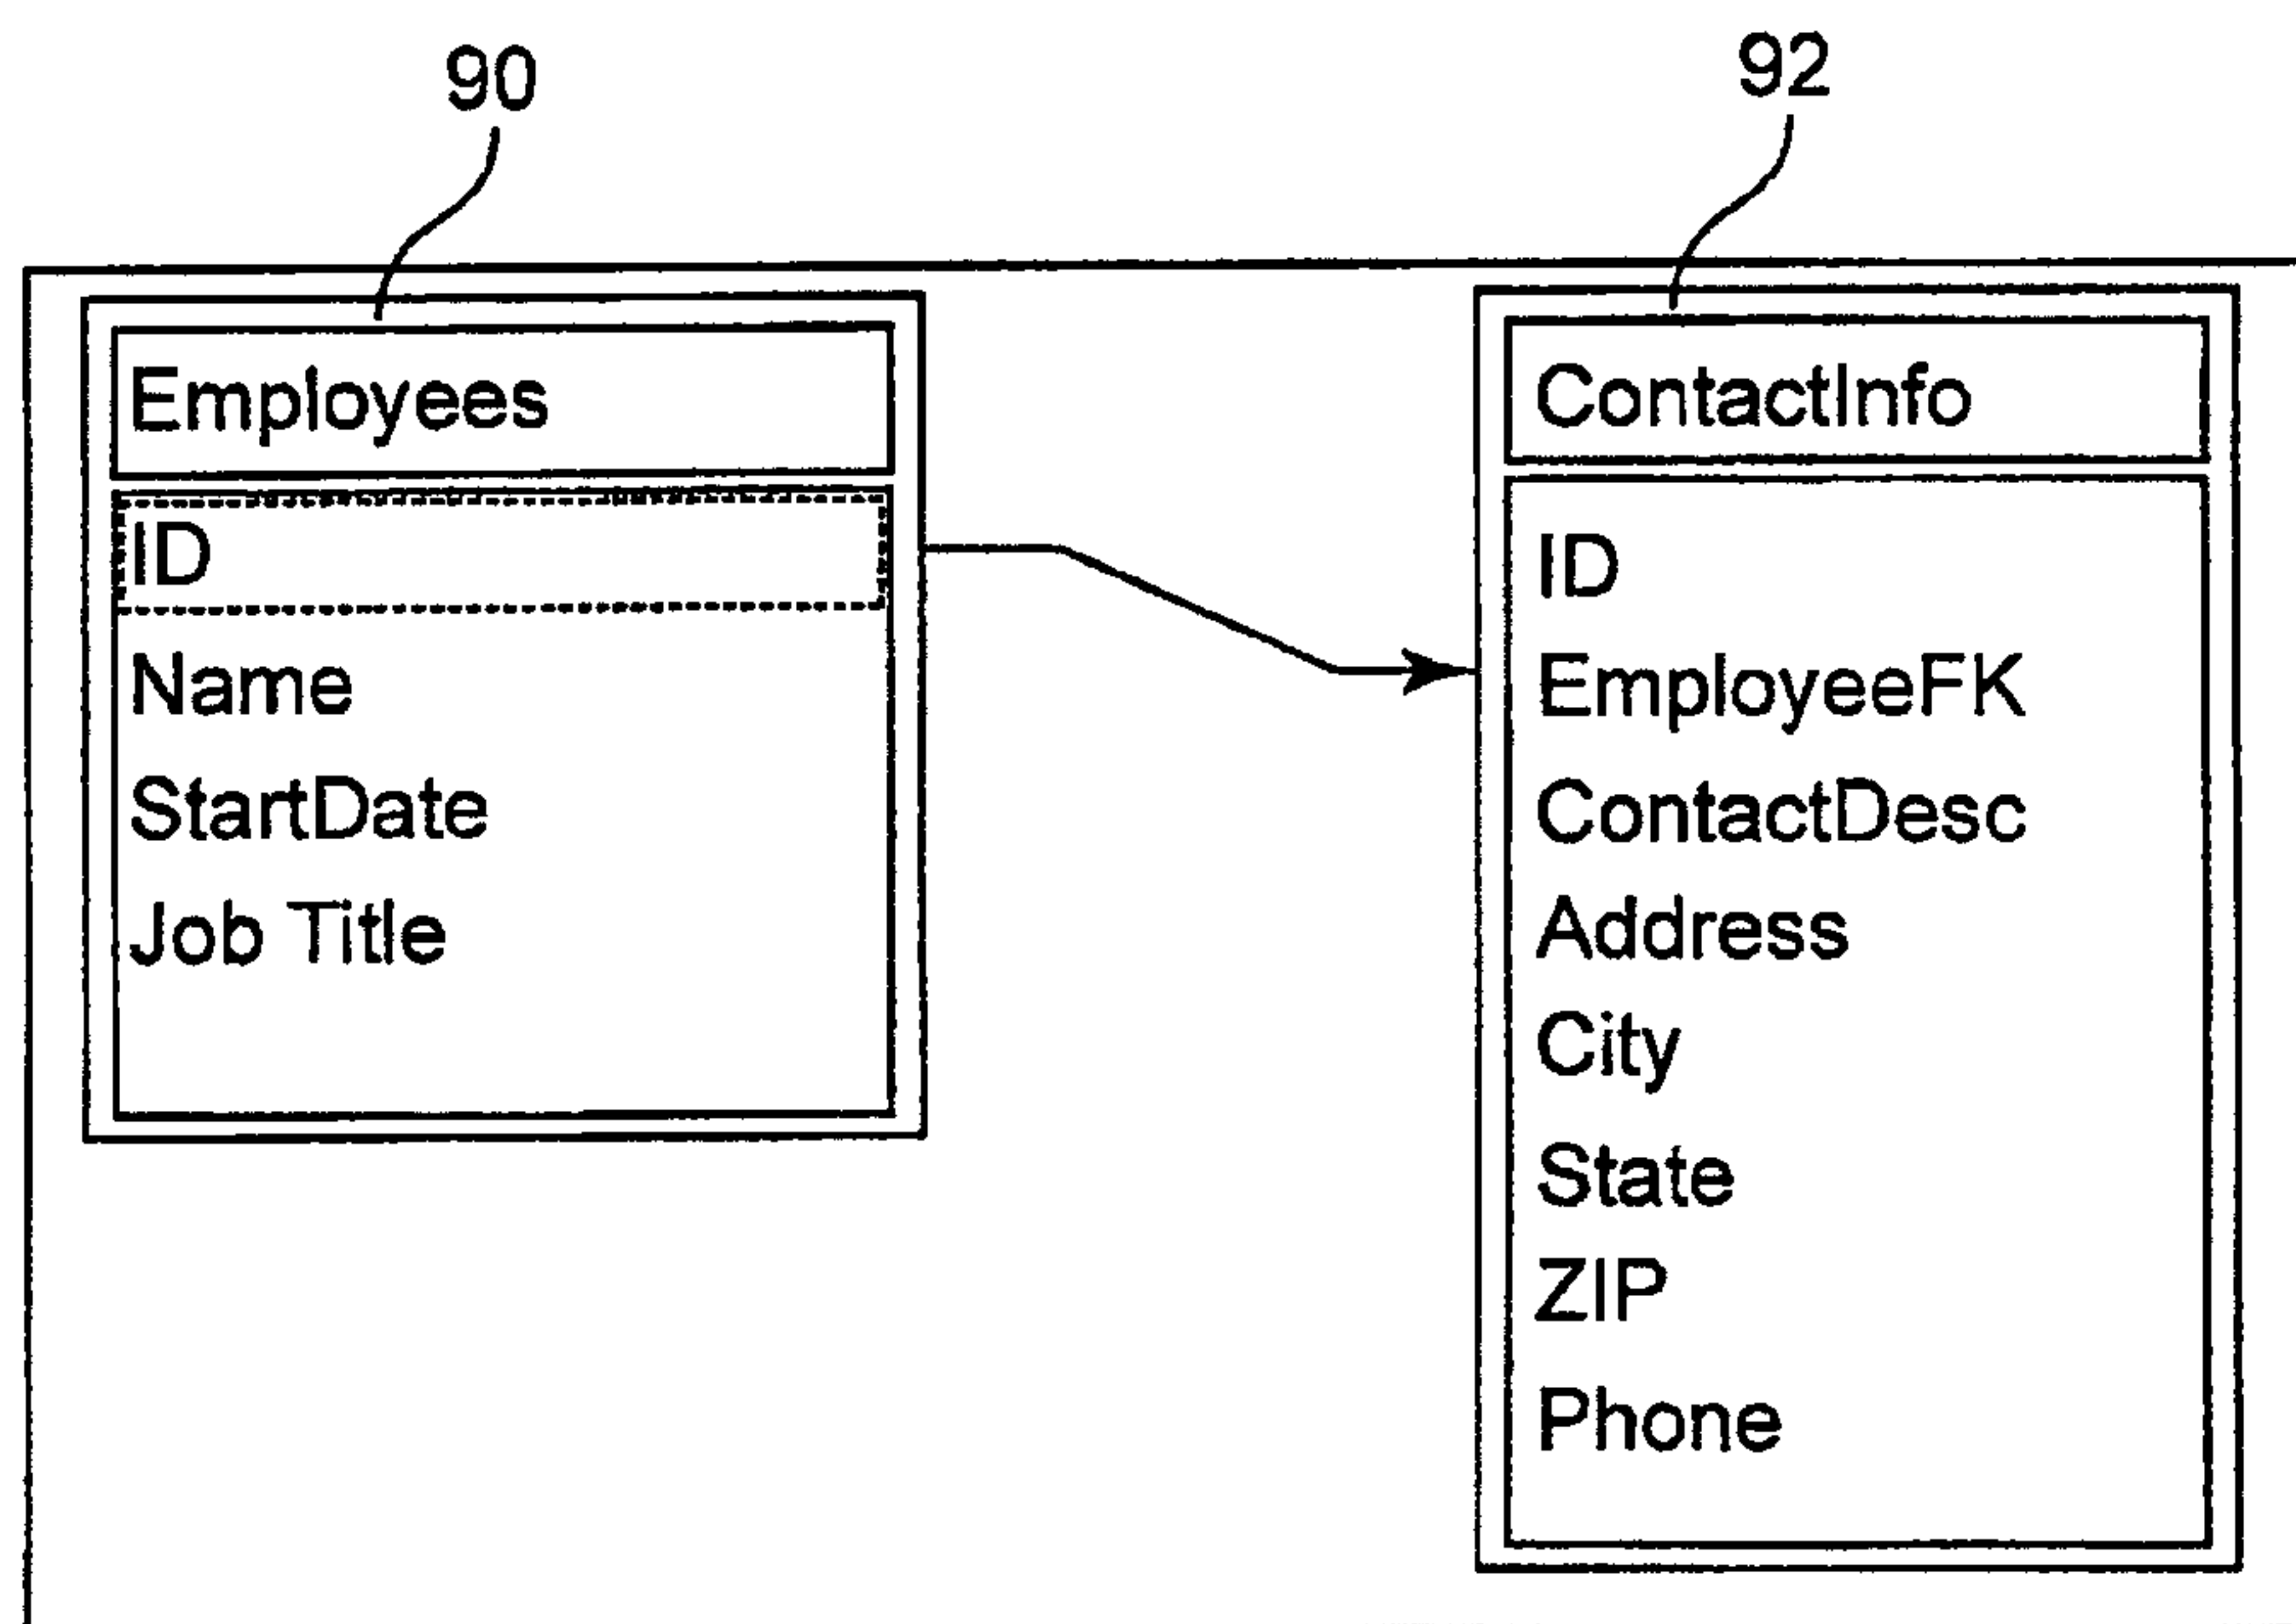

Access Relationships

Fig. 9
Prior Art

10/38

100

Employees: Table					
		ID	Name	StartDate	Job Title
▷	+		1 Steven Lieske	6/1/2000	Senior Associate
	+		2 Mike Bennett	8/1/2003	Associate
*		(AutoNumber)			

Access Table

102

ContactInfo: Table								
	ID	EmployeeFK	ContactDesc	Address	City	State	ZIP	Phone
▷		1	Home Address	2321 Girard Ave. South	Minneapolis	MN	55405	612-111-2222
	2	1	Work Address	45 South 7th St.	Minneapolis	MN	55402	612-333-4444
	3	1	Vacation House	1901 Highway 1	Minneapolis	MN	55333	123-333-4444
	4	2	Home	1400 West Franklin Ave.	Minneapolis	MN	55105	
	5	2	Work	35 East 38th St.	Minneapolis	MN	55832	612-838-9228
*	(AutoNumber)	0						

Access Table

Fig. 10
Prior Art

11/38

112

EmployeeReport

Name

Steven Lieske

StartDate

6/1/2000

Job Title

Senior Associate

ContactDesc

Address

City

State

ZIP

Phone

Home Address

2321 Girard Ave South

Minneapolis

MN

55405

612-111-2222

Work Address

45 South 7th St.

Minneapolis

MN

55402

612-333-4444

Vacation House

1901 Highway 1

Minneapolis

MN

55333

123-333-4444

Name

Mike Bennett

StartDate

8/1/2003

Job Title

Associate

ContactDesc

Address

City

State

ZIP

Phone

Home

1400 West Franklin Ave.

Minneapolis

MN

55105

Work

35 East 38th St.

Minneapolis

MN

55832

612-838-9228

Fig. 11

12/38

120

SELECT Name, [Job Title], ContactDesc,
Address, City, State, ZIP, Phone
FROM Employees LEFTJOIN ContactInfo
On Employees.ID = ContactInfo.EmployeeFK:

Access Query

122

	Name	Job Title	ContactDesc	Address	City	State	ZIP	Phone
▷	Steven Lieske	Senior Associate	Vacation House	1901 Highway 1	Minneapolis	MN	55333	123-333-4444
	Steven Lieske	Senior Associate	Work Address	45 South 7th St.	Minneapolis	MN	55402	612-333-4444
	Steven Lieske	Senior Associate	Home Address	2321 Girard Ave. South	Minneapolis	MN	55405	612-111-2222
	Mike Bennett	Associate	Work	35 East 38th St.	Minneapolis	MN	55832	612-838-9228
	Mike Bennett	Associate	Home	1400 West Franklin Ave.	Minneapolis	MN	55105	
*								

Query Results

Fig. 12

Prior Art

13/38

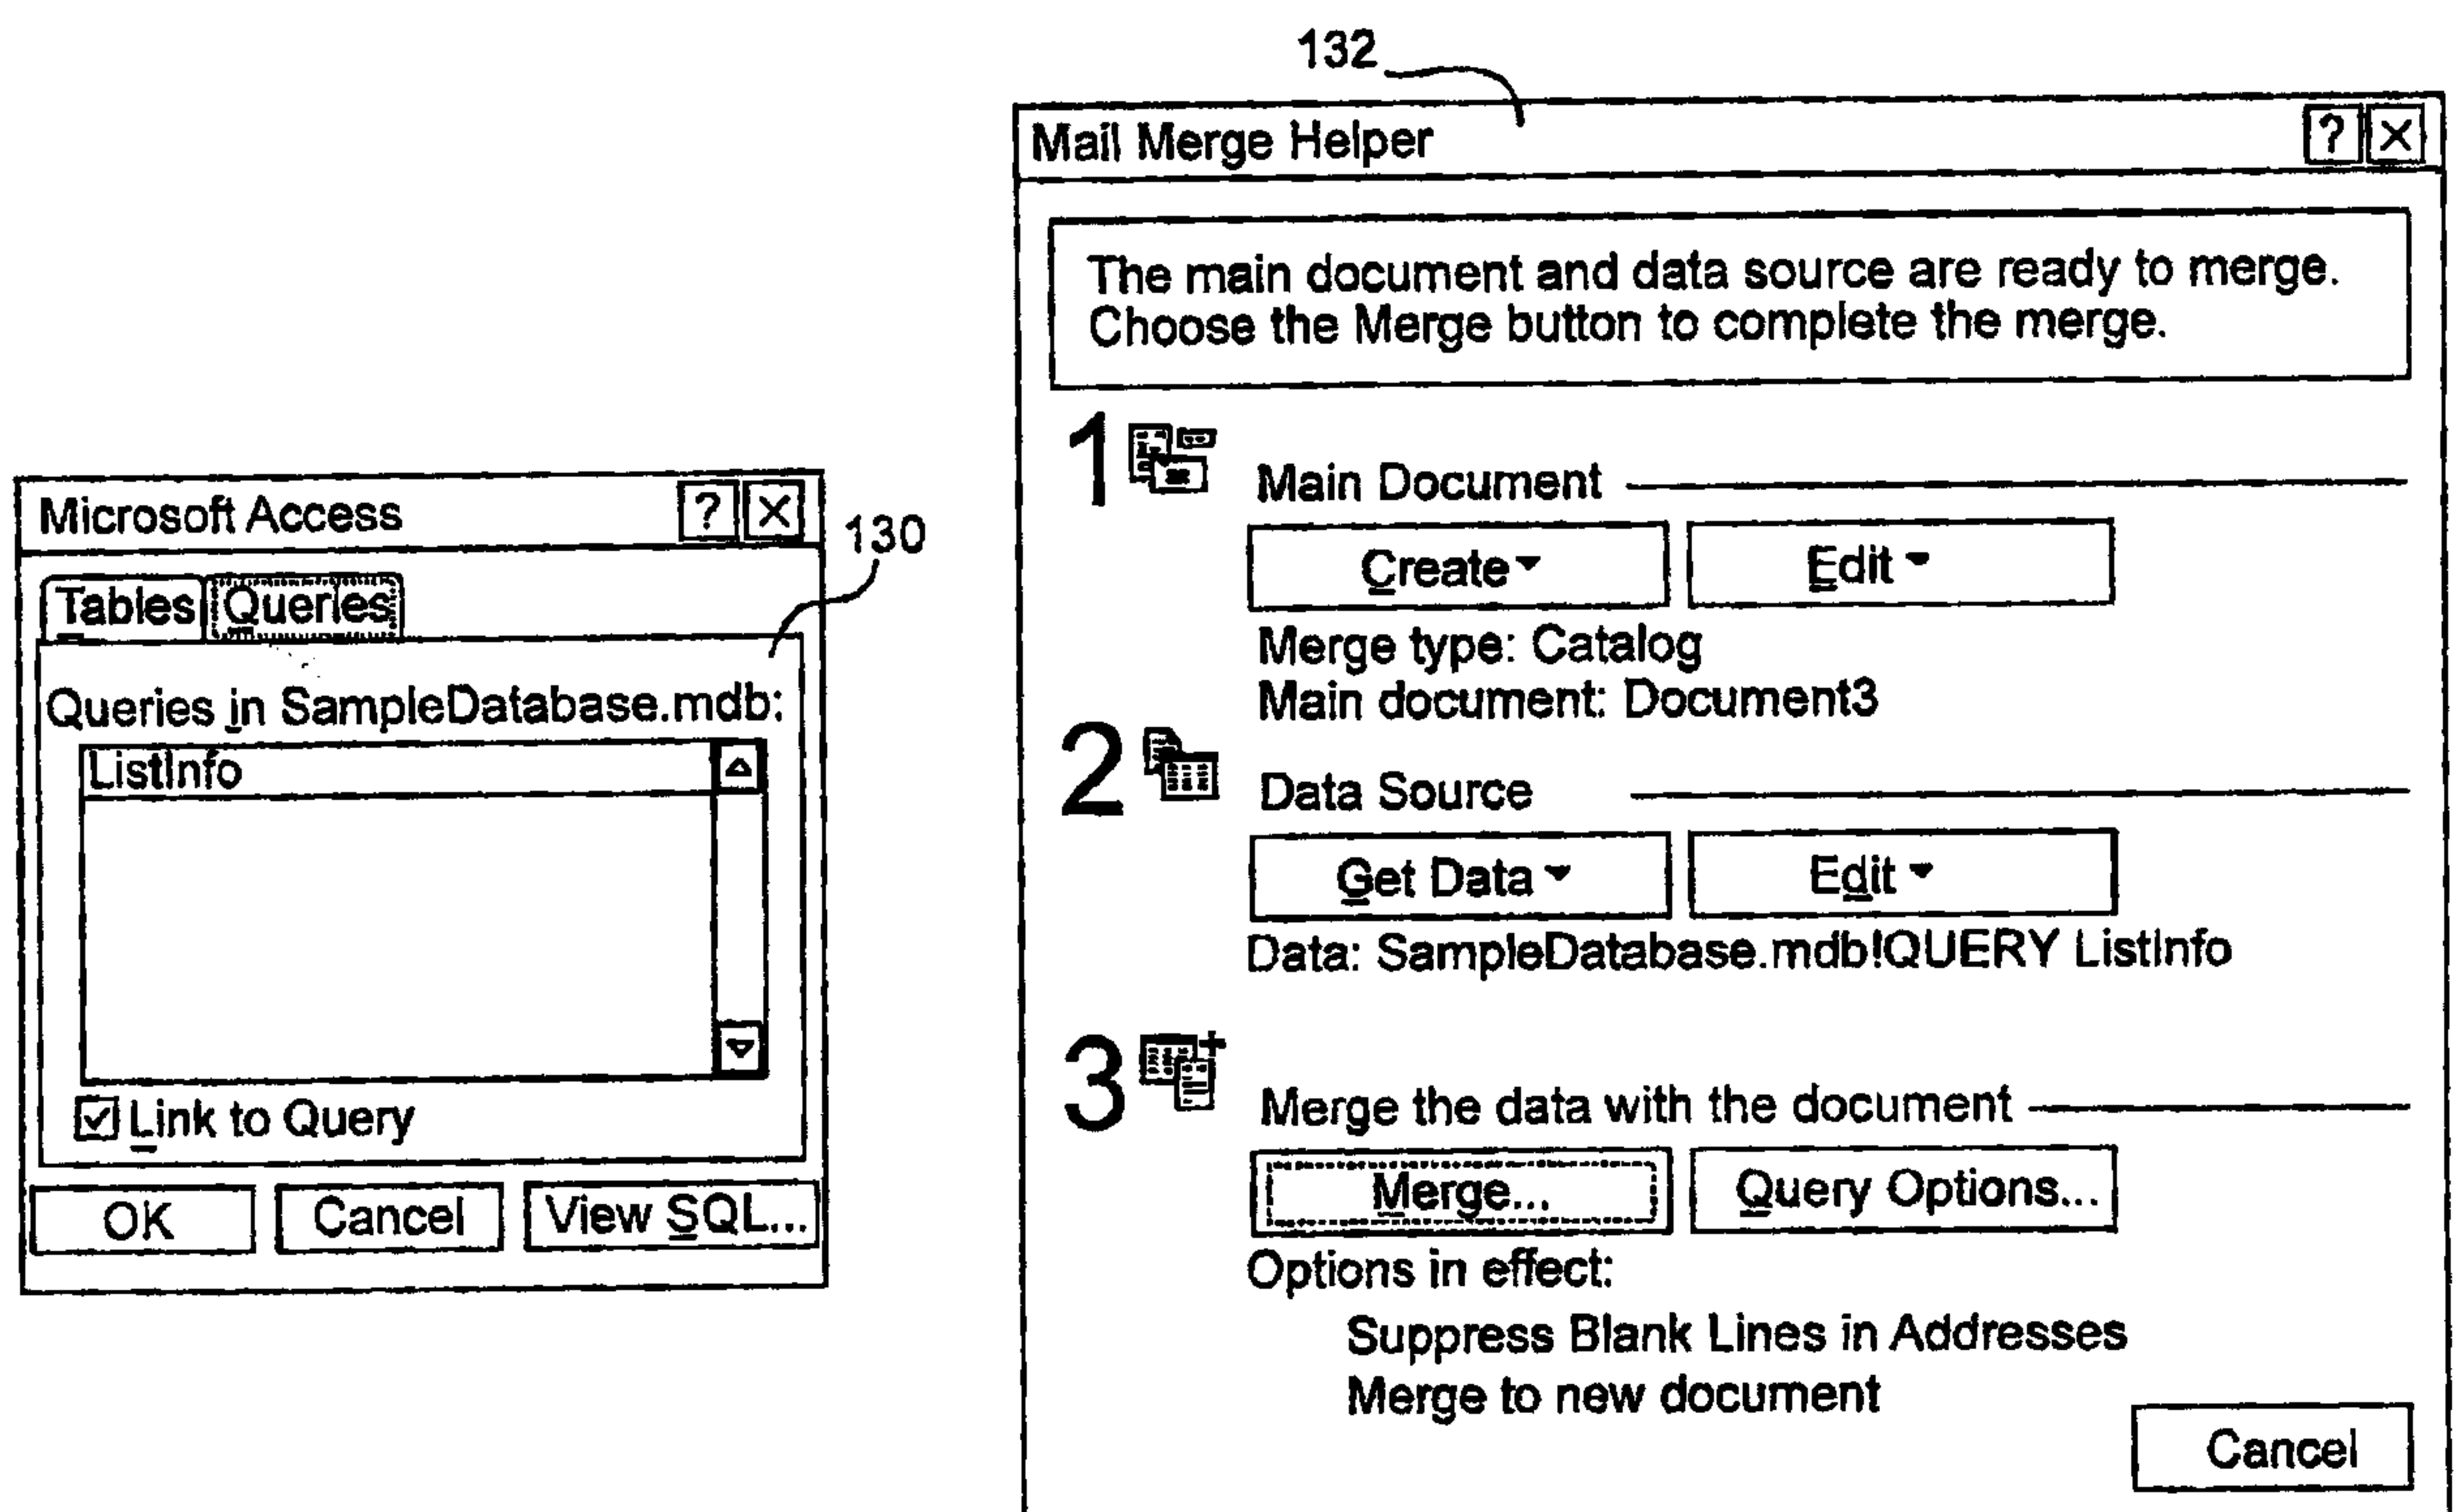


Fig. 13
Prior Art

14/38

140

+	«Name»	«Job Title»	«ContactDesc»	«Address»	«State»	«Phone»	
---	--------	-------------	---------------	-----------	---------	---------	--

Word Template

142


Steven Lieske	Senior Associate	Vacation House	1901 Highway 1	MN	123-333-4444
Steven Lieske	Senior Associate	Work Address	45 South 7th St.	MN	612-333-4444
Steven Lieske	Senior Associate	Home Address	2321 Girard Ave. South	MN	612-111-2222
Mike Bennett	Associate	Work	35 East 38th St.	MN	612-838-9228
Mike Bennett	Associate	Home	1400 West Franklin Ave.	MN	

Merged Catalog Document


Fig. 14

Prior Art


15/38

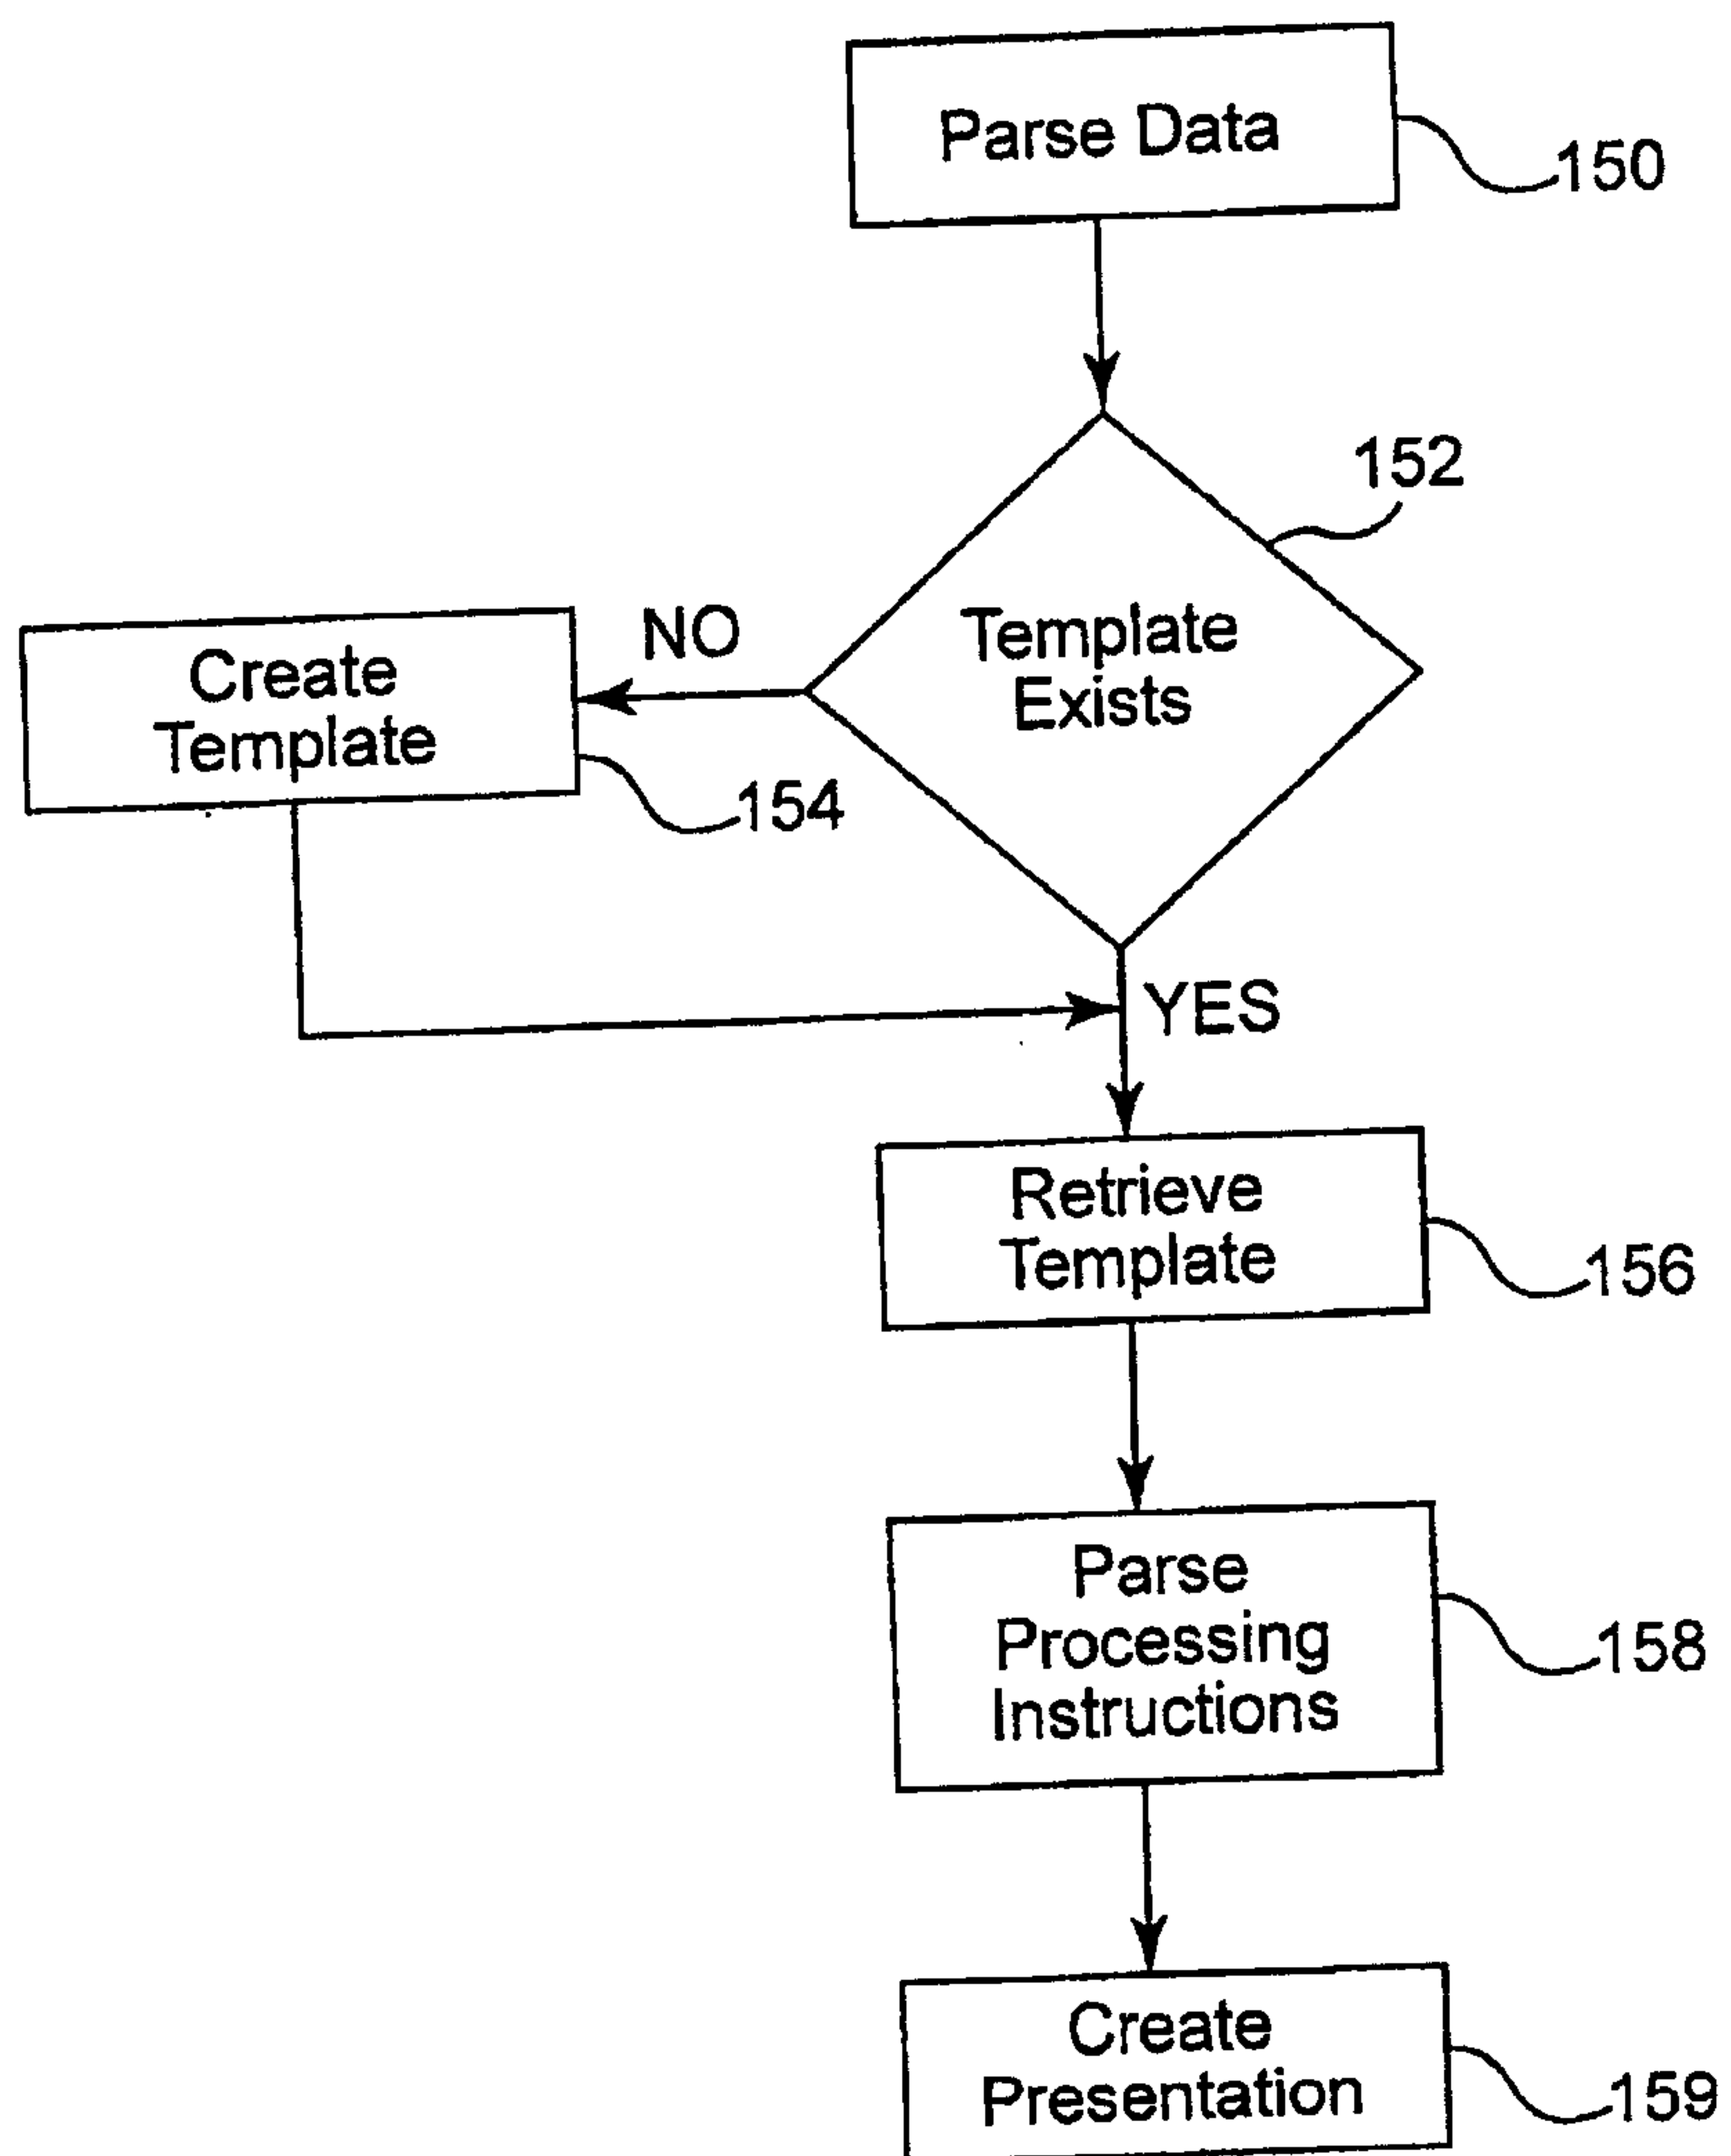**Fig. 15**


16/38

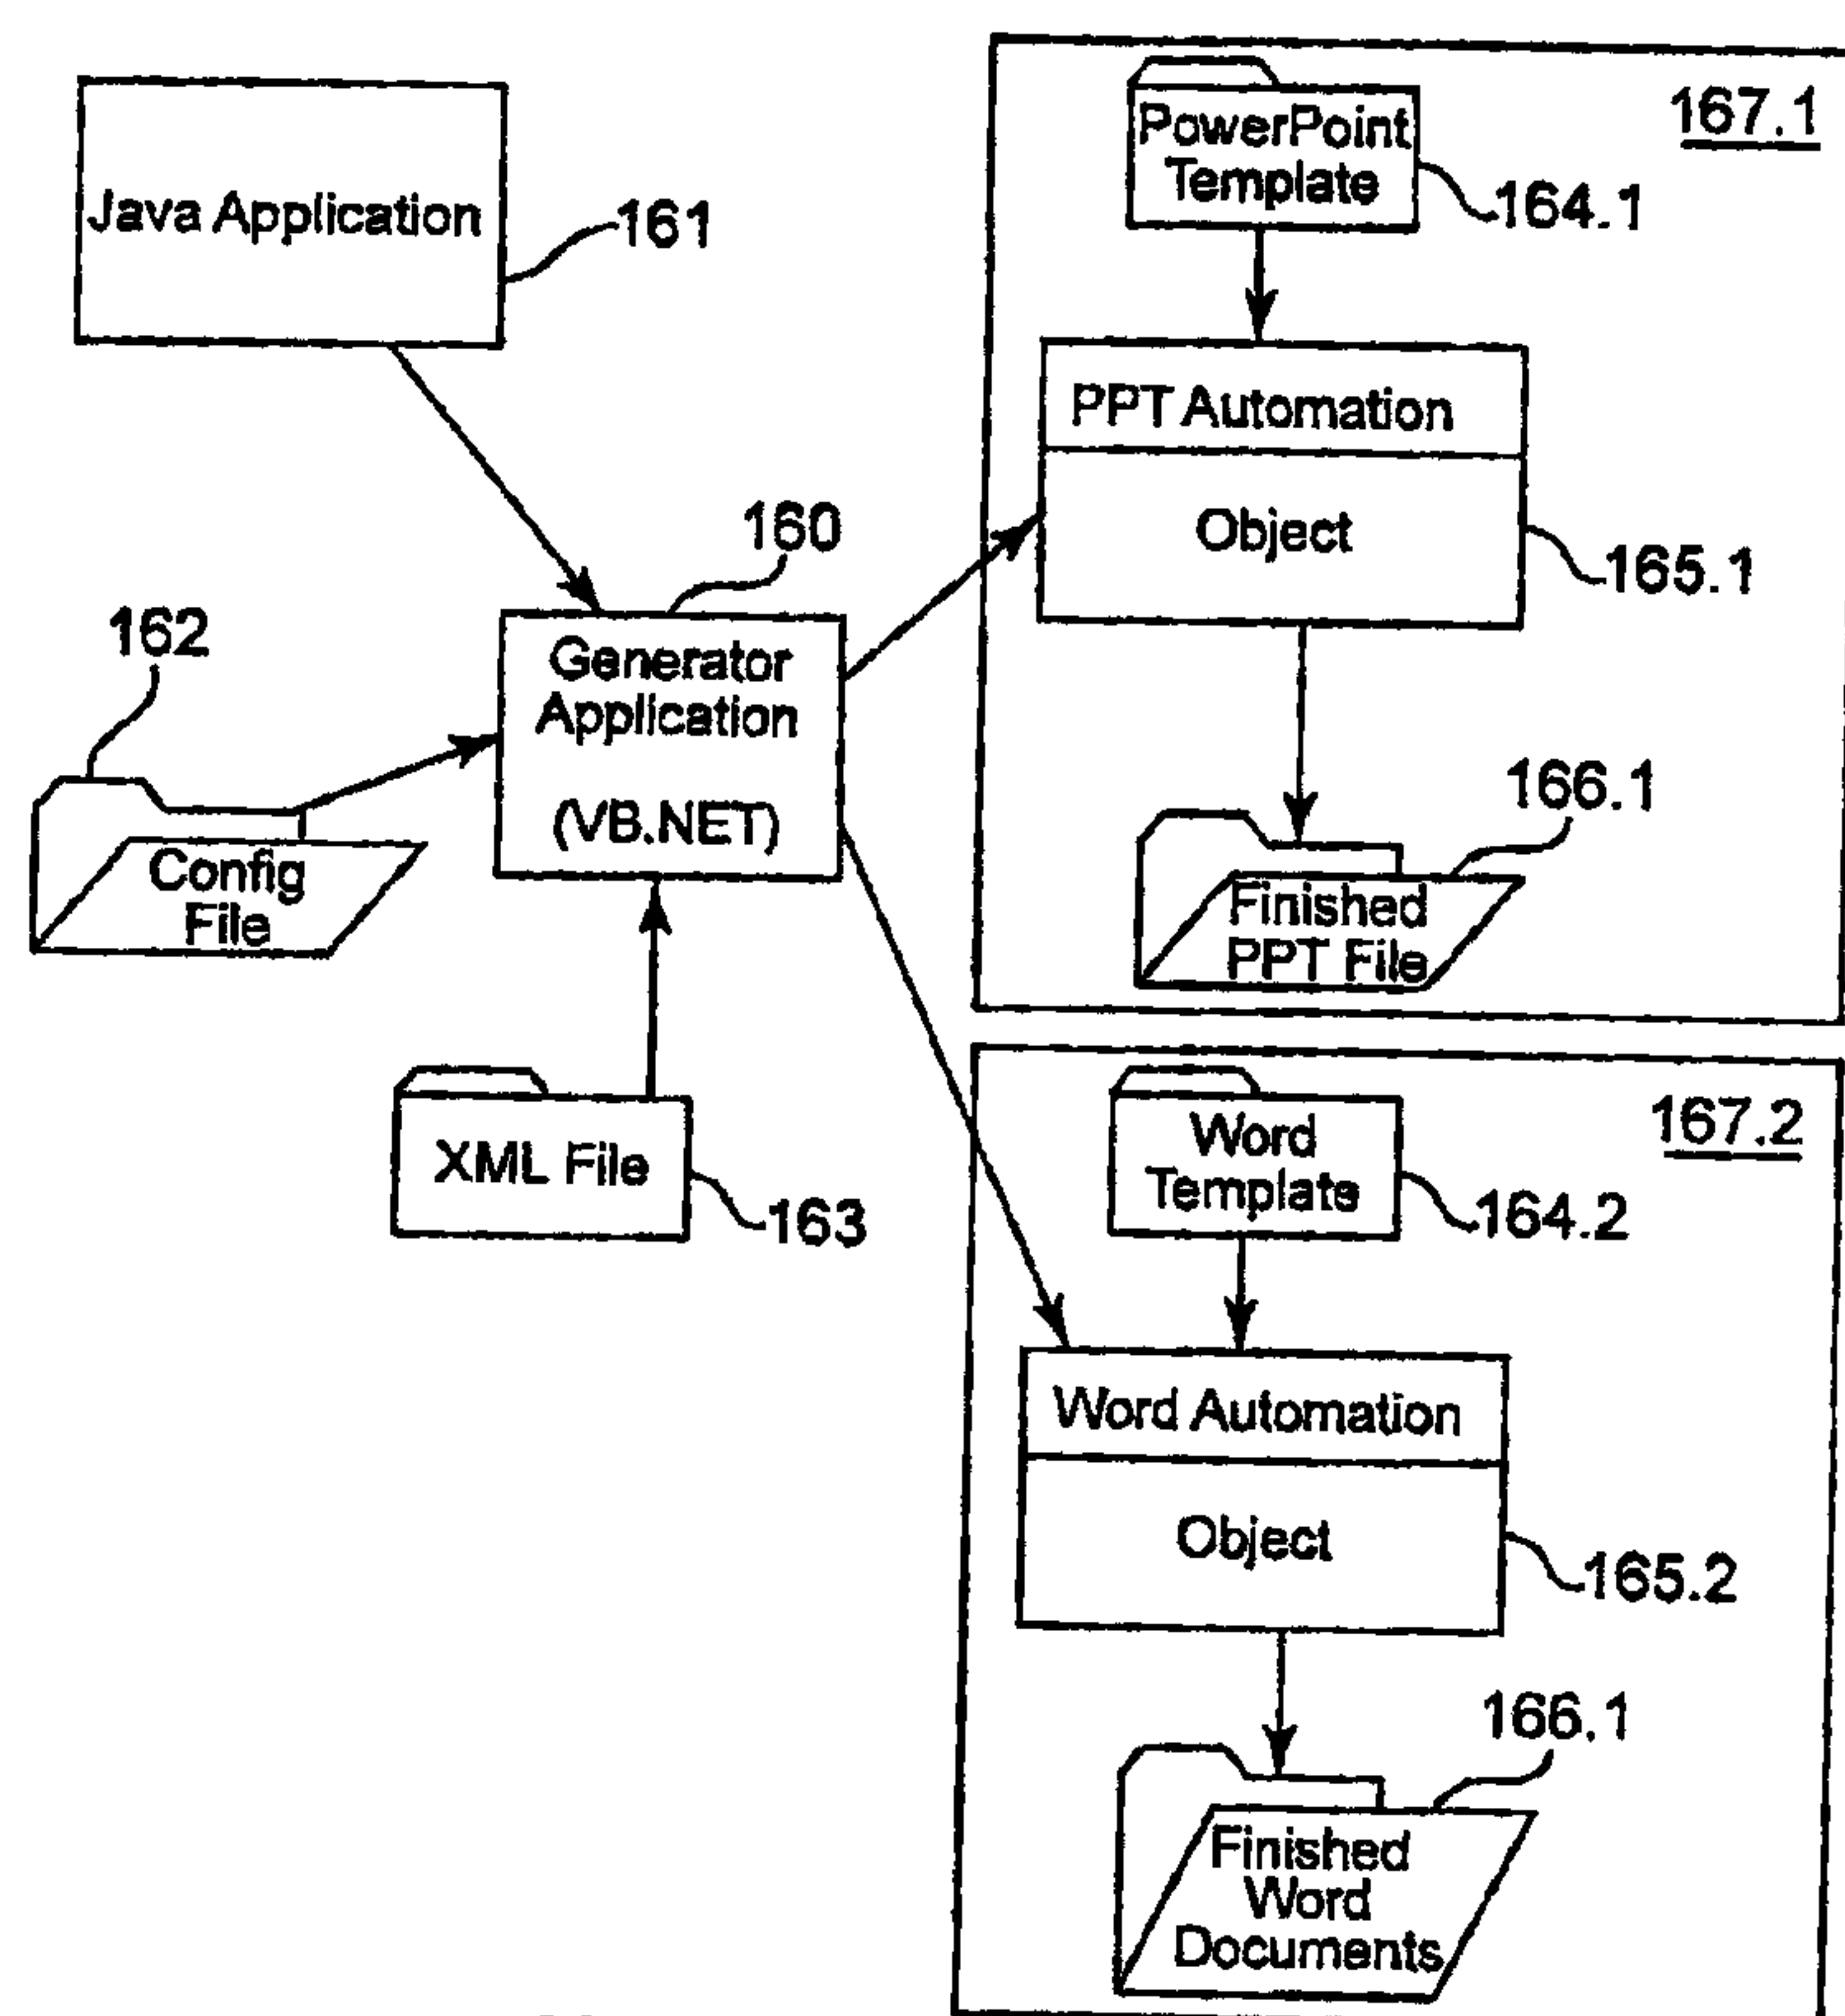**Fig. 16**

17/38

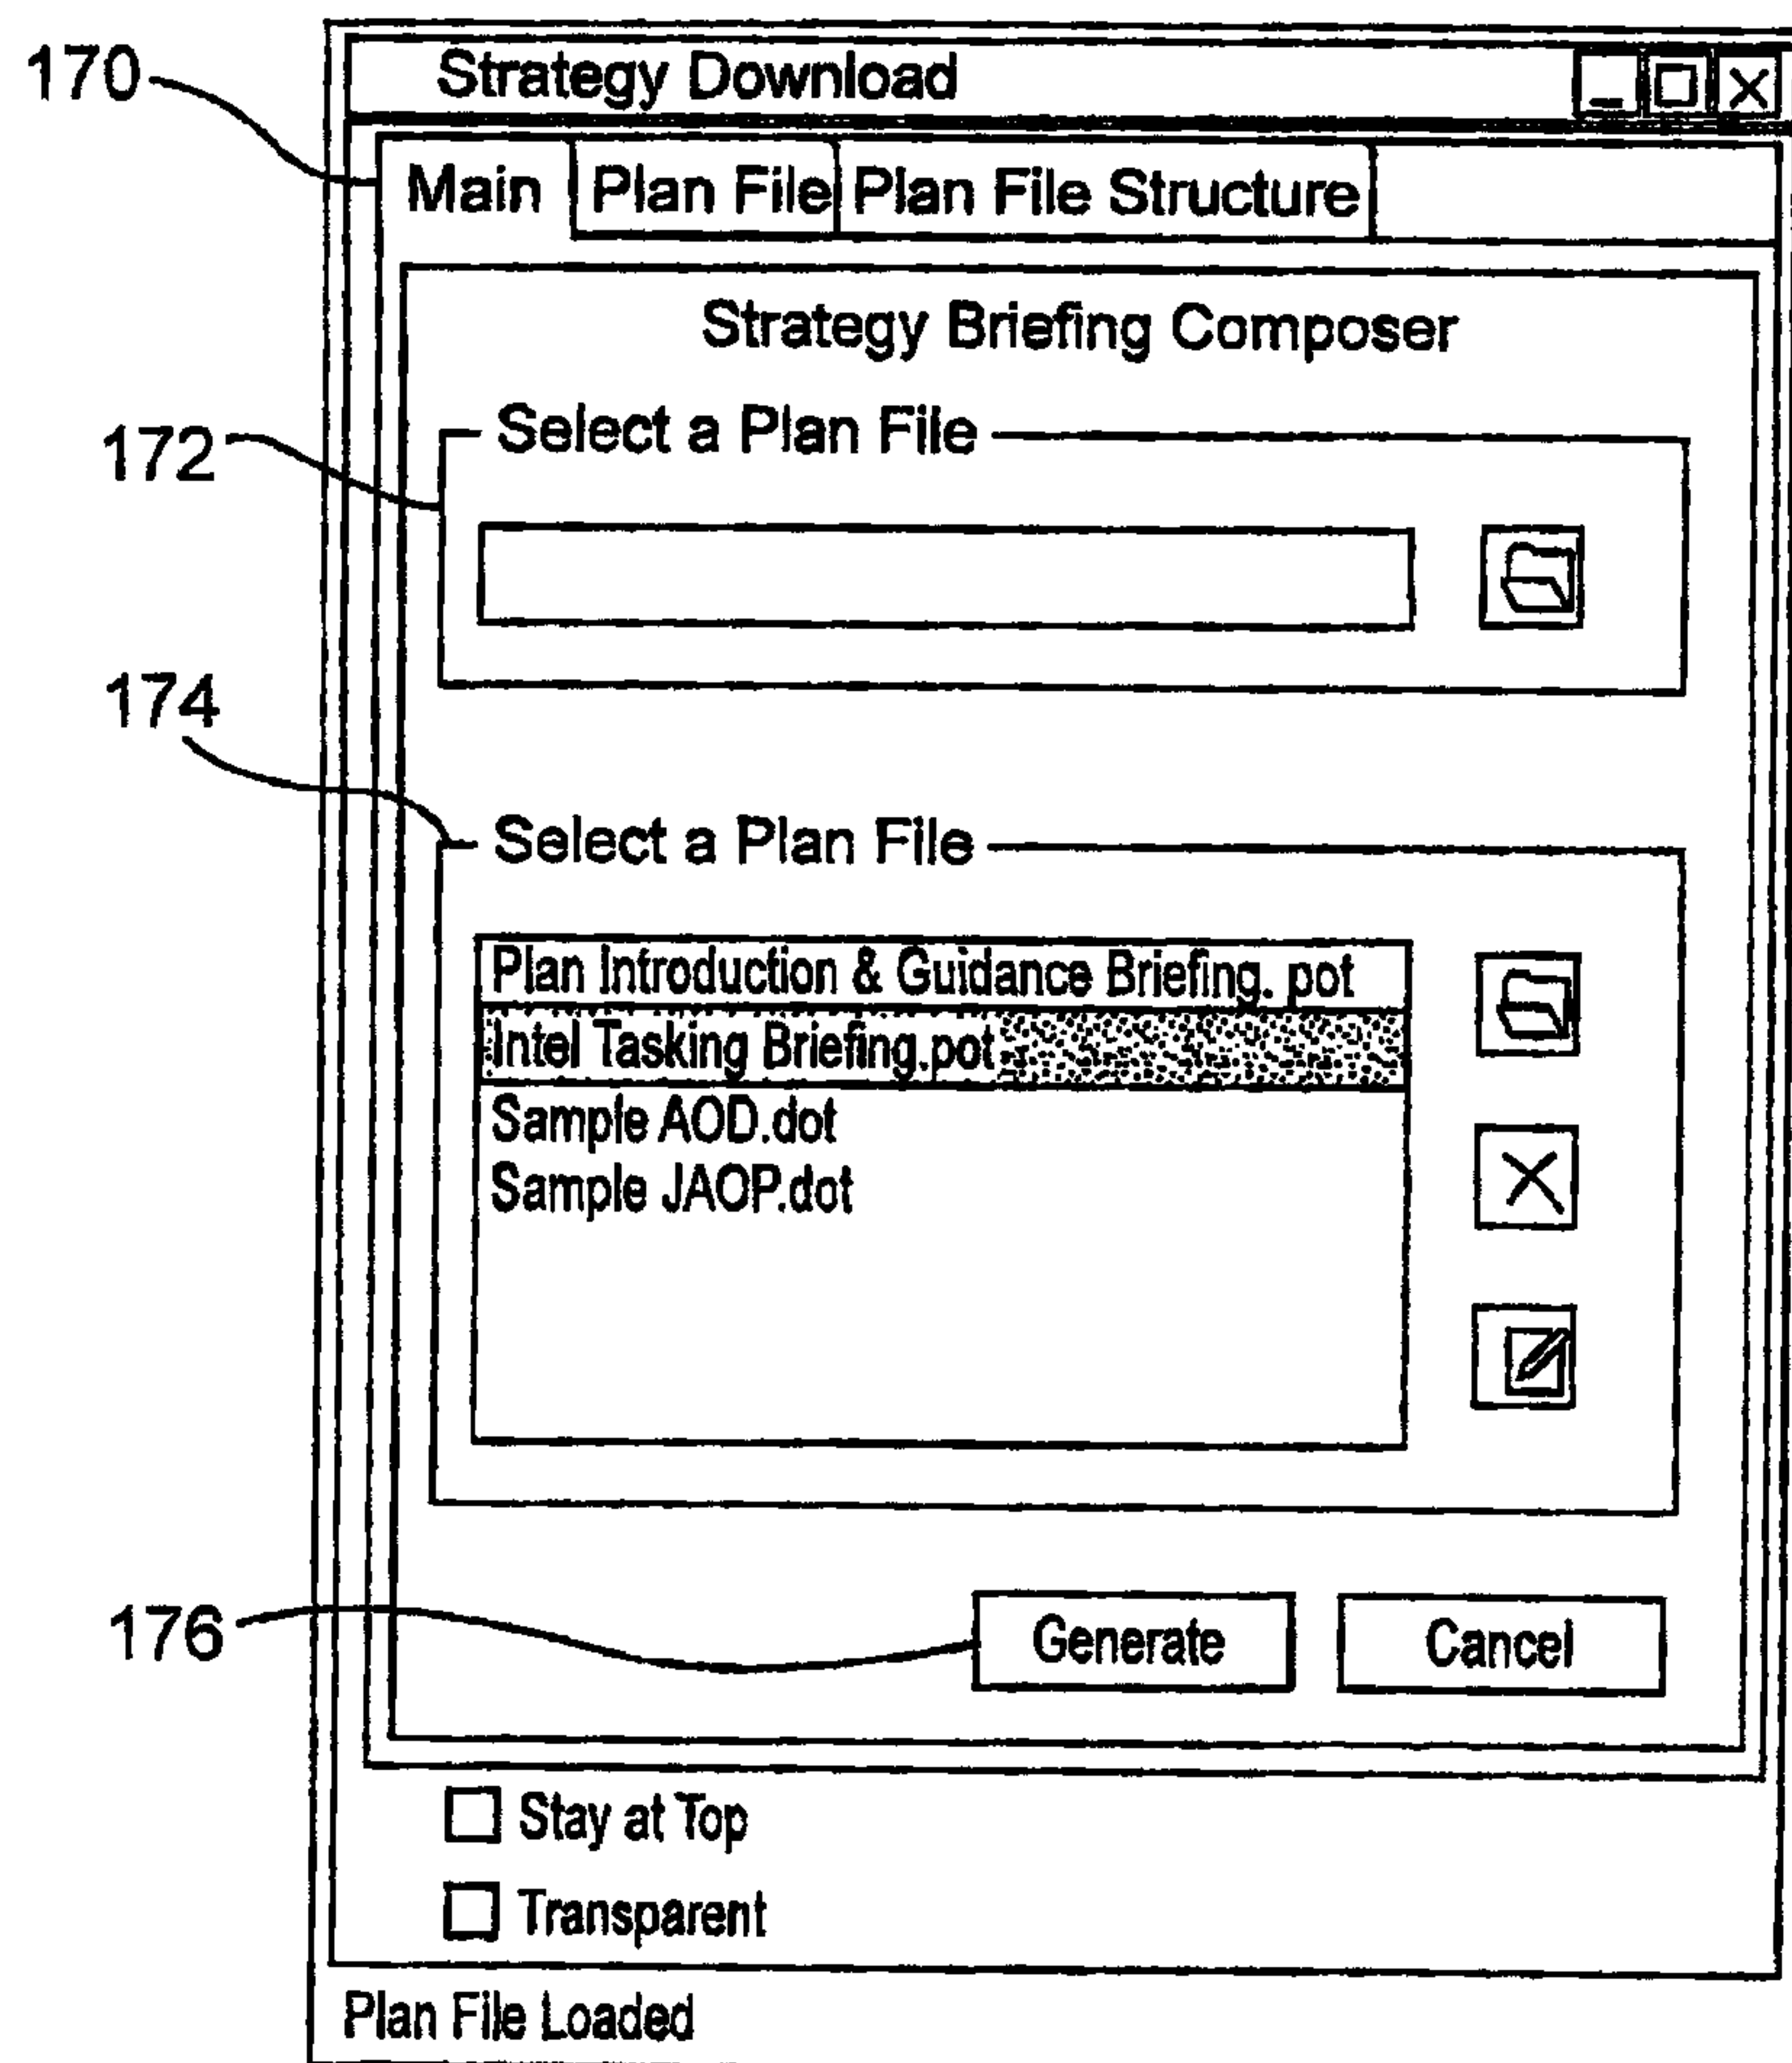**Fig. 17**

18/38

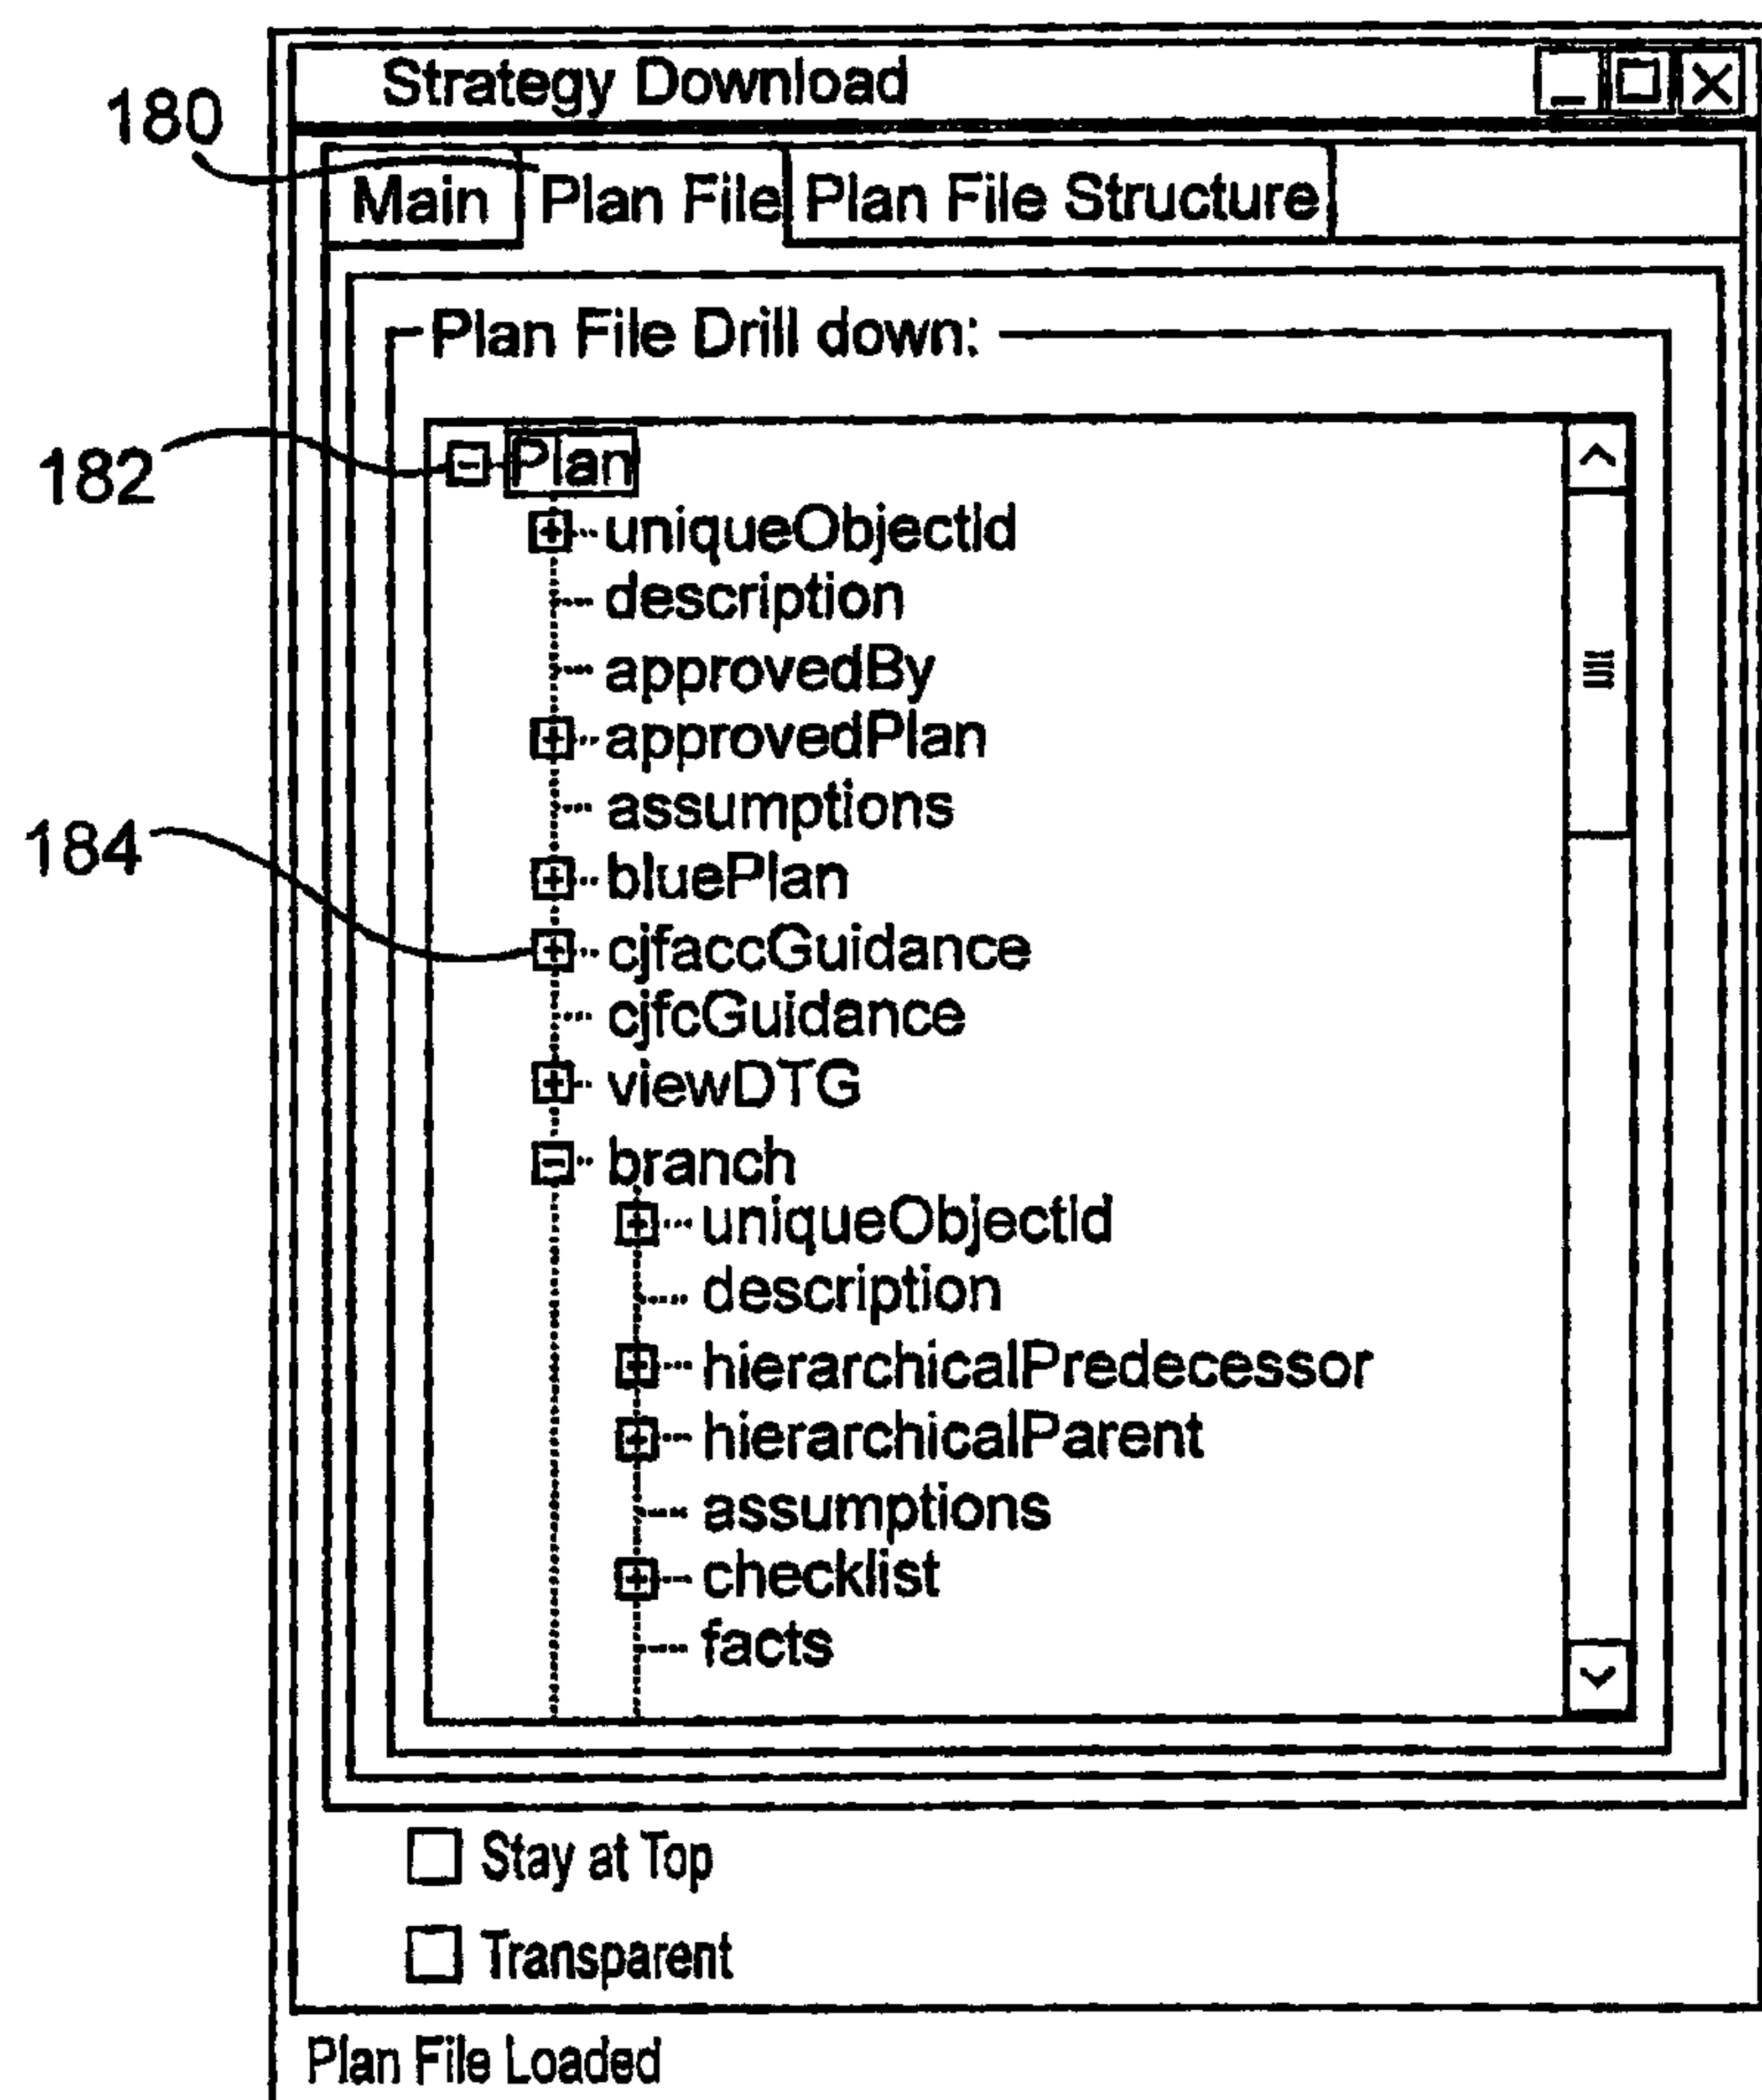**Fig. 18**

19/38

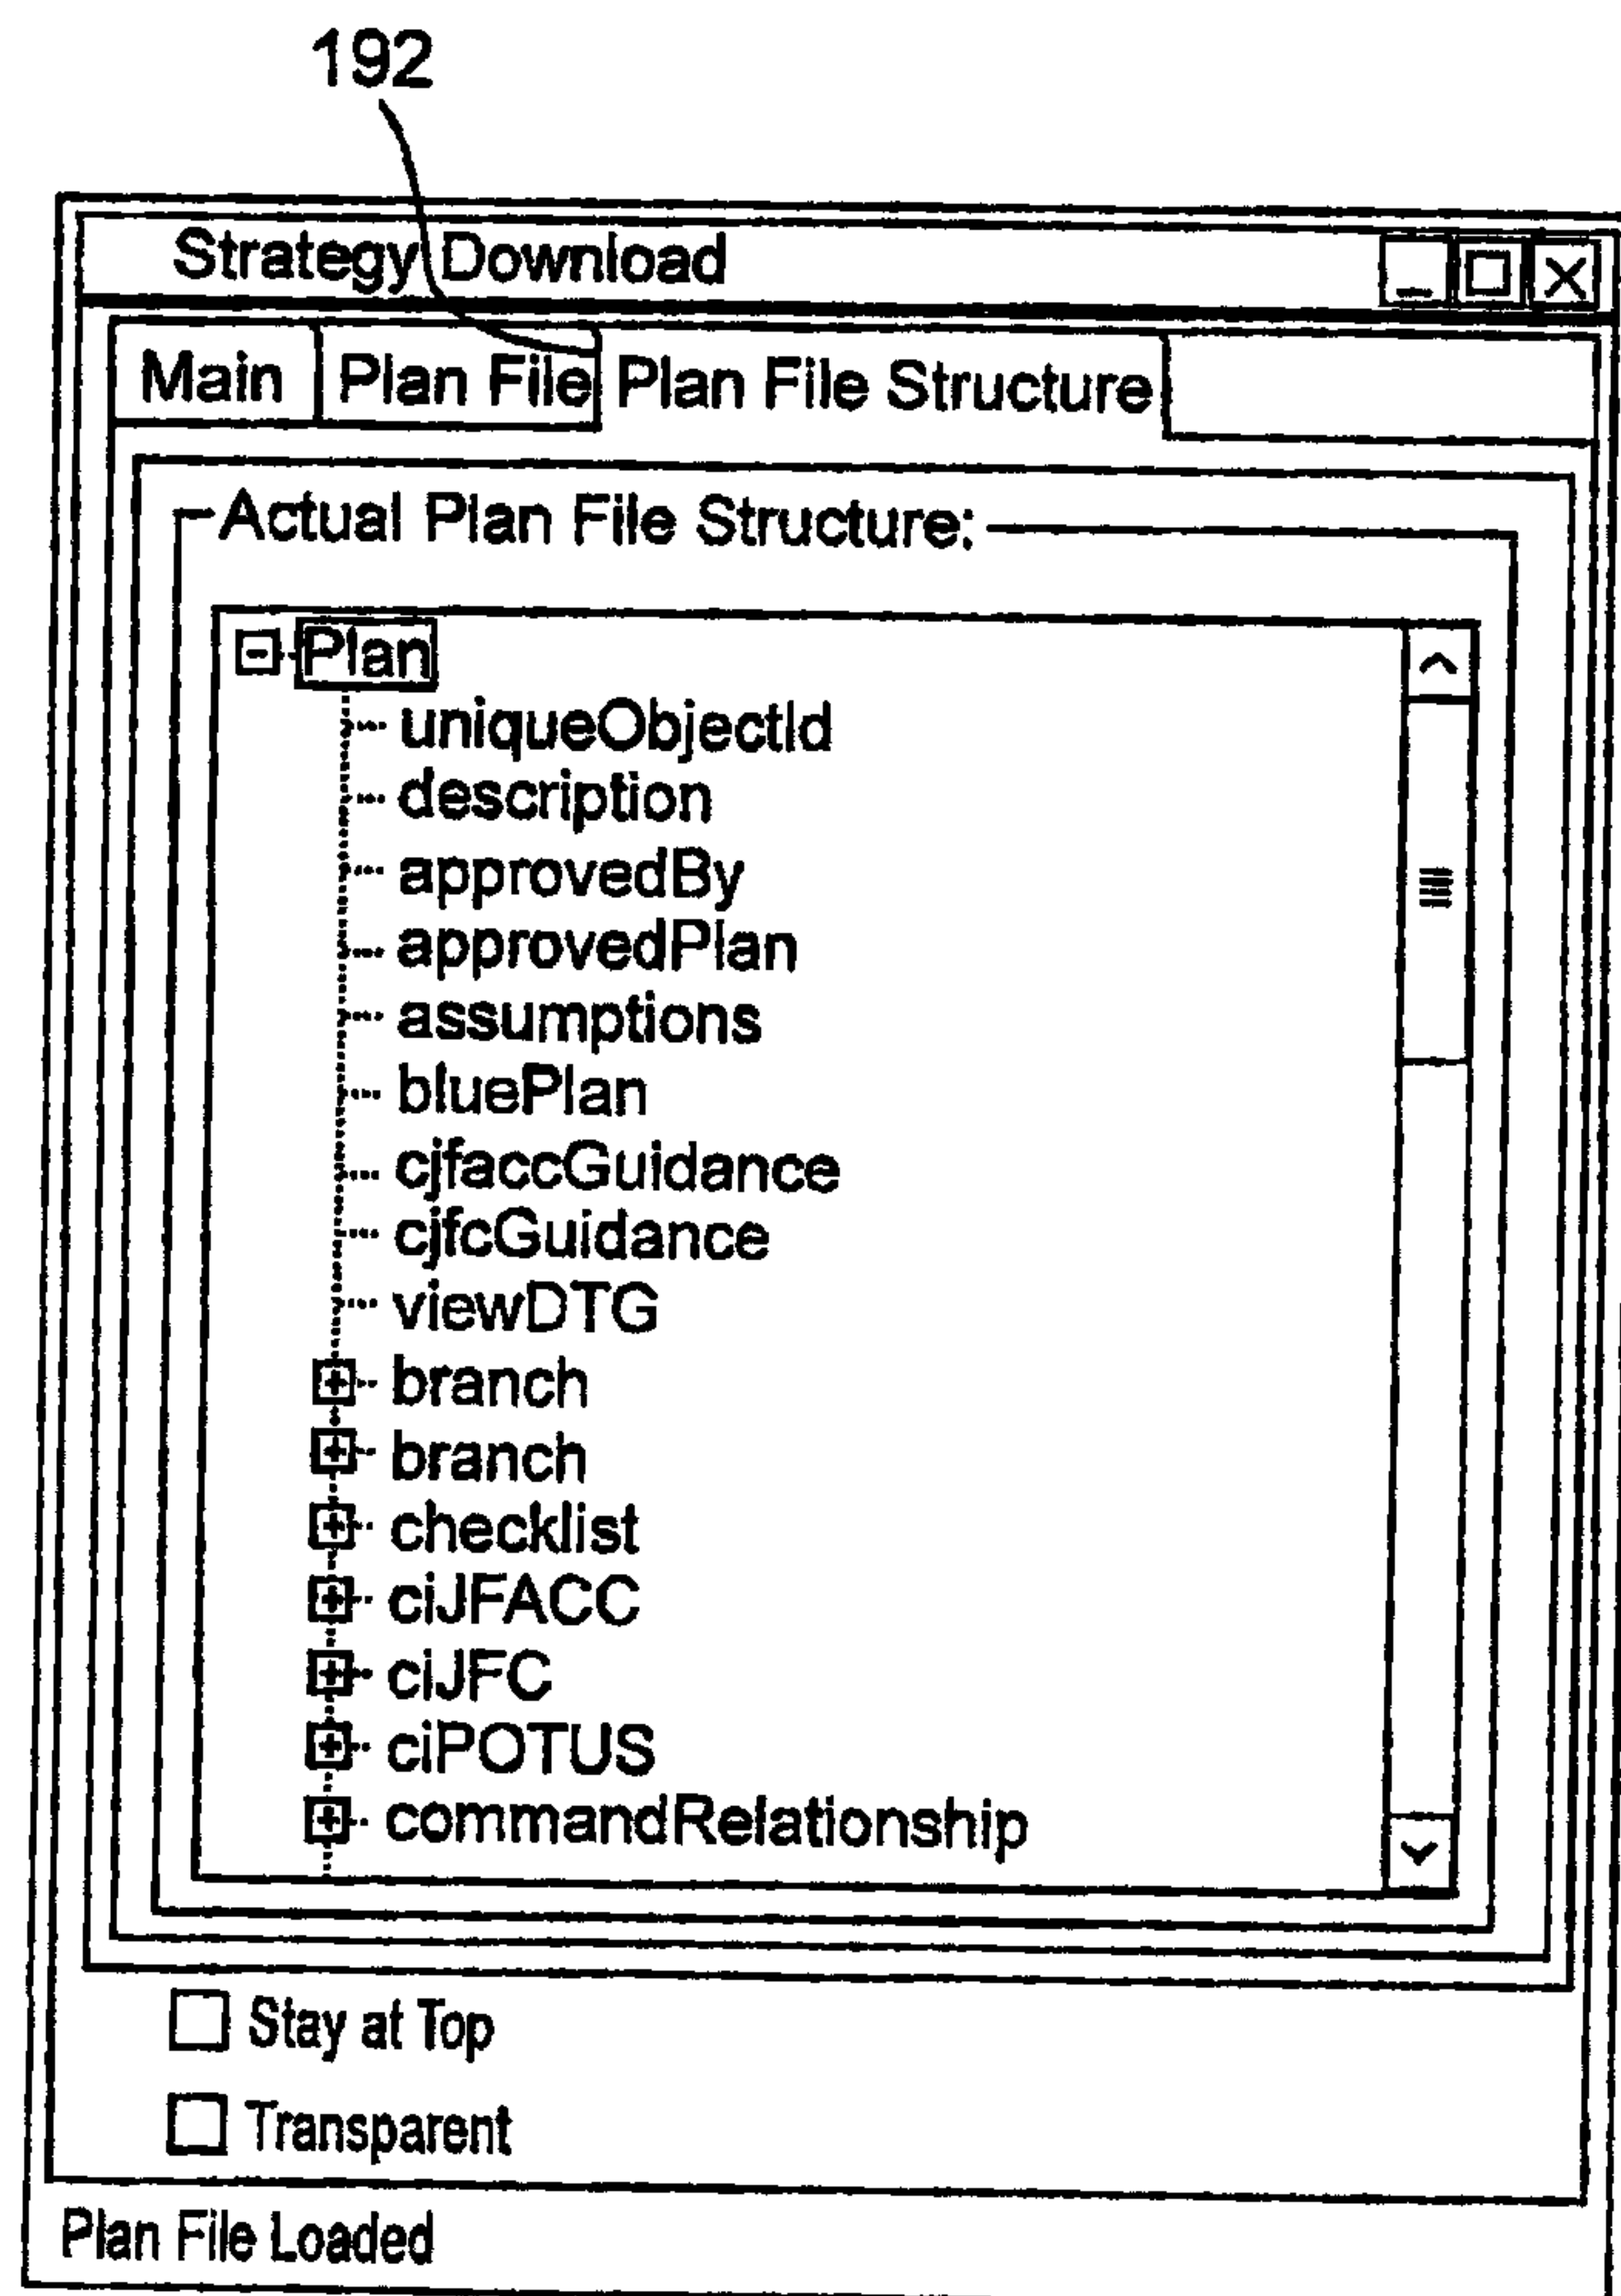
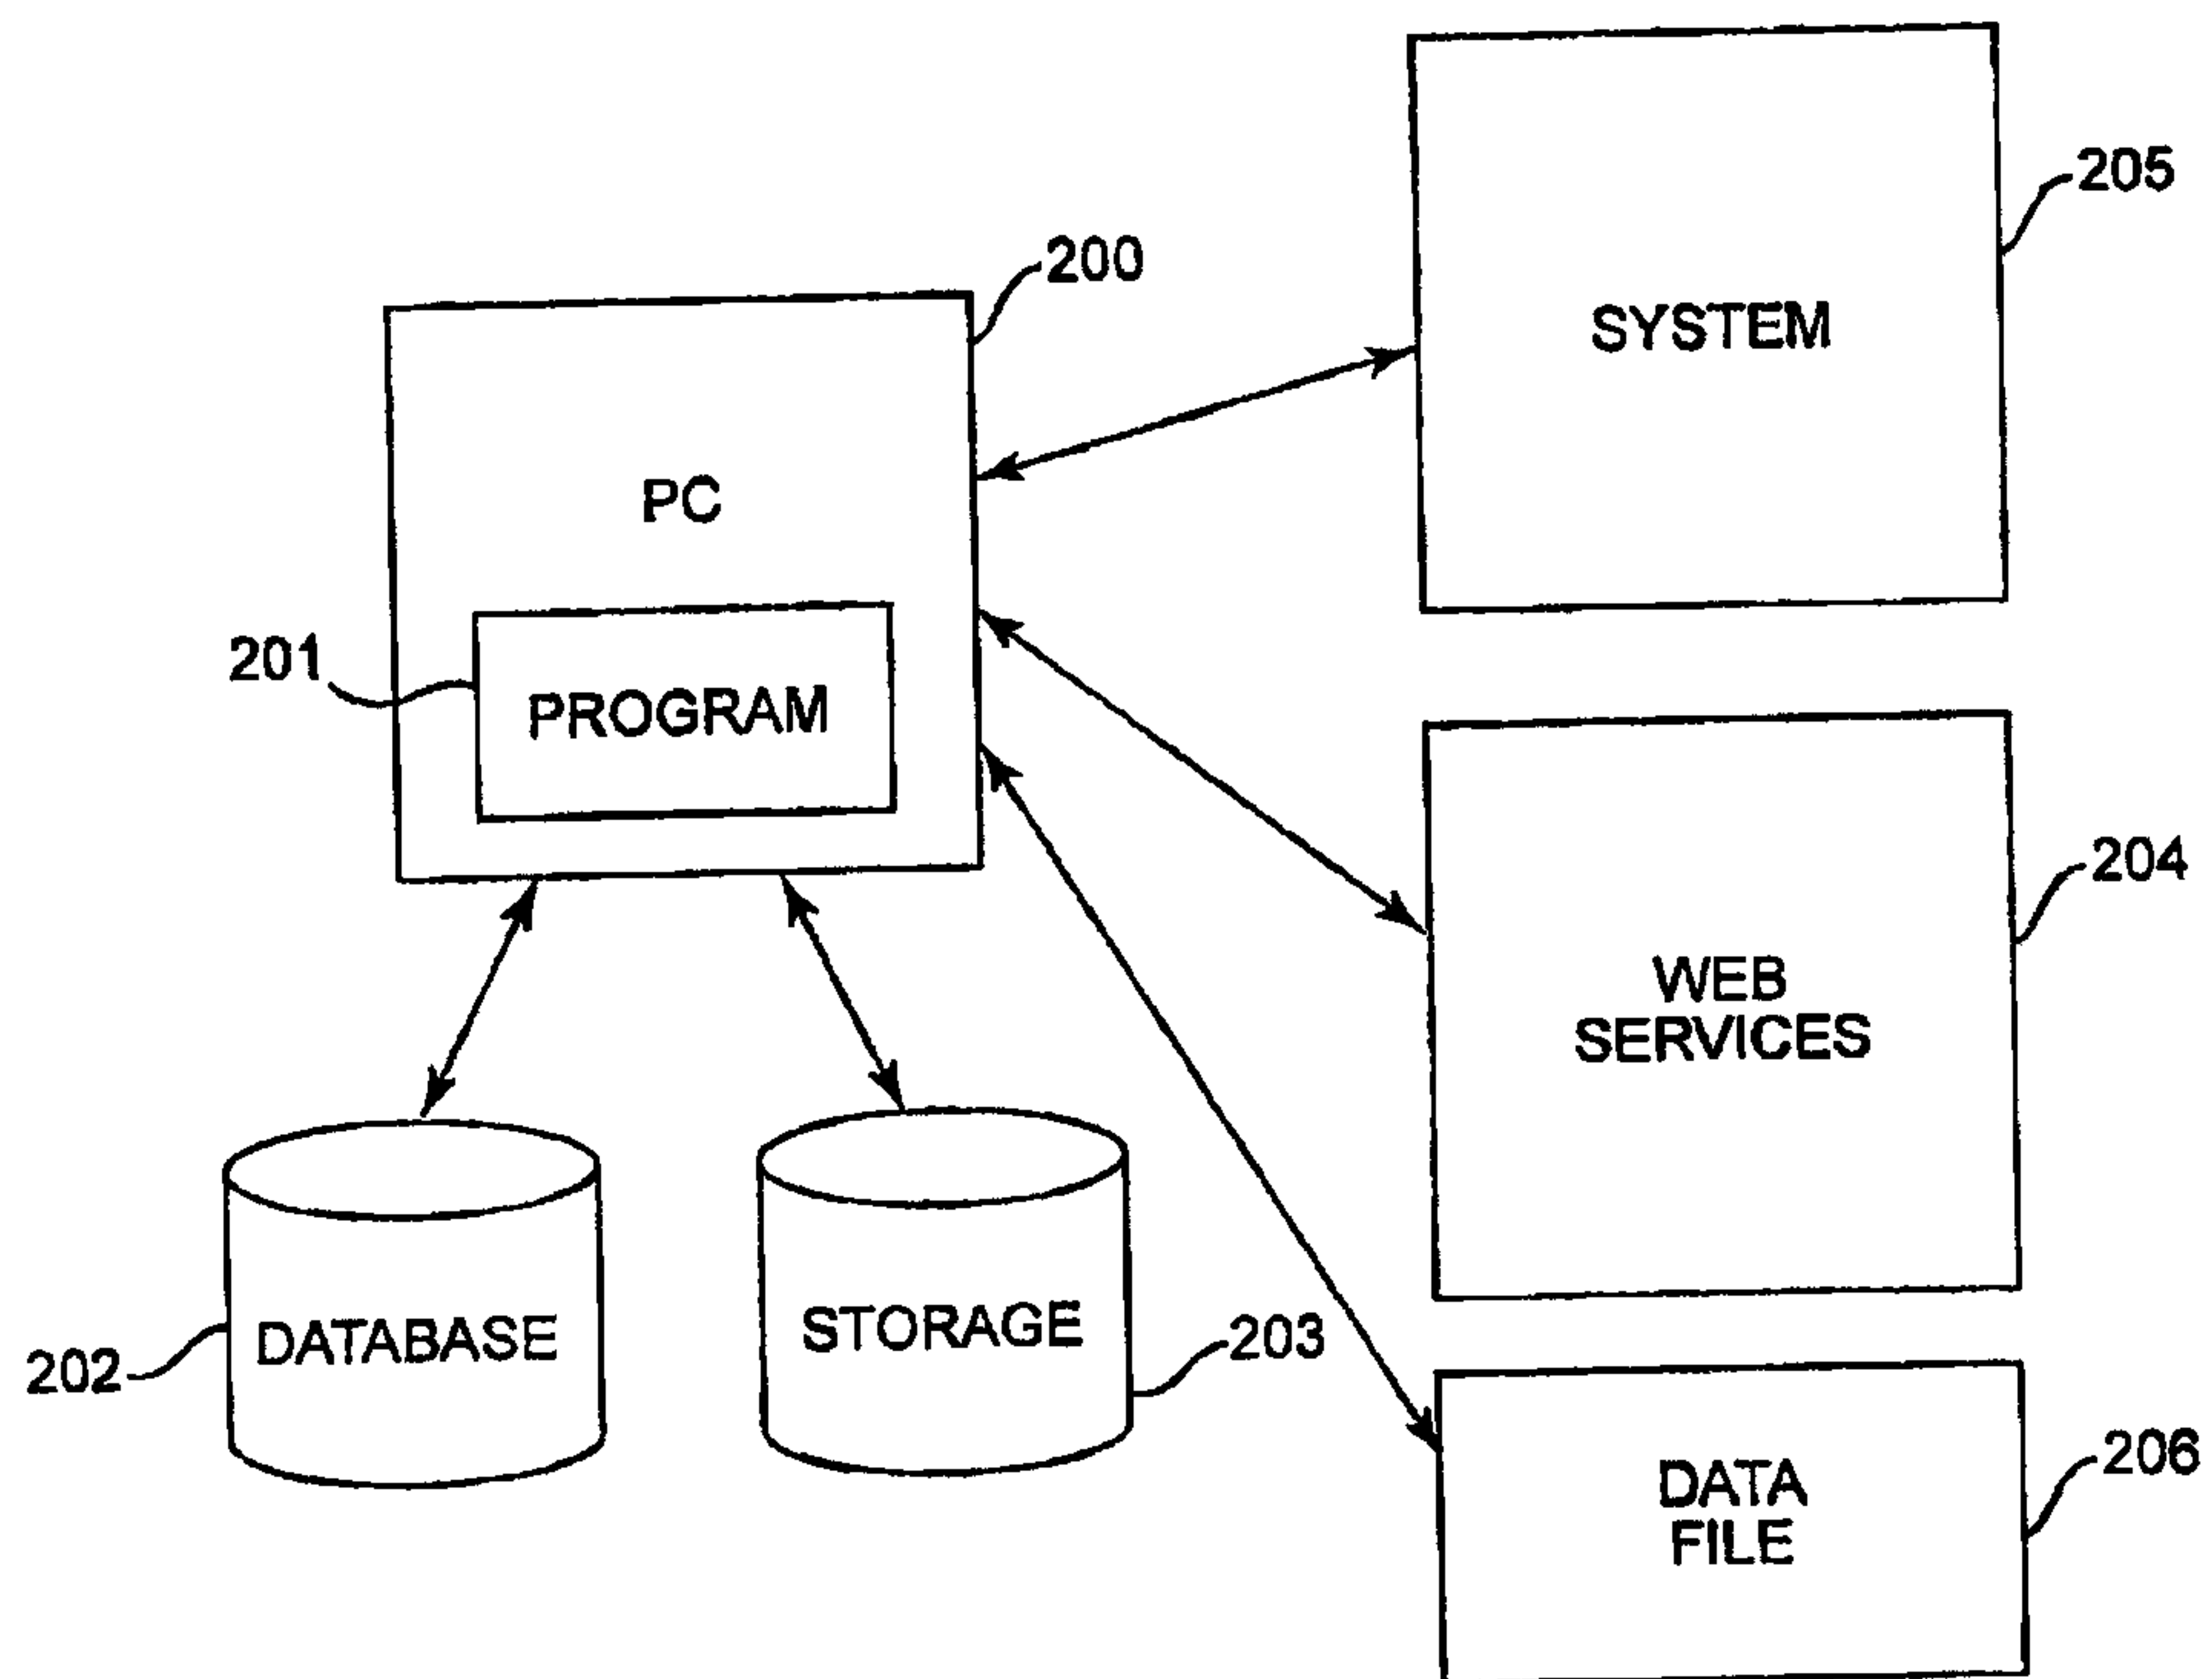


Fig. 19

20/38

**Fig. 20**

21/38

id	level	type	name	description	rationale	priority	startDate	endDate
1	National	Military	mil-ops-3829	D1	R1	high	3/5/2003	12/31/2003
2	National	Military	mil-ops-9220	D2	R2	moderate	8/15/2002	8/15/2005
3	National	Military	mil-ops-0989	D3	R3	high	4/7/2003	6/1/2003
4	National	Political	pol-ops-8328	D4	R4	low	11/20/2004	12/31/2004
5	National	Political	pol-ops-7739	D5	R5	moderate	2/2/2003	7/1/2003
6	National	Political	econ-ops-3892	D6	R6	low	12/1/2003	12/1/2005
7	National	Social	soc-ops-0558	D7	R7	low	6/27/2003	6/1/2005
8	State	Military	mil-ops-2783	D8	R8	low	3/18/2004	
9	State	Economic	econ-ops-9559	D9	R9	moderate	9/10/2002	12/31/2002
10	State	Economic	econ-ops-4518	D10	R10	high	1/1/2004	
11	State	Economic	econ-ops-5811	D11	R11	low	11/10/2003	7/1/2005
12	State	Political	pol-ops-3902	D12	R12	high	7/2/2003	11/1/2003
13	State	Social	soc-ops-9833	D13	R13	urgent	9/4/2003	9/1/2005
14	State	Social	soc-ops-0112	D14	R14	moderate	12/31/2002	12/31/2005
15	City	Economic	econ-ops-3358	D15	R15	low	3/6/2002	7/1/2004

Fig. 21

id	name	label	description	value
1	mil-ops-3829	L1	D1	V1
2	mil-ops-3829	L2	D2	V2
3	mil-ops-3829	L3	D3	V3
4	mil-ops-3829	L4	D4	V4
5	mil-ops-3829	L5	D5	V5
6	mil-ops-9220	L6	D6	V6
7	mil-ops-9220	L7	D7	V7
8	mil-ops-9220	L8	D8	V8
9	mil-ops-9220	L9	D9	V9
10	mil-ops-0989	L10	D10	V10
11	mil-ops-0989	L11	D11	V11

Fig. 22

23/38

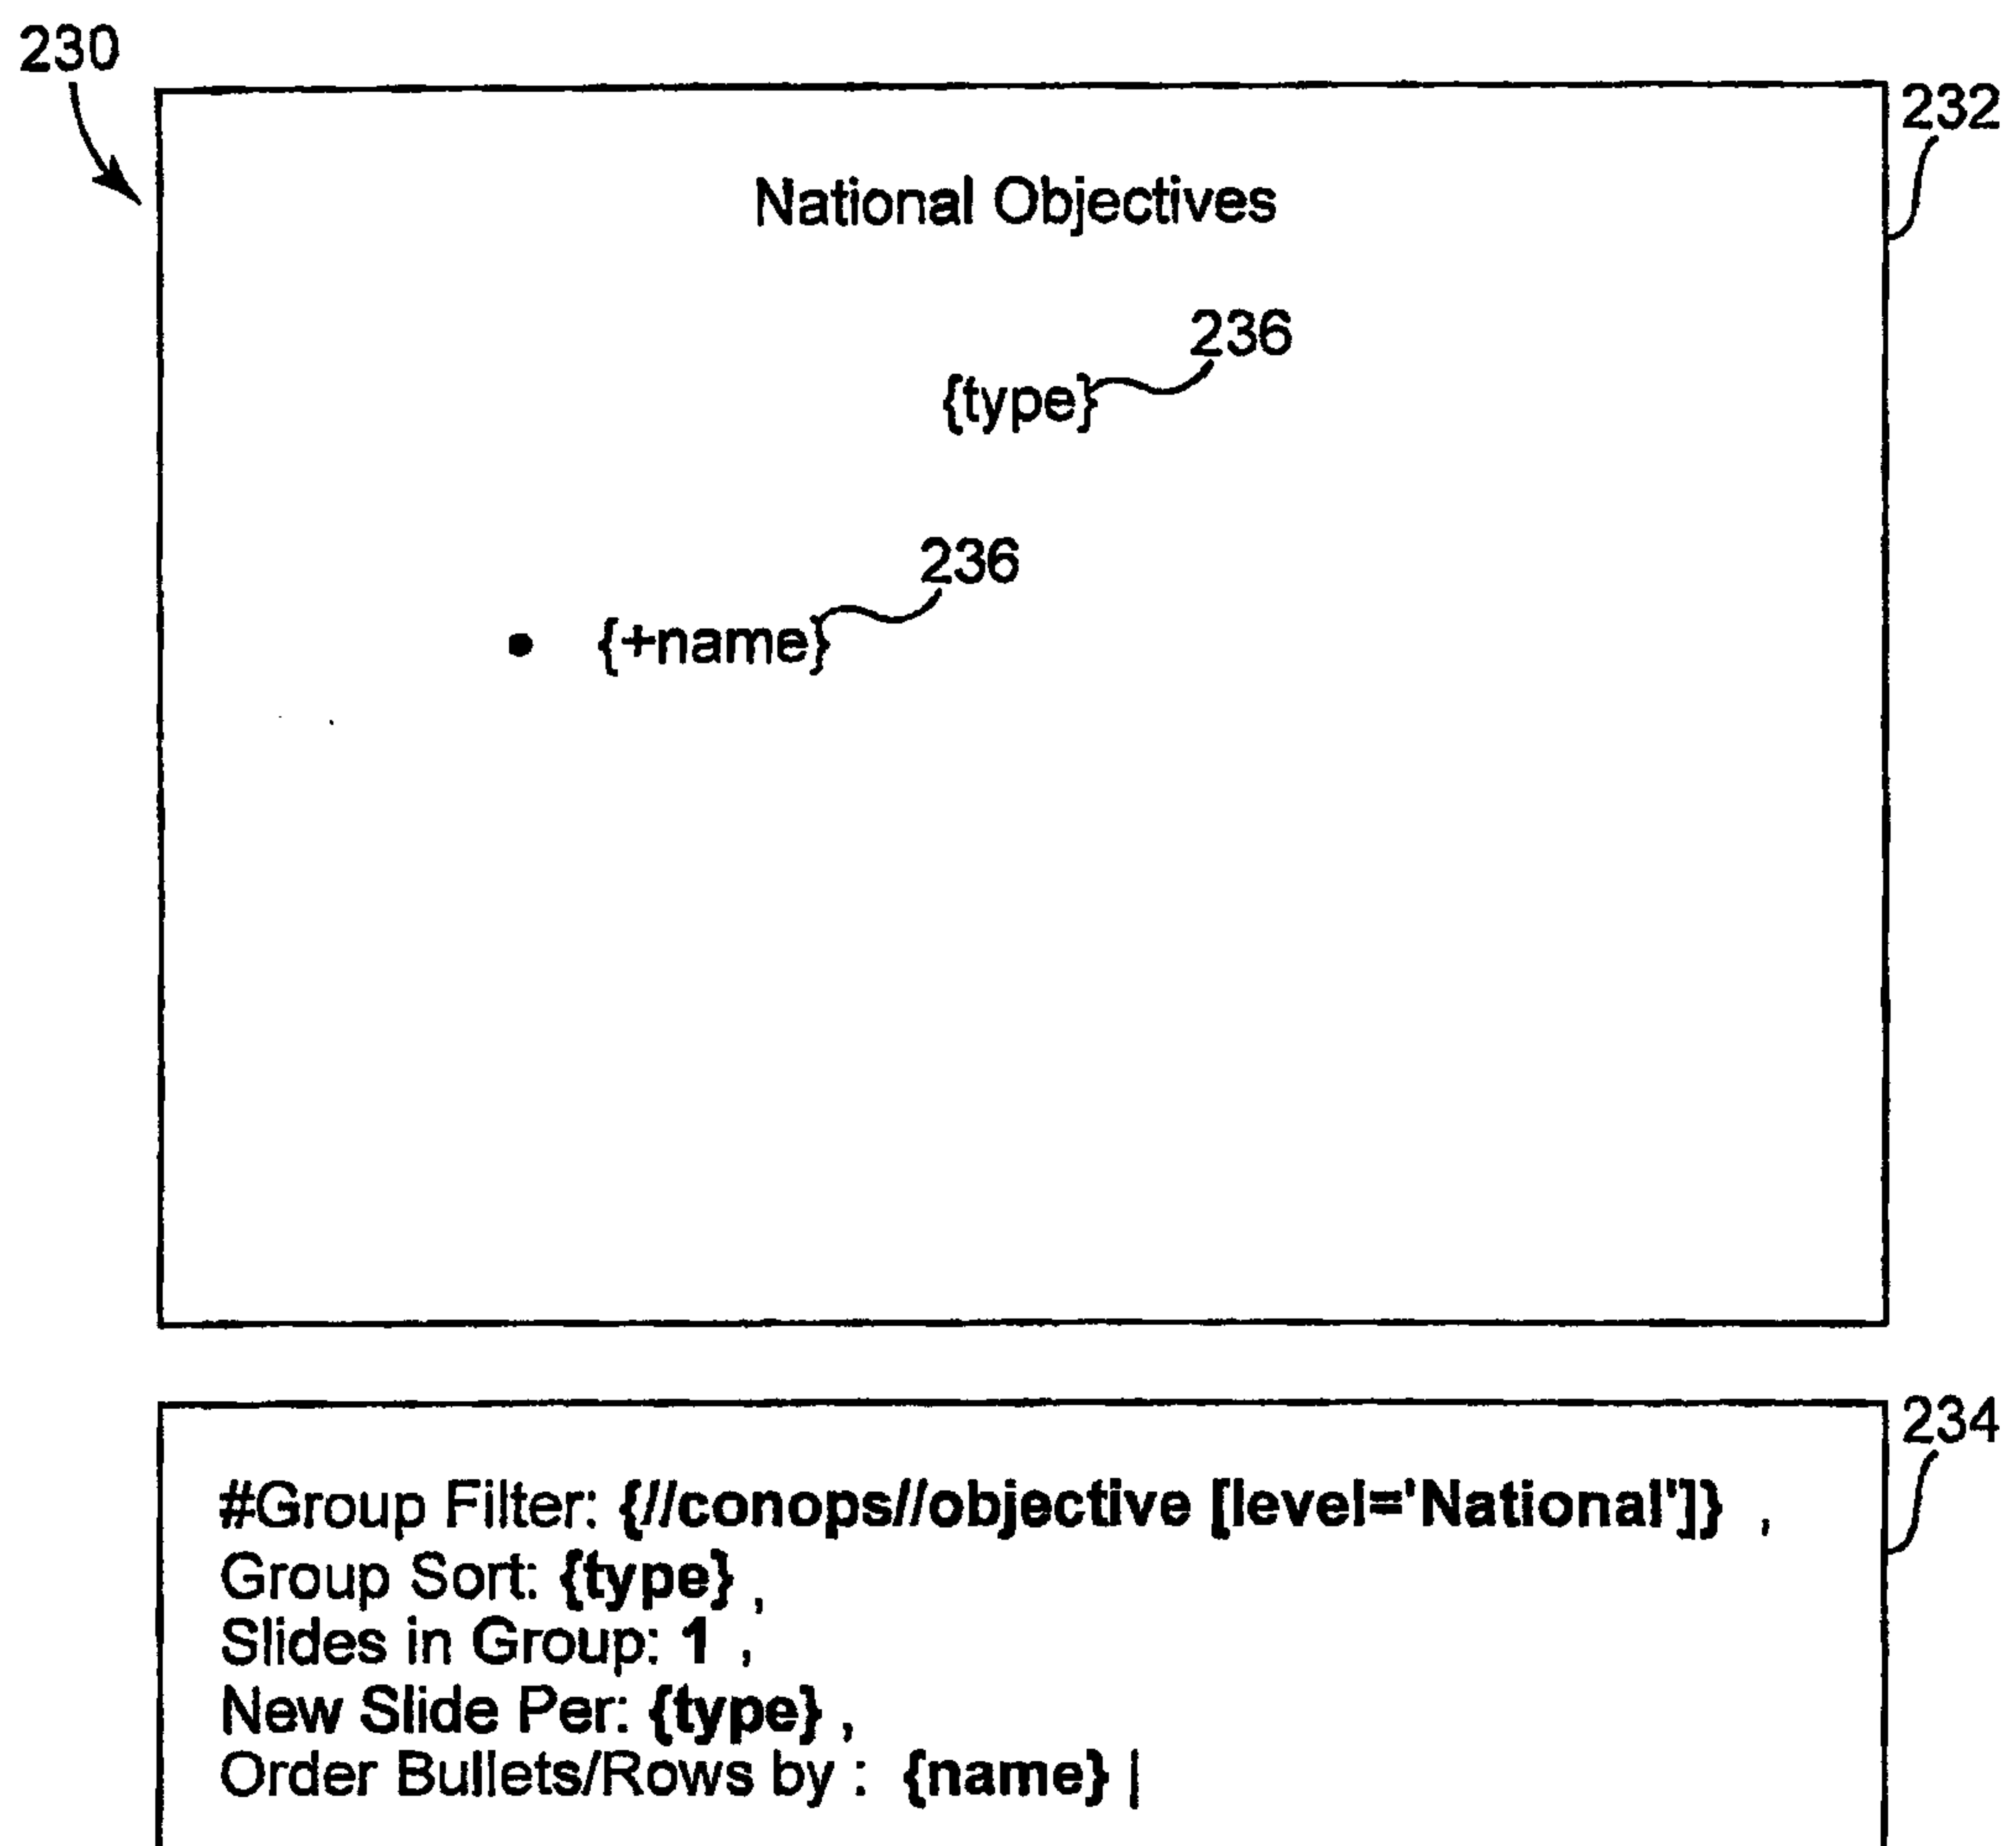
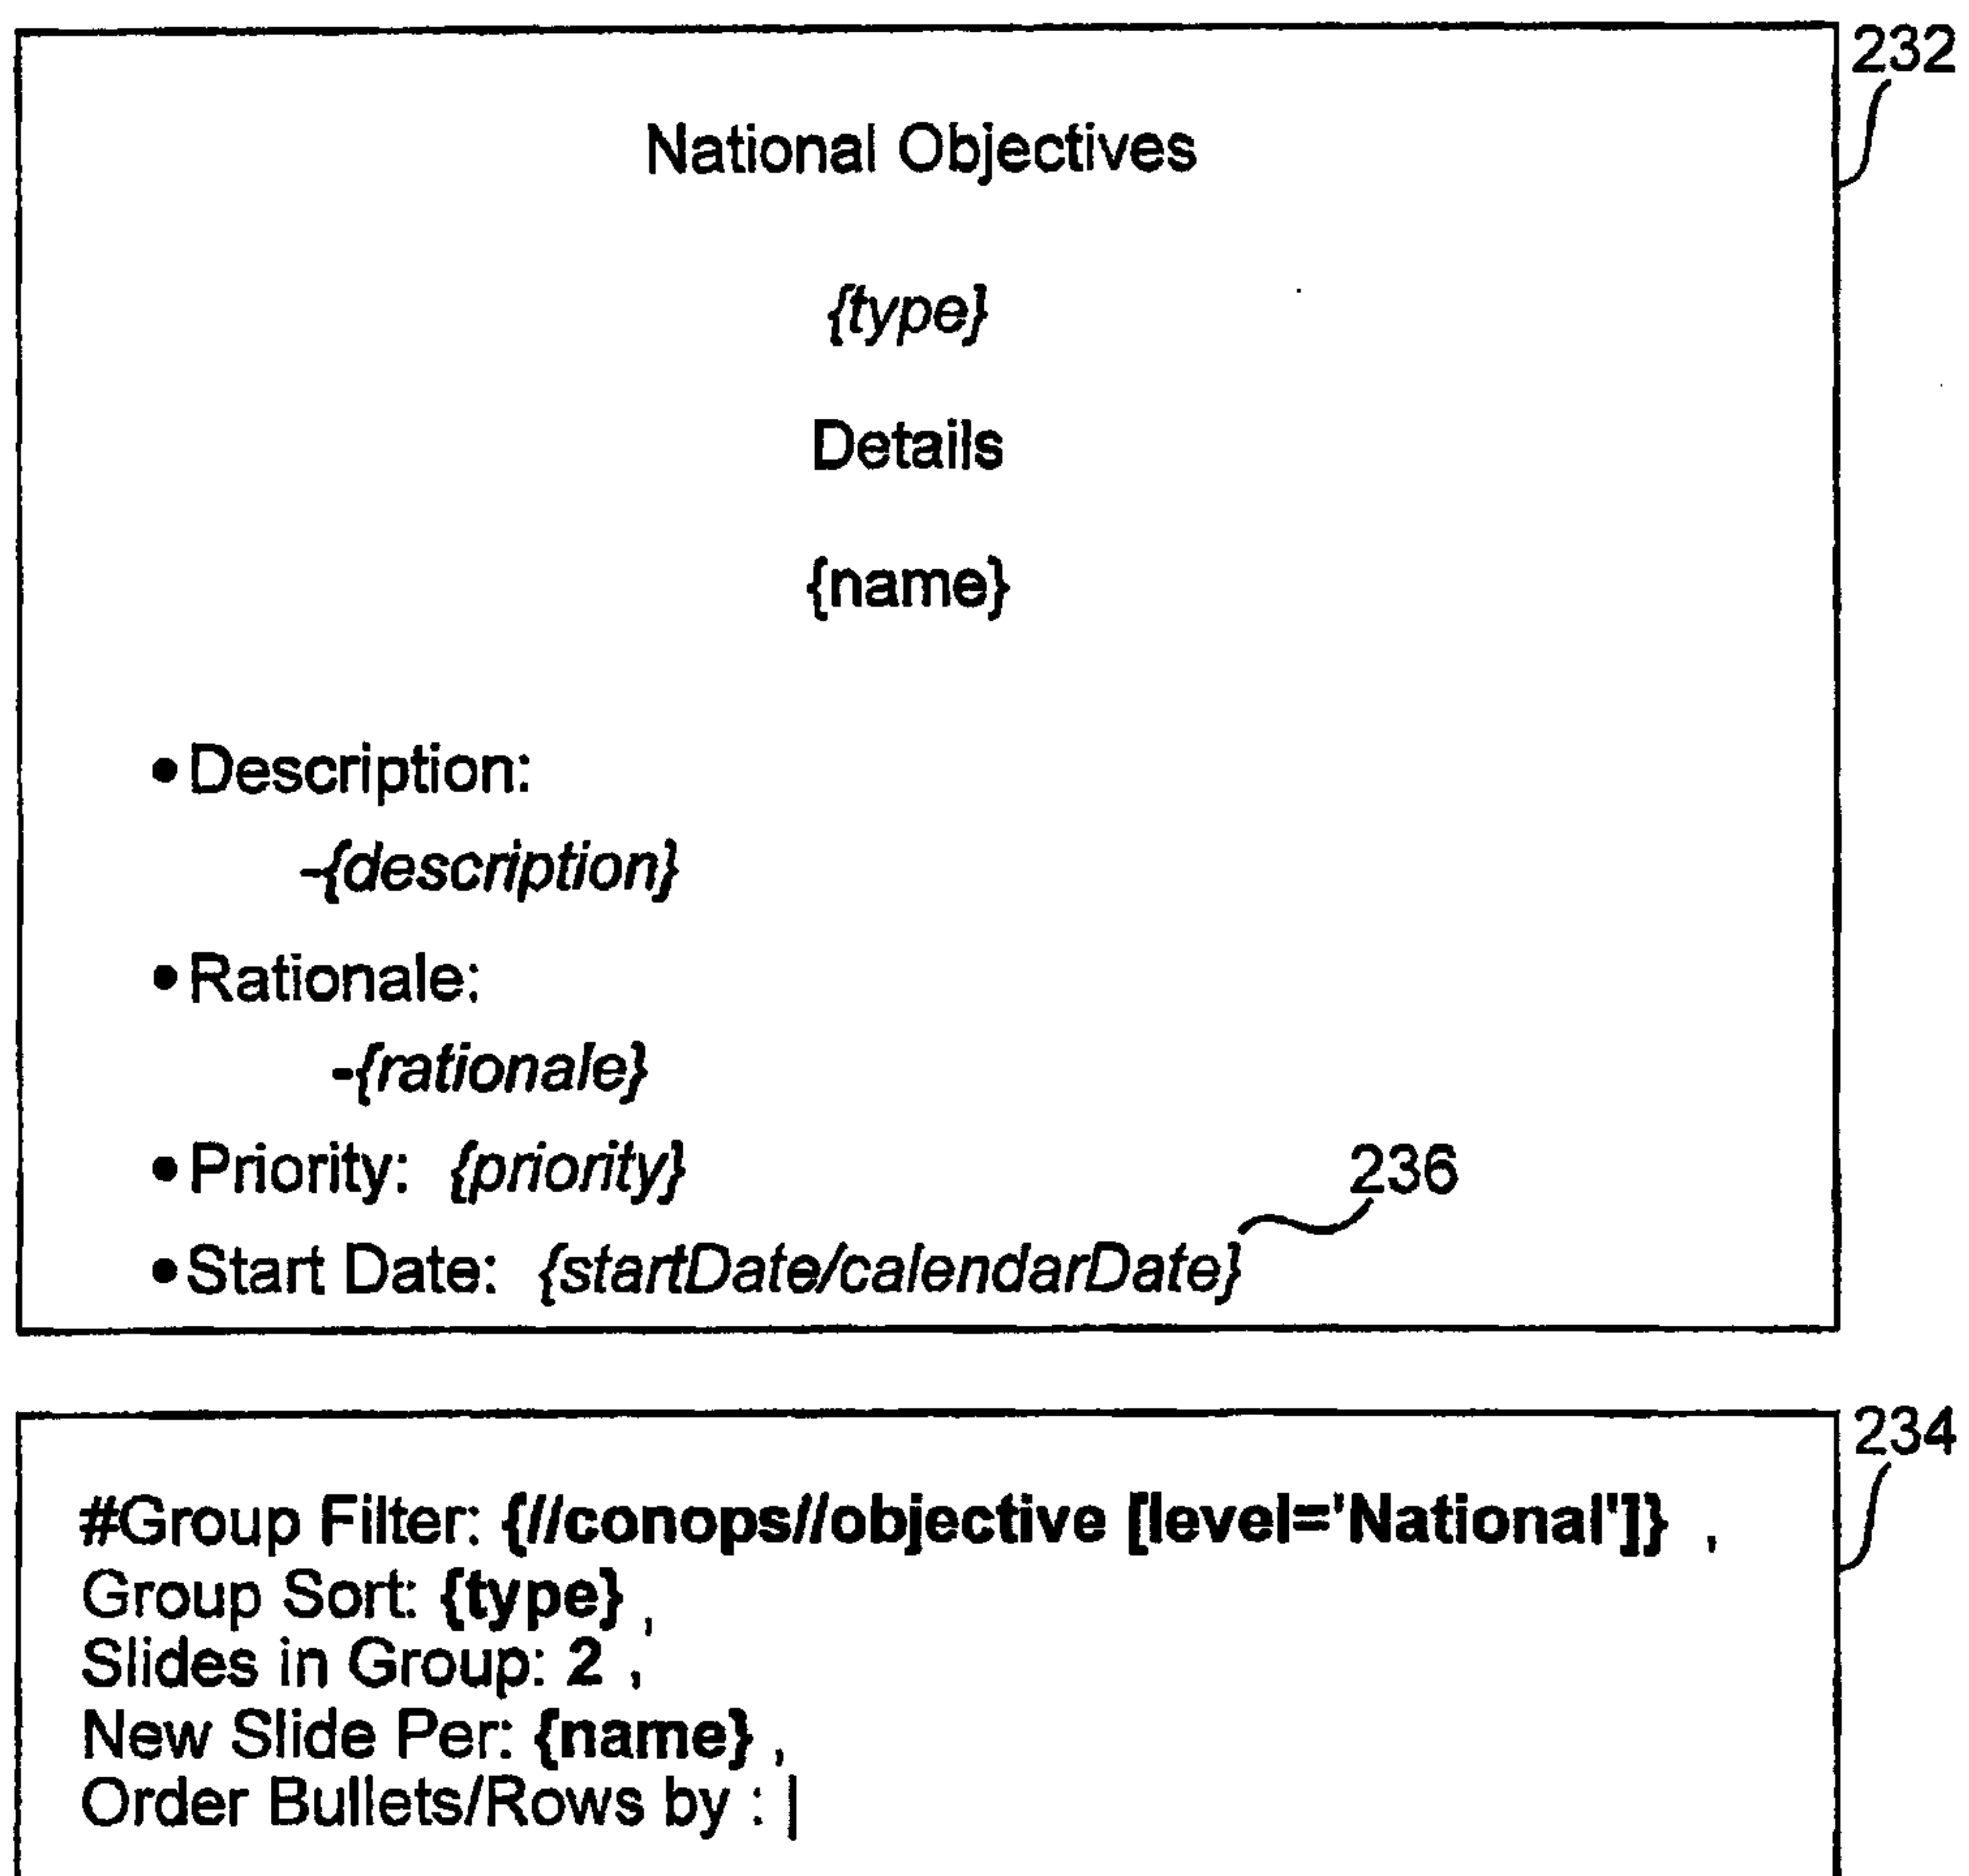


Fig. 23A

24/38

**Fig. 23B**

25/38

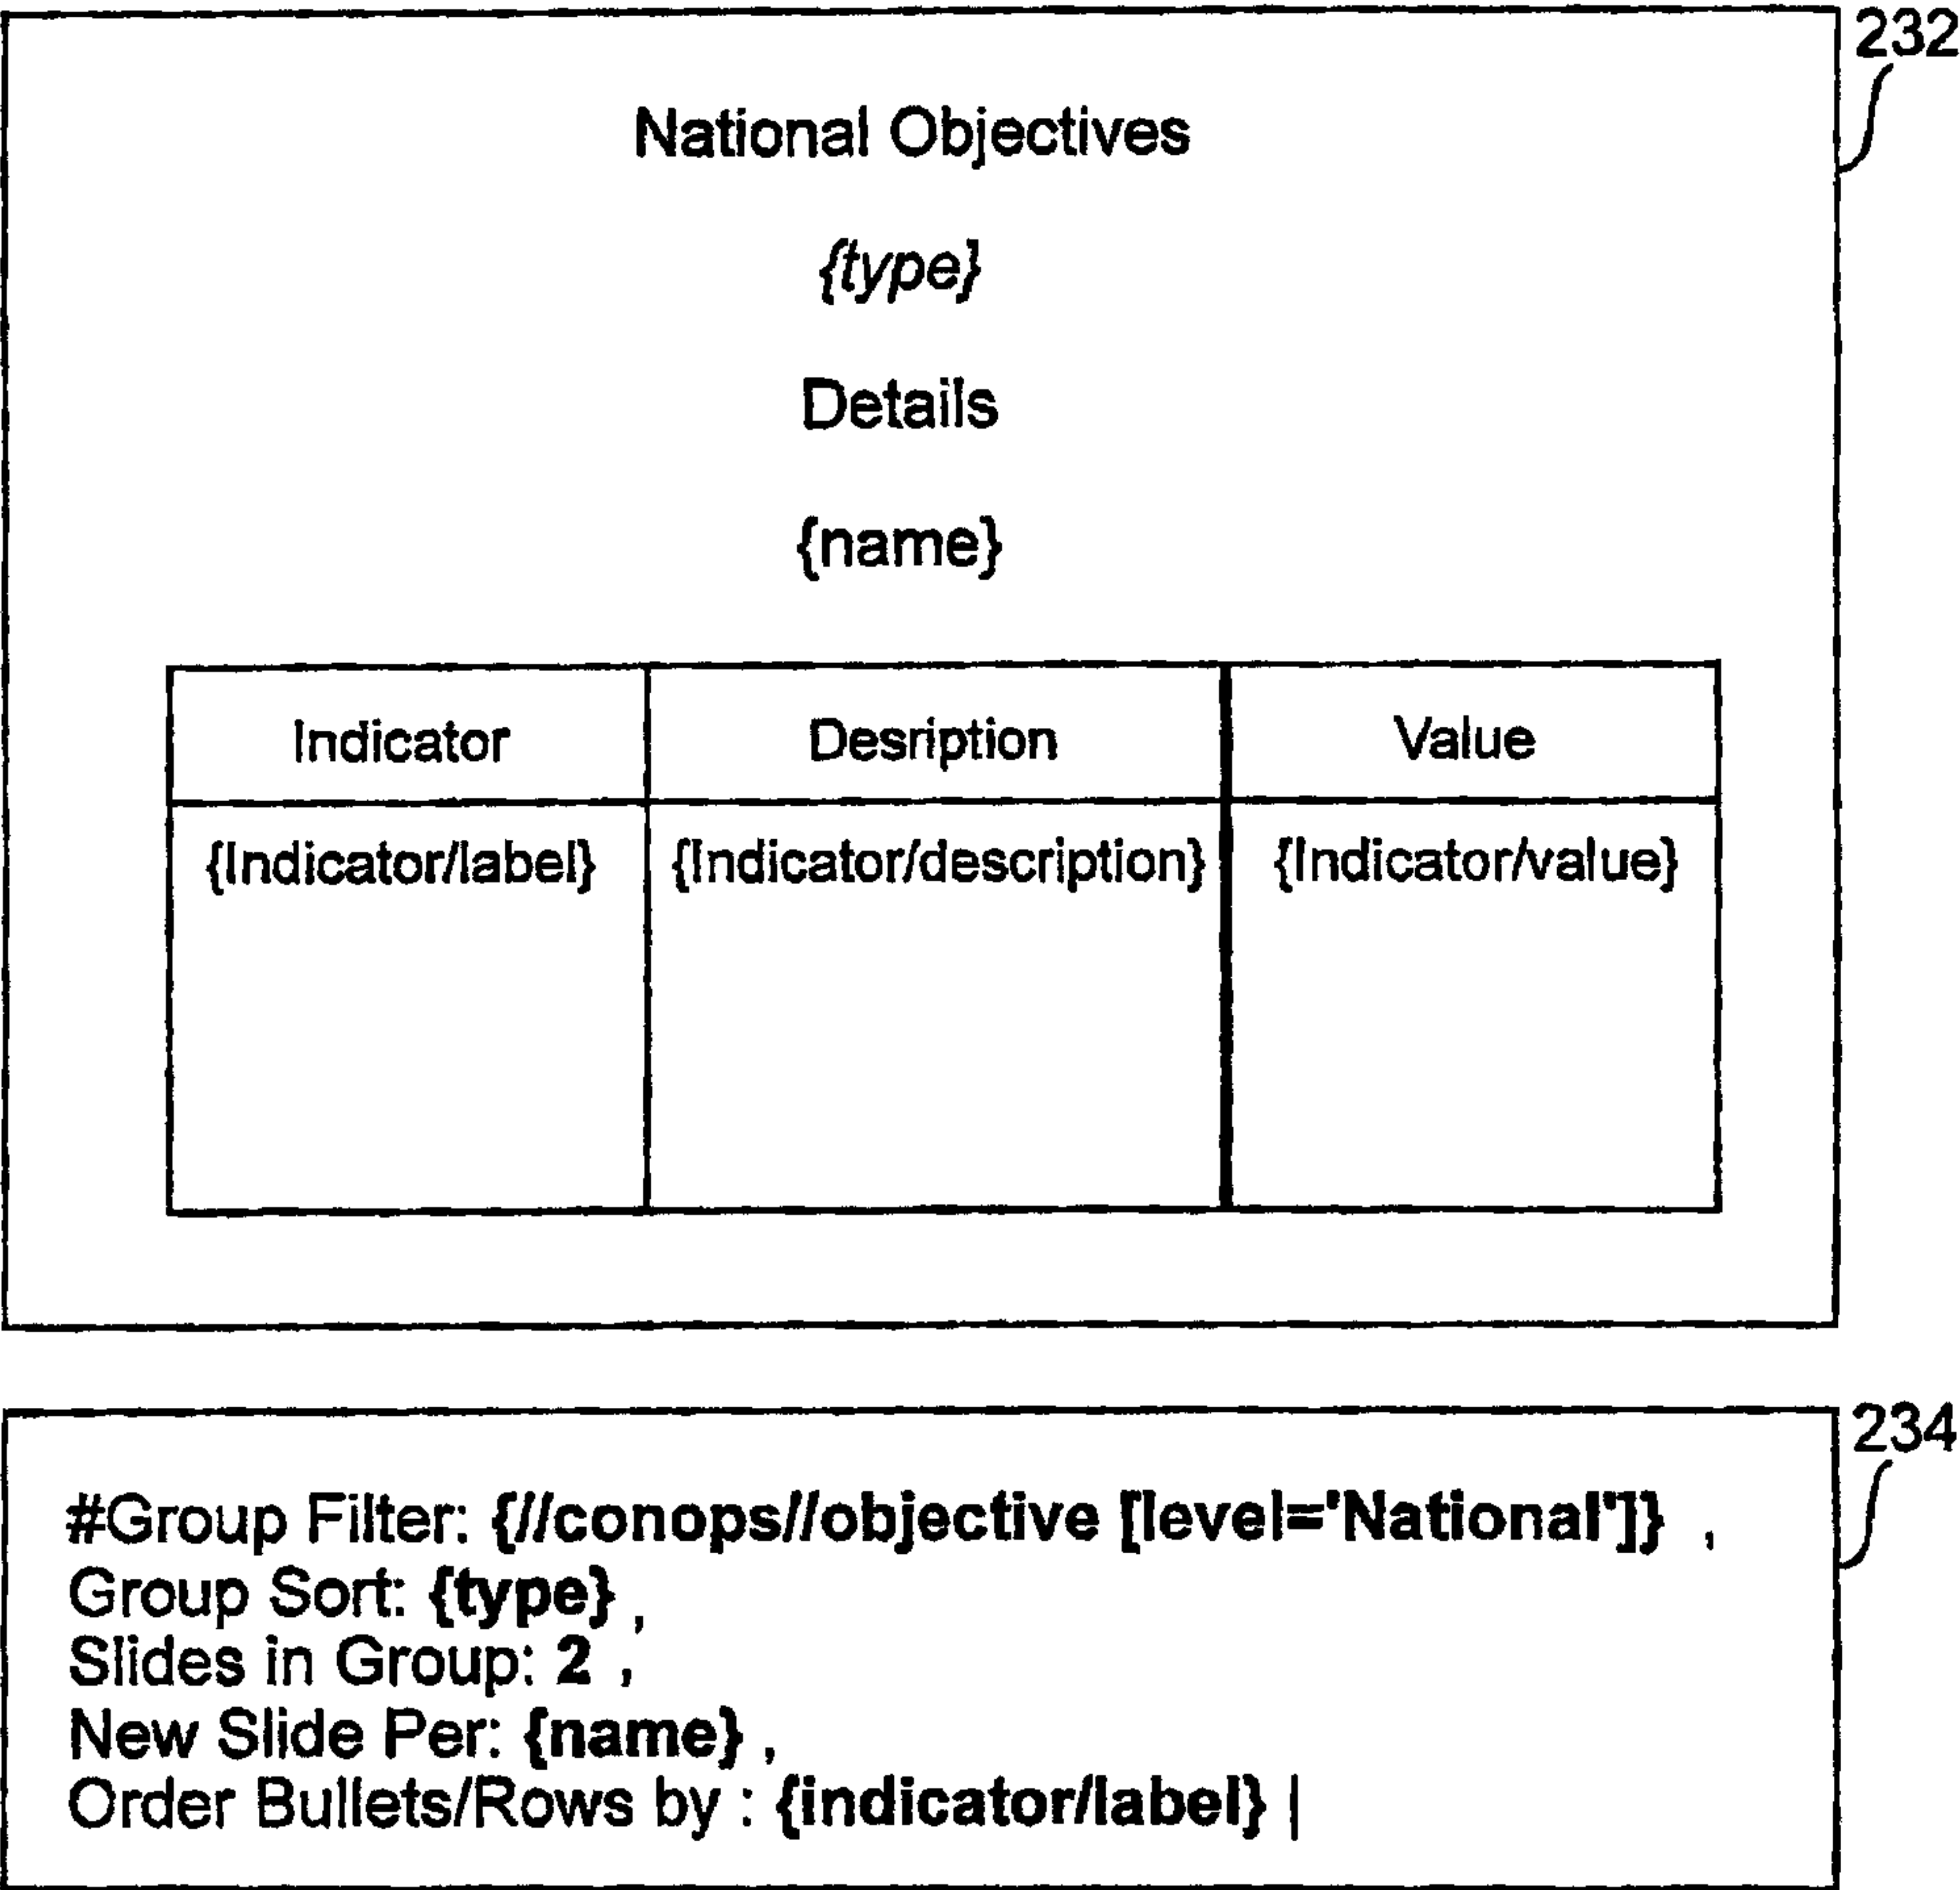


Fig. 23C

26/38

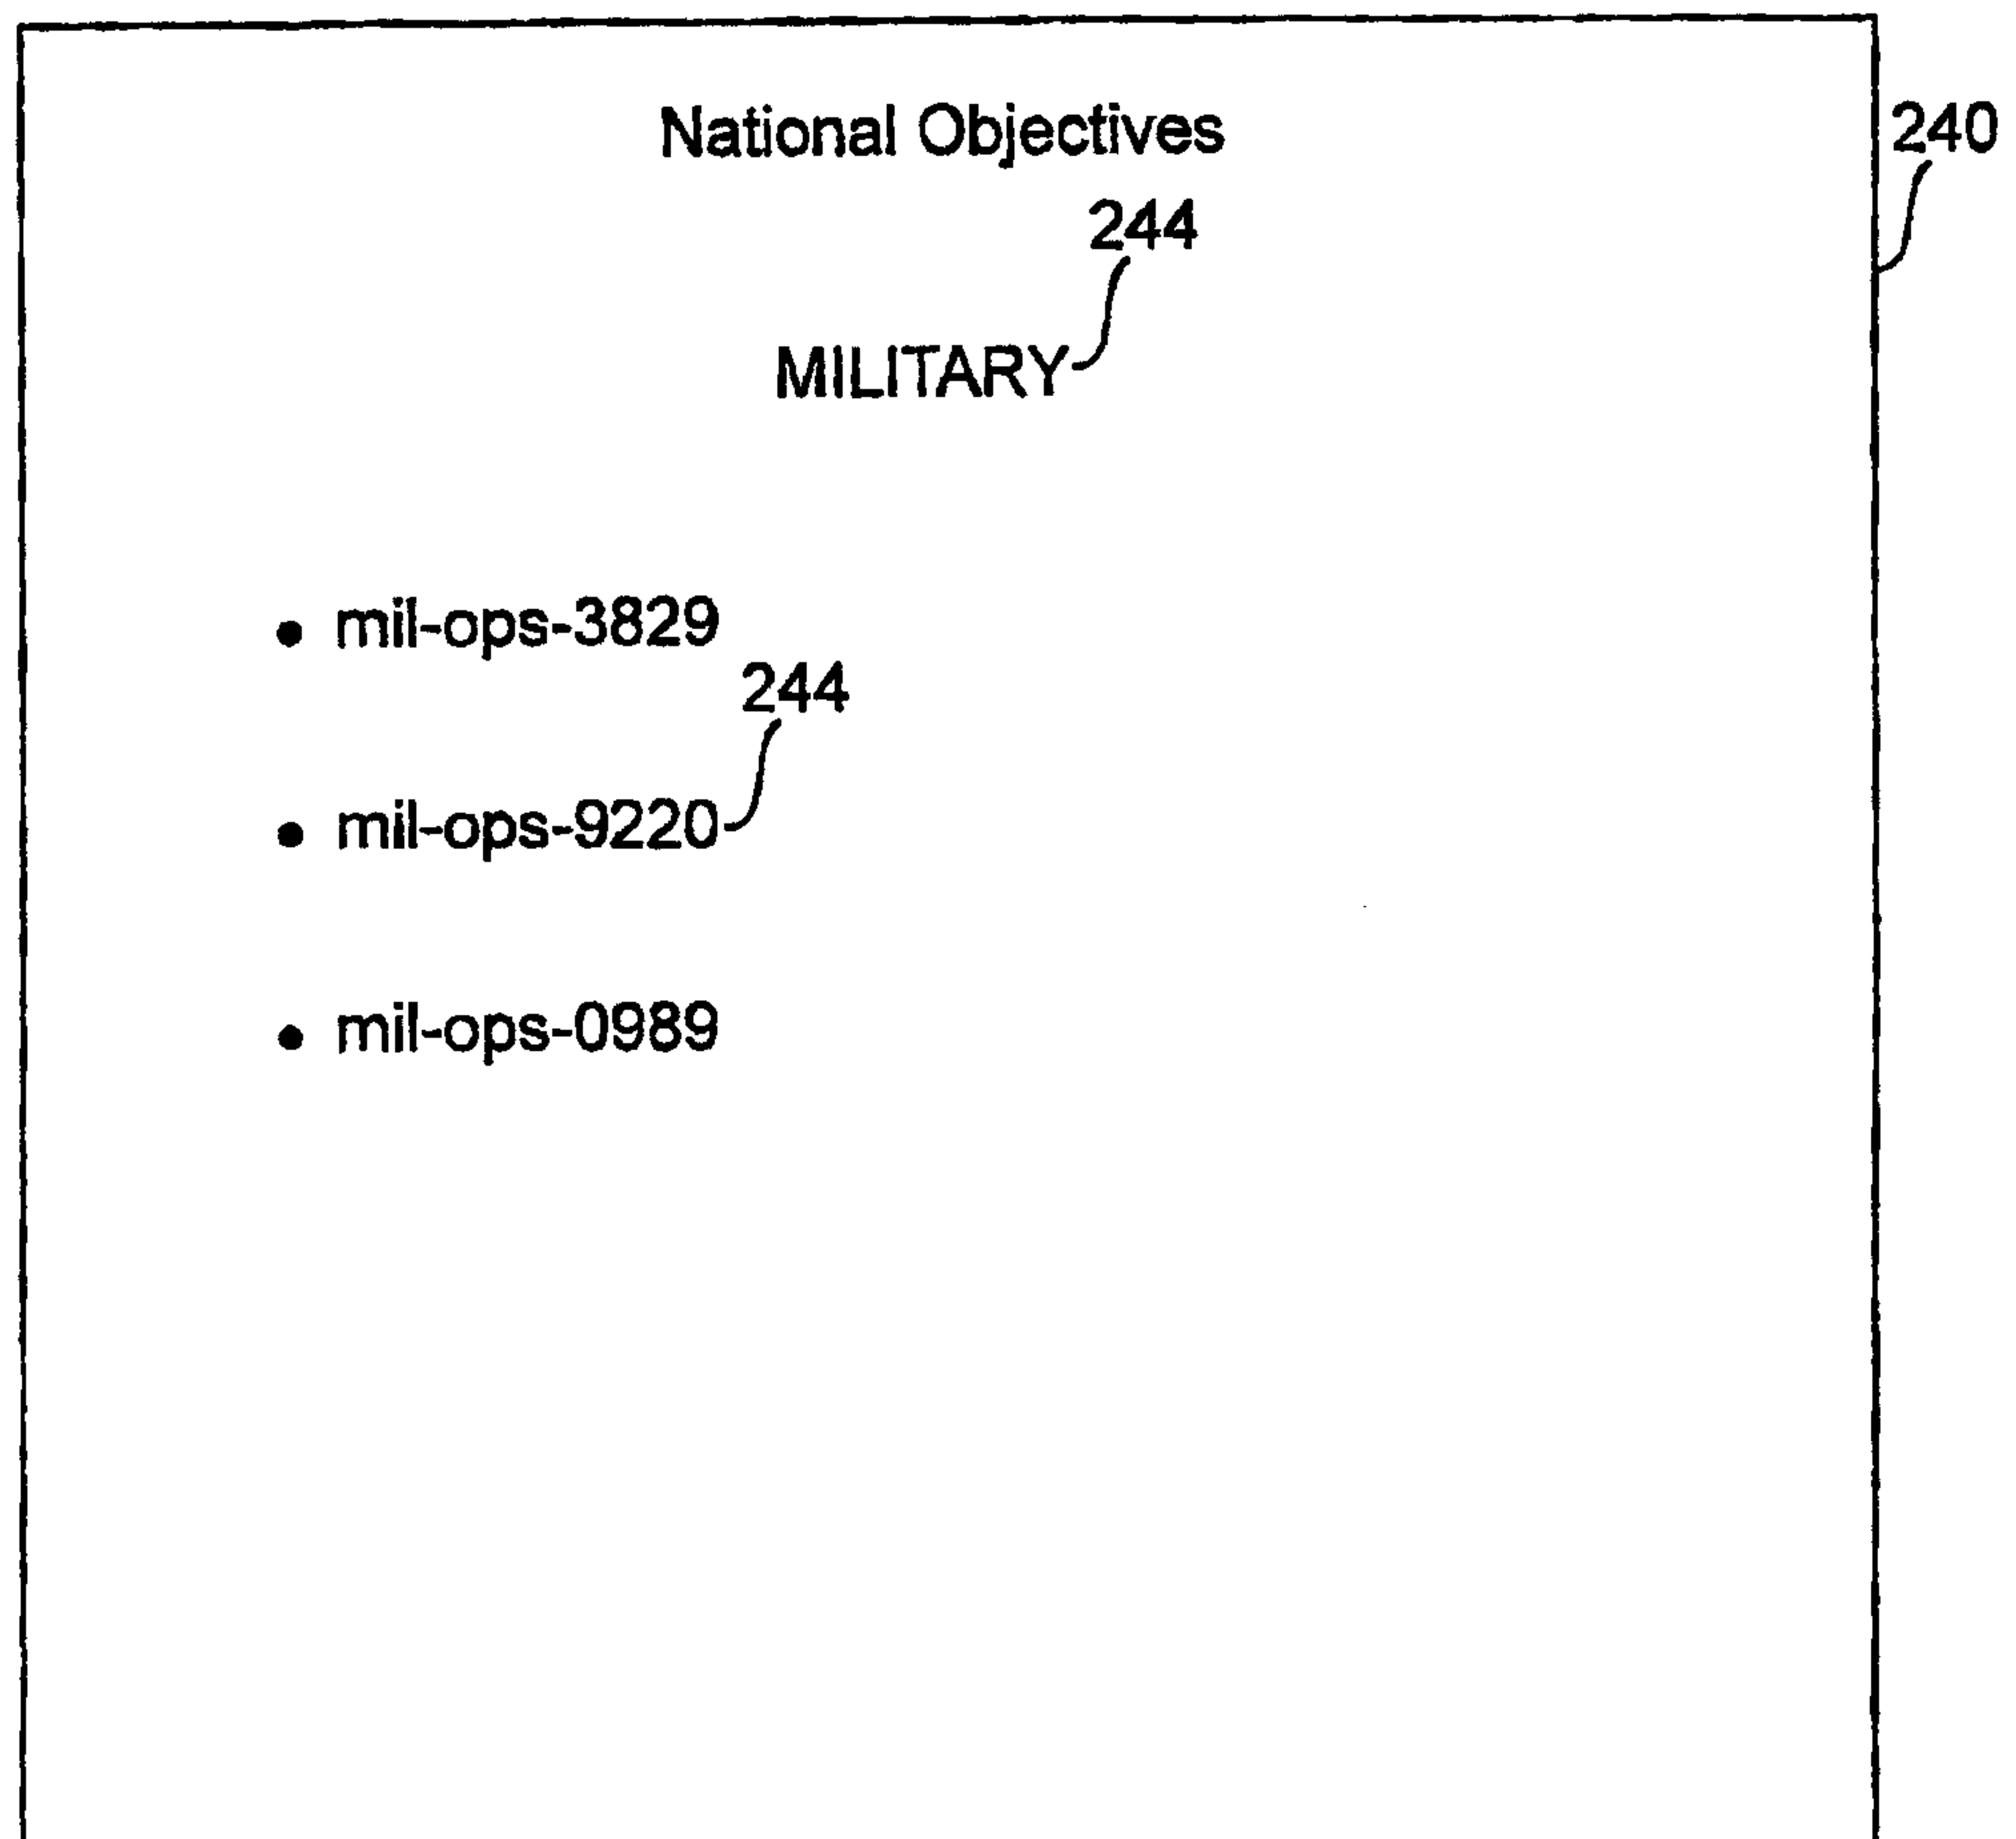


Fig. 24

27/38

National Objective MILITARY Details mil-ops-3829 • Description: -D1 • Rationale: -R1 • PRIORITY: High • Start Date: March 5, 2003

Fig. 25

National Objective		
NATIONAL		
Details		
mil-ops-3829		
Indicator	Desription	Value
L1	D1	V1
L2	D2	V2
L3	D3	V3

Fig. 26

29/38

National Objective MILITARY Details mil-ops-9220 • Description: -D2 • Rationale: -R2 • PRIORITY: Moderate • Start Date: August 15, 2002

Fig. 27

30/38

National Objective		
NATIONAL		
Details		
mil-ops-9220		
Indicator	Description	Value
L6	D6	V6
L7	D7	V7
L8	D8	V8
L9	D9	V9

Fig. 28

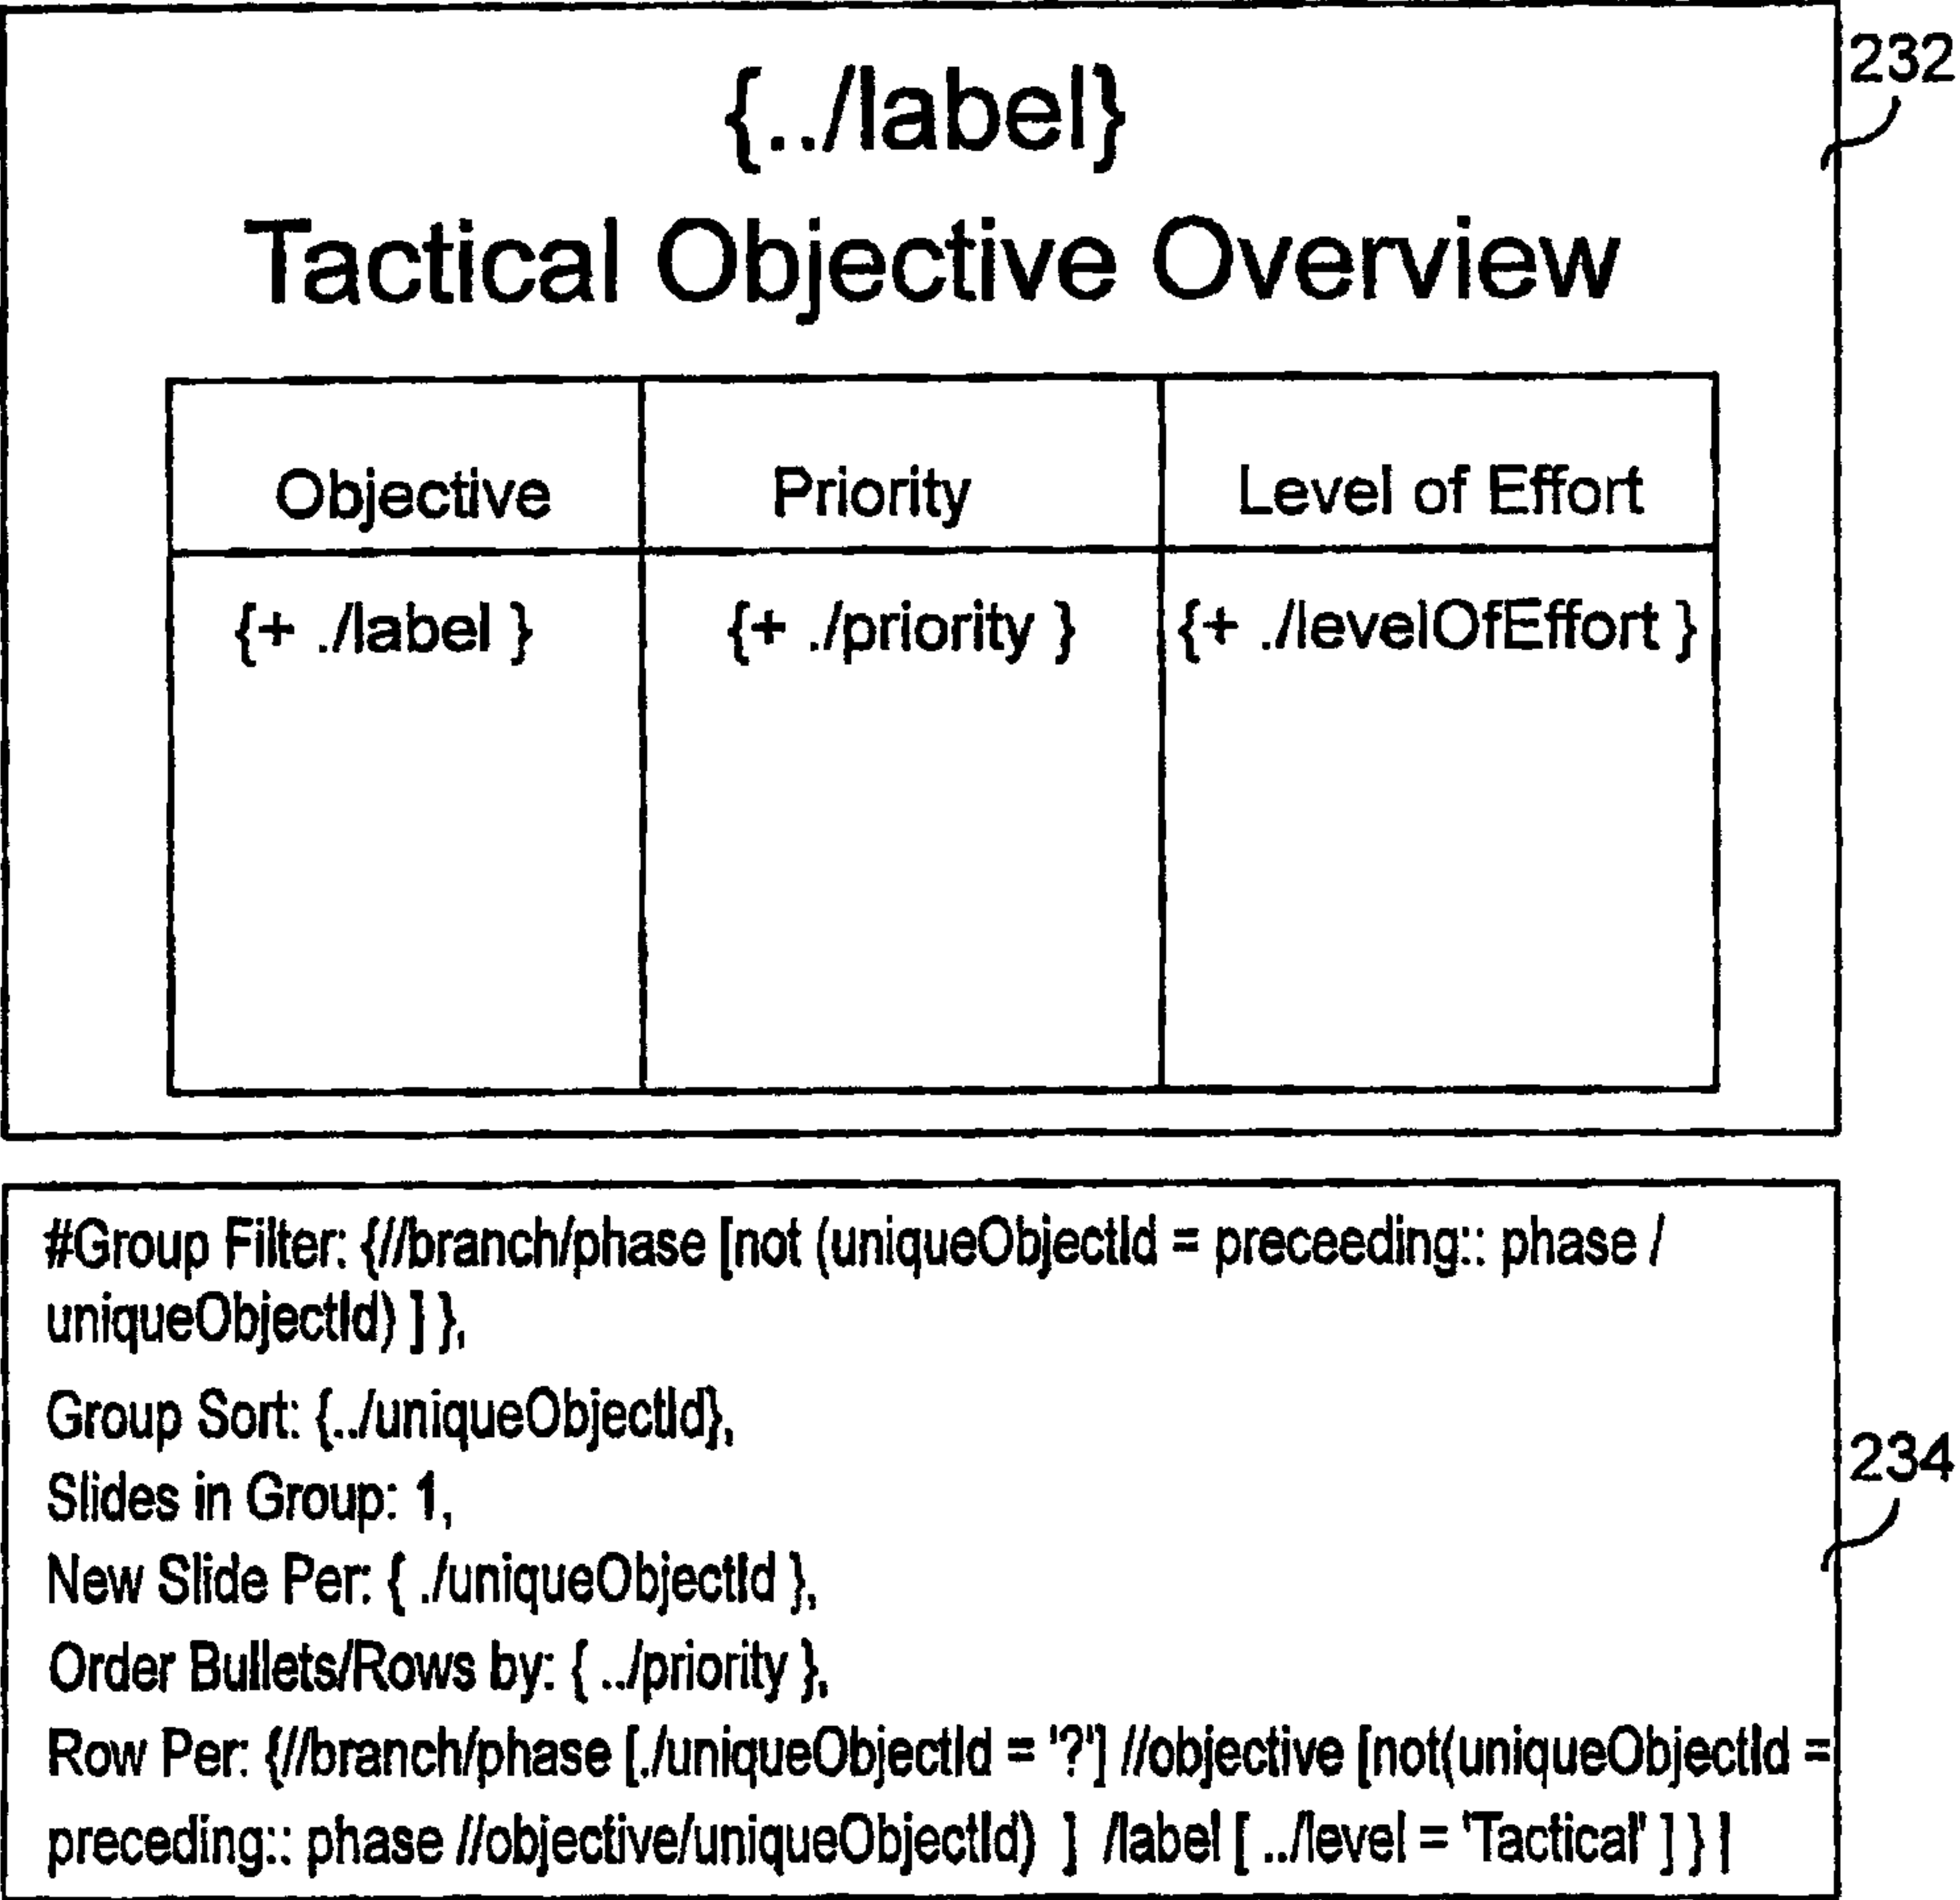


Fig. 29

32/38

Structured Presentation Developer

File Template Slides Queries Tools Help

Overview Slides Queries Data Structure

3040

3005 Classification UNCLASSIFIED

3010 Template Title C/JFACC Morning Briefing Update

3015 Template Notes Morning Strategy Briefing in support of 2nd phase of OPERATION Powerpoint Ranger. Brief delivered daily to C/JFACC and posted to web and JFACC shared drive.

3020 Point of Contact Capt Matthew Silver (8AF/INMS)

3025 Created 28 Apr 04 Modified 07 May 04, 1440

3030 File Location \\JFAC-Plane\Templates\mom_strat_iface.ppt

Load Template Save Template

3035 Plan Data

Plan File \\JFACC-Planes\OPLAN\Strat.xml

Slides 27 Creation Time 1 minute

Load Plan Data Build Briefng

Slide Preview

1

2 Table of Contents

3 Plan Assumptions

Fig. 30

33/38

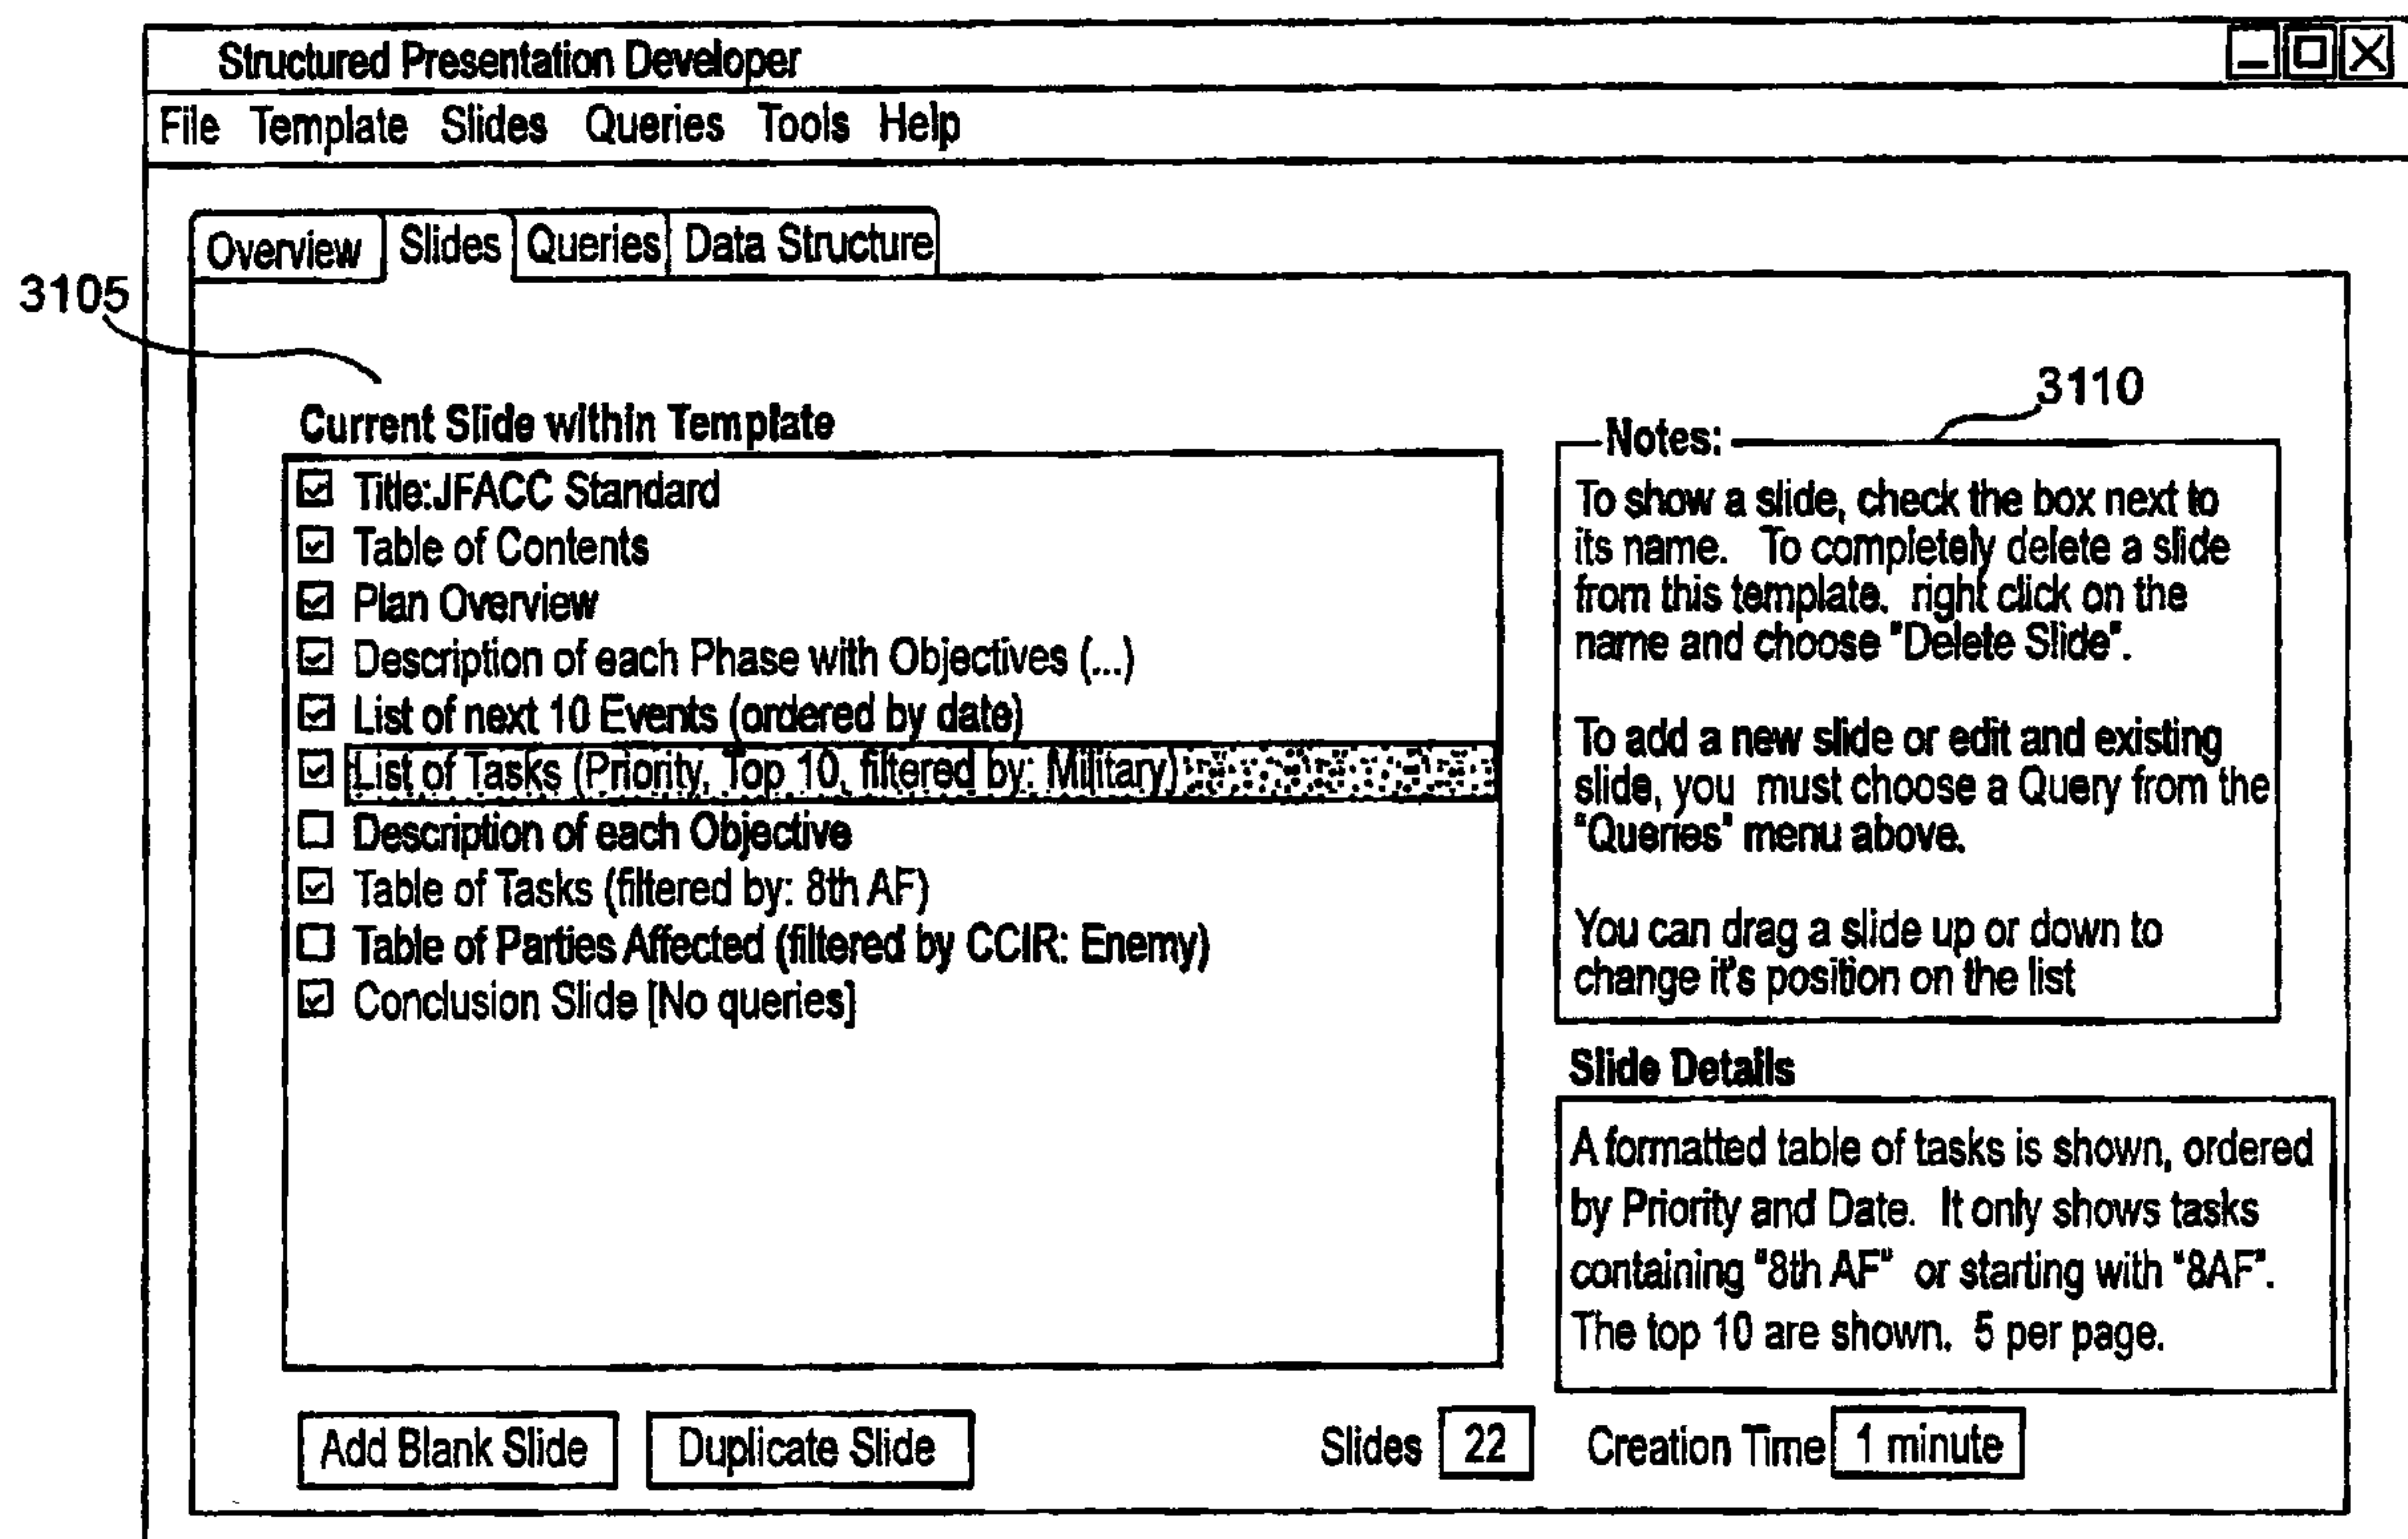


Fig. 31

34/38

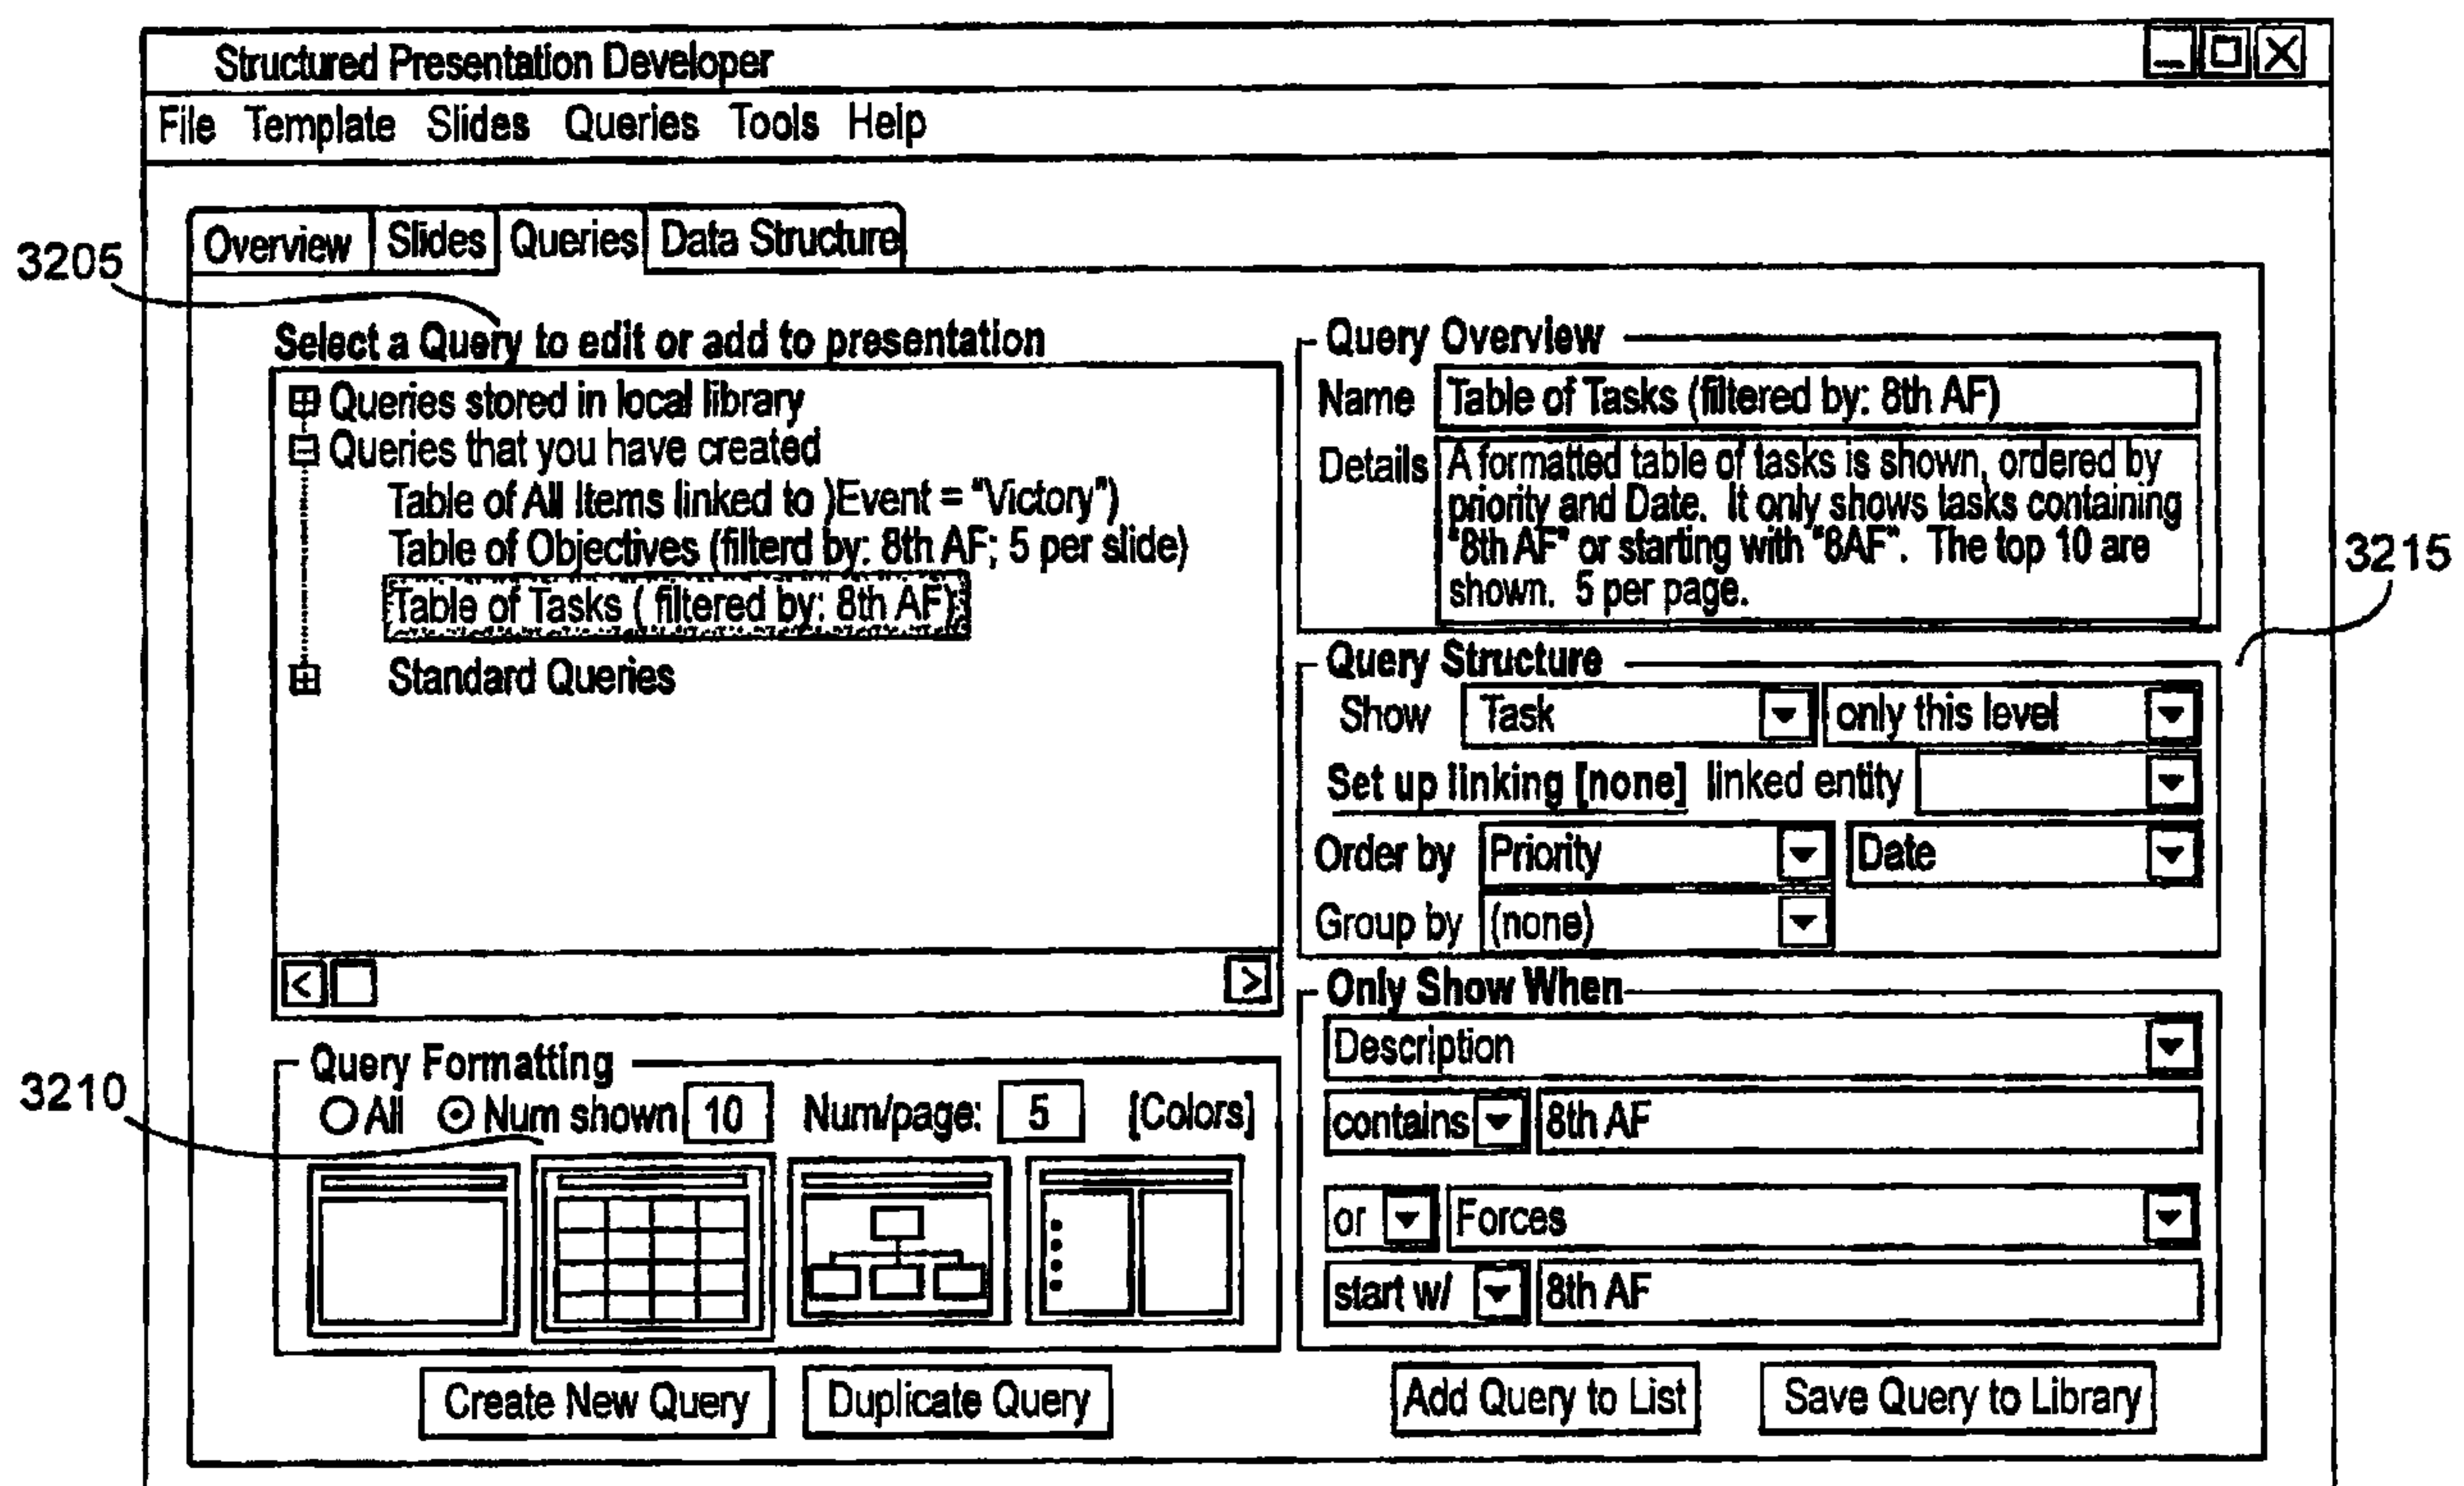


Fig. 32

35/38

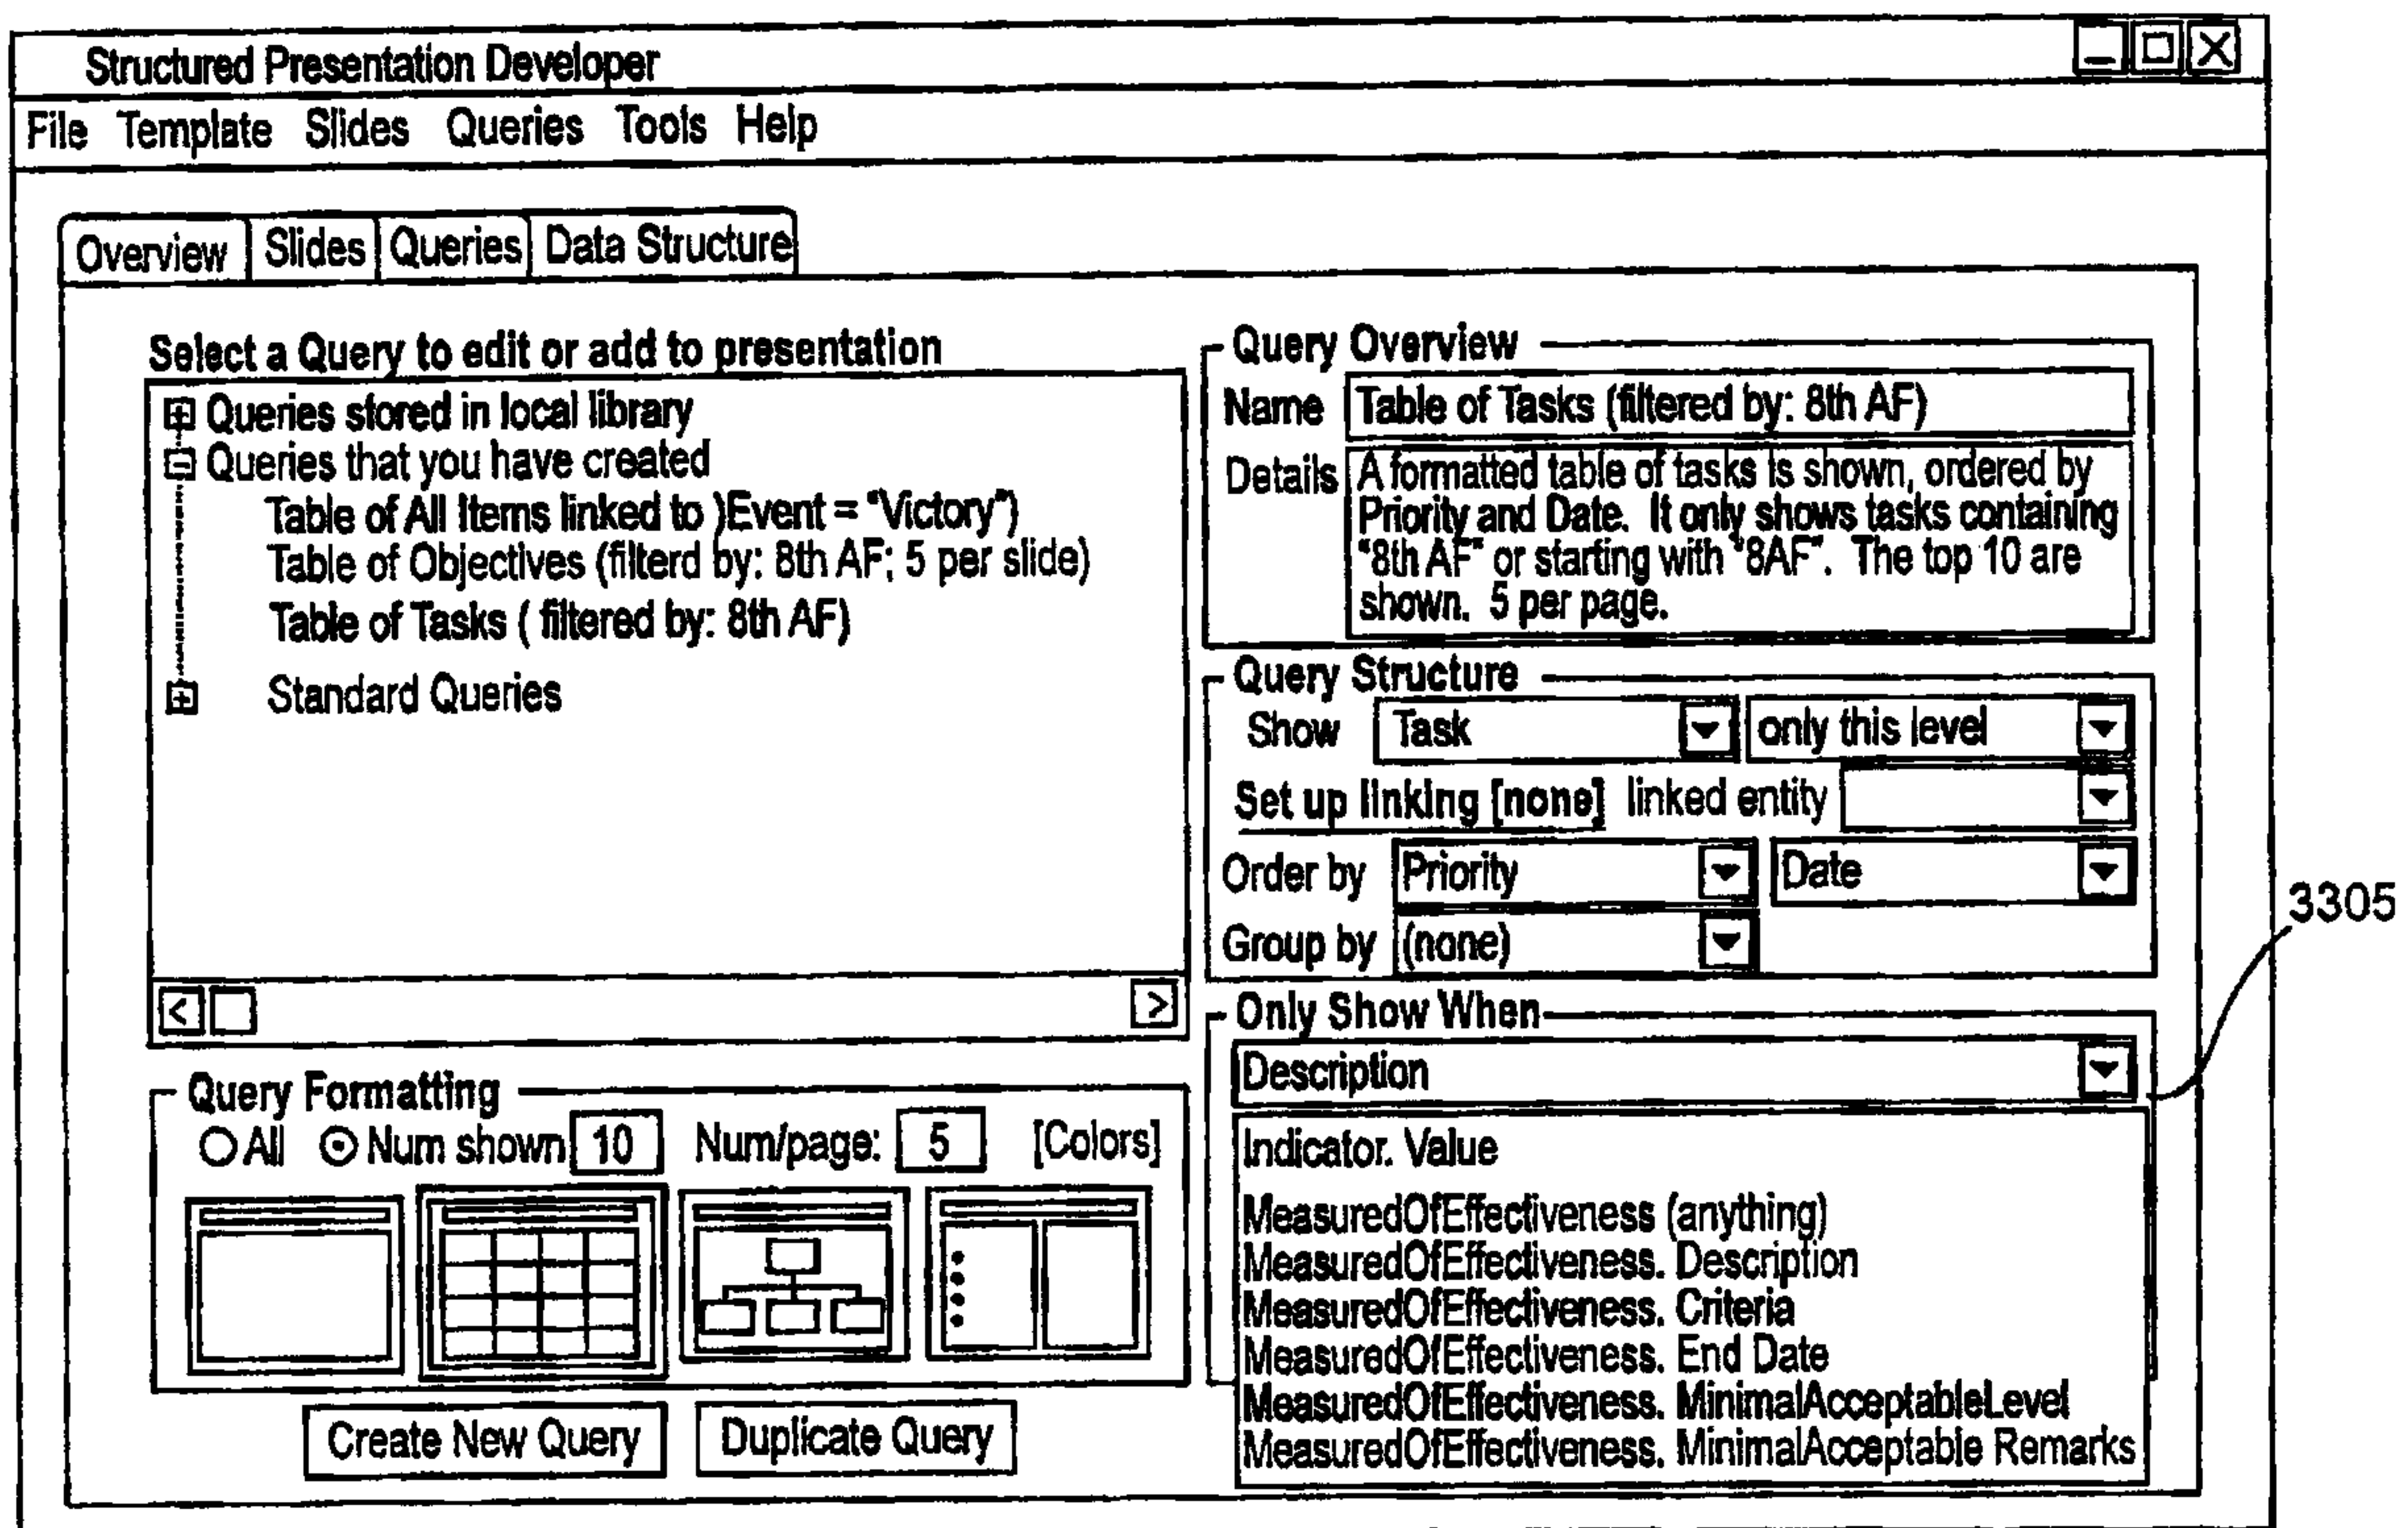


Fig. 33

36/38

Structured Presentation Developer

File Template Slides Queries Tools Help

Overview Slides Queries Data Structure

Select a Query to edit or add to presentation

- Queries stored in local library
- Queries that you have created
 - Table of All Items linked to)Event = "Victory")
 - Table of Objectives (filtered by: 8th AF; 5 per slide)
 - Table of Tasks (filtered by: 8th AF)
- Standard Queries

Query Overview

Name: Table of Tasks (filtered by: 8th AF)

Details: A formatted table of tasks is shown, ordered by priority and Date. It only shows tasks containing "8th AF" or starting with "8AF". The top 10 are shown. 5 per page.

Query Structure

Show: Task only this level

Set up linking [none] linked add 1 level up only this level add 1 level down add 2 levels down

Order by: Priority

Group by: (none)

Only Show When: and all levels down

Description: contains 8th AF

or Trigger: StartDate

on or after 07 May 04, 1505

Query Formatting

All Num shown 10 Num/page: 5 [Colors]

Create New Query Duplicate Query Add Query to List Save Query to Library

3405

Fig. 34

37/38

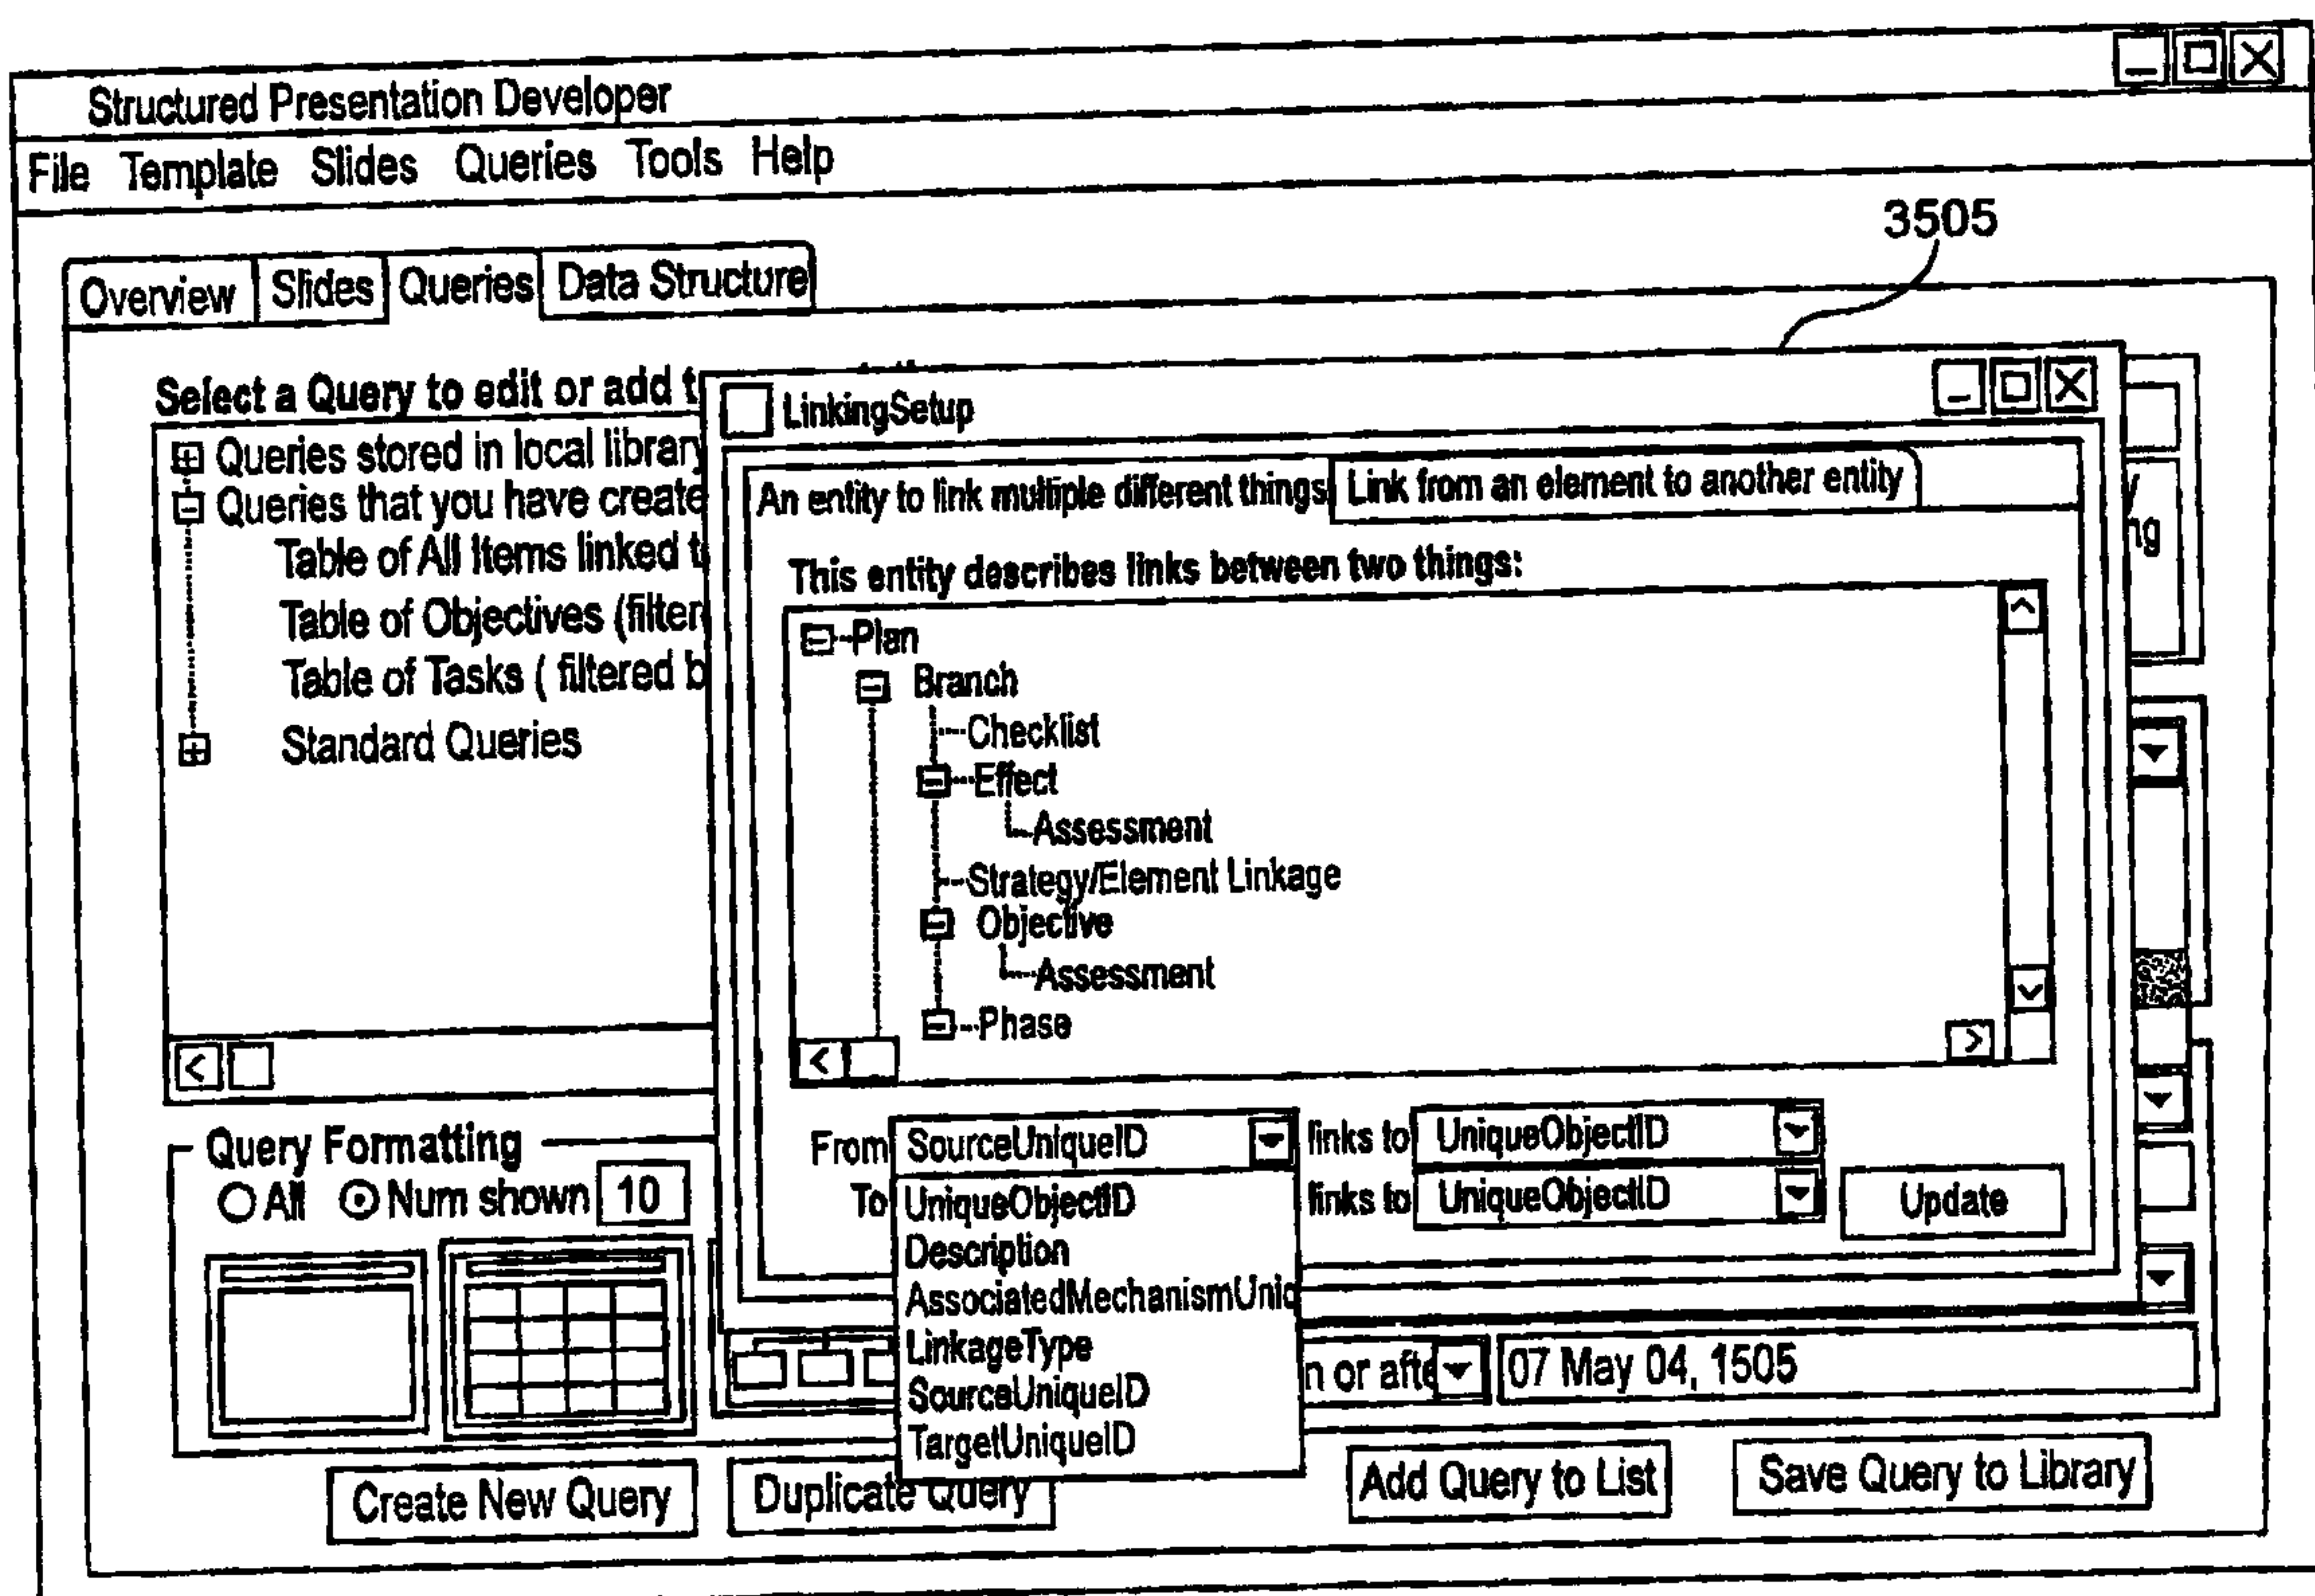


Fig. 35

38/38

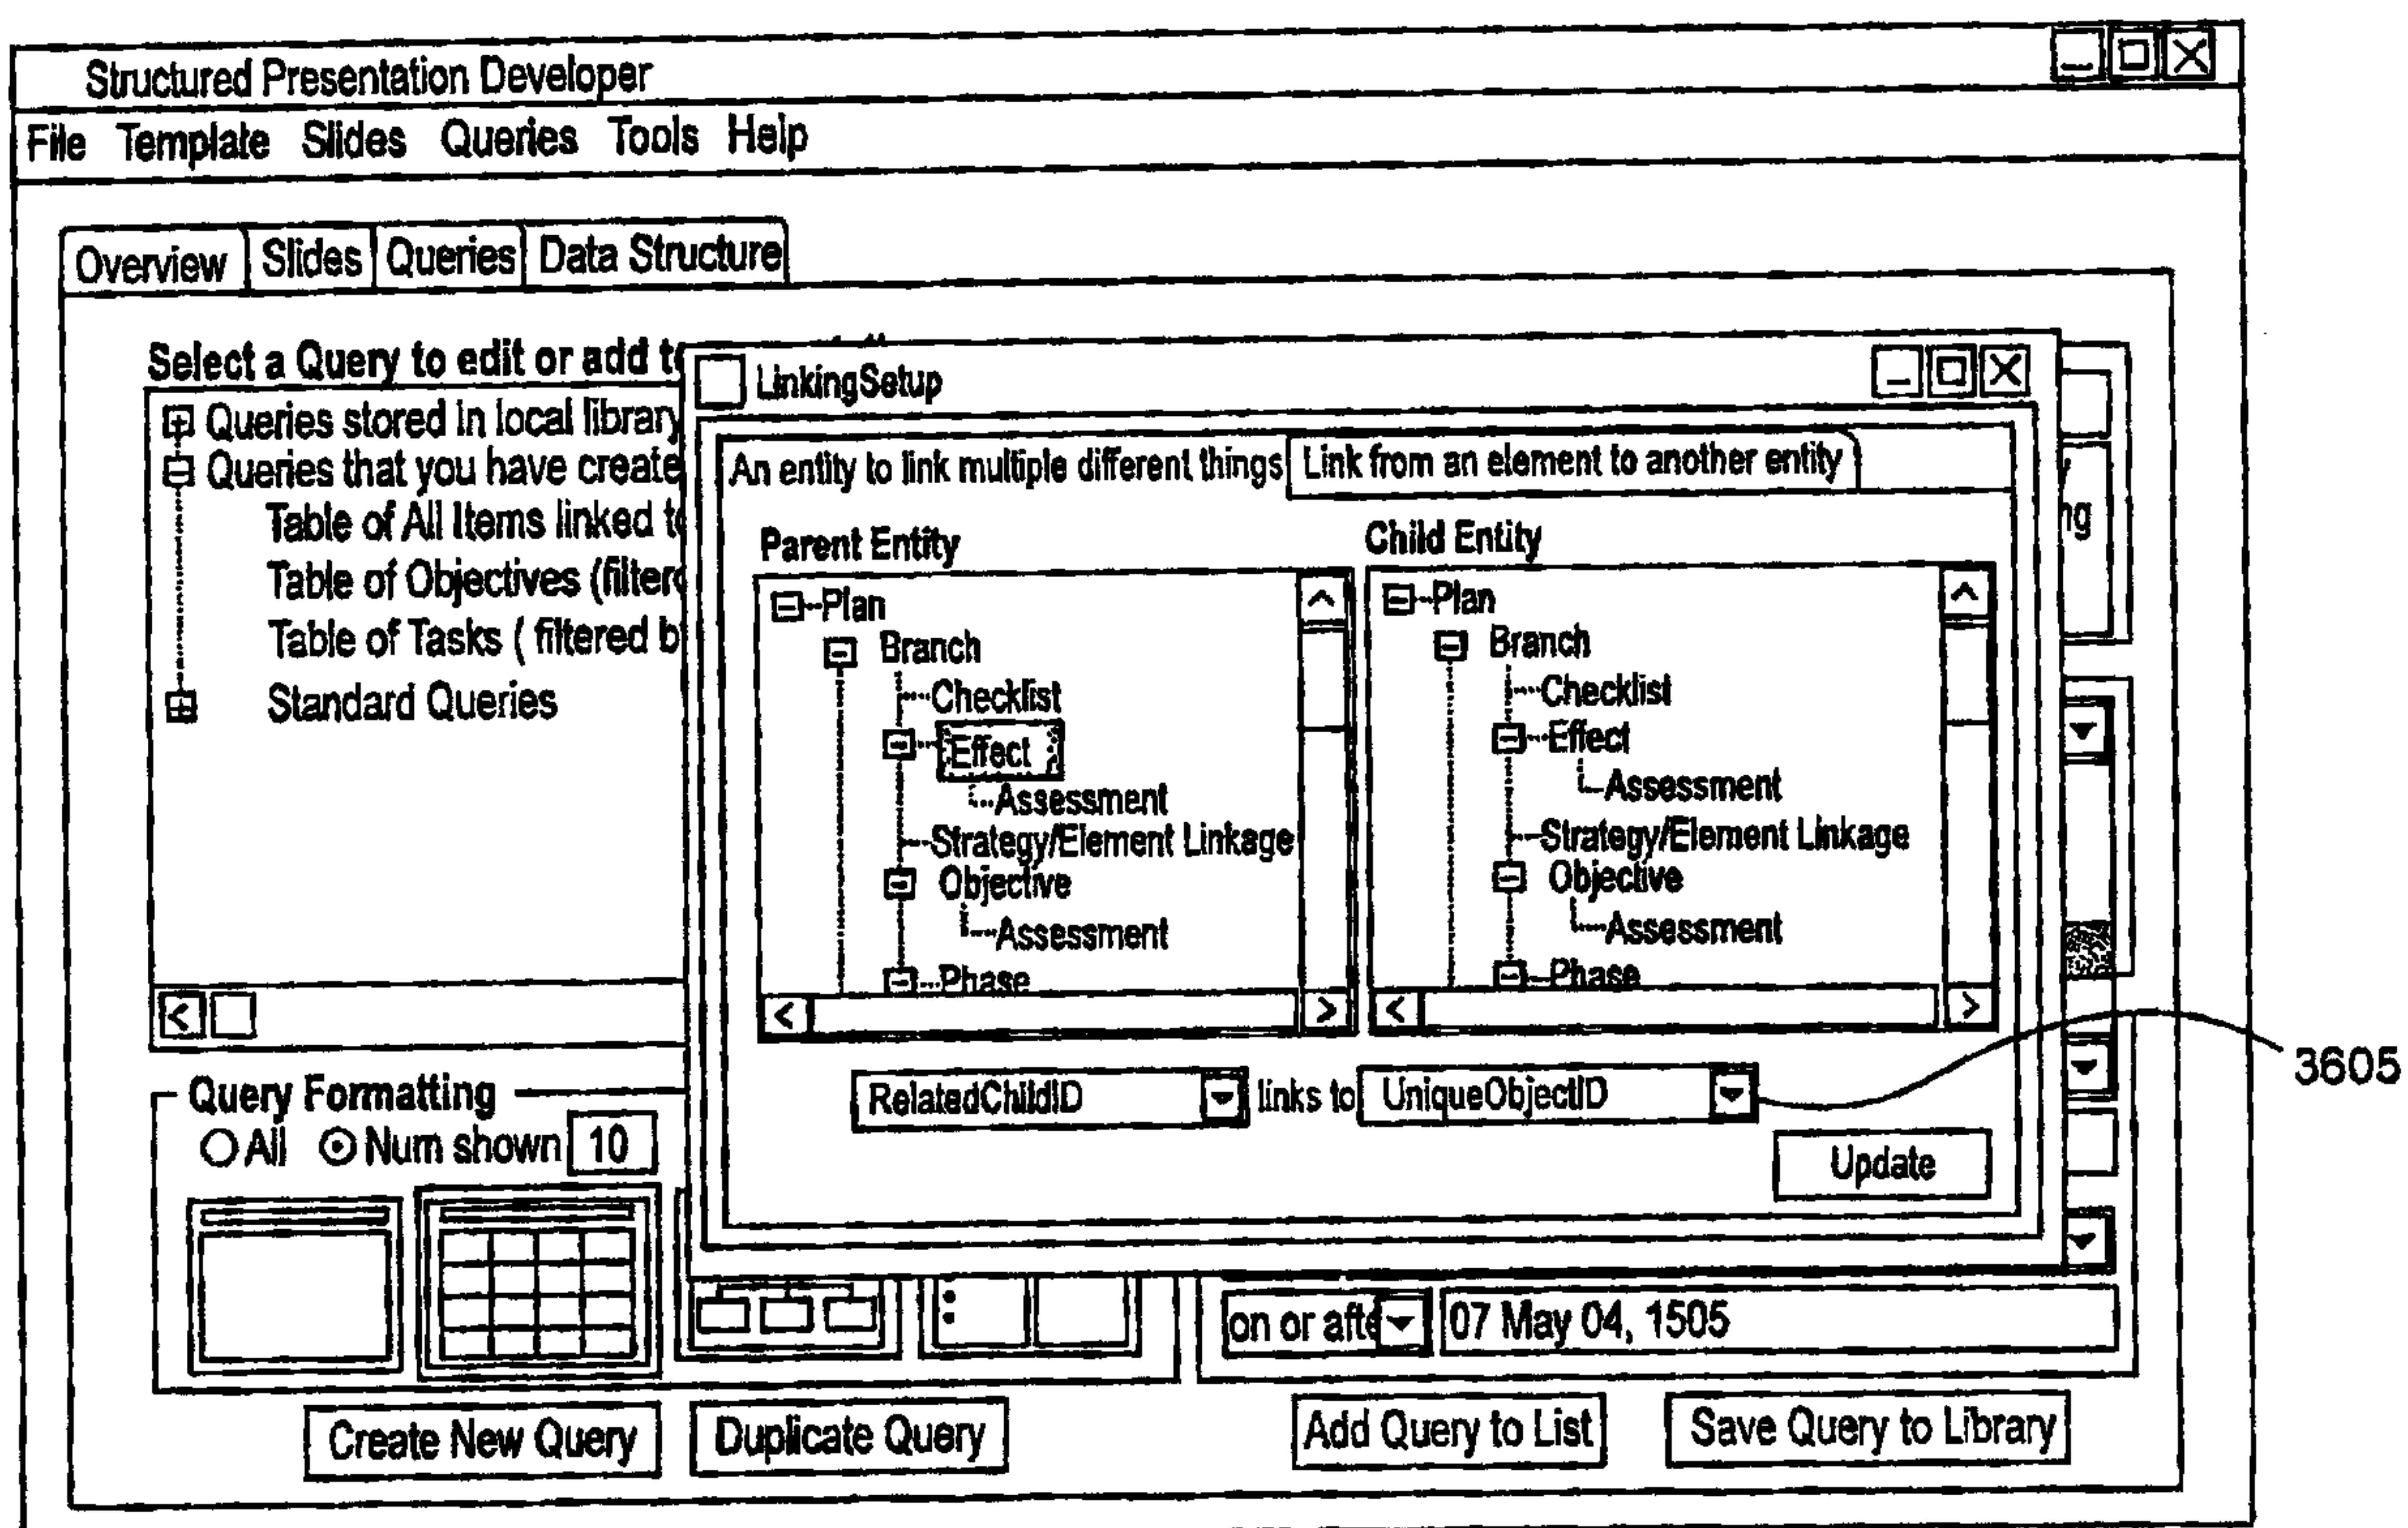


Fig. 36

