

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number
WO 2005/099634 A1

(51) International Patent Classification⁷: **A61F 2/24**, 2/06

(21) International Application Number:
PCT/US2005/012207

(22) International Filing Date: 11 April 2005 (11.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/823,061 12 April 2004 (12.04.2004) US

(71) Applicant (for all designated States except US): **BOSTON SCIENTIFIC SCIMED, INC.** [US/US]; One Scimed Place, Maple Grove, MN 55311-1566 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KUJAWSKI, Dennis** [US/US]; 71 Coppergate Lane, Warwick, NY 10990 (US).

(74) Agent: **SCOLA, Daniel, A., Jr.**; Hoffmann & Baron, LLP, 6900 Jericho Turnpike, Syosset, NY 11791_ (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TRI-PETALED AORTIC ROOT VASCULAR GRAFT

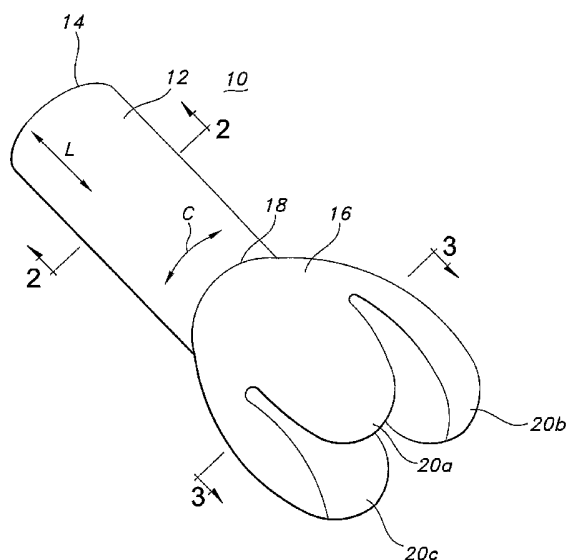

(57) Abstract: An implantable, flat-woven multi-petaled graft (10) includes a hollow tubular woven portion (12) having opposed first and second tubular ends, the woven portion having a number of warp yarns interlaced with a number of fill yarns in a flat-woven tubular woven pattern to define a flat-woven tubular diameter, and a bulbous woven portion (16) having opposed first and second ends, the first bulbous end having a greater number of warp yarns interlaced with the fill yarns in a flat-woven tubular bulbous pattern contiguously woven from the second tubular end to provide a seamless woven, wherein the greater number of warp yarns are threadingly engaged with the fill yarns to define a flat-woven bulbous diameter; wherein the second end of the bulbous portion is scalloped with a plurality of petal-like projections (20a, 20b, 20c) seamlessly woven from the first bulbous end.

WO 2005/099634 A1

TRI-PETALED AORTIC ROOT VASCULAR GRAFT

FIELD OF THE INVENTION:

5 The present invention relates to an aortic root vascular graft and methods of manufacture. In particular, the present invention relates to seamlessly woven, tri-petaled, aortic root vascular grafts.

BACKGROUND OF THE INVENTION:

10 Tubular woven fabrics have been used for soft-tissue implantable prostheses to replace or repair damaged or diseased lumens in the body. In particular, endoprotheses are used in the vascular system to prevent the blood from rupturing a weakened section of the vessel. Such endoluminal conduits are generally affixed in a specified location in the vessel by means of stents, hooks or other mechanisms which serve to secure the device in place.

15 Endoluminal tubular devices or conduits can also be used in other lumens in the body, such as in the esophagus and colon areas.

 Weaving is commonly employed to fabricate various tubular shaped products. For example, implantable tubular prostheses which serve as conduits, such as vascular grafts,

20 esophageal grafts and the like, are commonly manufactured using tubular weaving techniques, wherein the tubular product is woven as a flat tube. In such weaving processes, a variety of yarns are interwoven to create the tubular fabric. For example, a set of warp yarns is used which represents the width of the product being woven, and a fill yarn is woven between the warp yarns. The fill yarn is woven along the length of the warp yarns, with each

25 successive pass of the fill yarn across the warp yarns for each side of the tube representing one machine pick. Thus, two machine picks represent one filling pick in a tubular woven structure, since weaving one fill yarn along the entire circumference of the tube, i.e., one filling pick, requires two picks of the weaving machine. As such, in a conventional woven product, the fill yarn is woven along the length of the warp yarns for a multiple number of

30 machine picks, with the woven product produced defined in length by the number of filling picks of the fill yarn and defined in width by the number of warp yarns in which the fill yarn is woven therebetween.

Some damaged or diseased lumen~~s~~, however, have quite complex shapes. For example, the root portion of the aorta is provided sinuses or bulges that surround the aortic valve, which are called the sinuses of Valsalva. The diameter and orifice area of the aortic root are greater at the vicinity of the sinuses as compared to other portions of the root. With such a complex geometry, implantable grafts matching such complexity have often been made by suturing differently shaped graft components together. For example, U.S. Patent No. 6,352,554 to DePaulis describes a method for forming a graft for the aortic root by suturing a bulbous woven section in between two straight tubular woven sections. Further, the bulbous woven section is also formed cutting or otherwise attaching woven materials. Such techniques are not only costly as numerous textile portions must be sutured to one and the other, but also serve as a potential source for leakage as it is difficult to suture fluid-tight seams among the textile components.

The present invention provides for a seamlessly woven complex grafts including seamlessly woven projections or petals, such as but not limited to aortic root grafts, and methods for producing the same.

SUMMARY OF THE INVENTION:

In one aspect of the present invention, an implantable, flat-woven multi-petaled graft is provided. The graft includes (i) a hollow tubular woven portion having opposed first and second tubular ends, the woven portion having a number of warp yarns interlaced with a number of fill yarns in a flat-woven tubular woven pattern to define a flat-woven tubular diameter, and (ii) a bulbous woven portion having opposed first and second ends, the first bulbous end having a greater number of warp yarns interlaced with the fill yarns in a flat-woven tubular bulbous pattern contiguously woven from the second tubular end to provide a seamless woven , wherein the greater number of warp yarns are threadingly engaged with the fill yarns to define a flat-woven bulbous diameter; wherein the second end of the bulbous portion is scalloped with a plurality of petal-like projections seamlessly woven from the first bulbous end. Desirably, the graft of the present invention may include three petal-like projections. The bulbous woven section may be truncated, i.e., hemispherically or hemibulbously shaped.

The graft of the present invention may be crimped. For example, the tubular portion may be circumferentially crimped. Further, the petal-like projections may be circumferentially crimped.

- 5 The graft of the present invention may be ravel resistant, especially the petal-like projections may have edges that are desirably ravel-resistant. The ravel resistant edges may be formed by fusingly sealing the edges. The edges may include heat-fusible yarns. Further, the edges may include an increased yarn density as compared to non-edge portions of the projections. The edges may be woven selvages, or may be cut from the bulbous second end.
- 10 One method of cutting includes ultrasonic cutting which can also seal the edges from raveling, such as by ultrasonically fusing yarns disposed at the edges.

- Desirably, the petal-like projections are contoured. The petal-like projections may be contoured, in part, by threadingly engaging the additional number of warp yarns from the fill
- 15 yarns. Further, the second end of the bulbous portion may be contoured, in part, by threadingly disengaging the additional number of warp yarns from the fill yarns. The petal-like projections or the bulbous portion may be contoured to mimic the shape of the sinuses of Valsalva.

- 20 The tubular woven pattern and the bulbous woven pattern may be selected from, but not limited to, a plain weave, a basket weave, a twill weave, a velour weave, a double velour weave, a satin weave, a terry weave, and combinations thereof. The warp yarns and the fill yarns may include materials, such as polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof.

- 25 Desirably, the warp or fill yarns are single ply, 70 denier, 54 filament, twisted flat polyester; double ply, 40 denier, 27 filament, twisted set polyester; or combinations thereof.

- The graft of the present invention may further include a mechanical or tissue heart
- 30 valve wherein the woven petal-like projections are securably attached to the valve.

In another aspect of the present invention, an implantable prosthesis includes (i) a hollow tubular woven portion having opposed first and second tubular ends, the woven portion having a number of warp yarns interlaced with a number of fill yarns in a flat-woven

tubular woven pattern to define a flat-woven tubular diameter; and (ii) a non-tubular woven projection seamlessly transitioned from the second tubular end. The graft may further include a plurality of non-tubular projections seamlessly transitioned from the second tubular end. Desirably, the non-tubular projections are petal shaped.

5

A method for weaving the graft according to the present invention includes the steps of: (i) weaving a first flat-woven tubular section having opposed open ends and having a number of warp yarns and a number of fill yarns interlaced in a woven pattern to define a first flat-woven diameter; (ii) providing additional warp yarns; (iii) weaving the additional warp
10 yarns into a woven pattern with the number of fill yarns at one of the open ends of the first tubular section to define a bulbous woven section having a second flat-woven diameter, the second diameter being greater than the first diameter; and (iv) scalloping the bulbous woven section to provide a multi-petaled woven end.

15 The step of scalloping the bulbous end further may further include the step of cutting the bulbous woven portion along longitudinal portions to define edges of a plurality of petal-like projections. The cutting may be ultrasonic cutting. Alternatively, the step of scalloping the bulbous end may further include the step of seamlessly weaving a plurality of petal-like projections extending from the bulbous end. Such weaving may include weaving selvages to
20 define woven edges of the petal-like projections.

The method according to the present invention may further include the step of radially crimping the woven tubular and the woven bulbous sections. Further, the crimping may further include radially crimping the petal-like projections.

25

The method according to the present invention may further include the steps of (i) providing a mechanical or tissue heart valve; and (ii) attaching the woven petal-like projections to the valve.

30 **BRIEF DESCRIPTION OF THE DRAWINGS:**

FIG. 1 is a perspective view of a tri-petaled graft of the present invention.

FIG. 2 is a cross-sectional view of the graft of FIG. 1 taken along the 2-2 axis.

FIG. 3 is a cross-sectional view of the graft of FIG. 1 taken along the 3-3 axis.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT:

It has been discovered through the present invention that tubular woven textile products such as multi-lobed or multi-petaled vascular grafts can be seamlessly woven into a variety of complex, varied-diameter shapes and sizes, without the need for any post-weaving fabrication techniques such as cutting, sewing, suturing and the like. One method for seamlessly weaving shaped tubular grafts is disclosed in U.S. Patent No. 5,800,514 to Nunez et al., the contents of which are incorporated herein by reference. This patent describes shaped woven tubular grafts having a gradual woven transition between different sized or shaped tubular graft portions. For the more complex shaped grafts of the present invention such a gradual woven transition, however, may not result in a seamless graft which anatomically matches complex lumen contours, such as the aortic root. One method for weaving such more complexly shaped graft is described in U.S. Patent Application No. 10/823,456 titled "Varied Diameter Vascular Graft" and filed April 12, 2004, the contents of which is incorporated herein by reference.

FIG. 1 depicts a tri-petaled vascular graft 10 of the present invention. Graft 10 is suitable for replacement of the aortic root, but the present invention is not so limited. Graft 10 includes a first woven tubular section 12 and a varied diameter bulbous woven section 16. Although tubular section 12 is depicted as a straight tubular section, the present invention is not so limited. For example, woven section 12 may also have a varied diameter, for example a tapered shape. Additionally, the bulbous section 16 includes three petals 20a, 20b, 20c. In weaving graft 10 warp yarns extend along the longitudinal direction of graft 10, which is depicted by vector "L". Fill yarns extend circumferentially or radially as depicted by vector "C". Graft 10 is woven as a single structure, i.e., a flat-woven, seamless, varied-diameter, tri-petaled graft. For example, portion 18 of graft 10 is a seamless transition between the woven sections 12 and 16.

As depicted in FIG. 2, the distal end 14 of woven portion 14 is an open end, more particularly a hollow tubular open end. As depicted in FIG. 3 the distal portions of petals 20a, 20b, and 20c are not connected. Further, the diameter D_1 of tubular section 12 is desirably less than the diameter D_2 of bulbous section 16.

The bulbous section 14 is depicted as a generally spherical section in FIG. 1. The present invention, however, is not so limited, and the bulbous section may have other outwardly extending or flared configurations. For example, the bulbous shape may be oblong. Desirably, the bulbous section 16 or the petal-like projections 20a, 20b, 20c are
 5 contoured to mimic the shape of the sinuses of Valsalva.

The graft 10 includes, but is not limited to, a flat-woven tubular portion 12 and a contiguous bulbous woven section 16. The first bulbous end proximal to portion 18 is contiguous with the first tubular portion 12. The tubular portion 12 includes a first number of
 10 warp yarns interlaced with a plurality of fill yarns in a woven pattern to define a flat-woven tubular diameter. The bulbous portion 16 has a second number of warp yarns interlaced with the plurality of fill yarns in a woven pattern to define a flat-woven bulbous diameter; wherein the second number of warp yarns is greater than the first number of warp yarns.

Desirably, the bulbous diameter, D_2 , is from about 2 mm to about 20 mm greater than the first diameter, D_1 , more desirably, from about 4 mm to about 12 mm, preferably about 8 mm. The first diameter, D_1 , may vary from about 10 mm to about 50 mm. Useful first diameters include, but are not limited to, 24 mm, 26 mm, 28 mm, 30 mm and 32 mm. Preferred corresponding maximum diameters of the bulbous or sinus region 16 include
 20 mm, 34 mm, 36 mm, 38 mm and 40 mm. Desirably, the length of the bulbous section is at least equal to or greater than the diameter, D_1 , of the straight tubular portion 12.

The woven patterns of the tubular and the bulbous sections, which may be the same or different, include, but are not limited to, a plain weave, a basket weave, a twill weave, a
 25 velour weave, a double velour weave, satin weave, terry weave and combinations thereof. Further, yarn density, yarn denier, and yarn type may be constant or may be different between the two woven sections. Useful yarn types include, but are not limited to of multifilament, monofilament, and staple. Useful yarn material, which may be the same or different between the two woven sections, includes, but is not limited to, polyester, polypropylene,
 30 polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof.

Desirably, the warp yarns and the fill yarns are polymeric yarns, such as, but not limited to, of polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof. Preferred warp and fill yarns include single ply, 70 denier, 54

filament, twisted flat polyester; double ply, 40 denier, 27 filament, twisted set polyester; or combinations thereof.

Further, the first bulbous end may include a textile portion having an increasing
5 number of warp yarns at the rate of at least three or more warp yarns for every two of the fill
yarns for tubular woven portions and three or more warp yarns for every four of the fill yarns
for flat woven fabric portions, such as the petal-like projections, and, optionally, a textile
portion having a decreasing number of warp yarns at the rate of at least three warp yarns or
greater for every two of the fill yarns for tubular sections or for every four of the fill yarns for
10 the fabric or sheet-like sections. The bulbous section may be formed by threadingly engaging
additional warp yarns.

The implantable graft of the present invention may be crimped, either totally or
partially. For example, the tubular woven portion may be radially crimped. The bulbous
15 woven portion may be radially crimped. The tubular and the bulbous woven portions may be
radially crimped.

The implantable graft of the present invention may further include a mechanical or
tissue heart valve securable attached to the second tubular end.
20

In one aspect of the present invention, an implantable, flat-woven multi-petaled graft
is provided. The graft includes (i) a hollow tubular woven portion having opposed first and
second tubular ends, the woven portion having a number of warp yarns interlaced with a
number of fill yarns in a flat-woven tubular woven pattern to define a flat-woven tubular
25 diameter, and (ii) a bulbous woven portion having opposed first and second ends, the first
bulbous end having a greater number of warp yarns interlaced with the fill yarns in a flat-
woven tubular bulbous pattern contiguously woven from the second tubular end to provide a
seamless woven , wherein the greater number of warp yarns are threadingly engaged with the
fill yarns to define a flat-woven bulbous diameter; wherein the second end of the bulbous
30 portion is scalloped with a plurality of petal-like projections seamlessly woven from the first
bulbous end. Desirably, the graft of the present invention may include three petal-like
projections. The bulbous woven section may be truncated, i.e., hemispherically or
hemibulbously shaped.

The graft of the present invention may be crimped. For example, the tubular portion may be circumferentially crimped. Further, the petal-like projections may be circumferentially crimped.

5 The graft of the present invention may be ravel resistant, especially the petal-like projections have edges that are desirably ravel-resistant. The ravel resistant edges may be formed by fusingly sealing the edges. The edges may include heat-fusible yarns. Such heat-fusible yarns typically include a fiber or part of a fiber, such as a sheath, having a low melting point resin, such as polyethylene. Further details of such yarns and prostheses having such
10 yarns are described in U.S. Patent No. 5,178,630 to Schmitt, the contents of which is incorporated herein by reference. Further, the edges may include an increased yarn density as compared to non-edge portions of the projections. The edges may be woven selvages, or may be cut from the bulbous second end. One method of cutting includes ultrasonic cutting which can also seal the edges from raveling, such as by ultrasonically fusing yarns disposed at the
15 edges.

Desirably, the petal-like projections are contoured. The petal-like projections may be contoured, in part, by threadingly engaging or disengaging the additional number of warp yarns from the fill yarns. Desirably, the warp yarns change at a rate of at least three or more
20 warp yarns for every four of the fill yarns, which is different from the previously described rate of change for flat woven tubular sections because the petal-like projections are flat-woven fabric or sheets, i.e., not tubular. Further, the second end of the bulbous portion may be contoured, in part, by threadingly disengaging the additional number of warp yarns from the fill yarns. The petal-like projections or the bulbous portion may be contoured to mimic
25 the shape of the sinuses of Valsalva.

The tubular woven pattern and the bulbous woven pattern may be selected from, but not limited to, a plain weave, a basket weave, a twill weave, a velour weave, a double velour weave, a satin weave, a terry weave, and combinations thereof. The warp yarns and the fill
30 yarns may include materials, such as polyester, polypropylene, polyethylene, polyurethane, polytetrafluoroethylene and combinations thereof.

Desirably, the warp or fill yarns are single ply, 70 denier, 54 filament, twisted flat polyester; double ply, 40 denier, 27 filament, twisted set polyester; or combinations thereof.

The graft of the present invention may further include a mechanical or tissue heart valve, wherein the woven petal-like projections are securably attached to the valve.

5 In another aspect of the present invention, an implantable prosthesis includes (i) a hollow tubular woven portion having opposed first and second tubular ends, the woven portion having a number of warp yarns interlaced with a number of fill yarns in a flat-woven tubular woven pattern to define a flat-woven tubular diameter; and (ii) a non-tubular woven projection seamlessly transitioned from the second tubular end. The graft may further
10 include a plurality of non-tubular projections seamlessly transitioned from the second tubular end. Desirably, the non-tubular projections are petal shaped.

A method for weaving the graft according to the present invention includes the steps of: (i) weaving a first flat-woven tubular section having opposed open ends and having a
15 number of warp yarns and a number of fill yarns interlaced in a woven pattern to define a first flat-woven diameter; (ii) providing additional warp yarns; (iii) weaving the additional warp yarns into a woven pattern with the number of fill yarns at one of the open ends of the first tubular section to define a bulbous woven section having a second flat-woven diameter, the second diameter being greater than the first diameter; and (iv) scalloping the bulbous woven
20 section to provide a multi-petaled woven end.

The step of step of scalloping the bulbous end further may further include the step of cutting the bulbous woven portion along longitudinal portions to define edges of a plurality of petal-like projections. The cutting may be ultrasonic cutting. Alternatively, the step of
25 scalloping the bulbous end may further include the step of seamlessly weaving a plurality of petal-like projections extending from the bulbous end. Such weaving may include weaving selvages to define woven edges of the petal-like projections.

The method according to the present invention may further include the step of radially
30 crimping the woven tubular and the woven bulbous sections. Further, the crimping may further include radially crimping the petal-like projections. Alternatively, the graft of the present invention may be made self supporting with crimping by including a yarn with stiff compound, typically a monofilament yarn, such as a monofilament polyester yarn.

Additionally, details are described in U.S. Patent No. 5,178,630, the contents of which are incorporated herein by reference.

- The method according to the present invention may further include the steps of (i)
- 5 providing a mechanical or tissue heart valve; and (ii) attaching the woven petal-like projections to the valve.

Any type of textile product can be used as the warp yarns and fill yarns of the present invention. Of particular usefulness in forming the woven prostheses of the present invention

10 are synthetic materials such as thermoplastic polymers. Thermoplastic yarns suitable for use in the present invention include, but are not limited to, polyesters, polypropylenes, polyethylenes, polyurethanes and polytetrafluoroethylenes. The yarns may be of the monofilament, multifilament, or stable type.

- 15 The yarns used in forming the woven grafts of the present invention may be flat, twisted, textured or set, and may have high, low or moderate shrinkage properties. Additionally, the yarn type and yarn denier can be selected to meet specific properties desired for the prosthesis, such as porosity, flexibility and compliance. The yarn denier represents the linear density of the yarn (number of grams mass divided by 9,000 meters of length).
- 20 Thus, a yarn with a small denier would correspond to a very fine yarn whereas a yarn with a larger denier, e.g., 1000, would correspond to a heavy yarn. The yarns used with the present invention may have a denier from about 20 to about 1000, preferably from about 40 to about 300. Preferably, the warp and fill yarns are polyester, and most preferably the warp and fill yarns are single ply, 70 denier, 54 filament, twisted flat polyester; double ply, 40 denier, 27
- 25 filament, twisted set polyester; or combinations thereof.

- The graft of the present invention can be woven using any known weave pattern in the art, including, simple weaves, basket weaves, twill weaves, velour weaves and the like, and is preferably woven using a double velour tubular weave pattern. Details of double velour
- 30 patterns are described in U.S. Patent No. 4,517,687 to Liebig et al., the contents of which are incorporated by reference herein. Desirably, the double velour pattern includes a satin weave where a warp yarn crosses over or under at least four fill yarns. The weave patterns may have from about 50-200 warp yarns (ends) per inch per layer and about 30-100 fill yarns (picks) per inch per layer. The wall thickness of the graft may be any conventional useful

thickness, for example from about 0.1 mm to about 1.20 mm, desirably from about 0.5 mm to about 0.9 mm.

Such a heat setting process is accomplished by first flat-weaving the graft in a tubular
5 form out of a material capable of shrinking during a heat setting process. After the graft is
woven, the graft is placed on a mandrel, and heated in an oven at a temperature and time
capable of causing the yarns of the graft to heat set to the shape and diameter of the mandrel.
Preferably polyester yarns are used as the warp and fill yarns, and the heat setting is
accomplished at time and temperatures appropriate for the material. For example, heat
10 setting can be accomplished at about 190-200° C for a period of about 14-16 minutes. Other
methods of heat setting may be employed, for example ultrasonic heat-setting, or through the
use of steam as a heating source. One useful method of ultrasonic heat setting is described in
U.S. Patent Application No. 10/822,955 titled, "Ultrasonic Crimping Of A Varied Diameter
Graft", and filed April 12, 2004, the contents of which are incorporated herein by reference.
15 After heat setting the graft can be formed into a shape desired for implantation.

The invention being thus described, it will now be evident to those skilled in the art
that the same may be varied in many ways. Such variations are not to be regarded as a
departure from the spirit and scope of the invention and all such modifications are intended to
20 be included within the scope of the following claims.

WHAT IS CLAIMED IS:

1. An implantable, flat-woven multi-petaled graft comprising:

a hollow tubular woven portion having opposed first and second tubular ends, said

5 woven portion having a number of warp yarns interlaced with a number of fill yarns in a flat-woven tubular woven pattern to define a flat-woven tubular diameter, and

a bulbous woven portion having opposed first and second ends, the first bulbous end having a greater number of warp yarns interlaced with said fill yarns in a flat-woven tubular bulbous pattern contiguously woven from said second tubular end to provide a seamless

10 woven, wherein the greater number of warp yarns are threadingly engaged with said fill yarns to define a flat-woven bulbous diameter;

wherein said second end of said bulbous portion is scalloped with a plurality of petal-like projections, preferably three petal-like projections, seamlessly woven from said first bulbous end.

15

2. The graft of claim 1, wherein said tubular portion is circumferentially crimped; and, optionally, wherein said petal-like projections are circumferentially crimped.

3. The graft of any of the preceding claims, wherein said petal-like projections
20 have edges that are ravel-resistant.

4. The graft of any of the preceding claims, wherein said petal-like projections are contoured.

25 5. The graft of any of the preceding claims, wherein said petal-like projections are contoured by threadingly engaging said additional number of warp yarns from said fill yarns.

6. The graft of any of the preceding claims, wherein said second end of said
30 bulbous portion is contoured by threadingly disengaging said additional number of warp yarns from said fill yarns.

7. The graft of any of the preceding claims, further including a mechanical or tissue heart valve, wherein said woven petal-like projections are securably attached to said valve.

5 8. The graft of any of the preceding claims, wherein said petal-like projections are contoured to mimic the shape of the sinuses of Valsalva.

9. The implantable graft of any of the preceding claims, wherein said bulbous woven section is hemispherically shaped.

10

10. A method for weaving a graft comprising:

weaving a first flat-woven tubular section having opposed open ends and having a number of warp yarns and a number of fill yarns interlaced in a woven pattern to define a first flat-woven diameter;

15 providing additional warp yarns;

weaving said additional warp yarns into a woven pattern with said number of fill yarns at one of said open ends of said first tubular section to define a bulbous woven section having a second flat-woven diameter, the second diameter being greater than the first diameter; and

20 scalloping said bulbous woven section to provide a multi-petaled woven end.

11. The method of claim 10, wherein the step of scalloping said bulbous end further comprises:

25 cutting said bulbous woven portion along longitudinal portions to define edges of a plurality of petal-like projections.

12. The method of claim 11, wherein said cutting is ultrasonic cutting.

30 13. The method of claim 10, wherein the step of scalloping said bulbous end further comprises:



seamlessly weaving a plurality of petal-like projections extending from said bulbous end.

14. The method of claim 13, further including weaving selvages to define woven edges of said petal-like projections.

15. The method of claims 10-14, further including radially crimping said woven tubular and said woven bulbous sections; and, optionally, radially crimping said petal-like projections.

16. The method of claim 10-15, further comprising the steps of:
providing a mechanical or tissue heart valve; and
attaching said woven petal-like projections to said valve.

1/1

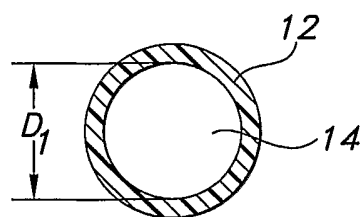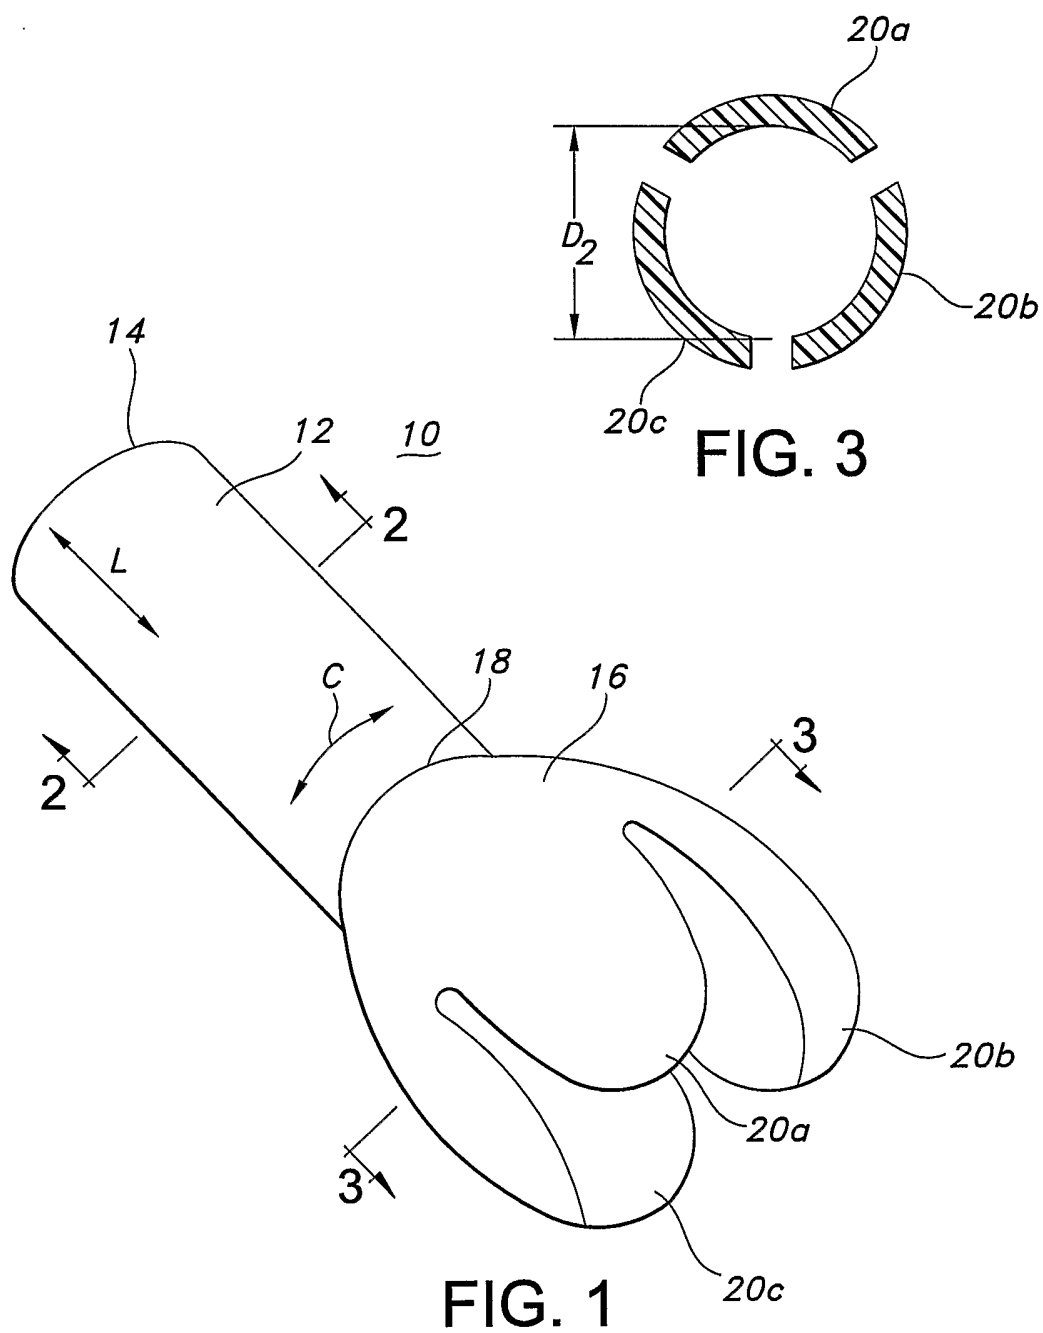

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/012207

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/24 A61F2/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	WO 01/52776 A (HEINEMAN MEDICAL RESEARCH, INC) 26 July 2001 (2001-07-26) the whole document	1-16
A	US 2001/049553 A1 (DE PAULIS RUGGERO) 6 December 2001 (2001-12-06) cited in the application the whole document	1-16
A	EP 1 230 901 A (GUNZE LIMITED; TOKYO WOMEN'S MEDICAL UNIVERSITY) 14 August 2002 (2002-08-14) the whole document	1-16
A	US 5 800 514 A (NUNEZ ET AL) 1 September 1998 (1998-09-01) cited in the application the whole document	1-16

☐ Further documents are listed in the continuation of box C

☒ Patent family members are listed in annex

° Special categories of cited documents

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 July 2005

Date of mailing of the international search report

01/08/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Skorovs, P

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US2005/012207

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0152776	A	26-07-2001	US 6544285 B1 AU 2962101 A EP 1253876 A1 WO 0152776 A1	08-04-2003 31-07-2001 06-11-2002 26-07-2001
US 2001049553	A1	06-12-2001	DE 69923368 D1 EP 0955019 A2	03-03-2005 10-11-1999
EP 1230901	A	14-08-2002	JP 2001120582 A AU 7949400 A EP 1230901 A1 US 6875230 B1 WO 0130274 A1	08-05-2001 08-05-2001 14-08-2002 05-04-2005 03-05-2001
US 5800514	A	01-09-1998	AU 729443 B2 AU 3208797 A CA 2256324 A1 CA 2422915 A1 DE 69728268 D1 DE 69728268 T2 EP 1433440 A2 EP 0910310 A1 JP 3442402 B2 JP 11511679 T WO 9743983 A1 US 6136022 A US 2003130728 A1 US 2003078650 A1 US 2003196717 A1 US 6596023 B1 US 5904714 A	01-02-2001 09-12-1997 27-11-1997 27-11-1997 29-04-2004 20-01-2005 30-06-2004 28-04-1999 02-09-2003 12-10-1999 27-11-1997 24-10-2000 10-07-2003 24-04-2003 23-10-2003 22-07-2003 18-05-1999